TEXAS INSTRUMENTS
OPA363, OPA2363, OPA364, OPA2364, OPA4364
JAJS006F – SEPTEMBER 2002 – REVISED JUNE 2018

OPAx363、OPAx364 1.8V、7MHz、90dB CMRR、単一電源、レール·ツー·レール入出力オペアンプ

1 特長

- 1.8V動作
- *Micro*Sizeパッケージ
- 帯域幅: 7MHz
- CMRR: 90dB (標準値)
- スルーレート: 5V/µs
- 低オフセット: 500µV (最大値)
- 静止電流: 750µA/チャネル (最大値)
- シャットダウン・モード: チャネルごとに1µA未満

2 アプリケーション

- 信号コンディショニング
- データ収集
- プロセス制御
- アクティブ・フィルタ
- 試験用機器

3 概要

OPA363およびOPA364ファミリは高性能のCMOSオペアンプで、非常に低い電圧の単一電源による動作に最適化されています。これらの小型低コスト・アンプは、1.8V (±0.9V)～5.5V (±2.75V)の単一電源で動作するよう設計されています。

アプリケーションとして、バッテリ駆動システムでのセンサ・アンプや信号コンディショニングが挙げられます。

OPA363およびOPA364ファミリは、従来の相補入力段で見られるようなクロスオーバーなしに、優れたCMRRを実現しています。この特長により、アナログ/デジタル(A/D)コンバータの駆動において、微分直線性やTHDの劣化なしに優れた性能を発揮できます。入力同相範囲には、負と正の電源の両方が含まれています。出力電圧のスイングは、レールから10mVの範囲内です。

OPA363ファミリにはシャットダウン・モードが搭載されています。ロジック制御により、アンプを通常の動作からスタンバイに切り替えることができ、この状態での消費電流は1µA未満です。

1チャネルのバージョンは、*Micro*Size 5ピンSOT-23 (シャットダウン用には6ピンSOT-23)および8ピンSOICで供給されます。2チャネルのバージョンは、8ピンVSSOP、10ピンVSSOP、16ピンUQFN、8ピンSOICパッケージで供給されます。4チャネルのバージョンは、14ピンTSSOPおよび14ピンSOICパッケージで供給されます。どのバージョンも、–40℃～+125℃での動作が規定されています。

製品情報(1)

型番	パッケージ	本体サイズ(公称)
OPA363	SOT-23 (6)	2.60mm×1.60mm
	SOIC (8)	4.90mm×3.91mm
OPA364	SOT-23 (5)	2.60mm×1.60mm
	SOIC (8)	4.90mm×3.91mm
OPA2363	VSSOP (10)	3.00mm×3.00mm
	UQFN (16)	2.60mm×1.80mm
OPA2364	SOIC (8)	4.90mm×3.91mm
	VSSOP (8)	3.00mm×3.00mm
OPA4364	SOIC (14)	8.65mm×3.91mm
	TSSOP (14)	5.00mm×4.40mm

(1) 提供されているすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

単一電源のマイク用プリアンプ

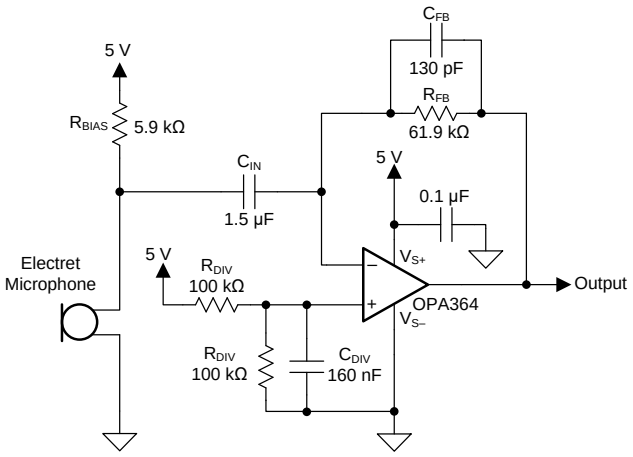

Copyright © 2017, Texas Instruments Incorporated

英語版のTI製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、www.ti.comで閲覧でき、その内容が常に優先されます。TIでは翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

目次

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 改訂履歴 ... 2
5 **Device Comparison Table** ... 4
5.1 Device Comparison Table ... 4
6 **Pin Configuration and Functions** ... 4
7 **Specifications** ... 8
7.1 Absolute Maximum Ratings ... 8
7.2 ESD Ratings ... 8
7.3 Recommended Operating Conditions ... 8
7.4 Thermal Information: OPA363 ... 9
7.5 Thermal Information: OPA364 ... 9
7.6 Thermal Information: OPA2363 ... 10
7.7 Thermal Information: OPA2364 ... 10
7.8 Thermal Information: OPA4364 ... 10
7.9 Electrical Characteristics ... 11
7.10 Typical Characteristics ... 13
8 **Detailed Description** ... 17
8.1 Overview ... 17
8.2 Functional Block Diagram ... 17
8.3 Feature Description ... 18
8.4 Device Functional Modes ... 19
9 **Application and Implementation** ... 20
9.1 Application Information ... 20
9.2 Typical Application ... 23
10 **Power Supply Recommendations** ... 26
11 **Layout** ... 26
11.1 Layout Guidelines ... 26
11.2 Layout Example ... 26
12 デバイスおよびドキュメントのサポート ... 28
12.1 デバイス・サポート ... 28
12.2 ドキュメントのサポート ... 29
12.3 関連リンク ... 29
12.4 ドキュメントの更新通知を受け取る方法 ... 29
12.5 コミュニティ・リソース ... 29
12.6 商標 ... 29
12.7 静電気放電に関する注意事項 ... 29
12.8 Glossary ... 29
13 メカニカル、パッケージ、および注文情報 ... 30

4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Revision E (January 2018) から **Revision F** に変更 **Page**

- 「*製品情報*」表でOPA363 SOT-23 (5)をSOT-23 (6)に 変更 ... 1
- 「*製品情報*」表にOPA363 SOIC (8)パッケージを 追加 ... 1
- 「*製品情報*」表でOPA364 SOT-23 (6)をSOT-23 (5)に 変更 ... 1
- 「*製品情報*」表からOPA2364 VSSOP (10)およびUQFN (16)パッケージを 削除 ... 1
- 「*製品情報*」表からOPA2363 SOIC (8)およびVSSOP (8)パッケージを 削除 ... 1

Revision D (September 2016) から **Revision E** に変更 **Page**

- 「*製品情報*」表で、OPA36xおよびOPA236xの型番をOPA364およびOPA2363に 変更 ... 1
- OPA2364デバイスを「*製品情報*」表に 追加 ... 1
- Corrected formatting of pinout drawings in *Pin Configuration and Functions* section ... 4
- Corrected formatting of pinout tables in *Pin Configuration and Functions* section ... 4
- Added a minimum value of 0 V to supply voltage parameter in *Absolute Maximum Ratings* table ... 8
- Added "([V+] – [V–])" to supply voltage parameter in *Absolute Maximum Ratings* table ... 8
- Deleted operating temperature range from *Absolute Maximum Ratings* table ... 8
- Added the word "temperature" to junction and storage temperature ranges in *Absolute Maximum Ratings* table ... 8
- Added "([V+] – [V–])" to supply voltage parameter in *Recommended Operating Conditions* table ... 8
- Changed output voltage swing parameter units from V to mV ... 11
- Deleted temperature range section of *Electrical Characteristics* table ... 11
- Changed PSRR test condition from V_{CM} = 0 to V_{CM} = (V–) in *Electrical Characteristics* table ... 11
- Deleted *Buffered Reference Voltage* subsection in *Application Information* section ... 20
- Changed Figure 33 ... 26
- Added Figure 34 ... 27

Copyright © 2002–2018, Texas Instruments Incorporated

- 変更 データシート全体で"IC"を"デバイス"に 28

Revision C (May 2013) から Revision D に変更 **Page**

- 「*ESD定格*」表、「*機能説明*」セクション、「*デバイスの機能モード*」セクション、「*アプリケーションと実装*」セクション、「*電源に関する推奨事項*」セクション、「*レイアウト*」セクション、「*デバイスおよびドキュメントのサポート*」セクション、「*メカニカル、パッケージ、および注文情報*」セクション 追加 1
- データシートの末尾にあるPOAを参照し、「*パッケージおよび注文情報*」セクションを 削除 1

Revision B (February 2003) から Revision C に変更 **Page**

- データシートを現行フォーマットに変換 1
- RSVパッケージ(UQFN-16)をデータシートに 追加 1
- Added text to last bullet of *Layout Guidelines* section 26

Copyright © 2002–2018, Texas Instruments Incorporated

5 Device Comparison Table

5.1 Device Comparison Table

	OPA363	OPA364	OPA2363	OPA2364	OPA4364
SOT-23-5		X			
SOT-23-6 (shutdown)	X				
MSOP-8				X	
MSOP-10			X		
SO-8	X	X		X	
TSSOP-14					X
SO-14					X
UQFN-16			X		

6 Pin Configuration and Functions

OPA363: DBV Package
6-Pin SOT-23
Top View



(1) Orient according to marking.

OPA363: D Package
8-Pin SOIC
Top View



NC- no internal connection

Pin Functions: OPA363

PIN			I/O	DESCRIPTION
NAME	SOIC	SOT-23		
Enable	8	5	I	Enable
–IN	2	4	I	Negative (inverting) input
+IN	3	3	I	Positive (noninverting) input
NC	1, 5	—	—	No internal connection (can be left floating)
V_{OUT}	6	1	O	Output
V–	4	2	—	Negative (lowest) power supply
V+	7	6	—	Positive (highest) power supply

Copyright © 2002–2018, Texas Instruments Incorporated

OPA2363: DGS Package
10-Pin MSOP
Top View

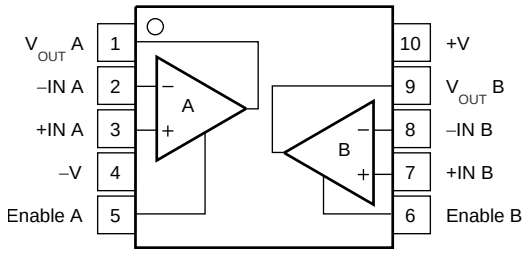

OPA2363: RSV Package
16-Pin UQFN
Top View

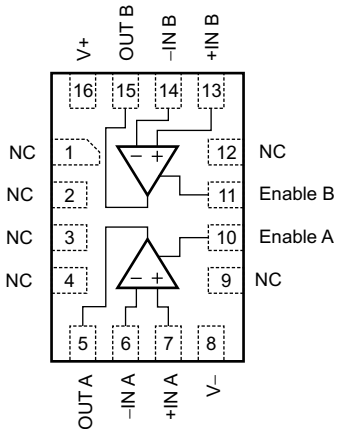

NC- no internal connection

Pin Functions: OPA2363

PIN			I/O	DESCRIPTION
NAME	MSOP	UQFN		
Enable A	5	10	I	Enable A amplifier
Enable B	6	11	I	Enable B amplifier
–IN A	2	6	I	Inverting input, channel A
+IN A	3	7	I	Noninverting input, channel A
–IN B	8	14	I	Inverting input, channel B
+IN B	7	13	I	Noninverting input, channel B
NC	—	1, 2, 3, 4, 9, 12	—	No internal connection (can be left floating)
OUT A	—	5	O	Output, channel A
OUT B	—	15	O	Output, channel B
V_{OUT} A	1	—	O	Output, channel A
V_{OUT} B	9	—	O	Output, channel B
–V, V–	4	8	—	Negative (lowest) power supply
+V, V+	10	16	—	Positive (highest) power supply

Copyright © 2002–2018, Texas Instruments Incorporated

OPA364: DBV Package
5-Pin SOT-23
Top View



(1) Orient according to marking.

OPA364: D Package
8-Pin SOIC
Top View



NC - no internal connection

Pin Functions: OPA364

PIN			I/O	DESCRIPTION
NAME	SOIC	SOT-23		
–IN	2	4	I	Negative (inverting) input
+IN	3	3	I	Positive (noninverting) input
NC	1, 5, 8	—	—	No internal connection (can be left floating)
V_{OUT}	6	1	O	Output
V–	4	2	—	Negative (lowest) power supply
V+	7	5	—	Positive (highest) power supply

OPA2364: DGK and D Packages
8-Pin MSOP and SOIC
Top View

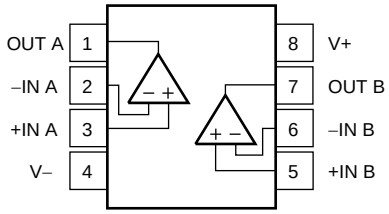

Pin Functions: OPA2364

PIN		I/O	DESCRIPTION
NAME	NO.		
–IN A	2	I	Inverting input, channel A
+IN A	3	I	Noninverting input, channel A
–IN B	6	I	Inverting input, channel B
+IN B	5	I	Noninverting input, channel B
OUT A	1	O	Output, channel A
OUT B	7	O	Output, channel B
V–	4	—	Negative (lowest) power supply
V+	8	—	Positive (highest) power supply

Copyright © 2002–2018, Texas Instruments Incorporated

OPA4364: D and PW Packages
14-Pin SOIC and TSSOP
Top View

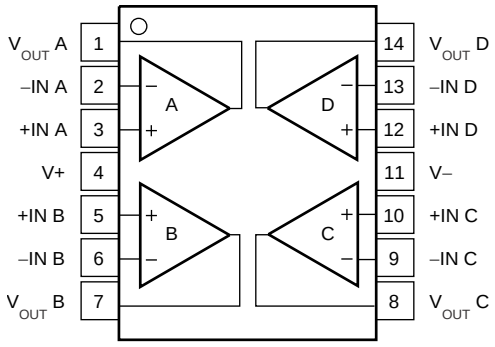

NC- no internal connection.

Pin Functions: OPA4364

PIN		I/O	DESCRIPTION
NAME	NO.		
–IN A	2	I	Inverting input, channel A
+IN A	3	I	Noninverting input, channel A
–IN B	6	I	Inverting input, channel B
+IN B	5	I	Noninverting input, channel B
–IN C	9	I	Inverting input, channel C
+IN C	10	I	Noninverting input, channel C
–IN D	13	I	Inverting input, channel D
+IN D	12	I	Noninverting input, channel D
V_{OUT} A	1	O	Output, channel A
V_{OUT} B	7	O	Output, channel B
V_{OUT} C	8	O	Output, channel C
V_{OUT} D	14	O	Output, channel D
V–	11	—	Negative (lowest) power supply
V+	4	—	Positive (highest) power supply

Copyright © 2002–2018, Texas Instruments Incorporated

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Voltage	Supply ([V+] – [V–])	0	5.5	V
	Signal input pin(2)	−0.5	(V+) + 0.5	
Current	Signal input pin(2)	–10	10	mA
	Output short-circuit(3)	Continuous		mA
Junction temperature, T_J			150	°C
Storage temperature, T_{stg}		–65	150	

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails must be current limited to 10 mA or less.
(3) Short-circuit to ground, one amplifier per package.

7.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101(2)	±750	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
	Supply voltage ([V+] – [V–])	1.8		5.5	V
T_A	Operating temperature	–40		125	°C

Copyright © 2002–2018, Texas Instruments Incorporated

7.4 Thermal Information: OPA363

THERMAL METRIC(1)		OPA363 DBV (SOT-23) 5 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	211.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	137	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	39.8	°C/W
ψ_{JT}	Junction-to-top characterization parameter	20.6	°C/W
ψ_{JB}	Junction-to-board characterization parameter	38.9	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

7.5 Thermal Information: OPA364

THERMAL METRIC(1)		OPA364 DBV (SOT-23) 6 PINS	OPA364 D (SOIC) 8 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	182.7	125.3	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	130.7	73.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	34.1	65.7	°C/W
ψ_{JT}	Junction-to-top characterization parameter	24.8	25.4	°C/W
ψ_{JB}	Junction-to-board characterization parameter	33.5	65.2	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	—	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2002–2018, Texas Instruments Incorporated

7.6 Thermal Information: OPA2363

THERMAL METRIC(1)		OPA2363				UNIT
		D (SOIC)	DGK (VSSOP)	DGS (VSSOP)	UQFN (RSV)	
		8 PINS	8 PINS	10 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	125.3	171.8	166.4	112.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	73.7	63.2	55.9	44	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	65.7	92.4	86.6	41.2	°C/W
ψ_{JT}	Junction-to-top characterization parameter	25.4	9.5	6.8	0.8	°C/W
ψ_{JB}	Junction-to-board characterization parameter	65.2	91	85.2	41.2	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	—	—	—	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

7.7 Thermal Information: OPA2364

THERMAL METRIC(1)		OPA2364				UNIT
		D (SOIC)	DGK (VSSOP)	DGS (VSSOP)	UQFN (RSV)	
		8 PINS	8 PINS	10 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	125.3	171.8	166.4	112.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	73.7	63.2	55.9	44	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	65.7	92.4	86.6	41.2	°C/W
ψ_{JT}	Junction-to-top characterization parameter	25.4	9.5	6.8	0.8	°C/W
ψ_{JB}	Junction-to-board characterization parameter	65.2	91	85.2	41.2	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	—	—	—	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

7.8 Thermal Information: OPA4364

THERMAL METRIC(1)		OPA4364		UNIT
		D (SOIC)	PW (TSSOP)	
		14 PINS	14 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	82.6	107.5	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	41.1	31.9	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	37.1	50.6	°C/W
ψ_{JT}	Junction-to-top characterization parameter	9.4	1.9	°C/W
ψ_{JB}	Junction-to-board characterization parameter	36.8	49.9	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	—	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2002–2018, Texas Instruments Incorporated

7.9 Electrical Characteristics

at T_A = 25°C, R_L = 10 kΩ connected to V_S / 2, V_{OUT} = V_S / 2, and V_{CM} = V_S / 2, V_S = 1.8 V to 5.5 V, (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V_{OS}	Input offset voltage	V_S = 5 V (OPA363I, OPA364I)				500	µV
		OPA2363I, OPA2364I				900	µV
		OPA363AI, OPA364AI, OPA2363AI, OPA2364AI, OPA4364AI			1	2.5	mV
dV_{OS}/dT	Drift	T_A = –40°C to +125°C			3		µV/°C
PSRR	Input offset voltage vs power supply	V_S = 1.8 V to 5.5 V V_{CM} = (V–) T_A = –40°C to +125°C			80	330	µV/V
	Channel separation, DC				1		µV/V
INPUT BIAS CURRENT							
I_B	Input bias current	T_A = 25°C			±1	±10	pA
		T_A = –40°C to +125°C		See *Typical Characteristics*			
I_{OS}	Input offset current				±1	±10	pA
NOISE							
e_n	Input voltage noise,	f = 0.1 Hz to 10 Hz			10		$µV_{PP}$
e_n	Input voltage noise density	f = 10 kHz			17		$nV/\sqrt{Hz}$
i_n	Input current noise density	f = 10 kHz			0.6		$fA/\sqrt{Hz}$
INPUT VOLTAGE RANGE							
V_{CM}	Common-mode voltage range			(V–) – 0.1		(V+) + 0.1	V
CMRR	Common-mode rejection ratio	(V–) – 0.1 V < V_{CM} < (V+) + 0.1 V T_A = –40°C to +125°C		74	90		dB
INPUT CAPACITANCE							
	Differential				2		pF
	Common-mode				3		pF
OPEN-LOOP GAIN							
A_{OL}	Open-loop voltage gain	R_L = 10 kΩ 100 mV < V_O < (V+) – 100 mV	T_A = 25°C	94	100		dB
			T_A = 25°C (OPA4364)	90			dB
		R_L = 10 kΩ 100 mV < V_O < (V+) – 100 mV	V_S = 1.8 V to 5.5 V T_A = –40°C to +125°C	86			dB
FREQUENCY RESPONSE							
GBW	Gain-bandwidth product	C_L = 100 pF			7		MHz
SR	Slew rate	C_L = 100 pF, G = 1			5		V/µs
t_S	Settling time	0.1%, C_L = 100 pF, V_S = 5 V, 4-V step, G = 1			1		µs
		0.01%, C_L = 100 pF, V_S = 5 V, 4-V step, G = 1			1.5		µs
	Overload recovery time	C_L = 100 pF V_{IN} × Gain > V_S			0.8		µs
THD+N	Total harmonic distortion + noise	C_L = 100 pF, V_S = 5 V, G = 1, f = 20 Hz to 20 kHz			0.002%		
OUTPUT							
	Voltage output swing	R_L = 10 kΩ, T_A = 25°C			10	20	mV
		R_L = 10 kΩ T_A = –40°C to +125°C				20	mV
I_{SC}	Short-circuit current			See *Typical Characteristics*			
C_{LOAD}	Capacitive load drive			See *Typical Characteristics*			
SHUTDOWN (OPA363)							
t_{OFF}	Turnoff time				1		µs
t_{ON}	Turnon time (1)				20		µs
V_L	Logic low threshold	Shutdown				(V–) + 0.8	V
V_H	Logic high threshold	Amplifier is active		0.75 (V+)		5.5	V
$I_{Q(sd)}$	Quiescent current at shutdown (per amplifier)					0.9	µA

(1) Part is considered enabled when input offset voltage returns to specified range.

Copyright © 2002–2018, Texas Instruments Incorporated

Electrical Characteristics (continued)

at T_A = 25°C, R_L = 10 kΩ connected to V_S / 2, V_{OUT} = V_S / 2, and V_{CM} = V_S / 2, V_S = 1.8 V to 5.5 V, (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER SUPPLY						
V_S	Specified voltage range		1.8		5.5	V
I_Q	Quiescent current (per amplifier)	V_S = 1.8 V T_A = –40°C to +125°C		650	750	µA
		V_S = 3.6 V T_A = –40°C to +125°C		850	1000	µA
		V_S = 5.5 V T_A = –40°C to +125°C		1.1	1.4	mA

Copyright © 2002–2018, Texas Instruments Incorporated

7.10 Typical Characteristics

at T_A = 25°C, R_L = 10 kΩ connected to V_S / 2, V_{OUT} = V_S / 2, and V_{CM} = V_S / 2, (unless otherwise noted)

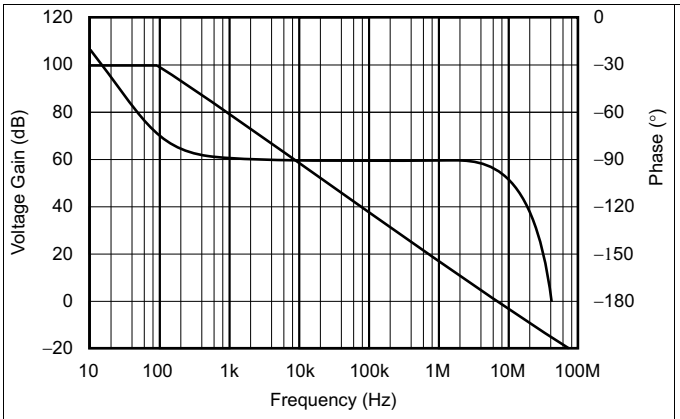

Figure 1. Open-Loop Gain and Phase vs Frequency

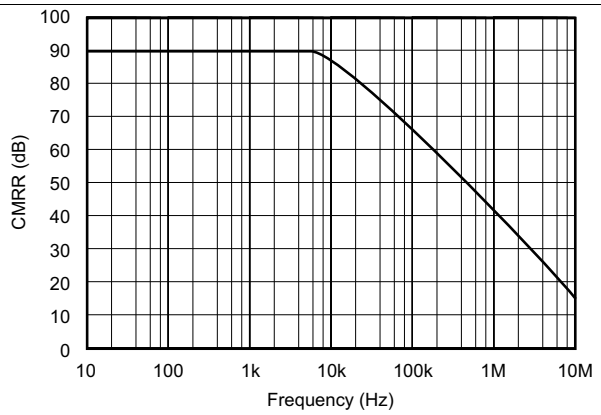

Figure 2. Common-Mode Rejection Ratio vs Frequency

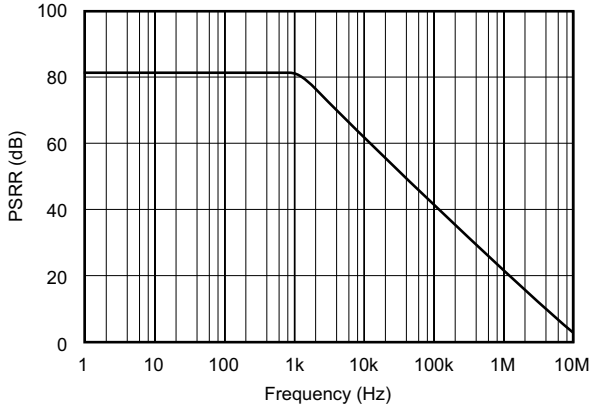

Figure 3. Power-Supply Rejection Ratio vs Frequency

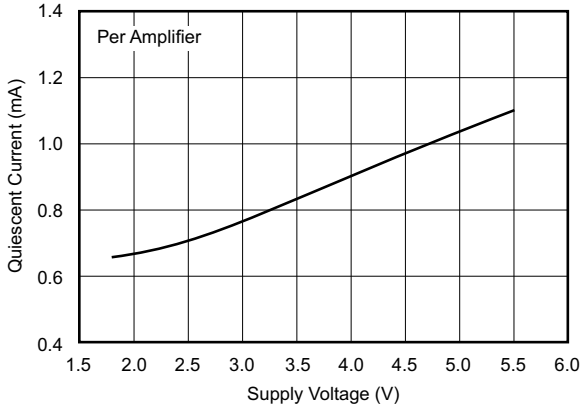

Figure 4. Quiescent Current vs Supply Voltage

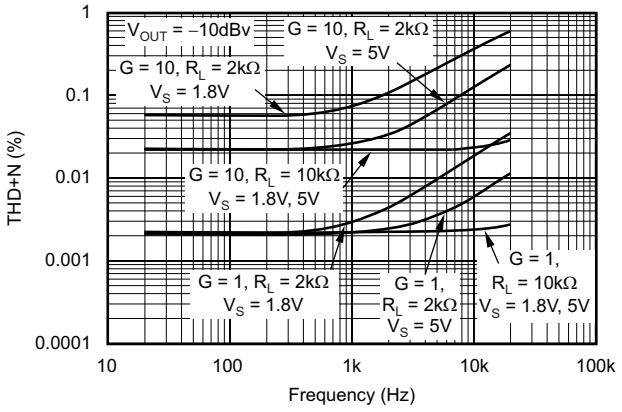

Figure 5. Total Harmonic Distortion + Noise Ratio vs Frequency

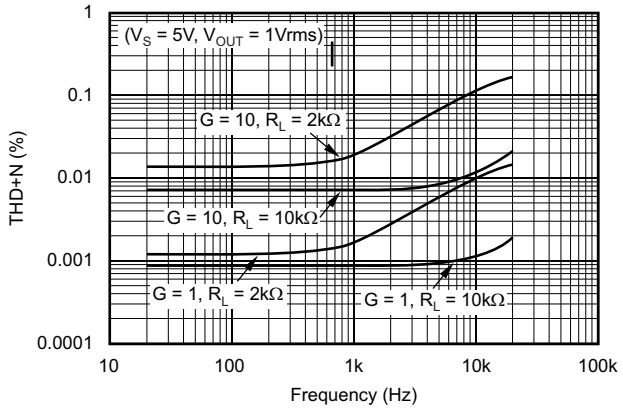

Figure 6. Total Harmonic Distortion + Noise Ratio vs Frequency

Typical Characteristics (continued)

at T_A = 25°C, R_L = 10 kΩ connected to V_S / 2, V_{OUT} = V_S / 2, and V_{CM} = V_S / 2, (unless otherwise noted)

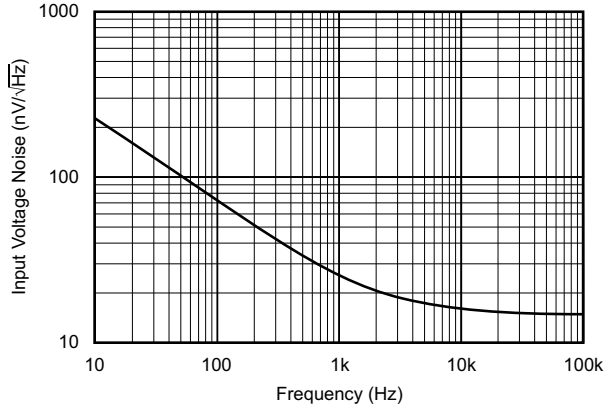

Figure 7. Input Voltage Noise Spectral Density vs Frequency

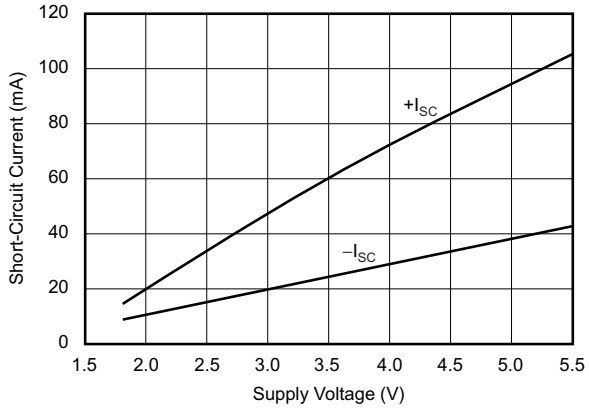

Figure 8. Short-Circuit Current vs Supply Voltage

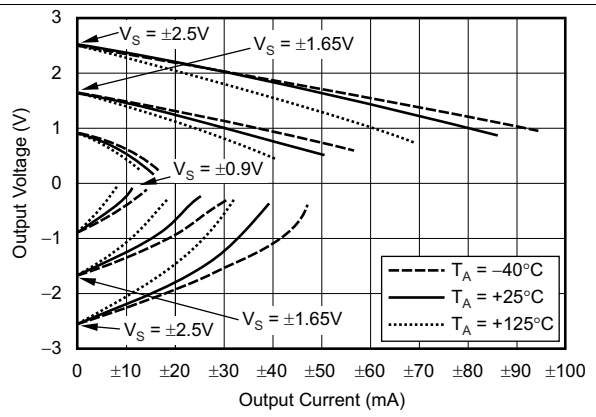

Figure 9. Output Voltage Swing vs Output Current

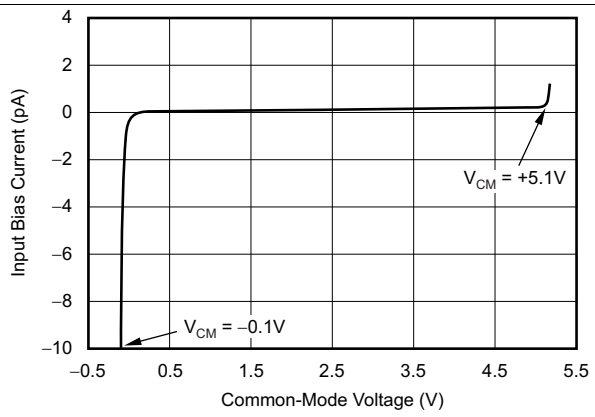

Figure 10. Input Bias Current vs Input Common-Mode Voltage

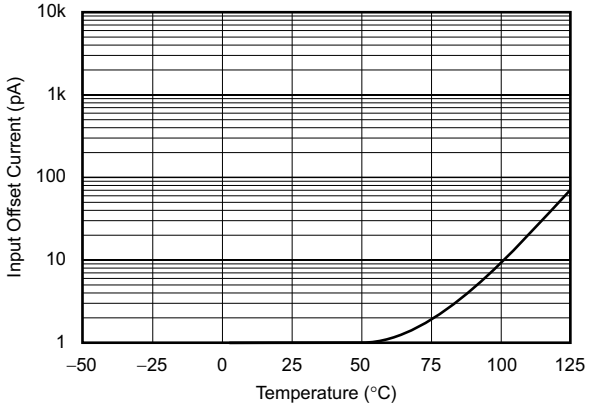

Figure 11. Input Offset Current vs Temperature

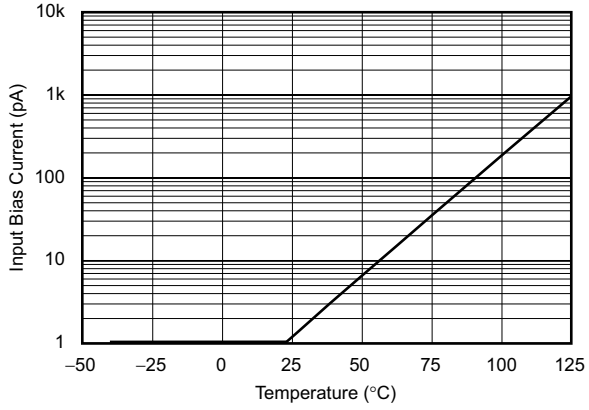

Figure 12. Input Bias Current vs Temperature

Copyright © 2002–2018, Texas Instruments Incorporated

Typical Characteristics (continued)

at T_A = 25°C, R_L = 10 kΩ connected to V_S / 2, V_{OUT} = V_S / 2, and V_{CM} = V_S / 2, (unless otherwise noted)

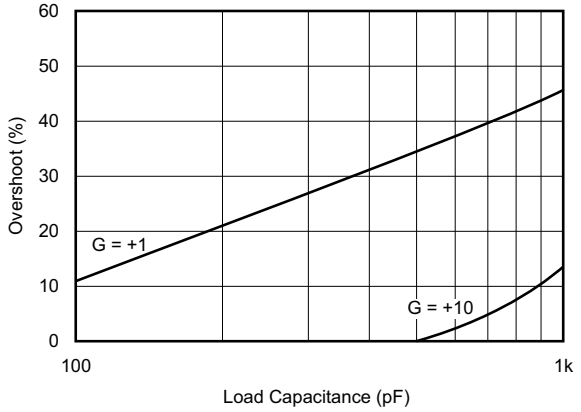

Figure 13. Small-Signal Overshoot vs Load Capacitance

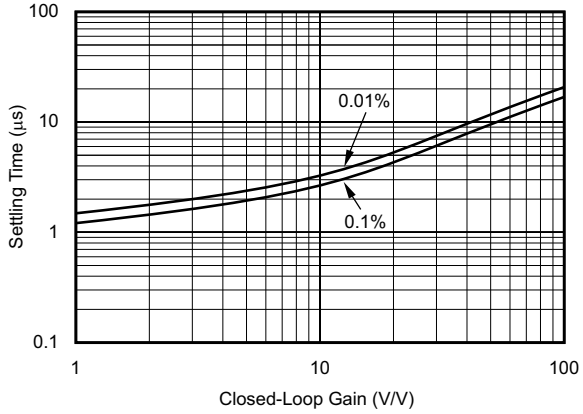

Figure 14. Settling Time vs Closed-Loop Gain

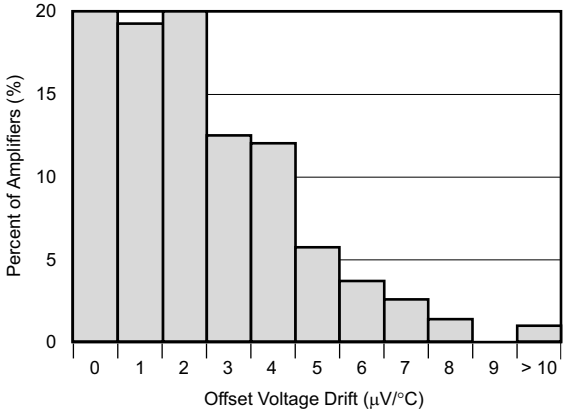

Figure 15. Offset Drift Distribution

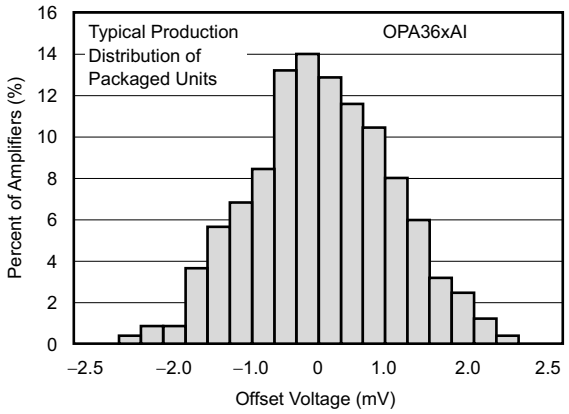

Figure 16. Offset Voltage Production Distribution

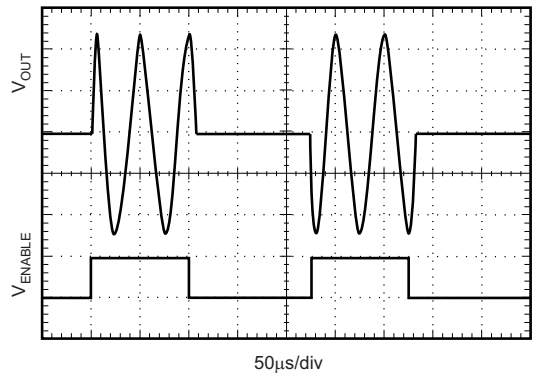

Figure 17. Output Enable Characteristic (V_S = 5 V, V_{OUT} = 20-kHz Sinusoid)

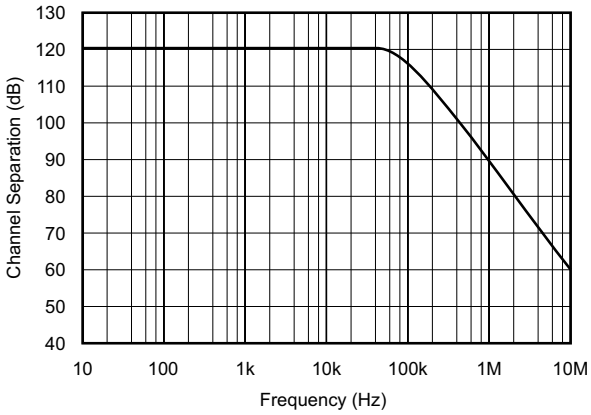

Figure 18. Channel Separation vs Frequency

Copyright © 2002–2018, Texas Instruments Incorporated

Typical Characteristics (continued)

at T_A = 25°C, R_L = 10 kΩ connected to V_S / 2, V_{OUT} = V_S / 2, and V_{CM} = V_S / 2, (unless otherwise noted)

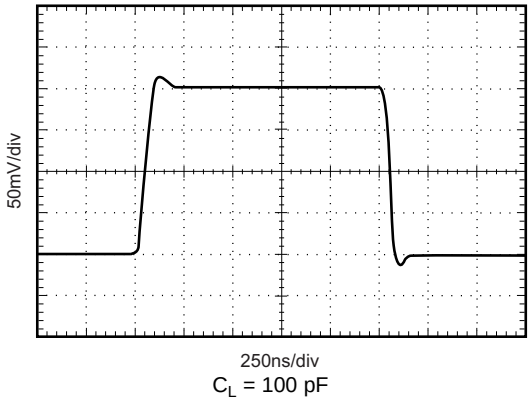

Figure 19. Small-Signal Step Response

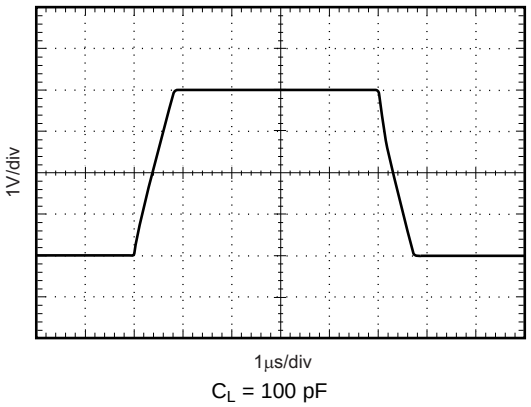

Figure 20. Large-Signal Step Response

Copyright © 2002–2018, Texas Instruments Incorporated

8 Detailed Description

8.1 Overview

The OPA363 and OPA364 series op amps are rail-to-rail operational amplifiers with excellent CMRR, low noise, low offset, and wide bandwidth on supply voltages as low as ±0.9 V. The OPA363 features an additional pin for a shutdown and enable function. These families do not exhibit phase reversal and are unity-gain stable. Specified over the industrial temperature range of –40°C to +125°C, the OPA363 and OPA364 families offer precision performance for a wide range of applications.

8.2 Functional Block Diagram

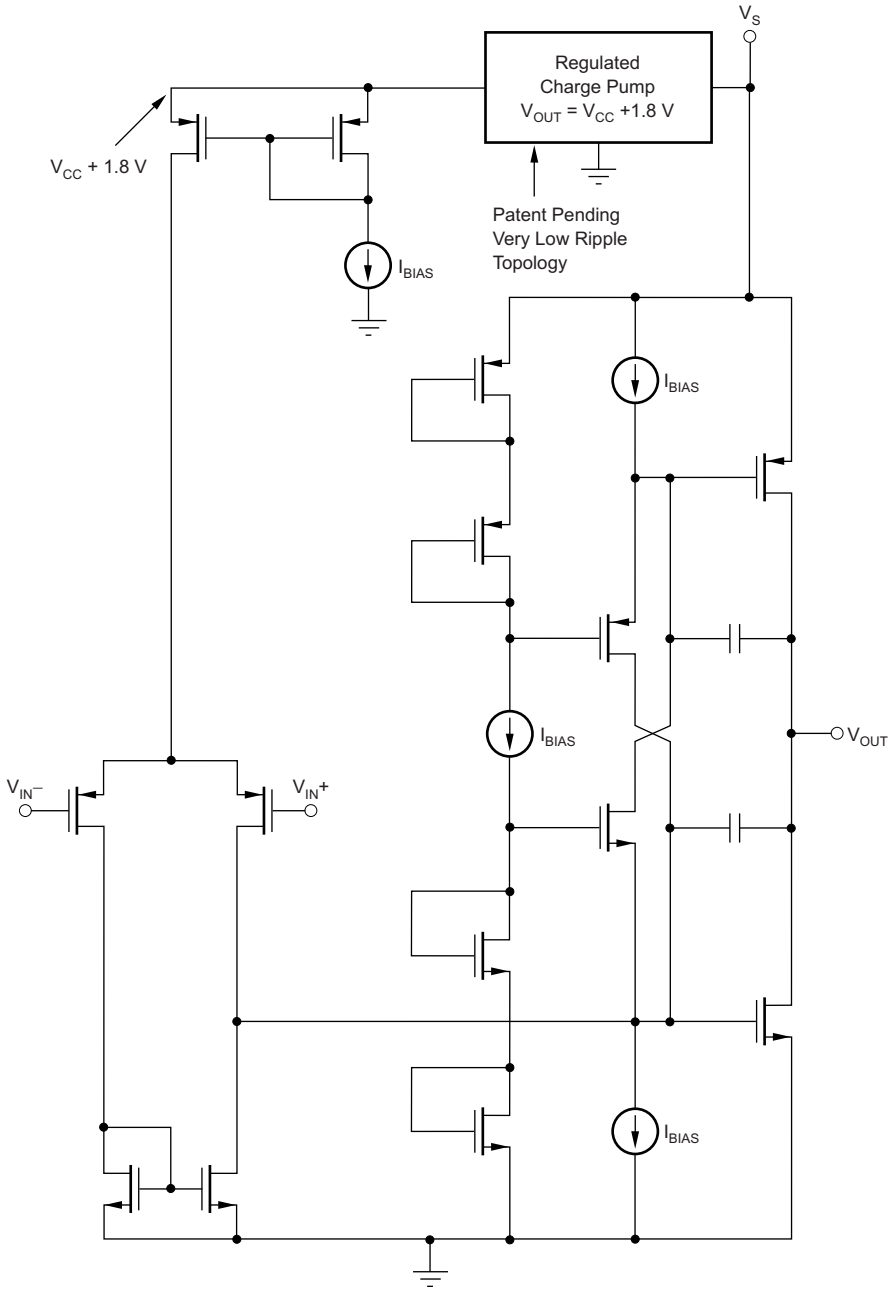

Copyright © 2017, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Rail-to-Rail Input

The OPA363 and OPA364 feature excellent rail-to-rail operation, with supply voltages as low as ±0.9 V. The input common-mode voltage range of the OPA363 and OPA364 family extends 100 mV beyond supply rails. The unique input topology of the OPA363 and OPA364 eliminates the input offset transition region typical of most rail-to-rail, complementary stage operational amplifiers, allowing the OPA363 and OPA364 to provide superior common-mode performance over the entire common-mode input range, as seen in Figure 21. This feature prevents degradation of the differential linearity error and THD when driving A/D converters. A simplified schematic of the OPA363 and OPA364 is shown in the *Functional Block Diagram*.

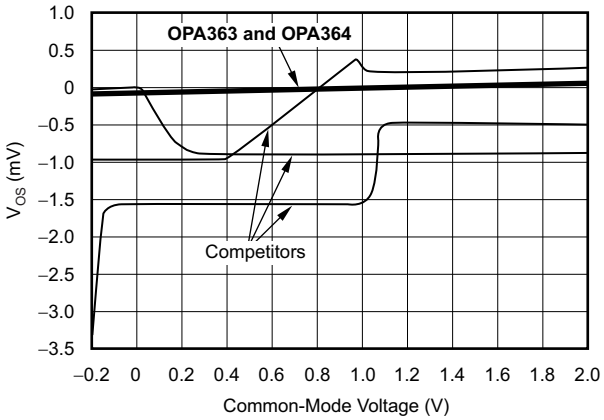

Figure 21. OPA363 and OPA364 Have Linear Offset Over Entire Common-Mode Range

8.3.2 Operating Voltage

The OPA363 and OPA364 series op amp parameters are fully specified from 1.8 V to 5.5 V. Single 0.1-µF bypass capacitors must be placed across supply pins and as close to the part as possible. Supply voltages higher than 5.5 V (absolute maximum) may cause permanent damage to the amplifier. Many specifications apply from –40°C to +125°C. Parameters that vary significantly with operating voltages or temperature are shown in the *Typical Characteristics*.

8.3.3 Capacitive Load

The OPAx363 and OPAx364 series op amps can drive a wide range of capacitive loads. However, all op amps under certain conditions may become unstable. Op amp configuration, gain, and load value are a few of the factors to consider when determining stability. An op amp in unity-gain configuration is the most susceptible to the effects of capacitive load. The capacitive load reacts with the output resistance of the op amp to create a pole in the small-signal response, which degrades the phase margin.

In unity gain, the OPAx363 and OPAx364 series op amps perform well with a pure capacitive load up to approximately 1000 pF. The equivalent series resistance (ESR) of the loading capacitor may be sufficient to allow the OPA363 and OPA364 to directly drive very large capacitive loads (greater than 1 µF). Increasing gain enhances the ability of the amplifier to drive more capacitance; see Figure 13.

One method of improving capacitive load drive in the unity-gain configuration is to insert a 10-Ω to 20-Ω resistor in series with the output, as shown in Figure 22. This resistor significantly reduces ringing with large capacitive loads. However, if there is a resistive load in parallel with the capacitive load, the load creates a voltage divider, introduces a DC error at the output, and slightly reduces output swing. This error may be insignificant. For example, with R_L = 10 kΩ and R_S = 20 Ω, there is an approximate 0.2% error at the output.

Copyright © 2002–2018, Texas Instruments Incorporated

Feature Description (continued)

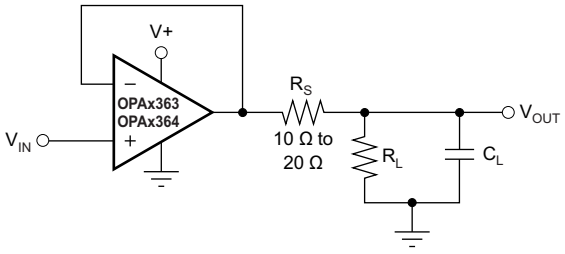

Copyright © 2017, Texas Instruments Incorporated

Figure 22. Improving Capacitive Load Drive

8.3.4 Input and ESD Protection

All OPAx363 and OPAx364 pins are static-protected with internal ESD protection diodes tied to the supplies. These diodes provide overdrive protection if the current is externally limited to 10 mA, as shown in the *Absolute Maximum Ratings* and shown in Figure 23.

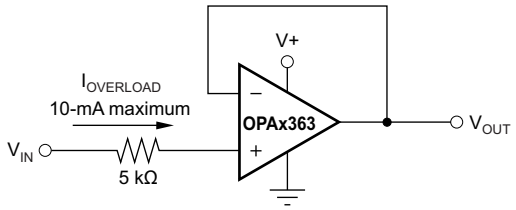

Copyright © 2017, Texas Instruments Incorporated

Figure 23. Input Current Protection

8.4 Device Functional Modes

8.4.1 Enable Function

The shutdown (enable) function of the OPAx363 is referenced to the negative supply voltage of the operational amplifier. A logic level HIGH enables the op amp. A valid logic HIGH is defined as voltage greater than 75% of the positive supply applied to the enable pin. The valid logic HIGH signal can be as much as 5.5 V above the negative supply, independent of the positive supply voltage. A valid logic LOW is defined as less than 0.8 V above the negative supply pin. If dual or split power supplies are used, take care to ensure that logic input signals are properly referred to the negative supply voltage. This pin must be connected to a valid high or low voltage or driven, not left open-circuit.

The logic input is a high-impedance CMOS input. Dual op amps are provided separate logic inputs. For battery-operated applications, this feature reduces the average current and extend battery life. The enable time is 20 μs; disable time is 1 μs. When disabled, the output assumes a high-impedance state. This configuration allows the OPAx363 to operate as a *gated* amplifier, or to have the output multiplexed onto a common analog output bus.

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 Achieving Output Swing to the Op Amp Negative Rail

Some applications require an accurate output voltage swing from 0 V to a positive full-scale voltage. A good single-supply op amp may be able to swing within a few millivolts of single-supply ground, but as the output is driven toward 0 V, the output stage of the amplifier prevents the output from reaching the negative supply rail of the amplifier.

The output of the OPAx363 or OPAx364 can be made to swing to ground, or slightly below, on a single-supply power source. To do so requires use of another resistor and an additional, more negative power supply than the op amp negative supply. A pulldown resistor may be connected between the output and the additional negative supply to pull the output down below the value that the output would otherwise achieve, as shown in Figure 24.

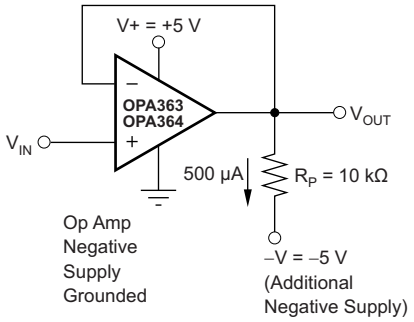

Copyright © 2017, Texas Instruments Incorporated

Figure 24. OPA363 and OPA364 Swing to Ground

This technique does not work with all op amps. The output stage of the OPAx363 and OPA3x64 allows the output voltage to be pulled below that of most op amps, if approximately 500 µA is maintained through the output stage. To calculate the appropriate value load resistor and negative supply, R_L = –V / 500 µA. The OPAx363 and OPAx364 are characterized to perform well under the described conditions, maintaining excellent accuracy down to 0 V and as low as –10 mV. Limiting and nonlinearity occur below –10 mV, with linearity returning as the output is again driven above –10 mV.

9.1.2 Directly Driving the ADS8324 and the MSP430

The OPAx363 and OPAx364 series op amps are optimized for driving medium speed (up to 100-kHz) sampling A/D converters. However, they also offer excellent performance for higher speed converters. The no-crossover input stage of the OPAx363 and OPAx364 directly drive A/D converters without degradation of differential linearity and THD. They provide an effective means of buffering the A/D converter input capacitance and resulting charge injection while providing signal gain. Figure 25 and Figure 26 show the OPAx363 and OPAx364 configured to drive the ADS8324 and the 12-bit A/D converter on the MSP430.

Copyright © 2002–2018, Texas Instruments Incorporated

Application Information (continued)

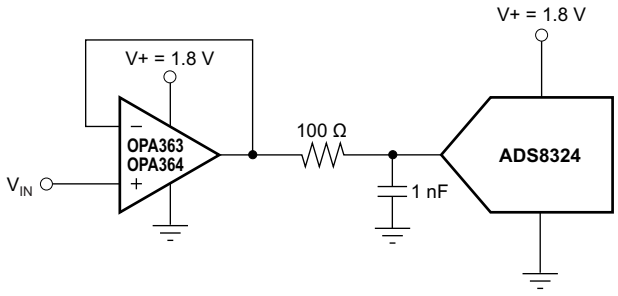

Copyright © 2017, Texas Instruments Incorporated

Figure 25. OPAx363 and OPAx364 Directly Drive the ADS8324

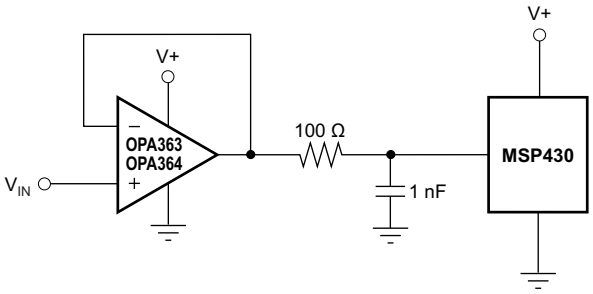

Copyright © 2017, Texas Instruments Incorporated

Figure 26. Driving the 12-Bit A/D Converter on the MSP430

9.1.3 Audio Applications

The OPAx363 and OPAx364 op amp family has linear offset voltage over the entire input common-mode range. Combined with low noise, this feature makes the OPAx363 and OPAx364 suitable for audio applications. Single-supply, 1.8-V operation allows the OPA2363 and OPA2364 to be optimal candidates for dual stereo-headphone drivers and microphone preamplifiers in portable stereo equipment; see Figure 27 and Figure 28.

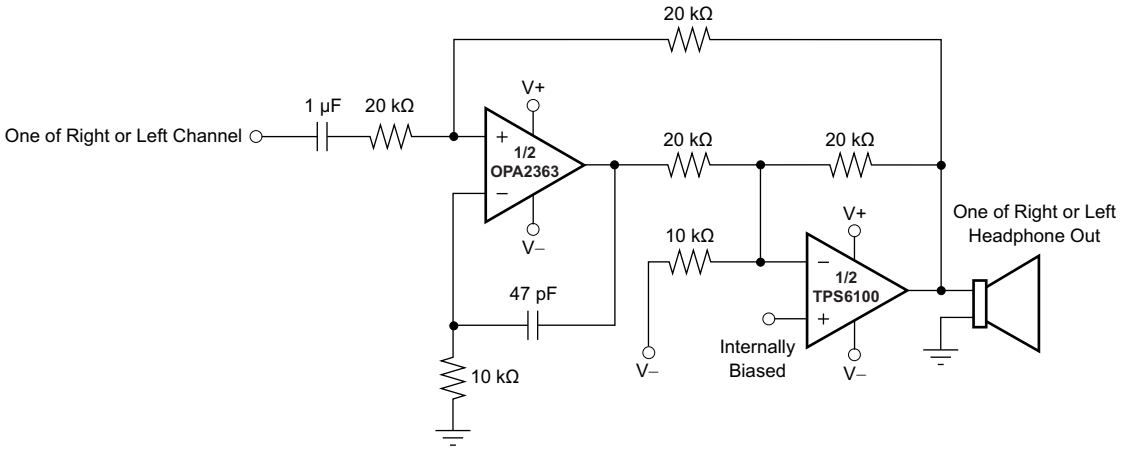

Copyright © 2017, Texas Instruments Incorporated

Figure 27. OPA2363 Configured as Half of a Dual Stereo-Headphone Driver

Application Information (continued)

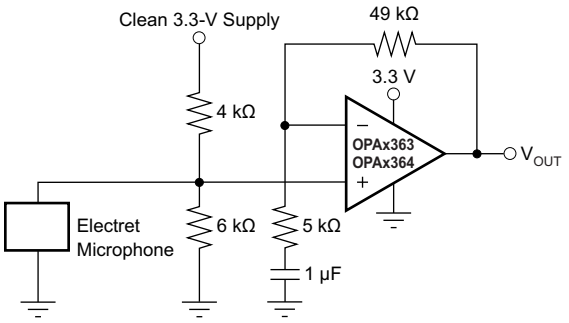

Copyright © 2017, Texas Instruments Incorporated

Figure 28. Microphone Preamplifier

9.1.4 Active Filtering

Low harmonic distortion and noise specifications plus high gain and slew rate make the OPAx363 and OPAx364 optimal candidates for active filtering. Figure 29 shows the OPA2363 configured as a low-distortion, third-order general immittance converter (GIC) filter. Figure 30 shows the implementation of a Sallen-Key, 3-pole, low-pass Bessel filter.

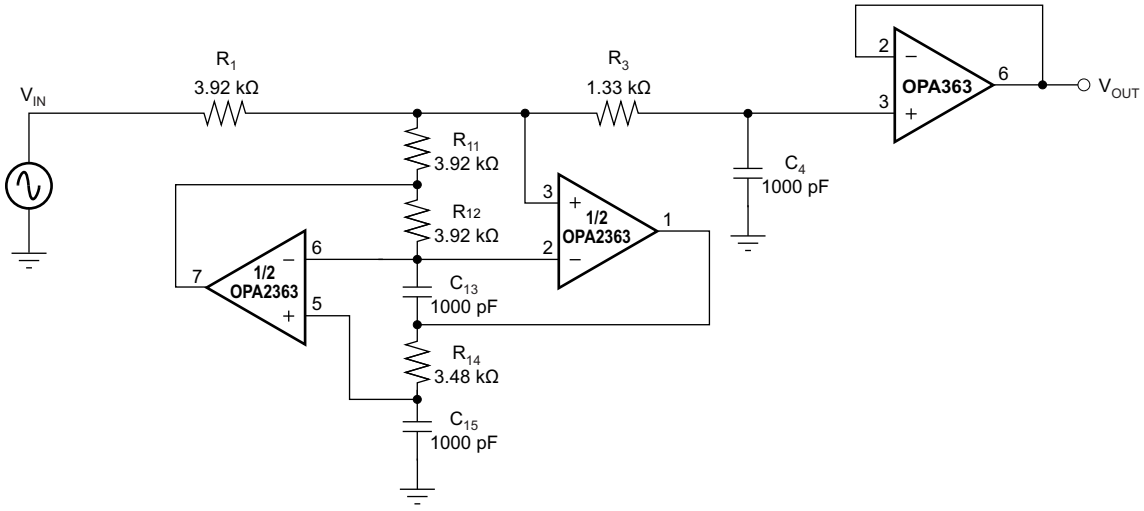

Copyright © 2017, Texas Instruments Incorporated

Figure 29. OPA2363 as a Third-Order, 40-kHz, Low-Pass GIC Filter

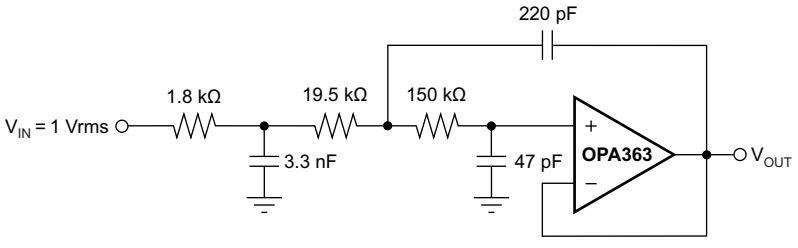

Copyright © 2017, Texas Instruments Incorporated

Figure 30. OPAx363 or OPAx364 Configured as a 3-Pole, 20-kHz, Sallen-Key Filter

Copyright © 2002–2018, Texas Instruments Incorporated

9.2 Typical Application

9.2.1 Single-Supply Electret Microphone Preamplifier

Electret microphones are commonly used in portable electronics because of their small size, low cost, and relatively good signal-to-noise ratio (SNR). The small package size and excellent AC performance of the OPA364 make it an excellent choice for preamplifier circuits for electret microphones. The circuit shown in Figure 31 is a single-supply preamplifier circuit for electret microphones.

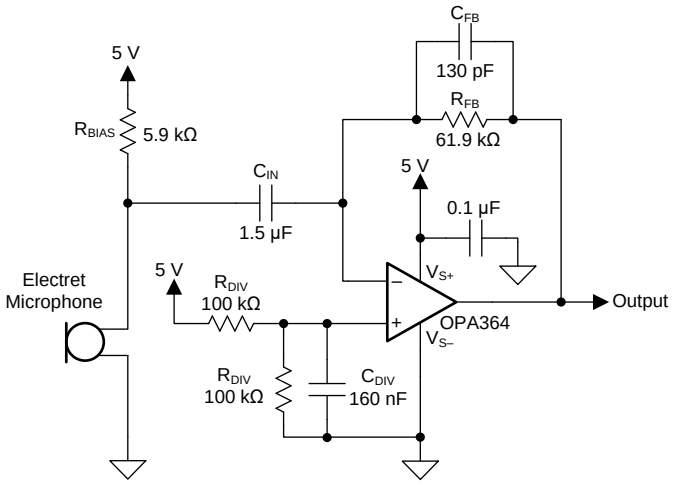

Copyright © 2017, Texas Instruments Incorporated

Figure 31. Preamplifier Circuit for Electret Microphones Using a Single-Supply Voltage

9.2.1.1 Design Requirements

- 5-V single supply
- 1-V_{RMS} output for 100-dB_{SPL} input
- 20-Hz to 20-kHz, –3-dB bandwidth
- Microphone sensitivity: 8 µA/Pa
- Microphone operating voltage: 2 V to 10 V
- Microphone bias current: 500 µA

9.2.1.2 Detailed Design Procedure

In this circuit, the op amp is configured as a transimpedance amplifier which converts the signal current of the microphone into an output voltage. The gain of the circuit is determined by the feedback resistor R_{FB}, which must be calculated according to the microphone sensitivity. For this design, a microphone output current of 8 µA per Pascal (Pa) of air pressure was chosen. Using this value, the output current for a sound pressure level of 100 dB_{SPL}, or 2 Pa air pressure, is calculated in Equation 1.

$$i_{mic} = \frac{8\ \mu A}{1\ Pa} \times 2\ Pa = 16\ \mu A \tag{1}$$

R_{FB} is then calculated from this current to produce 1-V_{RMS} output for a 100-dB_{SPL} input signal in Equation 2.

$$R_{FB} = \frac{V_O}{i_{mic}} = \frac{1\ V_{RMS}}{16\ \mu A} = 62500 \rightarrow 61.9\ k\Omega \tag{2}$$

The feedback capacitor (C_{FB}) is calculated to limit the bandwidth of the amplifier to 20 kHz in Equation 3.

$$C_{FB} = \frac{1}{2 \cdot \pi \cdot R_{FB} \cdot f_H} = \frac{1}{2 \cdot \pi \cdot (61.9\ k\Omega) \cdot (20\ kHz)} = 128.5 \times 10^{-12} \rightarrow 130\ pF \tag{3}$$

Typical Application (continued)

R_{BIAS} is required to divert the microphone signal current through capacitor C_{IN} rather than flowing from the power supply, V_{CC}. Larger values of R_{BIAS} allow for a smaller capacitor to be used for C_{IN} and reduce the overall noise of the circuit. However, the maximum value for R_{BIAS} is limited by the microphone bias current and minimum operating voltage.

The value of R_{BIAS} is calculated in Equation 4.

$$R_{BIAS} = \frac{V_{CC} - V_{MIC}}{I_{BIAS}} = \frac{5\ V - 2\ V}{500\ \mu A} = 6000 \rightarrow 5.9\ k\Omega \tag{4}$$

Input capacitor C_{IN} forms a high-pass filter in combination with resistor R_{BIAS}. The filter corner frequency calculation is shown in Equation 5 to place the high-pass corner frequency at 20 Hz.

$$C_{IN} = \frac{1}{2 \cdot \pi \cdot R_{BIAS} \cdot f_L} = \frac{1}{2 \cdot \pi \cdot (5.9\ k\Omega) \cdot (20\ Hz)} = 1.349 \times 10^{-6} \rightarrow 1.5\ \mu F \tag{5}$$

The voltage divider network at the op amp noninverting input is used to bias the op amp output to the mid-supply point (V_{CC} / 2) to maximize the output voltage range of the circuit. This result is easily achieved by selecting the same value for both resistors in the divider. The absolute value of those resistors is limited by the acceptable power-supply current drawn by the voltage divider. Selecting 25 µA as an acceptable limit of supply current gives a value of 100 kΩ for the resistors in the divider, as Equation 6 shows.

$$R_{DIV} = \frac{V_{CC}}{2 \cdot I_{DIV}} = \frac{5\ V}{2 \cdot 25\ \mu A} = 100\ k\Omega \tag{6}$$

Finally, to minimize the additional noise contribution from the voltage divider, a capacitor is placed at the op amp noninverting input. This capacitor forms a low-pass filter with the parallel combination of the voltage divider resistors. Selecting a filter corner frequency of 20 Hz minimizes the noise contribution of the voltage divider inside the amplifier passband; see Equation 7.

$$C_{DIV} = \frac{1}{2 \cdot \pi \cdot \left(\frac{R_{DIV}}{2}\right) \cdot f_L} = \frac{1}{2 \cdot \pi \cdot \left(\frac{100\ k\Omega}{2}\right) \cdot (20\ Hz)} = 1.592 \times 10^{-7} \rightarrow 160\ nF \tag{7}$$

9.2.1.3 Application Curve

The transfer function of the microphone preamplifier circuit is shown in Figure 32. The nominal gain of the circuit is 95.82 dB, or 61,800 V per amp of input current. The –3-dB bandwidth limits of the circuit are 17.99 Hz and 19.23 kHz.

Copyright © 2002–2018, Texas Instruments Incorporated

Typical Application (continued)

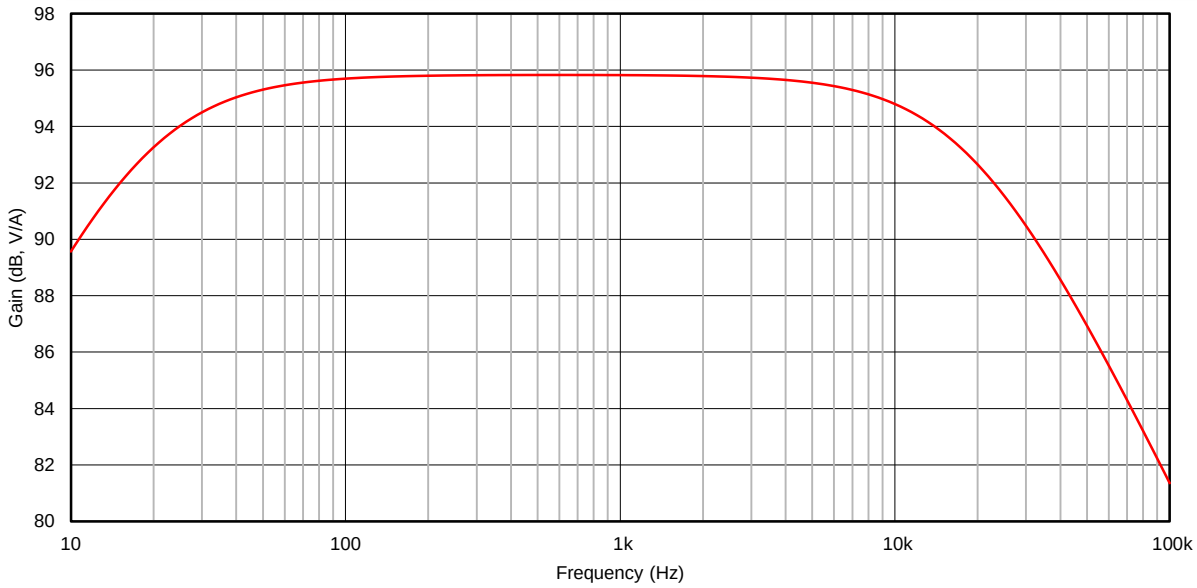

Figure 32. Microphone Preamplifier Transfer Function

Copyright © 2002–2018, Texas Instruments Incorporated

10 Power Supply Recommendations

The OPAx363 and OPAx364 are specified for operation from 2.7 V to 5.5 V (±1.35 V to ±2.75 V). Parameters that can exhibit significant variance with regard to operating voltage are presented in the *Electrical Characteristics*.

11 Layout

11.1 Layout Guidelines

For best operational performance of the device, use good printed-circuit board (PCB) layout practices, including:

- Noise can propagate into analog circuitry through the power pins of the circuit as a whole and of op amp itself. Bypass capacitors reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
  - Connect low-ESR, 0.1-µF ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable for single-supply applications.
- Separate grounding for analog and digital portions of circuitry is one of the simplest and most effective methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes. A ground plane helps distribute heat and reduces EMI noise pickup. Make sure to physically separate digital and analog grounds, paying attention to the flow of the ground current.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better as opposed to in parallel with the noisy trace.
- Place the external components as close to the device as possible. As shown in Figure 33, keeping R_F and R_G close to the inverting input minimizes parasitic capacitance.
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.
- Cleaning the PCB following board assembly is recommended for best performance.
- Any precision integrated circuit can experience performance shifts resulting from moisture ingress into the plastic package. Following any aqueous PCB cleaning process, baking the PCB assembly is recommended to remove moisture introduced into the device packaging during the cleaning process. A low temperature, post-cleaning bake at 85°C for 30 minutes is sufficient for most circumstances.

11.2 Layout Example

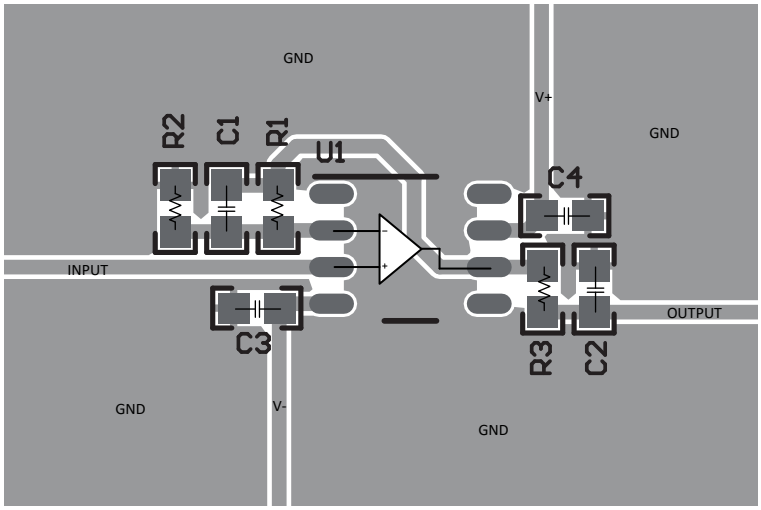

Figure 33. Operational Amplifier Board Layout for Noninverting Configuration

Copyright © 2002–2018, Texas Instruments Incorporated

Layout Example (continued)

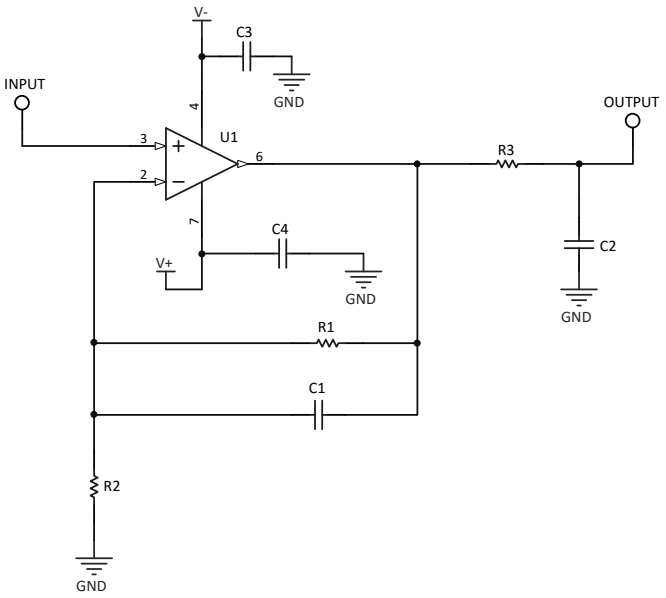

Figure 34. Layout Example Schematic

12 デバイスおよびドキュメントのサポート

12.1 デバイス・サポート

12.1.1 開発サポート

12.1.1.1 TINA-TI™ (無料のダウンロード・ソフトウェア)

TINA™は、SPICEエンジンをベースにした単純かつ強力な、使いやすい回路シミュレーション・プログラムです。また、TINA-TI™はTINAソフトウェアの無料バージョンで、完全な機能を持ち、パッシブとアクティブ両方のモデルに加えて、マクロ・モデルのライブラリがプリロードされています。TINA-TIには従来型のDC、過渡、および周波数ドメインのSPICEによる分析と、追加の設計機能が搭載されています。

TINA-TIはAnalog eLab Design Centerから無料でダウンロードでき、ユーザーが結果をさまざまな方法でフォーマットできる、広範な後処理機能を備えています。仮想計測器により、入力波形を選択し、回路ノード、電圧、および波形をプローブして、動的なクイック・スタート・ツールを作成できます。

注

これらのファイルを使用するには、TINA ソフトウェア (DesignSoft™製) またはTINA-TIソフトウェアがインストールされている必要があります。TINA-TIフォルダから、無料のTINA-TIソフトウェアをダウンロードしてください。

12.1.1.2 DIPアダプタ評価モジュール

DIPアダプタ評価モジュール・ツールを使用すると、小さな表面実装ICのプロトタイプを簡単に、低コストで作成できます。この評価ツールは、DまたはU (8ピンSOIC)、PW (8ピンTSSOP)、DGK (8ピンMSOP)、DBV (6ピンSOT-23、5ピンSOT-23、3ピンSOT-23)、DCK (6ピンSC-70および5ピンSC-70)、DRL (6ピンSOT-563) のTIパッケージに対応しています。DIPアダプタ評価モジュールは、ターミナル・ストリップとともに使用することも、既存の回路へ直接接続することもできます。

12.1.1.3 ユニバーサル・オペアンプ評価モジュール

ユニバーサル・オペアンプ評価モジュールは一連の汎用のブランクアウト回路基板で、各種のデバイス・パッケージ・タイプ向け回路のプロトタイプ作成を容易にします。この評価モジュール基板は、多くの異なる回路を簡単かつ迅速に構築できるように設計されています。5つのモデルが提供されており、それぞれのモデルは特定のパッケージ・タイプを対象としています。PDIP、SOIC、MSOP、TSSOP、SOT-23のすべてのパッケージがサポートされています。

注

これらの基板には部品が搭載されていないため、ユーザーが独自のデバイスを実装する必要があります。ユニバーサル・オペアンプ評価モジュールを注文するときに、オペアンプ・デバイスのサンプルをいくつか要求することをお勧めします。

12.1.1.4 TI Precision Designs

TI Precision Designsは、TIの高精度アナログ・アプリケーションの専門家により作成されたアナログ・ソリューションで、多くの有用な回路に関して、動作理論、コンポーネント選択、シミュレーション、完全なPCB回路図とレイアウト、部品表、性能測定結果を提供します。TI Precision Designsは、http://www.ti.com/ww/en/analog/precision-designs/からオンラインで入手できます。

12.1.1.5 WEBENCH® Filter Designer

WEBENCH® Filter Designerは単純で強力な、使いやすいアクティブ・フィルタ設計プログラムです。WEBENCH Filter Designerを使用すると、TIのベンダ・パートナーからのTI製オペアンプやパッシブ・コンポーネントを使用して、最適なフィルタ設計を作成できます。

WEBENCH® Filter Designerは、WEBENCH® Design CenterからWebベースのツールとして利用でき、包括的な複数段アクティブ・フィルタ・ソリューションをわずか数分で設計、最適化、シミュレーションできます。

Copyright © 2002–2018, Texas Instruments Incorporated

12.2 ドキュメントのサポート

12.2.1 関連資料

以下に示すドキュメントはOPAx363およびOPAx364の使用に関連しており、参照用にお勧めします。すべてのドキュメントは、特に記述のない限りwww.ti.comからダウンロードできます。

- *『AB-045 オペアンプの性能分析』*
- *『AB-067 オペアンプの単一電源動作』*
- *『AB-105 アンプのチューニング』*
- *『QFN/SONのPCB実装』*
- *『クワッド・フラットパック・リード端子なしロジック・パッケージ』*

12.3 関連リンク

次の表に、クイック・アクセス・リンクを示します。カテゴリには、技術資料、サポートおよびコミュニティ・リソース、ツールとソフトウェア、およびサンプル注文またはご購入へのクイック・アクセスが含まれます。

表 1. 関連リンク

製品	プロダクト・フォルダ	ご注文はこちら	技術資料	ツールとソフトウェア	サポートとコミュニティ
OPA363	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
OPA2363	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
OPA364	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
OPA2364	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
OPA4364	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック

12.4 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、ti.comのデバイス製品フォルダを開いてください。右上の隅にある「*通知を受け取る*」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

12.5 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™オンライン・コミュニティ ***TIのE2E (Engineer-to-Engineer) コミュニティ。*** エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイディアを検討して、問題解決に役立てることができます。

設計サポート ***TIの設計サポート*** 役に立つE2Eフォーラムや、設計サポート・ ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

12.6 商標

TINA-TI, E2E are trademarks of Texas Instruments.
WEBENCH is a registered trademark of Texas Instruments.
TINA, DesignSoft are trademarks of DesignSoft, Inc.
All other trademarks are the property of their respective owners.

12.7 静電気放電に関する注意事項

これらのデバイスは、限定的なESD（静電破壊）保護機能を内 蔵しています。保存時または取り扱い時は、MOSゲートに対す る静電破壊を防止するために、リード線同士をショートさせて おくか、デバイスを導電フォームに入れる必要があります。

12.8 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

Copyright © 2002–2018, Texas Instruments Incorporated

13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

Copyright © 2002–2018, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA2363AIDGSR	Active	Production	VSSOP (DGS) | 10	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363AIDGSR.B	Active	Production	VSSOP (DGS) | 10	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363AIDGST	Last Time Buy	Production	VSSOP (DGS) | 10	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363AIDGST.B	Last Time Buy	Production	VSSOP (DGS) | 10	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363AIRSVR	Active	Production	UQFN (RSV) | 16	3000 | LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	SIN
OPA2363AIRSVR.B	Active	Production	UQFN (RSV) | 16	3000 | LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	SIN
OPA2363IDGSR	Active	Production	VSSOP (DGS) | 10	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363IDGSR.B	Active	Production	VSSOP (DGS) | 10	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363IDGST	Last Time Buy	Production	VSSOP (DGS) | 10	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2363IDGST.B	Last Time Buy	Production	VSSOP (DGS) | 10	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHK
OPA2364AID	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364 A
OPA2364AID.B	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364 A
OPA2364AIDG4	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364 A
OPA2364AIDGKR	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364AIDGKR.B	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364AIDGKT	Active	Production	VSSOP (DGK) | 8	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364AIDGKT.B	Active	Production	VSSOP (DGK) | 8	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364AIDR	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364 A
OPA2364AIDR.B	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364 A

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA2364AIDRG4	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364 A
OPA2364ID	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364
OPA2364ID.B	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364
OPA2364IDGKR	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	Call TI | Sn	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364IDGKR.B	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364IDGKT	Active	Production	VSSOP (DGK) | 8	250 | SMALL T&R	Yes	Call TI | Sn	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364IDGKT.B	Active	Production	VSSOP (DGK) | 8	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364IDGKTG4	Active	Production	VSSOP (DGK) | 8	250 | SMALL T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	BHL
OPA2364IDR	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364
OPA2364IDR.B	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 2364
OPA363AID	Last Time Buy	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 363 A
OPA363AID.B	Last Time Buy	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 363 A
OPA363AIDBVR	Active	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363AIDBVR.B	Active	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363AIDBVRG4	Last Time Buy	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363AIDBVRG4.B	Last Time Buy	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363AIDBVT	Last Time Buy	Production	SOT-23 (DBV) | 6	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363AIDBVT.B	Last Time Buy	Production	SOT-23 (DBV) | 6	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363AIDBVTG4	Last Time Buy	Production	SOT-23 (DBV) | 6	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA363ID	Last Time Buy	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 363
OPA363ID.B	Last Time Buy	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 363
OPA363IDBVR	Active	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363IDBVR.B	Active	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363IDBVRG4	Last Time Buy	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363IDBVRG4.B	Last Time Buy	Production	SOT-23 (DBV) | 6	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363IDBVT	Last Time Buy	Production	SOT-23 (DBV) | 6	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA363IDBVT.B	Last Time Buy	Production	SOT-23 (DBV) | 6	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A40
OPA364AID	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364 A
OPA364AID.B	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364 A
OPA364AIDBVR	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDBVR.B	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDBVRG4	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDBVRG4.B	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDBVT	Active	Production	SOT-23 (DBV) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDBVT.B	Active	Production	SOT-23 (DBV) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDBVTG4	Active	Production	SOT-23 (DBV) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364AIDR	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364 A
OPA364AIDR.B	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364 A
OPA364ID	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA364ID.B	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364
OPA364IDBVR	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDBVR.B	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDBVRG4	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDBVRG4.B	Active	Production	SOT-23 (DBV) | 5	3000 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDBVT	Active	Production	SOT-23 (DBV) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDBVT.B	Active	Production	SOT-23 (DBV) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDBVTG4	Active	Production	SOT-23 (DBV) | 5	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	A41
OPA364IDG4	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364
OPA364IDR	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364
OPA364IDR.B	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	Call TI	Level-2-260C-1 YEAR	-40 to 125	OPA 364
OPA4364AID	Last Time Buy	Production	SOIC (D) | 14	50 | TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4364A
OPA4364AID.B	Last Time Buy	Production	SOIC (D) | 14	50 | TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4364A
OPA4364AIDR	Active	Production	SOIC (D) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4364A
OPA4364AIDR.B	Active	Production	SOIC (D) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4364A
OPA4364AIDRG4	Active	Production	SOIC (D) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4364A
OPA4364AIPWR	Active	Production	TSSOP (PW) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A
OPA4364AIPWR.B	Active	Production	TSSOP (PW) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A
OPA4364AIPWRG4	Last Time Buy	Production	TSSOP (PW) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A
OPA4364AIPWRG4.B	Last Time Buy	Production	TSSOP (PW) | 14	2500 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A
OPA4364AIPWT	Last Time Buy	Production	TSSOP (PW) | 14	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A
OPA4364AIPWT.B	Last Time Buy	Production	TSSOP (PW) | 14	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA4364AIPWTG4	Last Time Buy	Production	TSSOP (PW) | 14	250 | SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA 4364A

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF OPA4364 :

- Automotive : OPA4364-Q1

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION

REEL DIMENSIONS

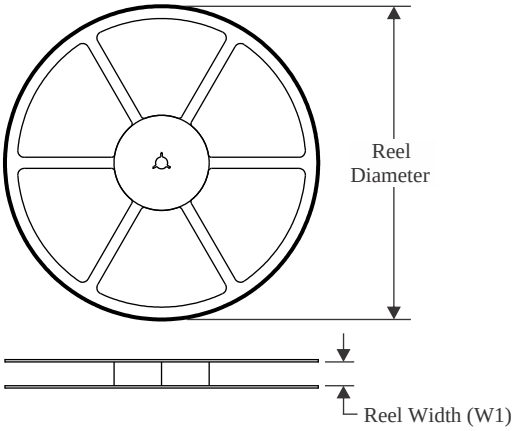

TAPE DIMENSIONS

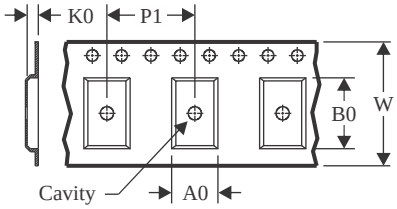

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

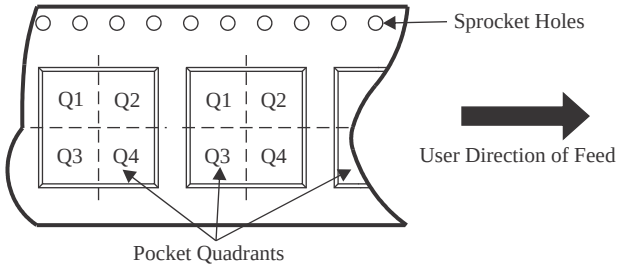

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA2363AIRSVR	UQFN	RSV	16	3000	177.8	12.4	2.0	2.8	0.7	4.0	12.0	Q1
OPA2364AIDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2364AIDGKT	VSSOP	DGK	8	250	180.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2364AIDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA2364IDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2364IDGKT	VSSOP	DGK	8	250	180.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2364IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA363AIDBVR	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
OPA363AIDBVRG4	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
OPA363AIDBVT	SOT-23	DBV	6	250	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
OPA363IDBVR	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
OPA363IDBVRG4	SOT-23	DBV	6	3000	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
OPA363IDBVT	SOT-23	DBV	6	250	178.0	9.0	3.23	3.17	1.37	4.0	8.0	Q3
OPA364AIDBVR	SOT-23	DBV	5	3000	180.0	8.4	3.15	3.1	1.55	4.0	8.0	Q3
OPA364AIDBVRG4	SOT-23	DBV	5	3000	180.0	8.4	3.15	3.1	1.55	4.0	8.0	Q3
OPA364AIDBVT	SOT-23	DBV	5	250	180.0	8.4	3.15	3.1	1.55	4.0	8.0	Q3

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA364AIDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA364IDBVR	SOT-23	DBV	5	3000	180.0	8.4	3.15	3.1	1.55	4.0	8.0	Q3
OPA364IDBVRG4	SOT-23	DBV	5	3000	180.0	8.4	3.15	3.1	1.55	4.0	8.0	Q3
OPA364IDBVT	SOT-23	DBV	5	250	180.0	8.4	3.15	3.1	1.55	4.0	8.0	Q3
OPA364IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA4364AIDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
OPA4364AIPWR	TSSOP	PW	14	2500	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
OPA4364AIPWRG4	TSSOP	PW	14	2500	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
OPA4364AIPWT	TSSOP	PW	14	250	180.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

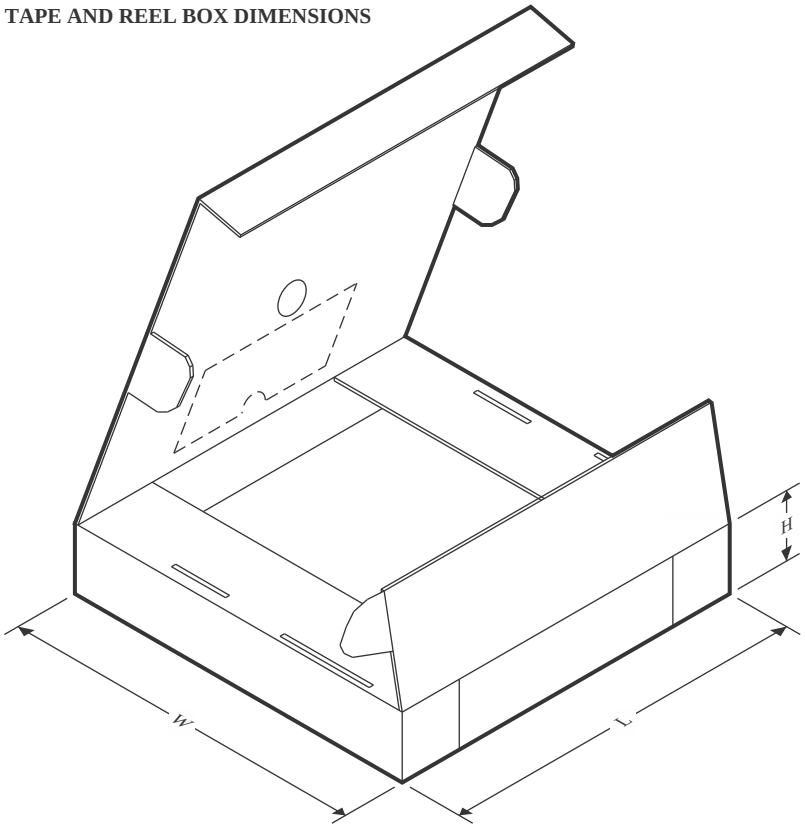

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA2363AIRSVR	UQFN	RSV	16	3000	223.0	270.0	35.0
OPA2364AIDGKR	VSSOP	DGK	8	2500	353.0	353.0	32.0
OPA2364AIDGKT	VSSOP	DGK	8	250	213.0	191.0	35.0
OPA2364AIDR	SOIC	D	8	2500	353.0	353.0	32.0
OPA2364IDGKR	VSSOP	DGK	8	2500	353.0	353.0	32.0
OPA2364IDGKT	VSSOP	DGK	8	250	213.0	191.0	35.0
OPA2364IDR	SOIC	D	8	2500	353.0	353.0	32.0
OPA363AIDBVR	SOT-23	DBV	6	3000	565.0	140.0	75.0
OPA363AIDBVRG4	SOT-23	DBV	6	3000	565.0	140.0	75.0
OPA363AIDBVT	SOT-23	DBV	6	250	565.0	140.0	75.0
OPA363IDBVR	SOT-23	DBV	6	3000	565.0	140.0	75.0
OPA363IDBVRG4	SOT-23	DBV	6	3000	565.0	140.0	75.0
OPA363IDBVT	SOT-23	DBV	6	250	565.0	140.0	75.0
OPA364AIDBVR	SOT-23	DBV	5	3000	213.0	191.0	35.0
OPA364AIDBVRG4	SOT-23	DBV	5	3000	213.0	191.0	35.0
OPA364AIDBVT	SOT-23	DBV	5	250	213.0	191.0	35.0
OPA364AIDR	SOIC	D	8	2500	353.0	353.0	32.0
OPA364IDBVR	SOT-23	DBV	5	3000	213.0	191.0	35.0

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA364IDBVRG4	SOT-23	DBV	5	3000	213.0	191.0	35.0
OPA364IDBVT	SOT-23	DBV	5	250	213.0	191.0	35.0
OPA364IDR	SOIC	D	8	2500	353.0	353.0	32.0
OPA4364AIDR	SOIC	D	14	2500	353.0	353.0	32.0
OPA4364AIPWR	TSSOP	PW	14	2500	353.0	353.0	32.0
OPA4364AIPWRG4	TSSOP	PW	14	2500	353.0	353.0	32.0
OPA4364AIPWT	TSSOP	PW	14	250	213.0	191.0	35.0

TUBE

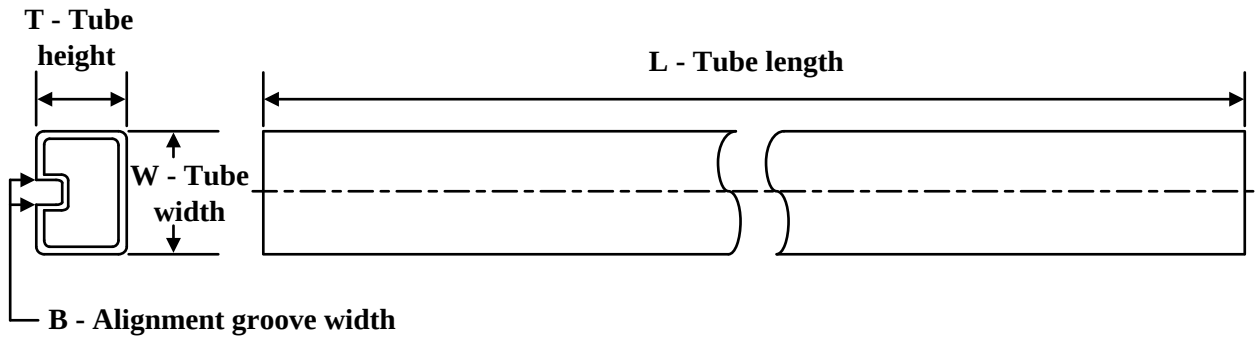

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
OPA2364AID	D	SOIC	8	75	506.6	8	3940	4.32
OPA2364AID.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA2364AIDG4	D	SOIC	8	75	506.6	8	3940	4.32
OPA2364ID	D	SOIC	8	75	506.6	8	3940	4.32
OPA2364ID.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA363AID	D	SOIC	8	75	506.6	8	3940	4.32
OPA363AID.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA363ID	D	SOIC	8	75	506.6	8	3940	4.32
OPA363ID.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA364AID	D	SOIC	8	75	506.6	8	3940	4.32
OPA364AID.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA364ID	D	SOIC	8	75	506.6	8	3940	4.32
OPA364ID.B	D	SOIC	8	75	506.6	8	3940	4.32
OPA364IDG4	D	SOIC	8	75	506.6	8	3940	4.32
OPA4364AID	D	SOIC	14	50	506.6	8	3940	4.32
OPA4364AID.B	D	SOIC	14	50	506.6	8	3940	4.32

PACKAGE OUTLINE

DGS0010A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

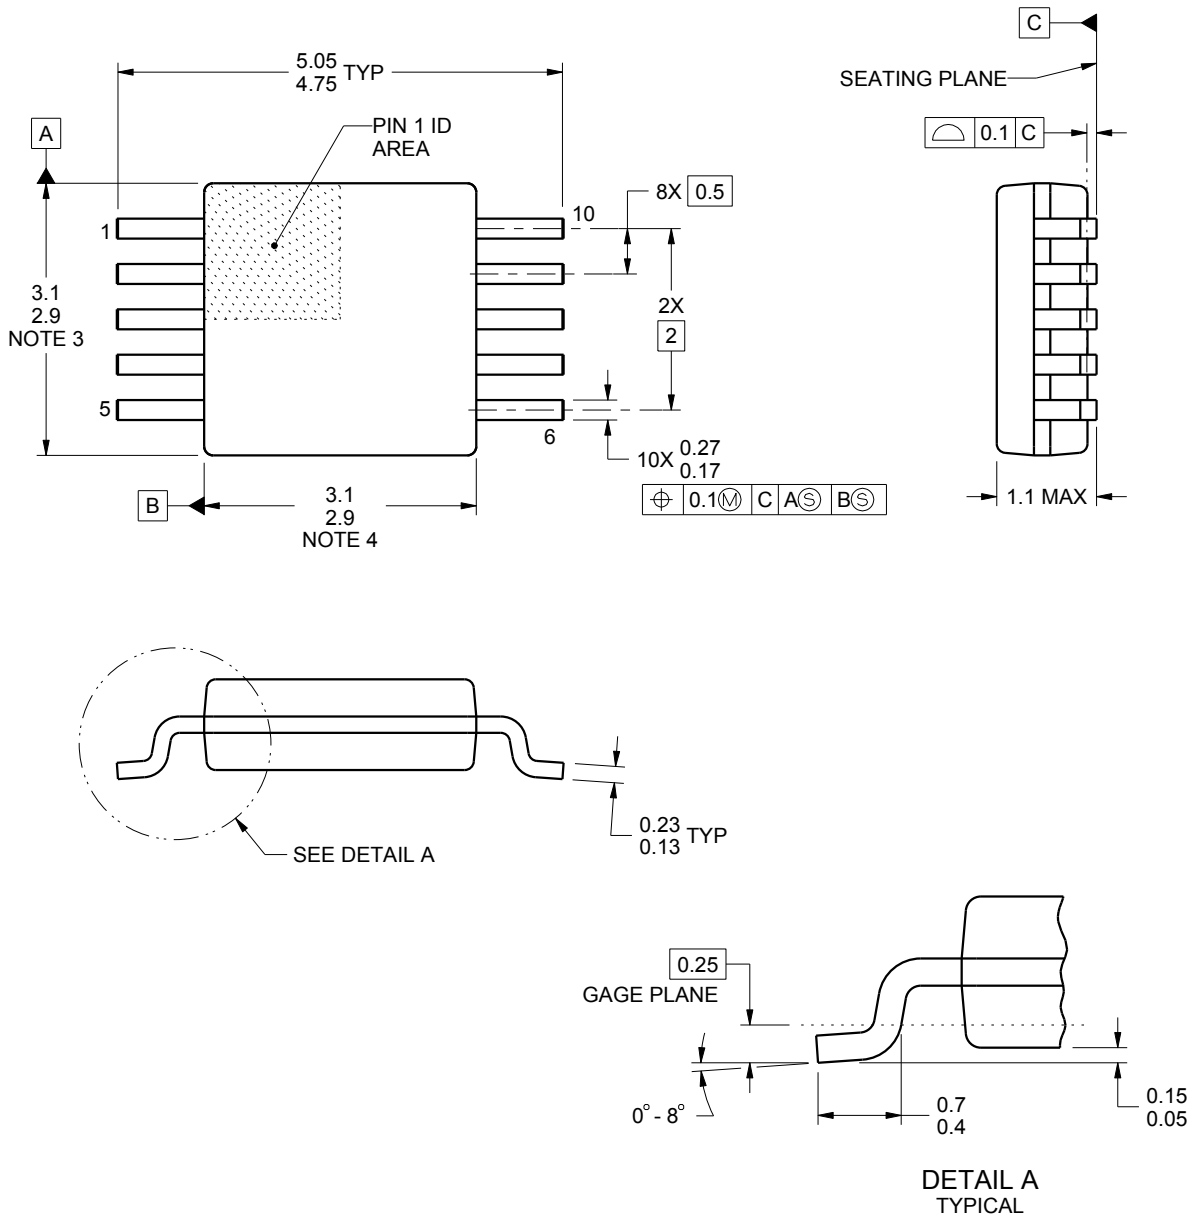

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187, variation BA.

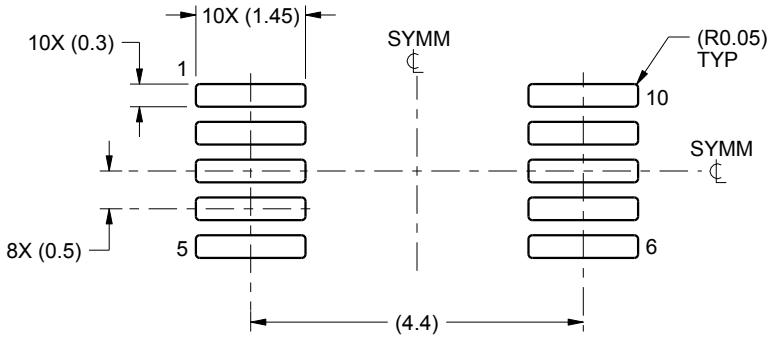

LAND PATTERN EXAMPLE
SCALE:10X

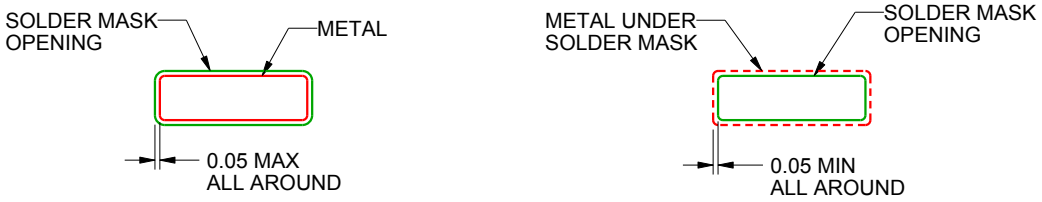

SOLDER MASK DETAILS
NOT TO SCALE

4221984/A 05/2015

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

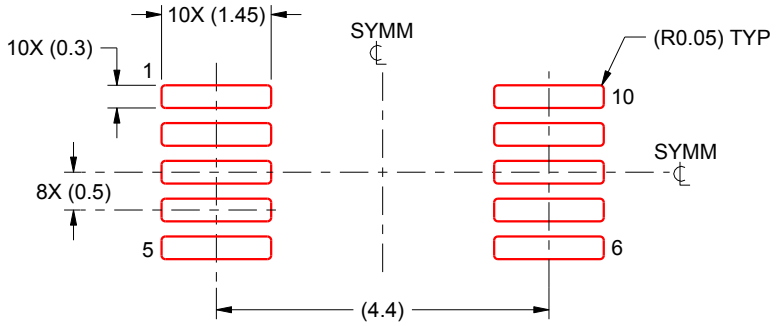

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:10X

4221984/A 05/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



PACKAGE OUTLINE

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

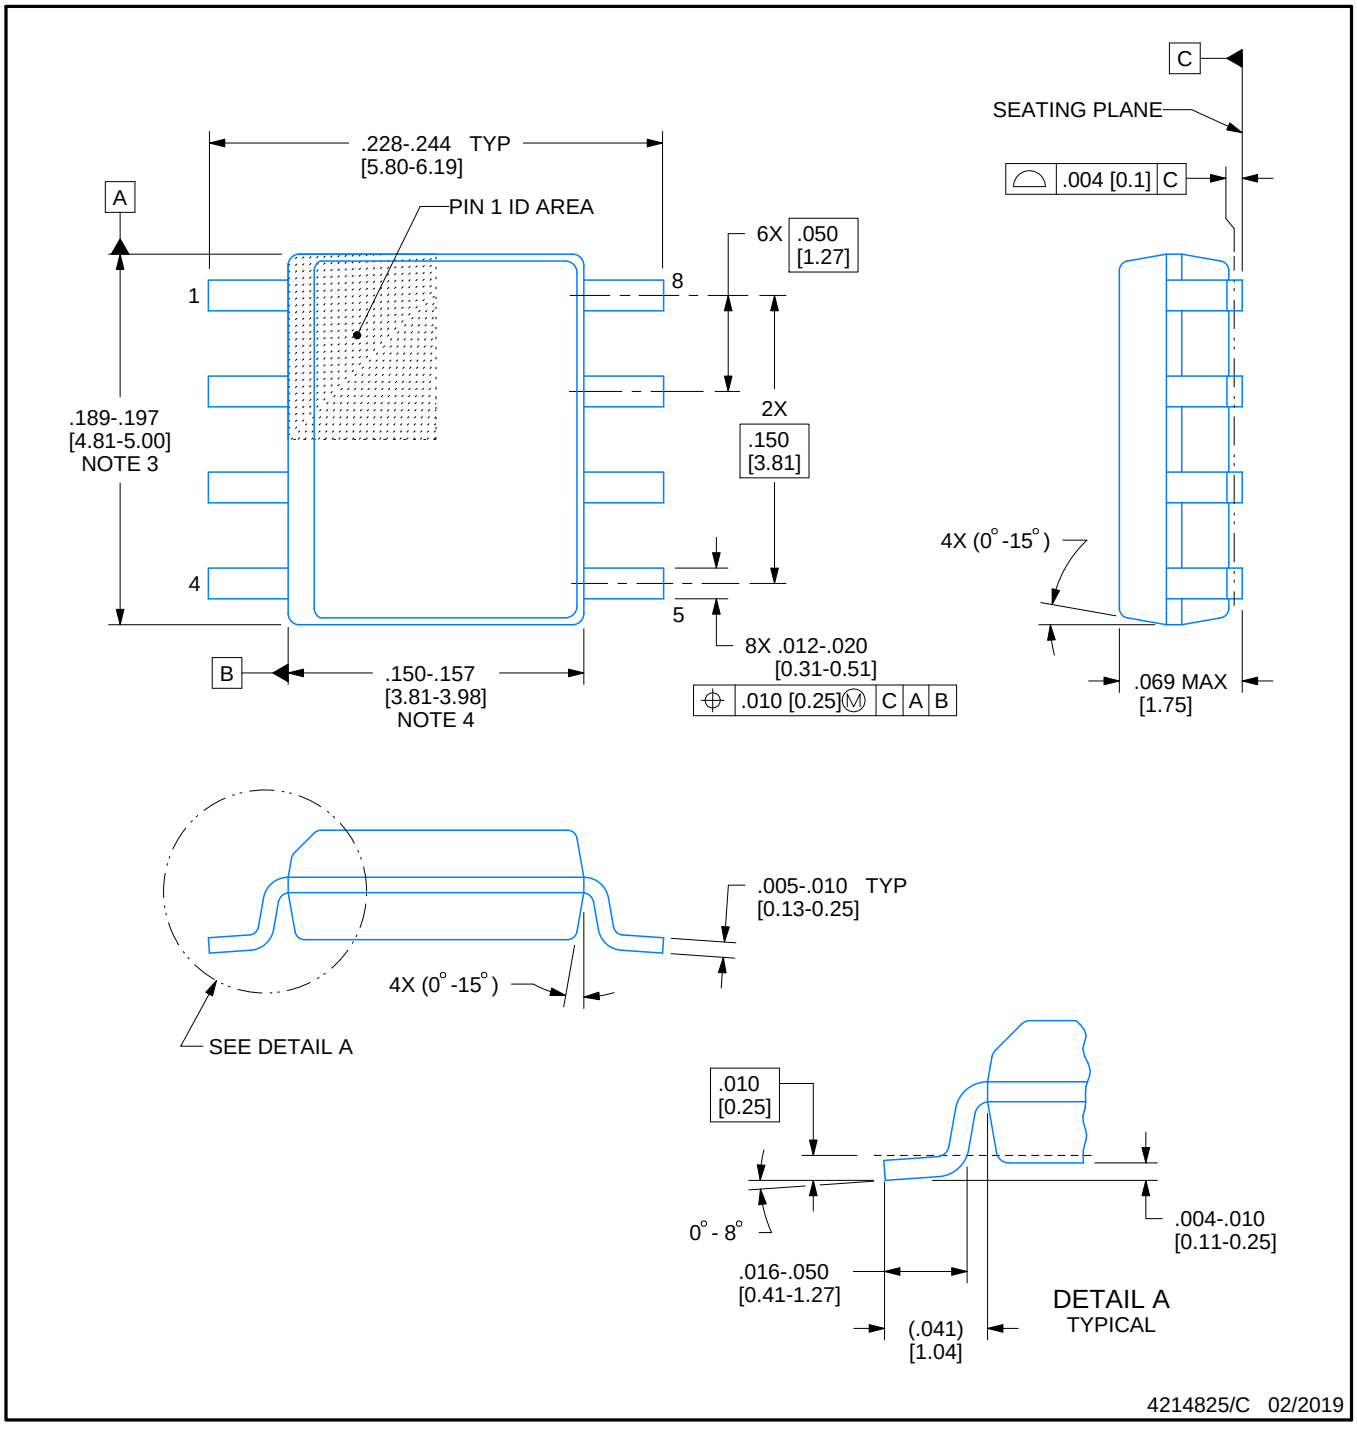

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

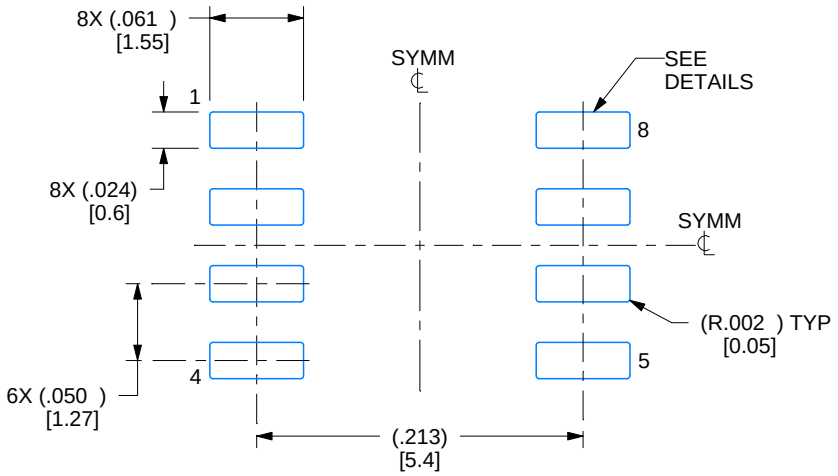

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

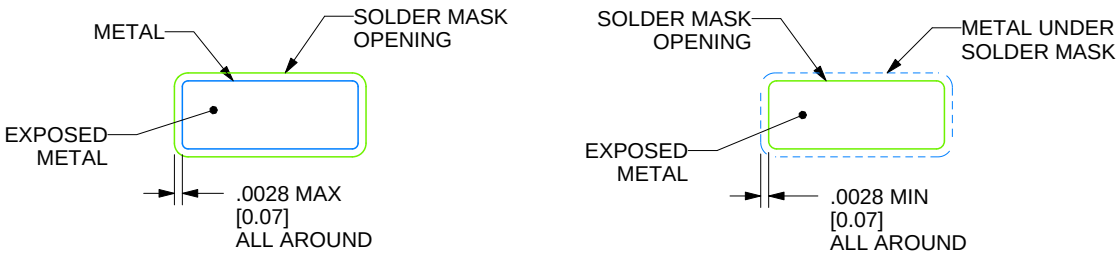

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

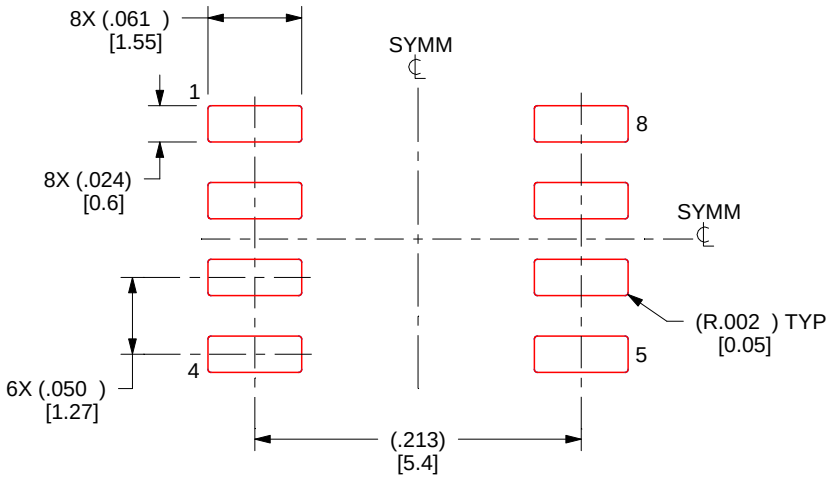

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

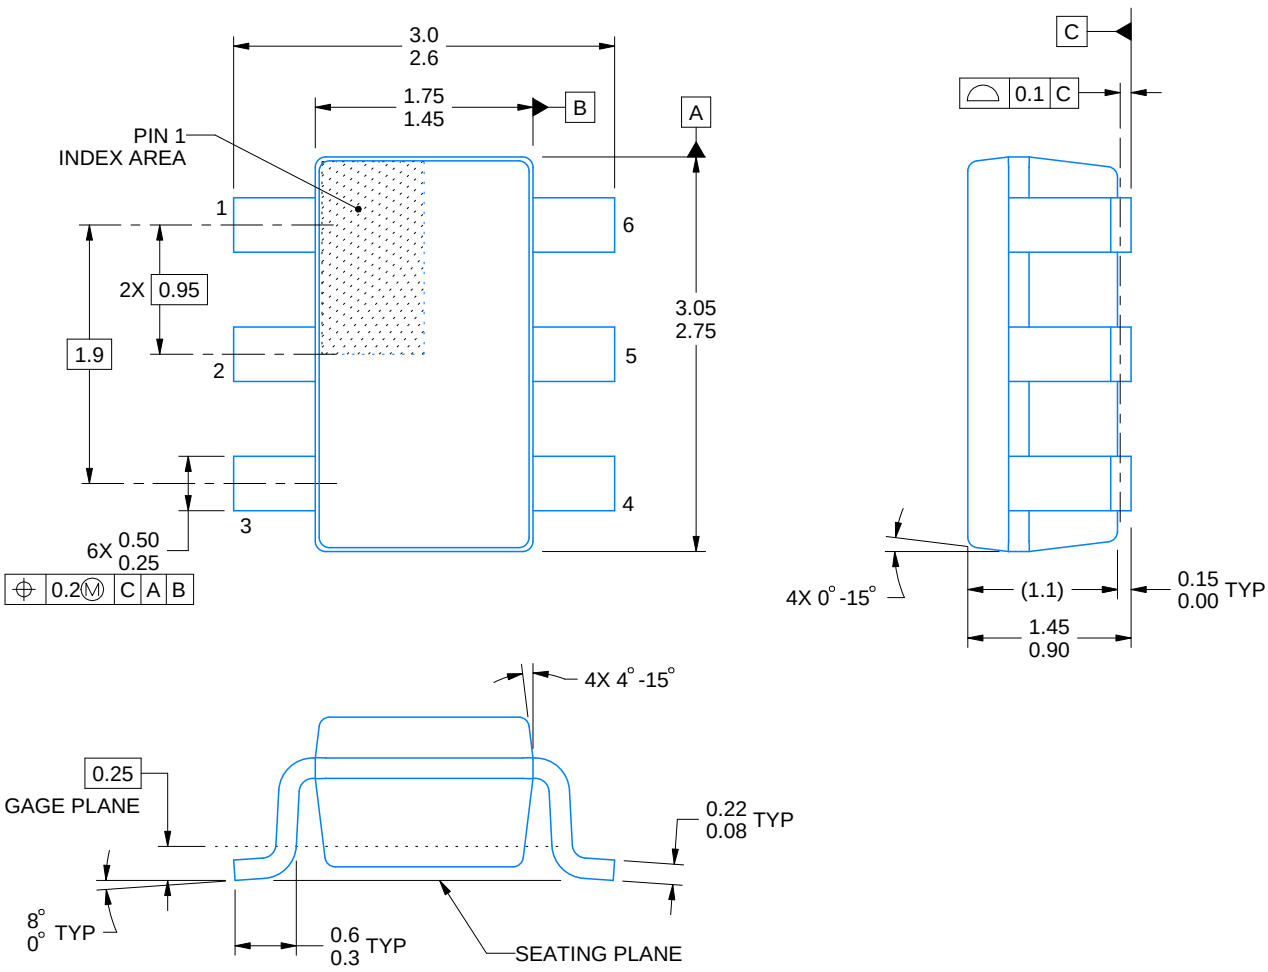

4214840/G 08/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.25 per side.
4. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
5. Refernce JEDEC MO-178.

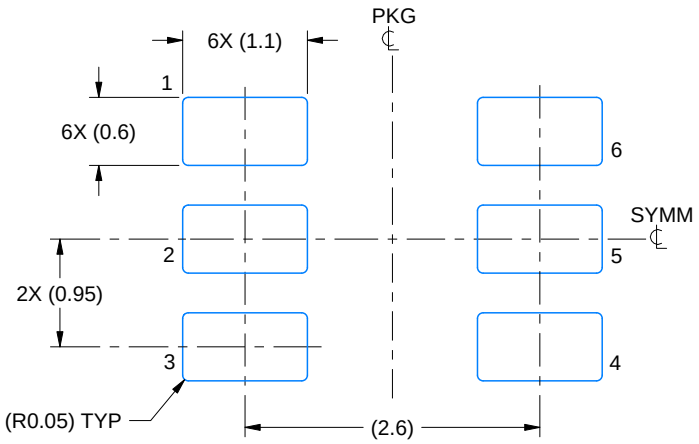

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

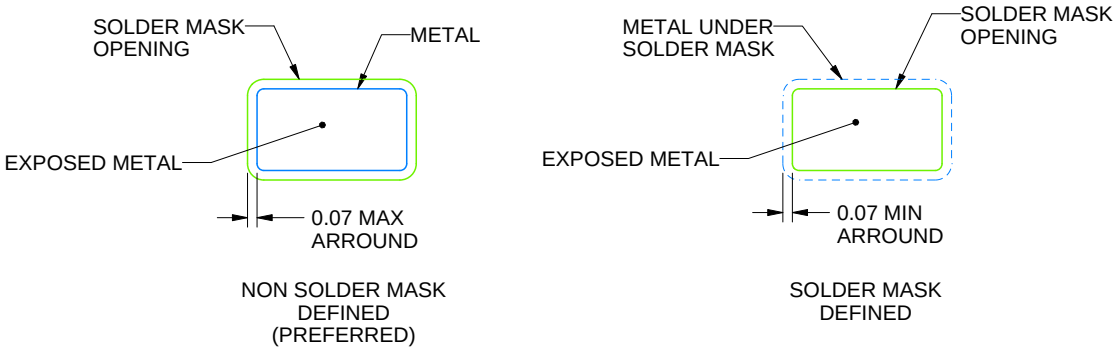

SOLDER MASK DETAILS

4214840/G 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

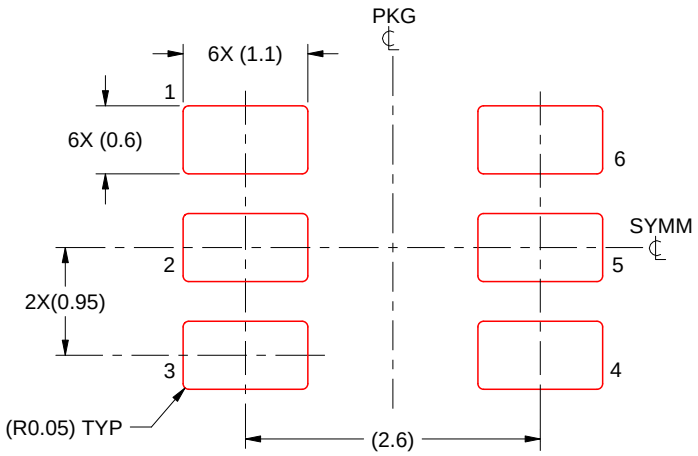

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214840/G 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

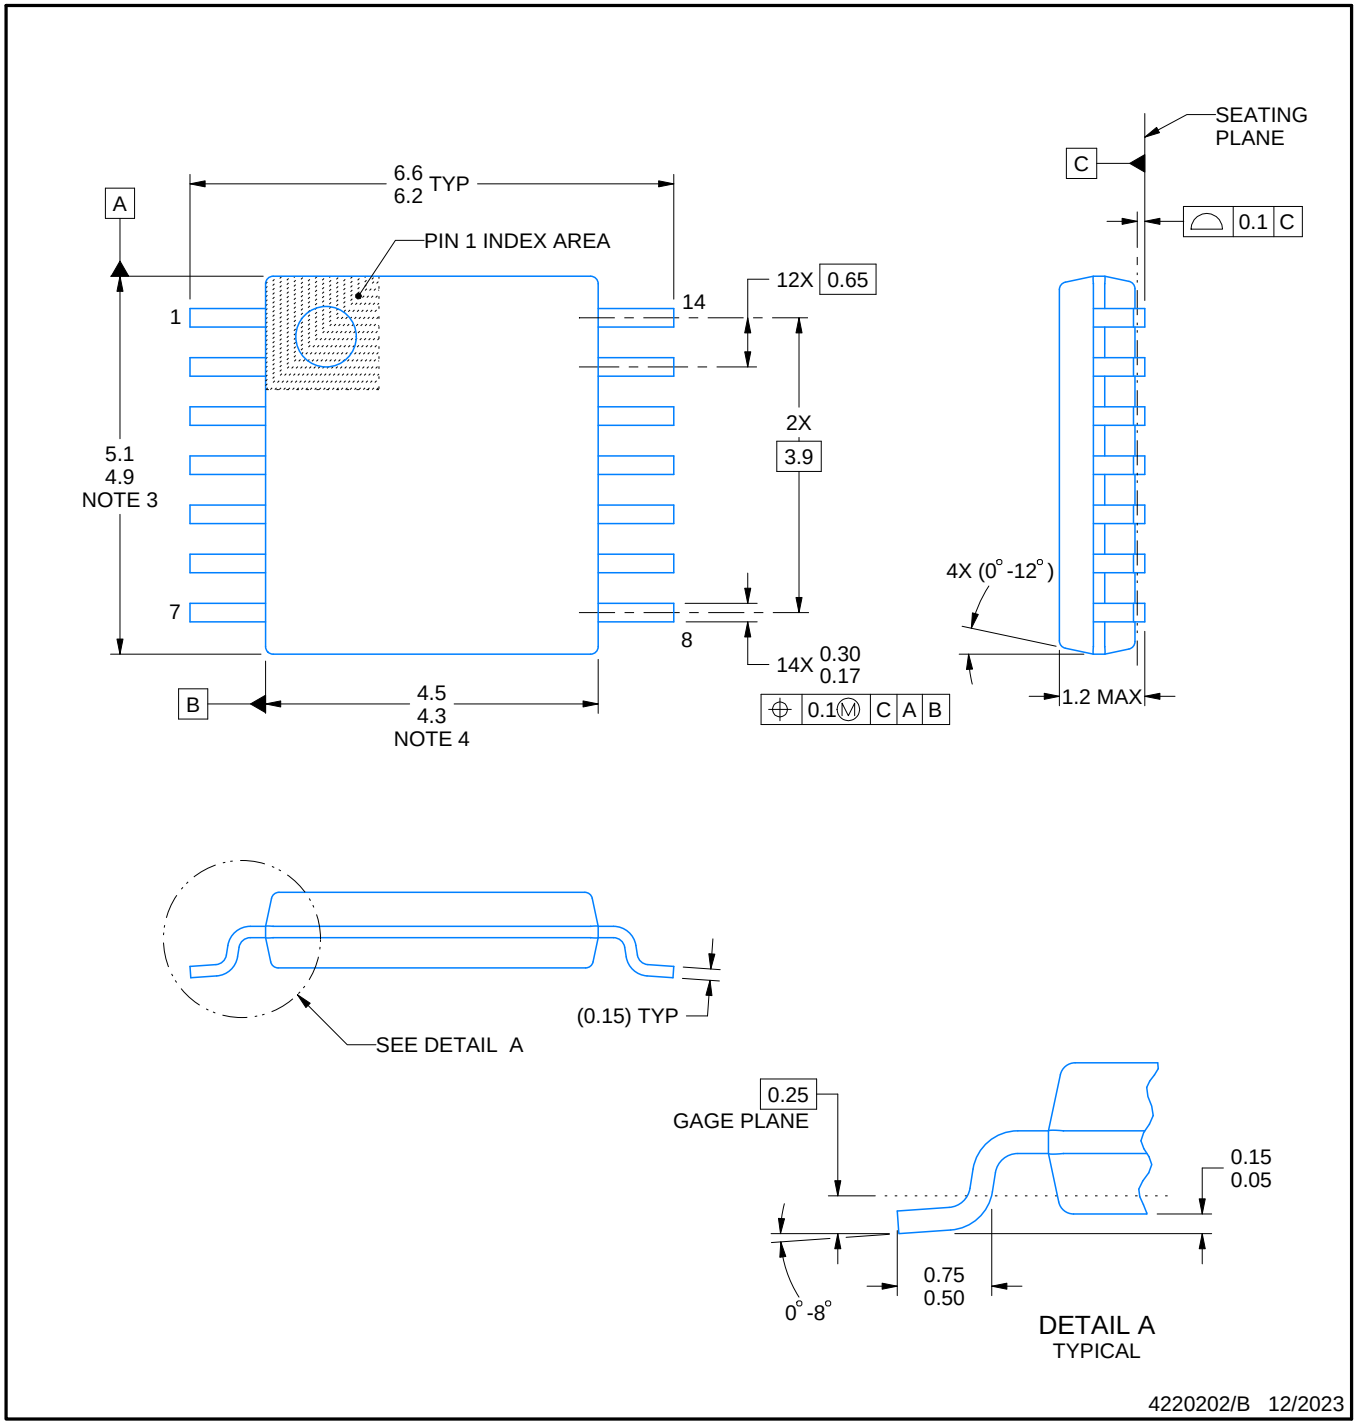

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

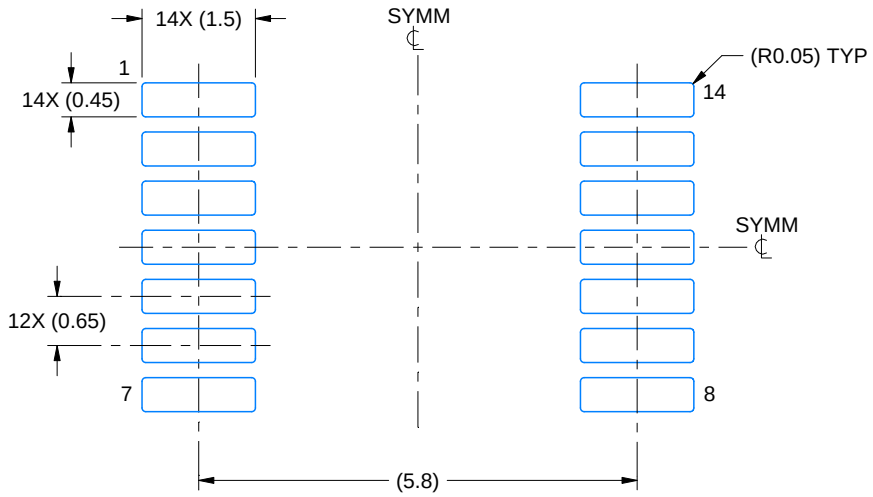

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

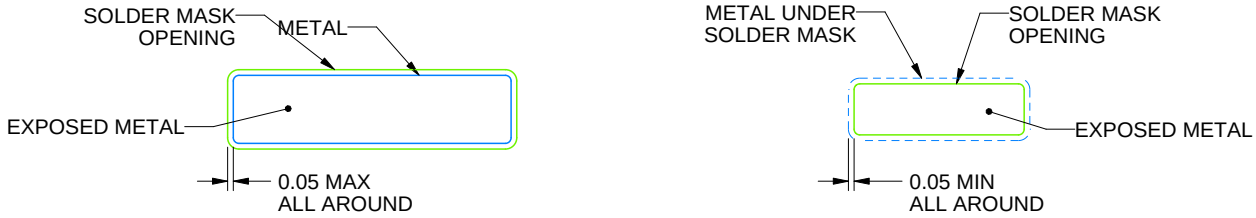

SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

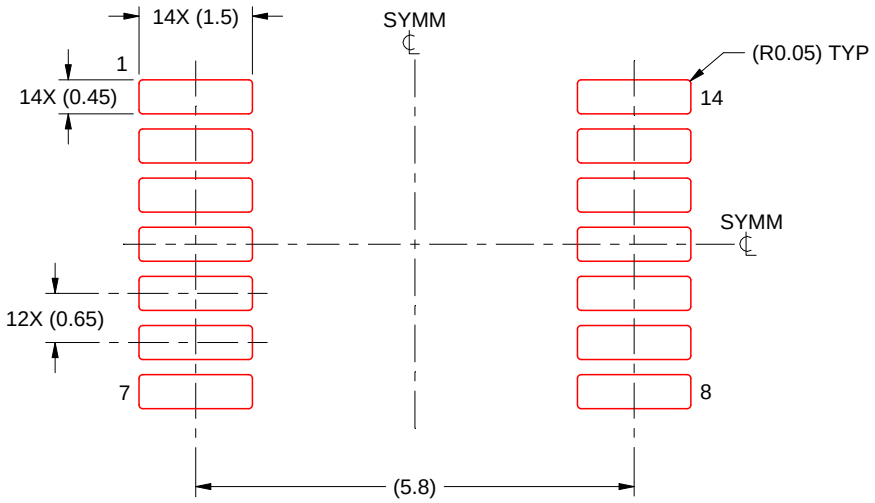

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

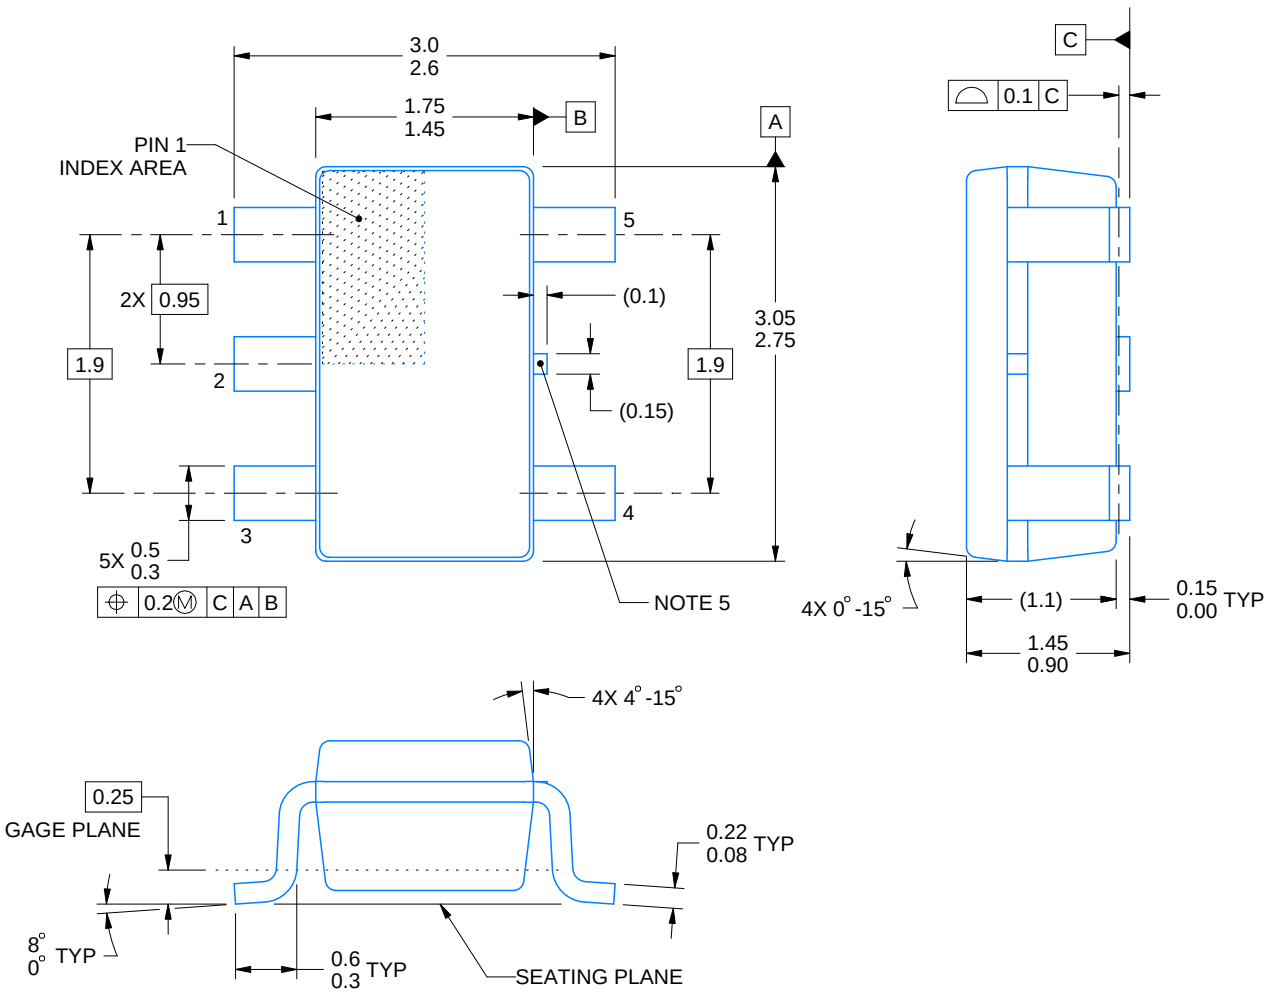

4214839/K 08/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Refernce JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

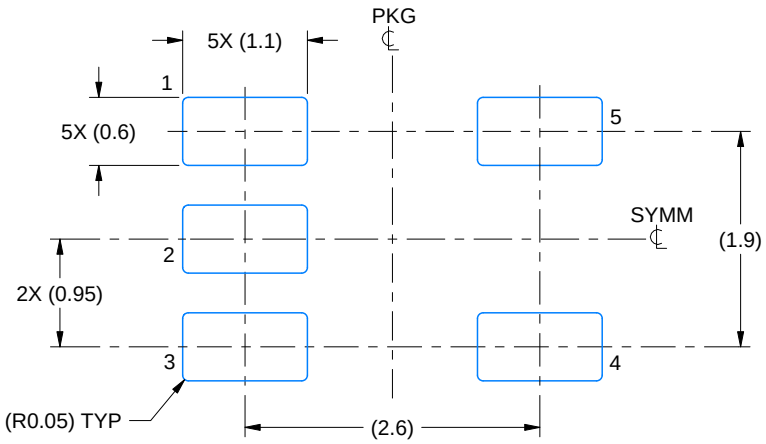

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

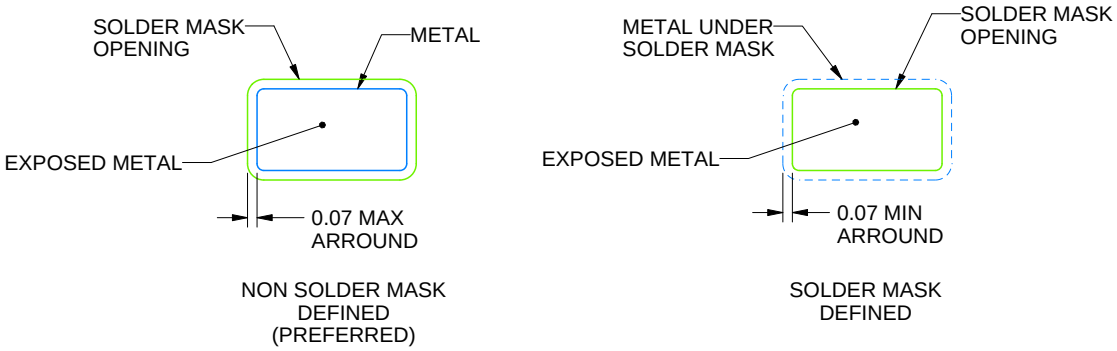

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

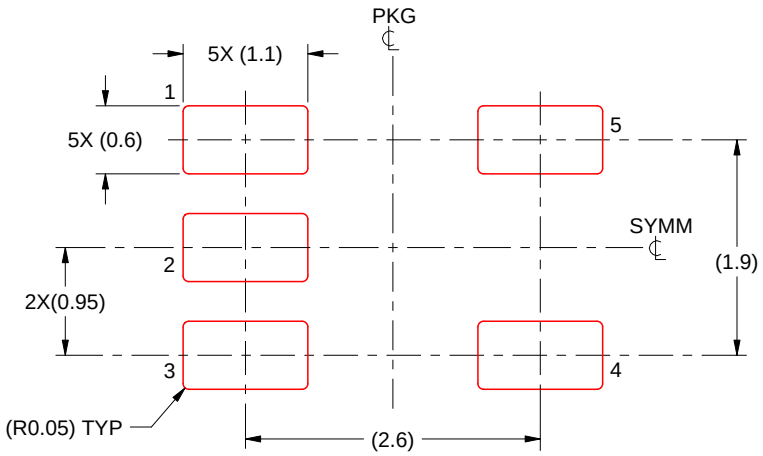

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

DGK0008A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

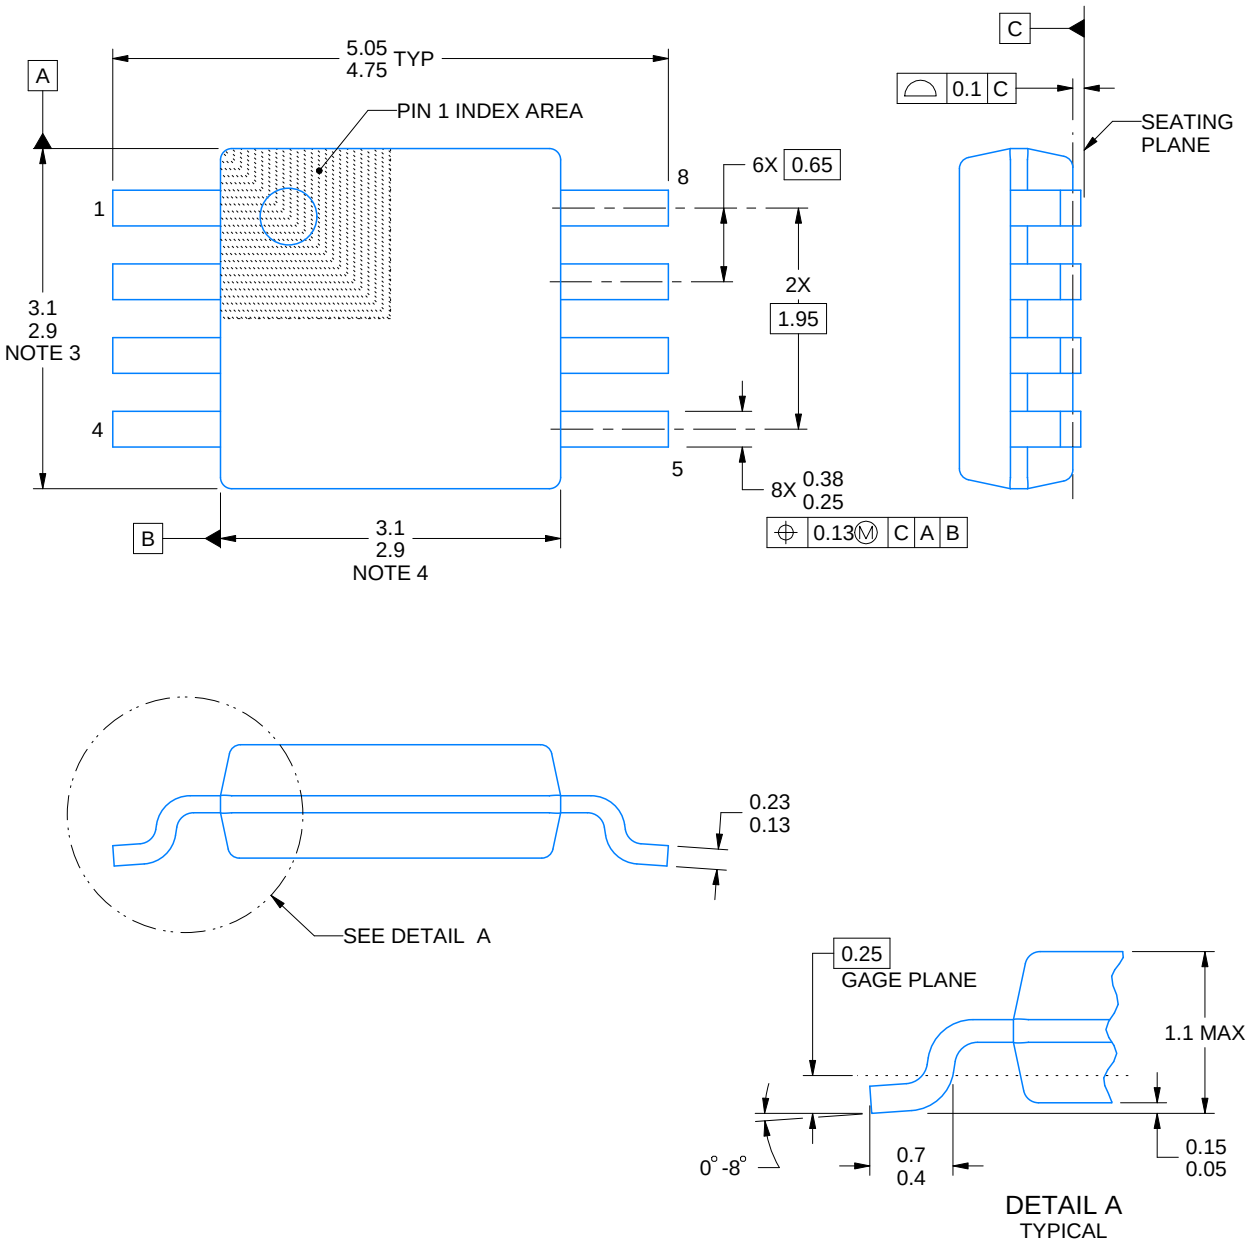

PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

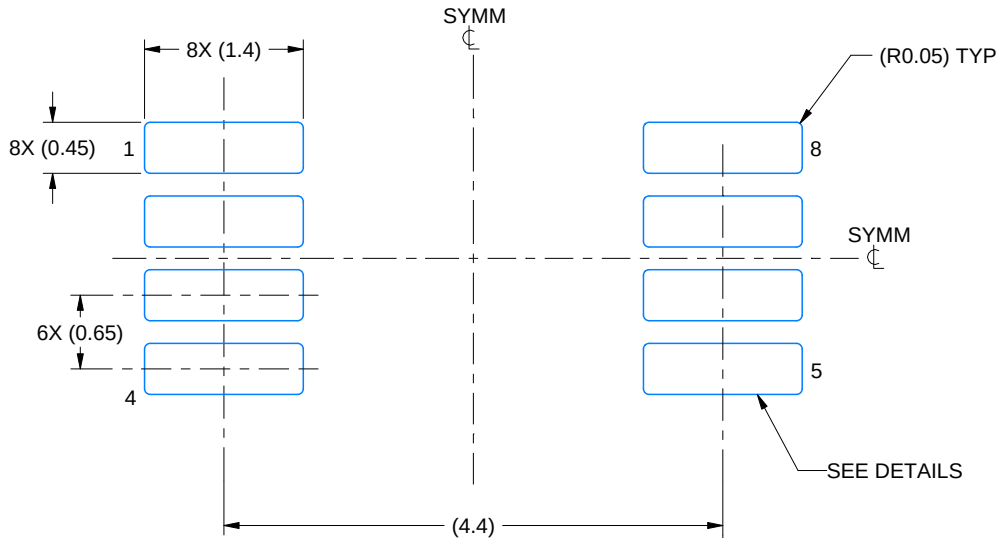

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

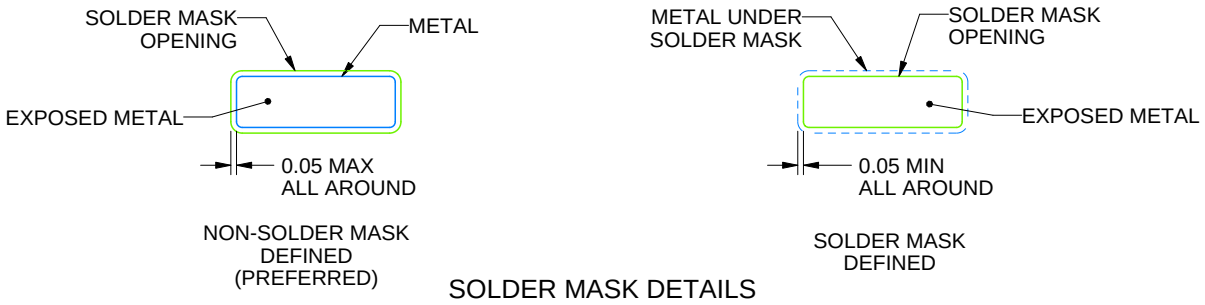

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

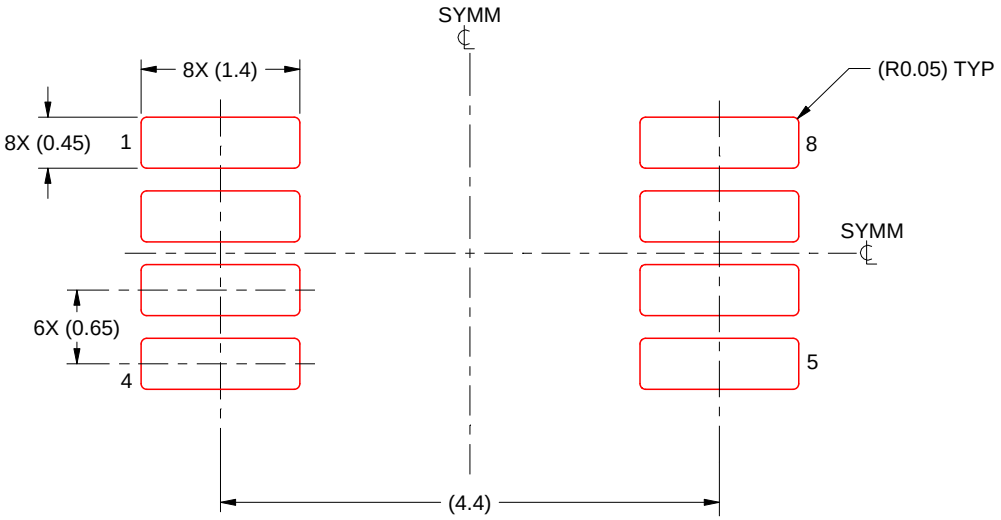

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.



PACKAGE OUTLINE

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

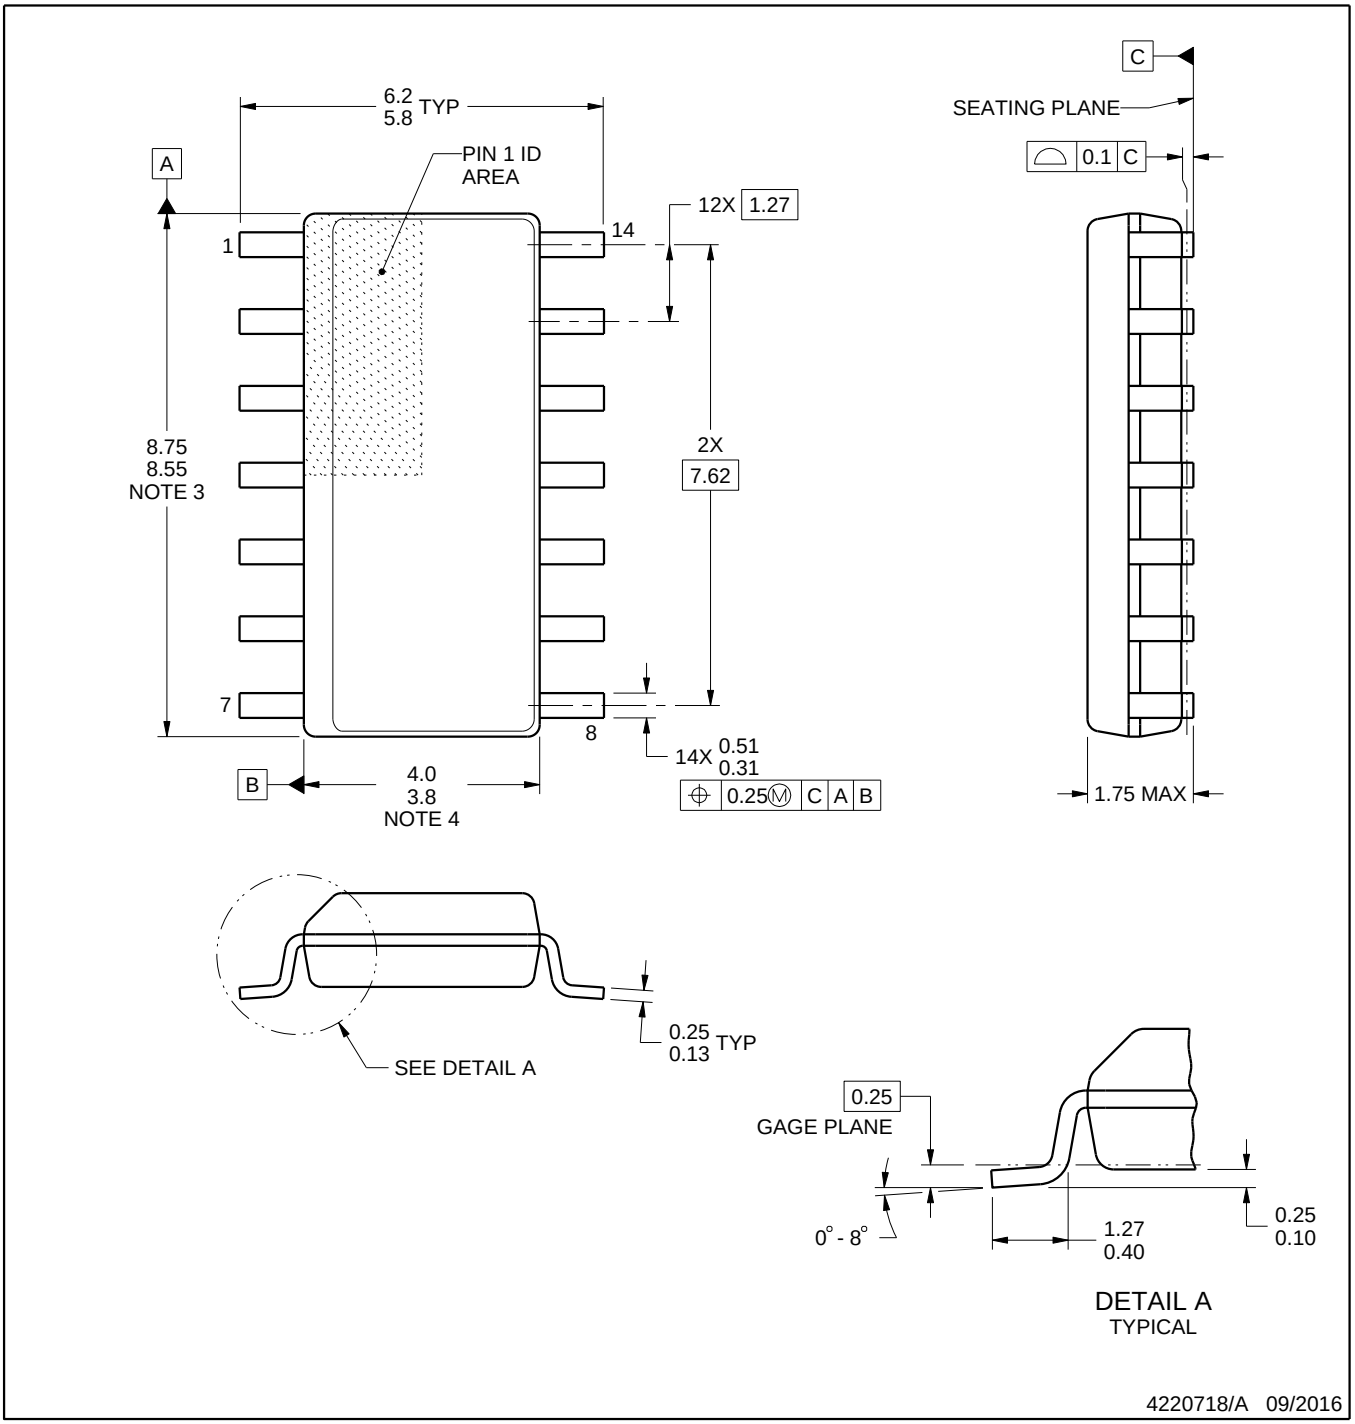

NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

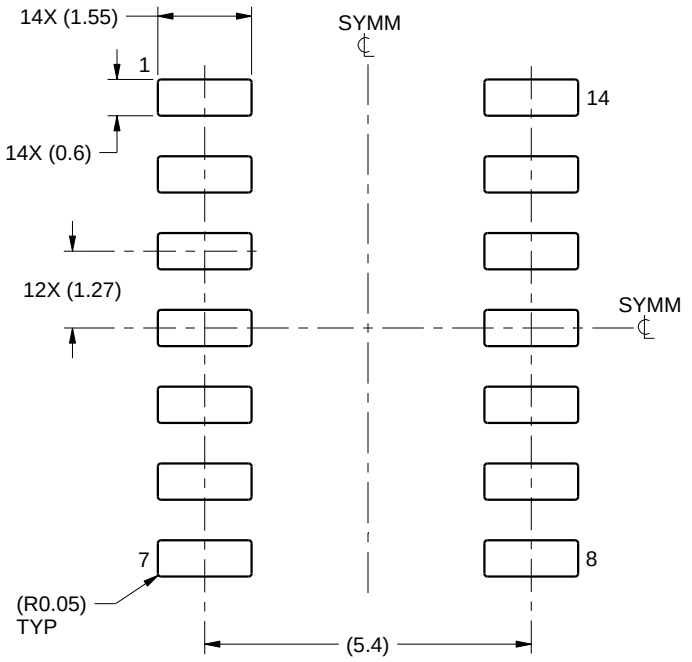

LAND PATTERN EXAMPLE
SCALE:8X

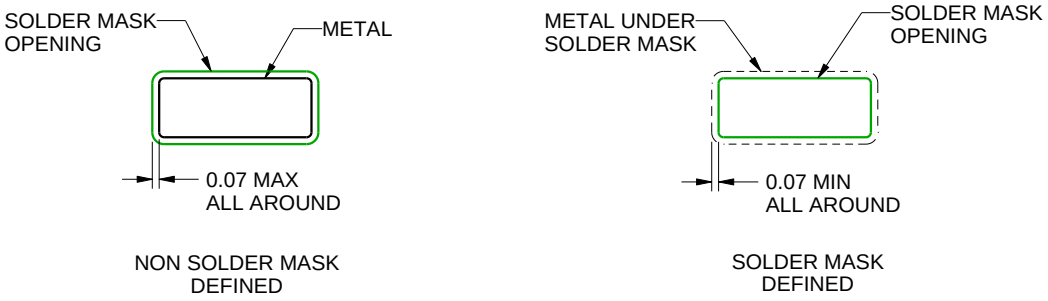

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

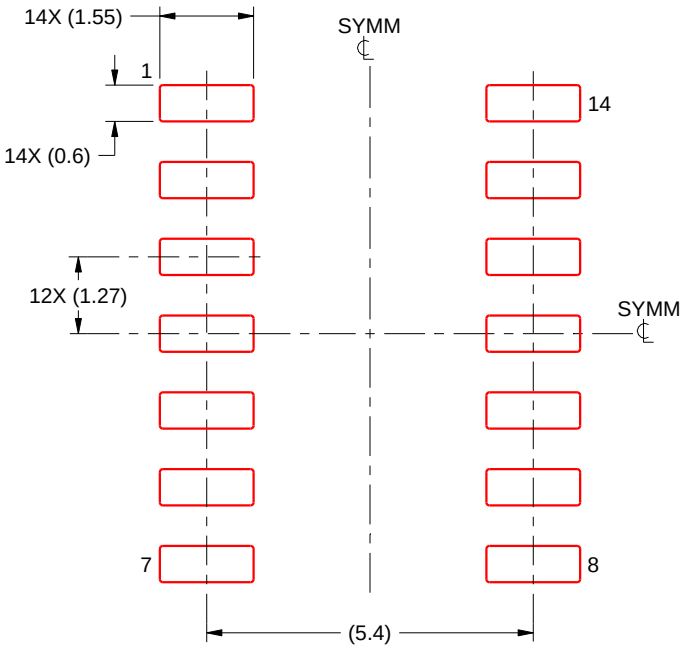

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW

RSV 16

UQFN - 0.55 mm max height

1.8 x 2.6, 0.4 mm pitch

ULTRA THIN QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

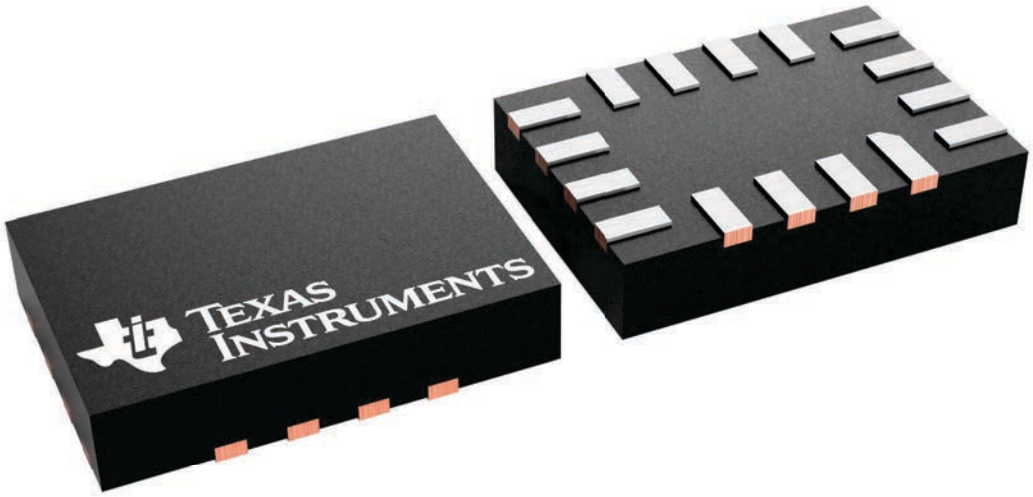

4231225/A

PACKAGE OUTLINE

RSV0016A

UQFN - 0.55 mm max height

ULTRA THIN QUAD FLATPACK - NO LEAD

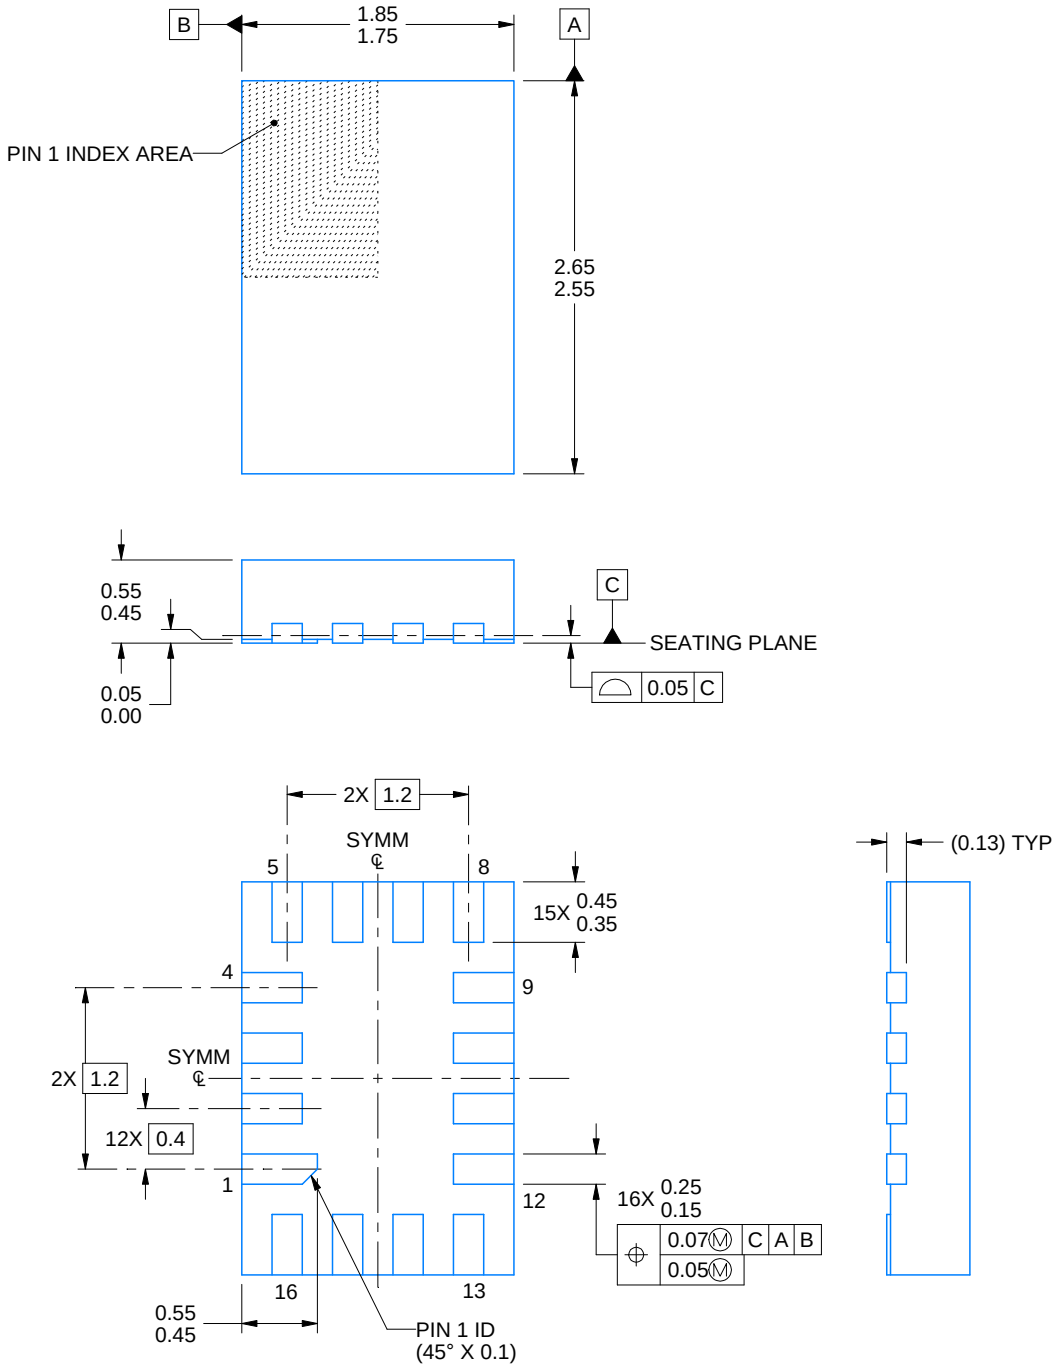

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

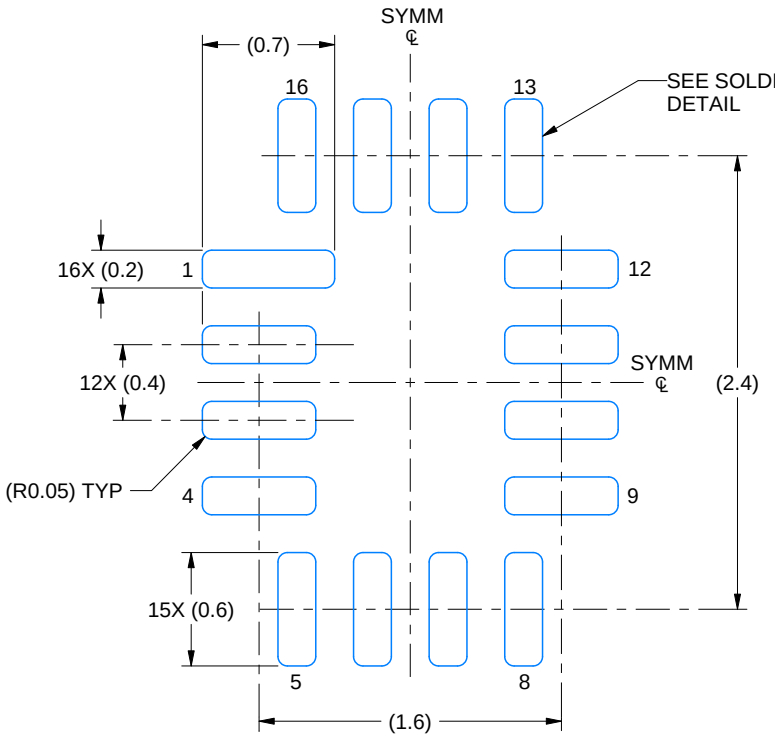

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 25X

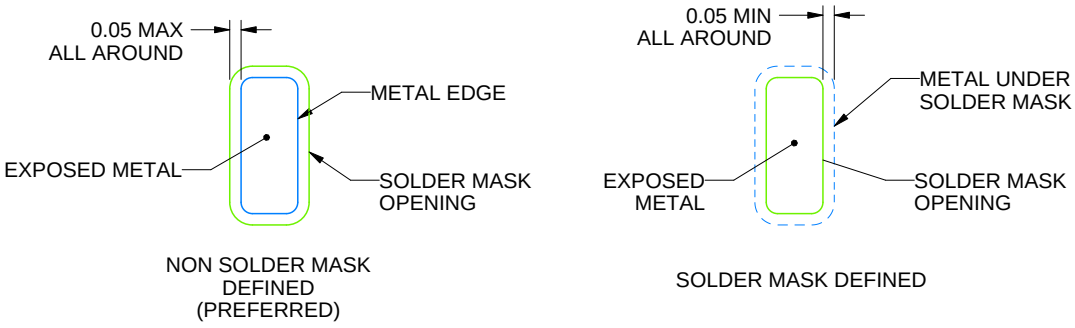

SOLDER MASK DETAILS

4220314/C 02/2020

NOTES: (continued)

3. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

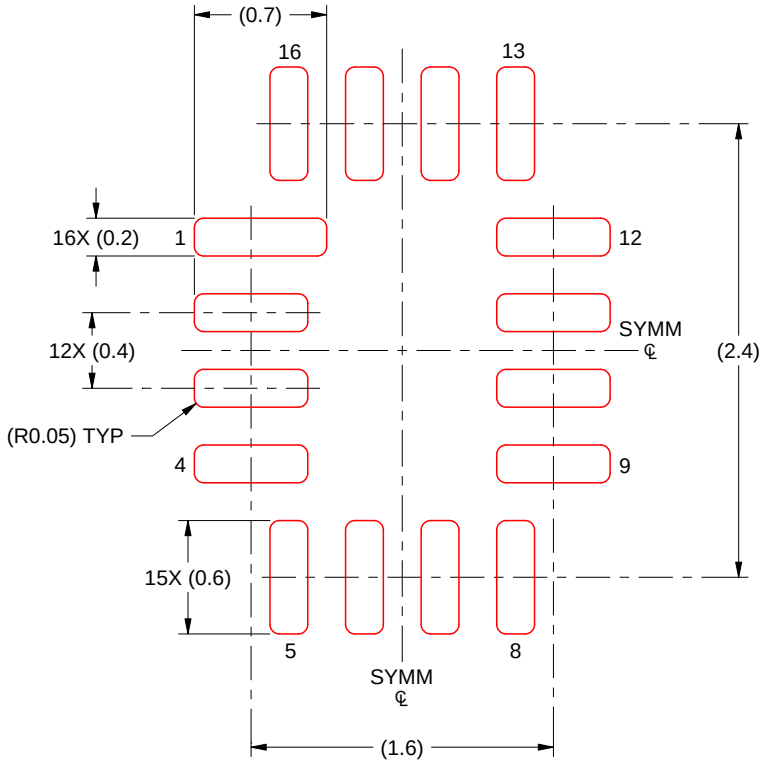

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 25X

4220314/C 02/2020

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月