

## **LinCMOS™ PRECISION QUAD OPERATIONAL AMPLIFIERS**

**Check for Samples: [TLC27M4](#), [TLC27M4A](#), [TLC27M4B](#), [TLC27M4Y](#), [TLC27M9](#)**



## FEATURES

- Trimmed Offset Voltage
  - TLC27M9 . . . 900  $\mu$ V Max at  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5$  V
- Input Offset Voltage Drift . . . Typically 0.1  $\mu$ V/Month, Including the First 30 Days
- Wide Range of Supply Voltages Over Specified Temperature Range:
  - 0°C to 70°C . . . 3 V to 16 V
  - -40°C to 85°C . . . 4 V to 16 V
  - -55°C to 125°C . . . 4 V to 16 V
- Single-Supply Operation
- Common-Mode Input Voltage Range Extends Below the Negative Rail (C-Suffix, I-Suffix Types)
- Low Noise . . . Typically 32 nV/ $\sqrt{\text{Hz}}$  at  $f = 1$  kHz
- Low Power . . . Typically 2.1 mW at  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5$  V
- Output Voltage Range Includes Negative Rail
- High Input Impedance . . .  $10^{12}$   $\Omega$  Typ
- ESD-Protection Circuitry
- Small-Outline Package Option Also Available in Tape and Reel
- Designed-In Latch-Up Immunity

## DESCRIPTION


The TLC27M4 and TLC27M9 quad operational amplifiers combine a wide range of input offset voltage grades with low offset voltage drift, high input impedance, low noise, and speeds comparable to that of general-purpose bipolar devices. These devices use Texas Instruments silicon-gate LinCMOS™ technology, which provides offset voltage stability far exceeding the stability available with conventional metal-gate processes.

The extremely high input impedance, low bias currents, make these cost-effective devices ideal for applications that have previously been reserved for general-purpose bipolar products, but with only a fraction of the power consumption.

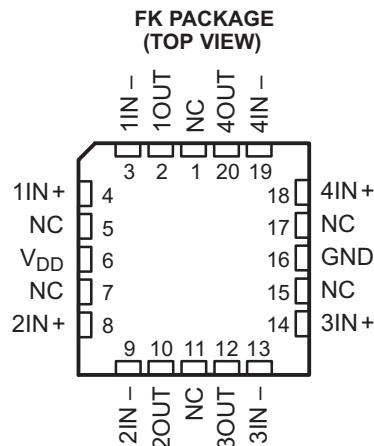

NC = No internal connection

## DISTRIBUTION OF TLC27M9 INPUT OFFSET VOLTAGE

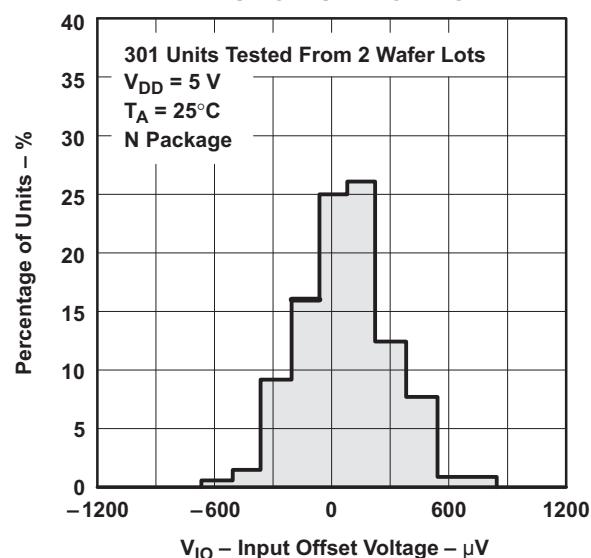

 Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.  
LinCMOS is a trademark of Texas Instruments Incorporated.

LinCMOS is a trademark of Texas Instruments Incorporated.

Four offset voltage grades are available (C-suffix and I-suffix types), ranging from the low-cost TLC27M4 (10 mV) to the high-precision TLC27M9 (900  $\mu$ V). These advantages, in combination with good common-mode rejection and supply voltage rejection, make these devices a good choice for new state-of-the-art designs as well as for upgrading existing designs.

In general, many features associated with bipolar technology are available on LinCMOS™ operational amplifiers, without the power penalties of bipolar technology. General applications such as transducer interfacing, analog calculations, amplifier blocks, active filters, and signal buffering are easily designed with the TLC27M4 and TLC27M9. The devices also exhibit low voltage single-supply operation, and low power consumption, making them ideally suited for remote and inaccessible battery-powered applications. The common-mode input voltage range includes the negative rail.

A wide range of packaging options is available, including small-outline and chip-carrier versions for high-density system applications.

The device inputs and outputs are designed to withstand -100-mA surge currents without sustaining latch-up.

The TLC27M4 and TLC27M9 incorporate internal ESD-protection circuits that prevent functional failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015; however, care should be exercised in handling these devices, as exposure to ESD may result in the degradation of the device parametric performance.


The C-suffix devices are characterized for operation from 0°C to 70°C. The I-suffix devices are characterized for operation from -40°C to 85°C. The M-suffix devices are characterized for operation over the full military temperature range of -55°C to 125°C.

#### AVAILABLE OPTIONS

T <sub>A</sub>	V <sub>IO</sub> max AT 25°C	PACKAGE					CHIP FORM (Y)
		SMALL OUTLINE (D) <sup>(1)</sup>	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)	TSSOP (PW) <sup>(1)</sup>	
0°C to 70°C	900 $\mu$ V	TLC27M9CD	—	—	TLC27M9CN	—	—
	2 mV	TLC27M4BCD	—	—	TLC27M4BCN	—	—
	5 mV	TLC27M4ACD	—	—	TLC27M4ACN	—	—
	10 mV	TLC27M4CD	—	—	TLC27M4CN	TLC27M4CPW	TLC27M4Y
-40°C to 85°C	900 $\mu$ V	TLC27M9ID	—	—	TLC27M9IN	—	—
	2 mV	TLC27M4BID	—	—	TLC27M4BIN	—	—
	5 mV	TLC27M4AID	—	—	TLC27M4AIN	—	—
	10 mV	TLC27M4ID	—	—	TLC27M4IN	TLC27M41PW	—
-55°C to 125°C	900 $\mu$ V	TLC27M9MD	TLC27M9MFK	TLC27M9MJ	TLC27M9MN	—	—
	10 mV	TLC27M4MD	TLC27M4MFK	TLC27M4MJ	TLC27M4MN	—	—


(1) The D and PW package is available taped and reeled. Add R suffix to the device type (e.g., TLC279CDR).

EQUIVALENT SCHEMATIC (EACH AMPLIFIER)

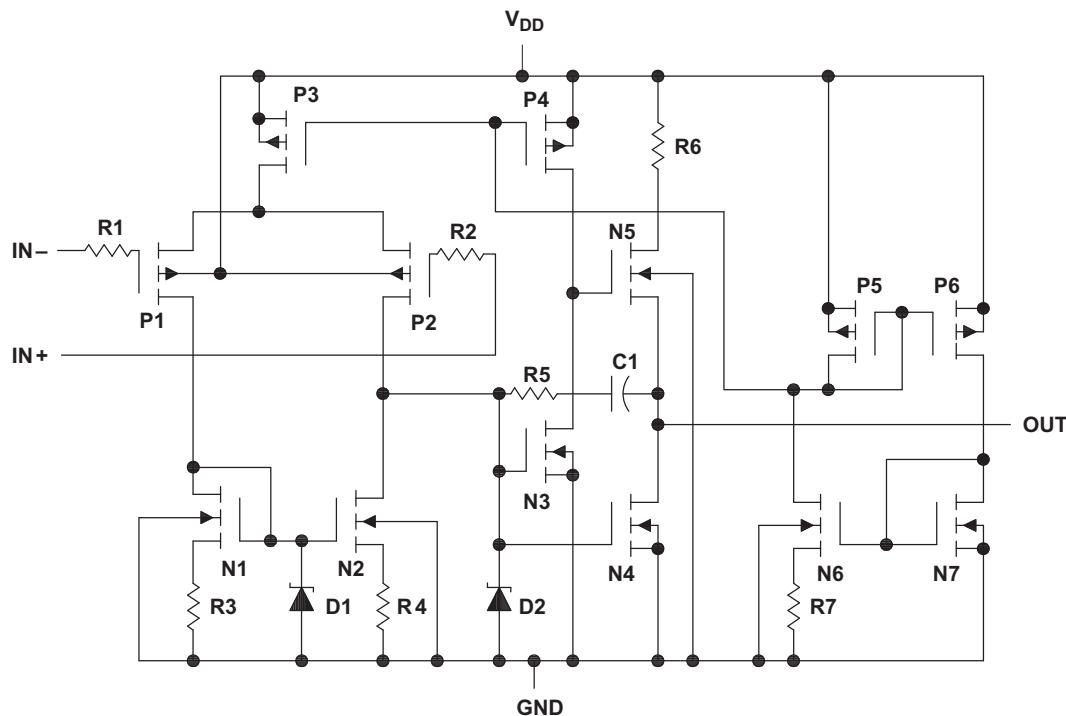

## TLC27M4Y chip information

This chip, when properly assembled, displays characteristics similar to the TLC27M4C. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

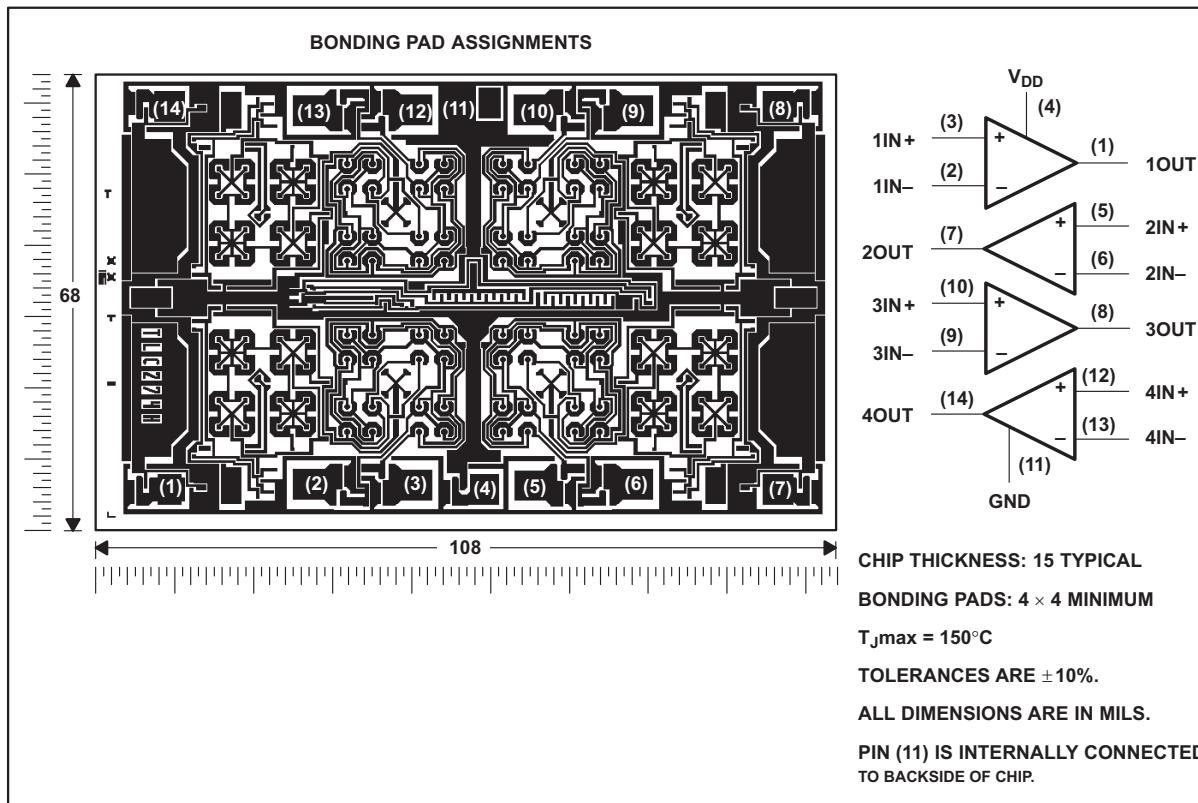

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

	VALUE	UNIT	
Supply voltage, $V_{DD}$ <sup>(2)</sup>	18	V	
Differential input voltage, $V_{ID}$ <sup>(3)</sup>	$\pm V_{DD}$		
Input voltage range, $V_I$ (any input)	−0.3 V to $V_{DD}$		
Input current, $I_I$	±5	mA	
Output current, $I_O$ (each output)	±30	mA	
Total current into $V_{DD}$	45	mA	
Total current out of GND	45	mA	
Duration of short-circuit current at (or below) 25°C <sup>(4)</sup>	unlimited		
Continuous total dissipation	See Dissipation Rating Table		
Operating free-air temperature, $T_A$	C suffix	0 to 70	°C
	I suffix	−40 to 85	°C
	M suffix	−55 to 125	°C
Storage temperature range	−65 to 150	°C	
Case temperature for 60 seconds: FK package	260	°C	
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds: D, N, or PW package	260	°C	
Lead temperature 1.6 mm (1/16 inch) from case for 60 seconds: J package	300	°C	

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to network ground.
- (3) Differential voltages are at IN+ with respect to IN−.
- (4) The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded (see application section).

## DISSIPATION RATINGS

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 85^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D	950 mW	7.6 mW/°C	608 mW	494 mW	—
FK	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW
J	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW
N	1575 mW	12.6 mW/°C	1008 mW	819 mW	—
PW	700 mW	5.6 mW/°C	448 mW	—	—

## RECOMMENDED OPERATING CONDITIONS

	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
Supply voltage, $V_{DD}$	3	16	4	16	4	16	V
Common mode input voltage, $V_{IC}$	$V_{DD} = 5\text{ V}$	−0.2	3.5	−0.2	3.5	0	3.5
	$V_{DD} = 10\text{ V}$	−0.2	8.5	−0.2	8.5	0	8.5
Operating free-air temperature, $T_A$	0	70	−40	85	−55	125	°C

## ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5$  V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	TLC27M4C TLC27M4AC TLC27M4BC TLC27M9C			UNIT		
				MIN	TYP	MAX			
$V_{IO}$	Input offset voltage	TLC27M4C	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	1.1 10	mV	
						Full range	12		
		TLC27M4AC	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	0.9 5		
						Full range	6.5		
		TLC274BC	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	250 2000	$\mu$ V	
						Full range	3000		
		TLC279C	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	210 900		
						Full range	1500		
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage				25°C to 70°C		1.7	$\mu$ V/°C	
$I_{IO}$	Input offset current <sup>(2)</sup>	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C		0.1		pA	
				70°C		7 300			
$I_{IB}$	Input bias current <sup>(2)</sup>	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C		0.6		pA	
				70°C		40 600			
$V_{ICR}$	Common-mode input voltage range <sup>(3)</sup>			25°C	-0.2 to 4	-0.3 to 4.2		V	
				Full range	-0.2 to 3.5				
$V_{OH}$	High-level output voltage	$V_{ID} = 100$ mV,	$R_L = 100$ k $\Omega$	25°C	3.2	3.9		V	
				0°C	3	3.9			
				70°C	3	4			
$V_{OL}$	Low-level output voltage	$V_{ID} = -100$ mV,	$I_{OL} = 0$	25°C		0 50		mV	
				0°C		0 50			
				70°C		0 50			
$A_{VD}$	Large-signal differential voltage amplification	$V_O = 0.25$ V to 2 V,	$R_L = 100$ k $\Omega$	25°C	25	170		V/mV	
				0°C	15	200			
				70°C	15	140			
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$		25°C	65	91		dB	
				0°C	60	91			
				70°C	60	92			
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	25°C	70	93		dB	
				0°C	60	92			
				70°C	60	94			
$I_{DD}$	Supply current (four amplifiers)	$V_O = 2.5$ V, No load	$V_{IC} = 2.5$ V,	25°C		420 1120		$\mu$ A	
				0°C		500 1280			
				70°C		340 880			

(1) Full range is 0°C to 70°C.

(2) The typical values of input bias current and input offset current below 5 pA were determined mathematically.

(3) This range also applies to each input individually.

**ELECTRICAL CHARACTERISTICS**

at specified free-air temperature,  $V_{DD} = 10$  V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	TLC27M4C TLC27M4AC TLC27M4BC TLC27M9C			UNIT		
				MIN	TYP	MAX			
$V_{IO}$	Input offset voltage	TLC27M4C	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	25°C	1.1	10	mV	
			$R_L = 100$ k $\Omega$	$R_L = 100$ k $\Omega$	Full range		12		
		TLC27M4AC	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	25°C	0.9	5		
			$R_L = 100$ k $\Omega$	$R_L = 100$ k $\Omega$	Full range		6.5		
		TLC274BC	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	25°C	260	2000	$\mu$ V	
			$R_L = 100$ k $\Omega$	$R_L = 100$ k $\Omega$	Full range		3000		
		TLC279C	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	25°C	220	1200		
			$R_L = 100$ k $\Omega$	$R_L = 100$ k $\Omega$	Full range		1900		
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage			25°C to 70°C		2.1		$\mu$ V/°C	
$I_{IO}$	Input offset current <sup>(2)</sup>	$V_O = 5$ V,	$V_{IC} = 5$ V	25°C		0.1		pA	
				70°C		7	300		
$I_{IB}$	Input bias current <sup>(2)</sup>	$V_O = 5$ V,	$V_{IC} = 5$ V	25°C		0.7		pA	
				70°C		50	600		
$V_{ICR}$	Common-mode input voltage range <sup>(3)</sup>			25°C	-0.2 to 9	-0.3 to 9.2		V	
				Full range	-0.2 to 8.5				
$V_{OH}$	High-level output voltage	$V_{ID} = 100$ mV,	$R_L = 100$ k $\Omega$	25°C	8	8.7		V	
				0°C	7.8	8.7			
				70°C	7.8	8.7			
$V_{OL}$	Low-level output voltage	$V_{ID} = -100$ mV,	$I_{OL} = 0$	25°C	0	50		mV	
				0°C	0	50			
				70°C	0	50			
$A_{VD}$	Large-signal differential voltage amplification	$V_O = 1$ V to 6 V,	$R_L = 100$ k $\Omega$	25°C	25	275		V/mV	
				0°C	15	320			
				70°C	15	230			
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$			25°C	65	94	dB	
					0°C	60	94		
					70°C	60	94		
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	25°C	70	93		dB	
				0°C	60	92			
				70°C	60	94			
$I_{DD}$	Supply current (four amplifiers)	$V_O = 5$ V, No load	$V_{IC} = 5$ V,	25°C		570	1200	$\mu$ A	
				0°C		690	1600		
				70°C		440	1120		

(1) Full range is 0°C to 70°C.

(2) The typical values of input bias current and input offset current below 5 pA were determined mathematically.

(3) This range also applies to each input individually.

## ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5$  V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	TLC27M4I TLC27M4AI TLC27M4BI TLC27M9I			UNIT	
				MIN	TYP	MAX		
$V_{IO}$	Input offset voltage	TLC27M4I	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	1.1 10	mV
						Full range	13	
		TLC27M4AI	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	0.9 5	
						Full range	6.5	
		TLC27M4BI	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	250 2000	$\mu$ V
						Full range	3000	
		TLC27M9I	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	$V_{IC} = 0$ ,	$R_L = 100$ k $\Omega$	25°C	210 900	
						Full range	2000	
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage				25°C to 85°C		1.7	$\mu$ V/°C
$I_{IO}$	Input offset current <sup>(2)</sup>	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C		0.1	pA	
				85°C		24 1000		
$I_{IB}$	Input bias current <sup>(2)</sup>	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C		0.6	pA	
				85°C		200 2000		
$V_{ICR}$	Common-mode input voltage range <sup>(3)</sup>			25°C	-0.2 to 4	-0.3 to 4.2	V	
				Full range	-0.2 to 3.5			
$V_{OH}$	High-level output voltage	$V_{ID} = 100$ mV,	$R_L = 100$ k $\Omega$	25°C	3.2	3.9	V	
				-40°C	3	3.9		
				85°C	3	4		
$V_{OL}$	Low-level output voltage	$V_{ID} = -100$ mV,	$I_{OL} = 0$	25°C		0 50	mV	
				-40°C		0 50		
				85°C		0 50		
$A_{VD}$	Large-signal differential voltage amplification	$V_O = 0.25$ V to 2 V,	$R_L = 100$ k $\Omega$	25°C	25	170	V/mV	
				-40°C	15	270		
				85°C	15	130		
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$		25°C	65	91	dB	
				-40°C	60	90		
				85°C	60	90		
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	25°C	70	93	dB	
				-40°C	60	91		
				85°C	60	94		
$I_{DD}$	Supply current (four amplifiers)	$V_O = 2.5$ V, No load	$V_{IC} = 2.5$ V,	25°C		420 1120	$\mu$ A	
				-40°C		630 1600		
				85°C		320 800		

(1) Full range is -40°C to 85°C.

(2) The typical values of input bias current and input offset current below 5 pA were determined mathematically.

(3) This range also applies to each input individually.

## ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 10$  V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	TLC27M4I TLC27M4AI TLC27M4BI TLC27M9I			UNIT	
				MIN	TYP	MAX		
$V_{IO}$	Input offset voltage	TLC27M4I	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	1.1	10	mV	
			$R_L = 100$ k $\Omega$	Full range		13		
		TLC27M4AI	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	0.9	5		
			$R_L = 100$ k $\Omega$	Full range		7		
		TLC27M4BI	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	260	2000	$\mu$ V	
			$R_L = 100$ k $\Omega$	Full range		3500		
		TLC27M9I	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	220	1200		
			$R_L = 100$ k $\Omega$	Full range		2900		
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage			25°C to 85°C		2.1	$\mu$ V/°C	
$I_{IO}$	Input offset current <sup>(2)</sup>	$V_O = 5$ V,	$V_{IC} = 5$ V	25°C	0.1		pA	
				85°C	26	1000		
$I_{IB}$	Input bias current <sup>(2)</sup>	$V_O = 5$ V,	$V_{IC} = 5$ V	25°C	0.7		pA	
				85°C	220	2000		
$V_{ICR}$	Common-mode input voltage range <sup>(3)</sup>			25°C	-0.2 to 9	-0.3 to 9.2	V	
				Full range	-0.2 to 8.5			
$V_{OH}$	High-level output voltage	$V_{ID} = 100$ mV,	$R_L = 100$ k $\Omega$	25°C	8	8.7	V	
				-40°C	7.8	8.7		
				85°C	7.8	8.7		
$V_{OL}$	Low-level output voltage	$V_{ID} = -100$ mV,	$I_{OL} = 0$	25°C	0	50	mV	
				-40°C	0	50		
				85°C	0	50		
$A_{VD}$	Large-signal differential voltage amplification	$V_O = 1$ V to 6 V,	$R_L = 100$ k $\Omega$	25°C	25	275	V/mV	
				-40°C	15	390		
				85°C	15	220		
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$		25°C	65	94	dB	
				-40°C	60	93		
				85°C	60	94		
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	25°C	70	93	dB	
				-40°C	60	91		
				85°C	60	94		
$I_{DD}$	Supply current (four amplifiers)	$V_O = 5$ V, No load	$V_{IC} = 5$ V,	25°C	570	1200	$\mu$ A	
				-40°C	900	1800		
				85°C	410	1040		

(1) Full range is -40°C to 85°C.

(2) The typical values of input bias current and input offset current below 5 pA were determined mathematically.

(3) This range also applies to each input individually.

## ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5$  V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	TLC27M4M TLC27M9M			UNIT
				MIN	TYP	MAX	
$V_{IO}$	Input offset voltage	TLC27M4M	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	1.1	10	mV
			$V_{IC} = 0$ , $R_L = 100$ k $\Omega$	Full range		12	
	TLC27M9M		$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	210	900	$\mu$ V
			$V_{IC} = 0$ , $R_L = 100$ k $\Omega$	Full range		3750	
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage			25°C to 125°C		1.7	$\mu$ V/°C
$I_{IO}$	Input offset current <sup>(2)</sup>		$V_O = 2.5$ V, $V_{IC} = 2.5$ V	25°C	0.1		pA
				125°C	1.4	15	nA
$I_{IB}$	Input bias current <sup>(2)</sup>		$V_O = 2.5$ V, $V_{IC} = 2.5$ V	25°C	0.6		pA
				85°C	9	35	nA
$V_{ICR}$	Common-mode input voltage range <sup>(3)</sup>			25°C	0 to 4	−0.3 to 4.2	V
				Full range	0 to 3.5		V
$V_{OH}$	High-level output voltage		$V_{ID} = 100$ mV, $R_L = 100$ k $\Omega$	25°C	3.2	3.9	V
				−55°C	3	3.9	
				125°C	3	4	
$V_{OL}$	Low-level output voltage		$V_{ID} = −100$ mV, $I_{OL} = 0$	25°C	0	50	mV
				−55°C	0	50	
				125°C	0	50	
$A_{VD}$	Large-signal differential voltage amplification		$V_O = 0.25$ V to 2 V, $R_L = 100$ k $\Omega$	25°C	25	170	V/mV
				−55°C	15	270	
				125°C	15	120	
CMRR	Common-mode rejection ratio		$V_{IC} = V_{ICR\min}$	25°C	65	91	dB
				−55°C	60	89	
				125°C	60	91	
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )		$V_{DD} = 5$ V to 10 V, $V_O = 1.4$ V	25°C	70	93	dB
				−55°C	60	91	
				125°C	60	94	
$I_{DD}$	Supply current (four amplifiers)		$V_O = 2.5$ V, No load	25°C	420	1120	$\mu$ A
				−55°C	680	1760	
				125°C	280	720	

(1) Full range is −55°C to 125°C.

(2) The typical values of input bias current and input offset current below 5 pA were determined mathematically.

(3) This range also applies to each input individually.

## ELECTRICAL CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 10$  V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^{(1)}$	TLC27M4M TLC27M9M			UNIT
				MIN	TYP	MAX	
$V_{IO}$	Input offset voltage	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	1.1	10	12	mV
		$V_{IC} = 0$ , $R_L = 100$ k $\Omega$	Full range				
	TLC27M9M	$V_O = 1.4$ V, $R_S = 50$ $\Omega$ ,	25°C	220	1200	4300	$\mu$ V
		$V_{IC} = 0$ , $R_L = 100$ k $\Omega$	Full range				
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage		25°C to 125°C	2.1			$\mu$ V/°C
$I_{IO}$	Input offset current <sup>(2)</sup>	$V_O = 5$ V, $V_{IC} = 5$ V	25°C	0.1			pA
			125°C	1.8	15		nA
$I_{IB}$	Input bias current <sup>(2)</sup>	$V_O = 5$ V, $V_{IC} = 5$ V	25°C	0.7			pA
			125°C	10	35		nA
$V_{ICR}$	Common-mode input voltage range <sup>(3)</sup>		25°C	0	–0.3		V
			Full range	to 9	to 9.2		V
$V_{OH}$	High-level output voltage	$V_{ID} = 100$ mV, $R_L = 100$ k $\Omega$	25°C	8	8.7		V
			–55°C	7.8	8.6		
			125°C	7.8	8.8		
$V_{OL}$	Low-level output voltage	$V_{ID} = –100$ mV, $I_{OL} = 0$	25°C	0	50		mV
			–55°C	0	50		
			125°C	0	50		
$A_{VD}$	Large-signal differential voltage amplification	$V_O = 1$ V to 6 V, $R_L = 100$ k $\Omega$	25°C	25	275		V/mV
			–55°C	15	420		
			125°C	15	190		
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$	25°C	65	94		dB
			–55°C	60	93		
			125°C	60	93		
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	$V_{DD} = 5$ V to 10 V, $V_O = 1.4$ V	25°C	70	93		dB
			–55°C	60	91		
			125°C	60	94		
$I_{DD}$	Supply current (four amplifiers)	$V_O = 5$ V, No load	25°C	570	1200		$\mu$ A
			–55°C	980	2000		
			125°C	360	960		

(1) Full range is –55°C to 70°C.

(2) The typical values of input bias current and input offset current below 5 pA were determined mathematically.

(3) This range also applies to each input individually.

## ELECTRICAL CHARACTERISTICS

$V_{DD} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLC27M4Y			UNIT
		MIN	TYP	MAX	
$V_{IO}$	Input offset voltage $V_O = 1.4 \text{ V}$ , $R_S = 50 \Omega$ , $V_{IC} = 0$ , $R_L = 100 \text{ k}\Omega$		1.1	10	mV
$\alpha_{VIO}$	Temperature coefficient of input offset voltage $T_A = 25^\circ\text{C}$ to $70^\circ\text{C}$		1.7		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$	Input offset current <sup>(1)</sup> $V_O = 2.5 \text{ V}$ , $V_{IC} = 2.5 \text{ V}$		0.1		pA
$I_{IB}$	Input bias current <sup>(1)</sup> $V_O = 2.5 \text{ V}$ , $V_{IC} = 2.5 \text{ V}$		0.6		pA
$V_{ICR}$	Common-mode input voltage range <sup>(2)</sup>		-0.2 to 4	-0.3 to 4.2	V
$V_{OH}$	High-level output voltage $V_{ID} = 100 \text{ mV}$ , $R_L = 100 \text{ k}\Omega$	3.2	3.9		V
$V_{OL}$	Low-level output voltage $V_{ID} = -100 \text{ mV}$ , $I_{OL} = 0$		0	50	mV
$A_{VD}$	Large-signal differential voltage amplification $V_O = 0.25 \text{ V}$ to $2 \text{ V}$ , $R_L = 100 \text{ k}\Omega$	25	170		V/mV
CMRR	Common-mode rejection ratio $V_{IC} = V_{ICR\min}$	65	91		dB
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) $V_{DD} = 5 \text{ V}$ to $10 \text{ V}$ , $V_O = 1.4 \text{ V}$	70	93		dB
$I_{DD}$	Supply current (four amplifiers) $V_O = 2.5 \text{ V}$ , No load		420	1120	$\mu\text{A}$

(1) The typical values of input bias current and input offset current below 5 pA were determined mathematically.  
 (2) This range also applies to each input individually.

## ELECTRICAL CHARACTERISTICS

$V_{DD} = 10 \text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLC27M4Y			UNIT
		MIN	TYP	MAX	
$V_{IO}$	Input offset voltage $V_O = 1.4 \text{ V}$ , $R_S = 50 \Omega$ , $V_{IC} = 0$ , $R_L = 100 \text{ k}\Omega$		1.1	10	mV
$\alpha_{VIO}$	Temperature coefficient of input offset voltage $T_A = 25^\circ\text{C}$ to $70^\circ\text{C}$		1.7		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$	Input offset current <sup>(1)</sup> $V_O = 5 \text{ V}$ , $V_{IC} = 5 \text{ V}$		0.1		pA
$I_{IB}$	Input bias current <sup>(1)</sup> $V_O = 5 \text{ V}$ , $V_{IC} = 5 \text{ V}$		0.6		pA
$V_{ICR}$	Common-mode input voltage range <sup>(2)</sup>		-0.2 to 9	-0.3 to 9.2	V
$V_{OH}$	High-level output voltage $V_{ID} = 100 \text{ mV}$ , $R_L = 100 \text{ k}\Omega$	8	8.7		V
$V_{OL}$	Low-level output voltage $V_{ID} = -100 \text{ mV}$ , $I_{OL} = 0$		0	50	mV
$A_{VD}$	Large-signal differential voltage amplification $V_O = 1 \text{ V}$ to $6 \text{ V}$ , $R_L = 100 \text{ k}\Omega$	25	275		V/mV
CMRR	Common-mode rejection ratio $V_{IC} = V_{ICR\min}$	65	94		dB
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) $V_{DD} = 5 \text{ V}$ to $10 \text{ V}$ , $V_O = 1.4 \text{ V}$	70	93		dB
$I_{DD}$	Supply current (four amplifiers) $V_O = 5 \text{ V}$ , No load		570	1200	$\mu\text{A}$

(1) The typical values of input bias current and input offset current below 5 pA were determined mathematically.  
 (2) This range also applies to each input individually.

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5\text{ V}$

PARAMETER	TEST CONDITIONS	$T_A$	TLC27M4C TLC27M4AC TLC27M4BC TLC27M9C			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1\text{ V}$	25°C	0.43		V/ $\mu\text{s}$
			0°C	0.46		
			70°C	0.36		
	$V_{IPP} = 2.5\text{ V}$		25°C	0.40		
			0°C	0.43		
			70°C	0.34		
$V_n$	Equivalent input noise voltage	$f = 1\text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20\text{ }\Omega$	25°C	32	nV/ $\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $R_L = 100\text{ k}\Omega$ , See <a href="#">Figure 1</a>	$C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	25°C	55		kHz
			0°C	60		
			70°C	50		
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20\text{ pF}$	25°C	525		kHz
			0°C	610		
			70°C	400		
$\Phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 3</a>	$f = B_1$ , See <a href="#">Figure 3</a>	25°C	40°		
			0°C	41°		
			70°C	39°		

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 10\text{ V}$

PARAMETER	TEST CONDITIONS	$T_A$	TLC27M4C TLC27M4AC TLC27M4BC TLC27M9C			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1\text{ V}$	25°C	0.62		V/ $\mu\text{s}$
			0°C	0.67		
			70°C	0.51		
	$V_{IPP} = 5.5\text{ V}$		25°C	0.56		
			0°C	0.61		
			70°C	0.46		
$V_n$	Equivalent input noise voltage	$f = 1\text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20\text{ }\Omega$	25°C	32	nV/ $\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $R_L = 100\text{ k}\Omega$ , See <a href="#">Figure 1</a>	$C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	25°C	35		kHz
			0°C	40		
			70°C	30		
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20\text{ pF}$	25°C	635		kHz
			0°C	710		
			70°C	510		
$\Phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 3</a>	$f = B_1$ , See <a href="#">Figure 3</a>	25°C	43°		
			0°C	44°		
			70°C	42°		

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5\text{ V}$

PARAMETER	TEST CONDITIONS	$T_A$	TLC27M4I TLC27M4AI TLC27M4BI TLC27M9I			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1\text{ V}$	25°C	0.43		V/ $\mu\text{s}$
			-40°C	0.51		
			85°C	0.35		
	$V_{IPP} = 2.5\text{ V}$		25°C	0.40		
			-40°C	0.48		
			85°C	0.32		
$V_n$	Equivalent input noise voltage	$f = 1\text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20\text{ }\Omega$	25°C	32	nV/ $\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $R_L = 100\text{ k}\Omega$ , See <a href="#">Figure 1</a>	$C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	25°C	55		kHz
			-40°C	75		
			85°C	45		
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20\text{ pF}$	25°C	525		kHz
			-40°C	770		
			85°C	370		
$\Phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 3</a>	$f = B_1$ , See <a href="#">Figure 3</a>	25°C	40°		
			-40°C	43°		
			85°C	38°		

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 10\text{ V}$

PARAMETER	TEST CONDITIONS	$T_A$	TLC27M4I TLC27M4AI TLC27M4BI TLC27M9I			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1\text{ V}$	25°C	0.62		V/ $\mu\text{s}$
			-40°C	0.77		
			85°C	0.47		
	$V_{IPP} = 5.5\text{ V}$		25°C	0.56		
			-40°C	0.70		
			85°C	0.44		
$V_n$	Equivalent input noise voltage	$f = 1\text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20\text{ }\Omega$	25°C	32	nV/ $\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $R_L = 100\text{ k}\Omega$ , See <a href="#">Figure 1</a>	$C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	25°C	35		kHz
			-40°C	45		
			85°C	25		
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20\text{ pF}$	25°C	635		kHz
			-40°C	880		
			85°C	480		
$\Phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 3</a>	$f = B_1$ , See <a href="#">Figure 3</a>	25°C	43°		
			-40°C	46°		
			85°C	41°		

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5\text{ V}$

PARAMETER	TEST CONDITIONS	TA	TLC27M4M TLC27M9M			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1\text{ V}$	25°C	0.43		V/μs
			-55°C	0.54		
			125°C	0.29		
		$V_{IPP} = 2.5\text{ V}$	25°C	0.40		
			-55°C	0.50		
			125°C	0.28		
$V_n$	Equivalent input noise voltage	$f = 1\text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20\text{ }\Omega$	25°C	32	nV/√Hz
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $R_L = 100\text{ k}\Omega$ , See <a href="#">Figure 1</a>	$C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	25°C	56		kHz
			-55°C	80		
			125°C	40		
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20\text{ pF}$	25°C	525		kHz
			-55°C	850		
			125°C	330		
$\Phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 3</a>	$f = B_1$ , See <a href="#">Figure 3</a>	25°C	40°		
			-55°C	44°		
			125°C	36°		

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 10\text{ V}$

PARAMETER	TEST CONDITIONS	TA	TLC27M4M TLC27M9M			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1\text{ V}$	25°C	0.62		V/μs
			-55°C	0.81		
			125°C	0.38		
		$V_{IPP} = 5.5\text{ V}$	25°C	0.56		
			-55°C	0.73		
			125°C	0.35		
$V_n$	Equivalent input noise voltage	$f = 1\text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20\text{ }\Omega$	25°C	32	nV/√Hz
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $R_L = 100\text{ k}\Omega$ , See <a href="#">Figure 1</a>	$C_L = 20\text{ pF}$ , See <a href="#">Figure 1</a>	25°C	35		kHz
			-55°C	50		
			125°C	20		
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20\text{ pF}$	25°C	635		kHz
			-55°C	960		
			125°C	440		
$\Phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$ , See <a href="#">Figure 3</a>	$f = B_1$ , See <a href="#">Figure 3</a>	25°C	43°		
			-55°C	47°		
			125°C	39°		

## OPERATING CHARACTERISTICS

at specified free-air temperature,  $V_{DD} = 5$  V,  $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLC27M4Y			UNIT
		MIN	TYP	MAX	
SR	Slew rate at unity gain  $R_L = 100 \text{ k}\Omega$ , $C_L = 20 \text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1 \text{ V}$	0.43	0.40	$\text{V}/\mu\text{s}$
		$V_{IPP} = 2.5 \text{ V}$	0.40		
$V_n$	Equivalent input noise voltage  $f = 1 \text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20 \Omega$	32		$\text{nV}/\sqrt{\text{Hz}}$
$B_{OM}$	Maximum output-swing bandwidth  $V_O = V_{OH}$ , $R_L = 100 \text{ k}\Omega$ ,	$C_L = 20 \text{ pF}$ , See <a href="#">Figure 1</a>	55		$\text{kHz}$
$B_1$	Unity-gain bandwidth  $V_I = 10 \text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20 \text{ pF}$	525		$\text{kHz}$
$\Phi_m$	Phase margin  $V_I = 10 \text{ mV}$ , $C_L = 20 \text{ pF}$ ,	$f = B_1$ , See <a href="#">Figure 3</a>	40°		

## OPERATING CHARACTERISTICS


at specified free-air temperature,  $V_{DD} = 10$  V,  $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLC27M4Y			UNIT
		MIN	TYP	MAX	
SR	Slew rate at unity gain  $R_L = 100 \text{ k}\Omega$ , $C_L = 20 \text{ pF}$ , See <a href="#">Figure 1</a>	$V_{IPP} = 1 \text{ V}$	0.62	0.56	$\text{V}/\mu\text{s}$
		$V_{IPP} = 5.5 \text{ V}$	0.56		
$V_n$	Equivalent input noise voltage  $f = 1 \text{ kHz}$ , See <a href="#">Figure 2</a>	$R_S = 20 \Omega$	32		$\text{nV}/\sqrt{\text{Hz}}$
$B_{OM}$	Maximum output-swing bandwidth  $V_O = V_{OH}$ , $R_L = 100 \text{ k}\Omega$ ,	$C_L = 20 \text{ pF}$ , See <a href="#">Figure 1</a>	35		$\text{kHz}$
$B_1$	Unity-gain bandwidth  $V_I = 10 \text{ mV}$ , See <a href="#">Figure 3</a>	$C_L = 20 \text{ pF}$	635		$\text{kHz}$
$\Phi_m$	Phase margin  $V_I = 10 \text{ mV}$ , $C_L = 20 \text{ pF}$ ,	$f = B_1$ , See <a href="#">Figure 3</a>	43°		


## PARAMETER MEASUREMENT INFORMATION

### Single-Supply versus Split-Supply Test Circuits


Because the TLC27M4 and TLC27M9 are optimized for single-supply operation, circuit configurations used for the various tests often present some inconvenience since the input signal, in many cases, must be offset from ground. This inconvenience can be avoided by testing the device with split supplies and the output load tied to the negative rail. A comparison of single-supply versus split-supply test circuits is shown below. The use of either circuit gives the same result.

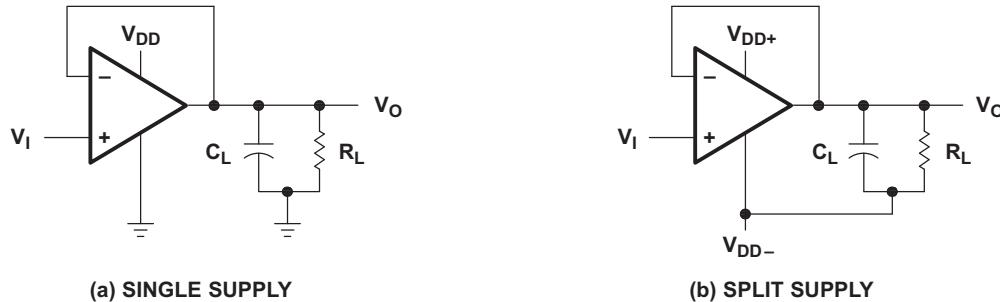

**Figure 1. Unity-Gain Amplifier**

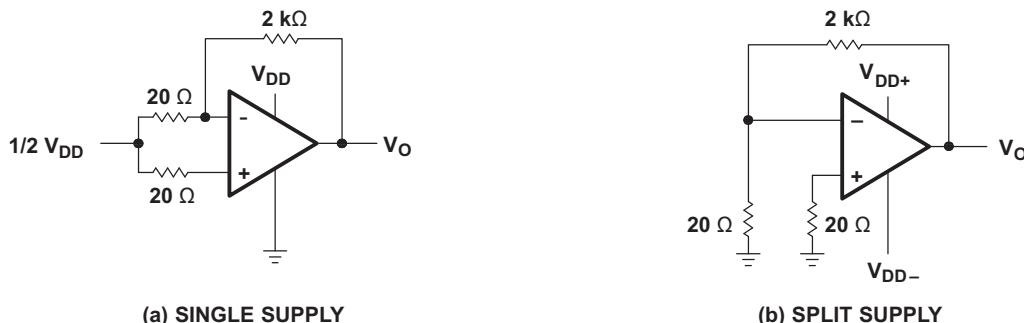

**Figure 2. Noise-Test Circuit**

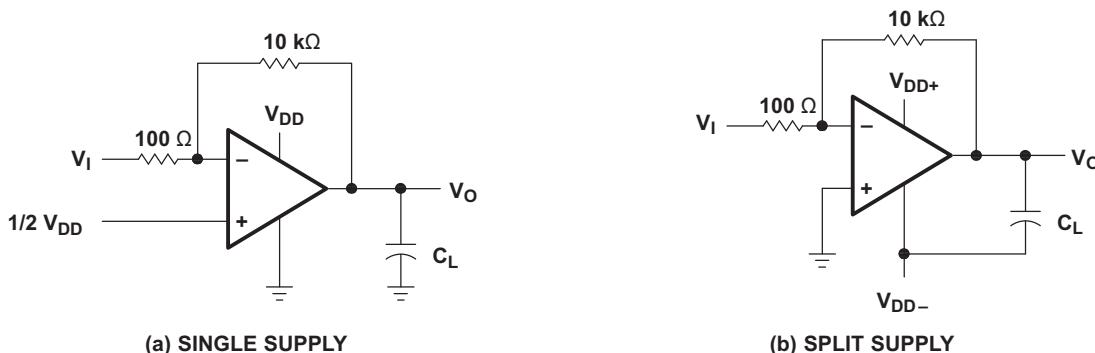

**Figure 3. Gain-of-100 Inverting Amplifier**


## PARAMETER MEASUREMENT INFORMATION (continued)

### Input Bias Current

Because of the high input impedance of the TLC27M4 and TLC27M9 operational amplifiers, attempts to measure the input bias current can result in erroneous readings. The bias current at normal room ambient temperature is typically less than 1 pA, a value that is easily exceeded by leakages on the test socket. Two suggestions are offered to avoid erroneous measurements:

1. Isolate the device from other potential leakage sources. Use a grounded shield around and between the device inputs (see [Figure 4](#)). Leakages that would otherwise flow to the inputs are shunted away.
2. Compensate for the leakage of the test socket by actually performing an input bias current test (using a picoammeter) with no device in the test socket. The actual input bias current can then be calculated by subtracting the open-socket leakage readings from the readings obtained with a device in the test socket.

One word of caution—many automatic testers as well as some bench-top operational amplifier testers use the servo-loop technique with a resistor in series with the device input to measure the input bias current; the voltage drop across the series resistor is measured and the bias current is calculated. This method requires that a device be inserted into the test socket to obtain a correct reading; therefore, an open-socket reading is not feasible using this method.

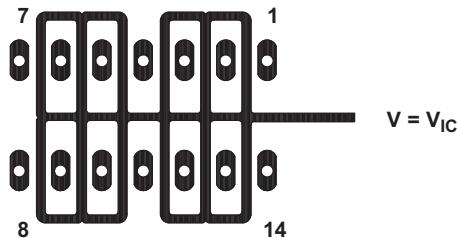

**Figure 4. Isolation Metal Around Device Inputs  
(J and N packages)**

### Low-Level Output Voltage

To obtain low-supply-voltage operation, some compromise was necessary in the input stage. This compromise results in the device low-level output being dependent on both the common-mode input voltage level as well as the differential input voltage level. When attempting to correlate low-level output readings with those quoted in the electrical specifications, these two conditions should be observed. If conditions other than these are to be used, please refer to [Figure 14](#) through [Figure 19](#) in the *Typical Characteristics* of this data sheet.

### Input Offset Voltage Temperature Coefficient

Erroneous readings often result from attempts to measure temperature coefficient of input offset voltage. This parameter is actually a calculation using input offset voltage measurements obtained at two different temperatures. When one (or both) of the temperatures is below freezing, moisture can collect on both the device and the test socket. This moisture results in leakage and contact resistance, which can cause erroneous input offset voltage readings. The isolation techniques previously mentioned have no effect on the leakage since the moisture also covers the isolation metal itself, thereby rendering it useless. It is suggested that these measurements be performed at temperatures above freezing to minimize error.

## PARAMETER MEASUREMENT INFORMATION (continued)

## Full-Power Response

Full-power response, the frequency above which the operational amplifier slew rate limits the output voltage swing, is often specified two ways: full-linear response and full-peak response. The full-linear response is generally measured by monitoring the distortion level of the output, while increasing the frequency of a sinusoidal input signal until the maximum frequency is found above which the output contains significant distortion. The full-peak response is defined as the maximum output frequency, without regard to distortion, above which full peak-to-peak output swing cannot be maintained.

Because there is no industry-wide accepted value for significant distortion, the full-peak response is specified in this data sheet and is measured using the circuit of [Figure 1](#). The initial setup involves the use of a sinusoidal input to determine the maximum peak-to-peak output of the device (the amplitude of the sinusoidal wave is increased until clipping occurs). The sinusoidal wave is then replaced with a square wave of the same amplitude. The frequency is then increased until the maximum peak-to-peak output can no longer be maintained ([Figure 5](#)). A square wave is used to allow a more accurate determination of the point at which the maximum peak-to-peak output is reached.

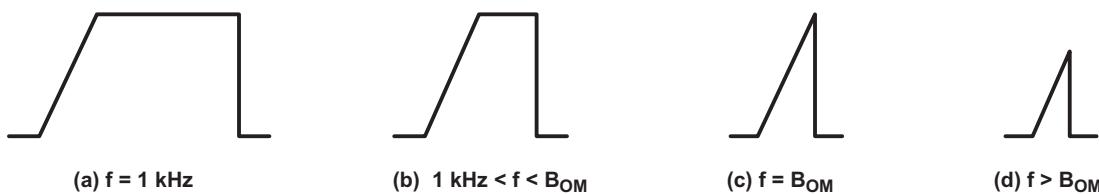


Figure 5. Full-Power-Response Output Signal

## Test Time

Inadequate test time is a frequent problem, especially when testing CMOS devices in a high-volume, short-test-time environment. Internal capacitances are inherently higher in CMOS than in bipolar and BiFET devices and require longer test times than their bipolar and BiFET counterparts. The problem becomes more pronounced with reduced supply levels and lower temperatures.

## TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
$V_{IO}$	Input offset voltage	Distribution	6, 7
$\alpha_{VIO}$	Temperature coefficient of input offset voltage	Distribution	8, 9
$V_{OH}$	High-level output voltage	vs High-level output current vs Supply voltage vs Free-air temperature	10, 11 12 13
$V_{OL}$	Low-level output voltage	vs Common-mode input voltage vs Differential input voltage vs Free-air temperature vs Low-level output current	14, 15 16 17 18, 19
$A_{VD}$	Differential voltage amplification	vs Supply voltage vs Free-air temperature Free vs Frequency	20 21 32, 33
$I_{IB}$	Input bias current	vs Free-air temperature	22
$I_{IO}$	Input offset current	vs Free-air temperature	22
$V_{IC}$	Common-mode input voltage	vs Supply voltage	23
$I_{DD}$	Supply current	vs Supply voltage vs Free-air temperature	24 25
SR	Slew rate	vs Supply voltage vs Free-air temperature	26 27
	Normalized slew rate	vs Free-air temperature	28
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	29
$B_1$	Unity gain bandwidth	vs Free-air temperature Free vs Supply voltage	30 31
	Phase shift	vs Frequency	32, 33
$\Phi_m$	Phase margin	vs Supply voltage vs Free-air temperature Free vs Load capacitance	34 35 36
$V_n$	Equivalent input noise voltage	vs Frequency	37

## TYPICAL CHARACTERISTICS

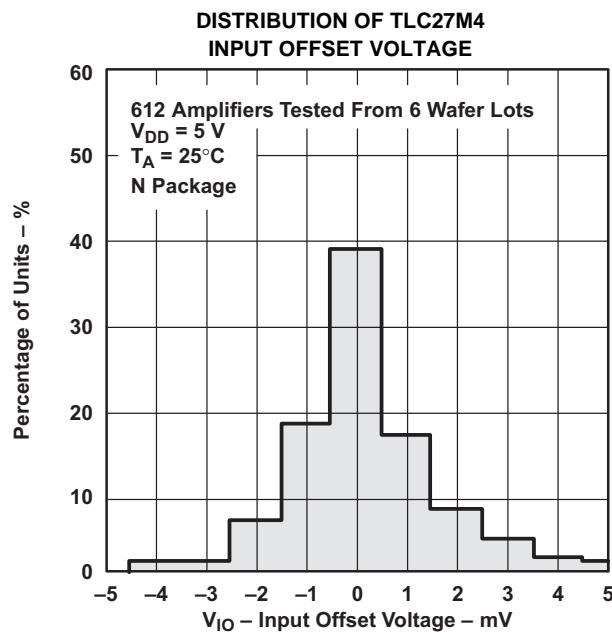


Figure 6.

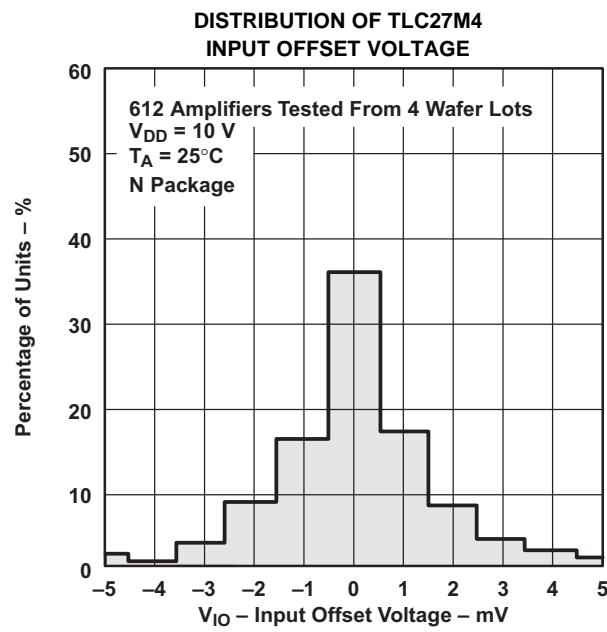


Figure 7.

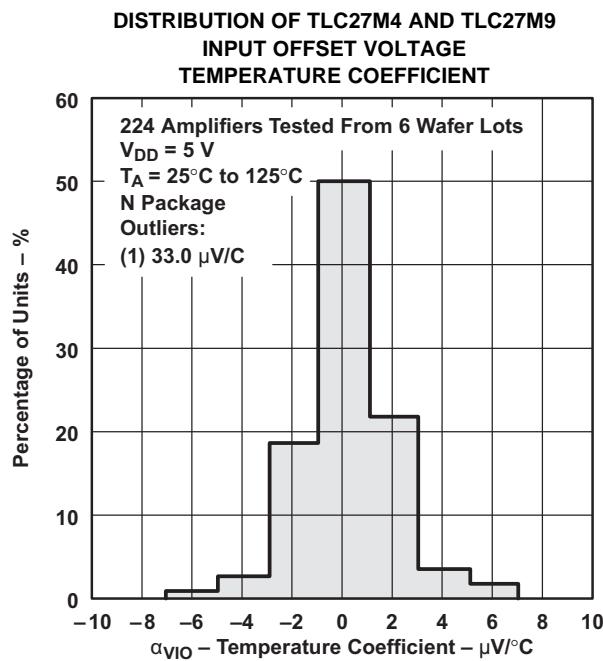


Figure 8.

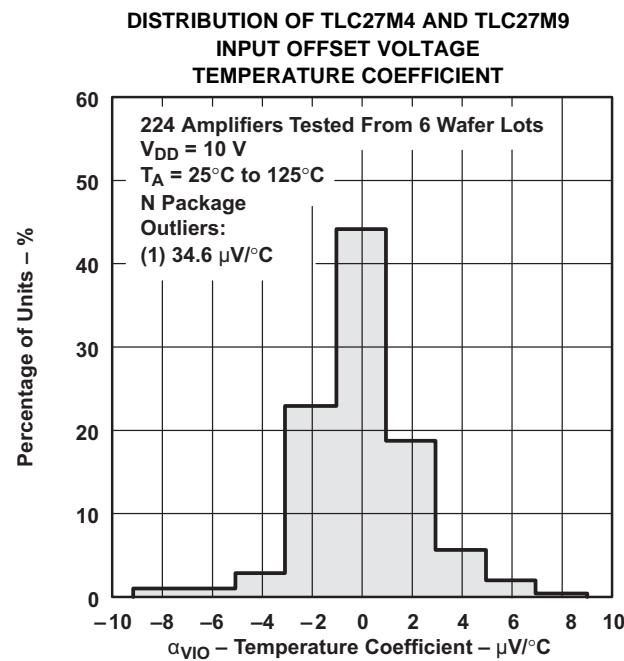


Figure 9.

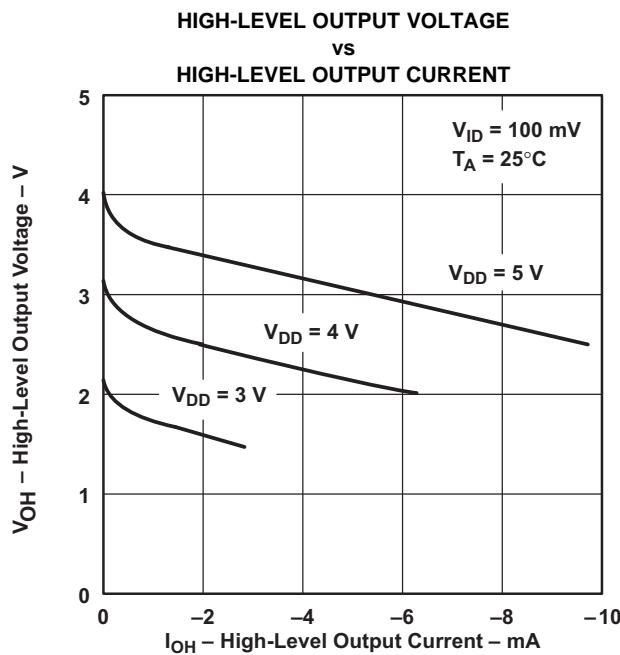
TYPICAL CHARACTERISTICS <sup>(1)</sup>

Figure 10.

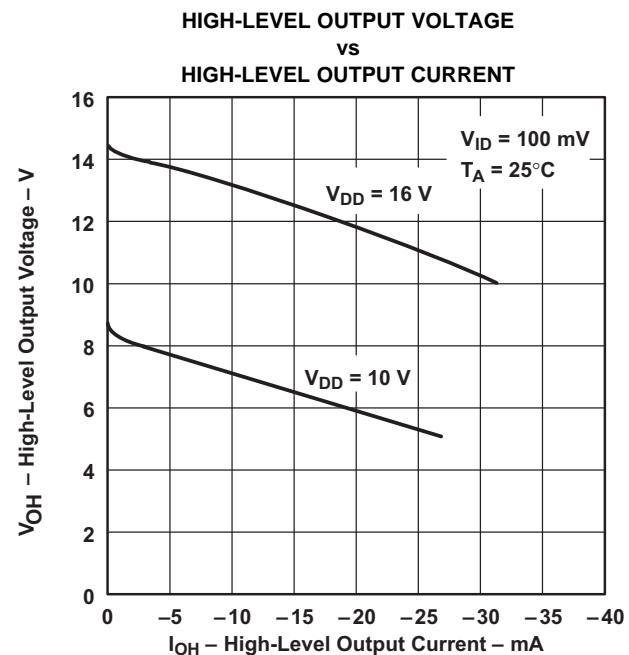


Figure 11.

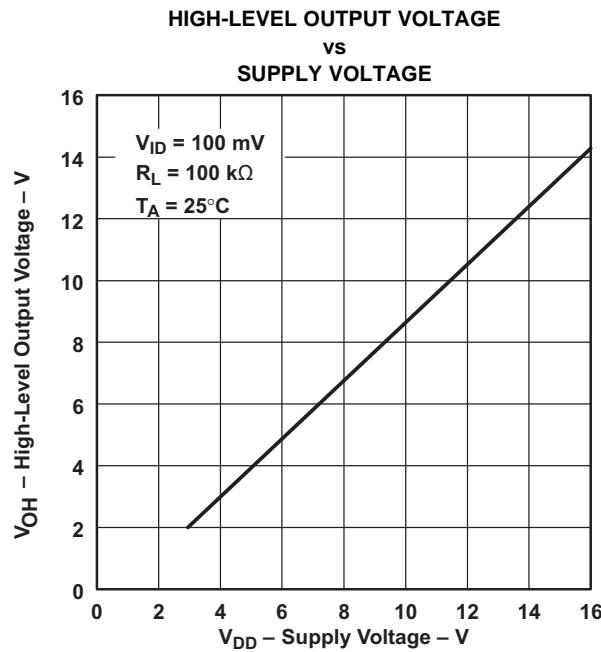


Figure 12.

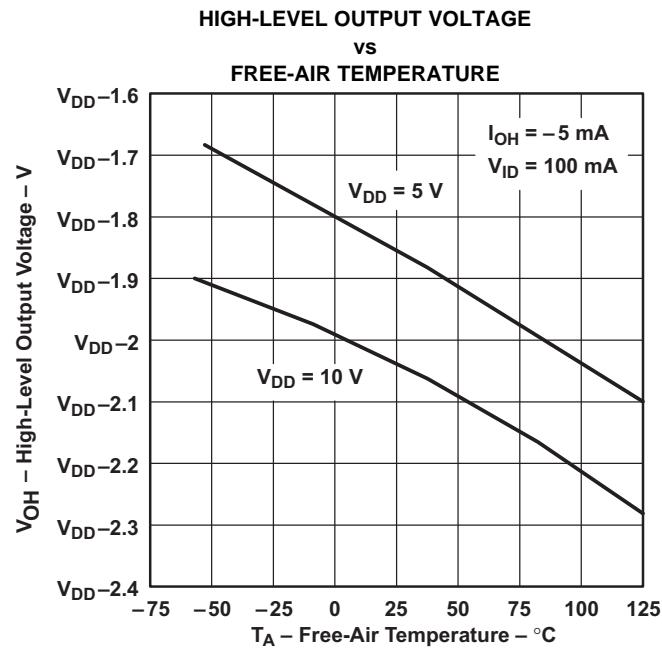
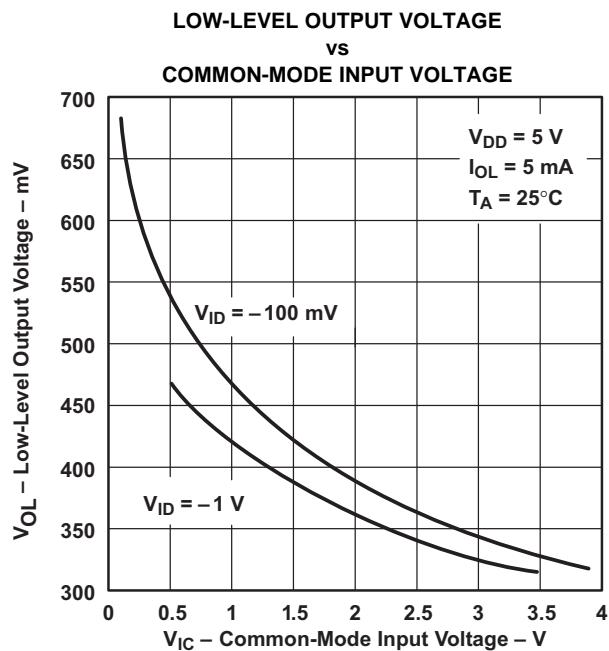
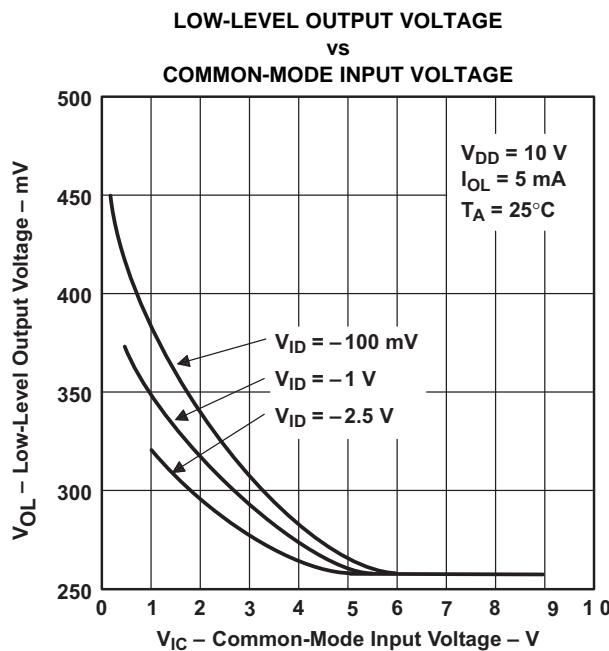
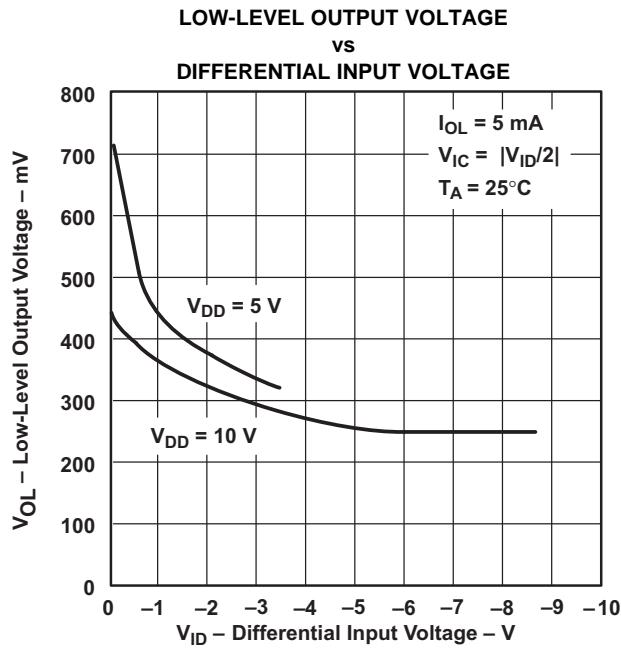
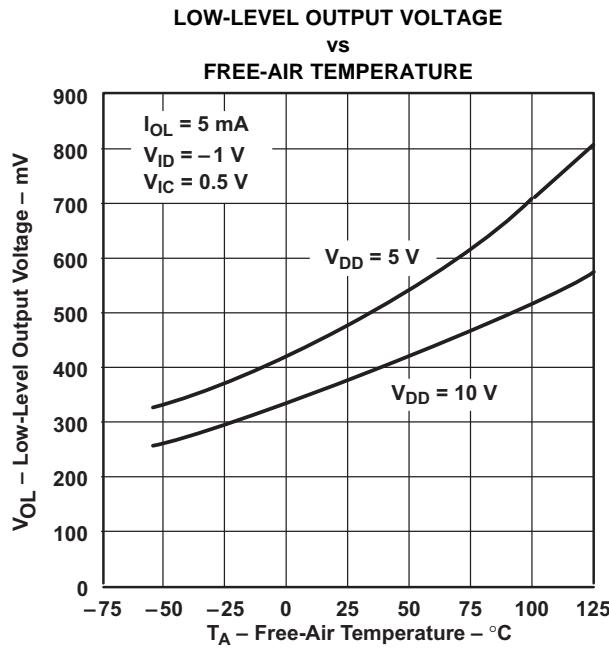


Figure 13.

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS <sup>(1)</sup>**

**Figure 14.**

**Figure 15.**

**Figure 16.**

**Figure 17.**

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

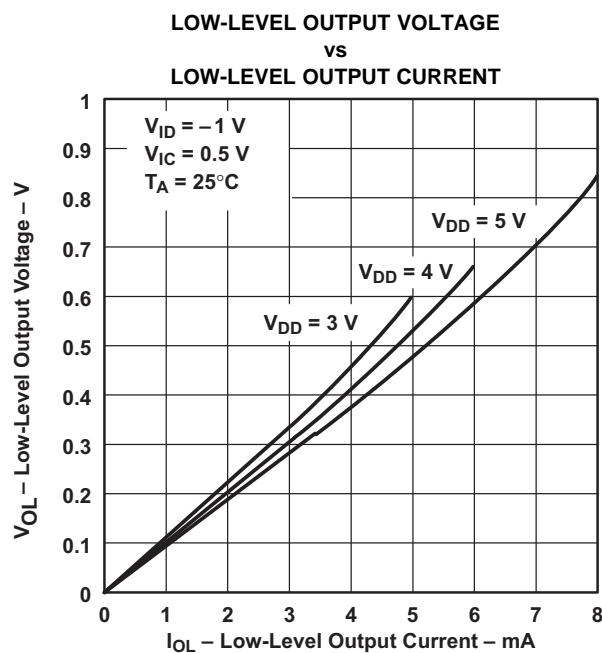
TYPICAL CHARACTERISTICS <sup>(1)</sup>

Figure 18.

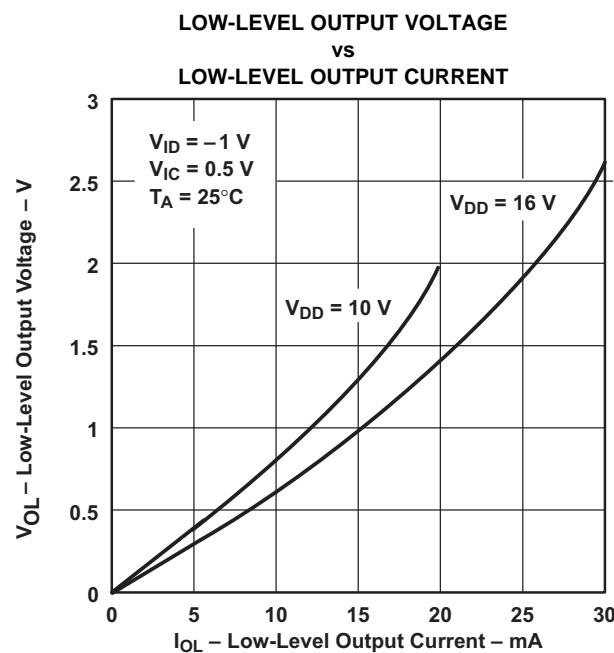


Figure 19.

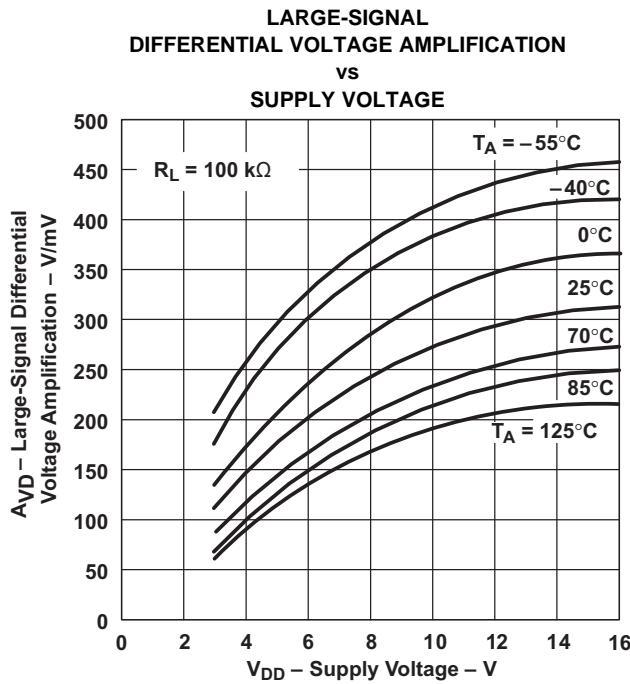


Figure 20.

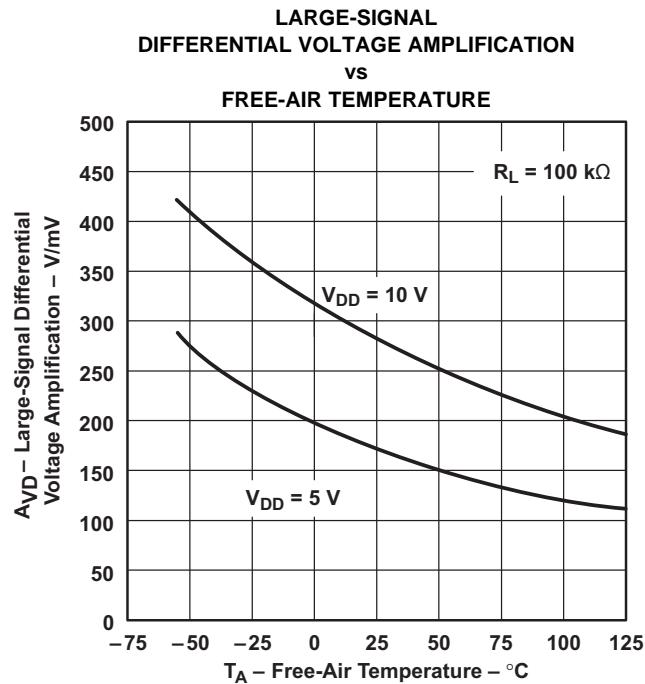
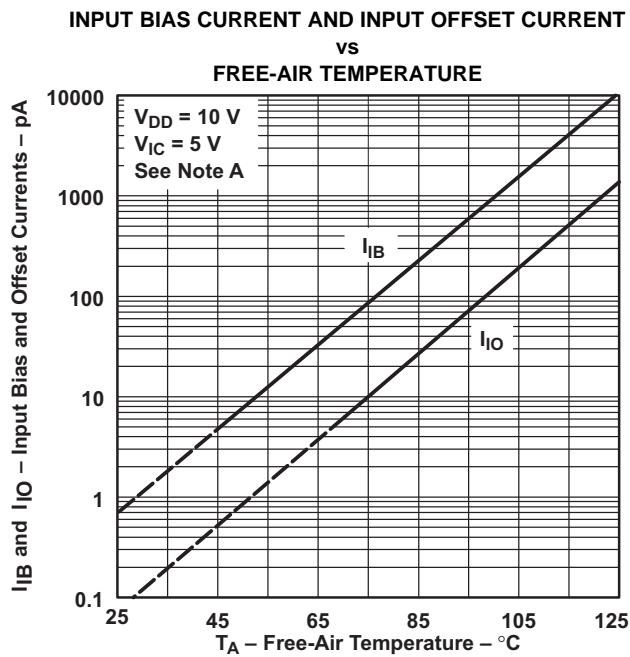


Figure 21.

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS <sup>(1)</sup>**


NOTE A: The typical values of input bias current and input offset current below 5 pA were determined mathematically.

Figure 22.

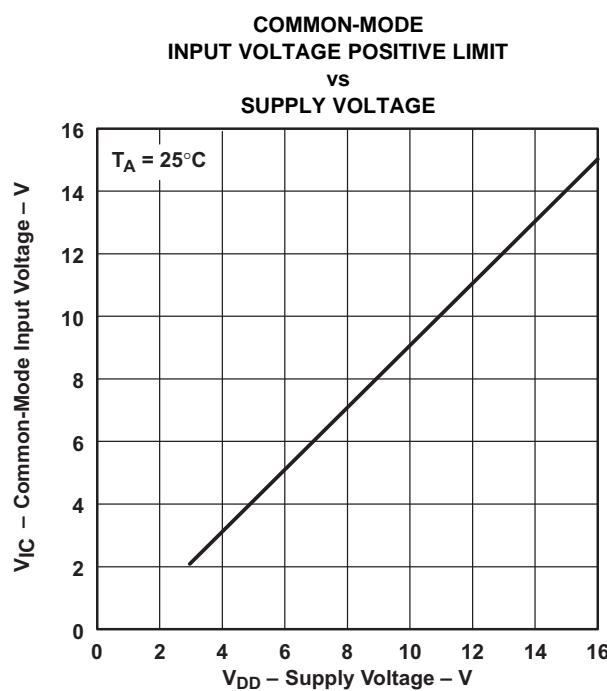


Figure 23.

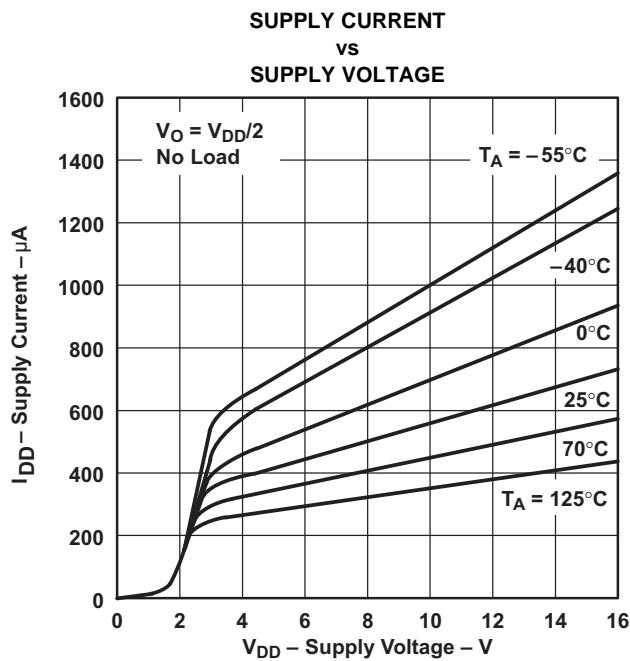


Figure 24.

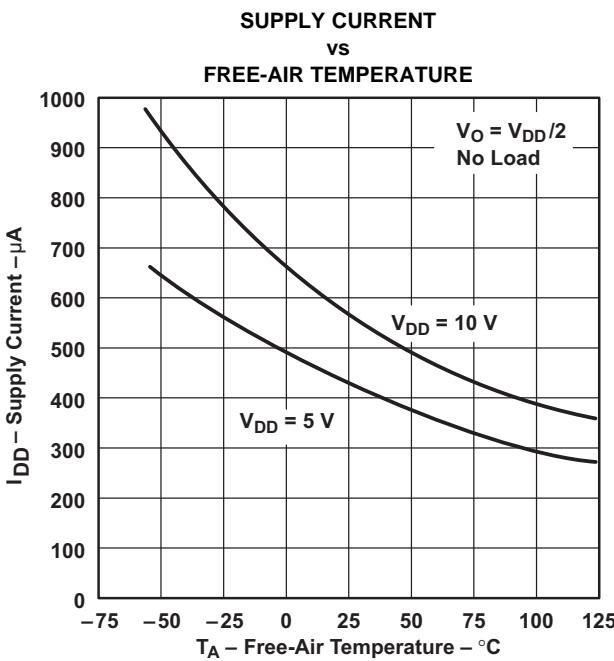


Figure 25.

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

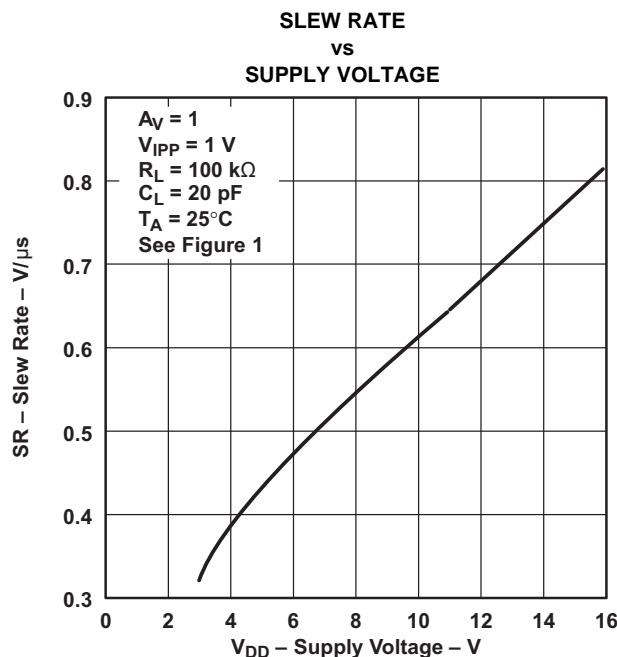
TYPICAL CHARACTERISTICS <sup>(1)</sup>

Figure 26.

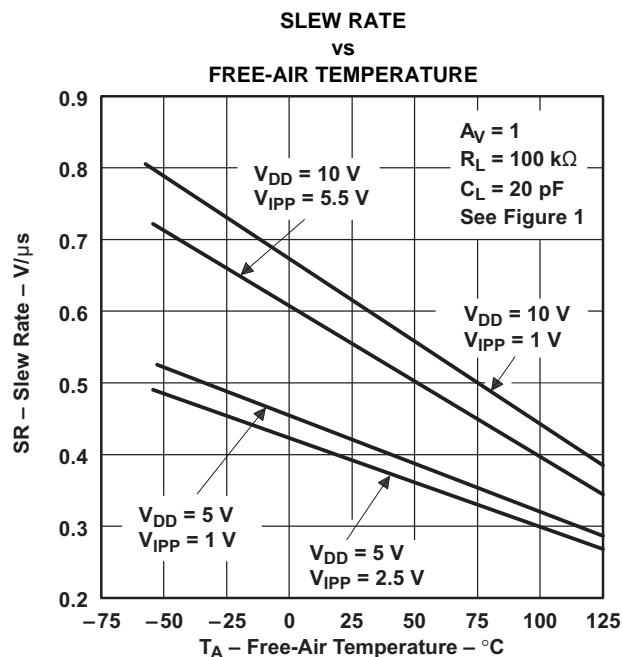


Figure 27.

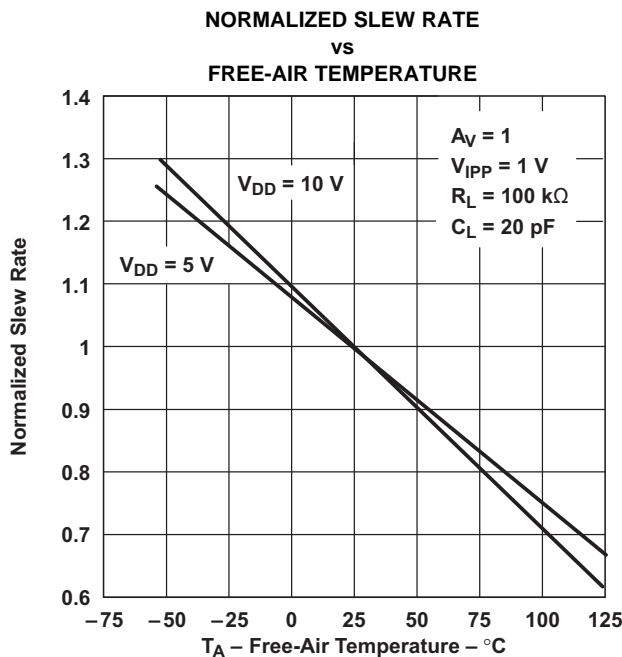


Figure 28.

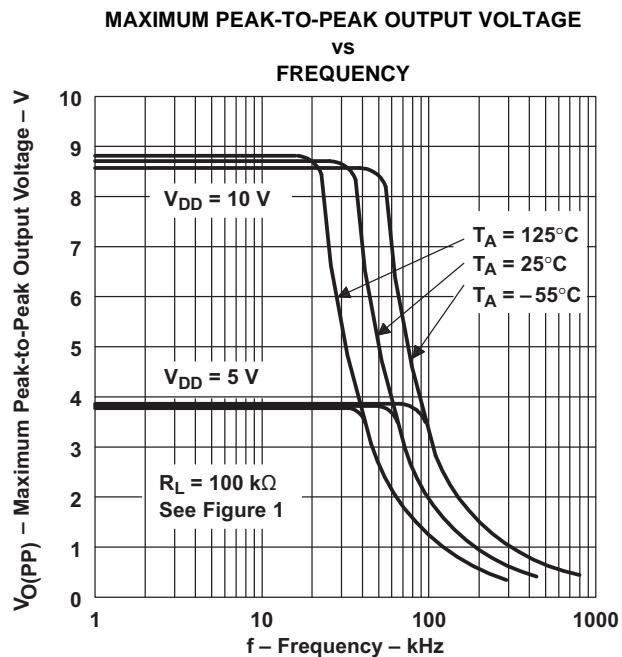
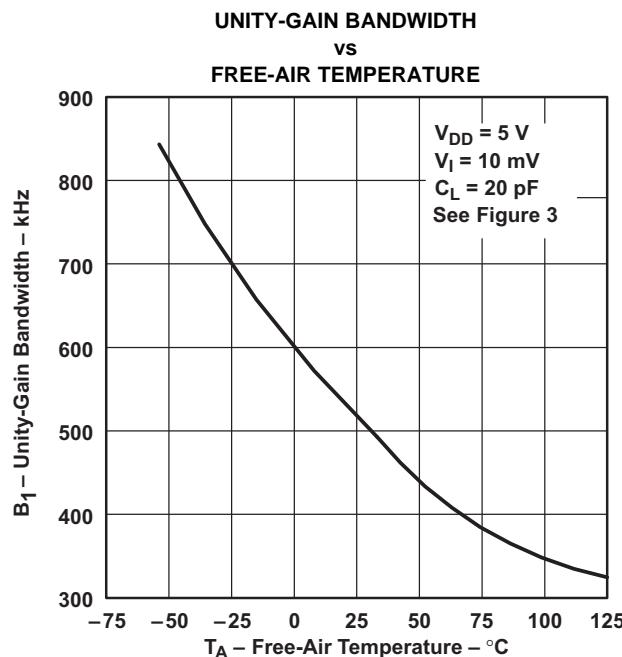
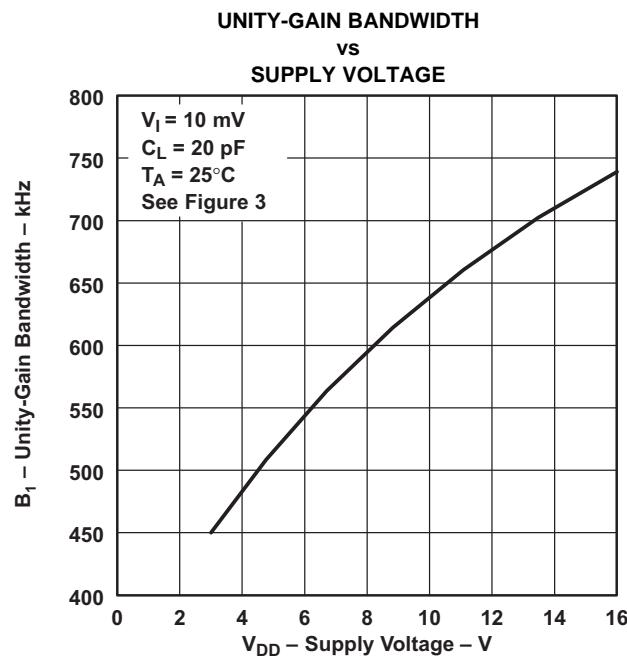
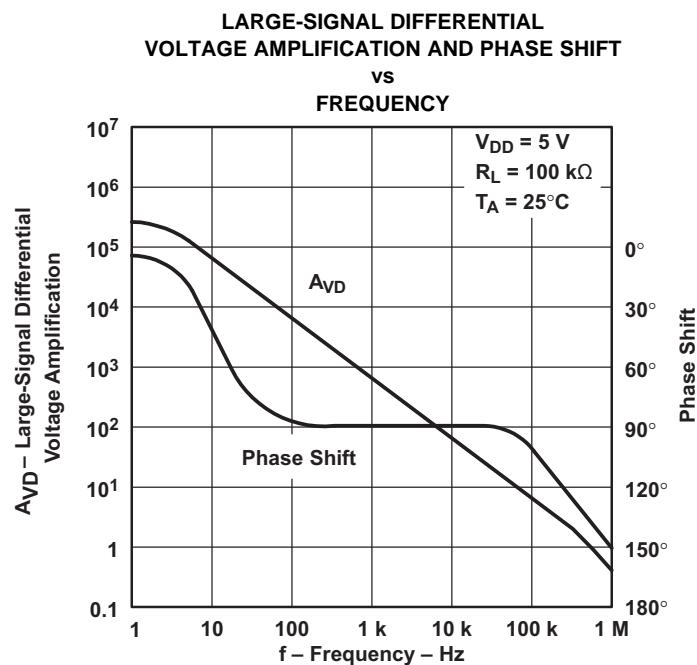


Figure 29.

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS <sup>(1)</sup>**

**Figure 30.**

**Figure 31.**

**Figure 32.**

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

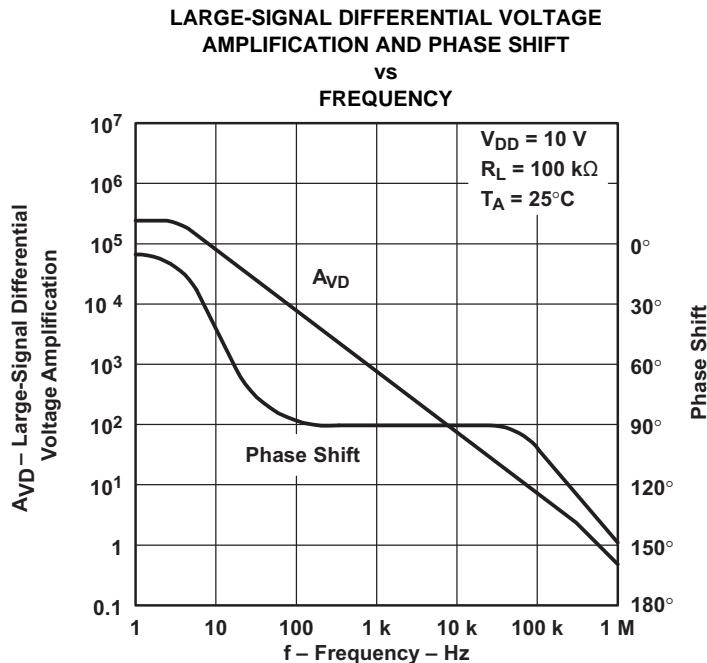
TYPICAL CHARACTERISTICS <sup>(1)</sup>

Figure 33.

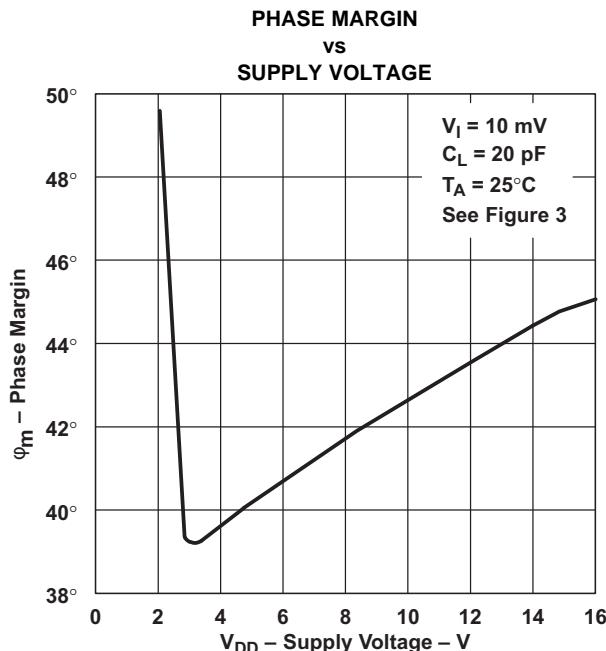


Figure 34.

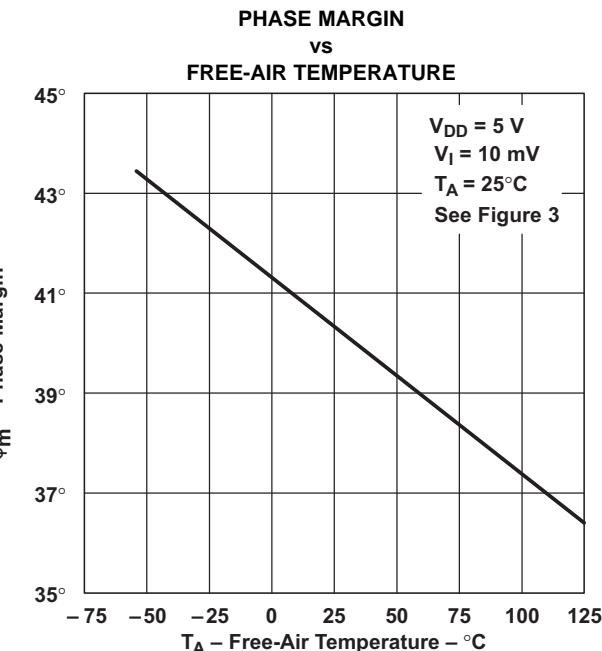
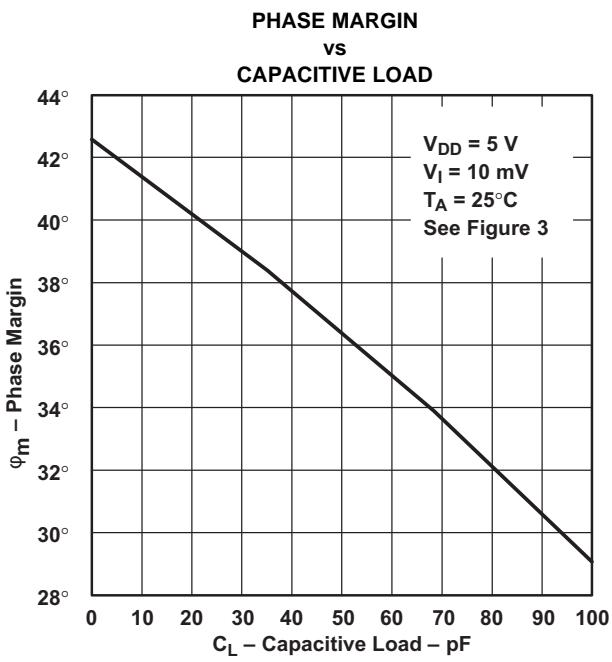
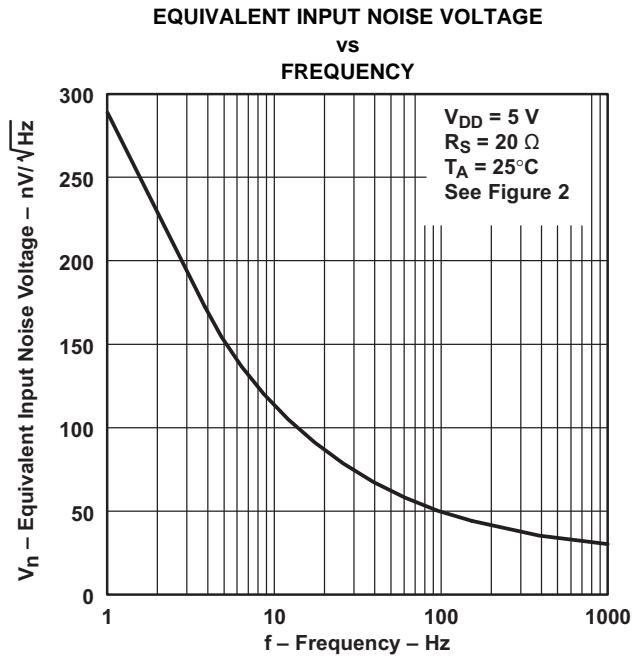


Figure 35.

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS**

**Figure 36.**

**Figure 37.**

## APPLICATION INFORMATION

### Single-Supply Operation

While the TLC27M4 and TLC27M9 perform well using dual power supplies (also called balanced or split supplies), the design is optimized for single-supply operation. This design includes an input common-mode voltage range that encompasses ground as well as an output voltage range that pulls down to ground. The supply voltage range extends down to 3 V (C-suffix types), thus allowing operation with supply levels commonly available for TTL and HCMOS; however, for maximum dynamic range, 16-V single-supply operation is recommended.

Many single-supply applications require that a voltage be applied to one input to establish a reference level that is above ground. A resistive voltage divider is usually sufficient to establish this reference level (see Figure 38). The low input bias current of the TLC27M4 and TLC27M9 permits the use of very large resistive values to implement the voltage divider, thus minimizing power consumption.

The TLC27M4 and TLC27M9 work well in conjunction with digital logic; however, when powering both linear devices and digital logic from the same power supply, the following precautions are recommended:

1. Power the linear devices from separate bypassed supply lines (see Figure 39); otherwise, the linear device supply rails can fluctuate due to voltage drops caused by high switching currents in the digital logic.
2. Use proper bypass techniques to reduce the probability of noise-induced errors. Single capacitive decoupling is often adequate; however, high-frequency applications may require RC decoupling.

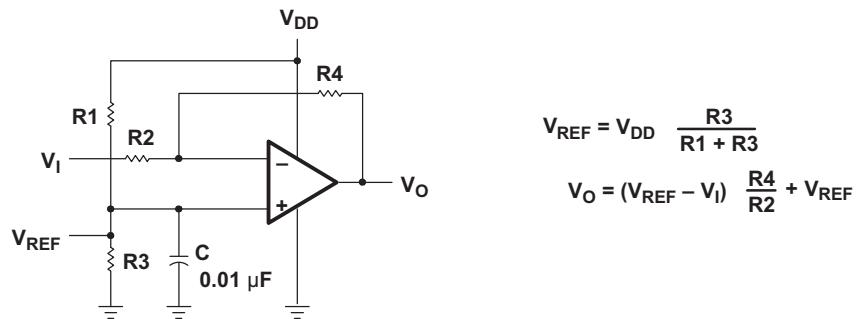


Figure 38. Inverting Amplifier With Voltage Reference

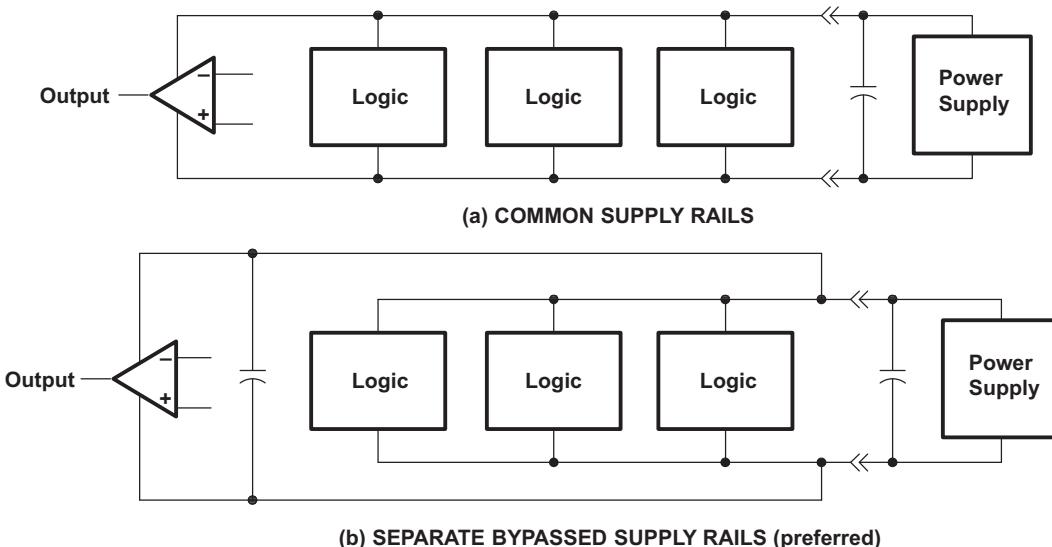


Figure 39. Common Versus Separate Supply Rails

## Input Characteristics

The TLC27M4 and TLC27M9 are specified with a minimum and a maximum input voltage that, if exceeded at either input, could cause the device to malfunction. Exceeding this specified range is a common problem, especially in single-supply operation. Note that the lower range limit includes the negative rail, while the upper range limit is specified at  $V_{DD} - 1$  V at  $T_A = 25^\circ\text{C}$  and at  $V_{DD} - 1.5$  V at all other temperatures.


The use of the polysilicon-gate process and the careful input circuit design gives the TLC27M4 and TLC27M9 very good input offset voltage drift characteristics relative to conventional metal-gate processes. Offset voltage drift in CMOS devices is highly influenced by threshold voltage shifts caused by polarization of the phosphorus dopant implanted in the oxide. Placing the phosphorus dopant in a conductor (such as a polysilicon gate) alleviates the polarization problem, thus reducing threshold voltage shifts by more than an order of magnitude. The offset voltage drift with time has been calculated to be typically 0.1  $\mu\text{V}/\text{month}$ , including the first month of operation.

Because of the extremely high input impedance and resulting low bias current requirements, the TLC27M4 and TLC27M9 are well suited for low-level signal processing; however, leakage currents on printed-circuit boards and sockets can easily exceed bias current requirements and cause a degradation in device performance. It is good practice to include guard rings around inputs (similar to those of [Figure 4](#) in the *Parameter Measurement Information* section). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input (see [Figure 40](#)).

Unused amplifiers should be connected as unity-gain followers to avoid possible oscillation.

## Noise Performance

The noise specifications in operational amplifier circuits are greatly dependent on the current in the first-stage differential amplifier. The low input bias current requirements of the TLC27M4 and TLC27M9 result in a very low noise current, which is insignificant in most applications. This feature makes the devices especially favorable over bipolar devices when using values of circuit impedance greater than 50  $\text{k}\Omega$ , since bipolar devices exhibit greater noise currents.

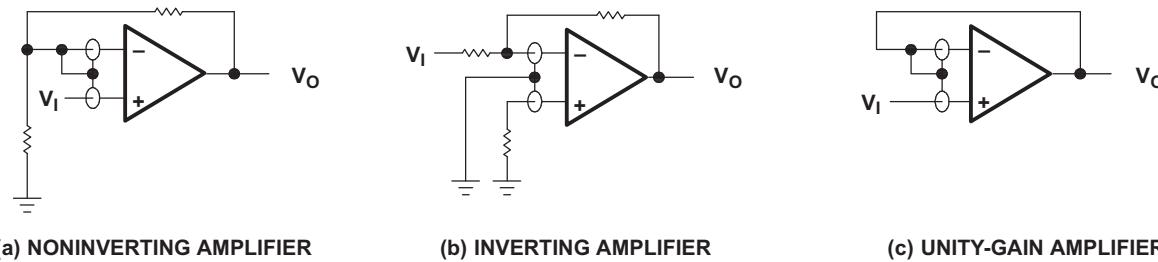


**Figure 40. Guard-Ring Schemes**

## Output Characteristics


The output stage of the TLC27M4 and TLC27M9 is designed to sink and source relatively high amounts of current (see *typical characteristics*). If the output is subjected to a short-circuit condition, this high current capability can cause device damage under certain conditions. Output current capability increases with supply voltage.

All operating characteristics of the TLC27M4 and TLC27M9 were measured using a 20-pF load. The devices drive higher capacitive loads; however, as output load capacitance increases, the resulting response pole occurs at lower frequencies, thereby causing ringing, peaking, or even oscillation (see [Figure 41](#)). In many cases, adding a small amount of resistance in series with the load capacitance alleviates the problem.

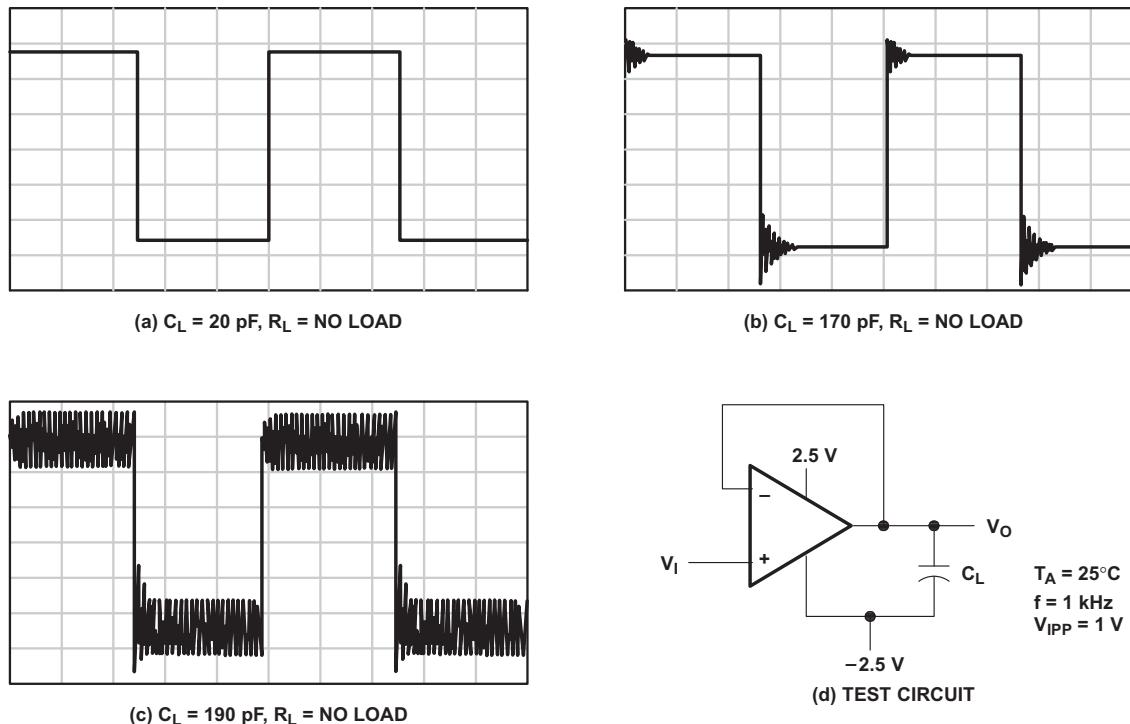


**Figure 41. Effect of Capacitive Loads and Test Circuit**

Although the TLC27M4 and TLC27M9 possess excellent high-level output voltage and current capability, methods for boosting this capability are available, if needed. The simplest method involves the use of a pullup resistor ( $R_P$ ) connected from the output to the positive supply rail (see [Figure 42](#)). There are two disadvantages to the use of this circuit. First, the NMOS pulldown transistor N4 (see equivalent schematic) must sink a comparatively large amount of current. In this circuit, N4 behaves like a linear resistor with an on-resistance between approximately  $60 \Omega$  and  $180 \Omega$ , depending on how hard the operational amplifier input is driven. With very low values of  $R_P$ , a voltage offset from 0 V at the output occurs. Second, pullup resistor  $R_P$  acts as a drain load to N4 and the gain of the operational amplifier is reduced at output voltage levels where N5 is not supplying the output current.


**Figure 42. Resistive Pullup to Increase  $V_{OH}$** 

$$R_P = \frac{V_{DD} - V_O}{I_F + I_L + I_P}$$

$I_P$  = Pullup current required by the operational amplifier (typically 500  $\mu$ A)


**Figure 43. Compensation for Input Capacitance**

## Feedback

Operational amplifier circuits nearly always employ feedback, and since feedback is the first prerequisite for oscillation, some caution is appropriate. Most oscillation problems result from driving capacitive loads (discussed previously) and ignoring stray input capacitance. A small-value capacitor connected in parallel with the feedback resistor is an effective remedy (see [Figure 43](#)). The value of this capacitor is optimized empirically.


## Electrostatic Discharge Protection

The TLC27M4 and TLC27M9 incorporate an internal electrostatic discharge (ESD) protection circuit that prevents functional failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.2. Care should be exercised, however, when handling these devices, as exposure to ESD may result in the degradation of the device parametric performance. The protection circuit also causes the input bias currents to be temperature-dependent and have the characteristics of a reverse-biased diode.

## Latch-Up

Because CMOS devices are susceptible to latch-up due to their inherent parasitic thyristors, the TLC27M4 and TLC27M9 inputs and outputs were designed to withstand —100-mA surge currents without sustaining latch-up; however, techniques should be used to reduce the chance of latch-up whenever possible. Internal protection diodes should not, by design, be forward biased. Applied input and output voltage should not exceed the supply voltage by more than 300 mV. Care should be exercised when using capacitive coupling on pulse generators. Supply transients should be shunted by the use of decoupling capacitors (0.1  $\mu$ F typical) located across the supply rails as close to the device as possible.




The current path established if latch-up occurs is usually between the positive supply rail and ground; it can be triggered by surges on the supply lines and/or voltages on either the output or inputs that exceed the supply voltage. Once latch-up occurs, the current flow is limited only by the impedance of the power supply and the forward resistance of the parasitic thyristor and usually results in the destruction of the device. The chance of latch-up occurring increases with increasing temperature and supply voltages.

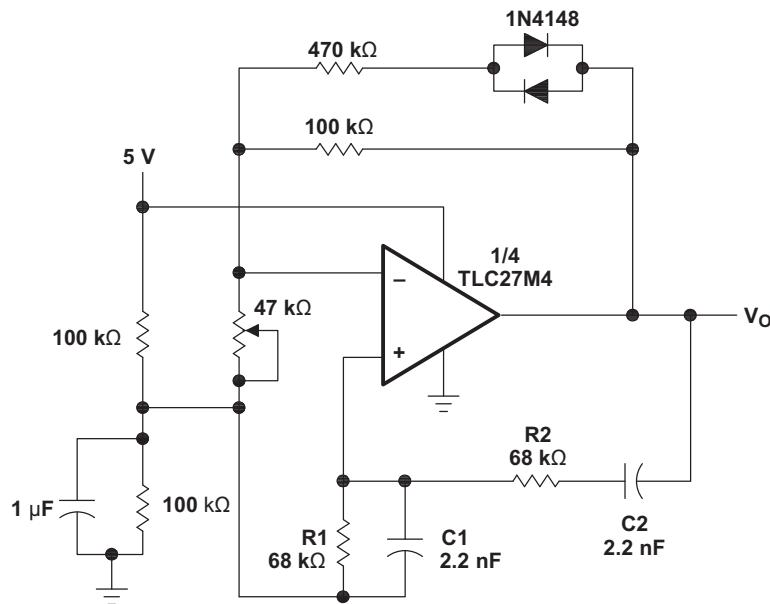


NOTE:  $V_{O_{PP}} \approx 2$  V

$$f_O = \frac{1}{2\pi \sqrt{R_1 R_2 C_1 C_2}}$$

Figure 44. Wien Oscillator

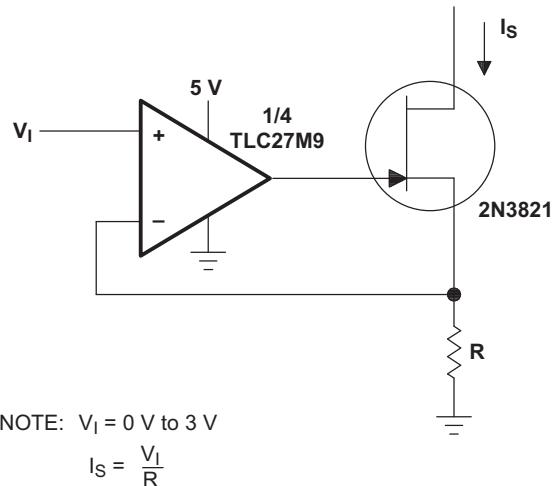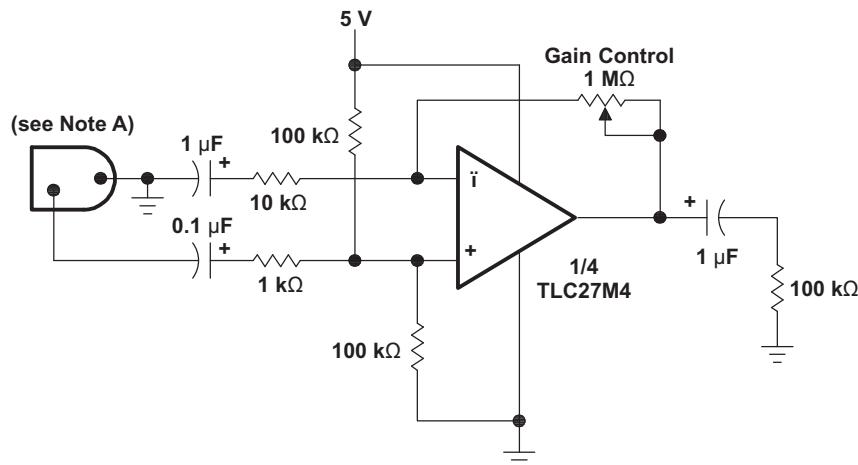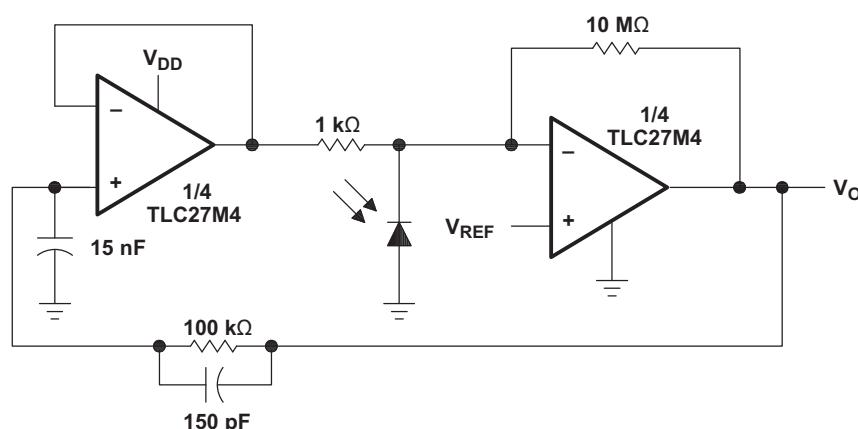
**Figure 45. Precision Low-Current Sink**

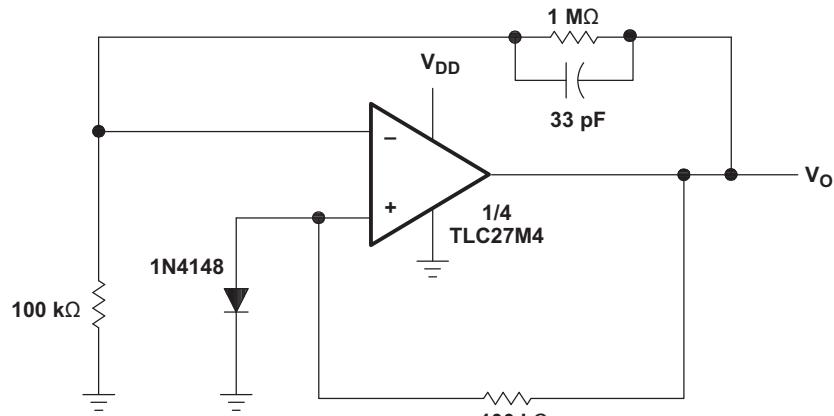**Figure 46. Microphone Preamplifier**

**Figure 47. Photo-Diode Amplifier With Ambient Light Rejection**



NOTE:  $V_{DD} = 8 \text{ V to } 16 \text{ V}$   
 $V_O = 5 \text{ V, } 10 \text{ mA}$

Figure 48. Low-Power Voltage Regulator

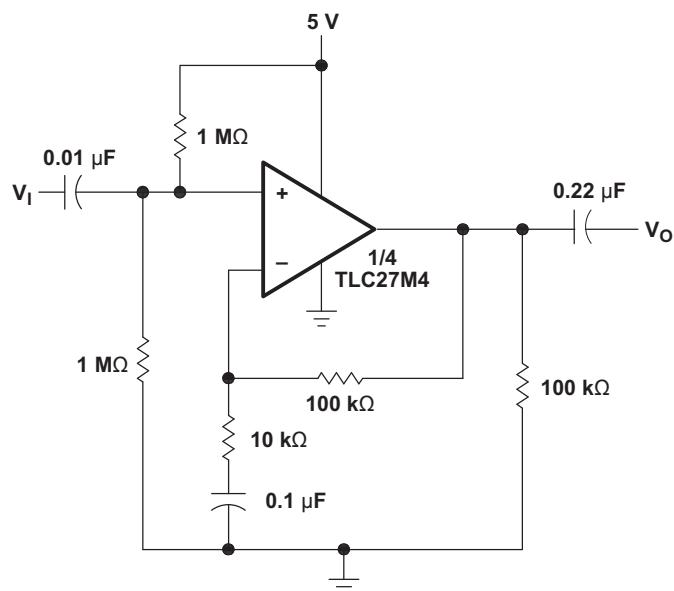


Figure 49. Single-Rail AC Amplifier

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TLC27M4ACD</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	0 to 70	27M4AC
<a href="#">TLC27M4ACDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	27M4AC
TLC27M4ACDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	27M4AC
<a href="#">TLC27M4ACN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4ACN
TLC27M4ACN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4ACN
TLC27M4ACNE4	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4ACN
<a href="#">TLC27M4AID</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	-40 to 85	27M4AI
<a href="#">TLC27M4AIDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	27M4AI
TLC27M4AIDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	27M4AI
<a href="#">TLC27M4AIN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M4AIN
TLC27M4AIN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M4AIN
<a href="#">TLC27M4BCD</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	0 to 70	27M4BC
<a href="#">TLC27M4BCDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	27M4BC
TLC27M4BCDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	27M4BC
<a href="#">TLC27M4BCN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4BCN
TLC27M4BCN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4BCN
<a href="#">TLC27M4BID</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	-40 to 85	27M4BI
<a href="#">TLC27M4BIDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	27M4BI
TLC27M4BIDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	27M4BI
<a href="#">TLC27M4BIN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M4BIN
TLC27M4BIN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M4BIN
<a href="#">TLC27M4CD</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	0 to 70	TLC27M4C
<a href="#">TLC27M4CDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M4C
TLC27M4CDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M4C
<a href="#">TLC27M4CDRG4</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	-	Call TI	Call TI	0 to 70	
<a href="#">TLC27M4CN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4CN
TLC27M4CN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M4CN
<a href="#">TLC27M4CNS</a>	Active	Production	SOP (NS)   14	50   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M4
TLC27M4CNS.A	Active	Production	SOP (NS)   14	50   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M4

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TLC27M4CNSR</a>	Active	Production	SOP (NS)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M4
TLC27M4CNSR.A	Active	Production	SOP (NS)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M4
<a href="#">TLC27M4CPWR</a>	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	P27M4
TLC27M4CPWR.A	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	P27M4
<a href="#">TLC27M4ID</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	-40 to 85	TLC27M4I
<a href="#">TLC27M4IDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TLC27M4I
TLC27M4IDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TLC27M4I
TLC27M4IDR1G4	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TLC27M4I
TLC27M4IDR1G4.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TLC27M4I
TLC27M4IDRG4	Active	Production	SOIC (D)   14	2500   LARGE T&R	-	Call TI	Call TI	-40 to 85	
<a href="#">TLC27M4IN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M4IN
TLC27M4IN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M4IN
TLC27M4IPW	Obsolete	Production	TSSOP (PW)   14	-	-	Call TI	Call TI	-40 to 85	P27M4I
<a href="#">TLC27M4IPWR</a>	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	P27M4I
TLC27M4IPWR.A	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	P27M4I
<a href="#">TLC27M9CD</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	0 to 70	TLC27M9C
<a href="#">TLC27M9CDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M9C
TLC27M9CDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TLC27M9C
TLC27M9CDRG4	Active	Production	SOIC (D)   14	2500   LARGE T&R	-	Call TI	Call TI	0 to 70	
<a href="#">TLC27M9CN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M9CN
TLC27M9CN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLC27M9CN
<a href="#">TLC27M9ID</a>	Obsolete	Production	SOIC (D)   14	-	-	Call TI	Call TI	-40 to 85	TLC27M9I
<a href="#">TLC27M9IDR</a>	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TLC27M9I
TLC27M9IDR.A	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TLC27M9I
<a href="#">TLC27M9IN</a>	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M9IN
TLC27M9IN.A	Active	Production	PDIP (N)   14	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	TLC27M9IN

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

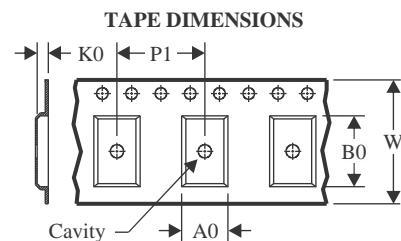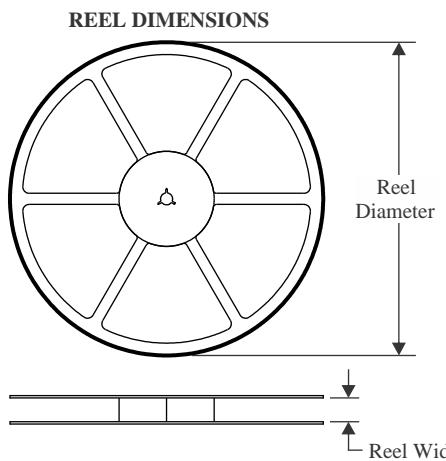
**TAPE AND REEL INFORMATION**


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

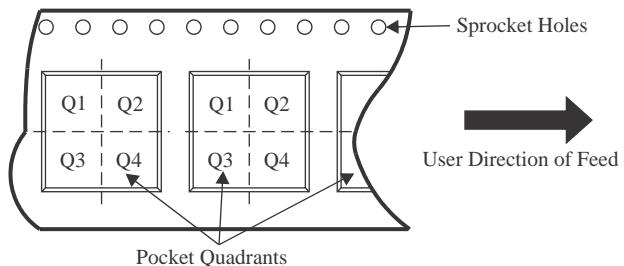**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


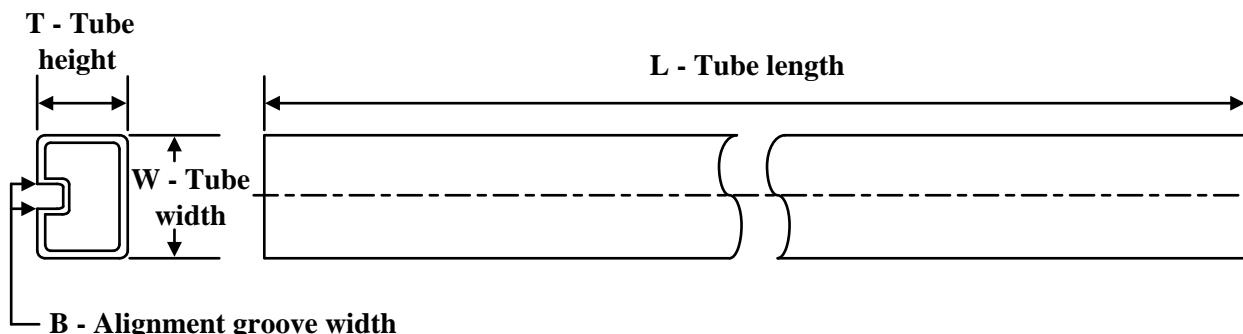
\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLC27M4ACDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4AIDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4BCDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4BIDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4CDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4CNSR	SOP	NS	14	2000	330.0	16.4	8.1	10.4	2.5	12.0	16.0	Q1
TLC27M4CPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TLC27M4CPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TLC27M4IDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4IDR1G4	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M4IPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TLC27M4IPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TLC27M9CDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TLC27M9IDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

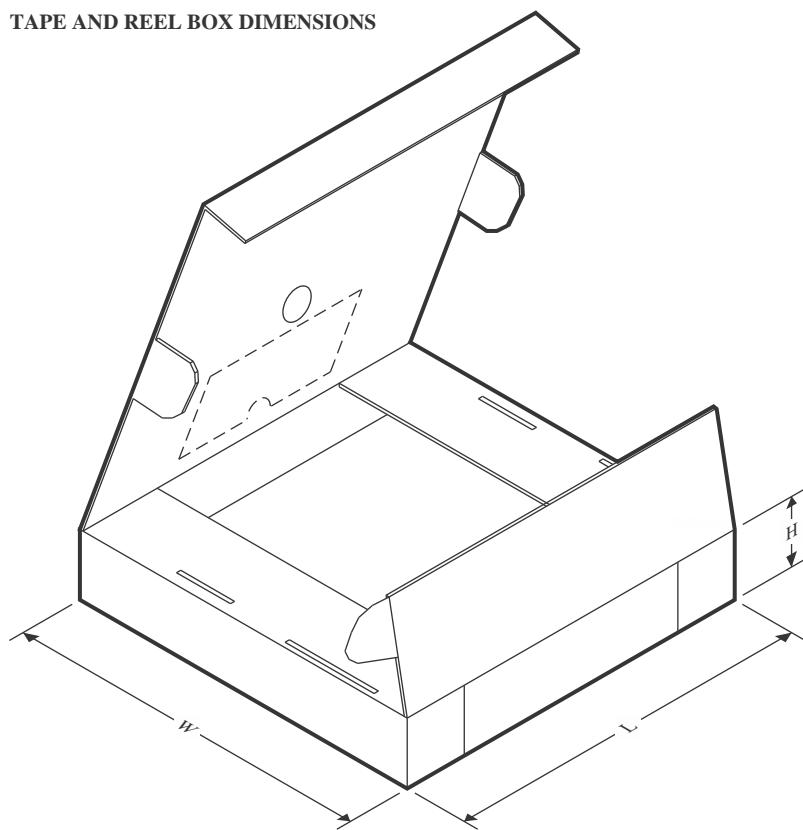**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLC27M4ACDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4AIDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4BCDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4BIDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4CDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4CNSR	SOP	NS	14	2000	353.0	353.0	32.0
TLC27M4CPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TLC27M4CPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TLC27M4IDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4IDR1G4	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M4IPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TLC27M4IPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TLC27M9CDR	SOIC	D	14	2500	353.0	353.0	32.0
TLC27M9IDR	SOIC	D	14	2500	353.0	353.0	32.0

**TUBE**


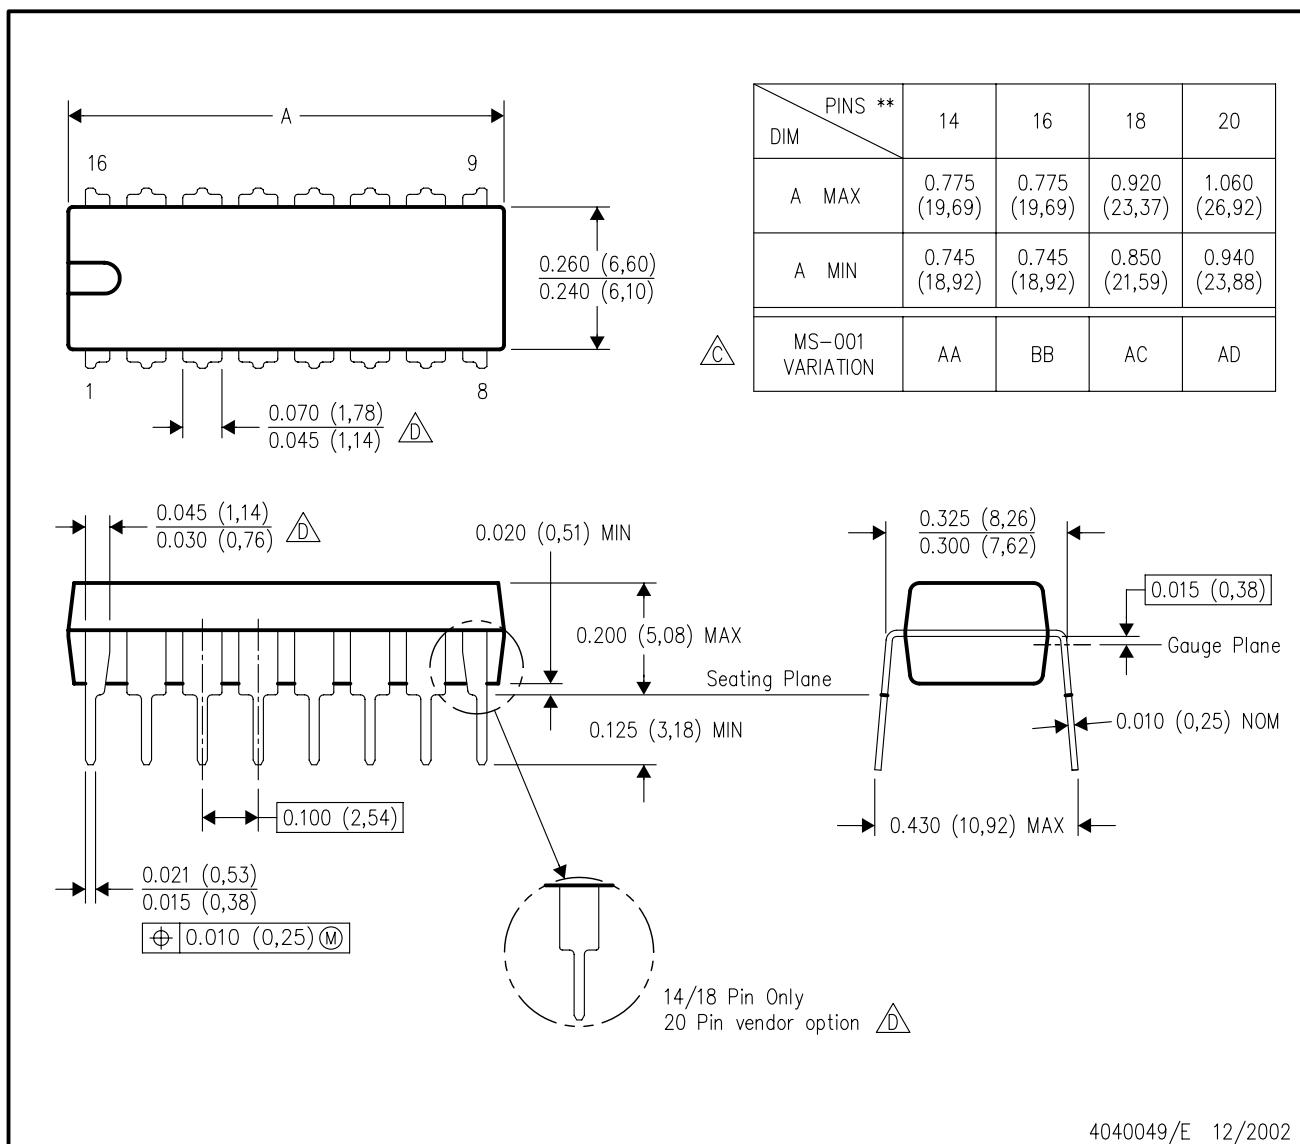
\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
TLC27M4ACN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4ACN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4ACNE4	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4AIN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4AIN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4BCN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4BCN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4BIN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4BIN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4CN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4CN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4CNS	NS	SOP	14	50	530	10.5	4000	4.1
TLC27M4CNS.A	NS	SOP	14	50	530	10.5	4000	4.1
TLC27M4IN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M4IN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M9CN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M9CN.A	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M9IN	N	PDIP	14	25	506	13.97	11230	4.32
TLC27M9IN.A	N	PDIP	14	25	506	13.97	11230	4.32

## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE




NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.

△ Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).

△ The 20 pin end lead shoulder width is a vendor option, either half or full width.


# PACKAGE OUTLINE

PW0014A



TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

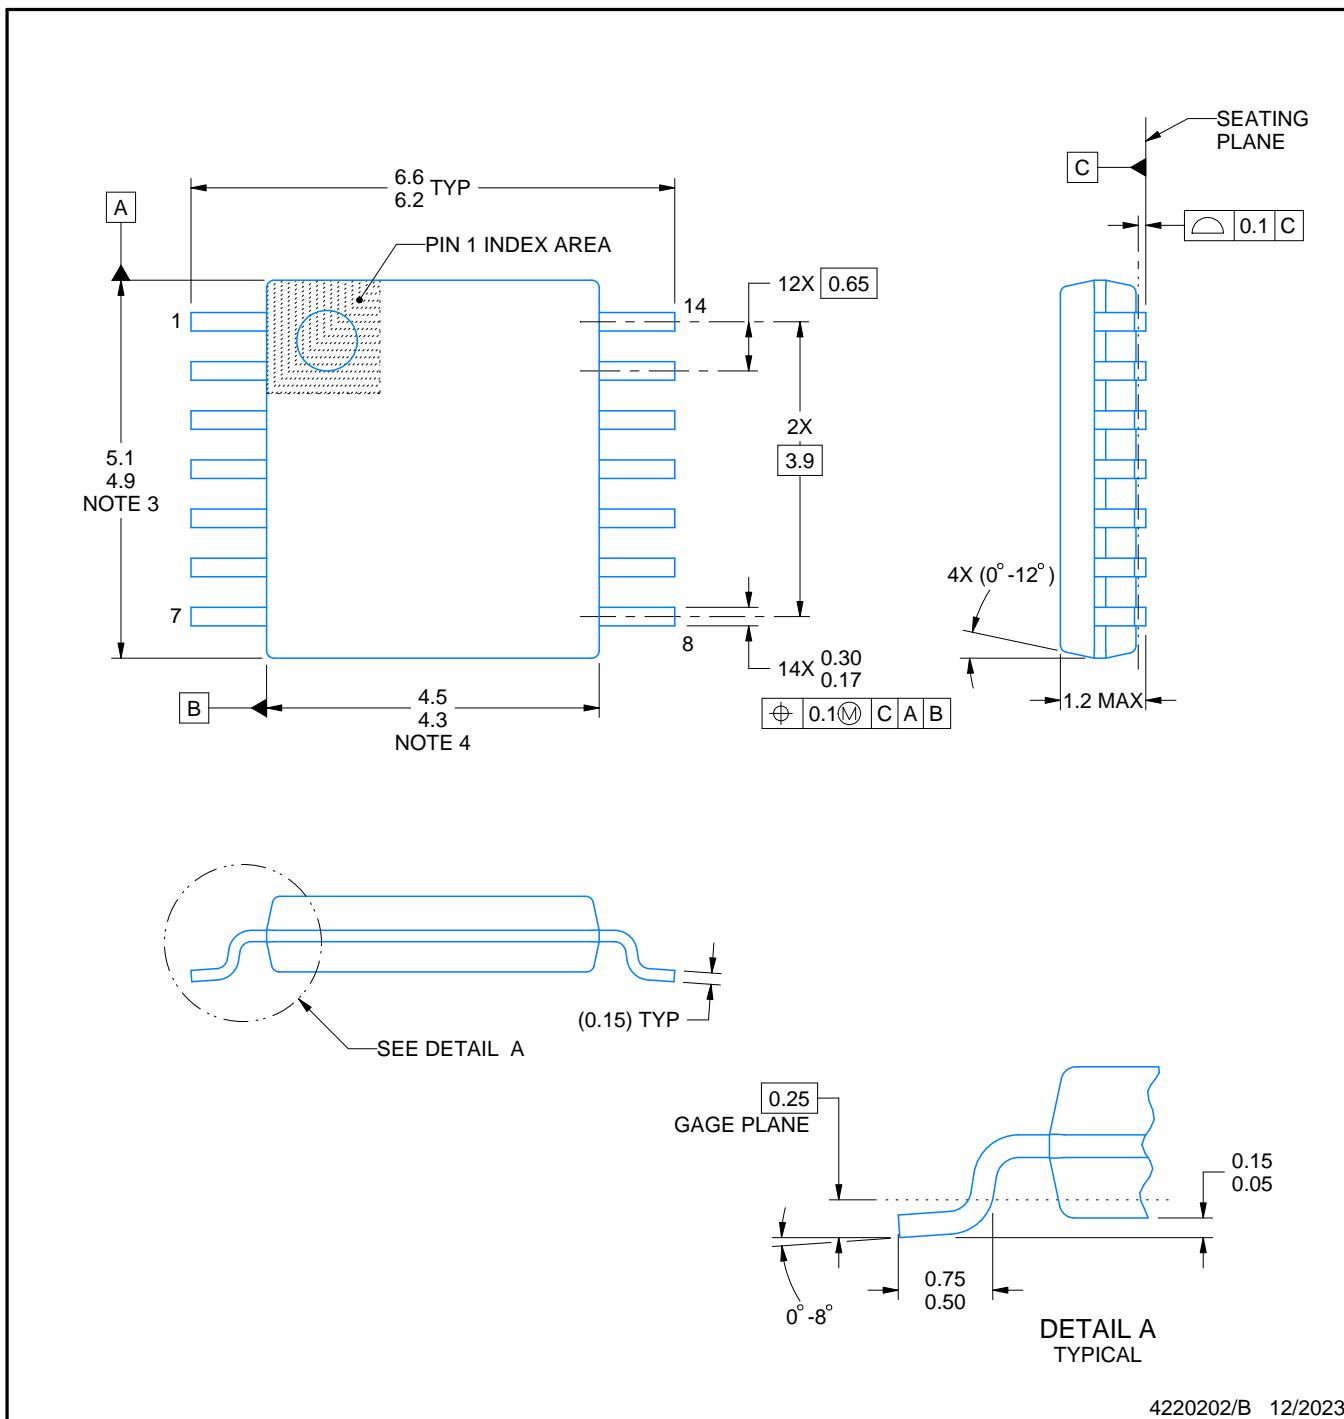

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT


PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

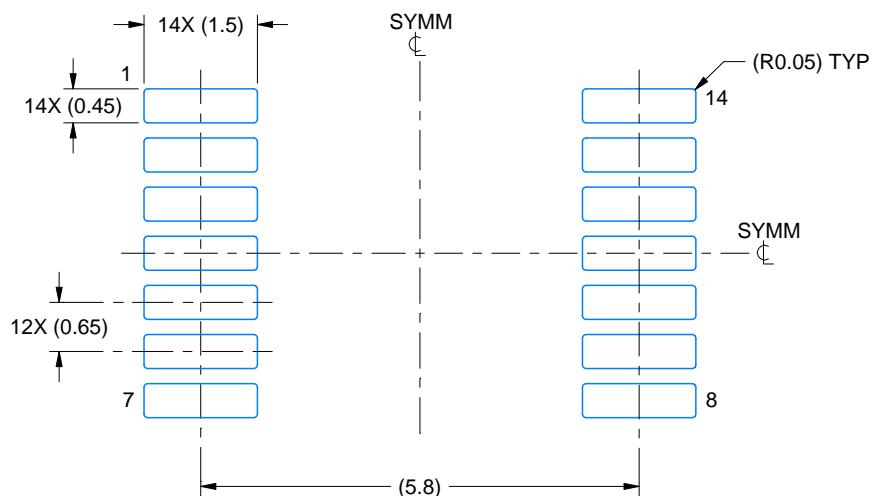

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

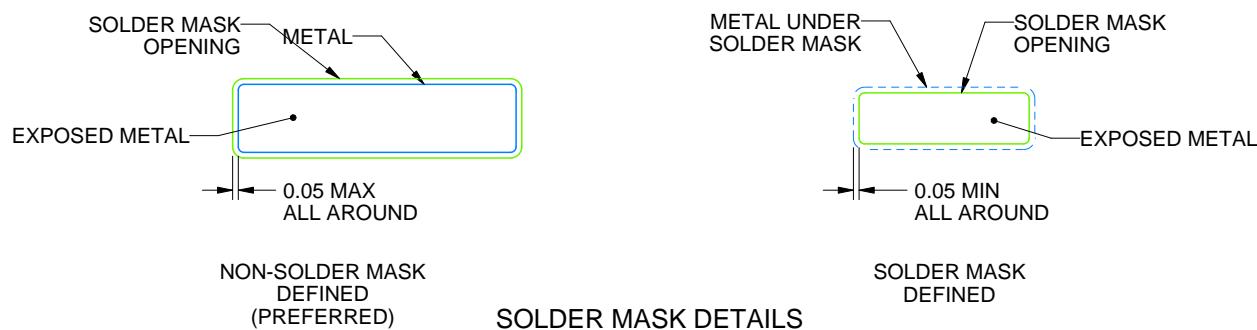

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

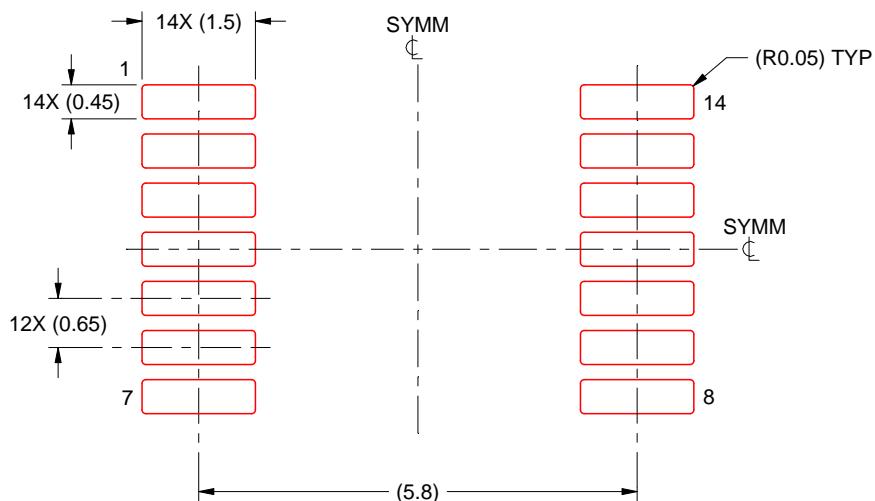

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# PACKAGE OUTLINE

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

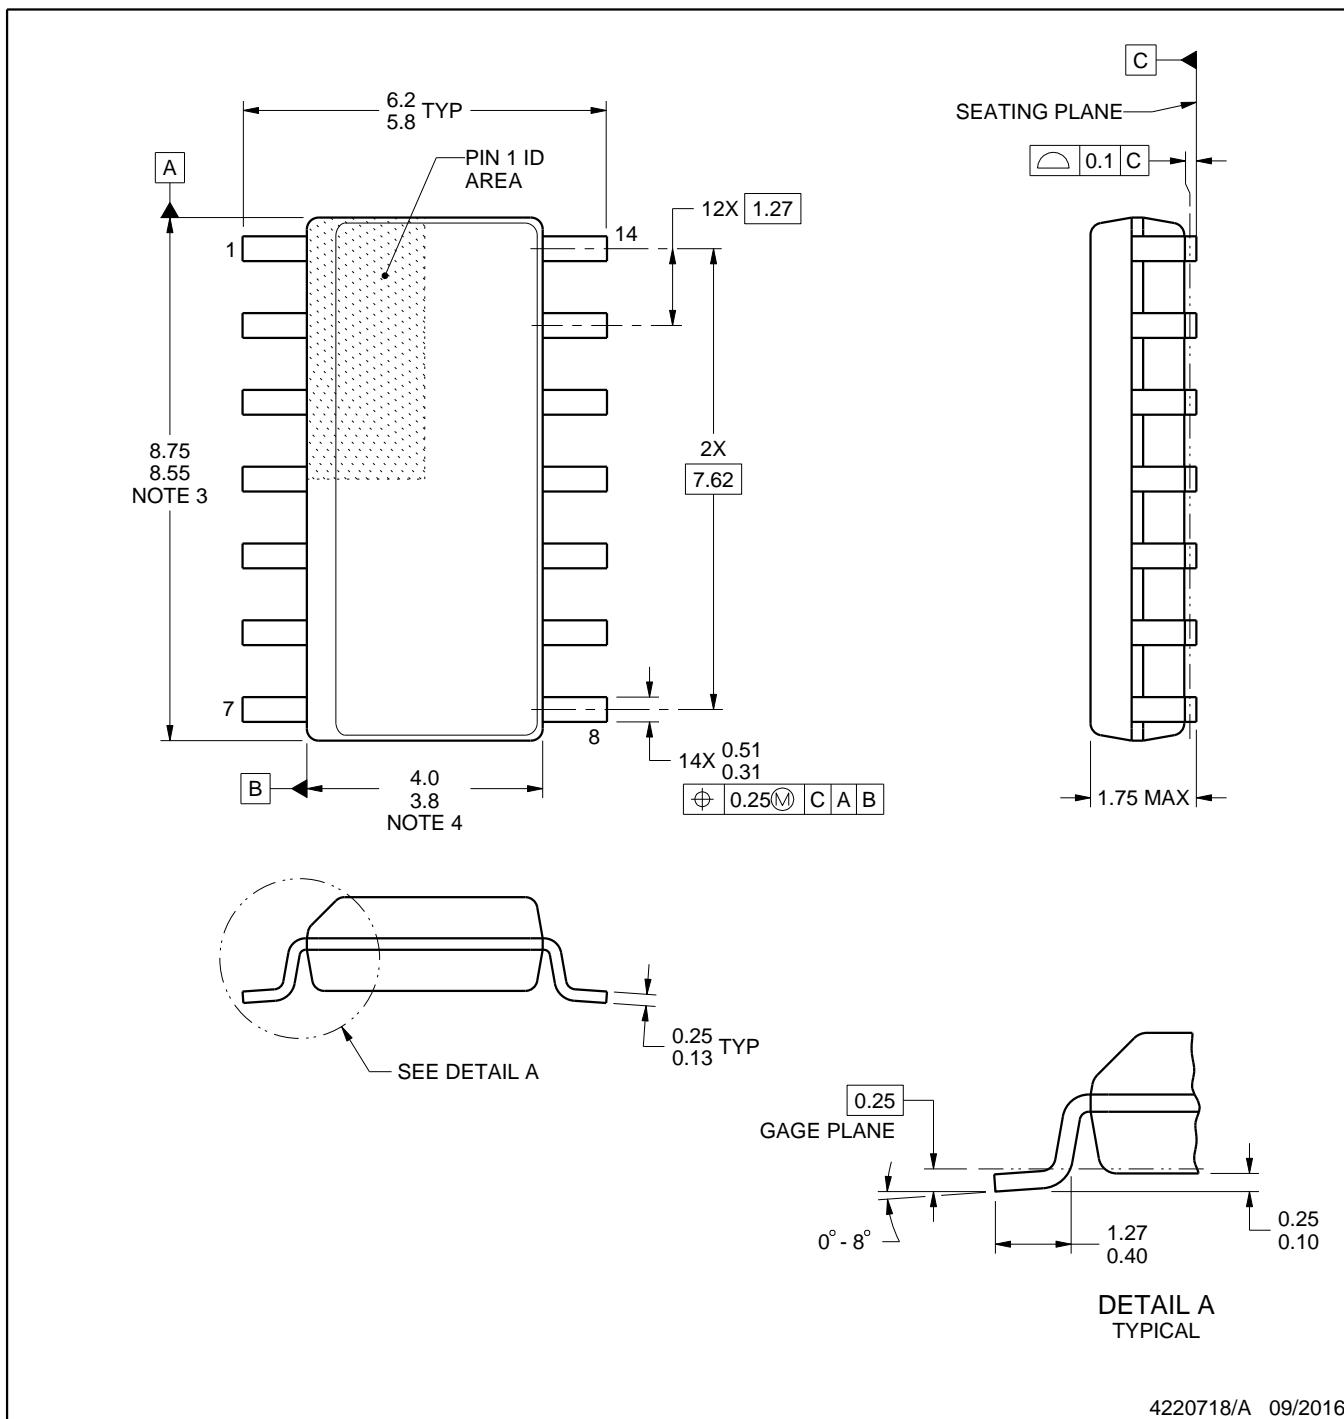

4220718/A 09/2016

## NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

# EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

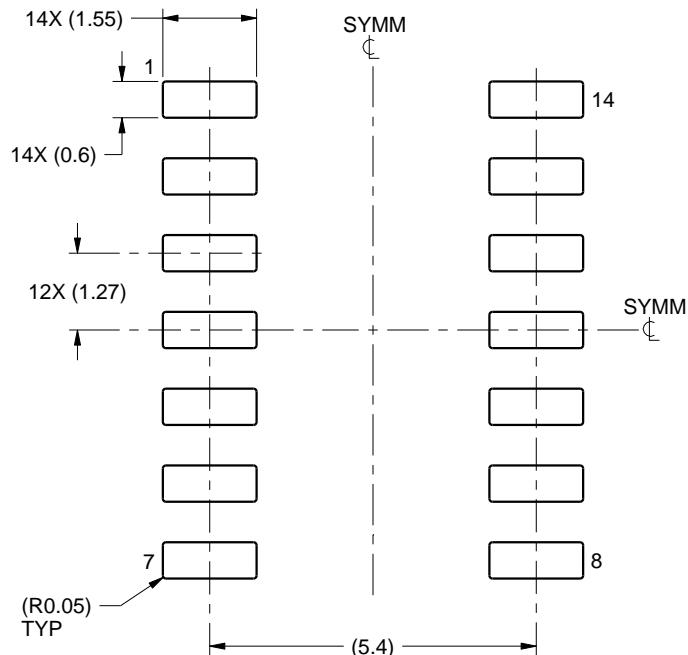

LAND PATTERN EXAMPLE  
SCALE:8X

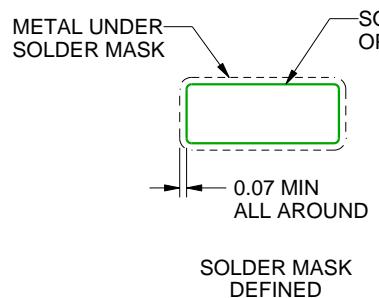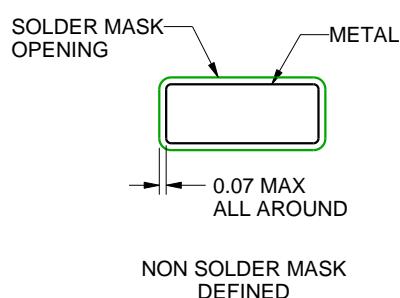

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

**D0014A**

## **SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

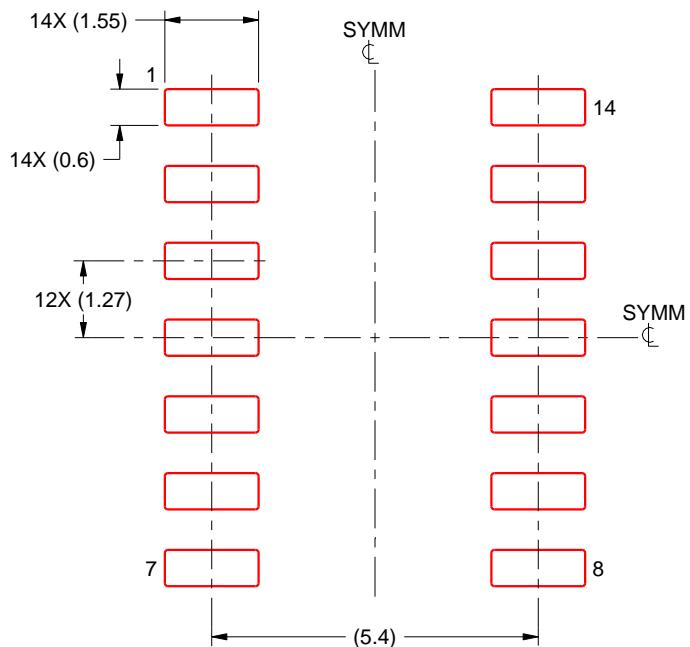

**SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:8X**

4220718/A 09/2016

#### NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## MECHANICAL DATA

NS (R-PDSO-G\*\*)

14-PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE

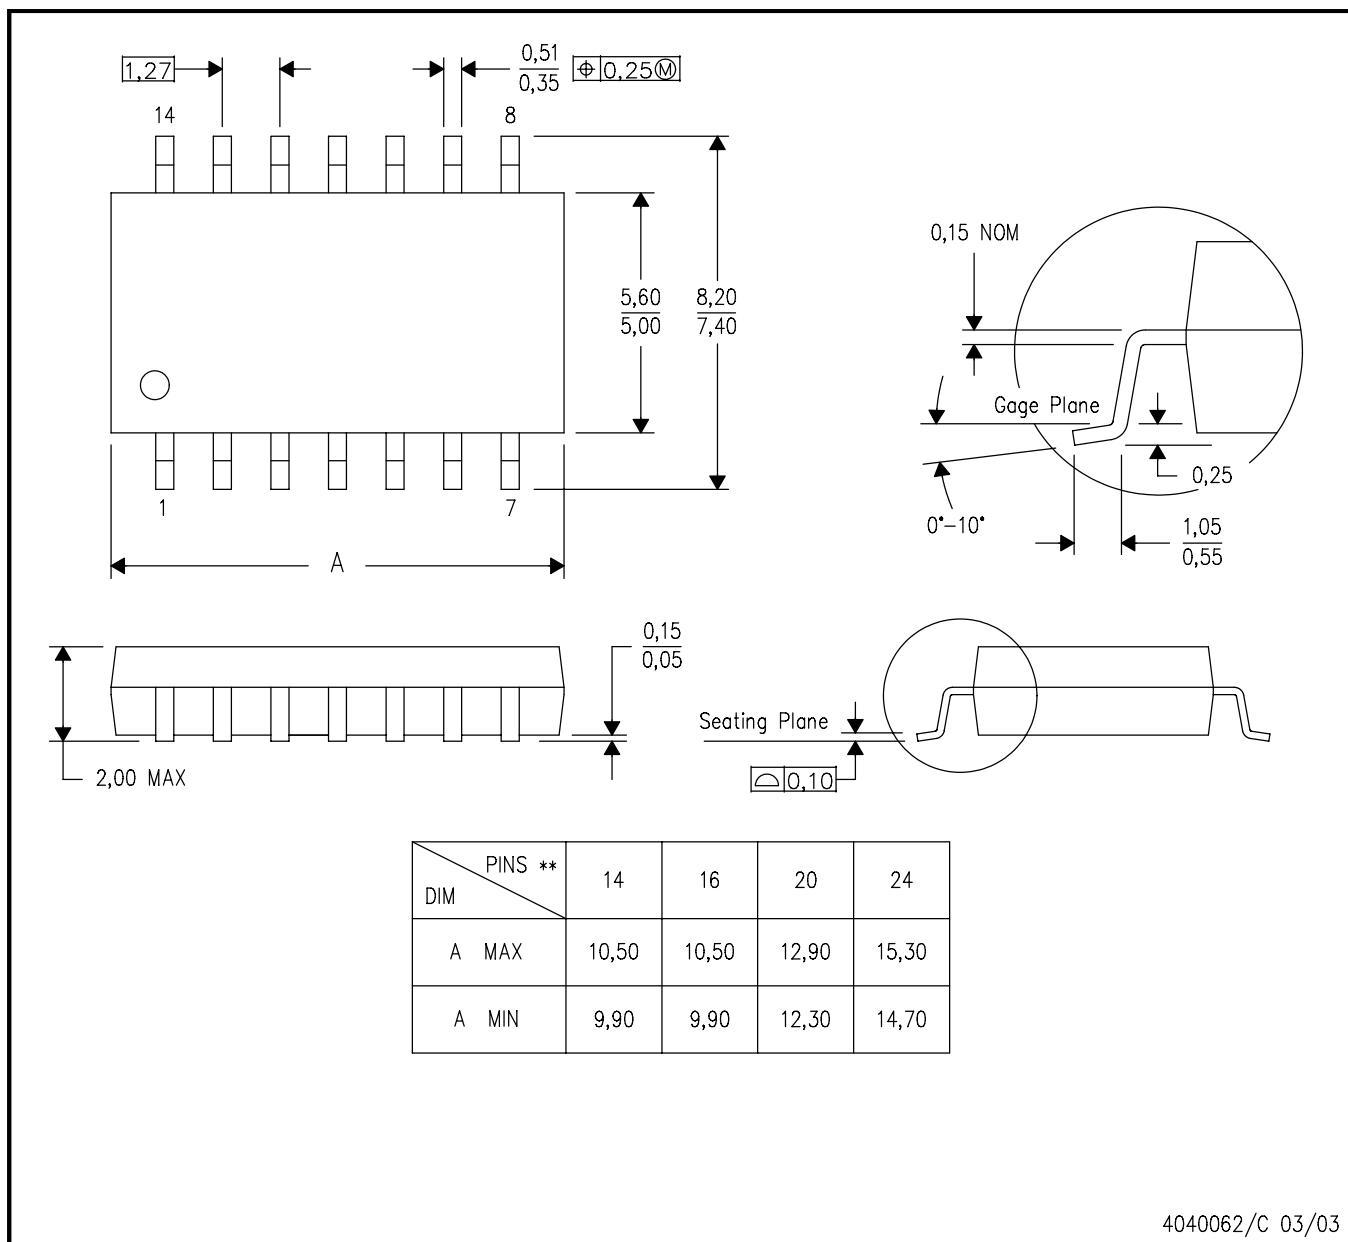

4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025