

# Stepper Motor Control Board

## Ordering Information

Order No.	Description
MDL-STEPPER	Stellaris® Stepper Motor Control Board Only
RDK-STEPPER	Stellaris® Stepper Motor Control Reference Design Kit (includes MDL-STEPPER board)



## Contents

<b>General Description</b> .....	<b>1</b>
Overview .....	1
General Features .....	2
Communications Features .....	2
<b>Operational Specifications</b> .....	<b>2</b>
<b>Mechanical</b> .....	<b>3</b>
<b>Additional Information</b> .....	<b>3</b>

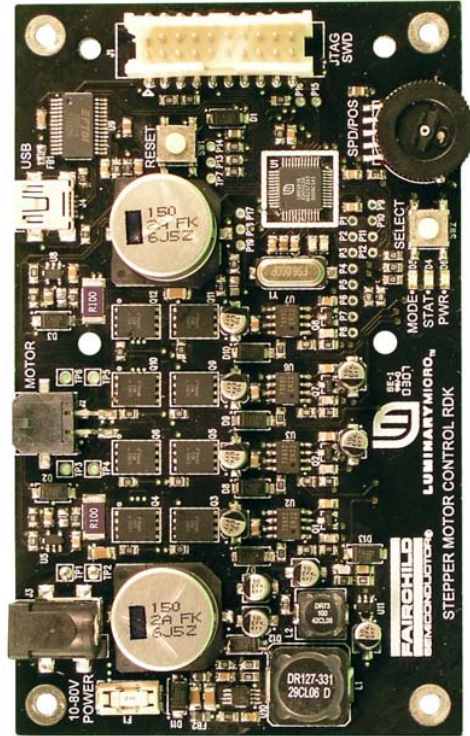


Figure 1. Stepper Motor Control Board

## General Description

The stepper motor control board is a sophisticated motor control for driving NEMA17, NEMA23, and NEMA34 stepper motors rated at up to 80 V at 3 A. Key features include the feature-rich Stellaris LM3S617 microcontroller designed for motion control applications, a Fairchild Semiconductor power stage consisting of Fairchild's FAN73832 HVIC Driver and FDMS3672 MOSFET, and sophisticated software to optimally control a wide range of motors in diverse applications.

First-time users should purchase the Stepper Motor Reference Design Kit (RDK) which includes the control board, cables, configuration software (GUI), a documentation CD, and a sample motor. After evaluating the Stepper Motor control board, users may choose to either customize the design or use the Stepper motor control board without modification. Refer to the *RDK-STEPPER User's Guide* (available for download from [www.luminarymicro.com](http://www.luminarymicro.com)) for complete technical details on using and customizing the motor control board. The Stepper board includes the Stellaris motor control and configuration (MCC) protocol. This protocol can be replaced with any industry-standard protocol.

## Overview

The MDL-STEPPER motor control board provides the following features:

- Controls stepper motors up to 80 V at 3 A

# BOARD DATA SHEET

---

- Supports NEMA17, NEMA23, and NEMA34 type stepper motors
- Advanced chopper control of bipolar stepper motors
- High step rates up to 10,000 steps/sec (with suitable motor)
- Microstepping
- Flexible platform accelerates integration process
- Programmable holding current
- Extensive configuration options using Windows Graphical User Interface (GUI)
- Easy to customize—full source code and design files included

## General Features

- Integrated USB Virtual COM port
- Boot loader for firmware upgrades over serial port
- Support for external debugger through standard 20-pin ARM header
- Test mode push-button and potentiometer
- Status LEDs indicate Power, Status, and Mode
- Screw terminals for all power and signal wiring

## Communications Features

- USB/Serial UART
  - FTDI FT232R USB to serial UART
  - Virtual COM port, 115.2k,8,n,1 operation
  - Stellaris MCC Protocol

## Operational Specifications

Table 1 shows the operating parameters for the MDL-STEPPER motor control board.

**Table 1. MDL-STEPPER Operating Specifications**

Parameter Name	Min	Nom	Max	Unit
Power Supply	9	–	80	V DC
Speed Range <sup>a</sup>	1	–	10,000	steps/sec
Operating Temperature Range	0	–	70	°C
Storage Temperature Range	-25	–	85	°C
Motor Current (rated current per coil)	–	–	3	A
Motor Voltage (continuous coil voltage)	1	–	80	V DC

a. Actual range depends on motor type

## Mechanical

The following list provides the mechanical specifications for the MDL-STEPPER:

- PCB size: 4.6" x 2.8" x 0.75" (117 mm x 71 mm x 19 mm)
- No heat sink necessary
- Motor connector on PCB
  - Molex part # 43045-0409
  - 3.00 mm (0.118") Pitch Micro-Fit 3.0™ Header, Surface Mount, Dual Row, Right Angle, with Solder Tab, 4 Circuits, Tin (Sn) Plating
- Mating connector for motor connector (above)
  - Molex part #43025-0400
  - 3.00 mm (0.118") Pitch Micro-Fit 3.0™ Receptacle Housing, Dual Row, 4 Circuits
  - DC power connector 2.1 mm ID, 2.5 mm OD

## Additional Information

The following documents are available for download at [www.luminarymicro.com](http://www.luminarymicro.com):

- *RDK-STEPPER User's Manual*, Publication Number RDK-STEPPER-UM
- *RDK-STEPPER Quickstart*

## Important Notice

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
RF/IF and ZigBee® Solutions	<a href="http://www.ti.com/lprf">www.ti.com/lprf</a>

### Applications

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
 Copyright © 2009, Texas Instruments Incorporated

Copyright © 2008–2009 Texas Instruments, Inc. All rights reserved.  
 Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks, and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.

