SN74LV4052A-Q1 オートモーティブ デュアル 4 チャネル アナログ マルチプレクサ / デマルチプレクサ

1 特長

- 車載アプリケーション認定済み
- 以下の結果で AEC-Q100 認定済み:
  - デバイス温度グレード 1:動作時周囲温度範囲 -40℃～+125℃
  - デバイス HBM ESD 分類レベル 2
  - デバイス CDM ESD 分類レベル C4B
- すべてのポートで混合モード電圧動作をサポート
- 高速スイッチング
- 高いオン / オフ出力電圧比
- スイッチ間の低いクロストーク
- 非常に低い入力電流

2 アプリケーション

- 車載:
  - 信号ゲーティング
  - チョッピング
  - 変調または復調 (モデム)
  - アナログ / デジタルおよびデジタル / アナログ変換システム用の信号多重化

3 概要

これらのデュアル 4 チャネル CMOS アナログ マルチプレクサおよびデマルチプレクサは、1.0V ～ 5.5V の V_{CC} で動作するように設計されています。


SN7LV4052A-Q1 は、アナログとデジタルの両方の信号を扱います。各チャネルは、最大 5.5V (ピーク) までの振幅の信号を許容します。

信号ゲーティング、チョッピング、変調または復調 (モデム)、およびアナログ / デジタルやデジタル / アナログ変換システム用の信号多重化などのアプリケーションに使用できます。

パッケージ情報

部品番号	パッケージ (1)	パッケージ サイズ(2)
SN74LV4052A-Q1	PW (TSSOP、16)	5mm × 6.4 mm
	DYY (SOT-23-THIN、16)	4.2 mm × 3.26mm

(1) 詳細については、セクション 11 を参照してください。
(2) パッケージ サイズ (長さ × 幅) は公称値であり、該当する場合はピンも含まれます。

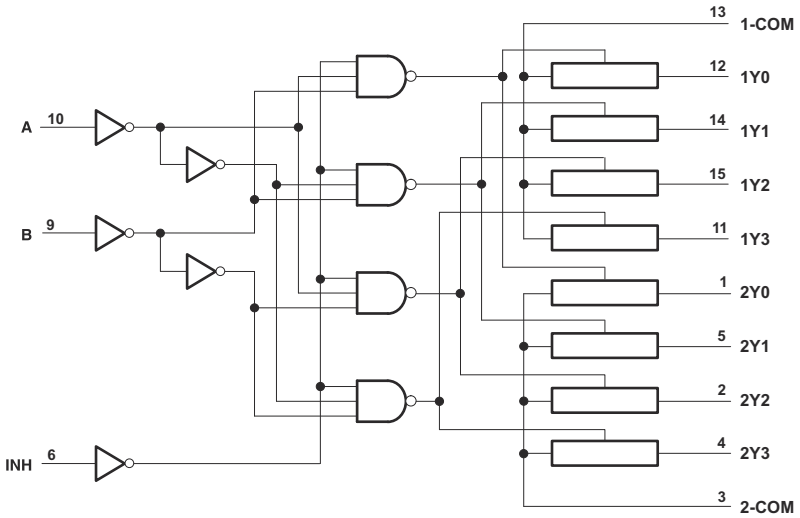

論理図 (正論理)

このリソースの元の言語は英語です。翻訳は概要を便宜的に提供するもので、自動化ツール (機械翻訳) を使用していることがあり、TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、ti.com で必ず最新の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 Pin Configuration and Functions ... 3
5 Specifications ... 4
5.1 Absolute Maximum Ratings ... 4
5.2 ESD Ratings ... 4
5.3 Thermal Information: SN74LV4052A-Q1 ... 4
5.4 Recommended Operating Conditions ... 5
5.5 Electrical Characteristics ... 5
5.6 Timing Characteristics V_{CC} = 2.5 V ± 0.2 V ... 7
5.7 Timing Characteristics V_{CC} = 3.3 V ± 0.3 V ... 7
5.8 Timing Characteristics V_{CC} = 5 V ± 0.5 V ... 7
5.9 AC Characteristics ... 8
6 Parameter Measurement Information ... 9
7 Detailed Description ... 13
7.1 Overview ... 13
7.2 Functional Block Diagram ... 13
7.3 Feature Description ... 13
7.4 Device Functional Modes ... 13
8 Application and Implementation ... 14
8.1 Application Information ... 14
8.2 Typical Application ... 14
8.3 Power Supply Recommendations ... 15
8.4 Layout ... 15
9 Device and Documentation Support ... 16
9.1 ドキュメントの更新通知を受け取る方法 ... 16
9.2 サポート・リソース ... 16
9.3 Trademarks ... 16
9.4 静電気放電に関する注意事項 ... 16
9.5 用語集 ... 16
10 Revision History ... 16
11 Mechanical, Packaging, and Orderable Information ... 17

Copyright © 2024 Texas Instruments Incorporated

4 Pin Configuration and Functions

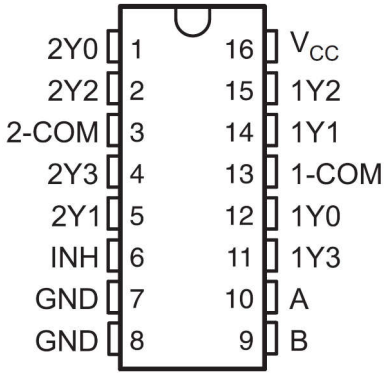


図 4-1. PW, DYY Package, 16-Pin TSSOP, SOT-23-THIN (Top View)

表 4-1. Pin Functions

PIN		TYPE(1) (2)	DESCRIPTION
NAME	NO.		
2Y0	1	I(1)	Input to mux 2
2Y2	2	I(1)	Input to mux 2
2-COM	3	O(1)	Output of mux 2
2Y3	4	I(1)	Input to mux 2
2Y1	5	I(1)	Input to mux 2
INH	6	I	Enables the outputs of the device. Logic low level with turn the outputs on, high level will turn them off.
GND	7	-	Ground
GND	8	-	Ground
B	9	I	Selector line for outputs (see セクション 7.4 for specific information)
A	10	I	Selector line for outputs (see セクション 7.4 for specific information)
1Y3	11	I(1)	Input to mux 1
1Y0	12	I(1)	Input to mux 1
1-COM	13	O(1)	Output of mux 1
1Y1	14	I(1)	Input to mux 1
1Y2	15	I(1)	Input to mux 1
V_{CC}	16	I	Device power input

(1) These I/O descriptions represent the device when used as a multiplexer, when this device is operated as a demultiplexer pins 1Y0, 1Y1, 1Y2, 1Y3, 2Y0, 2Y1, 2Y2, 2Y3 may be considered outputs (O) and pins 1-COM and 2-COM may be considered inputs (I).
(2) I = input, O = output

Copyright © 2024 Texas Instruments Incorporated

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1) (3)

			MIN	MAX	UNIT
V_{CC}	Supply voltage		–0.5	7.0	V
V_I	Logic input voltage range		–0.5	7.0	V
V_{IO}	Switch I/O voltage range(2) (3)		–0.5	V_{CC} + 0.5	V
I_{IK}	Input clamp current	V_I < 0	–20		mA
I_{IOK}	Switch IO diode clamp current	V_{IO} < 0 or V_{IO} > V_{CC}	–50	50	mA
I_T	Switch continuous current	V_{IO} = 0 to V_{CC}		±25	mA
	Continuous current through V_{CC} or GND			±50	mA
T_{stg}	Storage temperature		–65	150	°C

(1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If briefly operating outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) Pins are diode-clamped to the power-supply rails. Over voltage signals must be voltage and current limited to maximum ratings.
(3) This value is limited to 5.5 V maximum

5.2 ESD Ratings

				VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per AEC Q100-002(1)	All pins	±2000	V
$V_{(ESD)}$	Electrostatic discharge	Charged device model (CDM), per AEC Q100-011	All pins	±500	V

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

5.3 Thermal Information: SN74LV4052A-Q1

THERMAL METRIC		SN74LV4052A-Q1 PW (TSSOP) 16 PINS	SN74LV4052A-Q1 DYY (SOT) 16 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	140.2	199.7	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	72.6	121.2	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	98.7	129.0	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	13.4	24.6	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	97.3	126.7	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

Copyright © 2024 Texas Instruments Incorporated

5.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage		1(2)		5.5	V
V_{IH}	High-level input voltage, logic control inputs	V_{CC} = 1.65	1.2		5.5	V
		V_{CC} = 2 V	1.5		5.5	
		V_{CC} = 2.3 V to 2.7 V	V_{CC} x 0.7		5.5	
		V_{CC} = 3 V to 3.6 V	V_{CC} x 0.7		5.5	
		V_{CC} = 4.5 V to 5.5 V	V_{CC} x 0.7		5.5	
V_{IL}	Low-level input voltage, logic control inputs	V_{CC} = 1.65 V	0		0.4	V
		V_{CC} = 2	0		0.5	
		V_{CC} = 2.3V to 2.7V	0		V_{CC} x 0.3	
		V_{CC} = 3 V to 3.6 V	0		V_{CC} x 0.3	
		V_{CC} = 4.5 V to 5.5 V	0		V_{CC} x 0.3	
V_I	Logic control input voltage		0		5.5	V
V_{IO}	Switch input or output voltage		0		V_{CC}	V
Δt/ΔV	Logic input transition rise or fall rate	V_{CC} = 1.0 V to 2.0 V			500	ns/V
		V_{CC} = 2.0 V to 2.7 V			200	
		V_{CC} = 3 V to 3.6 V			100	
		V_{CC} = 4.5 V to 5.5 V			20	
T_A	Ambient temperature		–40		125	°C

(1) All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to TI application report *Implications of Slow or Floating CMOS Inputs*, SCBA004.
(2) When using a V_{CC} of ≤1.2 V, it is recommended to use these devices only for transmitting digital signals.When supply voltage is near 1.2 V the analog switch ON resistance becomes very non-linear

5.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		Condition	T_A	V_{CC}	MIN	TYP	MAX	UNIT
r_{ON}	ON-state switch resistance	I_T = 2 mA, V_I = V_{CC} or GND, V_{INH} = V_{IL}	25°C	1.65 V		60	150	Ω
			–40°C to 85°C				225	
			–40°C to 125°C				225	
			25°C	2.3 V		38	180	
			–40°C to 85°C				225	
			–40°C to 125°C				225	
			25°C	3 V		30	150	
			–40°C to 85°C				190	
			–40°C to 125°C				190	
			25°C	4.5 V		22	75	
			–40°C to 85°C				100	
			–40°C to 125°C				100	

Copyright © 2024 Texas Instruments Incorporated

5.5 Electrical Characteristics (続き)

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		Condition	T_A	V_{CC}	MIN	TYP	MAX	UNIT
$r_{ON(p)}$	Peak ON-state resistance	I_T = 2 mA, V_I = GND to V_{CC}, V_{INH} = V_{IL}	25°C	1.65 V		220	600	Ω
			–40°C to 85°C				700	
			–40°C to 125°C				700	
			25°C	2.3 V		113	500	
			–40°C to 85°C				600	
			–40°C to 125°C				600	
			25°C	3 V		54	180	
			–40°C to 85°C				225	
			–40°C to 125°C				225	
			25°C	4.5 V		31	100	
			–40°C to 85°C				125	
			–40°C to 125°C				125	
Δr_{ON}	Difference in ON-state resistance between switches	I_T = 2 mA, V_I = GND to V_{CC}, V_{INH} = V_{IL}	25°C	1.65 V		3	40	Ω
			–40°C to 85°C				40	
			–40°C to 125°C				40	
			25°C	2.3 V		2.1	30	
			–40°C to 85°C				40	
			–40°C to 125°C				40	
			25°C	3 V		1.4	20	
			–40°C to 85°C				30	
			–40°C to 125°C				30	
			25°C	4.5 V		1.3	15	
			–40°C to 85°C				20	
			–40°C to 125°C				20	
I_{IH} I_{IL}	Control input current	V_I = 5.5 V or GND	25°C	0 to 5.5 V	-0.1		0.1	µA
			–40°C to 85°C		-1		1	
			–40°C to 125°C		-2		2	
$I_{S(off)}$	OFF-state switch leakage current	V_I = V_{CC} and V_O = GND, or V_I = GND and V_O = V_{CC}, V_{INH} = V_{IH}	25°C	5.5 V	-0.1		0.1	µA
			–40°C to 85°C		-1		1	
			–40°C to 125°C		-2		2	
$I_{S(on)}$	ON-state switch leakage current	V_I = V_{CC} or GND, V_{INH} = V_{IL}	25°C	5.5 V	-0.1		0.1	µA
			–40°C to 85°C		-1		1	
			–40°C to 125°C		-2		2	
I_{CC}	Supply current	V_I = V_{CC} or GND V_{INH} = 0 V	25°C	5.5 V		0.01		µA
			–40°C to 85°C				20	
			–40°C to 125°C				40	
C_{IC}	Control input capacitance	f = 10 MHz	25°C	3.3 V		2		pF
C_{IS}	Common terminal capacitance	f = 10 MHz	25°C	3.3 V		13.2		pF
C_{OS}	Switch ternminal capacitance	f = 10 MHz	25°C	3.3 V		5.7		pF
C_F	Feedthrough capacitance	f = 10 MHz	25°C	3.3 V		0.5		pF

Copyright © 2024 Texas Instruments Incorporated

5.5 Electrical Characteristics (続き)

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		Condition	T_A	V_{CC}	MIN	TYP	MAX	UNIT
C_{PD}	Power dissipation capacitance	C_L = 50 pF, f = 10 MHz	25°C	3.3 V		11.8		pF

5.6 Timing Characteristics V_{CC} = 2.5 V ± 0.2 V

PARAMETER		FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T_A	MIN	TYP	MAX	UNIT
t_{PLH} t_{PHL}	Propagation delay time	COM or Yn	Yn or COM	C_L = 15 pF	25°C		1.9	10	ns
					–40°C to 85°C			16	
					–40°C to 125°C			18	
t_{PZH} t_{PZL}	Enable delay time	INH	COM or Yn	C_L = 15 pF	25°C		6.6	18	ns
					–40°C to 85°C			23	
					–40°C to 125°C			25	
t_{PHZ} t_{PLZ}	Disable delay time	INH	COM or Yn	C_L = 15 pF	25°C		7.4	18	ns
					–40°C to 85°C			23	
					–40°C to 125°C			25	
t_{PLH} t_{PHL}	Propagation delay time	COM or Yn	Yn or COM	C_L = 50 pF	25°C		3.8	12	ns
					–40°C to 85°C			18	
					–40°C to 125°C			20	
t_{PZH} t_{PZL}	Enable delay time	INH	COM or Yn	C_L = 50 pF	25°C		7.8	28	ns
					–40°C to 85°C			35	
					–40°C to 125°C			35	
t_{PHZ} t_{PLZ}	Disable delay time	INH	COM or Yn	C_L = 50 pF	25°C		11.5	28	ns
					–40°C to 85°C			35	
					–40°C to 125°C			35	

5.7 Timing Characteristics V_{CC} = 3.3 V ± 0.3 V

PARAMETER		FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T_A	MIN	TYP	MAX	UNIT
t_{PLH} t_{PHL}	Propagation delay time	COM or Yn	Yn or COM	C_L = 50 pF	25°C		2.5	9	ns
					–40°C to 85°C			12	
					–40°C to 125°C			14	
t_{PZH} t_{PZL}	Enable delay time	INH	COM or Yn	C_L = 50 pF	25°C		5.5	20	ns
					–40°C to 85°C			25	
					–40°C to 125°C			25	
t_{PHZ} t_{PLZ}	Disable delay time	INH	COM or Yn	C_L = 50 pF	25°C		8.8	20	ns
					–40°C to 85°C			25	
					–40°C to 125°C			25	

5.8 Timing Characteristics V_{CC} = 5 V ± 0.5 V

PARAMETER		FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T_A	MIN	TYP	MAX	UNIT
t_{PLH} t_{PHL}	Propagation delay time	COM or Yn	Yn or COM	C_L = 50 pF	25°C		1.5	6	ns
					–40°C to 85°C			8	
					–40°C to 125°C			10	

Copyright © 2024 Texas Instruments Incorporated

5.8 Timing Characteristics V_{CC} = 5 V ± 0.5 V (続き)

PARAMETER		FROM (INPUT)	TO (OUTPUT)	CONDITIONS	T_A	MIN	TYP	MAX	UNIT
t_{PZH} t_{PZL}	Enable delay time	INH	COM or Yn	C_L = 50 pF	25°C		4	14	ns
					–40°C to 85°C			18	
					–40°C to 125°C			18	
t_{PHZ} t_{PLZ}	Disable delay time	INH	COM or Yn	C_L = 50 pF	25°C		6.2	14	ns
					–40°C to 85°C			18	
					–40°C to 125°C			18	

5.9 AC Characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	Device	CONDITIONS		MIN	TYP	MAX	UNIT
Frequency response (switch on)	COM or Yn	Yn or COM	SN74LV4052	C_L = 50 pF, R_L = 600 Ω, F_{in} = 1 MHz (sine wave)	V_{CC} = 2.3 V		30		MHz
					V_{CC} = 3 V		35		
					V_{CC} = 4.5 V		50		
Feedthrough attenuation (switch off)	COM or Yn	Yn or COM	ALL	C_L = 50 pF, R_L = 600 Ω, F_{in} = 1 MHz (sine wave)	V_{CC} = 2.3 V		–45		dB
					V_{CC} = 3 V		–45		
					V_{CC} = 4.5 V		–45		
Crosstalk (between any switches)	COM or Yn	Yn or COM	ALL	C_L = 50 pF, R_L = 600 Ω, F_{in} = 1 MHz (sine wave)	V_{CC} = 2.3 V		20		mV
					V_{CC} = 3 V		35		
					V_{CC} = 4.5 V		60		
Sine-wave distortion	COM or Yn	Yn or COM	ALL	C_L = 50 pF, R_L = 10 kΩ, F_{in} = 1 kHz (sine wave)	V_I = 2 V_{p-p} V_{CC} = 2.3 V		0.1		%
					V_I = 2.5 V_{p-p} V_{CC} = 3 V		0.1		
					V_I = 4 V_{p-p} V_{CC} = 4.5 V		0.1		

Copyright © 2024 Texas Instruments Incorporated

6 Parameter Measurement Information

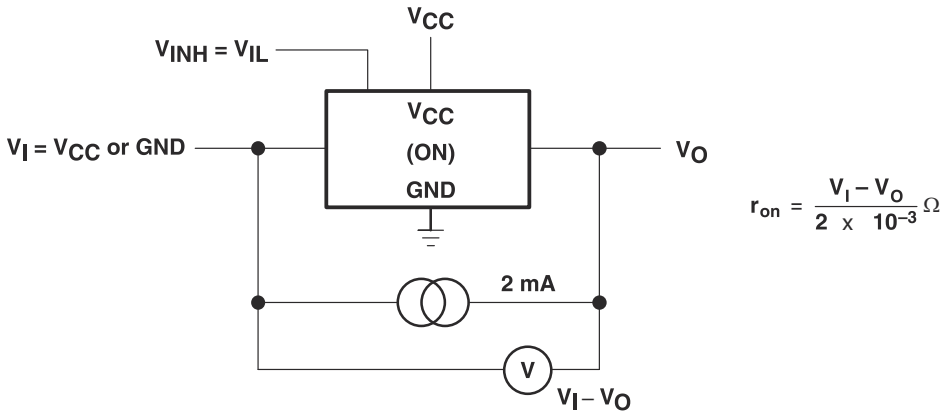


図 6-1. On-State Resistance Test Circuit

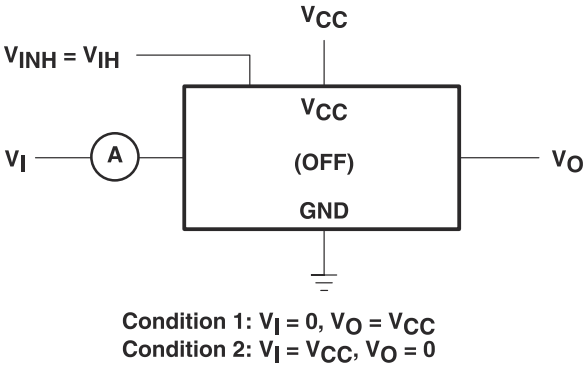


図 6-2. Off-State Switch Leakage-Current Test Circuit

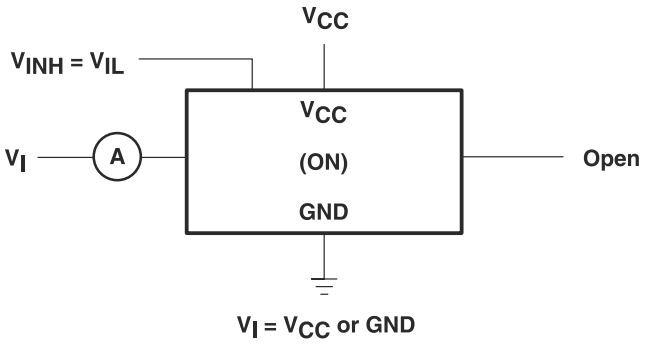


図 6-3. On-State Switch Leakage-Current Test Circuit



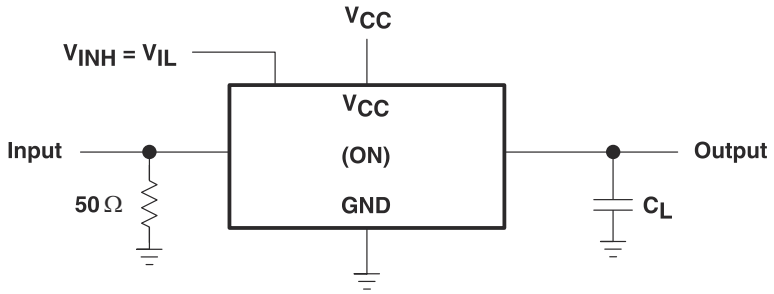


図 6-4. Propagation Delay Time, Signal Input to Signal Output

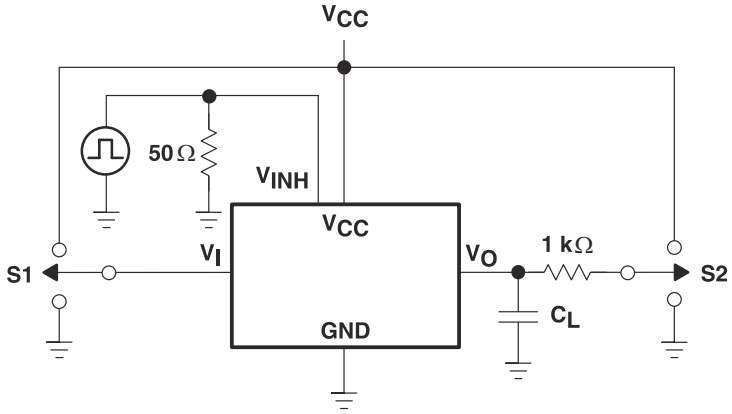

TEST	S1	S2
t_{PLZ}/t_{PZL} t_{PHZ}/t_{PZH}	GND V_{CC}	V_{CC} GND


TEST CIRCUIT

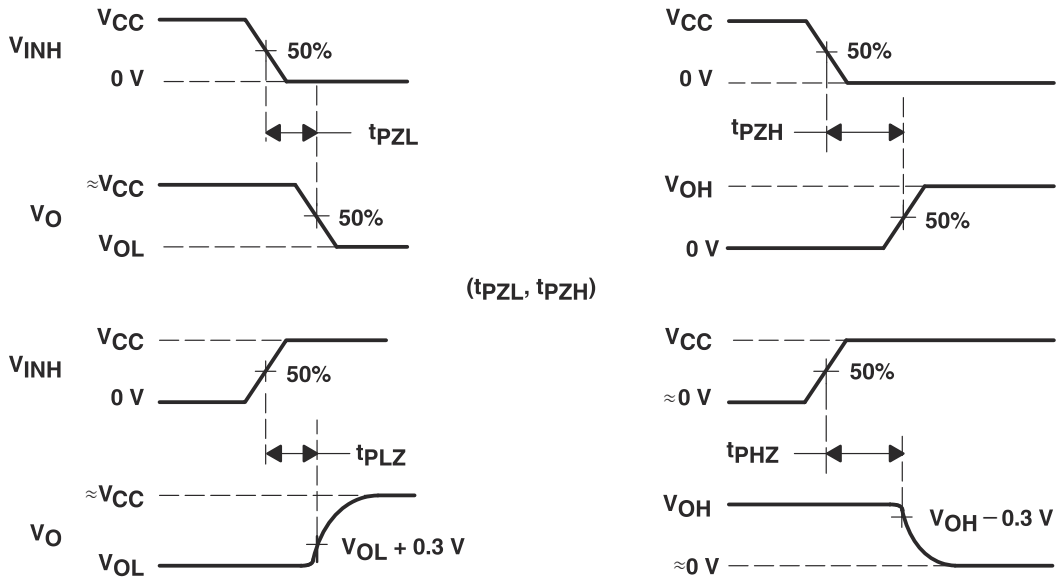

VOLTAGE WAVEFORMS


図 6-5. Switching Time (t_{PZL}, t_{PLZ}, t_{PZH}, t_{PHZ}), Control to Signal Output

Copyright © 2024 Texas Instruments Incorporated

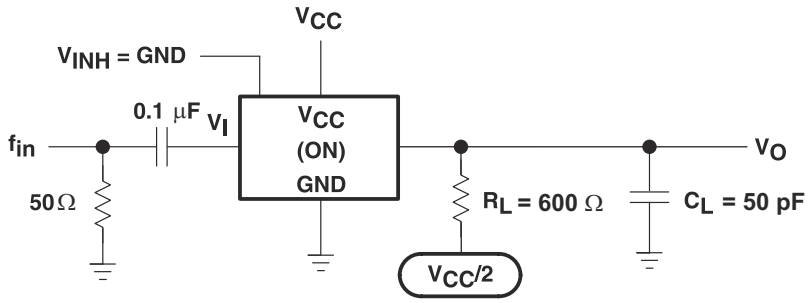

NOTE A: f_{in} is a sine wave.

図 6-6. Frequency Response (Switch On)

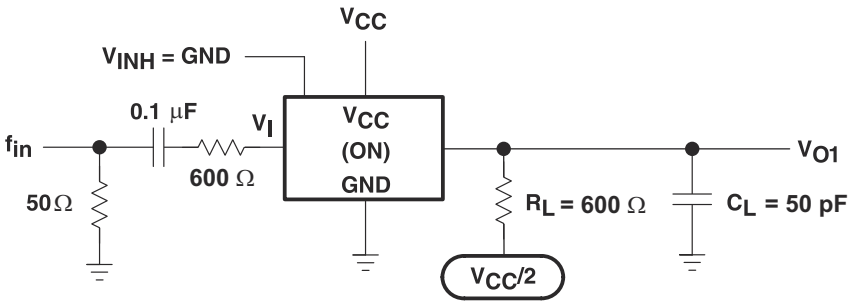

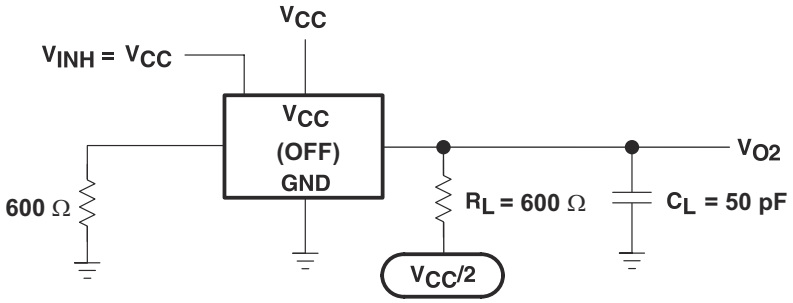


図 6-7. Crosstalk Between Any Two Switches

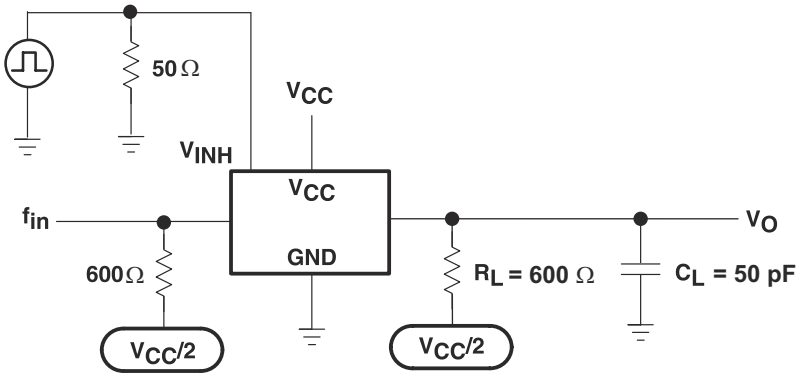


図 6-8. Crosstalk Between Control Input and Switch Output

Copyright © 2024 Texas Instruments Incorporated

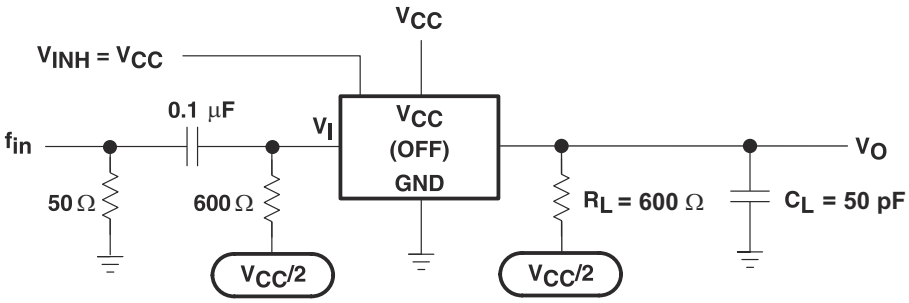


図 6-9. Feedthrough Attenuation (Switch Off)

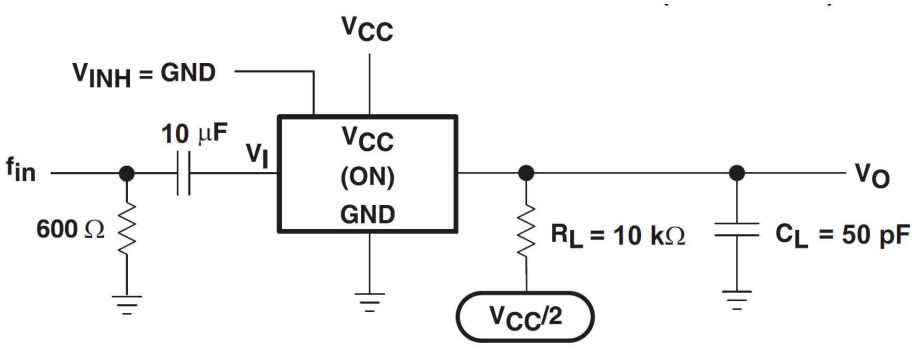


図 6-10. Sine-Wave Distortion


Copyright © 2024 Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

This device is a dual 4-channel analog multiplexer. A multiplexer is often used when several signals need to share the same device or resource. This device allows the selection of one of these signals at a time for analysis or propagation.

7.2 Functional Block Diagram

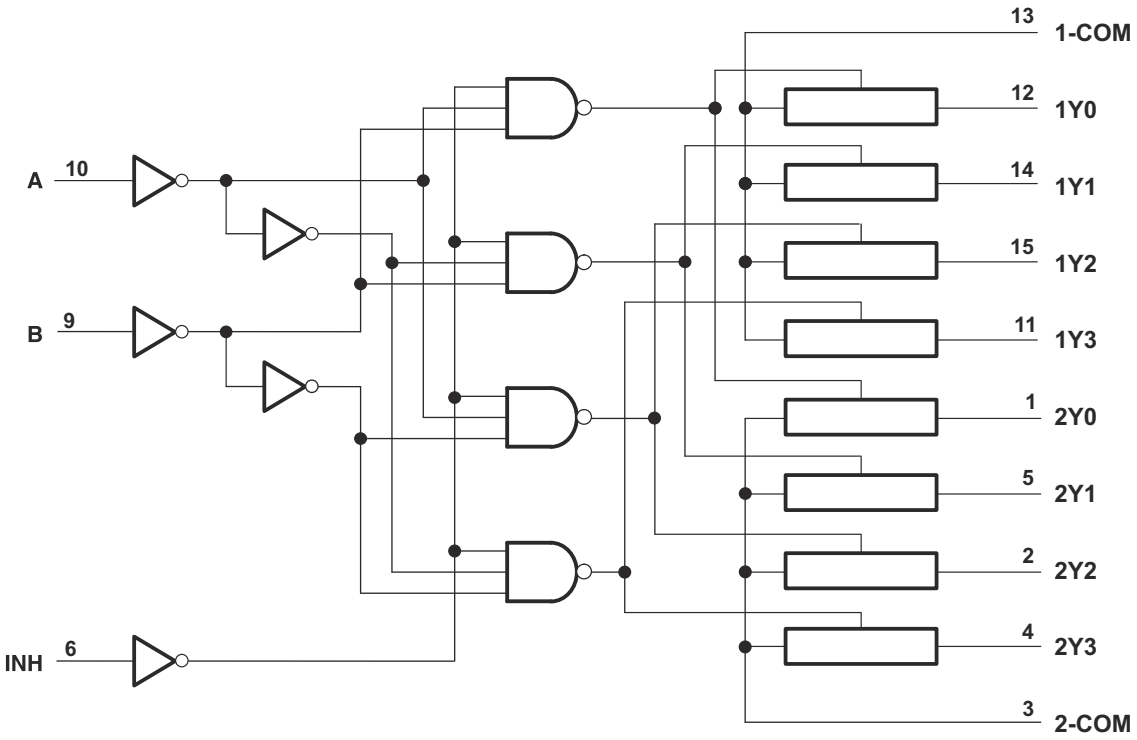

7.3 Feature Description

This device contains 2 separate 4-channel multiplexers for use in a variety of applications. The 4-channel multiplexers can also be configured as demultiplexers by using the COM pins as inputs and the 1Yx or 2Yx pins as outputs. This device is qualified for automotive applications and has an extended temperature range of -40°C to 125°C (maximum depends on package type).

7.4 Device Functional Modes

表 7-1. Function Table

INPUTS			ON CHANNEL
INH	B	A	
L	L	L	1Y0, 2Y0
L	L	H	1Y1, 2Y1
L	H	L	1Y2, 2Y2
L	H	H	1Y3, 2Y3
H	X	X	None

8 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

8.1 Application Information

A multiplexer is used in applications where multiple signals share a resource. In the following example, several different sensors are connected to the analog-to-digital converter (ADC) of a microcontroller (MCU).

8.2 Typical Application

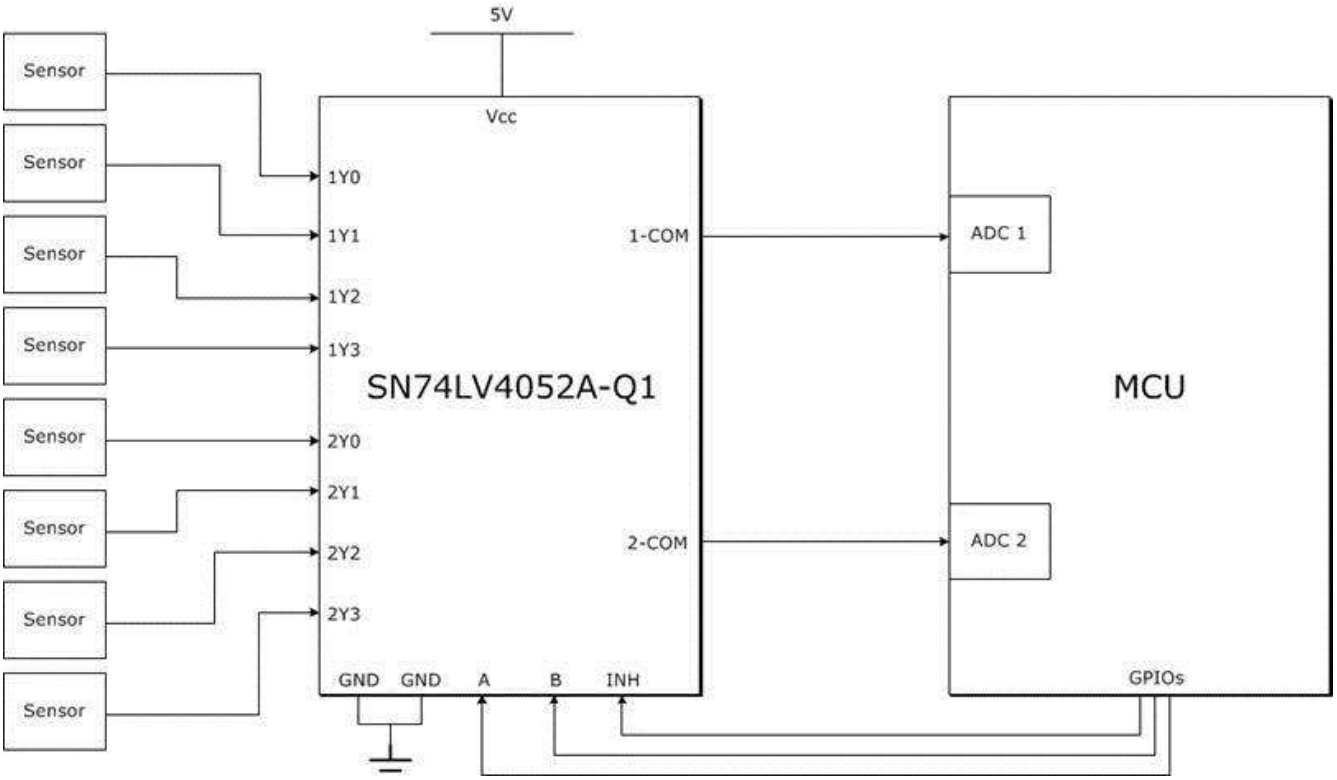


図 8-1. Typical Application Schematic

8.2.1 Design Requirements

Processing 8 different analog signals would normally require 8 separate ADCs, but the previous figure shows how to achieve this using only 2 ADCs and 3 GPIOs (general purpose input/outputs).

8.2.2 Detailed Design Procedure

To design with the SN74LV4052A-Q1, a stable input voltage between 2V (see *Recommended Operating Conditions* for details) and 5.5V must be available. The characteristics of the signal that is being multiplexed so that no important information is lost due to timing or voltage level incompatibility with this device is another important design consideration.

Copyright © 2024 Texas Instruments Incorporated

8.3 Power Supply Recommendations

Most systems have a common 3.3V or 5V rail that may be used to supply the V_{CC} pin of this device. If this is not available, then a Switch-Mode-Power-Supply (SMPS) or a Linear Dropout Regulator (LDO) may be used to supply this device from a higher voltage rail.

8.4 Layout

8.4.1 Layout Guidelines

In general, it is best to keep signal lines as short and as straight as possible. Incorporation of microstrip or stripline techniques is also recommended when signal lines are greater than 1 inch in length. These traces must be designed with a characteristic impedance of either 50Ω or 75Ω, as required by the application. Be careful when placing this device too close to high voltage switching components, as they may cause interference.

8.4.2 Layout Example

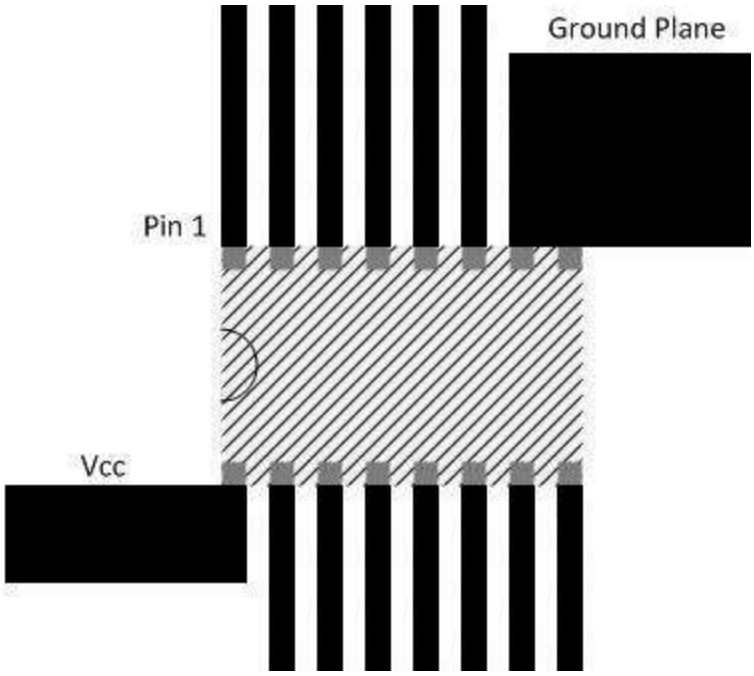


図 8-2. Layout Example Schematic

9 Device and Documentation Support

9.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。 変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

9.2 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの使用条件を参照してください。

9.3 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

9.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

9.5 用語集

テキサス・インスツルメンツ用語集　　この用語集には、用語や略語の一覧および定義が記載されています。

10 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision I (October 2024) to Revision J (October 2024)	Page
• Removed duplicate 図 6-9	9

Changes from Revision H (September 2024) to Revision I (October 2024)	Page
• Added 50mA to the Switch IO diode clamp current	4
• Added typical spec for I_{cc} at 25°C	5
• Added typical spec for C_{IS} at 25°C	5

Changes from Revision G (June 2024) to Revision H (September 2024)	Page
• DYY パッケージとサイズを追加	1
• Added DYY package	3

Changes from Revision F (December 2014) to Revision G (June 2024)	Page
• ドキュメント全体にわたって表、図、相互参照の採番方法を更新	1
• パッケージ リード線を含めるよう「パッケージ情報」表を更新	1

Copyright © 2024 Texas Instruments Incorporated

- Added new VIH and VIL Specifications at 1.65V Vcc.....5

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2024 Texas Instruments Incorporated

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、テキサス・インスツルメンツの販売条件、または ti.com やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所:Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
CLV4052ATPWRG4Q1	Obsolete	Production	TSSOP (PW) | 16	-	-	Call TI	Call TI	-40 to 105	L4052AQ
SN74LV4052AQDYYRQ1	Active	Production	SOT-23-THIN (DYY) | 16	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LV4052Q
SN74LV4052AQDYYRQ1.A	Active	Production	SOT-23-THIN (DYY) | 16	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LV4052Q
SN74LV4052AQPWRQ1	Active	Production	TSSOP (PW) | 16	2000 | LARGE T&R	Yes	NIPDAU | SN	Level-1-260C-UNLIM	-40 to 125	4052AQ1
SN74LV4052AQPWRQ1.A	Active	Production	TSSOP (PW) | 16	2000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4052AQ1
SN74LV4052ATDRQ1	NRND	Production	SOIC (D) | 16	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4052AQ
SN74LV4052ATDRQ1.A	NRND	Production	SOIC (D) | 16	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	L4052AQ
SN74LV4052ATPWRQ1	Obsolete	Production	TSSOP (PW) | 16	-	-	Call TI	Call TI	-40 to 105	L4052AQ

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74LV4052A-Q1 :


- Catalog : SN74LV4052A
- Enhanced Product : SN74LV4052A-EP

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product
- Enhanced Product - Supports Defense, Aerospace and Medical Applications

TAPE AND REEL INFORMATION

REEL DIMENSIONS

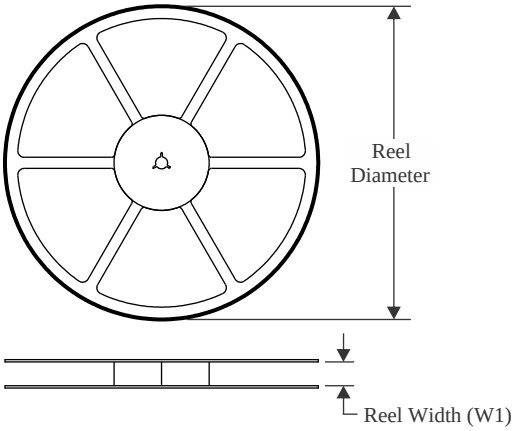


TAPE DIMENSIONS

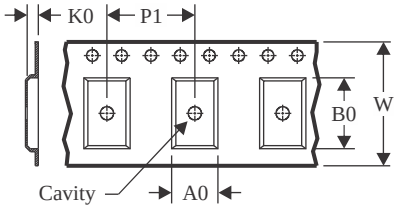

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

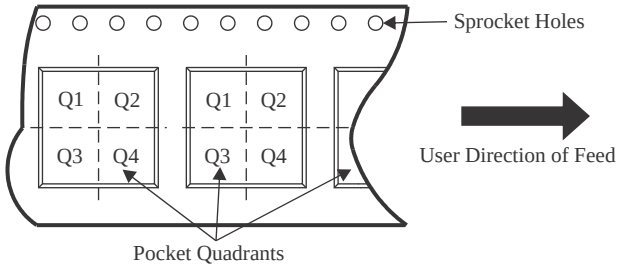

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LV4052AQDYYRQ1	SOT-23-THIN	DYY	16	3000	330.0	12.4	4.8	3.6	1.6	8.0	12.0	Q3
SN74LV4052AQPWRQ1	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LV4052AQPWRQ1	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

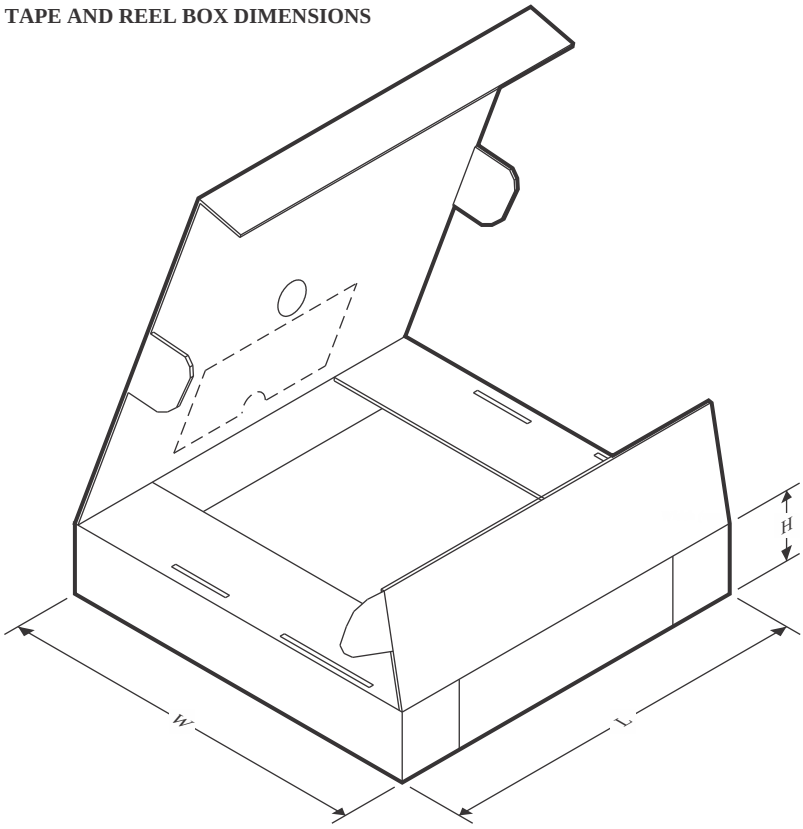

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74LV4052AQDYYRQ1	SOT-23-THIN	DYY	16	3000	336.6	336.6	31.8
SN74LV4052AQPWRQ1	TSSOP	PW	16	2000	353.0	353.0	32.0
SN74LV4052AQPWRQ1	TSSOP	PW	16	2000	356.0	356.0	35.0

D (R–PDSO–G16) PLASTIC SMALL OUTLINE

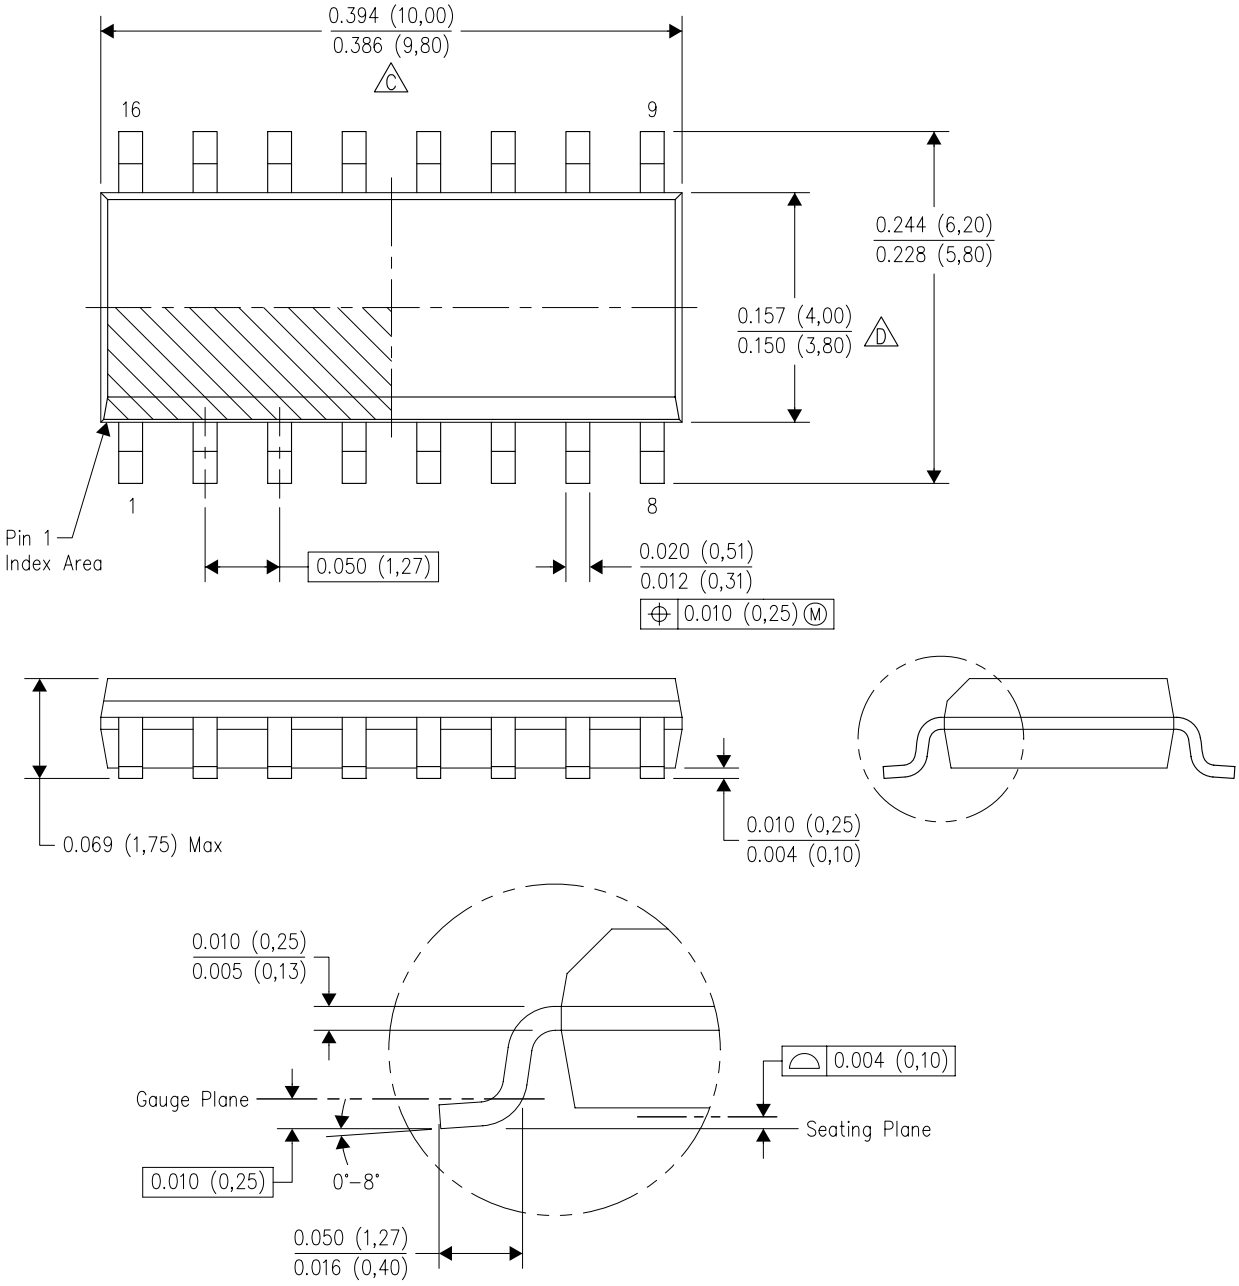


NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AC.

PACKAGE OUTLINE

DYY0016A


SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

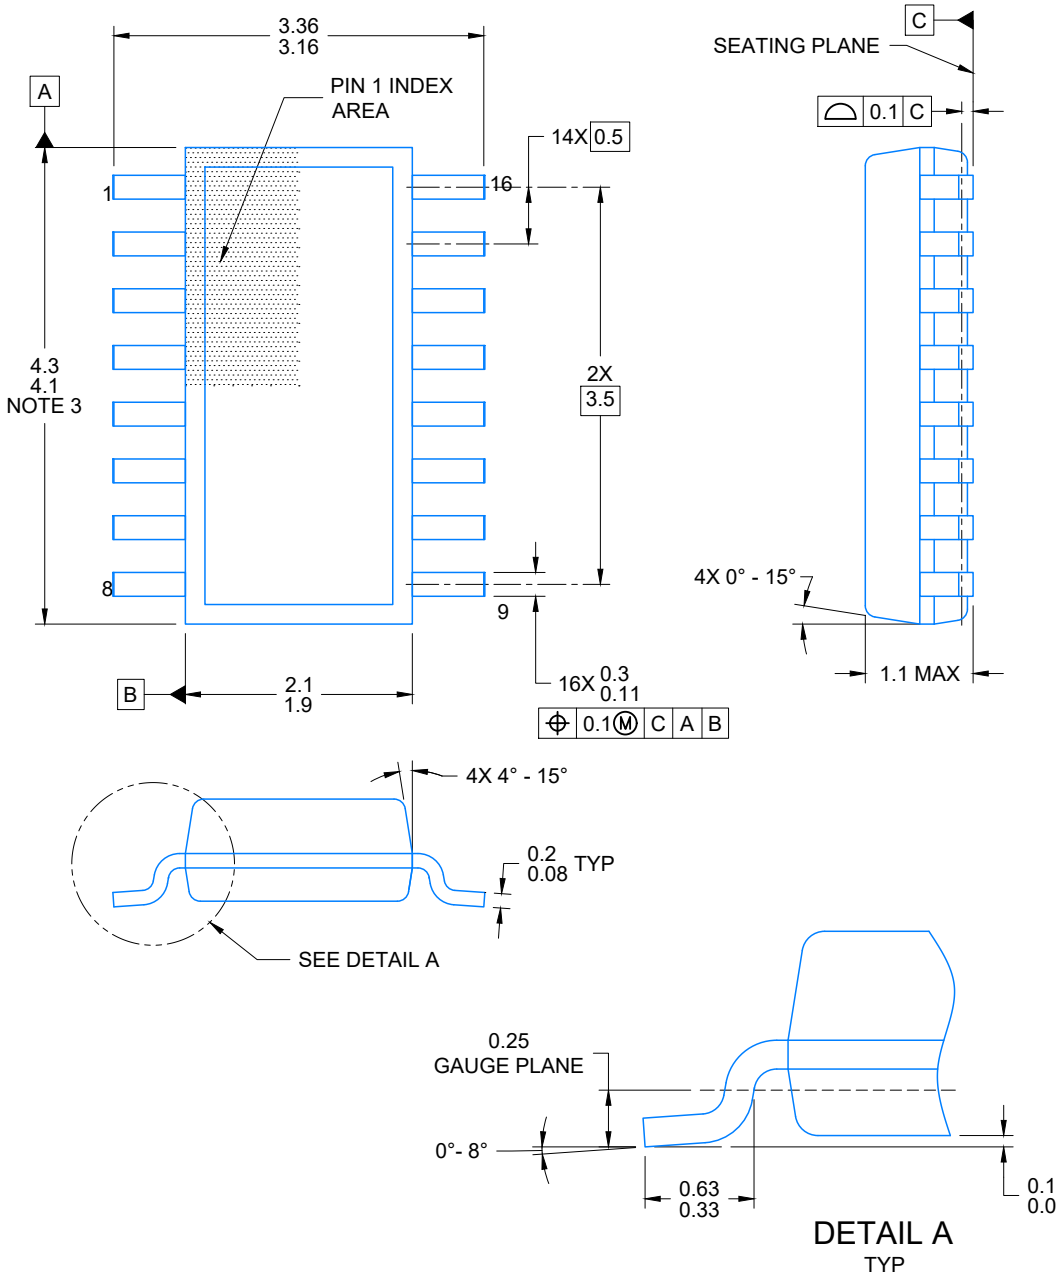


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
5. Reference JEDEC Registration MO-345, Variation AA

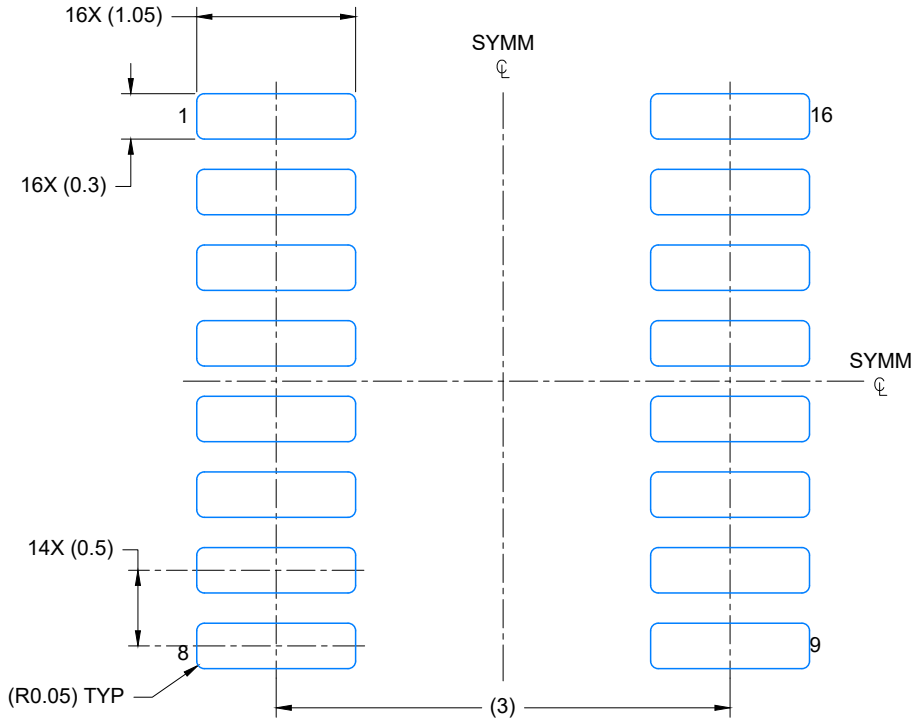

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 20X

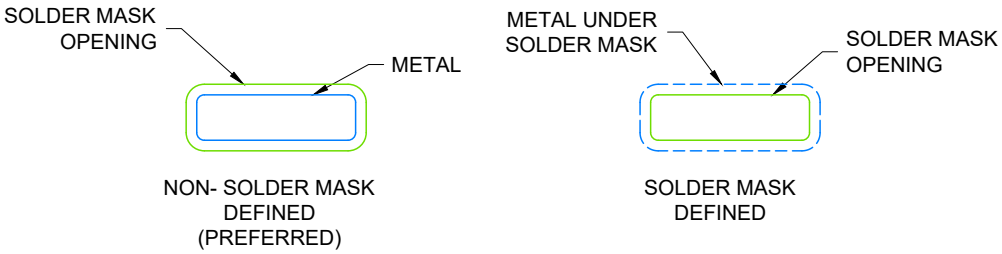

SOLDER MASK DETAILS

4224642/D 07/2024


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

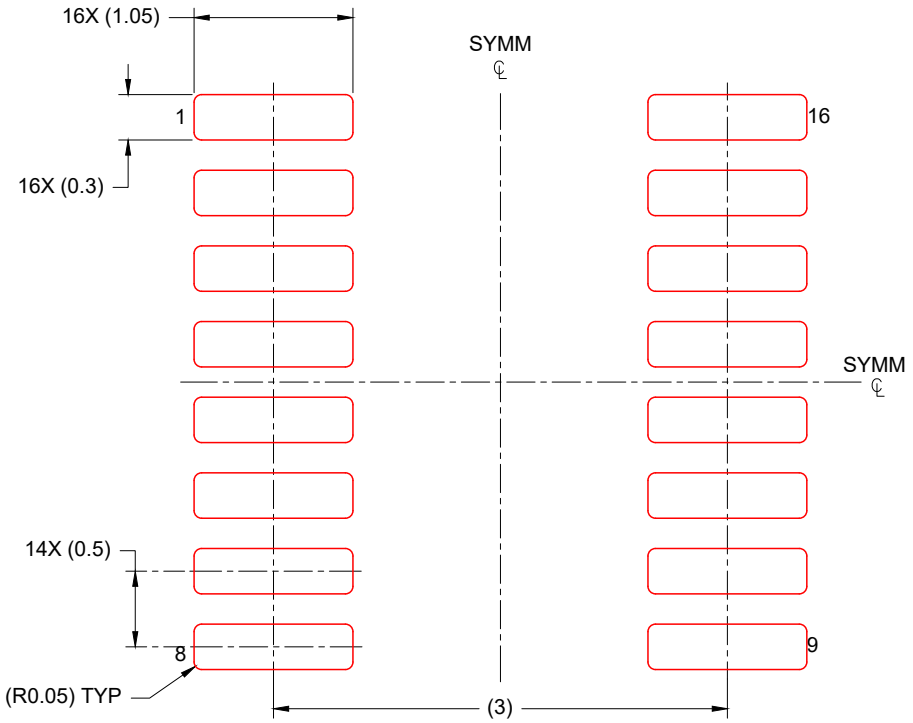

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 20X

4224642/D 07/2024

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

PW0016A


TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

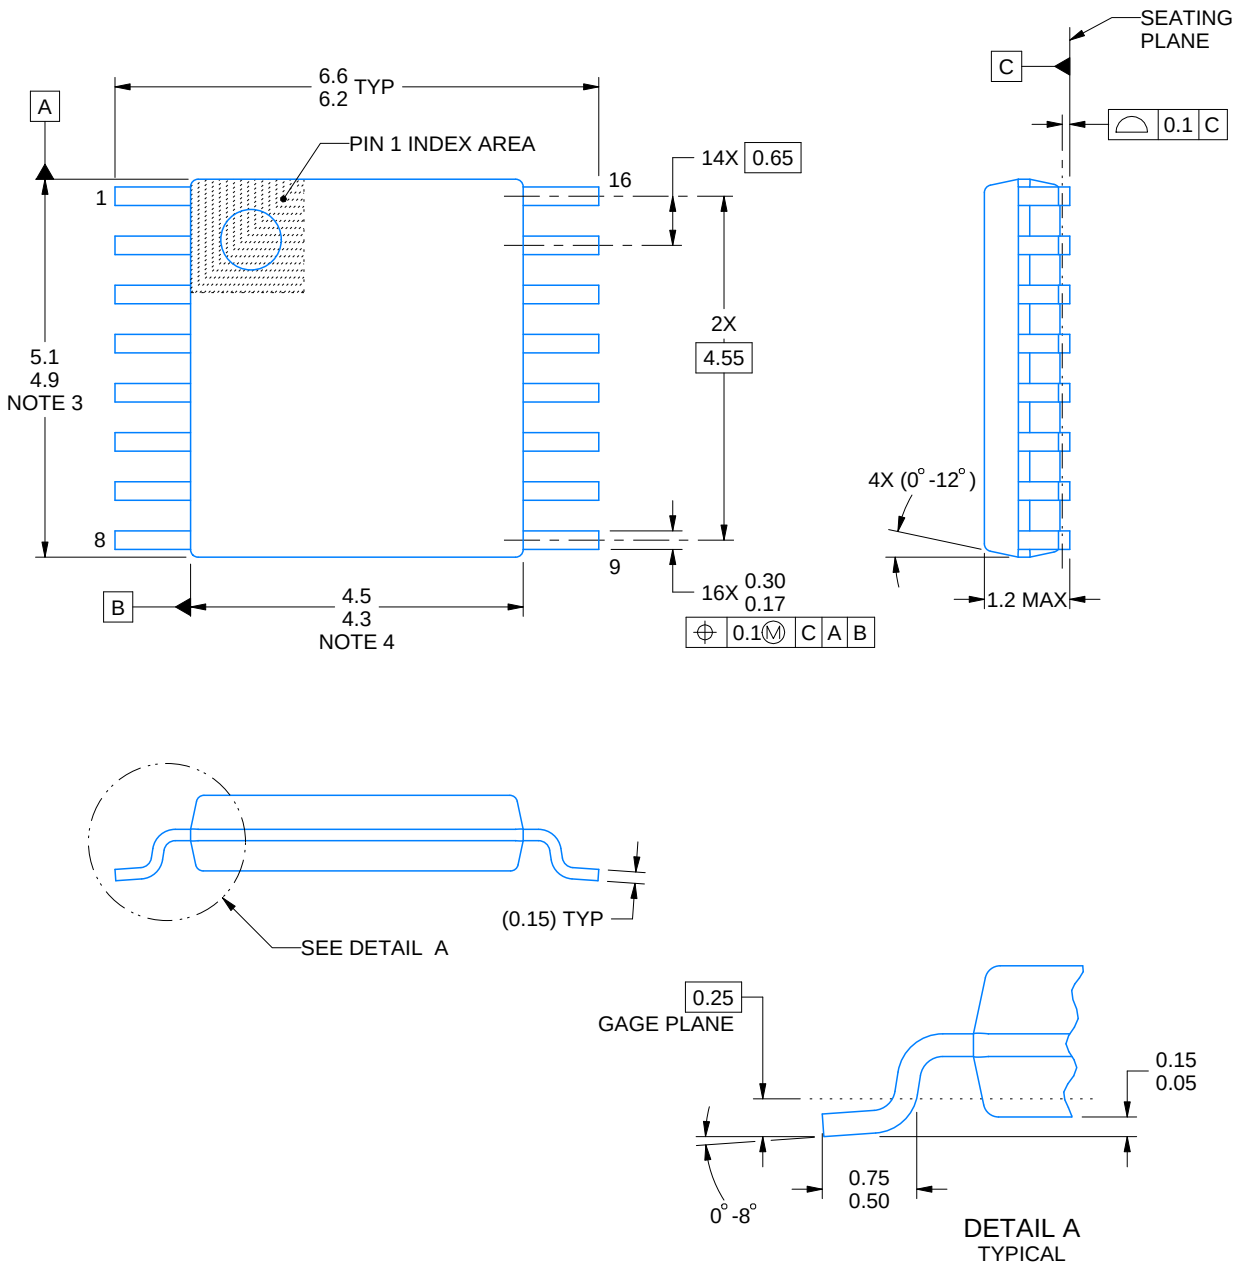

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

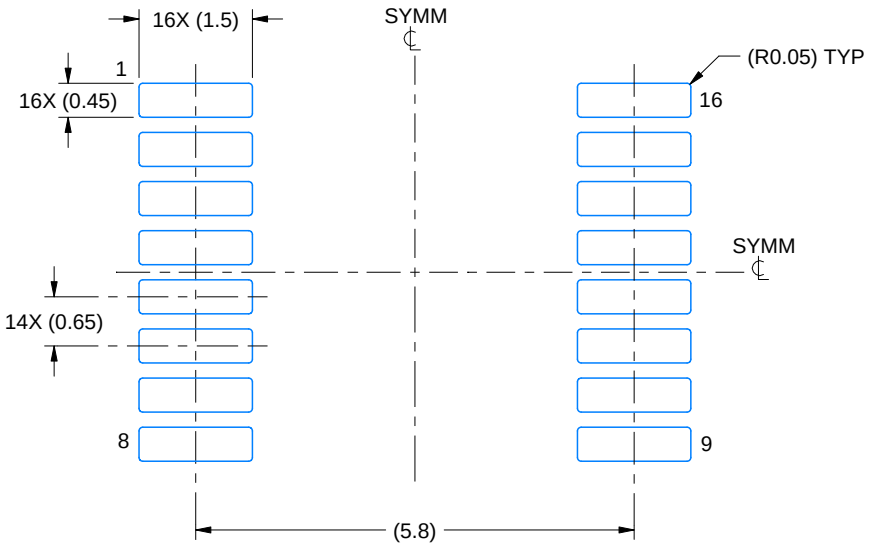

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X




SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

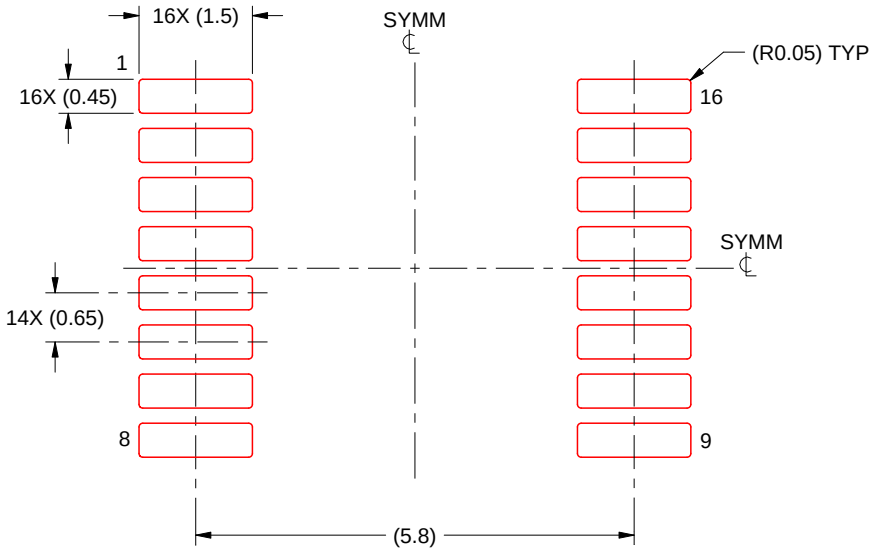

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月