

30V, N-Channel NexFET™ Power MOSFETs

1 Features


- Ultralow Q_g and Q_{gd}
- Low thermal resistance
- Avalanche rated
- Pb free terminal plating
- RoHS compliant
- Halogen Free
- SON 5mm × 6mm plastic package

2 Applications


- Point-of-load synchronous buck in networking, telecom, and computing systems
- Optimized for control and synchronous FET applications

3 Description

The NexFET™ power MOSFET has been designed to minimize losses in power conversion applications.



Top View

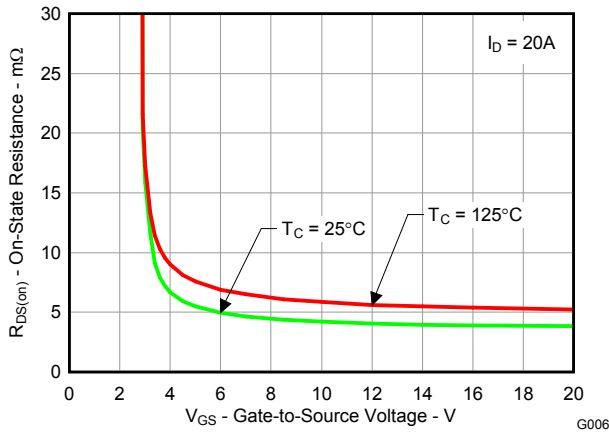

$R_{DS(on)}$ vs V_{GS}

Product Summary

V_{DS}	Drain to Source Voltage	30	V
Q_g	Gate Charge Total (4.5V)	6.4	nC
Q_{gd}	Gate Charge Gate to Drain	1.9	nC
$R_{DS(on)}$	Drain to Source On Resistance	$V_{GS} = 4.5V$	5.4 mΩ
		$V_{GS} = 10V$	4.1 mΩ
$V_{GS(th)}$	Threshold Voltage	1.5	V


Ordering Information

Device	Package	Media	Qty	Ship
CSD17510Q5A	SON 5mm × 6mm Plastic Package	13-Inch Reel	2500	Tape and Reel

Absolute Maximum Ratings

$T_A = 25^\circ C$ unless otherwise stated		VALUE	UNIT
V_{DS}	Drain to Source Voltage	30	V
V_{GS}	Gate to Source Voltage	±20	V
I_D	Continuous Drain Current, $T_C = 25^\circ C$	55	A
	Continuous Drain Current ⁽¹⁾	20	A
I_{DM}	Pulsed Drain Current, $T_A = 25^\circ C$ ⁽²⁾	129	A
P_D	Power Dissipation ⁽¹⁾	3	W
T_J, T_{STG}	Operating Junction and Storage Temperature Range	–55 to 150	°C
E_{AS}	Avalanche Energy, single pulse $I_D = 54A, L = 0.1mH, R_G = 25\Omega$	146	mJ

- (1) Typical $R_{\theta JA} = 41^\circ C/W$ on 1-inch² (6.45cm²), 2oz. (0.071mm thick) Cu pad on a 0.06-inch (1.52mm) thick FR4 PCB.
- (2) Pulse duration $\leq 300\mu s$, duty cycle $\leq 2\%$

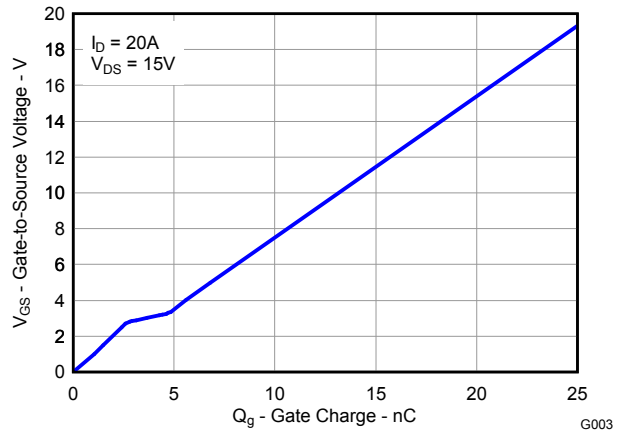

GATE CHARGE



Table of Contents

1 Features	1	7.2 Documentation Support.....	7
2 Applications	1	7.3 Receiving Notification of Documentation Updates.....	7
3 Description	1	7.4 Support Resources.....	7
4 Electrical Characteristics	3	7.5 Trademarks.....	7
5 Thermal Characteristics	3	7.6 Electrostatic Discharge Caution.....	7
6 Typical MOSFET Characteristics	4	7.7 Glossary.....	7
7 Device and Documentation Support	7	9 Mechanical Data	9
7.1 Third-Party Products Disclaimer.....	7		

4 Electrical Characteristics

(T_A = 25°C unless otherwise stated)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Static Characteristics						
BV _{DSS}	Drain to Source Voltage	V _{GS} = 0V, I _{DS} = 250µA	30			V
I _{DSS}	Drain to Source Leakage Current	V _{GS} = 0V, V _{DS} = 24V			1	µA
I _{GSS}	Gate to Source Leakage Current	V _{DS} = 0V, V _{GS} = 20V			100	nA
V _{GS(th)}	Gate to Source Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250µA	1	1.5	2.1	V
R _{DS(on)}	Drain to Source On Resistance	V _{GS} = 4.5V, I _{DS} = 20A		5.4	7.3	mΩ
		V _{GS} = 10V, I _{DS} = 20A		4.1	5.2	mΩ
g _{fs}	Transconductance	V _{DS} = 15V, I _{DS} = 20A		59		S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{GS} = 0V, V _{DS} = 15V, f = 1MHz		960	1250	pF
C _{oss}	Output Capacitance			630	820	pF
C _{rss}	Reverse Transfer Capacitance			51	66	pF
R _G	Series Gate Resistance			0.85	1.7	Ω
Q _g	Gate Charge Total (4.5V)	V _{DS} = 15V, I _{DS} = 20A		6.4	8.3	nC
Q _{gd}	Gate Charge Gate to Drain			1.9		nC
Q _{gs}	Gate Charge Gate to Source			2.7		nC
Q _{g(th)}	Gate Charge at V _{th}			1.5		nC
Q _{oss}	Output Charge	V _{DS} = 13.5V, V _{GS} = 0V		16		nC
t _{d(on)}	Turn On Delay Time	V _{DS} = 15V, V _{GS} = 4.5V, I _{DS} = 20A, R _G = 2Ω		7		ns
t _r	Rise Time			11		ns
t _{d(off)}	Turn Off Delay Time			9		ns
t _f	Fall Time			4.1		ns
Diode Characteristics						
V _{SD}	Diode Forward Voltage	I _{SD} = 20A, V _{GS} = 0V		0.85	1	V
Q _{rr}	Reverse Recovery Charge	V _{DD} = 13.5V, I _F = 20A, di/dt = 300A/µs		25		nC
t _{rr}	Reverse Recovery Time			24		ns

5 Thermal Characteristics


(T_A = 25°C unless otherwise stated)

PARAMETER		MIN	TYP	MAX	UNIT
R _{θJC}	Thermal Resistance Junction to Case ⁽¹⁾			1.6	°C/W
R _{θJA}	Thermal Resistance Junction to Ambient ^{(1) (2)}			51	°C/W

- (1) R_{θJC} is determined with the device mounted on a 1-inch² (6.45cm²), 2oz. (0.071mm thick) Cu pad on a 1.5-inch × 1.5-inch (3.81cm × 3.81cm), 0.06-inch (1.52mm) thick FR4 PCB. R_{θJC} is specified by design, whereas R_{θJA} is determined by the user's board design.
- (2) Device mounted on FR4 material with 1-inch² (6.45cm²), 2oz. (0.071mm thick) Cu.



Max R_{θJA} = 51°C/W
when mounted on 1 inch²
(6.45cm²) of 2oz. (0.071mm
thick) Cu.



Max R_{θJA} = 125°C/W when
mounted on a minimum pad
area of 2-oz. (0.071mm
thick) Cu.

6 Typical MOSFET Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise stated)

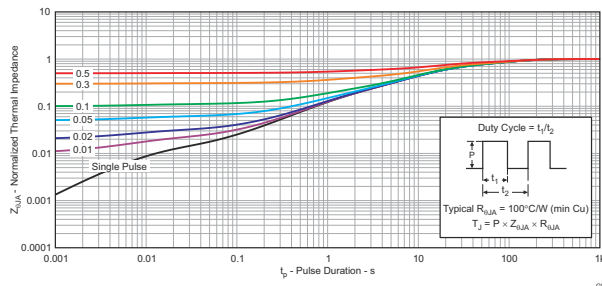


Figure 6-1. Transient Thermal Impedance

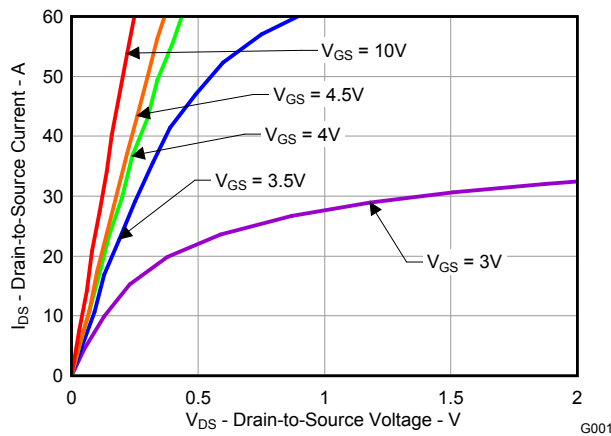


Figure 6-2. Saturation Characteristics

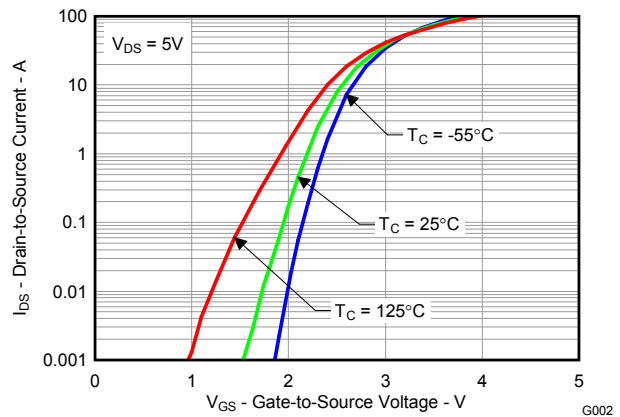


Figure 6-3. Transfer Characteristics

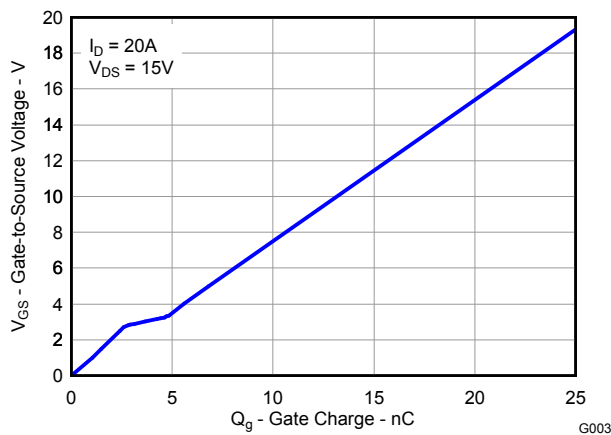


Figure 6-4. Gate Charge

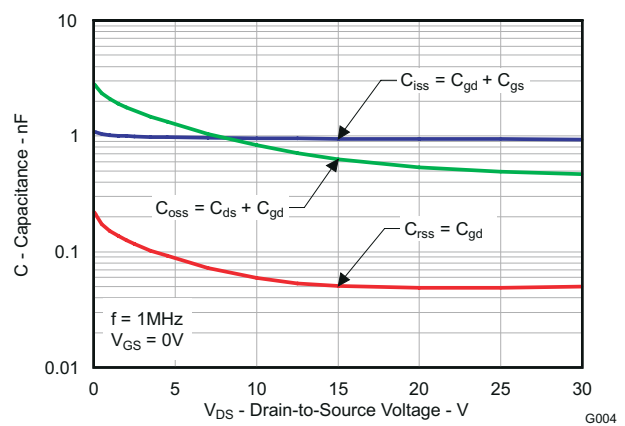


Figure 6-5. Capacitance

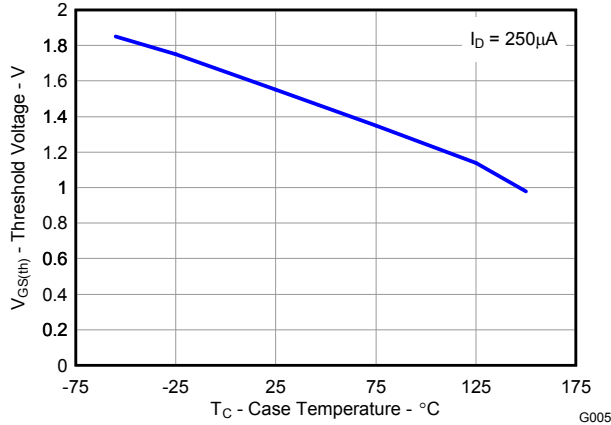


Figure 6-6. Threshold Voltage vs. Temperature

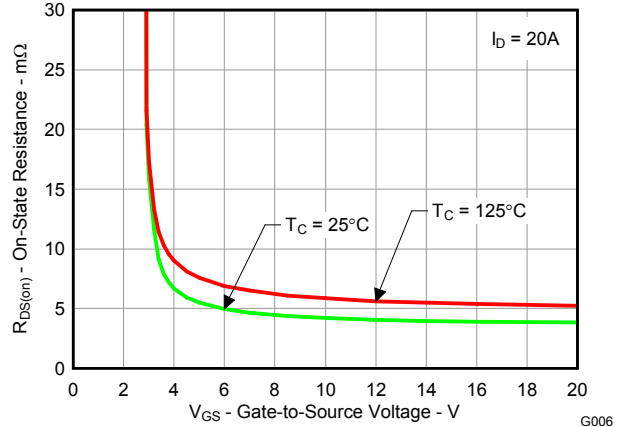


Figure 6-7. On-State Resistance vs. Gate-to-Source Voltage

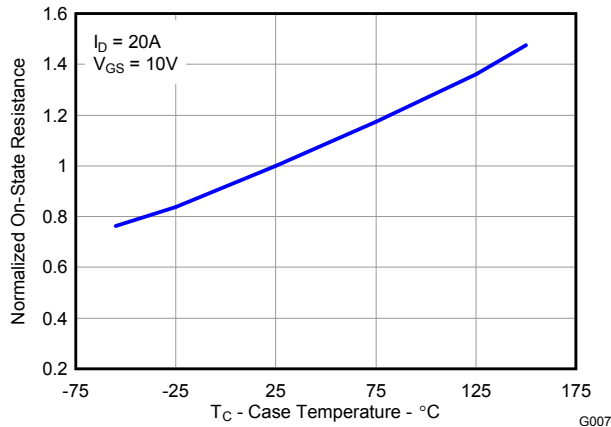


Figure 6-8. Normalized On-State Resistance vs. Temperature

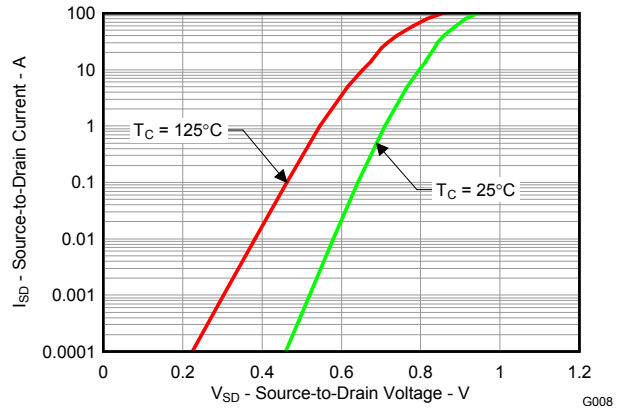


Figure 6-9. Typical Diode Forward Voltage

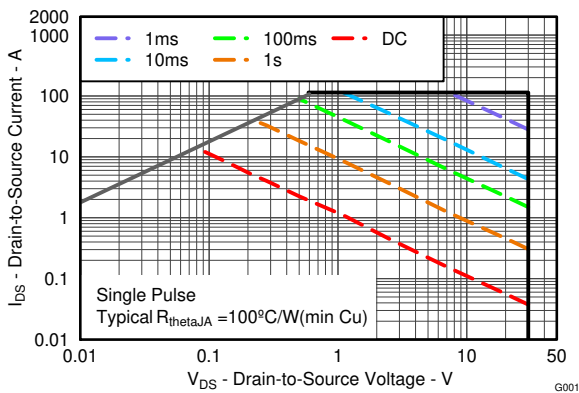


Figure 6-10. Maximum Safe Operating Area

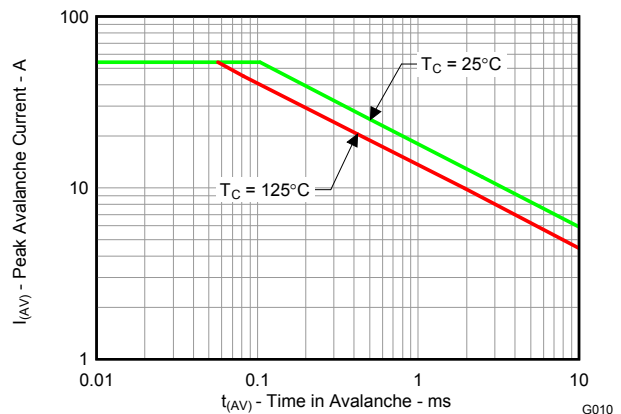


Figure 6-11. Single Pulse Unclamped Inductive Switching

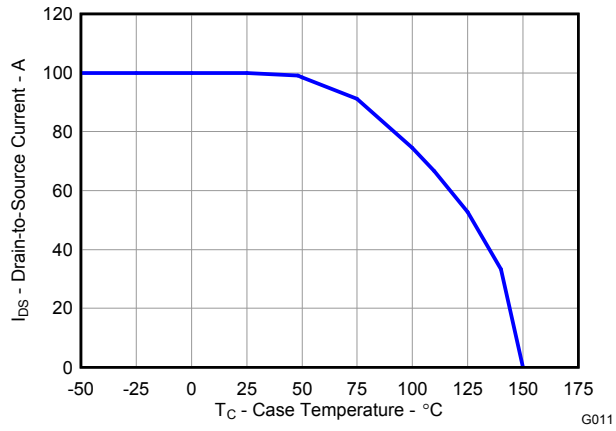


Figure 6-12. Maximum Drain Current vs. Temperature

7 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

7.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

7.2 Documentation Support

7.2.1 Related Documentation

7.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

7.4 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

7.5 Trademarks

NexFET™ and TI E2E™ are trademarks of Texas Instruments.
All trademarks are the property of their respective owners.

7.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

7.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

8

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision G (September 2012) to Revision H (December 2024) Page

- Updated the numbering format for tables, figures, and cross-references throughout the document..... 1

Changes from Revision * (July 2010) to Revision A () Page

- Changed the Y axis scale for [Figure 6-5](#) 4

Changes from Revision F (October 2011) to Revision G (September 2012)	Page
• Changed Figure 6-10	4

Changes from Revision E (July 2011) to Revision F (October 2011)	Page
• Changed the I_D Continuous Drain Current, $T_C = 25^\circ\text{C}$ value From: 100A To: 55A.....	1
• Changed Figure 6-10	4

Changes from Revision A (August 2010) to Revision B ()	Page
• Changed $R_{DS(on)}$ Test Conditions From $V_{GS} = 8\text{V}$ To: $V_{GS} = 10\text{V}$	3

Changes from Revision B (September 2010) to Revision C ()	Page
• Absolute Maximum Ratings, changed the E_{AS} value from 45 to 146mJ.....	1

Changes from Revision C (September 2010) to Revision D ()	Page
---	-------------

Changes from Revision D (November 2010) to Revision E ()	Page
• Changed V_{GS} in the Abs Max Ratings table From: +20/-12V To: $\pm 20\text{V}$	1
• Changed from +20/-12V to 20V.....	3

9 Mechanical Data

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
CSD17510Q5A	ACTIVE	VSONP	DQJ	8	2500	RoHS-Exempt & Green	SN	Level-1-260C-UNLIM	-55 to 150	CSD17510	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CSD17510Q5A	VSONP	DQJ	8	2500	330.0	12.4	6.3	5.3	1.2	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CSD17510Q5A	VSONP	DQJ	8	2500	340.0	340.0	38.0

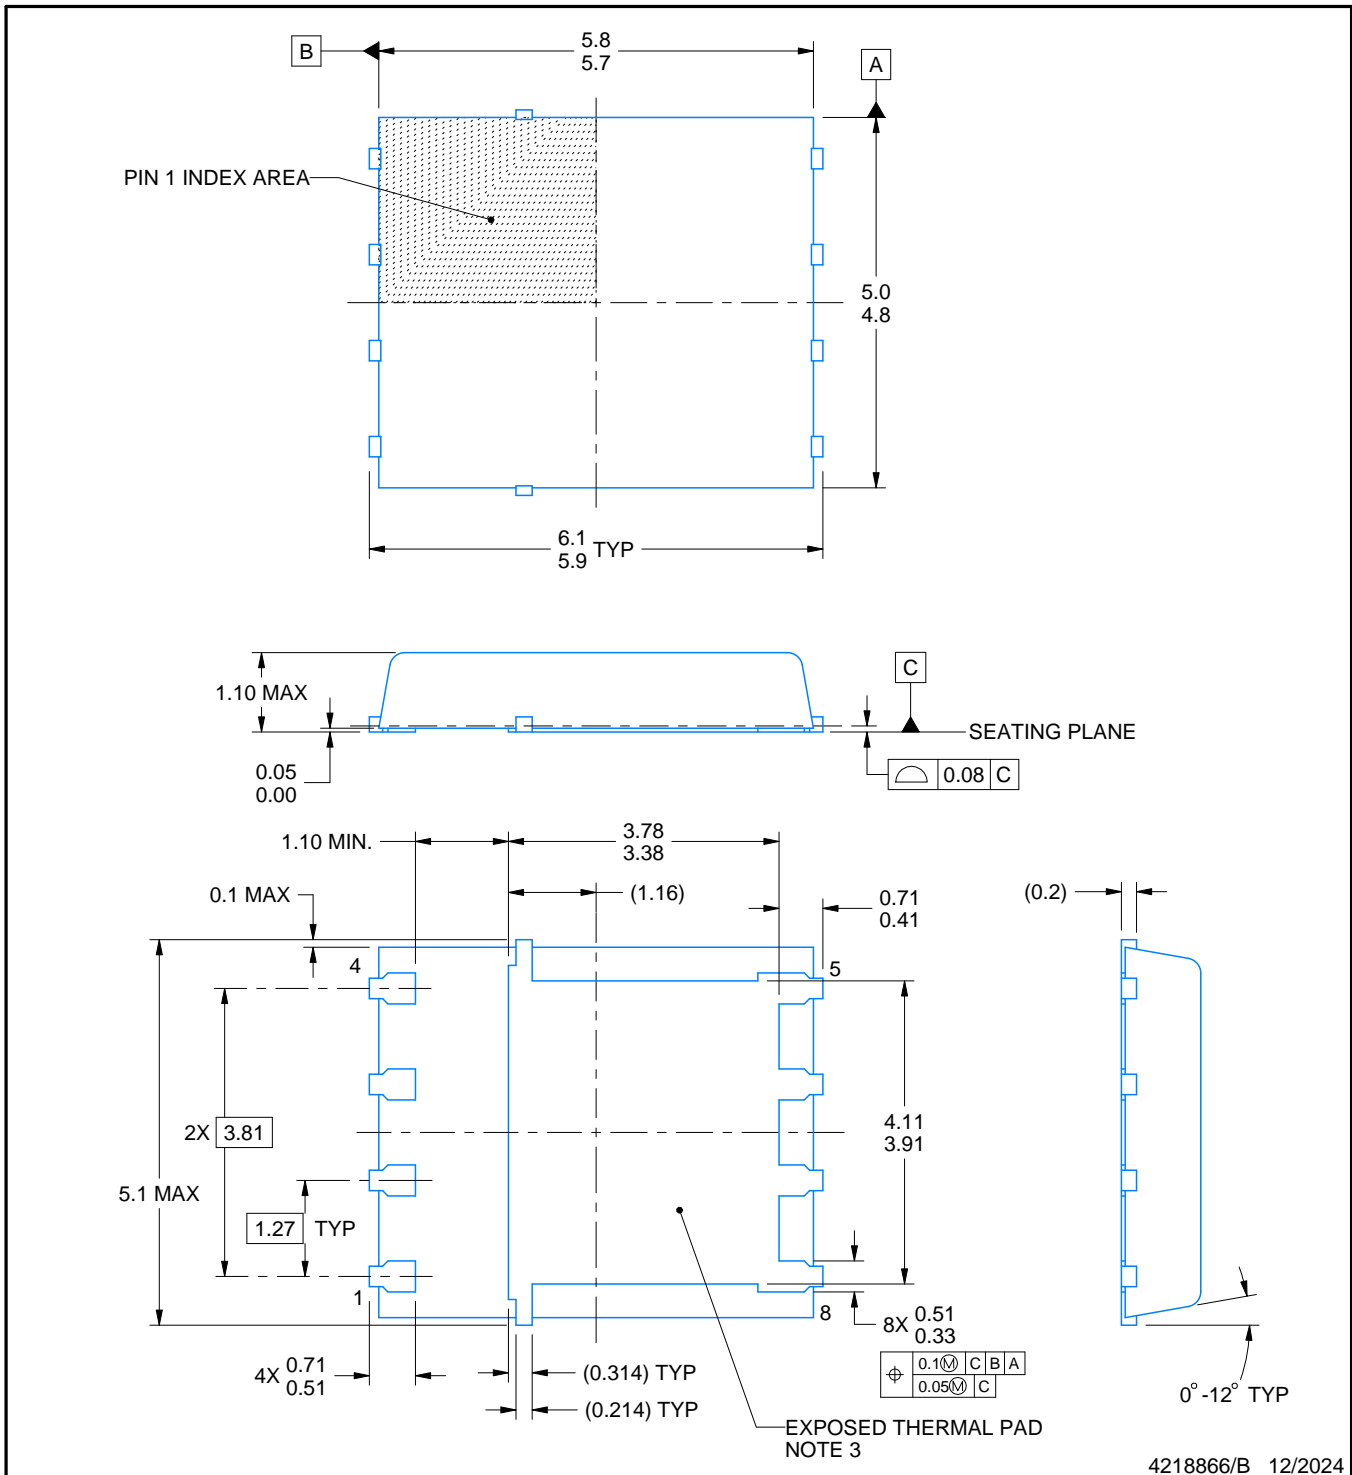

4218866/B 12/2024

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.
4. Metalized features are supplier options and may not be on the package.
5. All dimensions do not include mold flash or protrusions.

EXAMPLE BOARD LAYOUT


DQJ0008A

VSONP - 1.1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

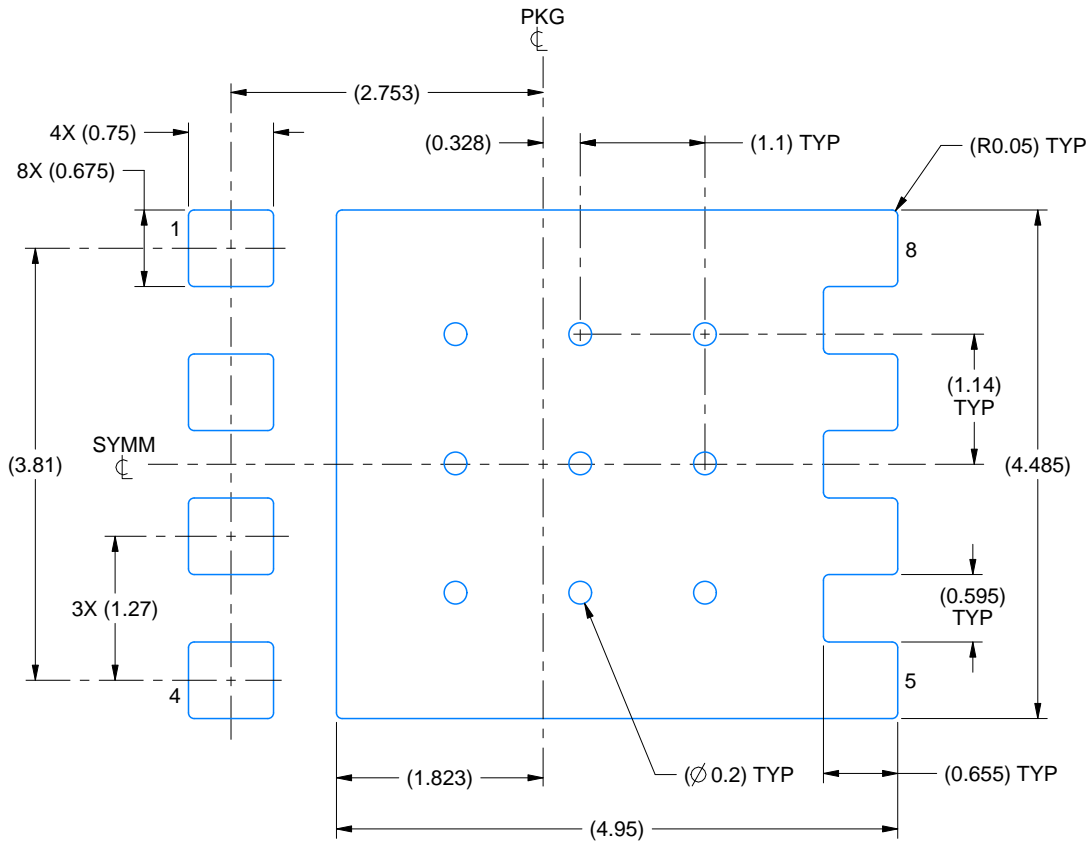

LAND PATTERN EXAMPLE
SOLDER MASK DEFINED
SCALE: 15X

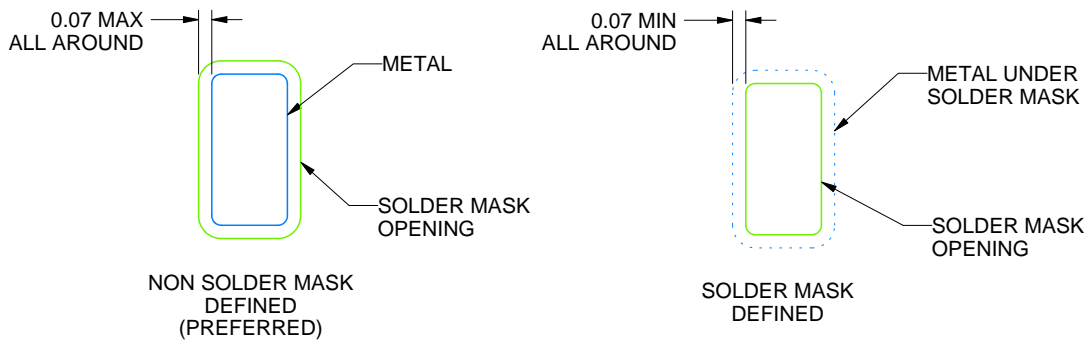

SOLDER MASK DETAILS

4218866/B 12/2024

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If some or all are implemented, recommended via locations are shown.

EXAMPLE STENCIL DESIGN

DQJ0008A

VSONP - 1.1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

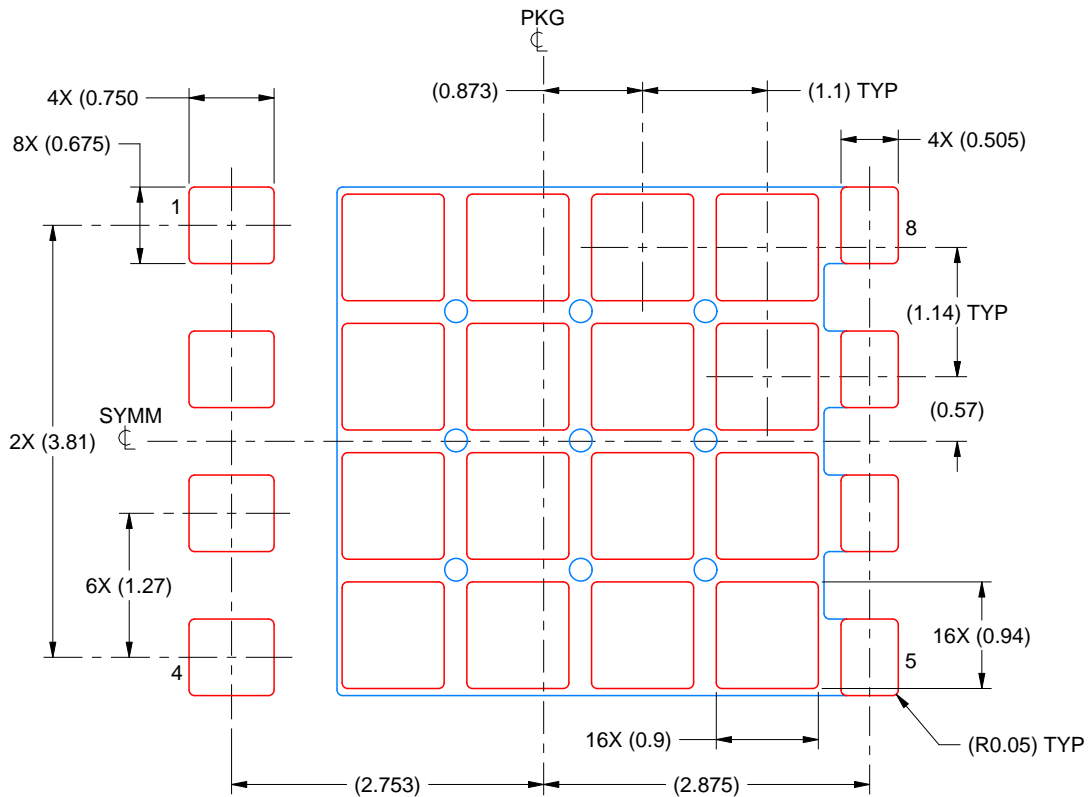

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD:
70% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE: 15X

4218866/B 12/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated