

TMUX1108 5V/±2.5V、低リーク電流、8:1 の高精度マルチプレクサ

1 特長

- 幅広い電源電圧範囲: ±2.5V、1.08V ~ 5.5V
- 小さいリーク電流: 3pA
- 少ない電荷注入: 1pC
- 低いオン抵抗: 2.5Ω
- -40°C ~ +125°C の動作温度範囲
- **1.8V ロジック互換**
- **フェイルセーフ ロジック**
- **レール ツー レールの動作**
- **双方向の信号パス**
- **ブレイク ビフォー メイクの切り替え動作**
- **ESD 保護 (HBM): 2000V**

2 アプリケーション

- **超音波スキャナ**
- **メディカル モニタと診断**
- **光学ネットワーク機器**
- **光学テスト機器**
- **リモート無線ユニット**
- **ATE 試験装置**
- **ファクトリ オートメーションと産業プロセス制御**
- **プログラマブル ロジック コントローラ (PLC)**
- **アナログ入力モジュール**
- **デジタル マルチメータ**
- **バッテリー モニタリング システム**

3 概要


TMUX1108 は、高精度の CMOS (Complementary Metal-Oxide Semiconductor) マルチプレクサ (MUX) です。TMUX1108 はシングル チャネルの 8:1 構成で使用できます。1.08V ~ 5.5V の広い電源電圧範囲で動作するため、このデバイスは医療機器から産業用システムまで幅広い用途に適しています。このデバイスは、ソース (Sx) およびドレイン (D) ピンで、GND から V_{DD} までの範囲の双方向アナログおよびデジタル信号をサポートします。すべてのロジック入力のスレッシュホールドは **1.8V ロジック互換** で、有効な電源電圧範囲で動作していれば、TTL と CMOS の両方のロジックと互換性を実現します。**フェイルセーフ ロジック** 回路により、電源ピンよりも先に制御ピンに電圧が印加されるため、デバイスへの損傷の可能性が避けられます。

TMUX1108 は、高精度スイッチおよびマルチプレクサのデバイス ファミリの製品です。これらのデバイスは、オンおよびオフ時のリーク電流が非常に小さく、電荷注入も少ないため、高精度の測定用途に使用できます。消費電流が 8nA と低く、小さいパッケージ オプションが存在するため、携帯型アプリケーションでも使用できます。


パッケージ情報

部品番号 ⁽¹⁾	パッケージ ⁽²⁾	パッケージ サイズ ⁽³⁾
TMUX1108	PW (TSSOP, 16)	5mm × 6.4mm
	RSV (QFN, 16)	2.6mm × 1.8mm

- (1) **製品比較表**を参照してください。
- (2) 詳細については、**セクション 11**を参照してください。
- (3) パッケージ サイズ (長さ×幅) は公称値であり、該当する場合はピンも含まれます。

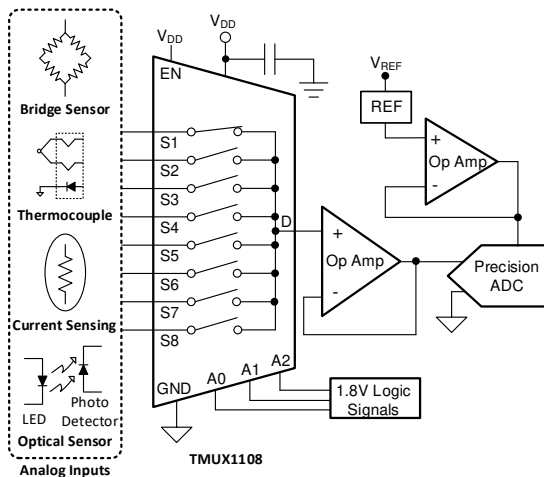

アプリケーションの例



ブロック図



Table of Contents

1 特長	1	7.2 Functional Block Diagram.....	21
2 アプリケーション	1	7.3 Feature Description.....	21
3 概要	1	7.4 Device Functional Modes.....	23
4 Device Comparison Table	2	8 Application and Implementation	24
5 Pin Configuration and Functions	2	8.1 Application Information.....	24
6 Specifications	4	8.2 Typical Application.....	24
6.1 Absolute Maximum Ratings.....	4	8.3 Power Supply Recommendations.....	25
6.2 ESD Ratings.....	4	8.4 Layout.....	26
6.3 Recommended Operating Conditions.....	4	9 Device and Documentation Support	27
6.4 Thermal Information.....	5	9.1 Documentation Support.....	27
6.5 Electrical Characteristics ($V_{DD} = 5V \pm 10\%$).....	5	9.2 ドキュメントの更新通知を受け取る方法.....	27
6.6 Electrical Characteristics ($V_{DD} = 3.3V \pm 10\%$).....	7	9.3 サポート・リソース.....	27
6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$).....	8	9.4 Trademarks.....	27
6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$).....	9	9.5 静電気放電に関する注意事項.....	27
6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$).....	11	9.6 用語集.....	27
6.10 Typical Characteristics.....	13	10 Revision History	27
7 Detailed Description	16	11 Mechanical, Packaging, and Orderable Information	28
7.1 Overview.....	16		

4 Device Comparison Table

PRODUCT	DESCRIPTION
TMUX1108	8:1, 1-Channel, single-ended multiplexer

5 Pin Configuration and Functions

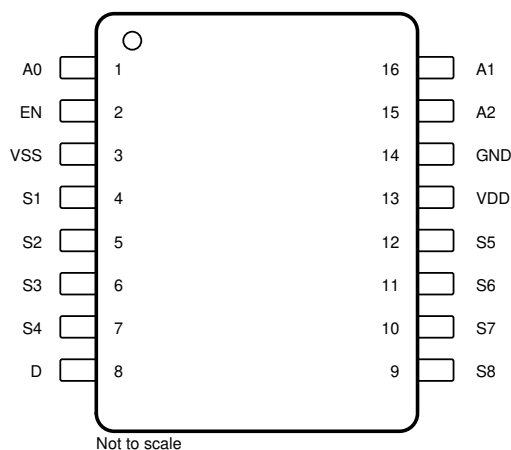


図 5-1. TMUX1108: PW Package, 16-Pin TSSOP (Top View)

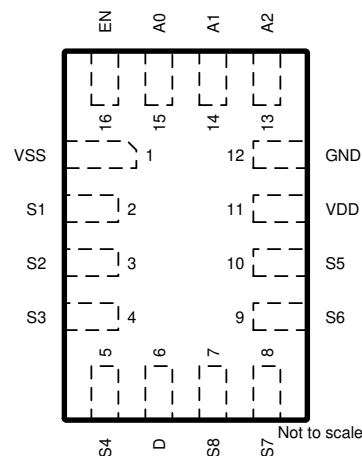


図 5-2. TMUX1108: RSV Package, 16-Pin QFN (Top View)

表 5-1. Pin Functions

PIN			TYPE ⁽¹⁾	DESCRIPTION
NAME	TSSOP	UQFN		
A0	1	15	I	Address line 0
EN	2	16	I	Active high logic input. When this pin is low, all switches are turned off. When this pin is high, the A[2:0] logic inputs determine which switch is turned on.
VSS	3	1	P	Negative power supply. This pin is the most negative power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1µF to 10µF between V _{SS} and GND. V _{SS} can be connected to ground for single supply applications.
S1	4	2	I/O	Source pin 1. Can be an input or output.
S2	5	3	I/O	Source pin 2. Can be an input or output.
S3	6	4	I/O	Source pin 3. Can be an input or output.
S4	7	5	I/O	Source pin 4. Can be an input or output.
D	8	6	I/O	Drain pin. Can be an input or output.
S8	9	7	I/O	Source pin 8. Can be an input or output.
S7	10	8	I/O	Source pin 7. Can be an input or output.
S6	11	9	I/O	Source pin 6. Can be an input or output.
S5	12	10	I/O	Source pin 5. Can be an input or output.
VDD	13	11	P	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1µF to 10µF between V _{DD} and GND.
GND	14	12	P	Ground (0V) reference
A2	15	13	I	Address line 2
A1	16	14	I	Address line 1

(1) I = input, O = output, I/O = input and output, P = power

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)^{(1) (2) (3)}

		MIN	MAX	UNIT
$V_{DD}-V_{SS}$	Supply voltage	-0.5	6	V
V_{DD}		-0.5	6	V
V_{SS}		-3.0	0.3	V
V_{SEL} or V_{EN}	Logic control input pin voltage (EN, A0, A1, A2)	-0.5	6	V
I_{SEL} or I_{EN}	Logic control input pin current (EN, A0, A1, A2)	-30	30	mA
V_S or V_D	Source or drain voltage (Sx, D)	-0.5	$V_{DD}+0.5$	V
I_S or I_D (CONT)	Source or drain continuous current (Sx, D)	$I_{DC} \pm 10\%$ ⁽⁴⁾	$I_{DC} \pm 10\%$ ⁽⁴⁾	mA
I_S or I_D (PEAK)	Source and drain peak current: (1 ms period maximum, 10% duty cycle maximum) (Sx, SxA, SxB, D, DA, DB)	$I_{peak} \pm 10\%$ ⁽⁴⁾	$I_{peak} \pm 10\%$ ⁽⁴⁾	mA
T_{stg}	Storage temperature	-65	150	°C
P_{tot}	Total power dissipation ^{(5) (6)}		500	mW
T_J	Junction temperature		150	°C

(1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

(3) All voltages are with respect to ground, unless otherwise specified.

(4) Refer to Recommended Operating Conditions for I_{DC} and I_{Peak} ratings.

(5) For TSSOP package: P_{tot} derates linearly above $T_A=90^{\circ}\text{C}$ by $8.41\text{mW}/^{\circ}\text{C}$

(6) For QFN package: P_{tot} derates linearly above $T_A=82^{\circ}\text{C}$ by $7.43\text{mW}/^{\circ}\text{C}$

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001, all pins ⁽¹⁾	± 2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	± 750	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V_{DD}	Positive power supply voltage (single)		1.08		5.5	V
V_{SS}	Negative power supply voltage (dual)		-2.75		0	V
$V_{DD} - V_{SS}$	Supply rail voltage difference		1.08		5.5	V
V_S or V_D	Signal path input/output voltage (source or drain pin) (Sx, D)		V_{SS}		V_{DD}	V
V_{SEL} or V_{EN}	Address or enable pin voltage		0		5.5	V
T_A	Ambient temperature		-40		125	°C
I_{DC}	Continuous current through switch	$T_J = 25^{\circ}\text{C}$		150		mA
		$T_J = 85^{\circ}\text{C}$		120		mA
		$T_J = 125^{\circ}\text{C}$		60		mA
		$T_J = 130^{\circ}\text{C}$		50		mA

6.3 Recommended Operating Conditions (続き)

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
I_{peak}	Peak current through switch(1 ms period maximum, 10% duty cycle maximum)	$T_j = 25^{\circ}\text{C}$		300		mA
		$T_j = 85^{\circ}\text{C}$		300		mA
		$T_j = 125^{\circ}\text{C}$		180		mA
		$T_j = 130^{\circ}\text{C}$		160		mA

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		DEVICE	DEVICE	UNIT
		PW (TSSOP)	RSV (QFN)	
		16 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	118.9	134.6	$^{\circ}\text{C}/\text{W}$
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	49.3	74.3	$^{\circ}\text{C}/\text{W}$
$R_{\theta JB}$	Junction-to-board thermal resistance	65.2	62.8	$^{\circ}\text{C}/\text{W}$
Ψ_{JT}	Junction-to-top characterization parameter	7.6	4.3	$^{\circ}\text{C}/\text{W}$
Ψ_{JB}	Junction-to-board characterization parameter	64.6	61.1	$^{\circ}\text{C}/\text{W}$
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	N/A	$^{\circ}\text{C}/\text{W}$

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics ($V_{DD} = 5V \pm 10\%$)

at $T_A = 25^{\circ}\text{C}$, $V_{DD} = 5V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R_{ON}	On-resistance	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$	25°C		2.5	4	Ω
			-40°C to $+85^{\circ}\text{C}$			4.5	Ω
			-40°C to $+125^{\circ}\text{C}$			4.9	Ω
ΔR_{ON}	On-resistance matching between channels	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$	25°C		0.13		Ω
			-40°C to $+85^{\circ}\text{C}$			0.4	Ω
			-40°C to $+125^{\circ}\text{C}$			0.5	Ω
$R_{ON\ FLAT}$	On-resistance flatness	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$	25°C		0.85		Ω
			-40°C to $+85^{\circ}\text{C}$			1.6	Ω
			-40°C to $+125^{\circ}\text{C}$			1.6	Ω
$I_{S(OFF)}$	Source off leakage current ⁽¹⁾	$V_{DD} = 5V$ Switch Off $V_D = 4.5V / 1.5V$ $V_S = 1.5V / 4.5V$	25°C	-0.08	± 0.005	0.08	nA
			-40°C to $+85^{\circ}\text{C}$	-0.3		0.3	nA
			-40°C to $+125^{\circ}\text{C}$	-0.9		0.9	nA
$I_{D(OFF)}$	Drain off leakage current ⁽¹⁾	$V_{DD} = 5V$ Switch Off $V_D = 4.5V / 1.5V$ $V_S = 1.5V / 4.5V$	25°C	-0.1	± 0.01	0.1	nA
			-40°C to $+85^{\circ}\text{C}$	-1		1	nA
			-40°C to $+125^{\circ}\text{C}$	-5.5		5.5	nA
$I_{D(ON)}$ $I_{S(ON)}$	Channel on leakage current	$V_{DD} = 5V$ Switch On $V_D = V_S = 2.5V$	25°C	-0.025	± 0.003	0.025	nA
			-40°C to $+85^{\circ}\text{C}$	-0.5		0.5	nA
			-40°C to $+125^{\circ}\text{C}$	-0.95		0.95	nA
$I_{D(ON)}$ $I_{S(ON)}$	Channel on leakage current	$V_{DD} = 5V$ Switch On $V_D = V_S = 4.5V / 1.5V$	25°C	-0.1	± 0.01	0.1	nA
			-40°C to $+85^{\circ}\text{C}$	-0.75		0.75	nA
			-40°C to $+125^{\circ}\text{C}$	-4		4	nA

6.5 Electrical Characteristics ($V_{DD} = 5V \pm 10\%$) (続き)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
LOGIC INPUTS (EN, A0, A1, A2)							
V _{IH}	Input logic high		−40°C to +125°C	1.49		5.5	V
V _{IL}	Input logic low		−40°C to +125°C	0		0.87	V
I _{IH} I _{IL}	Input leakage current		25°C	±0.005			μA
I _{IH} I _{IL}	Input leakage current		−40°C to +125°C	±0.05			μA
C _{IN}	Logic input capacitance		25°C	1			pF
C _{IN}	Logic input capacitance		−40°C to +125°C			2	pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C	0.008			μA
			−40°C to +125°C			1	μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 3V R _L = 200Ω, C _L = 15pF	25°C	14			ns
			−40°C to +85°C			18	ns
			−40°C to +125°C			19	ns
t _{OPEN} (BBM)	Break before make time	V _S = 3V R _L = 200Ω, C _L = 15pF	25°C	8			ns
			−40°C to +85°C	1			ns
			−40°C to +125°C	1			ns
t _{ON(EN)}	Enable turn-on time	V _S = 3V R _L = 200Ω, C _L = 15pF	25°C	12			ns
			−40°C to +85°C			19	ns
			−40°C to +125°C			20	ns
t _{OFF(EN)}	Enable turn-off time	V _S = 3V R _L = 200Ω, C _L = 15pF	25°C	6			ns
			−40°C to +85°C			8	ns
			−40°C to +125°C			9	ns
Q _C	Charge Injection	V _S = 1V R _S = 0Ω, C _L = 1nF	25°C	−1			pC
O _{ISO}	Off Isolation	R _L = 50Ω, C _L = 5pF f = 1MHz	25°C	−65			dB
		R _L = 50Ω, C _L = 5pF f = 10MHz	25°C	−45			dB
X _{TALK}	Crosstalk	R _L = 50Ω, C _L = 5pF f = 1MHz	25°C	−65			dB
		R _L = 50Ω, C _L = 5pF f = 10MHz	25°C	−45			dB
BW	Bandwidth	R _L = 50Ω, C _L = 5pF	25°C	90			MHz
C _{SOFF}	Source off capacitance	f = 1MHz	25°C	7			pF
C _{DOFF}	Drain off capacitance	f = 1MHz	25°C	60			pF
C _{SON} C _{DON}	On capacitance	f = 1MHz	25°C	65			pF

(1) When V_S is 4.5V, V_D is 1.5V, and vice versa.

6.6 Electrical Characteristics ($V_{DD} = 3.3V \pm 10\%$)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 3.3V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT	
ANALOG SWITCH								
R _{ON}	On-resistance	V _S = 0V to V _{DD} I _{SD} = 10mA	25°C	4		8.75	Ω	
			-40°C to +85°C			9.5	Ω	
			-40°C to +125°C			9.75	Ω	
ΔR _{ON}	On-resistance matching between channels	V _S = 0V to V _{DD} I _{SD} = 10mA	25°C	0.13			Ω	
			-40°C to +85°C			0.4	Ω	
			-40°C to +125°C			0.5	Ω	
R _{ON} FLAT	On-resistance flatness	V _S = 0V to V _{DD} I _{SD} = 10mA	25°C	1.9			Ω	
			-40°C to +85°C			2	Ω	
			-40°C to +125°C			2.2	Ω	
I _{S(OFF)}	Source off leakage current	V _{DD} = 3.3V Switch Off V _D = 3V / 1V V _S = 1V / 3V	25°C	-0.05	±0.001	0.05	nA	
			-40°C to +85°C			-0.1	0.1	nA
			-40°C to +125°C			-0.5	0.5	nA
I _{D(OFF)}	Drain off leakage current	V _{DD} = 3.3V Switch Off V _D = 3V / 1V V _S = 1V / 3V	25°C	-0.1	±0.005	0.1	nA	
			-40°C to +85°C			-0.5	0.5	nA
			-40°C to +125°C			-1.5	1.5	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = 3.3V Switch On V _D = V _S = 3V / 1V	25°C	-0.1	±0.005	0.1	nA	
			-40°C to +85°C			-0.5	0.5	nA
			-40°C to +125°C			-1.5	1.5	nA
LOGIC INPUTS (EN, A0, A1, A2)								
V _{IH}	Input logic high		-40°C to +125°C	1.35		5.5	V	
V _{IL}	Input logic low		-40°C to +125°C	0		0.8	V	
I _{IH} I _{IL}	Input leakage current		25°C	±0.005			μA	
I _{IH} I _{IL}	Input leakage current		-40°C to +125°C			±0.05	μA	
C _{IN}	Logic input capacitance		25°C	1			pF	
C _{IN}	Logic input capacitance		-40°C to +125°C			2	pF	
POWER SUPPLY								
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C	0.006			μA	
			-40°C to +125°C			1	μA	
DYNAMIC CHARACTERISTICS								
t _{TRAN}	Transition time between channels	V _S = 2V R _L = 200Ω, C _L = 15pF	25°C	15			ns	
			-40°C to +85°C			23	ns	
			-40°C to +125°C			23	ns	
t _{OPEN} (BBM)	Break before make time	V _S = 2V R _L = 200Ω, C _L = 15pF	25°C	8			ns	
			-40°C to +85°C	1			ns	
			-40°C to +125°C	1			ns	
t _{ON(EN)}	Enable turn-on time	V _S = 2V R _L = 200Ω, C _L = 15pF	25°C	14			ns	
			-40°C to +85°C			25	ns	
			-40°C to +125°C			25	ns	
t _{OFF(EN)}	Enable turn-off time	V _S = 2V R _L = 200Ω, C _L = 15pF	25°C	7			ns	
			-40°C to +85°C			12	ns	
			-40°C to +125°C			12	ns	

6.6 Electrical Characteristics ($V_{DD} = 3.3V \pm 10\%$) (続き)

at $T_A = 25^\circ C$, $V_{DD} = 3.3V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
Q_C	Charge Injection	$V_S = 1V$ $R_S = 0\Omega$, $C_L = 1nF$	$25^\circ C$		–2		pC
O_{ISO}	Off Isolation	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1MHz$	$25^\circ C$		–65		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10MHz$	$25^\circ C$		–45		dB
X_{TALK}	Crosstalk	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1MHz$	$25^\circ C$		–65		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10MHz$	$25^\circ C$		–45		dB
BW	Bandwidth	$R_L = 50\Omega$, $C_L = 5pF$	$25^\circ C$		90		MHz
C_{SOFF}	Source off capacitance	$f = 1MHz$	$25^\circ C$		7		pF
C_{DOFF}	Drain off capacitance	$f = 1MHz$	$25^\circ C$		60		pF
C_{SON} C_{DON}	On capacitance	$f = 1MHz$	$25^\circ C$		65		pF

6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$)

at $T_A = 25^\circ C$, $V_{DD} = +2.5V$, $V_{SS} = -2.5V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R _{ON}	On-resistance	V _S = V _{SS} to V _{DD} I _{SD} = 10mA	25°C		2.5	4	Ω
			–40°C to +85°C			4.5	Ω
			–40°C to +125°C			4.9	Ω
ΔR _{ON}	On-resistance matching between channels	V _S = V _{SS} to V _{DD} I _{SD} = 10mA	25°C		0.13		Ω
			–40°C to +85°C			0.4	Ω
			–40°C to +125°C			0.5	Ω
R _{ON} FLAT	On-resistance flatness	V _S = V _{SS} to V _{DD} I _{SD} = 10mA	25°C		0.85		Ω
			–40°C to +85°C			1.6	Ω
			–40°C to +125°C			1.6	Ω
I _{S(OFF)}	Source off leakage current	V _{DD} = +2.5V, V _{SS} = –2.5V Switch Off V _D = +2V / –1V V _S = –1V / +2V	25°C	–0.08	±0.005	0.08	nA
			–40°C to +85°C			0.3	nA
			–40°C to +125°C			0.9	nA
I _{D(OFF)}	Drain off leakage current	V _{DD} = +2.5V, V _{SS} = –2.5V Switch Off V _D = +2V / –1V V _S = –1V / +2V	25°C	–0.1	±0.01	0.1	nA
			–40°C to +85°C			1	nA
			–40°C to +125°C			5.5	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = +2.5V, V _{SS} = –2.5V Switch On V _D = V _S = +2V / –1V	25°C	–0.1	±0.01	0.1	nA
			–40°C to +85°C			0.75	nA
			–40°C to +125°C			4	nA
LOGIC INPUTS (EN, A0, A1, A2)							
V _{IH}	Input logic high		–40°C to +125°C	1.2		2.75	V
V _{IL}	Input logic low		–40°C to +125°C	0		0.73	V
I _{IH} I _{IL}	Input leakage current		25°C		±0.005		μA
I _{IH} I _{IL}	Input leakage current		–40°C to +125°C			±0.05	μA
C _{IN}	Logic input capacitance		25°C		1		pF

6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$) (続き)

at $T_A = 25^\circ\text{C}$, $V_{DD} = +2.5V$, $V_{SS} = -2.5V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
C _{IN}	Logic input capacitance		−40°C to +125°C			2	pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 2.75V	25°C		0.008		μA
			−40°C to +125°C			1	μA
I _{SS}	V _{SS} supply current	Logic inputs = 0V or 2.75V	25°C		0.008		μA
			−40°C to +125°C			1	μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 1.5V R _L = 200Ω, C _L = 15pF	25°C		14		ns
			−40°C to +85°C			21	ns
			−40°C to +125°C			21	ns
t _{OPEN} (BBM)	Break before make time	V _S = 1.5V R _L = 200Ω, C _L = 15pF	25°C		8		ns
			−40°C to +85°C		1		ns
			−40°C to +125°C		1		ns
t _{ON(EN)}	Enable turn-on time	V _S = 1.5V R _L = 200Ω, C _L = 15pF	25°C		13		ns
			−40°C to +85°C			21	ns
			−40°C to +125°C			21	ns
t _{OFF(EN)}	Enable turn-off time	V _S = 1.5V R _L = 200Ω, C _L = 15pF	25°C		8		ns
			−40°C to +85°C			11	ns
			−40°C to +125°C			12	ns
Q _C	Charge Injection	V _S = −1V R _S = 0Ω, C _L = 1nF	25°C		−2.5		pC
O _{ISO}	Off Isolation	R _L = 50Ω, C _L = 5pF f = 1MHz	25°C		−65		dB
		R _L = 50Ω, C _L = 5pF f = 10MHz	25°C		−45		dB
X _{TALK}	Crosstalk	R _L = 50Ω, C _L = 5pF f = 1MHz	25°C		−65		dB
		R _L = 50Ω, C _L = 5pF f = 10MHz	25°C		−45		dB
BW	Bandwidth	R _L = 50Ω, C _L = 5pF	25°C		85		MHz
C _{SOFF}	Source off capacitance	f = 1MHz	25°C		7		pF
C _{DOFF}	Drain off capacitance	f = 1MHz	25°C		60		pF
C _{SON} C _{DON}	On capacitance	f = 1MHz	25°C		65		pF

6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 1.8V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R_{ON}	On-resistance	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$	25°C		40		Ω
			-40°C to $+85^\circ\text{C}$			80	Ω
			-40°C to $+125^\circ\text{C}$			80	Ω
ΔR_{ON}	On-resistance matching between channels	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$	25°C		0.3		Ω
			-40°C to $+85^\circ\text{C}$			1.5	Ω
			-40°C to $+125^\circ\text{C}$			1.5	Ω

6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$) (続き)

at $T_A = 25^\circ C$, $V_{DD} = 1.8V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
I _{S(OFF)}	Source off leakage current	V _{DD} = 1.98V Switch Off V _D = 1.62V / 1V V _S = 1V / 1.62V	25°C	-0.05	±0.003	0.05	nA
			-40°C to +85°C	-0.1		0.1	nA
			-40°C to +125°C	-0.5		0.5	nA
I _{D(OFF)}	Drain off leakage current	V _{DD} = 1.98V Switch Off V _D = 1.62V / 1V V _S = 1V / 1.62V	25°C	-0.1	±0.005	0.1	nA
			-40°C to +85°C	-0.3		0.3	nA
			-40°C to +125°C	-1.5		1.5	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = 1.98V Switch On V _D = V _S = 1.62V / 1V	25°C	-0.1	±0.003	0.1	nA
			-40°C to +85°C	-0.5		0.5	nA
			-40°C to +125°C	-2		2	nA
LOGIC INPUTS (EN, A0, A1, A2)							
V _{IH}	Input logic high		-40°C to +125°C	1.07		5.5	V
V _{IL}	Input logic low		-40°C to +125°C	0		0.68	V
I _{IH} I _{IL}	Input leakage current		25°C		±0.005		µA
I _{IH} I _{IL}	Input leakage current		-40°C to +125°C			±0.05	µA
C _{IN}	Logic input capacitance		25°C		1		pF
C _{IN}	Logic input capacitance		-40°C to +125°C			2	pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C		0.001		µA
			-40°C to +125°C			0.85	µA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C		28		ns
			-40°C to +85°C			48	ns
			-40°C to +125°C			48	ns
t _{OPEN} (BBM)	Break before make time	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C		16		ns
			-40°C to +85°C	1			ns
			-40°C to +125°C	1			ns
t _{ON(EN)}	Enable turn-on time	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C		28		ns
			-40°C to +85°C			48	ns
			-40°C to +125°C			48	ns
t _{OFF(EN)}	Enable turn-off time	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C		16		ns
			-40°C to +85°C			27	ns
			-40°C to +125°C			27	ns
Q _C	Charge Injection	V _S = 1V R _S = 0Ω, C _L = 1nF	25°C		-0.5		pC
O _{ISO}	Off Isolation	R _L = 50Ω, C _L = 5pF f = 1MHz	25°C		-65		dB
		R _L = 50Ω, C _L = 5pF f = 10MHz	25°C		-45		dB
X _{TALK}	Crosstalk	R _L = 50Ω, C _L = 5pF f = 1MHz	25°C		-65		dB
		R _L = 50Ω, C _L = 5pF f = 10MHz	25°C		-45		dB
BW	Bandwidth	R _L = 50Ω, C _L = 5pF	25°C		80		MHz
C _{SOFF}	Source off capacitance	f = 1MHz	25°C		7		pF

6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$) (続き)

at $T_A = 25^\circ C$, $V_{DD} = 1.8V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
C_{DOFF}	Drain off capacitance	$f = 1MHz$	$25^\circ C$		65		pF
C_{SON} C_{DON}	On capacitance	$f = 1MHz$	$25^\circ C$		70		pF

6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R _{ON}	On-resistance	V _S = 0V to V _{DD} I _{SD} = 10mA	25°C	70			Ω
			-40°C to +85°C	105			Ω
			-40°C to +125°C	105			Ω
ΔR _{ON}	On-resistance matching between channels	V _S = 0V to V _{DD} I _{SD} = 10mA	25°C	0.15			Ω
			-40°C to +85°C	1.5			Ω
			-40°C to +125°C	1.5			Ω
I _{S(OFF)}	Source off leakage current ⁽¹⁾	V _{DD} = 1.32V Switch Off V _D = 1V / 0.8V V _S = 0.8V / 1V	25°C	-0.05	±0.003	0.05	nA
			-40°C to +85°C	-0.1		0.1	nA
			-40°C to +125°C	-0.5		0.5	nA
I _{D(OFF)}	Drain off leakage current ⁽¹⁾	V _{DD} = 1.32V Switch Off V _D = 1V / 0.8V V _S = 0.8V / 1V	25°C	-0.1	±0.003	0.1	nA
			-40°C to +85°C	-0.3		0.3	nA
			-40°C to +125°C	-1.5		1.5	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = 1.32V Switch On V _D = V _S = 1V / 0.8V	25°C	-0.1	±0.003	0.1	nA
			-40°C to +85°C	-0.3		0.3	nA
			-40°C to +125°C	-1.5		1.5	nA
LOGIC INPUTS (EN, A0, A1, A2)							
V _{IH}	Input logic high		-40°C to +125°C	0.96		5.5	V
V _{IL}	Input logic low		-40°C to +125°C	0		0.36	V
I _{IH} I _{IL}	Input leakage current		25°C	±0.005			μA
I _{IH} I _{IL}	Input leakage current		-40°C to +125°C	±0.05			μA
C _{IN}	Logic input capacitance		25°C	1			pF
C _{IN}	Logic input capacitance		-40°C to +125°C	2			pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C	0.001			μA
			-40°C to +125°C	0.7			μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C	60			ns
			-40°C to +85°C	210			ns
			-40°C to +125°C	210			ns
t _{OPEN} (BBM)	Break before make time	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C	28			ns
			-40°C to +85°C	1			ns
			-40°C to +125°C	1			ns
t _{ON(EN)}	Enable turn-on time	V _S = 1V R _L = 200Ω, C _L = 15pF	25°C	60			ns
			-40°C to +85°C	190			ns
			-40°C to +125°C	190			ns

6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$) (続き)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
$t_{OFF(EN)}$	Enable turn-off time	$V_S = 1V$ $R_L = 200\Omega$, $C_L = 15pF$	25°C		45		ns
			–40°C to +85°C			150	ns
			–40°C to +125°C			150	ns
Q_C	Charge Injection	$V_S = 1V$ $R_S = 0\Omega$, $C_L = 1nF$	25°C		–0.5		pC
O_{ISO}	Off Isolation	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1MHz$	25°C		–65		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10MHz$	25°C		–45		dB
X_{TALK}	Crosstalk	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1MHz$	25°C		–65		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10MHz$	25°C		–45		dB
BW	Bandwidth	$R_L = 50\Omega$, $C_L = 5pF$	25°C		80		MHz
C_{SOFF}	Source off capacitance	$f = 1MHz$	25°C		7		pF
C_{DOFF}	Drain off capacitance	$f = 1MHz$	25°C		65		pF
C_{SON} C_{DON}	On capacitance	$f = 1MHz$	25°C		70		pF

(1) When V_S is 1V, V_D is 0.8V, and vice versa.

6.10 Typical Characteristics

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5\text{V}$ (unless otherwise noted)

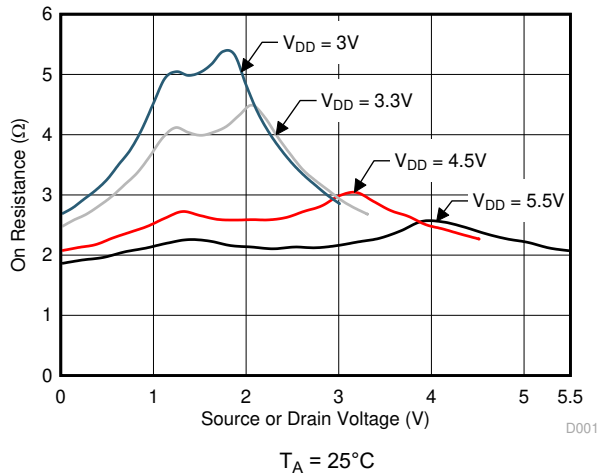


図 6-1. On-Resistance vs Source or Drain Voltage

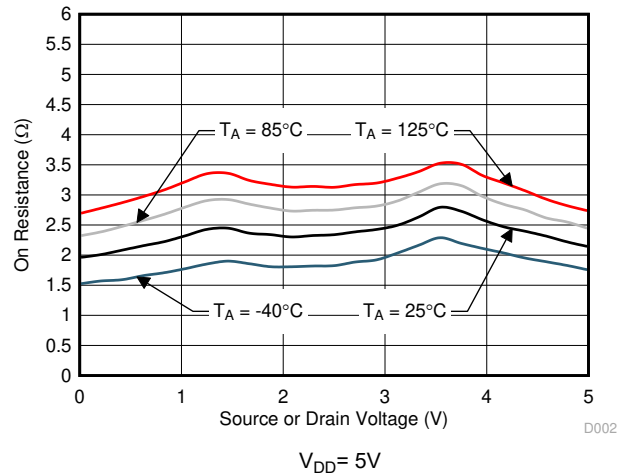


図 6-2. On-Resistance vs Temperature

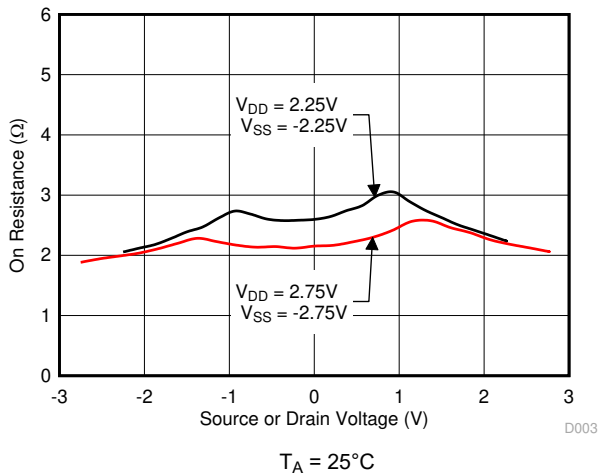


図 6-3. On-Resistance vs Source or Drain Voltage

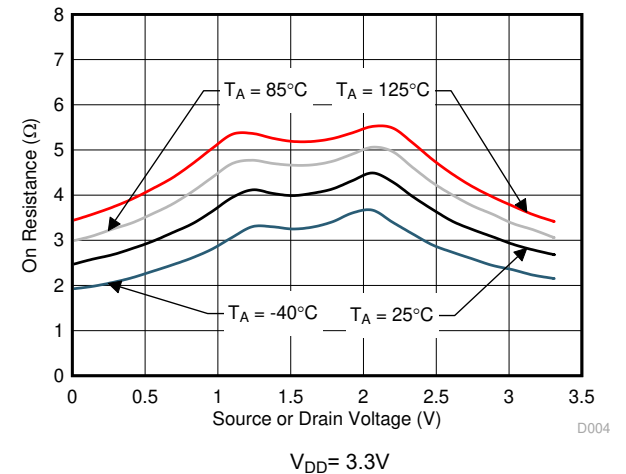


図 6-4. On-Resistance vs Temperature

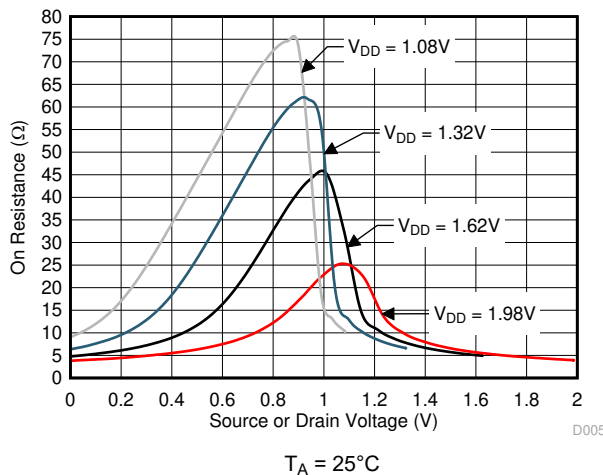


図 6-5. On-Resistance vs Source or Drain Voltage

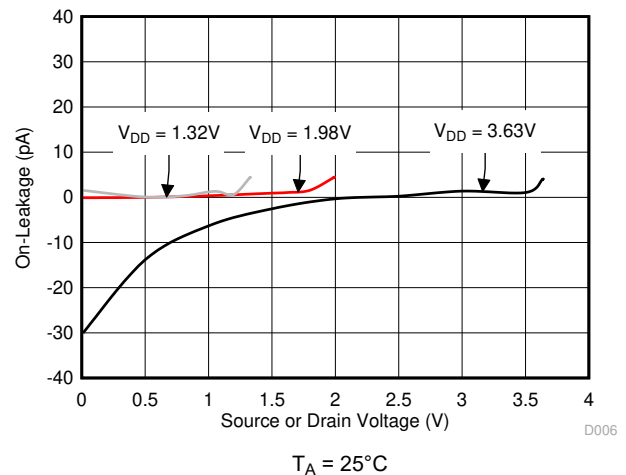


図 6-6. On-Leakage vs Source or Drain Voltage

6.10 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5\text{V}$ (unless otherwise noted)

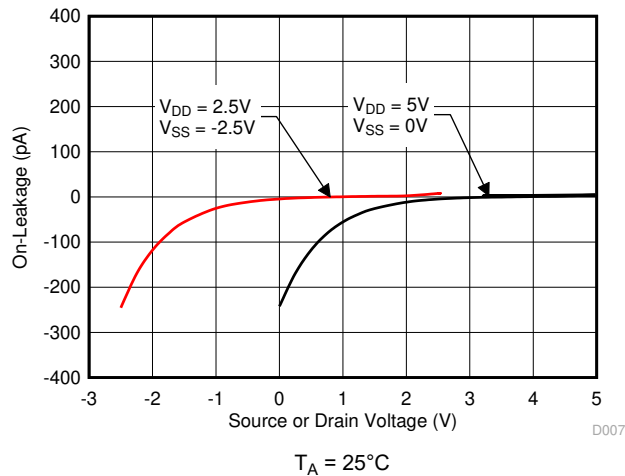


Figure 6-7. On-Leakage vs Source or Drain Voltage

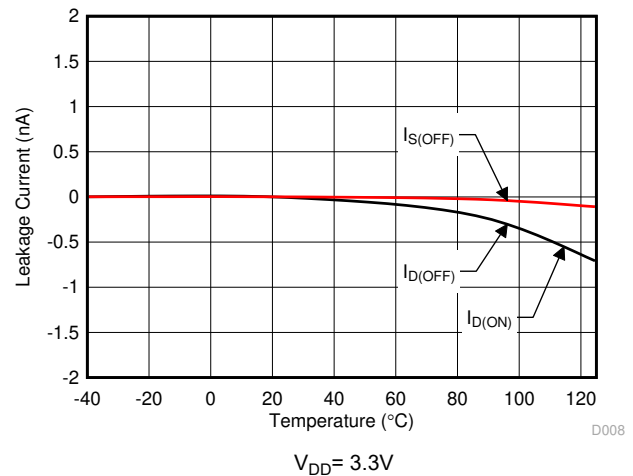


Figure 6-8. Leakage Current vs Temperature

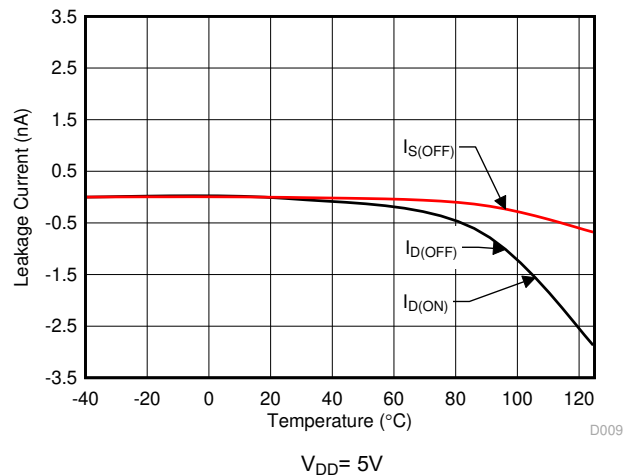


Figure 6-9. Leakage Current vs Temperature

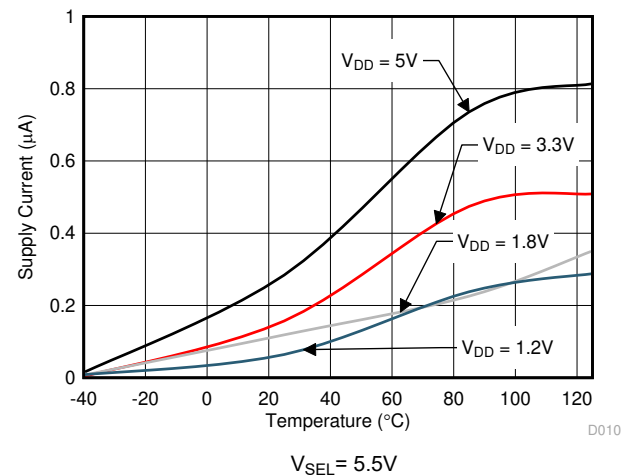


Figure 6-10. Supply Current vs Temperature

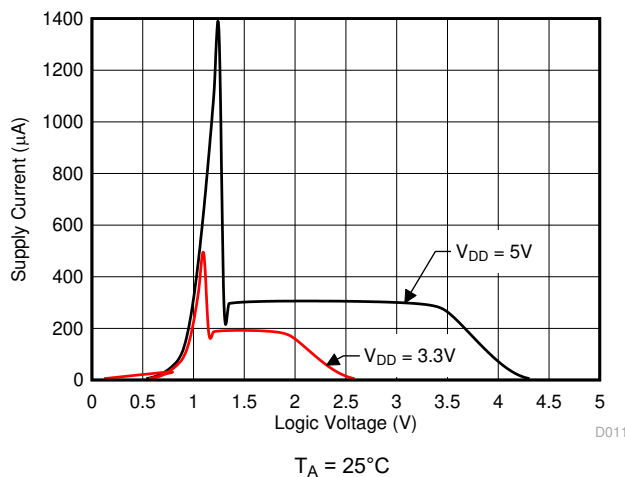


Figure 6-11. Supply Current vs Logic Voltage

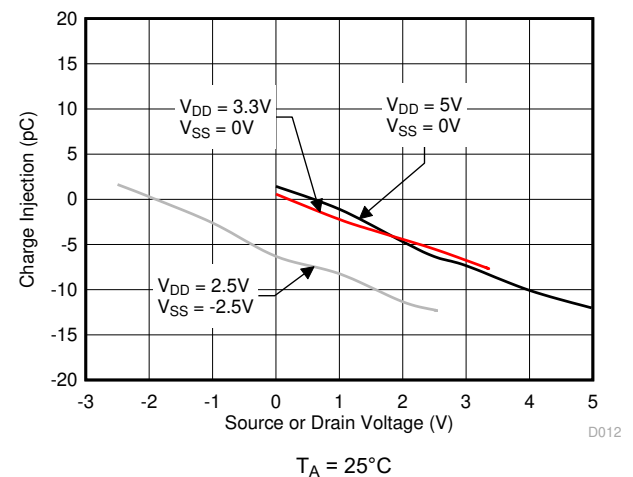


Figure 6-12. Charge Injection vs Source or Drain Voltage

6.10 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5\text{V}$ (unless otherwise noted)

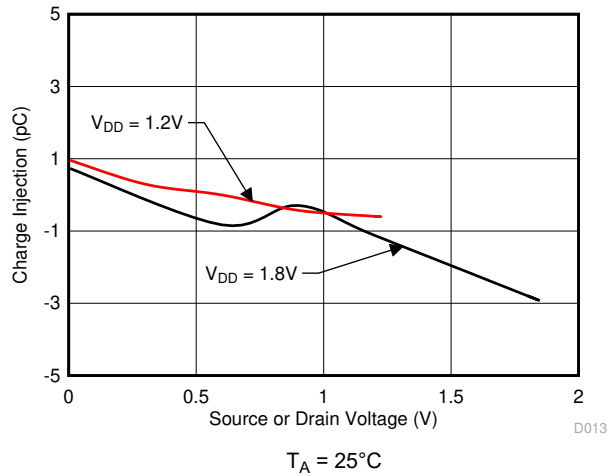


図 6-13. Charge Injection vs Source or Drain Voltage

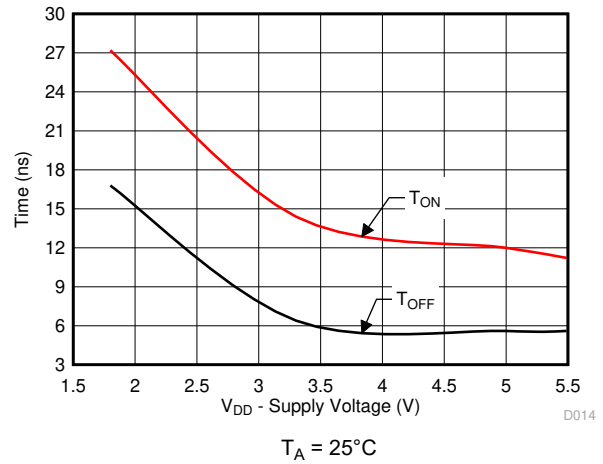


図 6-14. T_{ON} (EN) and T_{OFF} (EN) vs Supply Voltage

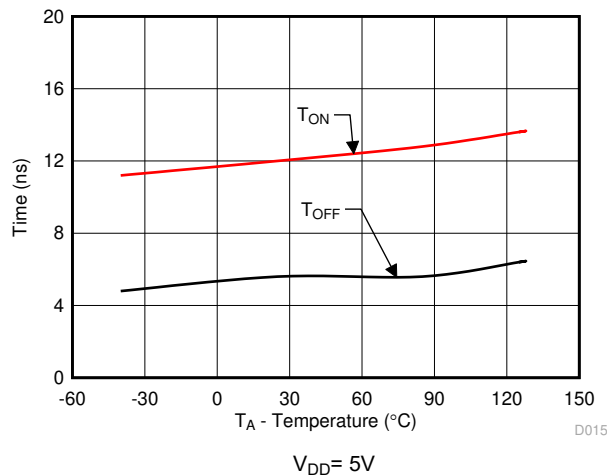


図 6-15. T_{ON} (EN) and T_{OFF} (EN) vs Temperature

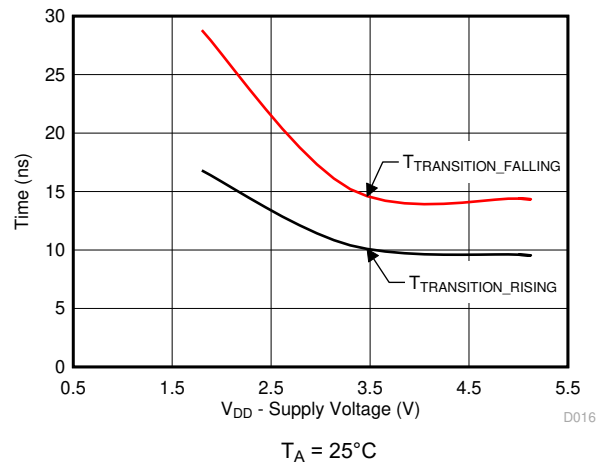


図 6-16. $T_{TRANSITION}$ vs Supply Voltage

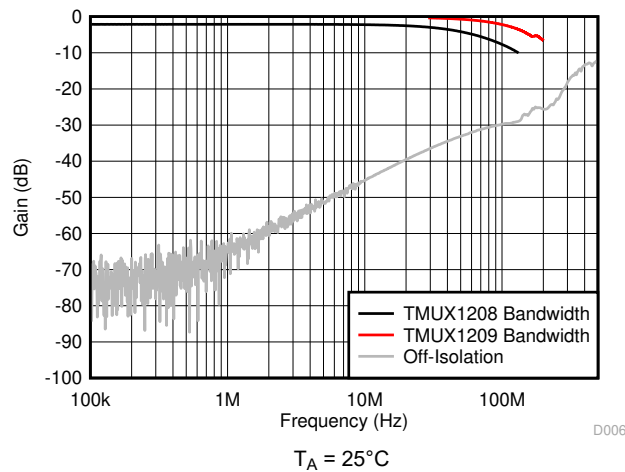


図 6-17. Frequency Response

7 Detailed Description

7.1 Overview

7.1.1 On-Resistance

The on-resistance of a device is the ohmic resistance between the source (Sx) and drain (D) pins of the device. The on-resistance varies with input voltage and supply voltage. The symbol R_{ON} is used to denote on-resistance. The measurement setup used to measure R_{ON} is shown in [Figure 7-1](#). Voltage (V) and current (I_{SD}) are measured using this setup, and R_{ON} is computed with $R_{ON} = V / I_{SD}$:

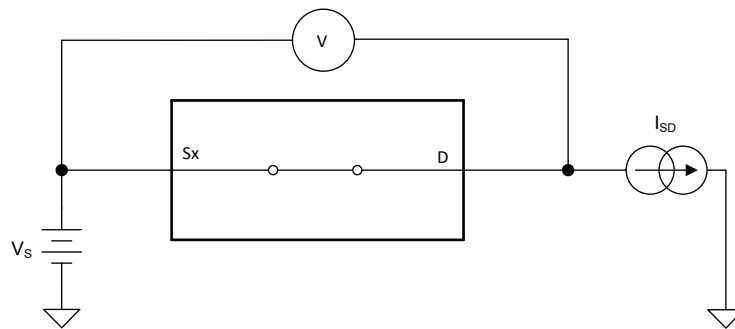


Figure 7-1. On-Resistance Measurement Setup

7.1.2 Off-Leakage Current

There are two types of leakage currents associated with a switch during the off state:

1. Source off-leakage current
2. Drain off-leakage current

Source leakage current is defined as the leakage current flowing into or out of the source pin when the switch is off. This current is denoted by the symbol $I_{S(OFF)}$.

Drain leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is off. This current is denoted by the symbol $I_{D(OFF)}$.

The setup used to measure both off-leakage currents is shown in [Figure 7-2](#).

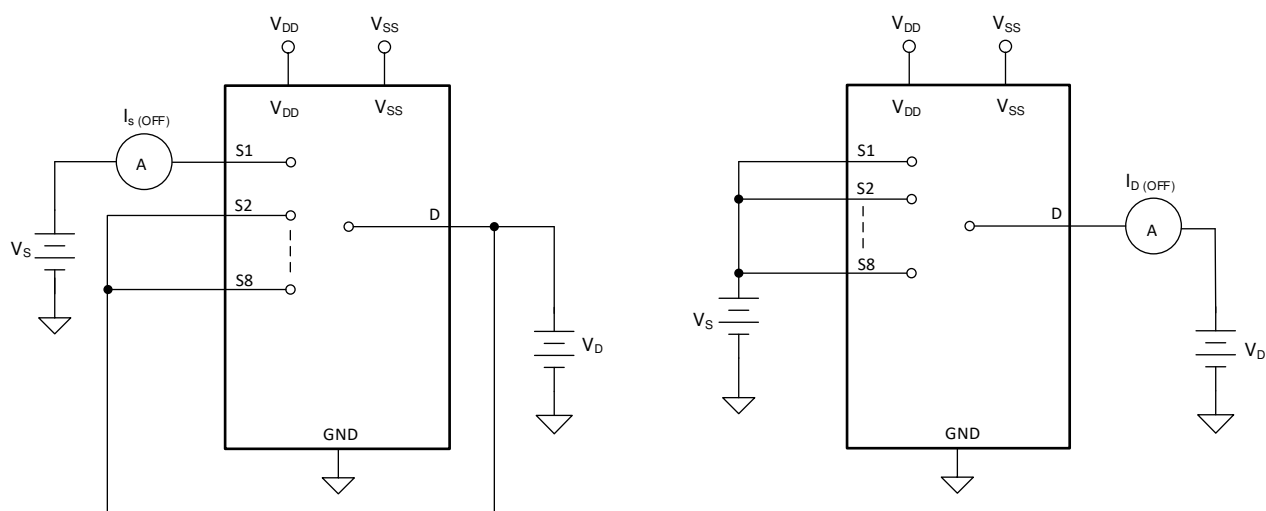


Figure 7-2. Off-Leakage Measurement Setup

7.1.3 On-Leakage Current

Source on-leakage current is defined as the leakage current flowing into or out of the source pin when the switch is on. This current is denoted by the symbol $I_{S(ON)}$.

Drain on-leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is on. This current is denoted by the symbol $I_{D(ON)}$.

Either the source pin or drain pin is left floating during the measurement. Figure 7-3 shows the circuit used for measuring the on-leakage current, denoted by $I_{S(ON)}$ or $I_{D(ON)}$.

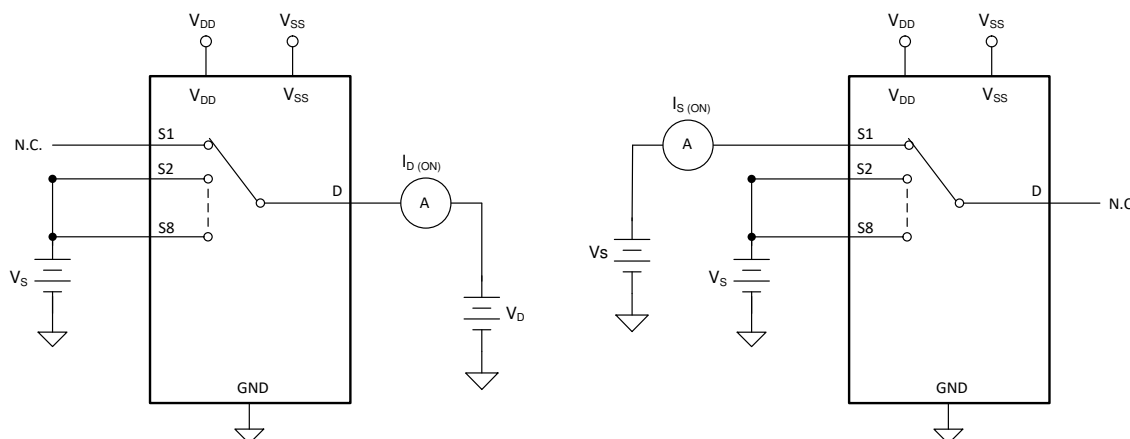


Figure 7-3. On-Leakage Measurement Setup

7.1.4 Transition Time

Transition time is defined as the time taken by the output of the device to rise or fall 10% after the address signal has risen or fallen past the logic threshold. The 10% transition measurement is utilized to provide the timing of the device, system level timing can then account for the time constant added from the load resistance and load capacitance. Figure 7-4 shows the setup used to measure transition time, denoted by the symbol $t_{\text{TRANSITION}}$.

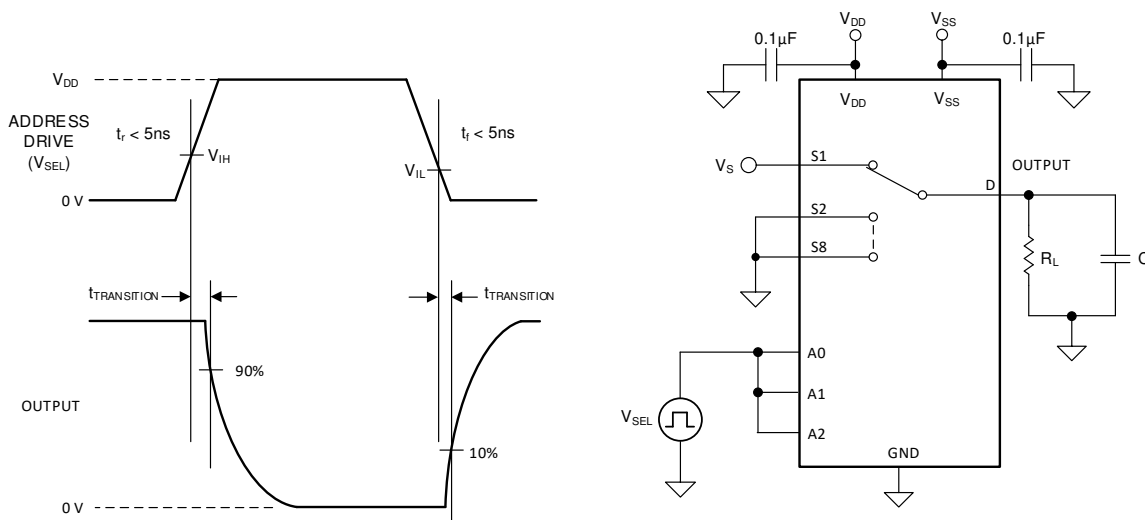


Figure 7-4. Transition-Time Measurement Setup

7.1.5 Break-Before-Make Delay

Break-before-make delay is a safety feature that prevents two inputs from connecting when the device is switching. The output first breaks from the on-state switch before making the connection with the next on-state switch. The time delay between the *break* and the *make* is known as break-before-make delay. 図 7-5 shows the setup used to measure break-before-make delay, denoted by the symbol $t_{\text{OPEN(BBM)}}$.

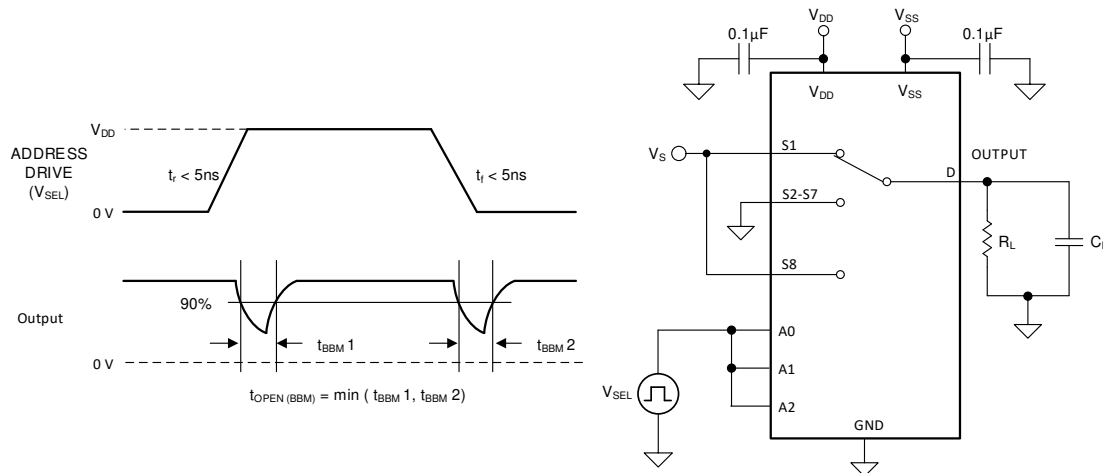


図 7-5. Break-Before-Make Delay Measurement Setup

7.1.6 Turn-On and Turn-Off Time

Turn-on time is defined as the time taken by the output of the device to rise to 10% after the enable has risen past the logic threshold. The 10% measurement is utilized to provide the timing of the device, system level timing can then account for the time constant added from the load resistance and load capacitance. 図 7-6 shows the setup used to measure turn-on time, denoted by the symbol $t_{\text{ON(EN)}}$.

Turn-off time is defined as the time taken by the output of the device to fall to 90% after the enable has fallen past the logic threshold. The 90% measurement is utilized to provide the timing of the device, system level timing can then account for the time constant added from the load resistance and load capacitance. 図 7-6 shows the setup used to measure turn-off time, denoted by the symbol $t_{\text{OFF(EN)}}$.


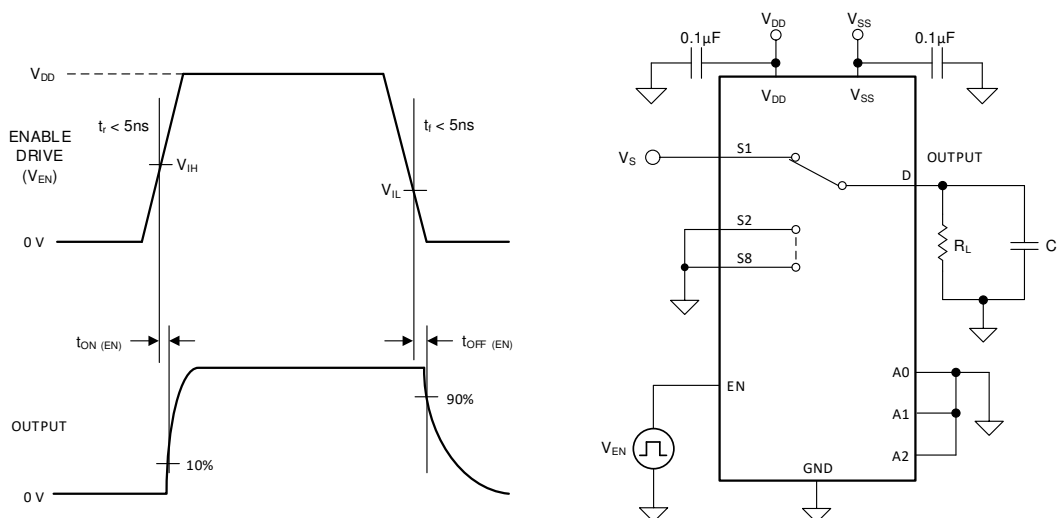


図 7-6. Turn-On and Turn-Off Time Measurement Setup

7.1.7 Charge Injection


The TMUX1108 has a transmission-gate topology. Any mismatch in capacitance between the NMOS and PMOS transistors results in a charge injected into the drain or source during the falling or rising edge of the gate signal. The amount of charge injected into the source or drain of the device is known as charge injection, and is denoted by the symbol Q_C . 7-7 shows the setup used to measure charge injection from source (S_x) to drain (D).

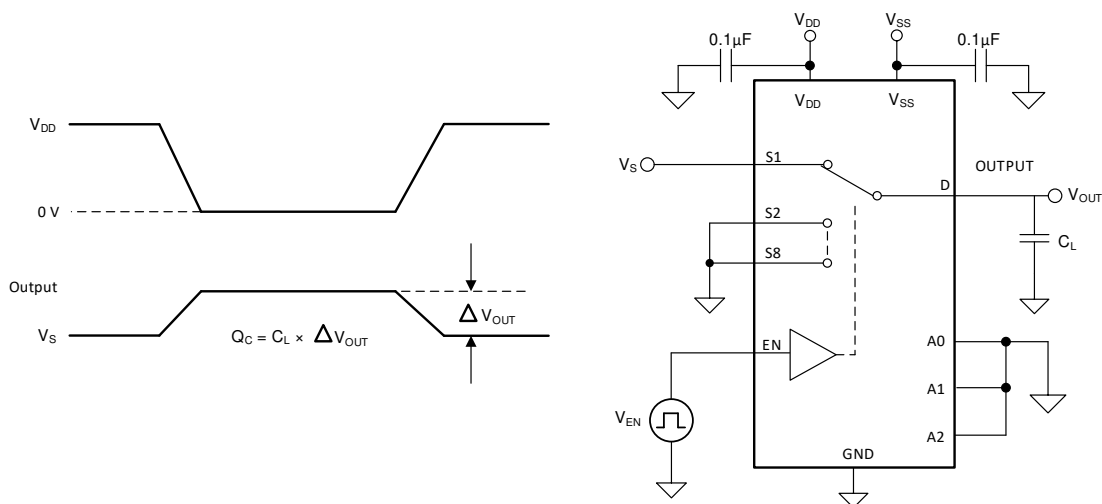

7-7. Charge-Injection Measurement Setup

7.1.8 Off Isolation

Off isolation is defined as the ratio of the signal at the drain pin (D) of the device when a signal is applied to the source pin (S_x) of an off-channel. 7-8 shows the setup used to measure off isolation. Use the off isolation equation to compute off isolation.

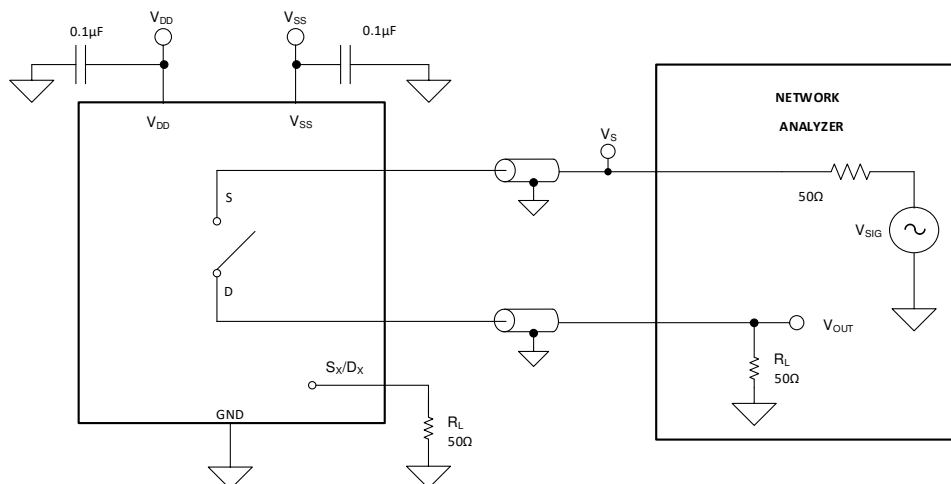

7-8. Off Isolation Measurement Setup

$$\text{Off Isolation} = 20 \cdot \text{Log} \left(\frac{V_{\text{OUT}}}{V_S} \right) \quad (1)$$

7.1.9 Crosstalk

Crosstalk is defined as the ratio of the signal at the drain pin (D) of a different channel, when a signal is applied at the source pin (S_x) of an on-channel. [Figure 7-9](#) shows the setup used to measure, and the equation used to compute crosstalk.

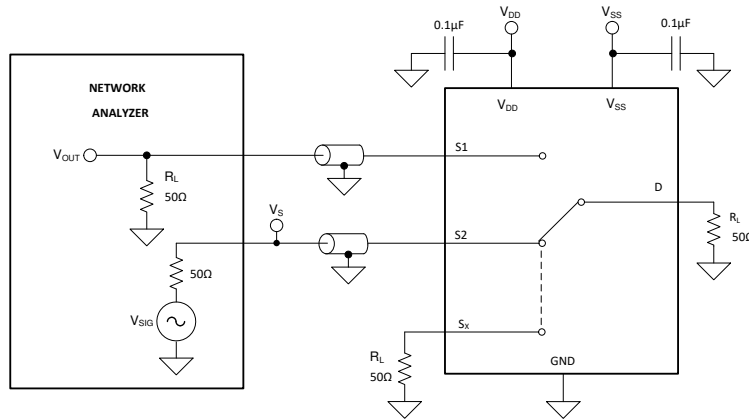


Figure 7-9. Crosstalk Measurement Setup

$$\text{Channel-to-Channel Crosstalk} = 20 \cdot \text{Log} \left(\frac{V_{\text{OUT}}}{V_S} \right) \quad (2)$$

7.1.10 Bandwidth

Bandwidth is defined as the range of frequencies that are attenuated by less than 3 dB when the input is applied to the source pin (S_x) of an on-channel, and the output is measured at the drain pin (D) of the device. [Figure 7-10](#) shows the setup used to measure bandwidth.

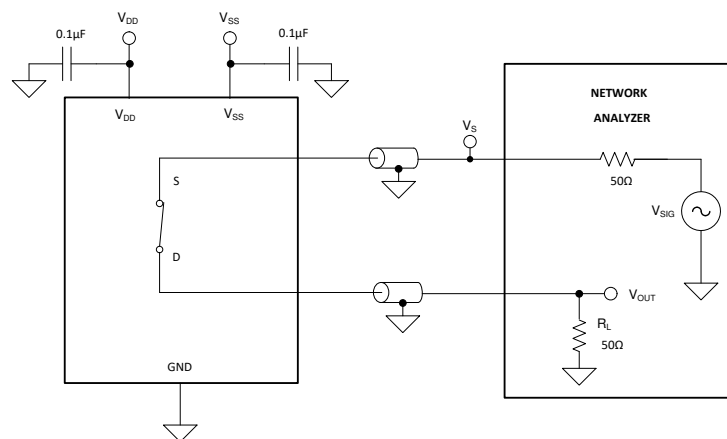


Figure 7-10. Bandwidth Measurement Setup

7.2 Functional Block Diagram

The TMUX1108 is an 8:1, single-ended (1-ch.), analog mux. Each channel is turned on or turned off based on the state of the address lines and enable pin.

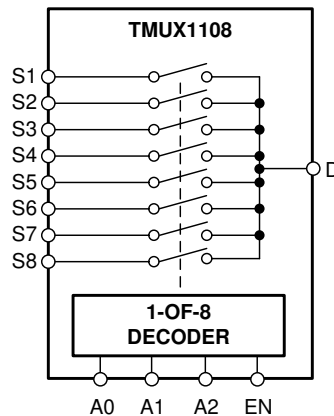


図 7-11. TMUX1108 Functional Block Diagram

7.3 Feature Description

7.3.1 Bidirectional Operation

The TMUX1108 conducts equally well from source (Sx) to drain (D) or from drain (D) to source (Sx). Each channel has very similar characteristics in both directions and supports both analog and digital signals.

7.3.2 Rail to Rail Operation

The valid signal path input/output voltage for TMUX1108 ranges from V_{SS} to V_{DD} .

7.3.3 1.8V Logic Compatible Inputs

The TMUX1108 has 1.8V logic compatible control for all logic control inputs. The logic input thresholds scale with supply but still provide 1.8V logic control when operating at 5.5V supply voltage. 1.8V logic level inputs allows the TMUX1108 to interface with processors that have lower logic I/O rails and eliminates the need for an external translator, which saves both space and BOM cost. For more information on 1.8V logic implementations refer to [Simplifying Design with 1.8V logic Muxes and Switches](#).

7.3.4 Fail-Safe Logic

The TMUX1108 support Fail-Safe Logic on the control input pins (EN, A0, A1, A2) allowing for operation up to 5.5V, regardless of the state of the supply pin. This feature allows voltages on the control pins to be applied before the supply pin, protecting the device from potential damage. Fail-Safe Logic minimizes system complexity by removing the need for power supply sequencing on the logic control pins. For example, the Fail-Safe Logic feature allows the select pins of the TMUX1108 to be ramped to 5.5V while $V_{DD} = 0V$. Additionally, the feature enables operation of the TMUX1108 with $V_{DD} = 1.2V$ while allowing the select pins to interface with a logic level of another device up to 5.5V.

7.3.5 Ultra-low Leakage Current

The TMUX1108 provides extremely low on-leakage and off-leakage currents. The TMUX1108 is capable of switching signals from high source-impedance inputs into a high input-impedance op amp with minimal offset error because of the ultra-low leakage currents. [Figure 7-12](#) shows typical leakage currents of the TMUX1108 versus temperature.

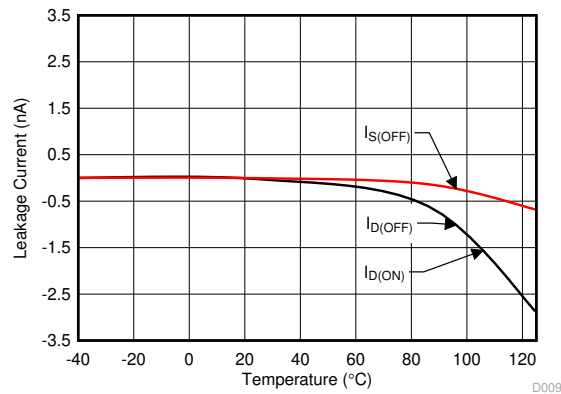


Figure 7-12. Leakage Current vs Temperature

7.3.6 Ultra-low Charge Injection

The TMUX1108 has a transmission gate topology, as shown in [Figure 7-13](#). Any mismatch in the stray capacitance associated with the NMOS and PMOS causes an output level change whenever the switch is opened or closed.

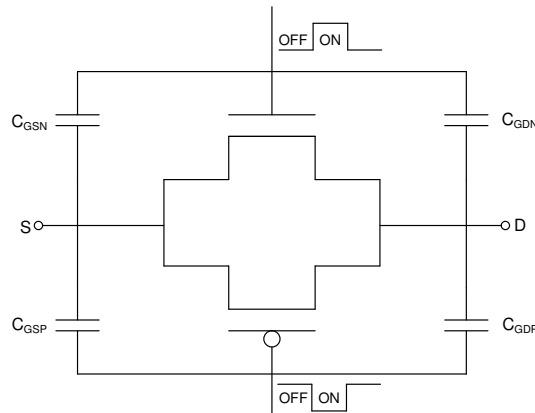


Figure 7-13. Transmission Gate Topology

The TMUX1108 has special charge-injection cancellation circuitry that reduces the source-to-drain charge injection to as low as 1pC at $V_S = 1V$ as shown in [Figure 7-14](#).

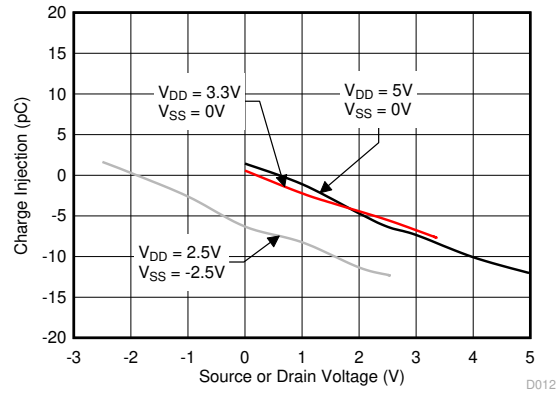


図 7-14. Charge Injection vs Source or Drain Voltage

7.4 Device Functional Modes

When the EN pin of the TMUX1108 is pulled high, one of the switches is closed based on the state of the address lines. When the EN pin is pulled low, all the switches are in an open state regardless of the state of the address lines.

7.4.1 Truth Tables

表 7-1 shows the truth table for the TMUX1108.

表 7-1. TMUX1108 Truth Table

EN	A2	A1	A0	Selected Channel Connected To Drain (D) Pin
0	X ⁽¹⁾	X ⁽¹⁾	X ⁽¹⁾	All channels are off
1	0	0	0	S1
1	0	0	1	S2
1	0	1	0	S3
1	0	1	1	S4
1	1	0	0	S5
1	1	0	1	S6
1	1	1	0	S7
1	1	1	1	S8

(1) X denotes *do not care*.

8 Application and Implementation

注

以下のアプリケーション情報は、テキサス・インスツルメンツの製品仕様に含まれるものではなく、テキサス・インスツルメンツはその正確性も完全性も保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。また、お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

8.1 Application Information

The TMUX11xx family offers ultra-low input/output leakage currents and low charge injection. These devices operate up to 5.5V, and offer true rail-to-rail input and output. The TMUX1108 has a low on-capacitance which allows faster settling time when multiplexing inputs in the time domain. These features make the TMUX11xx a family of precision, robust, high-performance analog multiplexer for low-voltage applications.

8.2 Typical Application

図 8-1 shows a 16-bit, 8 input, multiplexed, data-acquisition system. This example is typical in industrial applications that require low distortion for precision measurements. The circuit uses the [ADS8864](#), a 16-bit, 400-kSPS successive-approximation-resistor (SAR) analog-to-digital converter (ADC), along with a precision amplifier, and an 8 input mux.

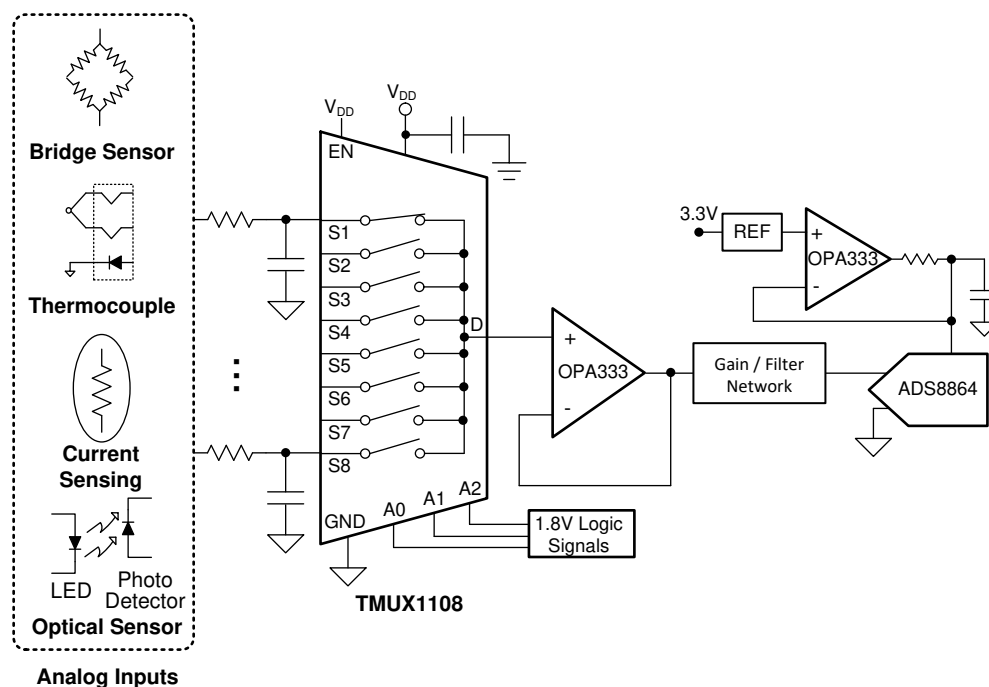


図 8-1. Multiplexing Signals to External ADC

8.2.1 Design Requirements

For this design example, use the parameters listed in 表 8-1.

表 8-1. Design Parameters

PARAMETERS	VALUES
Supply (V_{DD})	3.3V
I/O signal range	0V to V_{DD} (Rail to Rail)

表 8-1. Design Parameters (続き)

PARAMETERS	VALUES
Control logic thresholds	1.8V compatible

8.2.2 Detailed Design Procedure

The TMUX1108 can operate without any external components except for the supply decoupling capacitors. If the device desired power-up state is disabled, the enable pin should have a weak pull-down resistor and be controlled by the MCU via GPIO. All inputs being muxed to the ADC must fall within the recommend operating conditions of the TMUX1108 including signal range and continuous current. For this design with a supply of 3.3V the signal range can be 0V to 3.3V and the maximum continuous current can be 30mA.

The design example highlights a multiplexed, data-acquisition system for highest system linearity and fast settling. The overall system block diagram is shown in 図 8-1. The circuit is a multichannel, data-acquisition signal chain consisting of an input low-pass filter, mux, mux output buffer, SAR ADC driver, and the reference buffer. The architecture allows fast sampling of multiple channels using a single ADC, providing a low-cost solution.

8.2.3 Application Curve

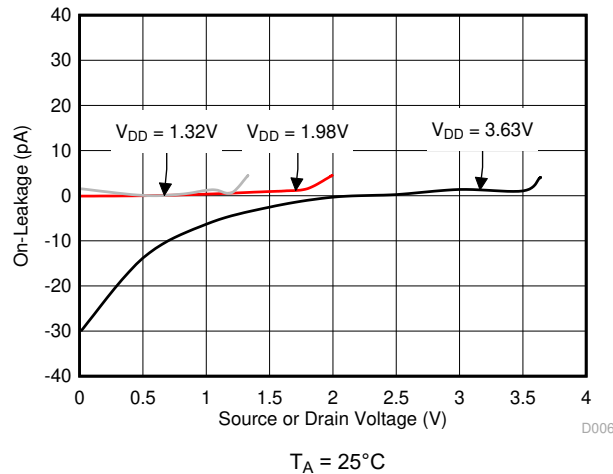


図 8-2. On-Leakage vs Source or Drain Voltage

8.3 Power Supply Recommendations

The TMUX1108 operates across a wide supply range of 1.08V to 5.5V. Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the devices.

Power-supply bypassing improves noise margin and prevents switching noise propagation from the V_{DD} supply to other components. Good power-supply decoupling is important to achieve optimum performance. For improved supply noise immunity, use a supply decoupling capacitor ranging from 0.1 μ F to 10 μ F from V_{DD} to ground. Place the bypass capacitors as close to the power supply pins of the device as possible using low-impedance connections. TI recommends using multi-layer ceramic chip capacitors (MLCCs) that offer low equivalent series resistance (ESR) and inductance (ESL) characteristics for power-supply decoupling purposes. For very sensitive systems or systems in harsh noise environments, connecting the capacitors to the device pins without vias may offer superior noise immunity. The use of multiple vias in parallel lowers the overall inductance and is beneficial for connections to ground planes.

8.4 Layout

8.4.1 Layout Guidelines

When a PCB trace turns a corner at a 90° angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self-inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. [Figure 8-3](#) shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

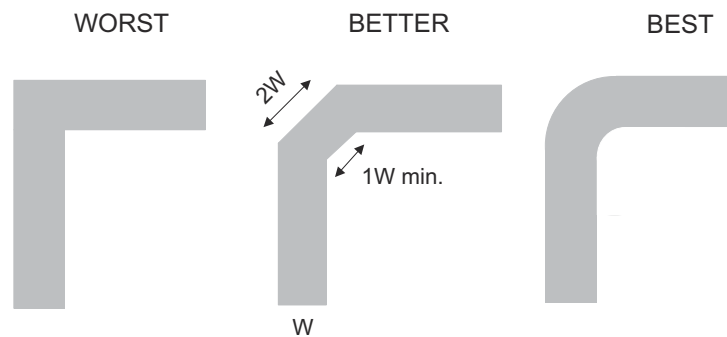


Figure 8-3. Trace Example

Route high-speed signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points, through-hole pins are not recommended at high frequencies.

[Figure 8-4](#) shows an example of a PCB layout with the TMUX1108. Some key considerations are as follows:

- Decouple the V_{DD} pin with a 0.1 μ F capacitor, placed as close to the pin as possible. Ensure that the capacitor voltage rating is sufficient for the V_{DD} supply.
- Keep the input lines as short as possible.
- Use a solid ground plane to help reduce electromagnetic interference (EMI) noise pickup.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when necessary.

8.4.2 Layout Example

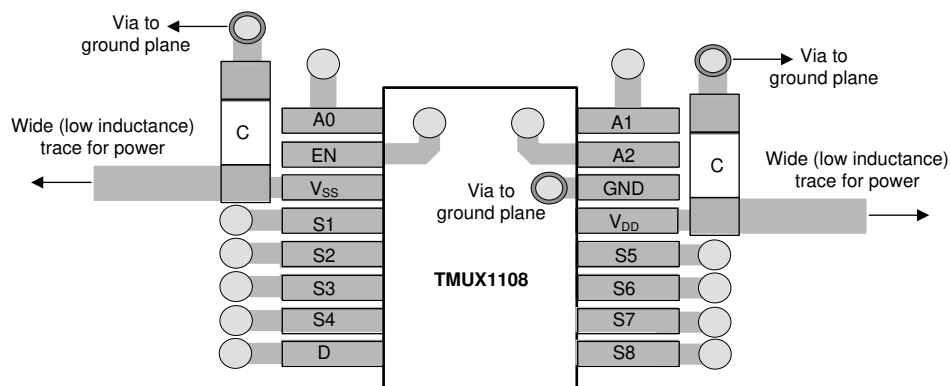


Figure 8-4. TMUX1108 Layout Example

9 Device and Documentation Support

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following

- Texas Instruments, [Improve Stability Issues with Low CON Multiplexers](#).
- Texas Instruments, [Simplifying Design with 1.8V logic Muxes and Switches](#).
- Texas Instruments, [Eliminate Power Sequencing with Powered-off Protection Signal Switches](#).
- Texas Instruments, [System-Level Protection for High-Voltage Analog Multiplexers](#).
- Texas Instruments, [QFN/SON PCB Attachment](#).
- Texas Instruments, [Quad Flatpack No-Lead Logic Packages](#).

9.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

9.3 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

9.4 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

9.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

9.6 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

10 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision A (November 2018) to Revision B (February 2024)	Page
• Updated Is or Id (Continuous Current) values.....	4
• Added Ipeak values to Recommended Operating Conditions table.....	4

Changes from Revision * (November 2018) to Revision A (November 2018)	Page
• Added footnotes to <i>Absolute Maximum Ratings</i> : table.....	4
• Added RSV (QFN) thermal information to <i>Thermal Information</i> : table.....	5
• Added footnote to clarify test conditions	7

- Changed leakage current test conditions for dual supply.....8
-

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TMUX1108PWR	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 125	TM1108
TMUX1108PWR.A	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1108
TMUX1108RSVR	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1B2
TMUX1108RSVR.A	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1B2
TMUX1108RSVRG4.A	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1B2

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION

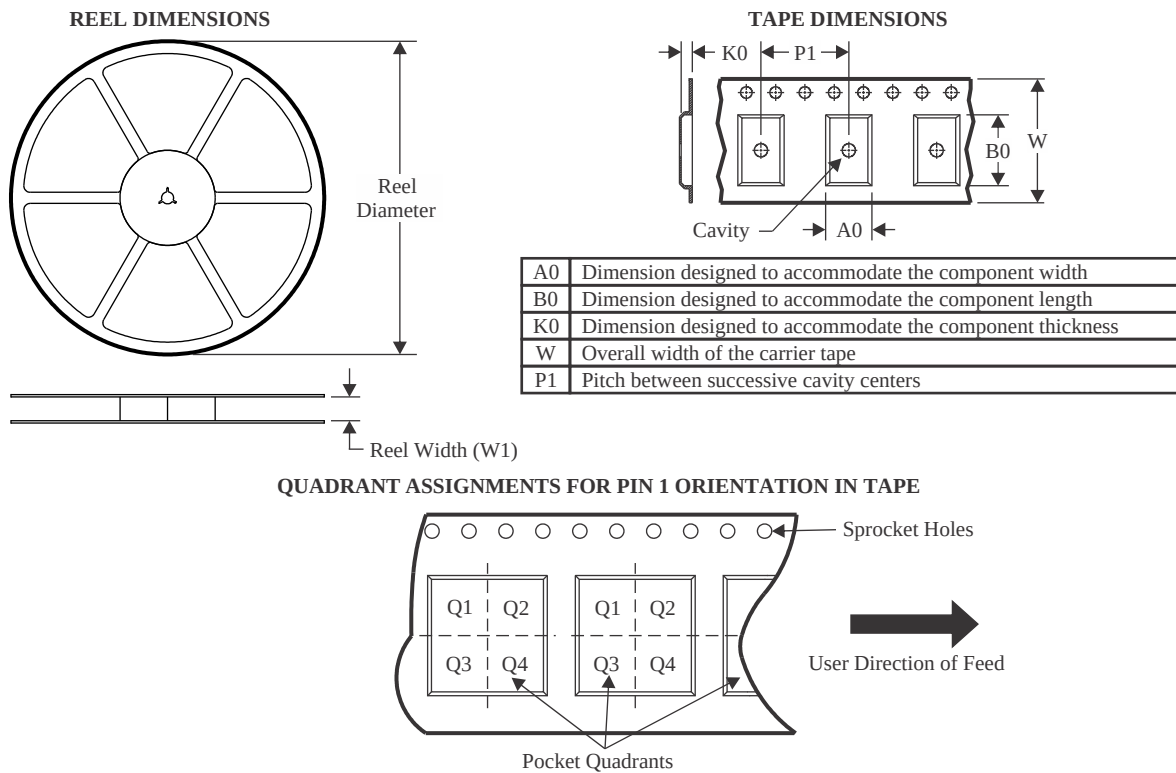

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TMUX1108PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TMUX1108RSVR	UQFN	RSV	16	3000	178.0	13.5	2.1	2.9	0.75	4.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

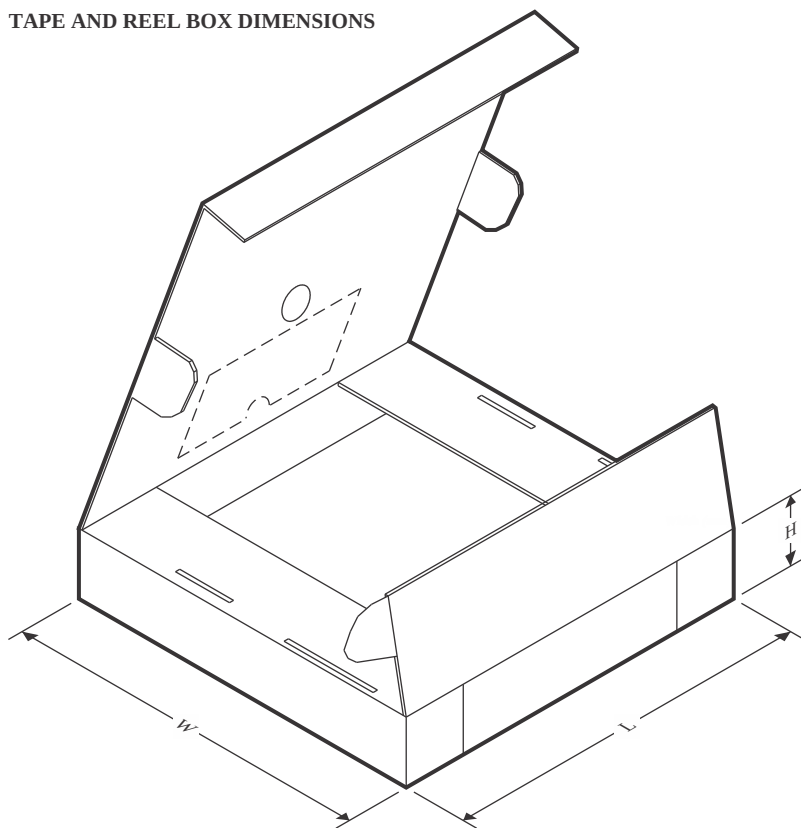

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TMUX1108PWR	TSSOP	PW	16	2000	356.0	356.0	35.0
TMUX1108RSVR	UQFN	RSV	16	3000	189.0	185.0	36.0

GENERIC PACKAGE VIEW


RSV 16



UQFN - 0.55 mm max height

1.8 x 2.6, 0.4 mm pitch

ULTRA THIN QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

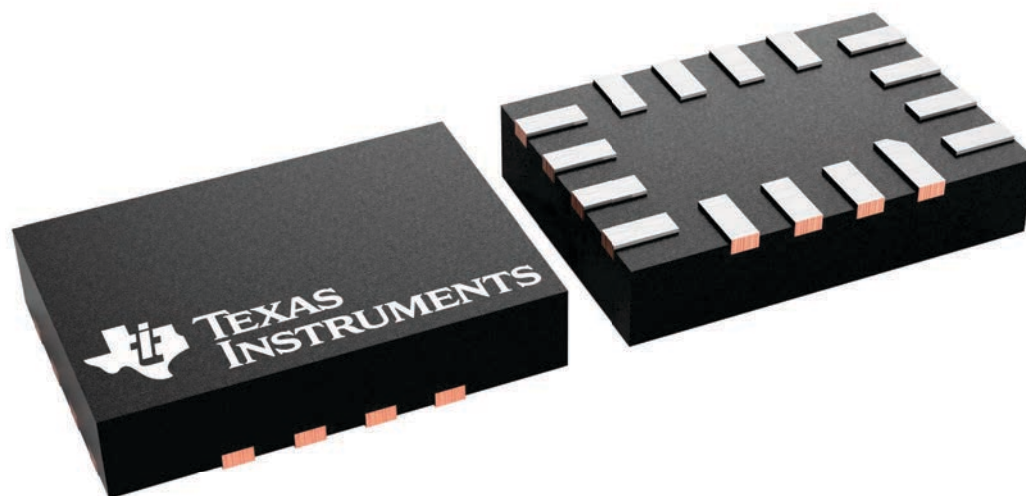

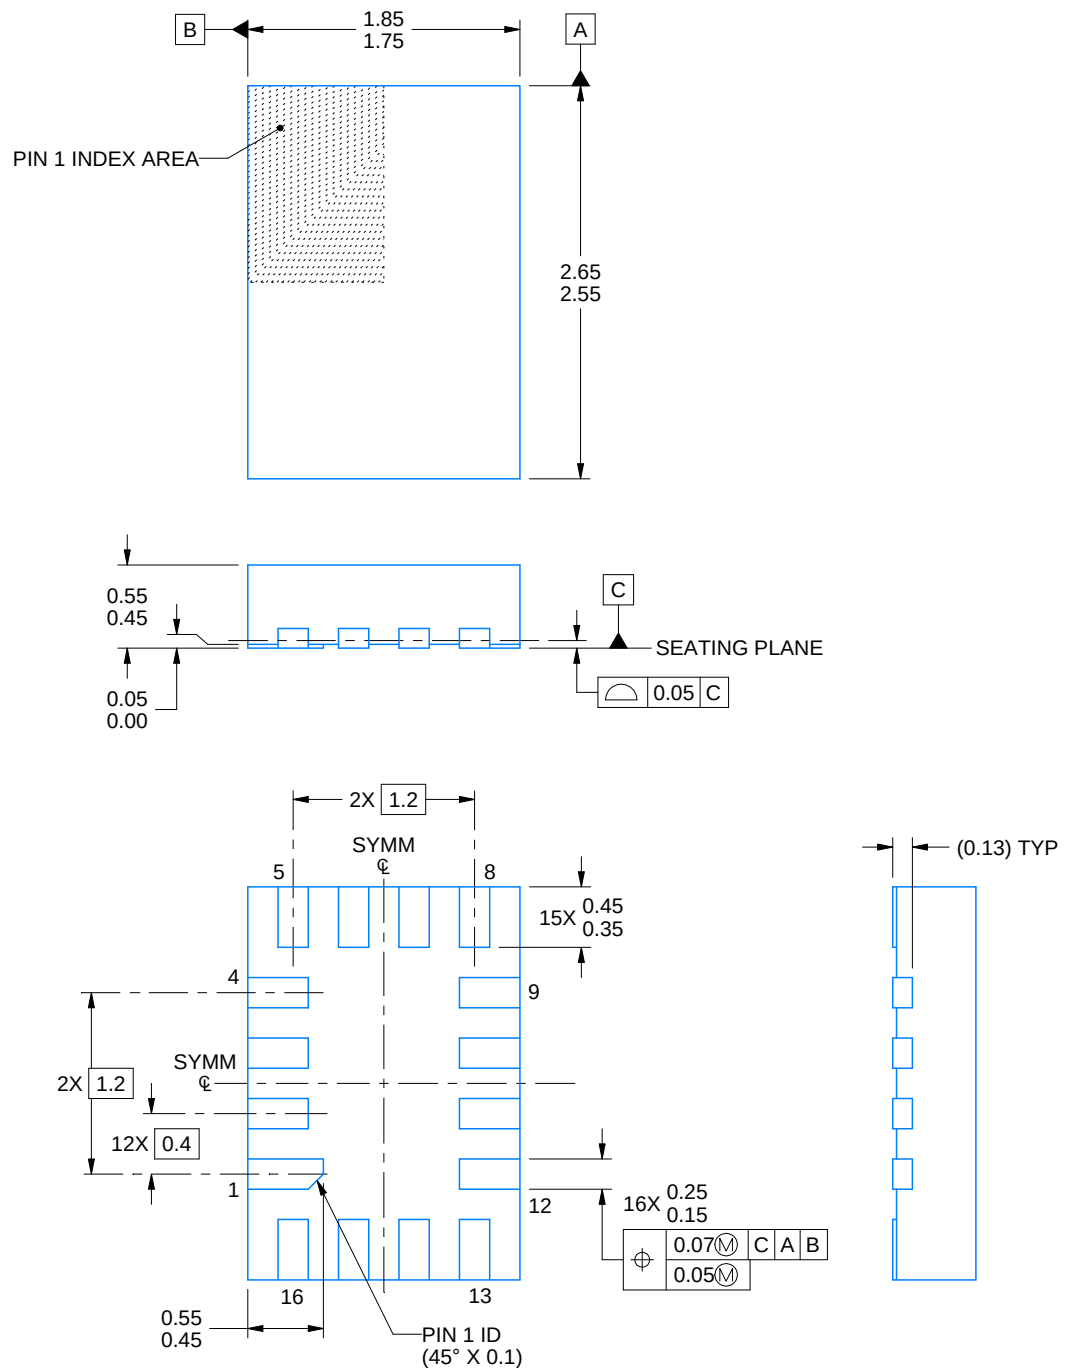

4220314/C 02/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


RSV0016A

UQFN - 0.55 mm max height

ULTRA THIN QUAD FLATPACK - NO LEAD

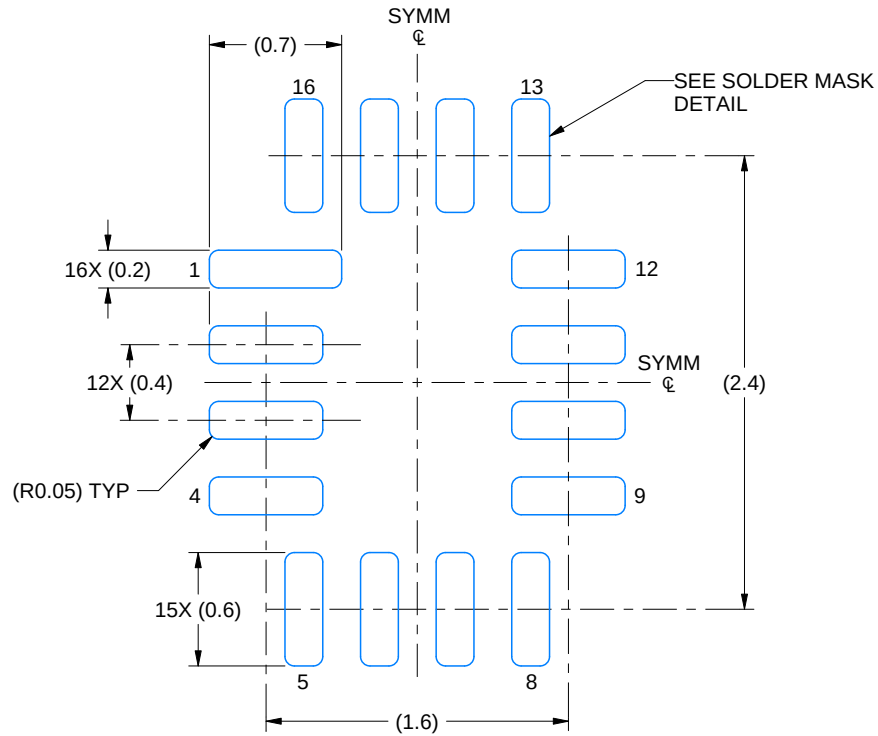

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 25X

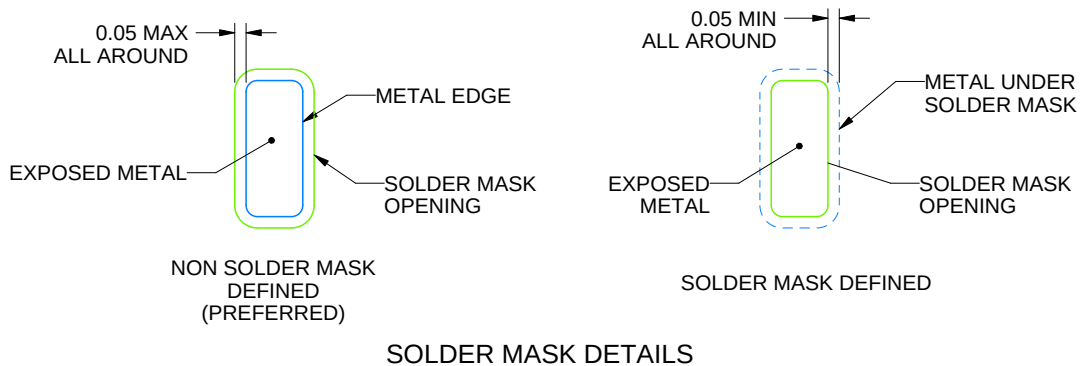

4220314/C 02/2020


NOTES: (continued)

3. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

RSV0016A

UQFN - 0.55 mm max height

ULTRA THIN QUAD FLATPACK - NO LEAD

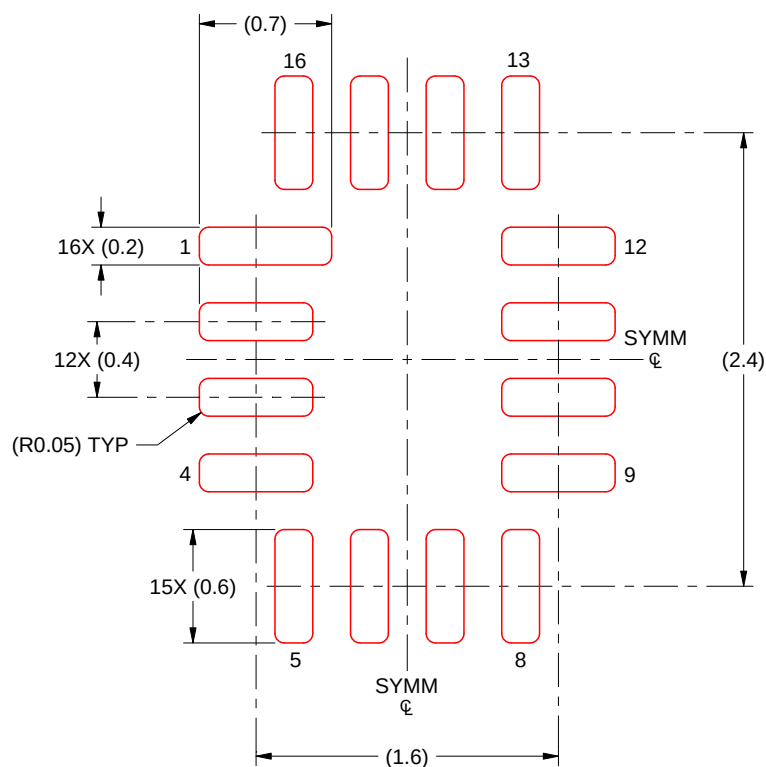

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 25X

4220314/C 02/2020

NOTES: (continued)


4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

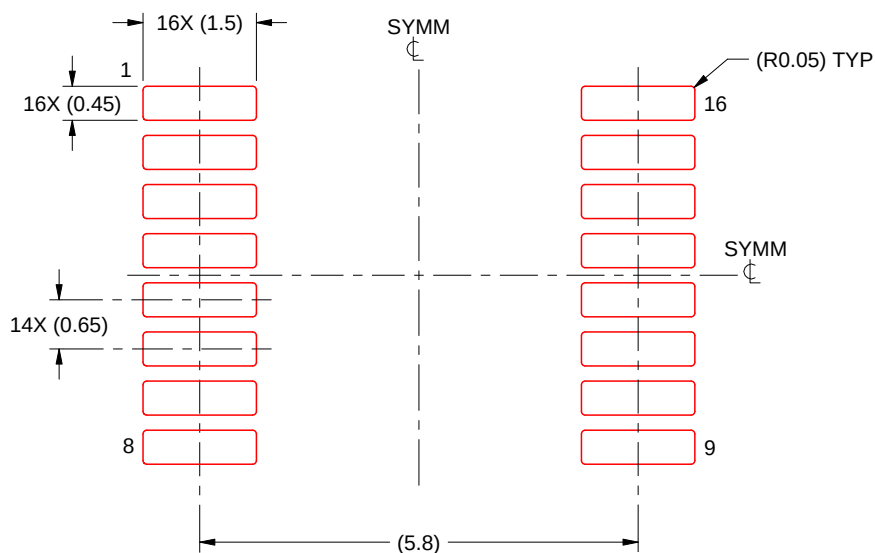

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含みいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](https://www.ti.com) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月