

ISOM811x Reinforced Single-Channel Opto-Emulator With Analog Transistor Output

1 Features

- Footprint compatible, pin-to-pin upgrade to industry-standard phototransistor optocouplers
- 1-channel LED-emulator input
- Current transfer ratio (CTR) at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$:
 - ISOM8110, ISOM8115: 100% to 155%
 - ISOM8111, ISOM8116: 150% to 230%
 - ISOM8112, ISOM8117: 255% to 380%
 - ISOM8113, ISOM8118: 375% to 560%
- High collector-emitter voltage: $V_{CE}(\text{max}) = 80\text{V}$
- Robust SiO_2 isolation barrier
 - Isolation rating: Up to $5000V_{\text{RMS}}$
 - Working voltage: Up to $750V_{\text{RMS}}$, $1061V_{\text{PK}}$
 - Surge capability: Up to $10kV_{\text{PK}}$
- Temperature range: -55°C to 125°C
- Response time: $3\mu\text{s}$ (typical) at $V_{CE} = 10\text{V}$, $I_C = 2\text{mA}$, $R_L = 100\Omega$
- [Section 6.5](#) (Planned)
 - DIN EN IEC 60747-17 (VDE 0884-17) conformity per VDE
 - UL 1577 recognition, $5000V_{\text{RMS}}$
 - IEC 62368-1, IEC 61010-1 certifications
 - CQC GB 4943.1 certification

2 Applications

- [Switching power supply](#)
- [Programmable Logic Controller \(PLC\)](#)
- [Factory automation & control](#)
- [Data acquisition](#)
- [Motor drive I/O and position feedback](#)

3 Description

The ISOM811x devices are single-channel optocoupler-emulators with LED-emulator input and transistor output. The devices are footprint compatible and pin-to-pin upgrades for many traditional optocouplers, allowing enhancement to existing systems with no PCB redesign.

ISOM811x opto-emulators offer significant reliability and performance advantages compared to optocouplers, including high bandwidth, low turn-off delay, low power consumption, wider temperature ranges, flat CTR, and tight process controls resulting in small part-to-part skew. Since there is no aging effect or temperature variation to compensate for, the emulated LED input stage consumes less power than optocouplers.


ISOM811x devices are offered in small SOIC-4 packages with 2.54mm and 1.27mm pin pitches, supporting $3750V_{\text{RMS}}$ and $5000V_{\text{RMS}}$ isolation ratings with DC (ISOM811[0-3]) and bidirectional DC (ISOM811[5-8]) input options. The high performance and reliability of ISOM811x enables these devices to be used in power supply feedback design, motor drives, I/O modules in industrial controllers, factory automation applications, and more.

Package Information

| PART NUMBER | PACKAGE ⁽¹⁾ | PACKAGE SIZE ⁽²⁾ | BODY SIZE (NOM) |
|-------------|------------------------|-----------------------------|-----------------|
| ISOM811x | SO-4 (DFG) | 7.0mm × 3.5mm | 4.8mm × 3.5mm |
| | SO-4 (DFH) | 7.0mm × 2.7mm | 4.8mm × 2.7mm |
| | SO-4 (DFS) | 10.0mm × 3.6mm | 7.5mm × 3.6mm |

(1) For more information, see [Section 12](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.

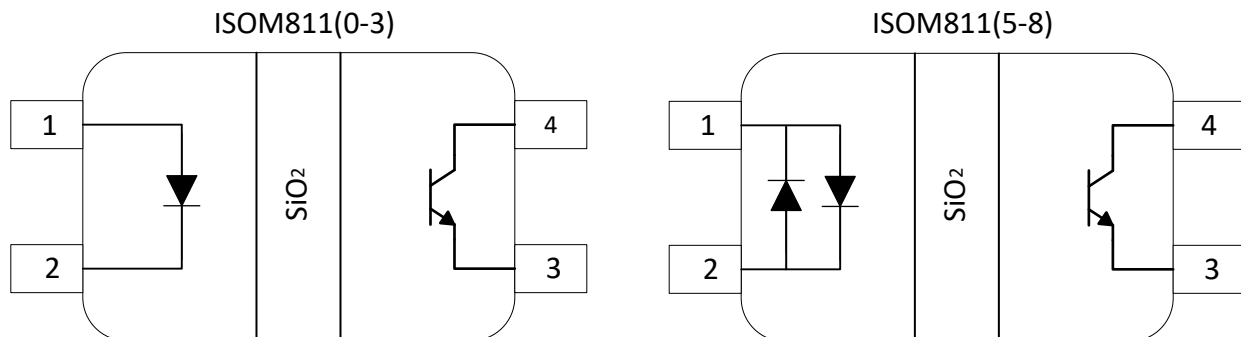

Simplified Schematic



Table of Contents

| | | | |
|--|----|--|----|
| 1 Features | 1 | 8.2 Functional Block Diagram..... | 18 |
| 2 Applications | 1 | 8.3 Feature Description..... | 19 |
| 3 Description | 1 | 8.4 Device Functional Modes..... | 19 |
| 4 Device Comparison | 3 | 9 Application and Implementation | 20 |
| 5 Pin Configuration and Functions | 3 | 9.1 Application Information..... | 20 |
| 6 Specifications | 4 | 9.2 Power Supply Recommendations..... | 25 |
| 6.1 Absolute Maximum Ratings..... | 4 | 9.3 Layout..... | 25 |
| 6.2 ESD Ratings..... | 4 | 10 Device and Documentation Support | 27 |
| 6.3 Thermal Information..... | 4 | 10.1 Documentation Support..... | 27 |
| 6.4 Insulation Specifications..... | 5 | 10.2 Receiving Notification of Documentation Updates.. | 27 |
| 6.5 Safety-Related Certifications..... | 6 | 10.3 Support Resources..... | 27 |
| 6.6 Safety Limiting Values..... | 6 | 10.4 Trademarks..... | 27 |
| 6.7 Electrical Characteristics..... | 8 | 10.5 Electrostatic Discharge Caution..... | 27 |
| 6.8 Switching Characteristics..... | 10 | 10.6 Glossary..... | 27 |
| 6.9 Typical Characteristics..... | 12 | 11 Revision History | 27 |
| 7 Parameter Measurement Information | 17 | 12 Mechanical, Packaging, and Orderable Information | 28 |
| 8 Detailed Description | 18 | | |
| 8.1 Overview..... | 18 | | |

4 Device Comparison

Table 4-1. Device Selection

| PART NUMBER | CTR ($I_F = 5\text{mA}$) | PACKAGE | PIN PITCH |
|--------------------|----------------------------|---|------------------------|
| ISOM8110, ISOM8115 | 100% to 155% | 4-pin SOIC (DFG), 4-pin SOIC (DFH), 4-pin SOIC (DFS) | 2.54mm, 1.27mm, 2.54mm |
| ISOM8111, ISOM8116 | 150% to 230% | | |
| ISOM8112, ISOM8117 | 255% to 380% | | |
| ISOM8113, ISOM8118 | 375% to 560% | | |

5 Pin Configuration and Functions

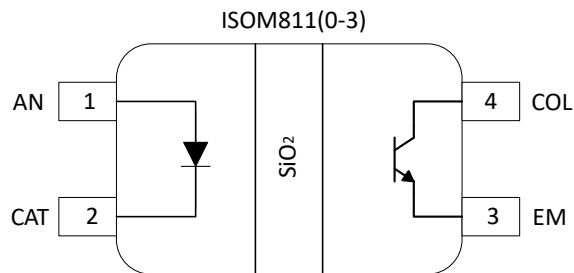


Figure 5-1. ISOM811[0-3] 4-Pin SOIC (Top View)

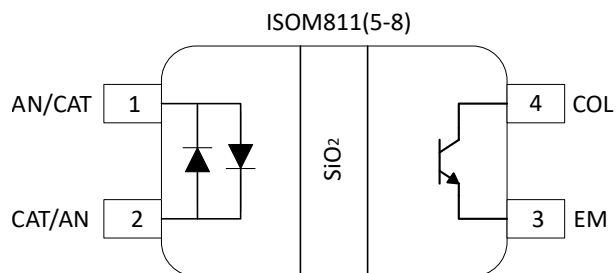


Figure 5-2. ISOM811[5-8] 4-Pin SOIC (Top View)

Table 5-1. Pin Functions

| PIN | | TYPE ⁽¹⁾ | DESCRIPTION |
|-----|------|---------------------|--|
| NO. | NAME | | |
| 1 | AN | I | Anode connection of input LED emulator |
| 2 | CAT | I | Cathode connection of input LED emulator |
| 3 | EM | O | Emitter for transistor |
| 4 | COL | O | Collector for transistor |

(1) I = Input, O = Output

6 Specifications

6.1 Absolute Maximum Ratings

See ⁽¹⁾ ⁽²⁾

| | | MIN | MAX | UNIT |
|--------------|---|-----|-----|-------------|
| $I_{F(max)}$ | Maximum Input forward current | | 50 | mA |
| V_{CEO} | Collector-emitter voltage | | 80 | V |
| V_{ECO} | Emitter-collector voltage | | 7 | V |
| I_{FP} | Input pulse forward current (1 μ s width) | | 1 | A |
| V_R | Input reverse voltage at $I_R = 10\mu A$ | | 7 | V |
| P_I | Input power dissipation | | 140 | mW |
| I_C | Collector current | | 50 | mA |
| P_C | Collector power dissipation | | 150 | mW |
| P_T | Total power dissipation | | 290 | mW |
| T_A | Ambient temperature | -55 | 125 | $^{\circ}C$ |
| T_J | Operating junction temperature | | 150 | $^{\circ}C$ |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under the operational sections of this document. If used outside the listed operational conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) All specifications are at $T_A = 25^{\circ}C$ unless otherwise noted

6.2 ESD Ratings

| | | | VALUE | UNIT |
|-------------|-------------------------|--|------------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾ | ± 2000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾ | ± 1000 | |

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

6.3 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | ISOM811x | | | UNIT |
|-------------------------------|--|------------|------------|------------|---------------|
| | | DFS (SOIC) | DFG (SOIC) | DFH (SOIC) | |
| | | 4 PINS | 4 PINS | 4 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 269.1 | 283.9 | 288.8 | $^{\circ}C/W$ |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 156.7 | 173.1 | 173.6 | $^{\circ}C/W$ |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 194.2 | 201.4 | 192.9 | $^{\circ}C/W$ |
| Ψ_{JT} | Junction-to-top characterization parameter | 128.4 | 125.1 | 121.5 | $^{\circ}C/W$ |
| Ψ_{JB} | Junction-to-board characterization parameter | 191.0 | 198.0 | 190.0 | $^{\circ}C/W$ |

- (1) For more information about traditional and new thermal metrics, see [Semiconductor and IC Package Thermal Metrics](#) application note.

6.4 Insulation Specifications

| PARAMETER | | TEST CONDITIONS | VALUE | | UNIT |
|---|---|---|--------------------|--------------------|------------------|
| | | | 4-DFG, 4-DFH | 4-DFS | |
| IEC 60664-1 | | | | | |
| CLR | External clearance ⁽¹⁾ | Side 1 to side 2 distance through air | > 5 | > 8 | mm |
| CPG | External creepage ⁽¹⁾ | Side 1 to side 2 distance across package surface | > 5 | > 8 | mm |
| DTI | Distance through the insulation | Minimum internal gap (internal clearance) | >17 | >17 | µm |
| CTI | Comparative tracking index | IEC 60112; UL 746A | >400 | >400 | V |
| | Material Group | According to IEC 60664-1 | II | II | |
| | Overvoltage category per IEC 60664-1 | Rated mains voltage ≤ 150 V _{RMS} | I-IV | I-IV | |
| | | Rated mains voltage ≤ 300 V _{RMS} | I-IV | I-IV | |
| | | Rated mains voltage ≤ 500V _{RMS} | I-III | I-IV | |
| DIN EN IEC 60747-17 (VDE 0884-17) ⁽⁶⁾ | | | | | |
| V _{IORM} | Maximum repetitive peak isolation voltage | AC voltage (bipolar) | 707 | 1061 | V _{PK} |
| V _{IOWM} | Maximum isolation working voltage | AC voltage (sine wave); time-dependent dielectric breakdown (TDDb) test. See Insulation Lifetime | 500 | 750 | V _{RMS} |
| | | DC voltage | 707 | 1061 | V _{DC} |
| V _{IOTM} | Maximum transient isolation voltage | V _{TEST} = V _{IOTM} , t = 60s (qualification); V _{TEST} = 1.2 × V _{IOTM} , t = 1s (100% production) | 5303 | 7071 | V _{PK} |
| V _{IMP} | Maximum impulse voltage ⁽²⁾ | Tested in air, 1.2/50µs waveform per IEC 62368-1 | 7200 | 8000 | V _{PK} |
| V _{IOSM} | Maximum surge isolation voltage ⁽³⁾ | V _{IOSM} ≥ 1.3 × V _{IMP} ; tested in oil (qualification test), 1.2/50µs waveform per IEC 62368-1 | 10000 | 10400 | V _{PK} |
| q _{pd} | Apparent charge ⁽⁴⁾ | Method a: After I/O safety test subgroup 2/3, V _{ini} = V _{IOTM} , t _{ini} = 60s; V _{pd(m)} = 1.2 × V _{IORM} , t _m = 10s | ≤ 5 | ≤ 5 | pC |
| | | Method a: After environmental tests subgroup 1, V _{ini} = V _{IOTM} , t _{ini} = 60s; V _{pd(m)} = 1.6 × V _{IORM} , t _m = 10s | ≤ 5 | ≤ 5 | |
| | | Method b: At routine test (100% production) and preconditioning (type test), V _{ini} = 1.2 × V _{IOTM} , t _{ini} = 1s; V _{pd(m)} = 1.875 × V _{IORM} , t _m = 1s | ≤ 5 | ≤ 5 | |
| C _{IO} | Barrier capacitance, input to output ⁽⁵⁾ | V _{IO} = 0.4 × sin(2 πft), f = 1MHz | 1 | 1 | pF |
| R _{IO} | Insulation resistance, input to output ⁽⁵⁾ | V _{IO} = 500V, T _A = 25°C | > 10 ¹² | > 10 ¹² | Ω |
| | | V _{IO} = 500V, 100°C ≤ T _A ≤ 125°C | > 10 ¹¹ | > 10 ¹¹ | |
| | | V _{IO} = 500V at T _S = 150°C | > 10 ⁹ | > 10 ⁹ | |
| | Pollution degree | | 2 | 2 | |
| | Climatic category | | 40/125/2 1 | 40/125/2 1 | |
| UL 1577 | | | | | |
| V _{ISO} | Withstand isolation voltage | V _{TEST} = V _{ISO} , t = 60s (qualification); V _{TEST} = 1.2 × V _{ISO} , t = 1s (100% production) | 3750 | 5000 | V _{RMS} |

- (1) Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves, ribs, or both on a printed circuit board are used to help increase these specifications.
- (2) Testing is carried out in air to determine the surge immunity of the package.
- (3) Testing is carried out in oil to determine the intrinsic surge immunity of the isolation barrier.
- (4) Apparent charge is electrical discharge caused by a partial discharge (pd).
- (5) All pins on each side of the barrier tied together creating a two-pin device.

- (6) This coupler is suitable for *safe electrical insulation only* within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.

6.5 Safety-Related Certifications

| VDE | CSA | UL | CQC | TUV |
|--|---|--|---------------------------------|--|
| Certified according to DIN EN IEC 60747-17 (VDE 0884-17) | Certified according to IEC 61010-1, IEC 62368-1 and IEC 60601-1 | Certified according to UL 1577 Component Recognition Program | Certified according to GB4943.1 | Certified according to EN 61010-1 and EN 62368-1 |
| Certificate pending | Master contract number: 220991 | File number: E181974 | Certificate: CQC24001426995 | Client ID number: 77311 |

6.6 Safety Limiting Values

Safety limiting⁽¹⁾ intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry.

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------|-------------------------------|---|-----|-----|------|------|
| SO-4 PACKAGE (DFG) | | | | | | |
| I _S | Safety limiting input current | R _{θJA} = 283.9°C/W, V _F = 1.4V, T _J = 150°C, T _A = 25°C | | | 300 | mA |
| | | R _{θJA} = 283.9°C/W, V _{CEO} = 40V, T _J = 150°C, T _A = 25°C | | | 10.5 | mA |
| | | R _{θJA} = 283.9°C/W, V _{CEO} = 24V, T _J = 150°C, T _A = 25°C | | | 17.5 | mA |
| | | R _{θJA} = 283.9°C/W, V _{CEO} = 15V, T _J = 150°C, T _A = 25°C | | | 28 | mA |
| P _S | Safety limiting total power | R _{θJA} = 283.9°C/W, T _J = 150°C, T _A = 25°C | | | 420 | mW |
| T _S | Maximum safety temperature | | | | 150 | °C |
| SO-4 PACKAGE (DFH) | | | | | | |
| I _S | Safety limiting input current | R _{θJA} = 288.8°C/W, V _F = 1.4V, T _J = 150°C, T _A = 25°C | | | 300 | mA |
| I _S | Safety limiting input current | R _{θJA} = 288.8°C/W, V _{CEO} = 40V, T _J = 150°C, T _A = 25°C | | | 10.5 | mA |
| I _S | Safety limiting input current | R _{θJA} = 288.8°C/W, V _{CEO} = 24V, T _J = 150°C, T _A = 25°C | | | 17.5 | mA |
| I _S | Safety limiting input current | R _{θJA} = 288.8°C/W, V _{CEO} = 15V, T _J = 150°C, T _A = 25°C | | | 28 | mA |
| P _S | Safety limiting total power | R _{θJA} = 288.8°C/W, T _J = 150°C, T _A = 25°C | | | 420 | mW |
| T _S | Maximum safety temperature | | | | 150 | °C |
| SO-4 PACKAGE (DFS) | | | | | | |
| I _S | Safety limiting input current | R _{θJA} = 269.1°C/W, V _F = 1.4V, T _J = 150°C, T _A = 25°C | | | 320 | mA |
| I _S | Safety limiting input current | R _{θJA} = 269.1°C/W, V _{CEO} = 40V, T _J = 150°C, T _A = 25°C | | | 11 | mA |
| I _S | Safety limiting input current | R _{θJA} = 269.1°C/W, V _{CEO} = 24V, T _J = 150°C, T _A = 25°C | | | 18 | mA |
| I _S | Safety limiting input current | R _{θJA} = 269.1°C/W, V _{CEO} = 15V, T _J = 150°C, T _A = 25°C | | | 30 | mA |
| P _S | Safety limiting total power | R _{θJA} = 269.1°C/W, T _J = 150°C, T _A = 25°C | | | 470 | mW |
| T _S | Maximum safety temperature | | | | 150 | °C |

- (1) The I_S and P_S parameters represent the safety current and safety power respectively. The maximum limits of I_S and P_S must not be exceeded. These limits vary with the ambient temperature, T_A.
 The junction-to-air thermal resistance, R_{θJA}, in the table is that of a device installed on a high-K test board for leaded surface-mount packages. Use these equations to calculate the value for each parameter:
 $T_J = T_A + R_{\theta JA} \times P$, where P is the power dissipated in the device.
 $T_{J(max)} = T_S = T_A + R_{\theta JA} \times P_S$, where T_{J(max)} is the maximum allowed junction temperature.

$P_S = I_S \times V_I$, where V_I is the maximum input voltage.

6.7 Electrical Characteristics

All specifications are at $T_A = 25^\circ\text{C}$ unless otherwise noted

| PARAMETER | | TEST CONDITIONS | GPN | MIN | TYP | MAX | UNIT |
|--------------------------|--------------------------------------|---|---|-----|-----|-----|---------------|
| INPUT | | | | | | | |
| V_F | Input forward voltage | $I_F = 5\text{mA}$ | ISOM8110, ISOM8111, ISOM8112, ISOM8113 | 1.2 | 1.4 | | V |
| V_F | Input forward voltage | $I_F = \pm 5\text{mA}$ | ISOM8115, ISOM8116, ISOM8117, ISOM8118 | 1.2 | 1.5 | | V |
| I_{FT} | Input forward threshold current | | ISOM811x | | | 0.5 | mA |
| I_R | Input reverse current | $V_R = 5\text{V}$ | ISOM8110, ISOM8111, ISOM8112, ISOM8113 | | | 10 | μA |
| C_{IN} | Input capacitance | At 1MHz, $V_F = 0\text{V}$ | ISOM8110, ISOM8111, ISOM8112, ISOM8113 | | 19 | | pF |
| C_{IN} | Input capacitance | At 1MHz, $V_F = 0\text{V}$ | ISOM8115, ISOM8116, ISOM8117, ISOM8118 | | 6 | | pF |
| OUTPUT | | | | | | | |
| C_{CE} | Collector-emitter capacitance | 1MHz, $V_F = 0\text{V}$ | ISOM811x | | 10 | | pF |
| $V_{CE(SAT)}$ | Collector-emitter saturation voltage | $I_F = 20\text{mA}$, $I_C = 1\text{mA}$ | ISOM811x | | | 0.3 | V |
| I_{C_DARK} | Collector dark current | $V_{CE} = 20\text{V}$, $I_F = 0\text{mA}$ | ISOM811x | | | 100 | nA |
| I_{EC} | Reverse current | $V_{EC} = 7\text{V}$, $I_F = 0\text{mA}$ | ISOM811x | | | 10 | μA |
| I_{C_OFF} | OFF_state collector current | $V_F = 0.7\text{V}$, $V_{CE} = 48\text{V}$ | ISOM811x | | | 10 | μA |
| CTR⁽¹⁾ | | | | | | | |
| CTR | Current Transfer Ratio | $I_F = 0.5\text{mA}$, $V_{CE} = 5\text{V}$ | ISOM8110 | 55 | 130 | 195 | % |
| | | | ISOM8115 | 55 | 130 | 195 | % |
| | | | ISOM8111 | 80 | 180 | 290 | % |
| | | | ISOM8116 | 80 | 180 | 290 | % |
| | | | ISOM8112 | 135 | 300 | 480 | % |
| | | | ISOM8117 | 135 | 300 | 480 | % |
| | | | ISOM8113 | 195 | 440 | 710 | % |
| CTR | Current Transfer Ratio | $I_F = 2\text{mA}$, $V_{CE} = 5\text{V}$ | ISOM8110 | 70 | 120 | 170 | % |
| | | | ISOM8115 | 70 | 120 | 170 | % |
| | | | ISOM8111 | 110 | 180 | 260 | % |
| | | | ISOM8116 | 110 | 180 | 260 | % |
| | | | ISOM8112 | 185 | 300 | 430 | % |
| | | | ISOM8117 | 185 | 300 | 430 | % |
| | | | ISOM8113 | 265 | 440 | 635 | % |
| ISOM8118 | 265 | 440 | 635 | % | | | |

All specifications are at $T_A = 25^\circ\text{C}$ unless otherwise noted

| PARAMETER | | TEST CONDITIONS | GPN | MIN | TYP | MAX | UNIT |
|-----------|------------------------|--|----------|-----|-----|-----|------|
| CTR | Current Transfer Ratio | $I_F = 5\text{mA}, V_{CE} = 5\text{V}$ | ISOM8110 | 100 | 120 | 155 | % |
| | | | ISOM8115 | 100 | 120 | 155 | % |
| | | | ISOM8111 | 150 | 180 | 230 | % |
| | | | ISOM8116 | 150 | 180 | 230 | % |
| | | | ISOM8112 | 255 | 300 | 380 | % |
| | | | ISOM8117 | 255 | 300 | 380 | % |
| | | | ISOM8113 | 375 | 440 | 560 | % |
| | | | ISOM8118 | 375 | 440 | 560 | % |

(1) $\text{CTR} (\%) = (I_C / I_F) \times 100\%$

6.8 Switching Characteristics

All specifications are at $T_A = 25^\circ\text{C}$ unless otherwise noted

| PARAMETER | | TEST CONDITIONS | GPN | MIN | TYP | MAX | UNIT |
|-----------|--|--|-----------------------|-----|------|---------------|---------------|
| AC | | | | | | | |
| t_r | Rise time, see Figure 7-2 and Figure 7-3 | $V_{CC} = 10\text{V}$, $I_C = 2\text{mA}$, $R_L = 100\Omega$, $C_L = 50\text{pF}$ | ISOM8110 | | 3.2 | | μs |
| | | | ISOM8113 | | 2.5 | | μs |
| t_f | Fall time, see Figure 7-2 and Figure 7-3 | | ISOM8110 | | 4.0 | | μs |
| | | | ISOM8113 | | 7.5 | | μs |
| T_{ON} | Turn on time, see Figure 7-2 and Figure 7-3 | | ISOM8110, ISOM8115 | | 5.7 | | μs |
| | | | ISOM8111, ISOM8116 | | 4.5 | | μs |
| | | | ISOM8112, ISOM8117 | | 6.2 | | μs |
| | | | ISOM8113, ISOM8118 | | 16.7 | | μs |
| T_{OFF} | Turn off time, see Figure 7-2 and Figure 7-3 | | ISOM8110, ISOM8115 | | 3.6 | | μs |
| | | | ISOM8111, ISOM8116 | | 3.7 | | μs |
| | | ISOM8112, ISOM8117 | | 3.1 | | μs | |
| | | ISOM8113, ISOM8118 | | 2.7 | | μs | |
| T_{ON} | Turn on time, see Figure 7-2 and Figure 7-3 | $V_{CC} = 5\text{V}$, $R_L = 4.7\text{k}\Omega$, $I_F = 1.6\text{mA}$, $C_L = 50\text{pF}$ | ISOM8110, ISOM8115 | | 3.5 | | μs |
| | | | ISOM8111, ISOM8116 | | 2.7 | | μs |
| | | | ISOM8112, ISOM8117 | | 2.1 | | μs |
| | | | ISOM8113, ISOM8118 | | 1.8 | | μs |
| T_{OFF} | Turn off time, see Figure 7-2 and Figure 7-3 | | ISOM8110, ISOM8115 | | 8 | | μs |
| | | | ISOM8111, ISOM8116 | | 9 | | μs |
| | | | ISOM8112, ISOM8117 | | 11.5 | | μs |
| | | | ISOM8113, ISOM8118 | | 13.5 | | μs |

All specifications are at $T_A = 25^\circ\text{C}$ unless otherwise noted

| PARAMETER | | TEST CONDITIONS | GPN | MIN | TYP | MAX | UNIT |
|-----------|--|---|--------------------|-----|------|-----|---------|
| T_{ON} | Turn on time, see Figure 7-2 and Figure 7-3 | $V_{CC}=5V, R_L=1.9k\Omega, I_F=16mA, C_L=50pF$ | ISOM8110, ISOM8115 | | 0.62 | | μs |
| | | | ISOM8111, ISOM8116 | | 0.56 | | μs |
| | | | ISOM8112, ISOM8117 | | 0.48 | | μs |
| | | | ISOM8113, ISOM8118 | | 0.44 | | μs |
| T_{OFF} | Turn off time, see Figure 7-2 and Figure 7-3 | $V_{CC}=5V, R_L=1.9k\Omega, I_F=16mA, C_L=50pF$ | ISOM8110, ISOM8115 | | 10 | | μs |
| | | | ISOM8111, ISOM8116 | | 11 | | μs |
| | | | ISOM8112, ISOM8117 | | 12.3 | | μs |
| | | | ISOM8113, ISOM8118 | | 14.5 | | μs |
| t_s | Storage time; time required for the output waveform to change from 0% (100%) to 10% (90%) when input is turned on and back off, see Figure 7-3 | $V_{CC} = 5V, I_F = 1.6mA, R_L = 4.7k\Omega$ | ISOM811x | | | 21 | μs |
| BW | Bandwidth, see Figure 7-4 and Figure 7-5 | $V_{IN_DC} = 5V, V_{IN_AC} = 1Vpk, R_{IN} = 2k\Omega, V_{CC} = 5V, R_{LOAD} = 100\Omega, C_L = 50pF$, measured at $V_{CE} -3dB$ sinewave | ISOM811x | | 680 | | kHz |

6.9 Typical Characteristics

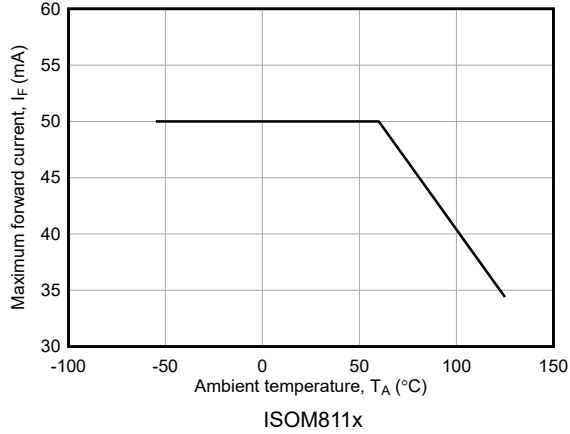


Figure 6-1. Maximum Forward Current vs Ambient Temperature

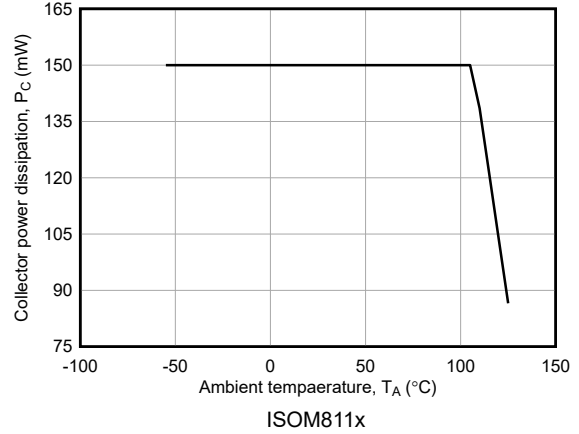


Figure 6-2. Maximum Collector Power Dissipation vs Ambient Temperature

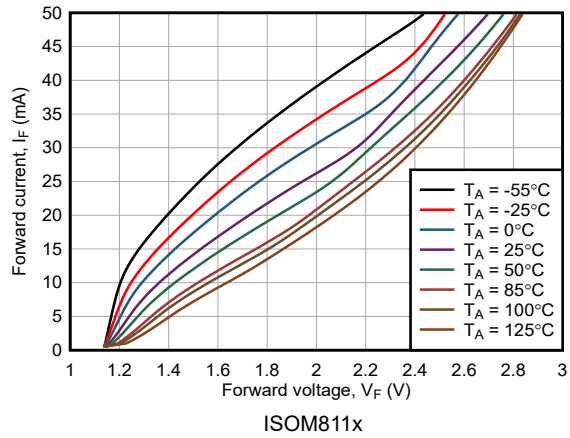


Figure 6-3. Forward Voltage vs Forward Current

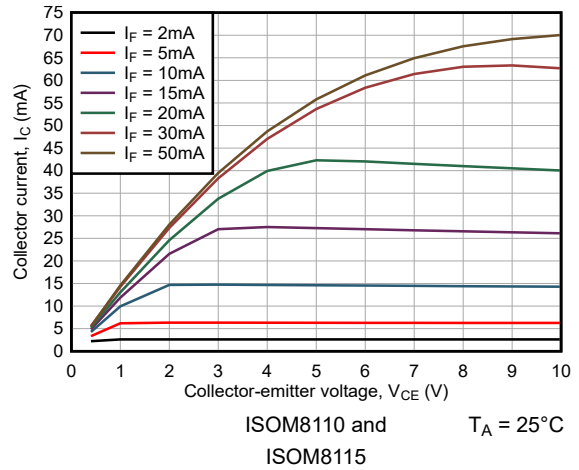


Figure 6-4. Collector Current vs Collector-Emitter Voltage

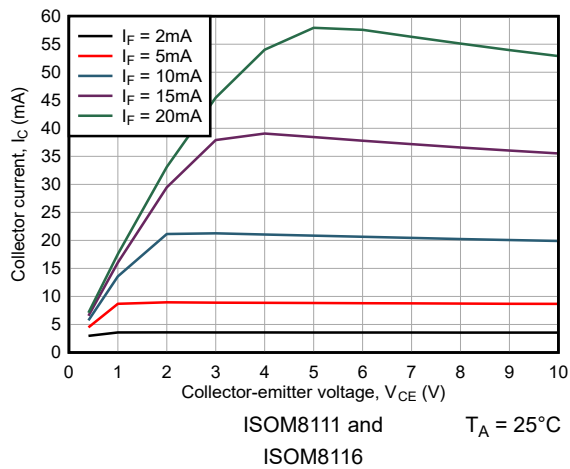


Figure 6-5. Collector Current vs Collector-Emitter Voltage

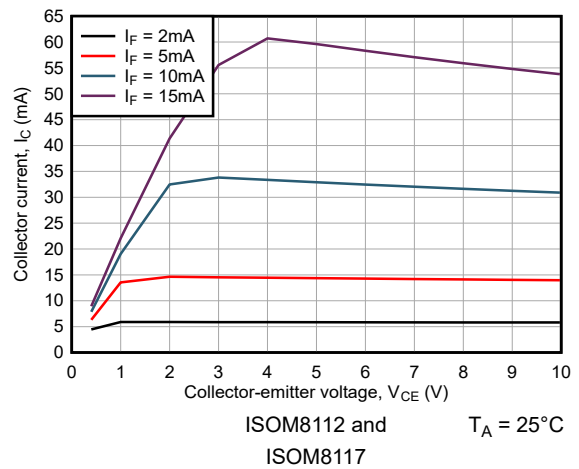


Figure 6-6. Collector Current vs Collector-Emitter Voltage

6.9 Typical Characteristics (continued)

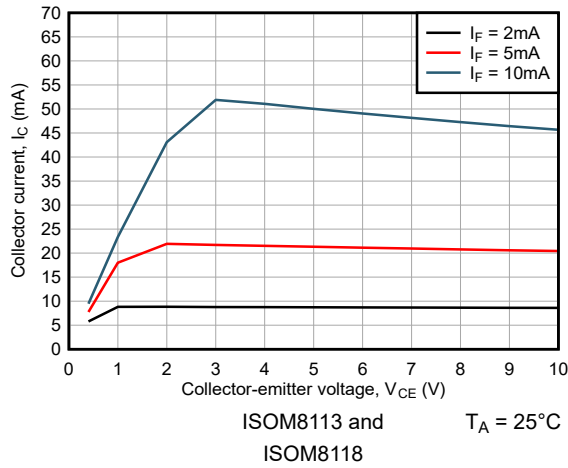


Figure 6-7. Collector Current vs Collector-Emitter Voltage

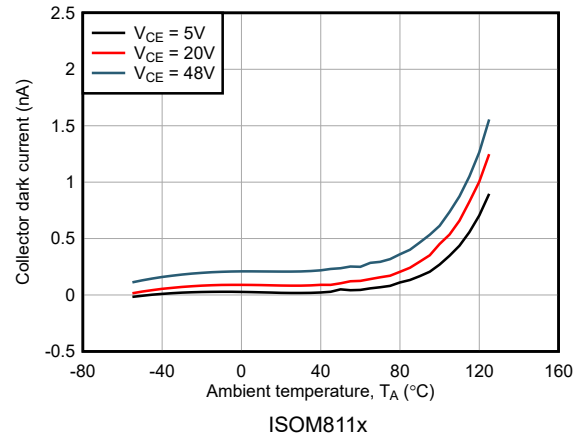


Figure 6-8. Collector Dark Current vs Ambient Temperature

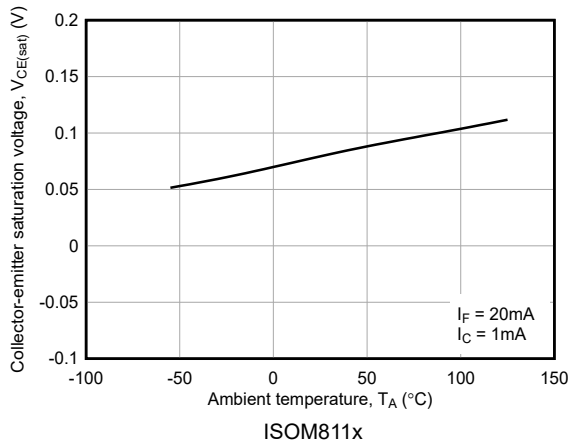


Figure 6-9. Collector-Emitter Saturation Voltage vs Ambient Temperature

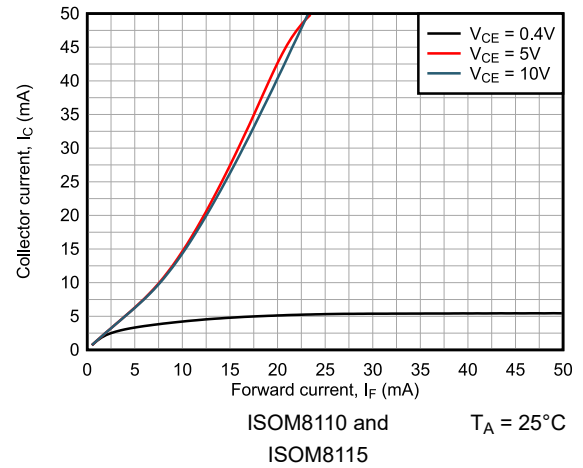


Figure 6-10. Collector Current vs Forward Current

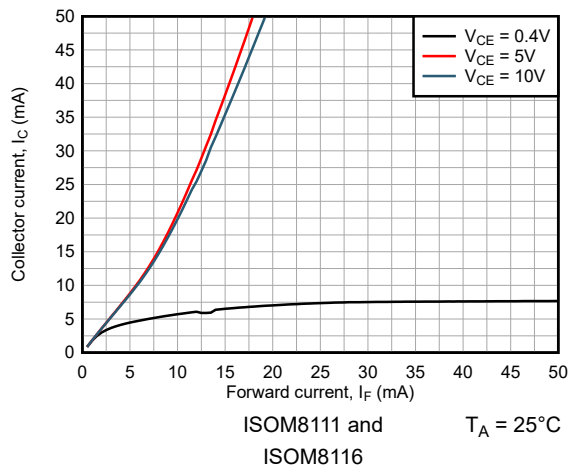


Figure 6-11. Collector Current vs Forward Current


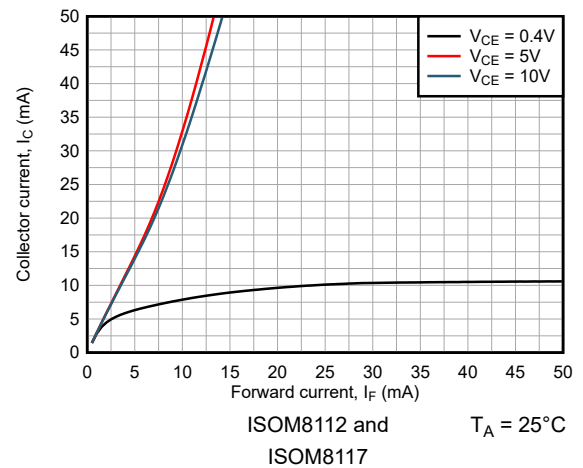



Figure 6-12. Collector Current vs Forward Current

6.9 Typical Characteristics (continued)

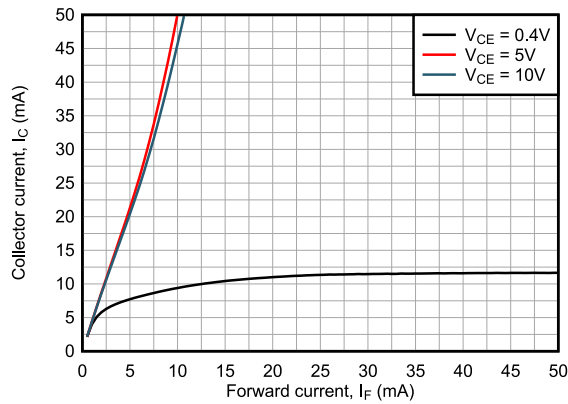


ISOM8113 and ISOM8118 $T_A = 25^\circ\text{C}$

Figure 6-13. Collector Current vs Forward Current

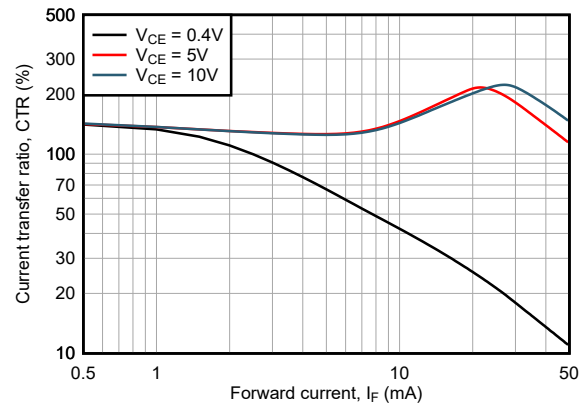


ISOM8110 and ISOM8115 $T_A = 25^\circ\text{C}$

Figure 6-14. Current Transfer Ratio vs Forward Current

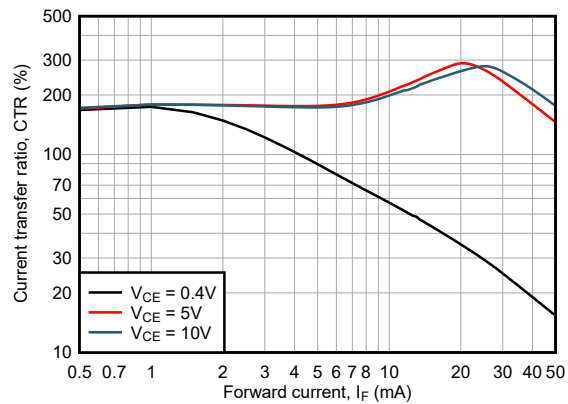


ISOM8111 and ISOM8116 $T_A = 25^\circ\text{C}$

Figure 6-15. Current Transfer Ratio vs Forward Current

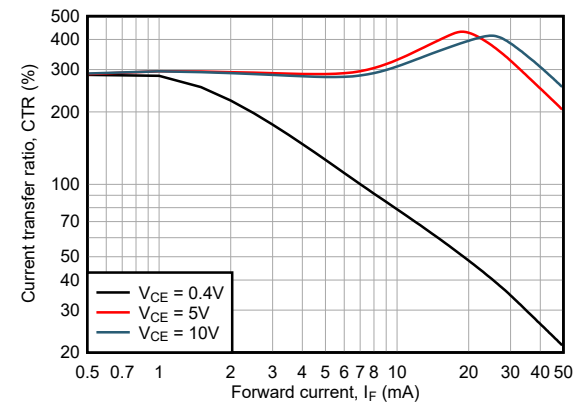


ISOM8112 and ISOM8117 $T_A = 25^\circ\text{C}$

Figure 6-16. Current Transfer Ratio vs Forward Current

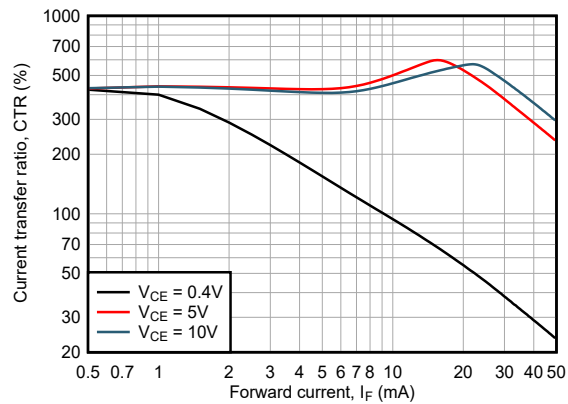

ISOM8113 and ISOM8118 $T_A = 25^\circ\text{C}$

Figure 6-17. Current Transfer Ratio vs Forward Current

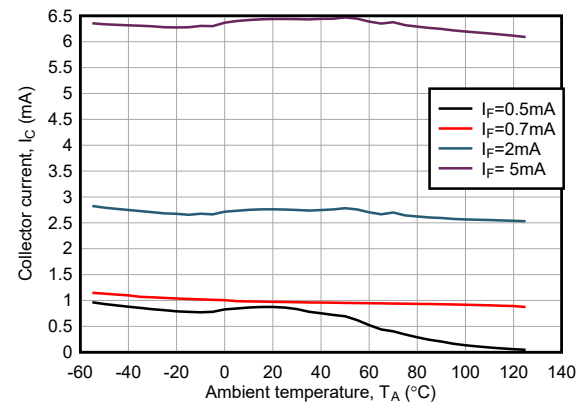

ISOM8110 and ISOM8115 $V_{CE} = 5\text{V}$

Figure 6-18. Collector Current vs Ambient Temperature

6.9 Typical Characteristics (continued)

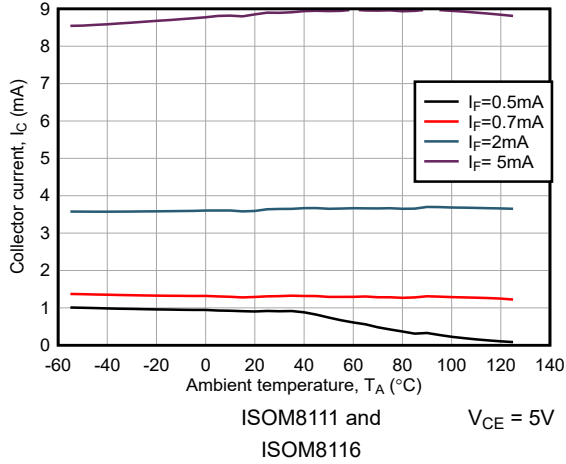


Figure 6-19. Collector Current vs Ambient Temperature

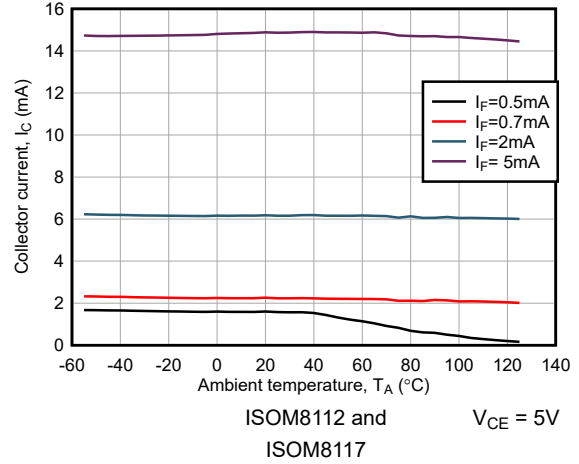


Figure 6-20. Collector Current vs Ambient Temperature

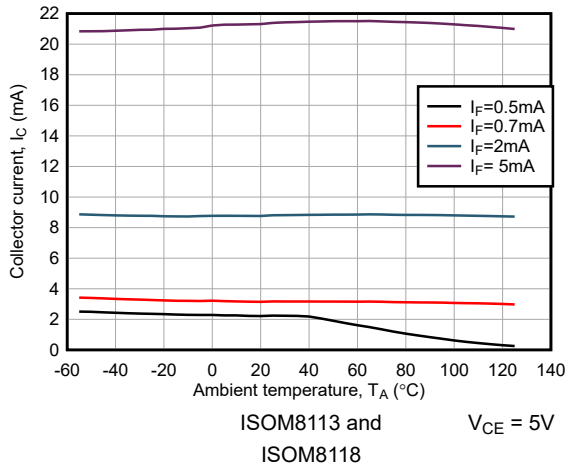


Figure 6-21. Collector Current vs Ambient Temperature

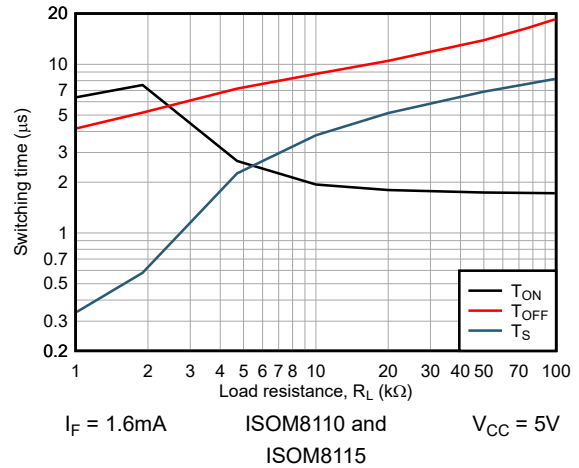


Figure 6-22. Switching Time vs Load Resistance

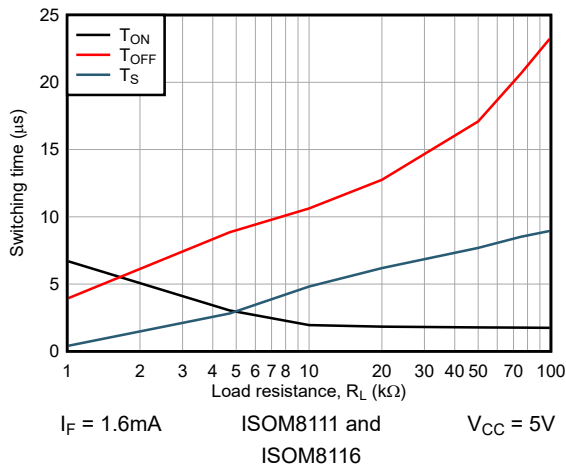


Figure 6-23. Switching Time vs Load Resistance

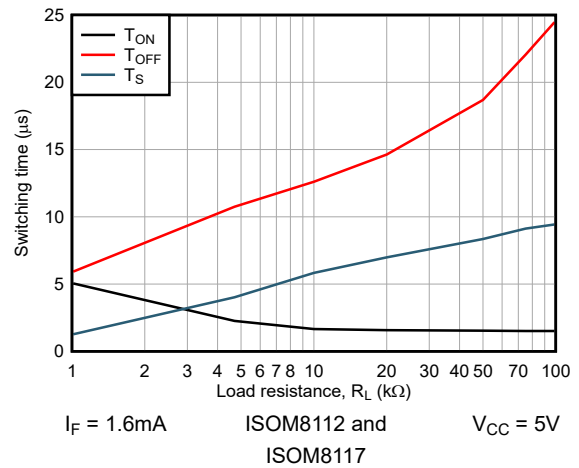


Figure 6-24. Switching Time vs Load Resistance

6.9 Typical Characteristics (continued)

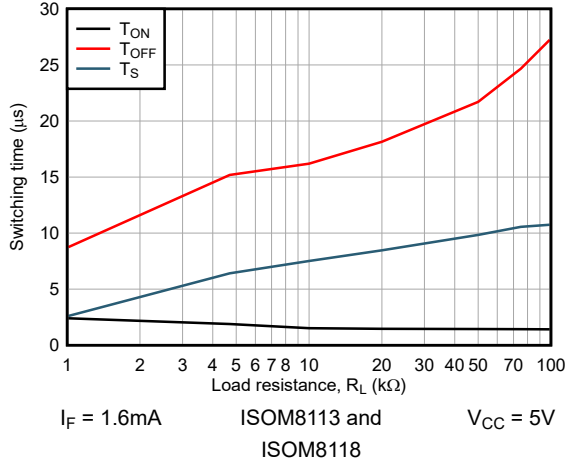


Figure 6-25. Switching Time vs Load Resistance

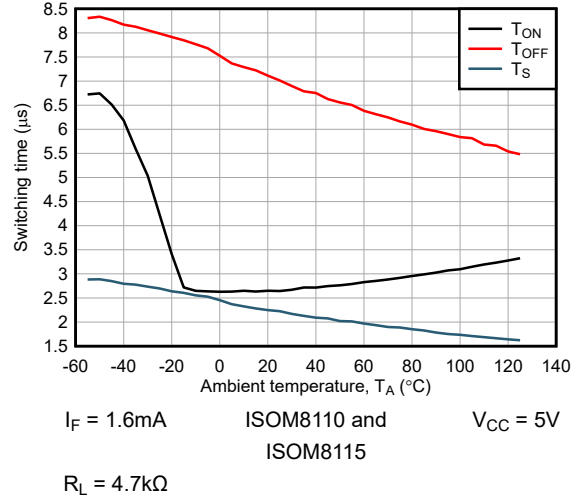


Figure 6-26. Switching Time vs Ambient Temperature

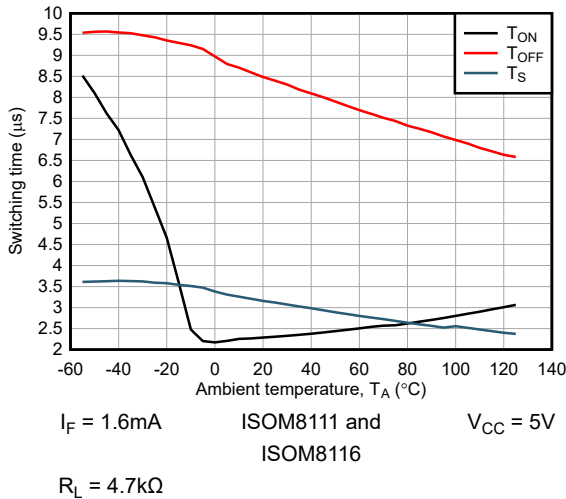


Figure 6-27. Switching Time vs Ambient Temperature

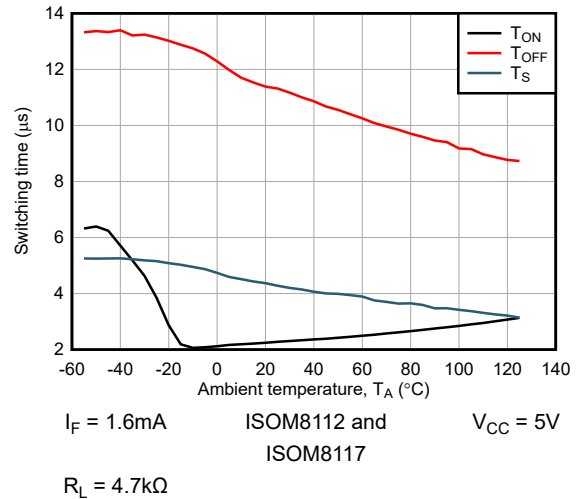


Figure 6-28. Switching Time vs Ambient Temperature

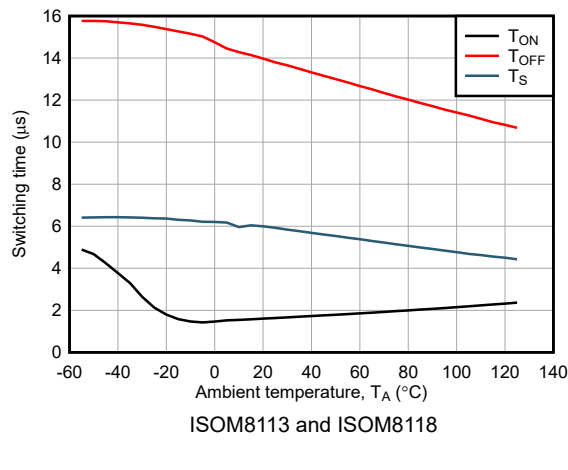


Figure 6-29. Switching Time vs Ambient Temperature

7 Parameter Measurement Information

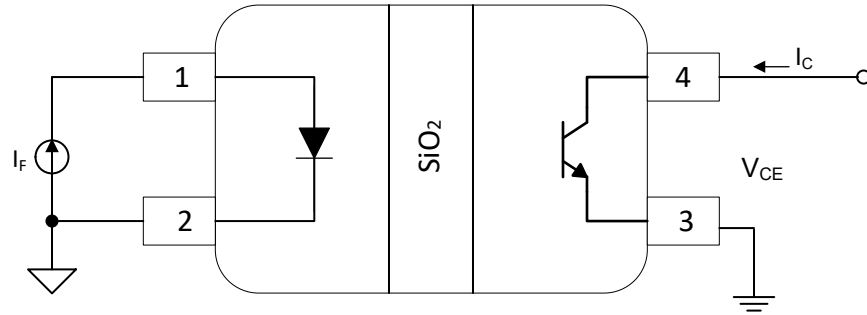


Figure 7-1. ISOM811x Test Circuit for CTR

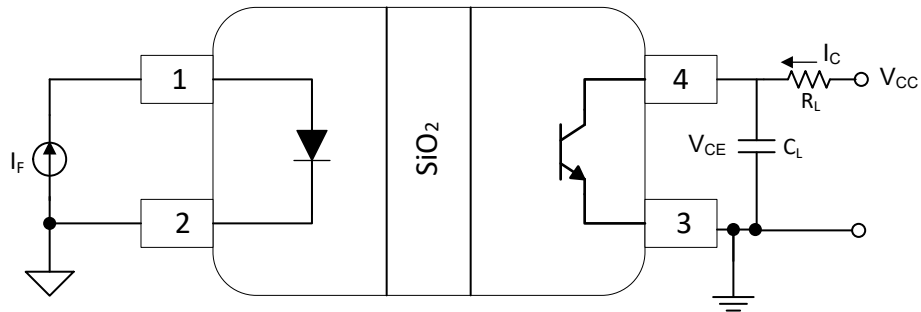


Figure 7-2. ISOM811x Test Circuit for Switching Timing

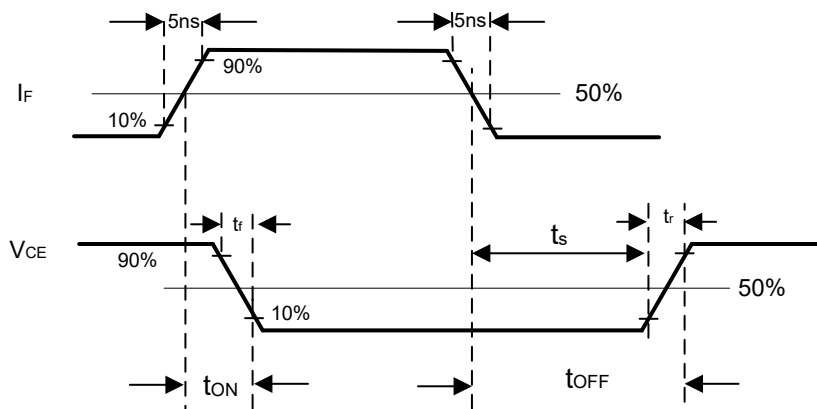


Figure 7-3. ISOM811x Switching Timing Waveforms

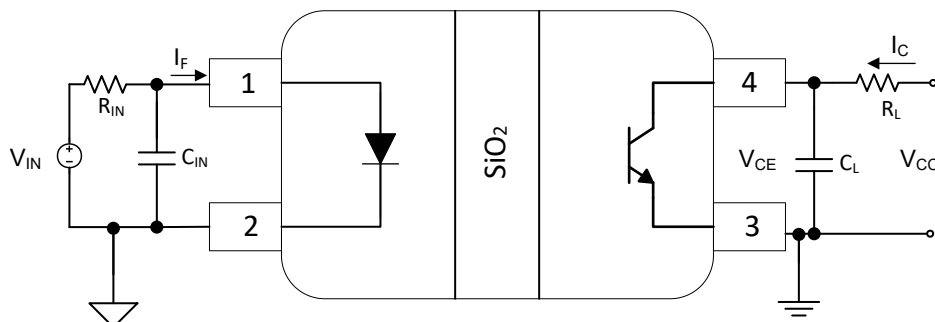


Figure 7-4. ISOM811[0-3] Test Circuit for Bandwidth

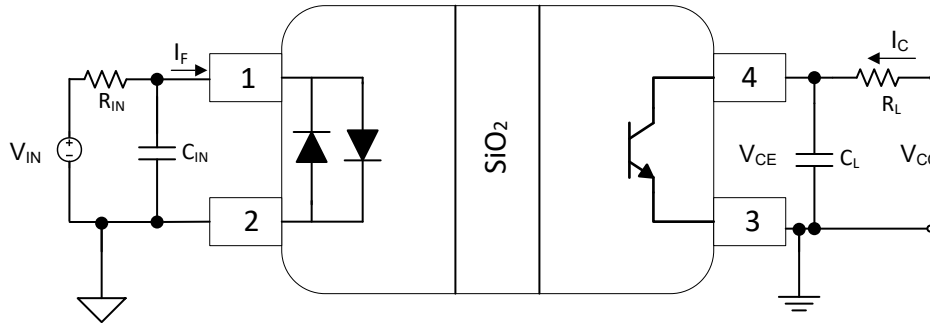


Figure 7-5. ISOM811[5-8] Test Circuit for Bandwidth

8 Detailed Description

8.1 Overview

The ISOM811x opto-emulators are single-channel, pin-to-pin upgrades for many traditional optocouplers. While standard optocouplers use an LED as the input stage, ISOM811x uses an emulated LED as the input stage. The input and output stages are isolated by TI's proprietary silicon dioxide-based (SiO_2) isolation barrier. This isolation technology makes ISOM811x resistant to the wear-out effects found in optocouplers that degrade performance with increasing temperature, forward current, and device age. Ordering options include four different ranges of current transfer ratio (CTR) and input options supporting uni-polar and bi-polar DC flow.

The ISOM811x family of devices isolate DC and bidirectional DC signals and offer performance, reliability, and flexibility advantages not available with traditional optocouplers.

The functional block diagram of ISOM811x devices are shown in Section 8.2. The input signal is transmitted across the isolation barrier using an on-off keying (OOK) modulation scheme. The transmitter sends a high-frequency carrier across the barrier that contains information on how much current is flowing through the input pins. The receiver demodulates the signal after advanced signal conditioning and produces the signal through the output stage. These devices also incorporate advanced circuit techniques to maximize bandwidth and minimize radiated emissions. Figure 8-3 shows conceptual details of how the OOK scheme works.

8.2 Functional Block Diagram

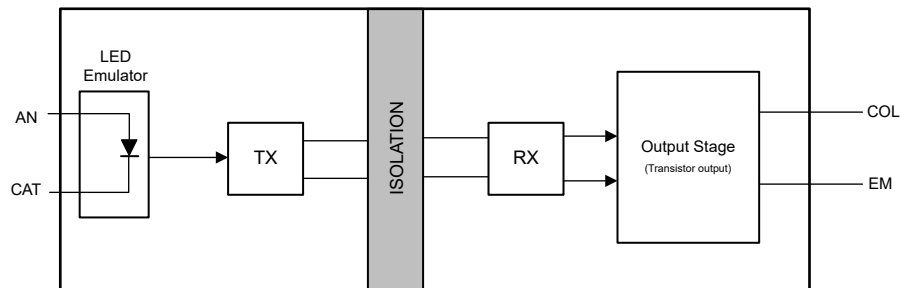


Figure 8-1. Conceptual Block Diagram of an Opto-emulator ISOM811[0-3]

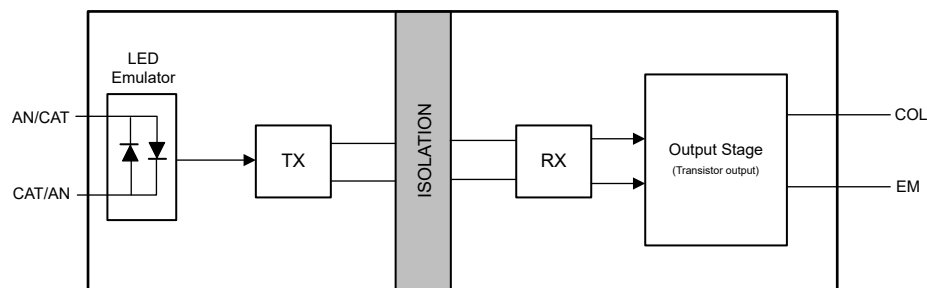


Figure 8-2. Conceptual Block Diagram of an Opto-emulator ISOM811[5-8]

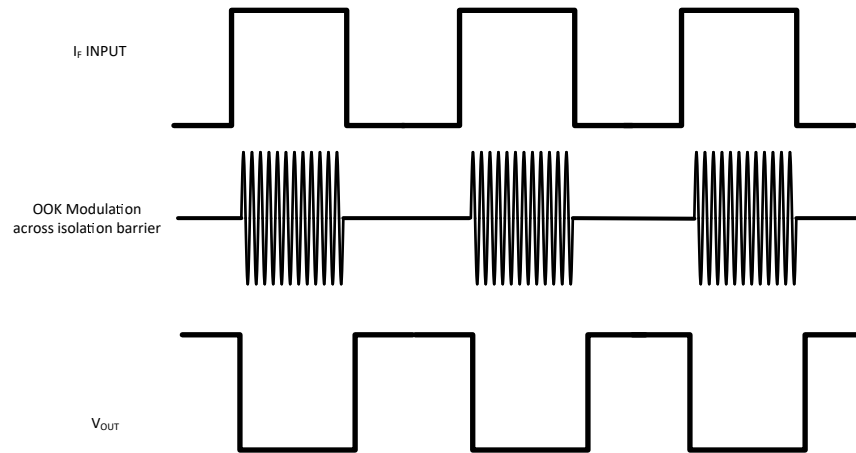


Figure 8-3. On-off Keying (OOK) Based Modulation Scheme

8.3 Feature Description

The ISOM811x devices isolate DC and bidirectional DC signals. ISOM811x has an open-collector output with multiple CTR options. Depending on the package option being used, these devices can support an isolation withstand voltage (V_{ISO}) up to $5000V_{RMS}$ between side 1 and side 2.

8.4 Device Functional Modes

Table 8-1 lists the functional modes for the ISOM811x devices.

Table 8-1. Function Table

| CTR ¹ | PART NUMBER | Input type |
|------------------|-------------|------------------|
| 100% to 155% | ISOM8110 | DC |
| | ISOM8115 | Bidirectional DC |
| 150% to 230% | ISOM8111 | DC |
| | ISOM8116 | Bidirectional DC |
| 255% to 380% | ISOM8112 | DC |
| | ISOM8117 | Bidirectional DC |
| 375% to 560% | ISOM8113 | DC |
| | ISOM8118 | Bidirectional DC |

1. $I_F = 5\text{mA}$, $T_A = 25^\circ\text{C}$, $V_{CE} = 5\text{V}$.

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The ISOM811x devices are single-channel opto-emulators with LED-emulator input and transistor output. The devices use on-off keying modulation to transmit data across the isolation barrier. The input stage is isolated from the driver stage by TI's proprietary silicon dioxide-based (SiO_2) isolation barrier which provides robust isolation. With wider temperature ratings than traditional optocouplers, ISOM811x opto-emulators can provide reliable signal isolation in harsh environments.

The ISOM811x devices are capable of sinking current when subjected to an external load being connected to the device. Like typical transistor output optocouplers, the output current depends on the input current level (I_F) and the current transfer ratio (CTR). With multiple CTR options (100% - 560%), low input current, high bandwidth, low turn-off delay, low power consumption, and wider temperature range, ISOM811x devices are designed for use in a variety of industries such as factory automation, building automation, e-mobility, automotive, avionics, medical, and power delivery.

9.1.1 Typical Application

ISOM811x opto-emulators are commonly used in the feedback control loops of isolated power supplies. These devices are used to solve the problem of feeding back current while isolating the primary and secondary domains to regulate the output voltage.

In power supplies, the output voltage is isolated from main input voltage using a transformer (for example: flyback converter). For analog power supply units, the controller IC is typically on the primary side of the transformer. For closed loop control, measuring the output voltage on the secondary side and feeding the voltage back to the controller on the primary is necessary. The most common method of achieving this design is using an opto-emulator such as ISOM811x, error amplifier (commonly TL431), and a voltage comparator to form a feedback loop across the isolation barrier

[Figure 9-1](#) illustrates a typical isolated power supply. In this implementation, the output voltage is sensed by an error amplifier using the resistor divider (R1 and R2). Depending on the voltage level that the error amplifier senses, the TL431 can drive the current of the ISOM811x higher or lower which is then compared to a voltage reference. The information is passed across the isolation barrier through ISOM811x to the primary side, where the PWM control circuit modulates the power stage to regulate the output voltage. The TL431 and ISOM811x play an important role for stable feedback and control loop.

The ISOM811x devices enable improvements in transient response, reliability, and stability as compared to commonly used optocoupler as the CTR is stable over wide temperature range providing a small, low-cost, highly reliable, and easy-to-design implementation.

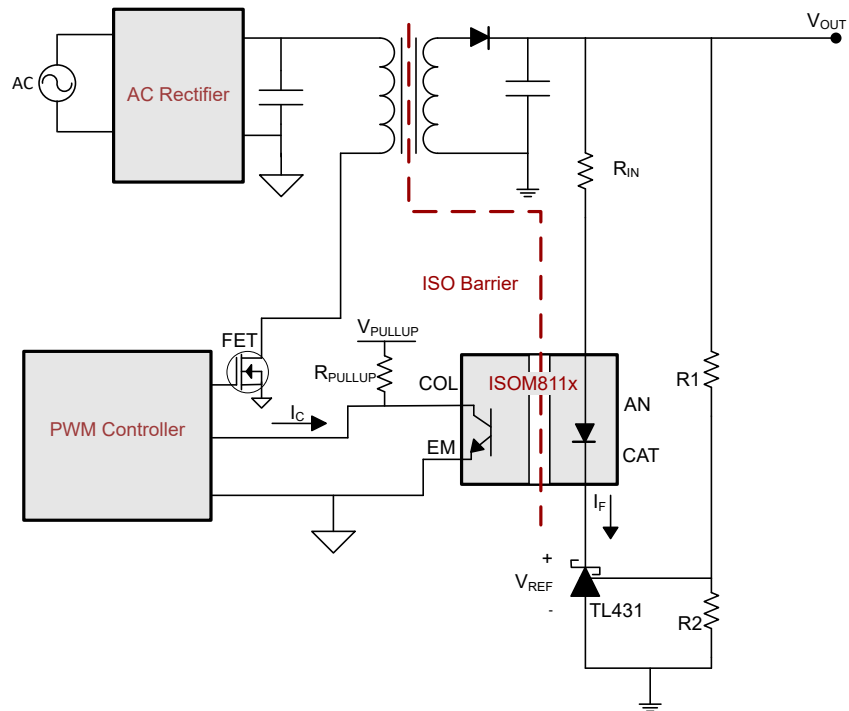


Figure 9-1. Typical Isolated Power Supply Application Using ISOM811x

9.1.1.1 Design Requirements

To design with ISOM811x devices, use the parameters listed in [Table 9-1](#).

Table 9-1. Design Parameters

| PARAMETER | VALUE |
|---|-------------------------|
| Input forward current range, I_F | 0.7mA (min), 20mA (max) |
| Current transfer ratio at $I_F = 5\text{mA}$, CTR | 100% to 155% |
| Collector current tolerance, I_C | 50mA (max) |
| Collector-emitter voltage (saturation), $V_{CE(SAT)}$ | 0.3V (max) |
| Input forward voltage, V_F | 1.2V (typ) |

9.1.1.2 Detailed Design Procedure

This section presents the design procedure for using the ISOM811x opto-emulators. External components must be selected to operate ISOM811x within the *Recommended Operating Conditions*. The following recommendations on component selection focus on the design of a typical feedback control loop for an isolated flyback converter.

When using an optocoupler in a feedback control loop for an isolated power supply, many variables can affect how to properly use the optocoupler, including the output voltage of the power supply and the type of controller the feedback signal is being sent to. For this example, assume that the output voltage of this power supply, V_{OUT} , is 5V, and the PWM controller being used has an integrated error amplifier with a COMP pin that acts as the output of this amplifier.

9.1.1.2.1 Sizing R_{PULLUP}

The transistor output of ISOM811x operates in active, saturation, reverse, and cut-off regions, just like a regular transistor. To verify that the output does not get damaged when the output is saturated, the minimum value of R_{PULLUP} can be calculated for a given pull-up voltage, V_{PULLUP} , in [Equation 1](#):

$$R_{PULLUP} > \frac{V_{PULLUP} - V_{CE(SAT)}}{I_{C(MAX)}} \quad (1)$$

For the example of a feedback loop application, we can calculate the minimum required value for R_{PULLUP} for a given V_{PULLUP} of 10V, the maximum output voltage of the error amplifier ($V_{COMP(MAX)}$) of 2.5V, and the maximum output current of the error amplifier is internally clamped at 1.6mA. The equation to calculate R_{PULLUP} is shown in Equation 2:

$$R_{PULLUP} > \frac{V_{PULLUP} - V_{COMP(MAX)}}{I_{COMP(CLAMP)}} = \frac{10V - 2.5V}{1.6mA} = 4.66k\Omega \quad (2)$$

9.1.1.2.2 Sizing R_{IN}

The input side of ISOM811x is current-driven. To limit the amount of current flowing into the AN pin, placing a series resistor, R_{IN} , in series with the input as shown in Figure 9-1 is recommended.

Depending on how the ISOM811x device is being used, the value of R_{IN} can vary quite a bit. However, at a high level, to make sure the input does not get damaged, the minimum value of R_{IN} can be calculated for a given input voltage, V_{IN} , in Equation 3:



$$R_{IN} > \frac{V_{IN} - V_F}{I_{C(MAX)}} \quad (3)$$




However, in the use case of a feedback loop, R_{IN} directly affects the mid-band gain of the loop. Assuming that the TL431 has been configured to give a reference voltage, V_{REF} , of 2.5V and R_{PULLUP} is 5k Ω , Equation 4 is used to calculate the maximum value of R_{IN} verifying that the V_{COMP} voltage on the primary side can be pulled to the saturation voltage of the ISOM811x, $V_{CE(SAT)}$.

$$R_{IN} < \frac{(V_{OUT} - V_{REF} - V_F) \times R_{PULLUP} \times CTR_{MIN}}{V_{PULLUP} - V_{CE(SAT)}} = \frac{(5V - 2.5V - 1.2V) \times 5k\Omega \times 100\%}{10V - 0.3V} = 670\Omega \quad (4)$$

9.1.1.3 Application Curves

The following curves show ISOM8110 bandwidth performance over different loading conditions where $V_{IN} = 5V_{DC} + 2V_{PK}$. See Figure 7-4 for setup details.

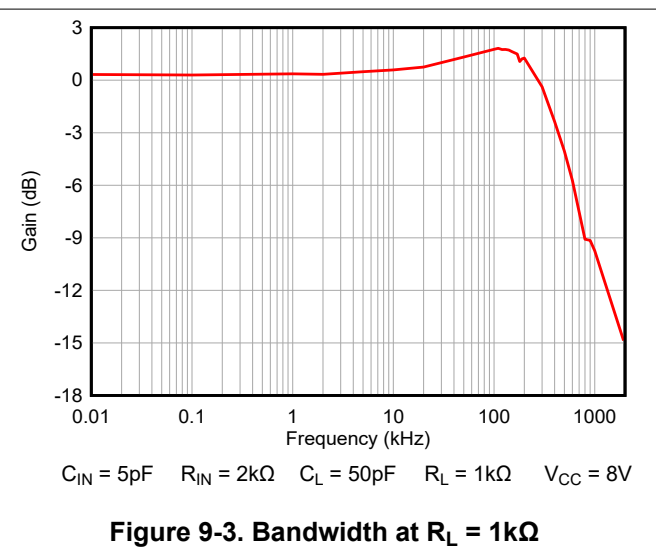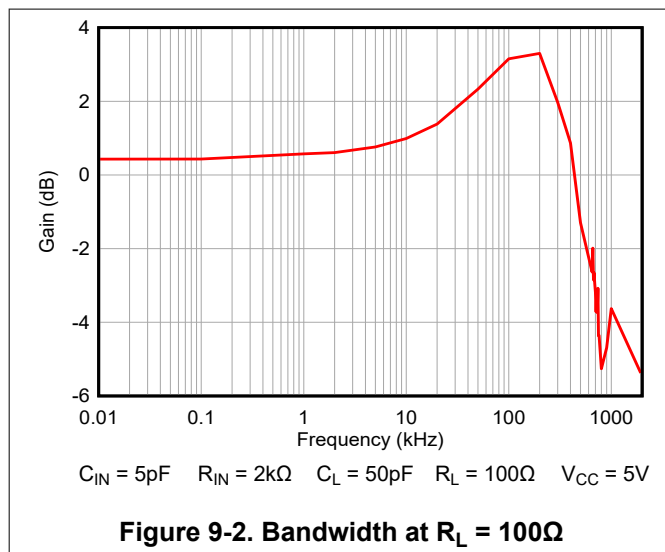

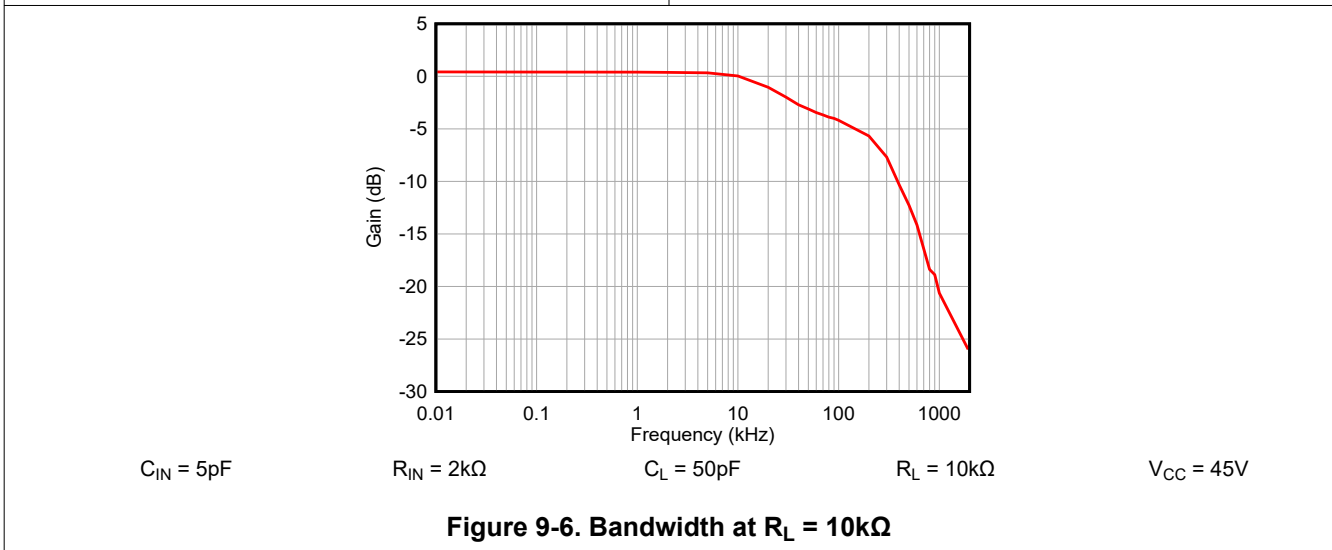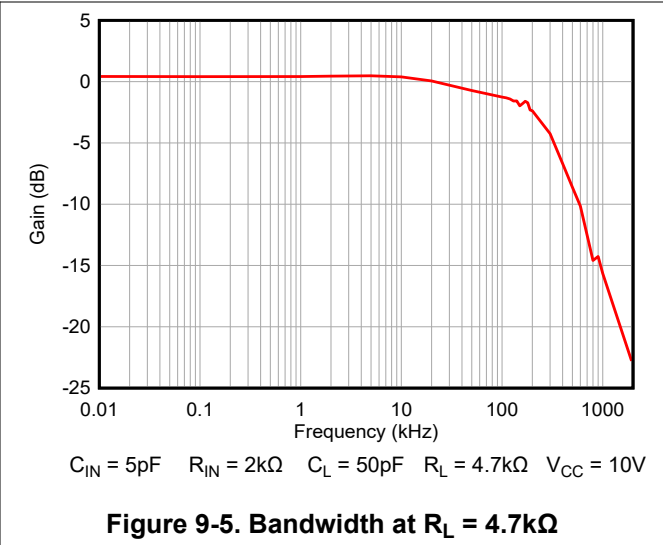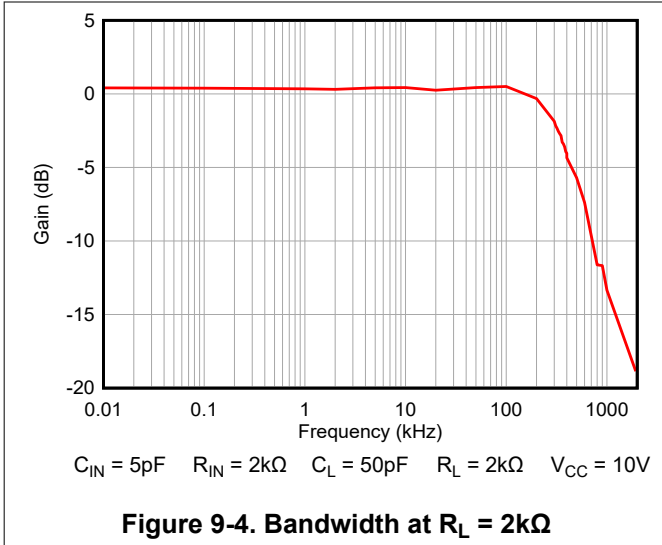

9.1.1.3.1 Insulation Lifetime

Insulation lifetime projection data is collected by using industry-standard Time Dependent Dielectric Breakdown (TDDB) test method. In this test, all pins on each side of the barrier are tied together creating a two-terminal device and high voltage applied between the two sides; see [Figure 9-7](#) for TDDB test setup. The insulation breakdown data is collected at various high voltages switching at 60Hz over temperature. For reinforced insulation, VDE standard requires the use of TDDB projection line with failure rate of less than 1 part per million (ppm). Even though the expected minimum insulation lifetime is 20 years at the specified working isolation voltage, VDE reinforced certification requires additional safety margin of 20% for working voltage and 50% for lifetime which translates into minimum required insulation lifetime of 30 years at a working voltage that's 20% higher than the specified value.

[Figure 9-8](#) shows the intrinsic capability of the isolation barrier to withstand high voltage stress over the lifetime of the barrier. Based on the TDDB data, the intrinsic capability of the insulation is $500V_{RMS}$ with a lifetime of 44. Other factors such as package size, pollution degree, and material group can further limit the working voltage of a component.

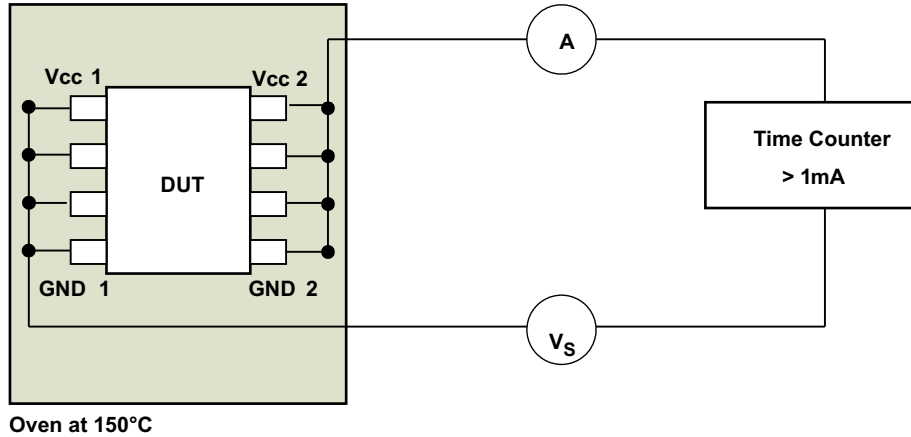


Figure 9-7. Test Setup for Insulation Lifetime Measurement

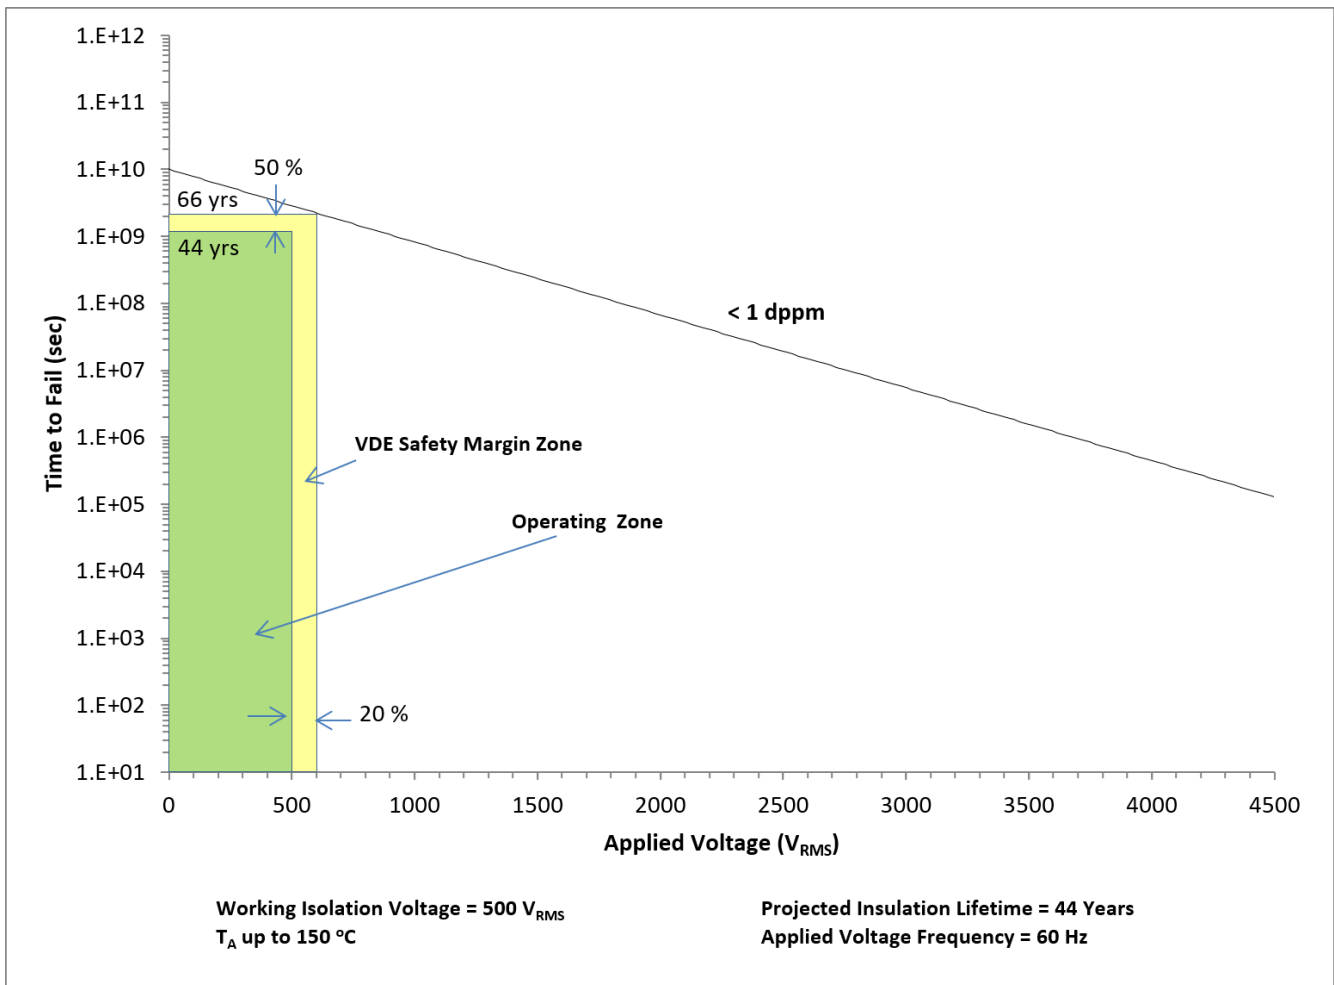


Figure 9-8. Insulation Lifetime Projection Data

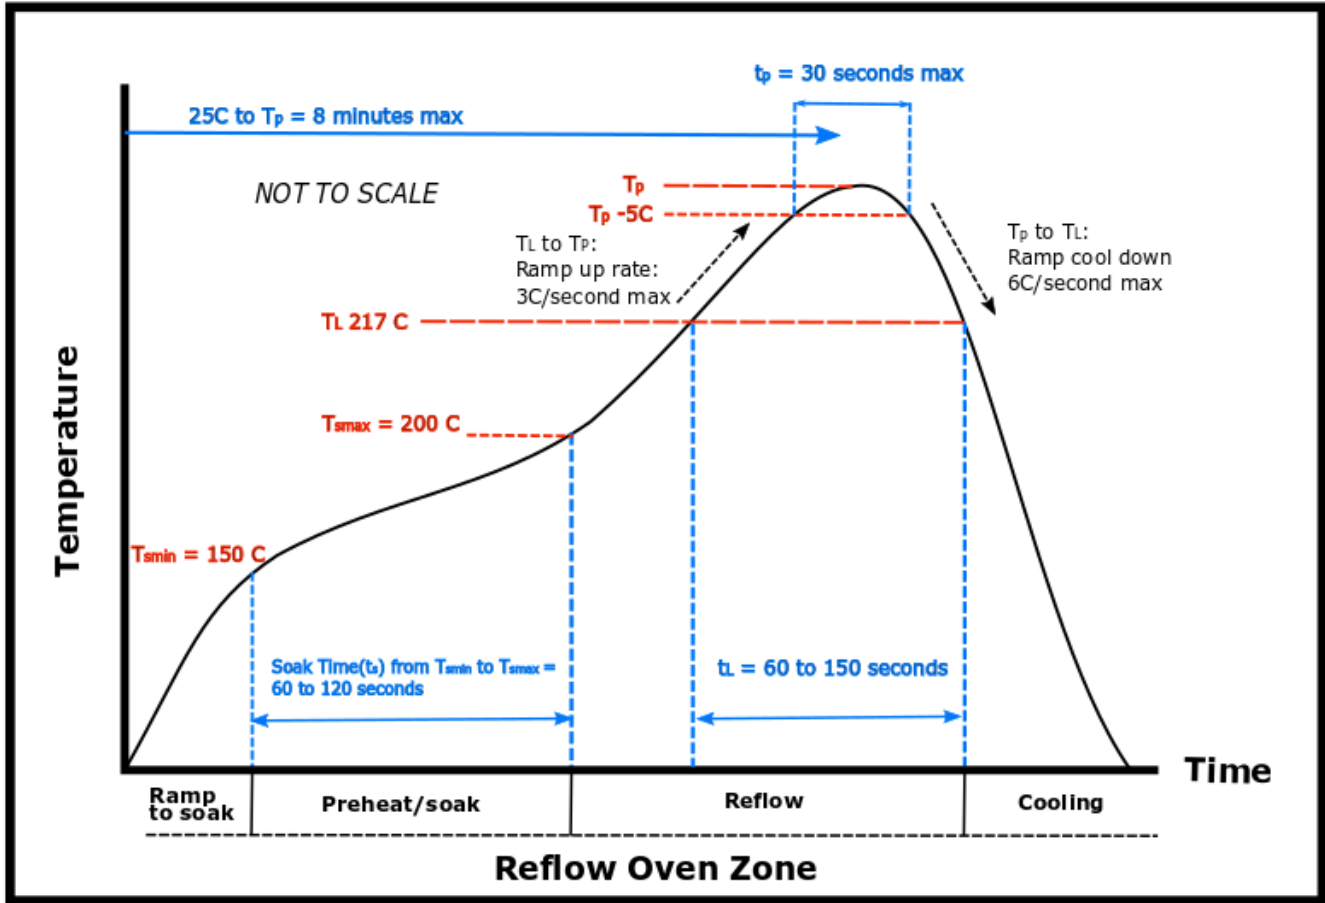


Figure 9-10. TI Representation of the J-STD-020 Classification Profile (not to scale)

For additional details, please refer to [MSL Ratings and Reflow Profiles](#).

10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [Isolation Glossary](#), application note
- Texas Instruments, [Introduction to Opto-Emulators](#), application note
- Texas Instruments, [ISOM8110 Single-Channel Opto-Emulator with Analog Transistor Output Evaluation Module](#), EVM user's guide

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on [Notifications](#) to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

10.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision F (July 2025) to Revision G (September 2025) | Page |
|--|------|
| • Changed to 500Vrms to match VIOWM..... | 5 |
| • Removed 'planned' added certificate information..... | 6 |
| • Added Insulation Lifetime section..... | 23 |

| Changes from Revision E (April 2025) to Revision F (July 2025) | Page |
|---|------|
| • Updated the Electrical Characteristics tables test conditions for the Input and Output sections and added information to the CTR section..... | 4 |
| • Updated the Switching Characteristics table for better readability..... | 4 |

| Changes from Revision D (December 2024) to Revision E (April 2025) | Page |
|---|-------------|
| • Updated the number formatting for figures, tables, and cross-references throughout the document | 1 |
| • Updated with released DFS package information | 1 |

| Changes from Revision C (October 2024) to Revision D (December 2024) | Page |
|---|-------------|
| • Updated the number formatting for figures, tables, and cross-references throughout the document | 1 |
| • Updated with preview DFS package information | 1 |
| • Added DFS package preview information..... | 5 |
| • Updated reverse current..... | 8 |

| Changes from Revision B (August 2024) to Revision C (October 2024) | Page |
|---|-------------|
| • Updated the number formatting for figures, tables, and cross-references throughout the document | 1 |

| Changes from Revision A (December 2023) to Revision B (August 2024) | Page |
|---|-------------|
| • Updated the number formatting for figures, tables, and cross-references throughout the document | 1 |
| • Added <i>Device and Documentation Support</i> section | 27 |

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| ISOM8110DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8110DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8110DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8110DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8110DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8110DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8110DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8110 |
| ISOM8111DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8111DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8111DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8111DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8111DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8111DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8111DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8111 |
| ISOM8112DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8112DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8112DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8112DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8112DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8112DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8112DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8112 |
| ISOM8113DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8113DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8113DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8113DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8113DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8113DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8113DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8113 |
| ISOM8115DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| ISOM8115DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |
| ISOM8115DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |
| ISOM8115DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |
| ISOM8115DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |
| ISOM8115DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |
| ISOM8115DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8115 |
| ISOM8116DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8116DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8116DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8116DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8116DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8116DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8116DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8116 |
| ISOM8117DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8117DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8117DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8117DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8117DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8117DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8117DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8117 |
| ISOM8118DFGR | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |
| ISOM8118DFGR.A | Active | Production | SOIC (DFG) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |
| ISOM8118DFHR | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |
| ISOM8118DFHR.A | Active | Production | SOIC (DFH) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |
| ISOM8118DFSR | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |
| ISOM8118DFSR.A | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |
| ISOM8118DFSR.B | Active | Production | SOIC (DFS) 4 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | 8118 |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

- (2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- (4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF ISOM8110, ISOM8111, ISOM8112, ISOM8113, ISOM8115, ISOM8116, ISOM8117, ISOM8118 :

- Automotive : [ISOM8110-Q1](#), [ISOM8111-Q1](#), [ISOM8112-Q1](#), [ISOM8113-Q1](#), [ISOM8115-Q1](#), [ISOM8116-Q1](#), [ISOM8117-Q1](#), [ISOM8118-Q1](#)
- Enhanced Product : [ISOM8110-EP](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product - Supports Defense, Aerospace and Medical Applications

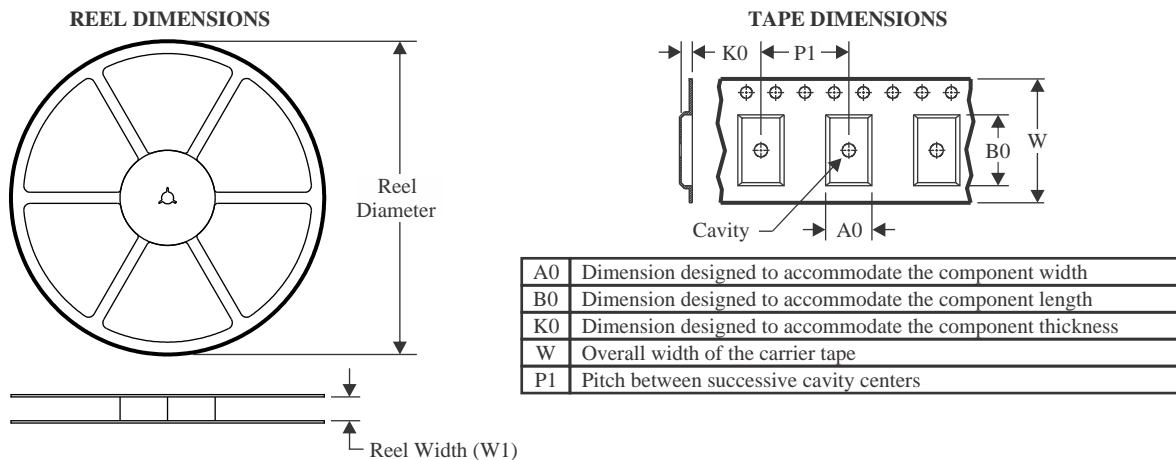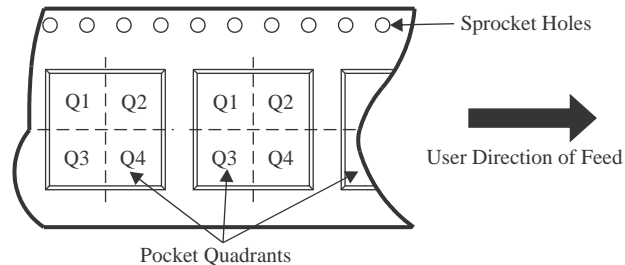TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ISOM8110DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8110DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8111DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8111DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8111DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8112DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8112DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8112DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8113DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8113DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8113DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8115DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8115DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8115DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8116DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8116DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |



| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ISOM8116DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8117DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8117DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8117DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8118DFGR | SOIC | DFG | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.8 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8118DFHR | SOIC | DFH | 4 | 2000 | 330.0 | 12.4 | 8.0 | 3.0 | 2.7 | 12.0 | 12.0 | Q1 |
| ISOM8118DFSR | SOIC | DFS | 4 | 2000 | 330.0 | 12.4 | 10.9 | 3.98 | 2.7 | 12.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ISOM8110DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8110DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8111DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8111DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8111DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8112DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8112DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8112DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8113DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8113DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8113DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8115DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8115DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8115DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8116DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8116DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8116DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8117DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ISOM8117DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8117DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8118DFGR | SOIC | DFG | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8118DFHR | SOIC | DFH | 4 | 2000 | 353.0 | 353.0 | 32.0 |
| ISOM8118DFSR | SOIC | DFS | 4 | 2000 | 353.0 | 353.0 | 32.0 |

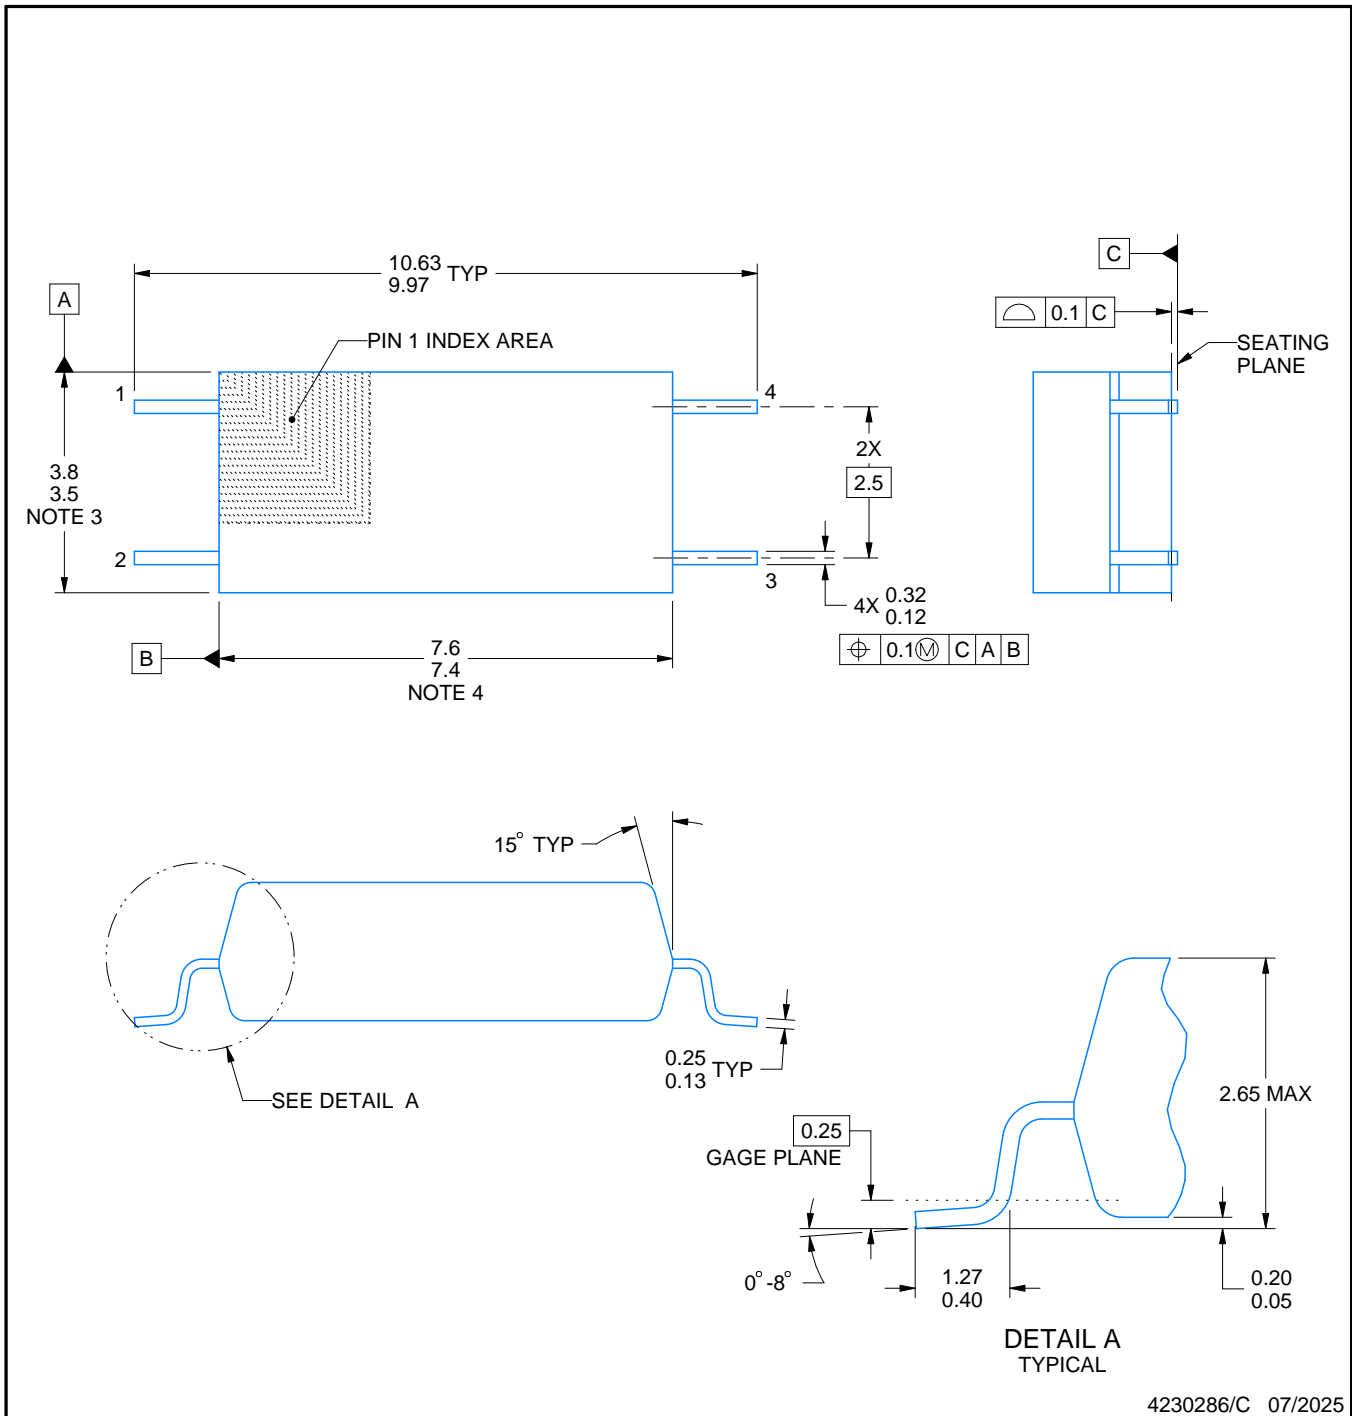

4230286/C 07/2025

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.

EXAMPLE BOARD LAYOUT


DFS0004A

SOIC - 2.65 mm max height

SMALL OUTLINE PACKAGE

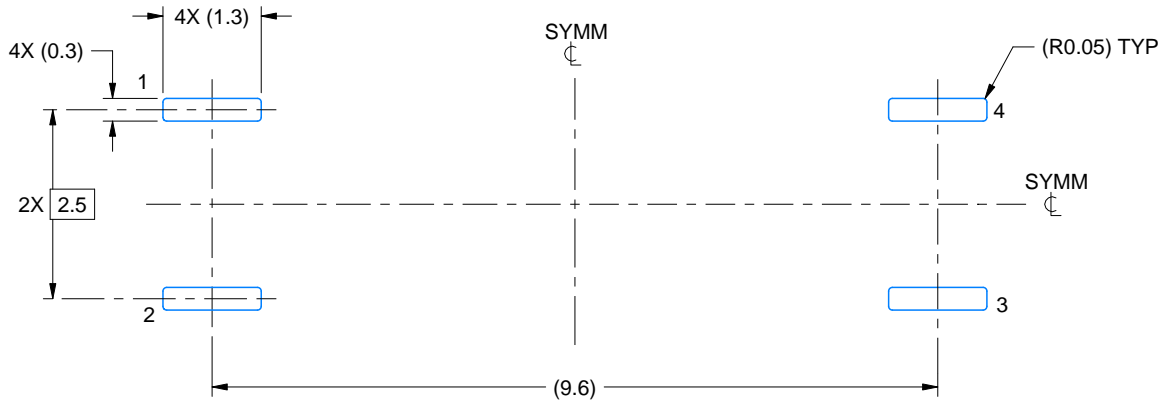

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

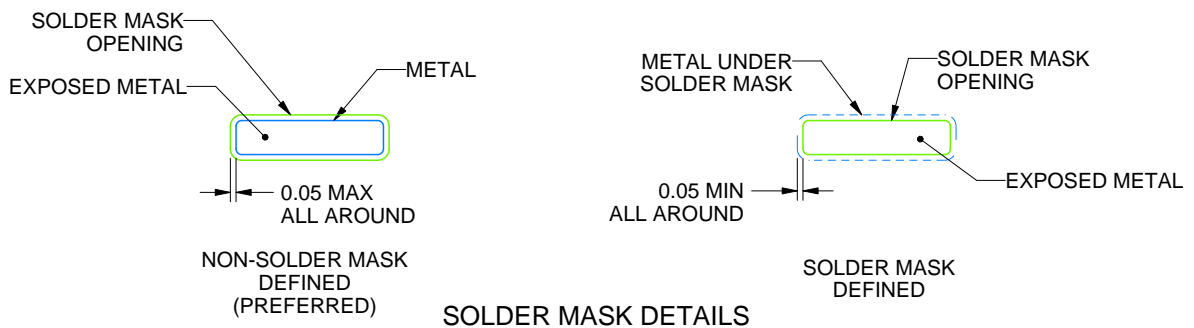

4230286/C 07/2025

NOTES: (continued)


- Publication IPC-7351 may have alternate designs.
- Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DFS0004A

SOIC - 2.65 mm max height

SMALL OUTLINE PACKAGE

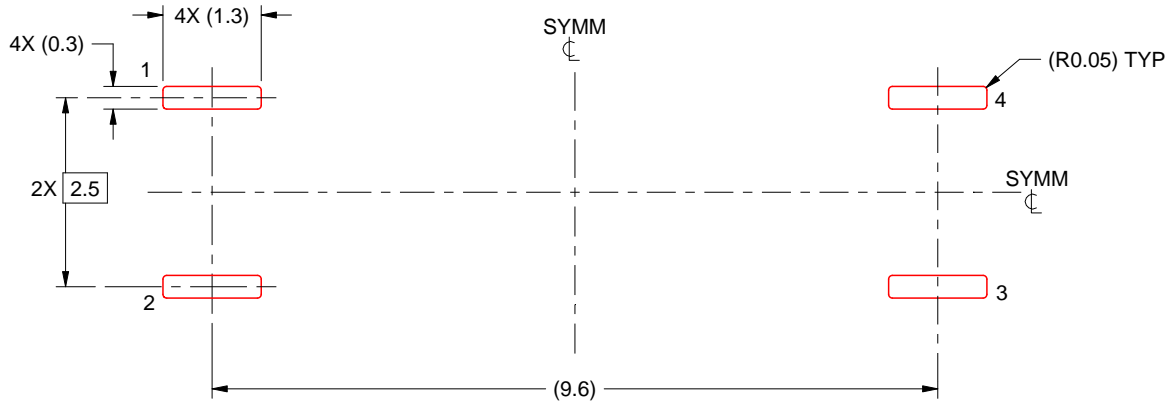

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4230286/C 07/2025

NOTES: (continued)



7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

EXAMPLE BOARD LAYOUT


DFG0004A

SOIC - 2.4 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

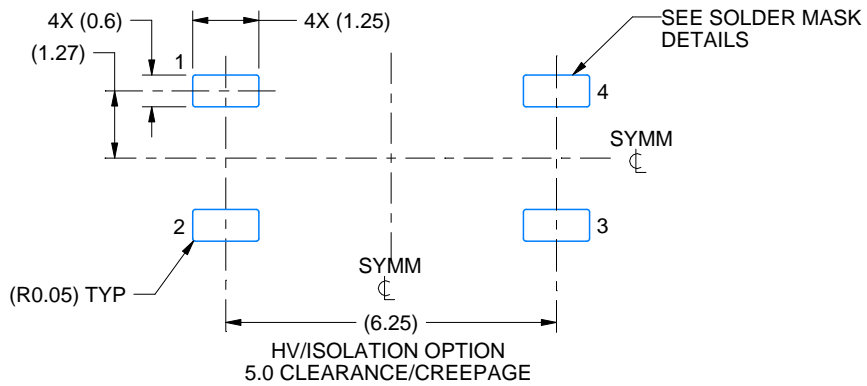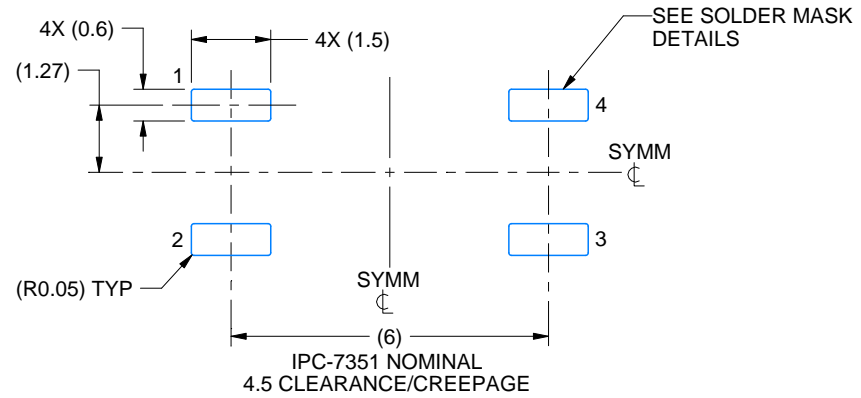

LAND PATTERN EXAMPLE
 EXPOSED METAL SHOWN
 SCALE: 7X

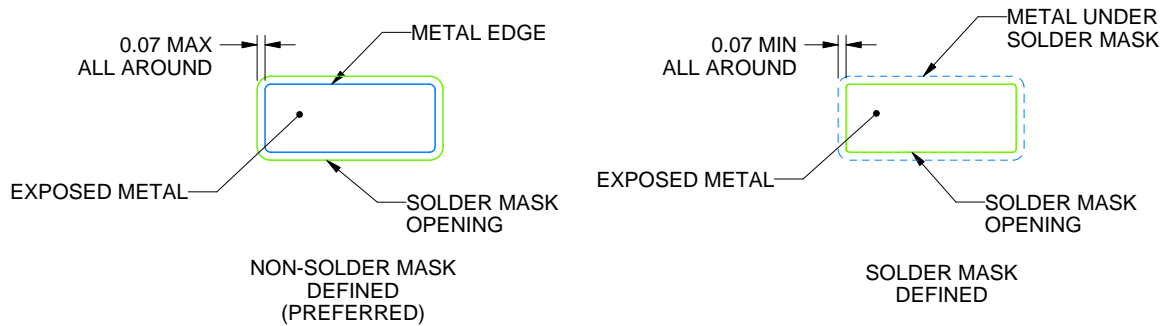

SOLDER MASK DETAILS

4227022/C 07/2024

NOTES: (continued)



5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DFG0004A

SOIC - 2.4 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

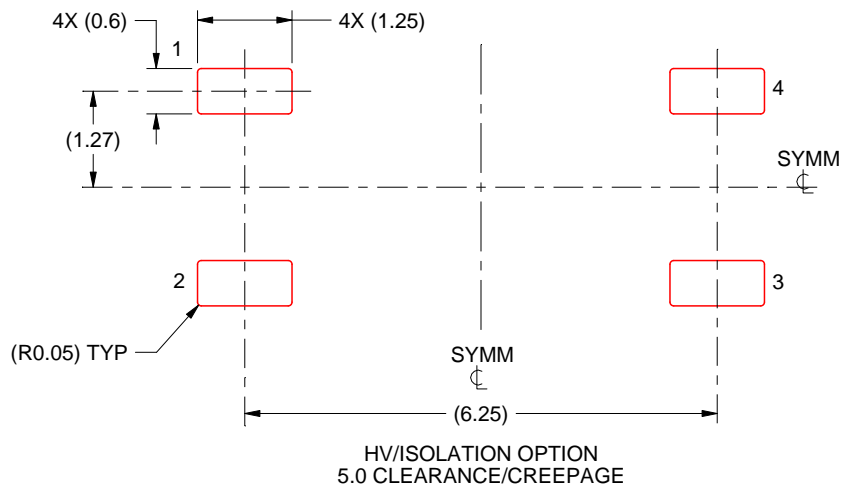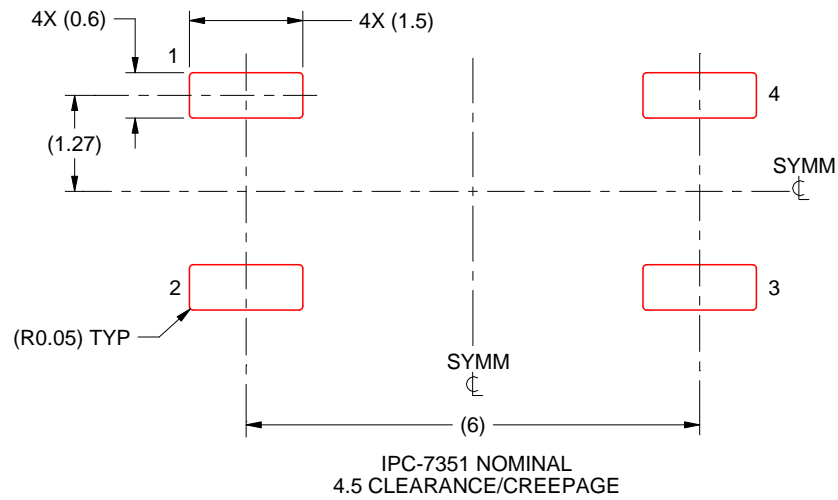

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4227022/C 07/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.


DFH0004A



PACKAGE OUTLINE

SOIC - 2.4 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

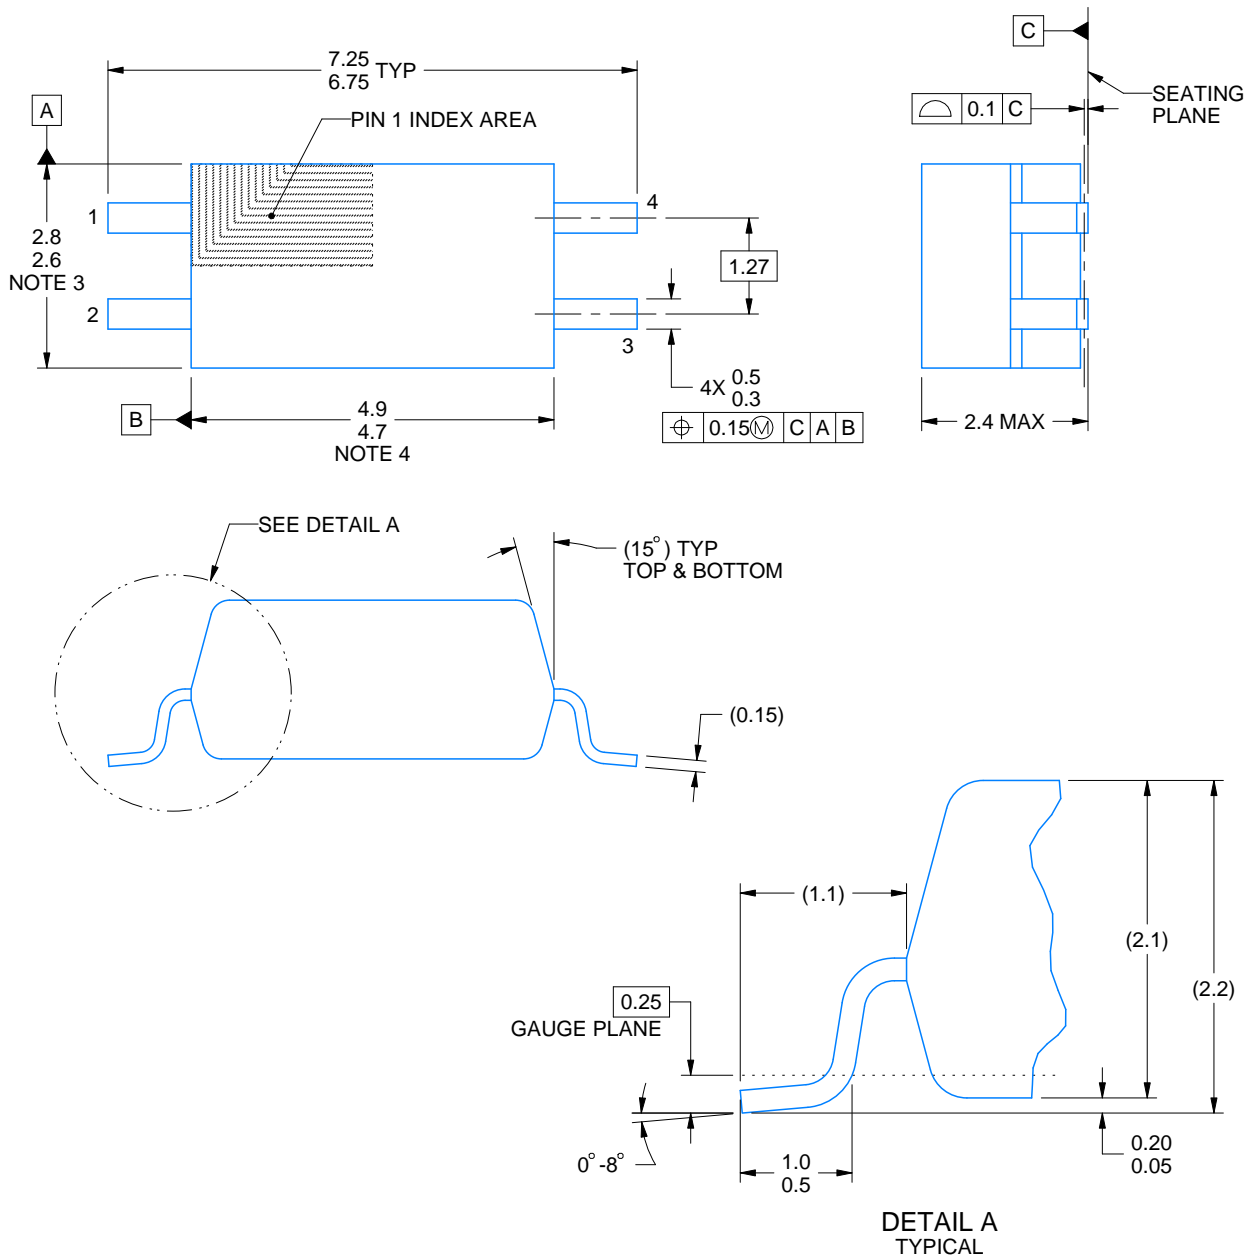

4227156/D 03/2025

NOTES:



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 mm per side.
4. This dimension does not include interlead flash.

EXAMPLE STENCIL DESIGN

DFH0004A

SOIC - 2.4 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

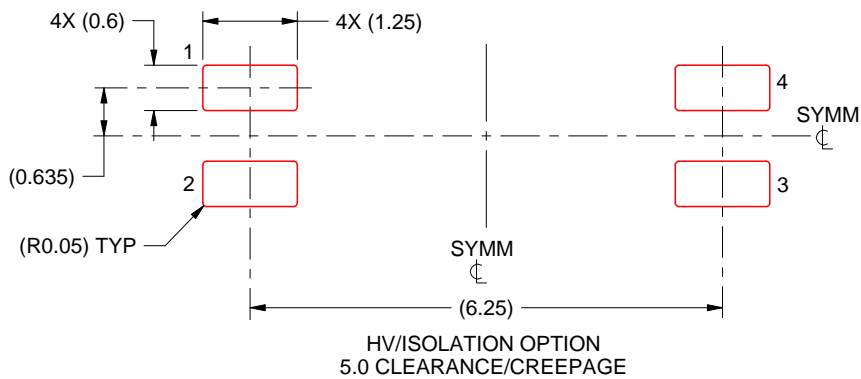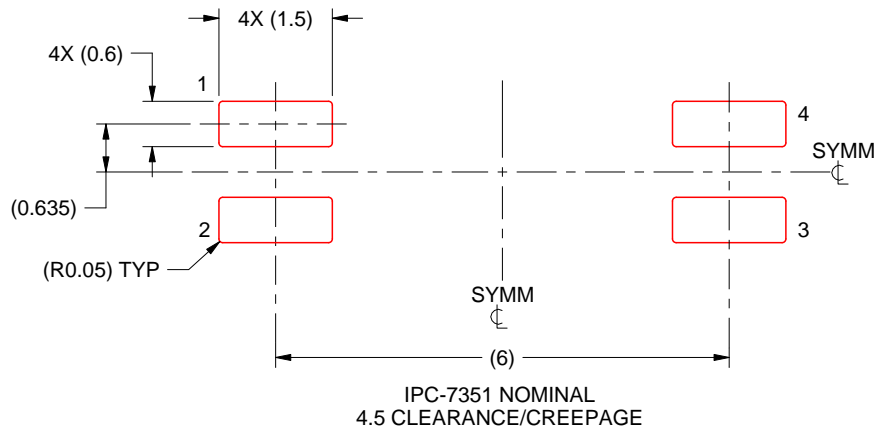

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4227156/D 03/2025

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025