

## LM195QML Ultra Reliable Power Transistors

### FEATURES

- Internal Thermal Limiting
- Greater Than 1.0A Output Current
- 3.0  $\mu$ A Typical Base Current
- 500 ns Switching Time
- 2.0V Saturation
- Base Can be Driven up to 40V Without Damage
- Directly Interfaces with CMOS or TTL
- 100% Electrical Burn-in

### DESCRIPTION


The LM195 is a fast, monolithic power integrated circuit with complete overload protection. This device, which acts as a high gain power transistor, has included on the chip, current limiting, power limiting, and thermal overload protection making it virtually impossible to destroy from any type of overload.

The inclusion of thermal limiting, a feature not easily available in discrete designs, provides virtually absolute protection against overload. Excessive power dissipation or inadequate heat sinking causes the thermal limiting circuitry to turn off the device preventing excessive heating.

The LM195 offers a significant increase in reliability as well as simplifying power circuitry. In some applications, where protection is unusually difficult, such as switching regulators, lamp or solenoid drivers where normal power dissipation is low, the LM195 is especially advantageous.

The LM195 is easy to use and only a few precautions need be observed. Excessive collector to emitter voltage can destroy the LM195 as with any power transistor. When the device is used as an emitter follower with low source impedance, it is necessary to insert a 5.0k resistor in series with the base lead to prevent possible emitter follower oscillations. Although the device is usually stable as an emitter follower, the resistor eliminates the possibility of trouble without degrading performance. Finally, since it has good high frequency response, supply bypassing is recommended.

### Connection Diagram

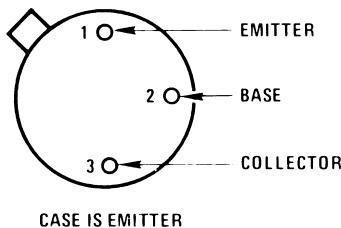


**Figure 1. 5-Pin TO - Bottom View**  
See NDT0003A Package




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.


## Schematic Diagram

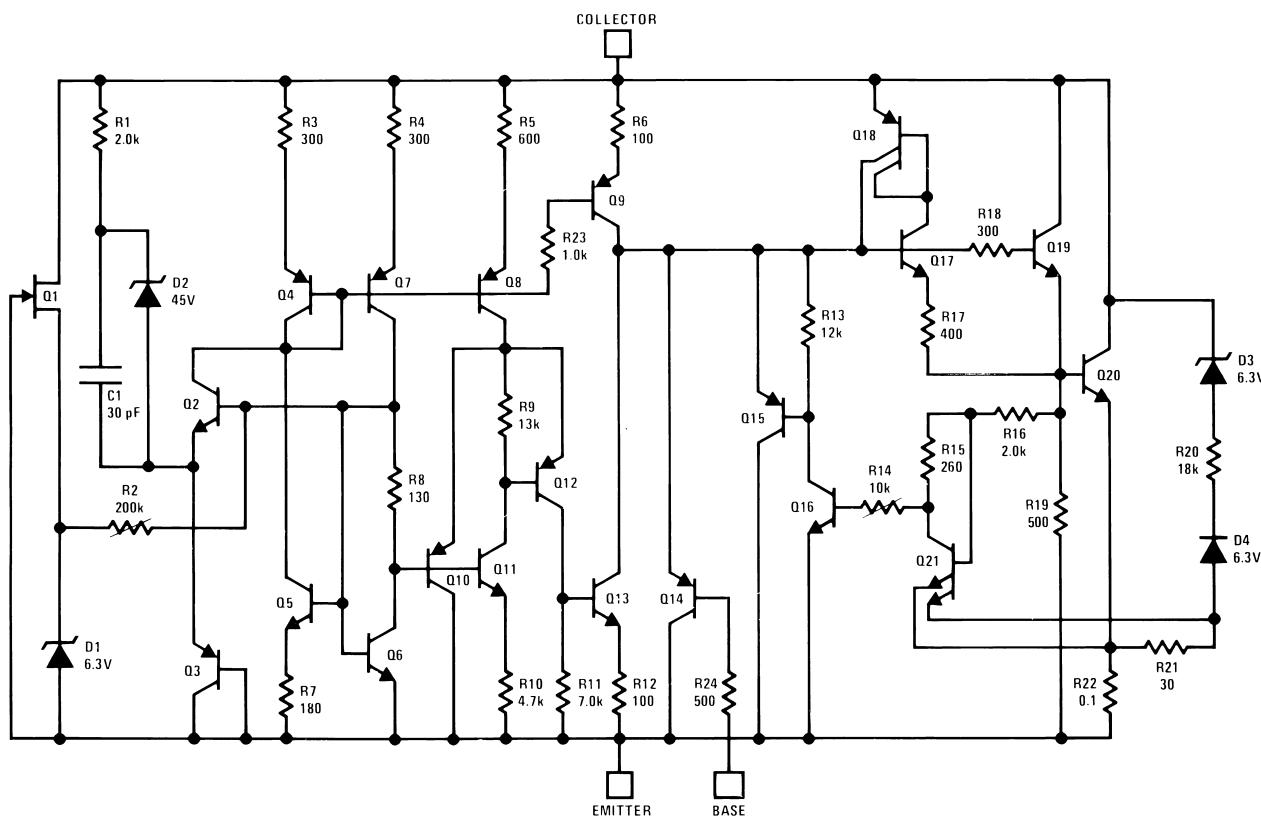

## Simplified Circuit

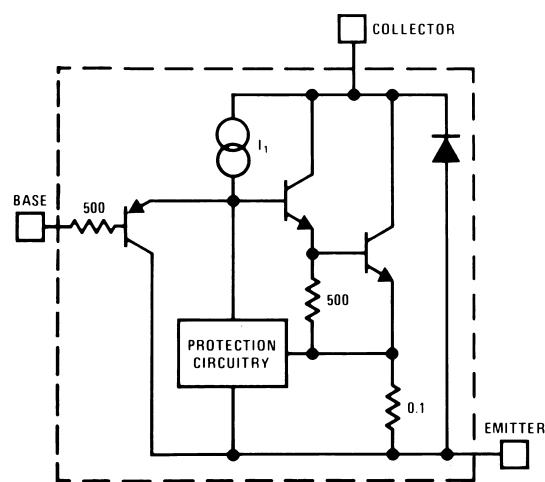

### 1.0 Amp Lamp Flasher

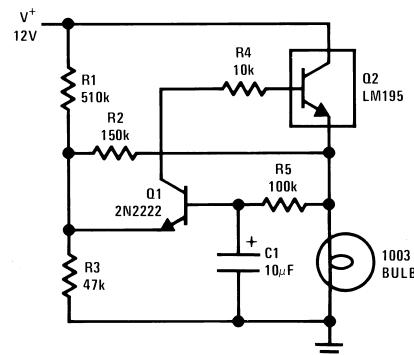

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

**Absolute Maximum Ratings<sup>(1)</sup>**

Collector to Emitter Voltage			42V
Collector to Base Voltage			42V
Base to Emitter Voltage (Forward)			42V
Base to Emitter Voltage (Reverse)			20V
Collector Current			Internally Limited
Power Dissipation <sup>(2)</sup>			Internally Limited
Operating Temperature Range	TO package		-55°C ≤ T <sub>A</sub> ≤ +125°C
Storage Temperature Range			-65°C ≤ T <sub>A</sub> ≤ +150°C
Lead Temperature (Soldering, 10 sec.)			260°C
Thermal Resistance	θ <sub>JA</sub>	TO package; Still Air at 0.5W	192°C/W
		TO package; 500LF/Min Air Flow at 0.5W	66°C/W
	θ <sub>JC</sub>	TO package at 1.0W	29°C/W

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the Electrical Characteristics. The ensured specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.
- (2) The maximum power dissipation must be derated at elevated temperatures and is dictated by T<sub>Jmax</sub> (maximum junction temperature), θ<sub>JA</sub> (package junction to ambient thermal resistance), and T<sub>A</sub> (ambient temperature). The maximum allowable power dissipation at any temperature is P<sub>Dmax</sub> = (T<sub>Jmax</sub> - T<sub>A</sub>)/θ<sub>JA</sub> or the number given in the Absolute Maximum Ratings, whichever is lower.

**Quality Conformance Inspection**
**Table 1. Mil-Std-883, Method 5005 - Group A**

Subgroup	Description	Temp (°C)
1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55
12	Settling time at	+25
13	Settling time at	+125
14	Settling time at	-55

**LM195H/883 Electrical Characteristics DC Parameter Collector to Emitter**

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
V <sub>CE</sub>	Operating Voltage	I <sub>C</sub> ≤ I <sub>Max</sub>	See <sup>(1)</sup>		42	V	1, 2, 3

- (1) Parameter tested go-no-go only.

## LM195H/883 Electrical Characteristics DC Parameter Base to Emitter

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
$BV_{BE}$	Breakdown Voltage	$V_{CE} \leq 42V$	See <sup>(1)</sup>	42		V	1, 2, 3
$I_{SC}$	Collector Current	$V_{CE} \leq 7V$		1.2		A	1
				1		A	2, 3
$V_{Sat}$	Saturation Voltage	$I_C = 1A$		2		V	1, 2
				2.5		V	3
$I_B$	Base Current	$0 \leq V_{BE} \leq 42V$ , $I_C \leq I_{Max}$			5	$\mu A$	1, 2, 3
$I_Q$	Quiescent Current	$V_{CE} = 42V$ , $V_{BE} = 0V$			5	mA	1, 2, 3
$V_{Bk}$	Breakdown Delta $V_{BE}$	$V_C = 46-42V$ , $I_L = 50mA$		-0.03	0.01	V	1
		$V_C = 46-38V$		-0.03	0.01	V	1
		$V_C = 50-42V$		-0.03	0.01	V	1
Thr	Thermal Response	100 $\mu S$		-10	100	mV	1
		500 $\mu S$		-10	70	mV	1
		2mS		-10	50	mV	1
		20mS		-10	10	mV	1

(1) Parameter tested go-no-go only.

## LM195H/883 Electrical Characteristics AC Parameter

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
$t_{ON}$	Response Time	$V_I = 0-2V$ , $R_L = 36\Omega$ , $V_+ = 36V$			1.8	$\mu S$	9, 10, 11
$t_{OFF}$	Response Time	$V_I = 2-0V$ , $R_L = 36\Omega$ , $V_+ = 36V$			1.8	$\mu S$	9, 10, 11

### Typical Performance Characteristics

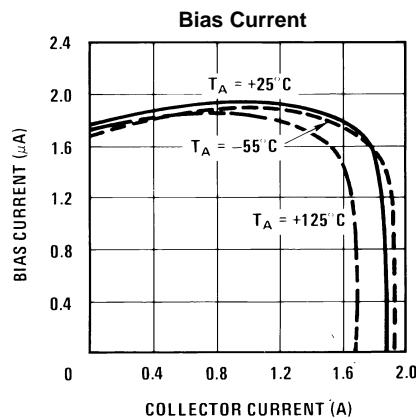


Figure 2.

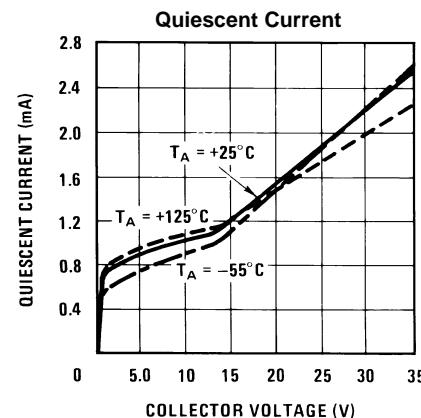


Figure 3.

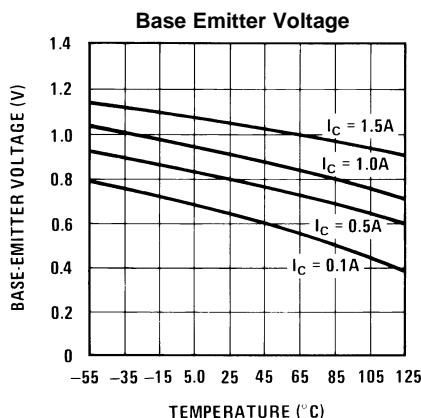


Figure 4.

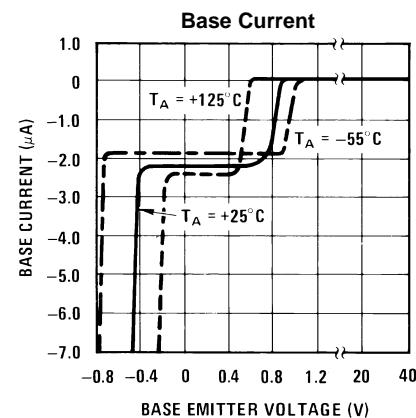


Figure 5.

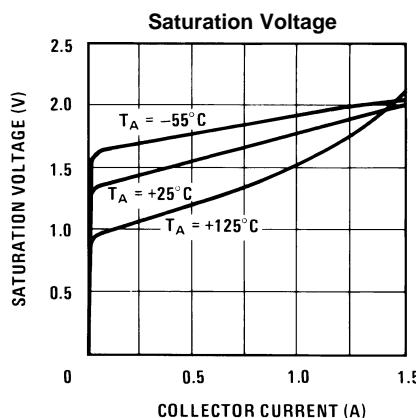


Figure 6.

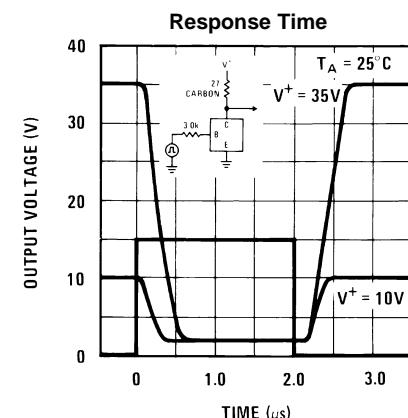


Figure 7.

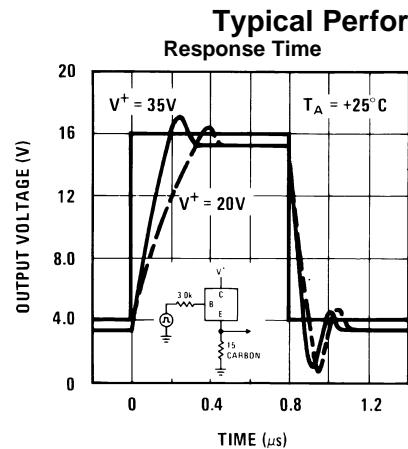


Figure 8.

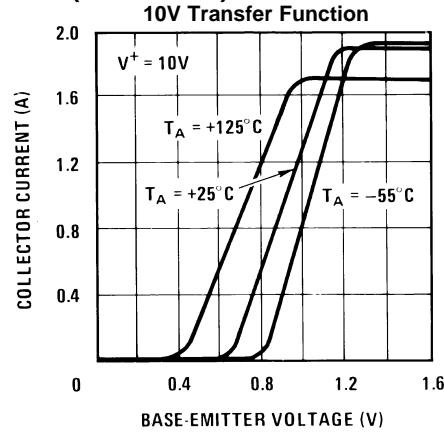


Figure 9.

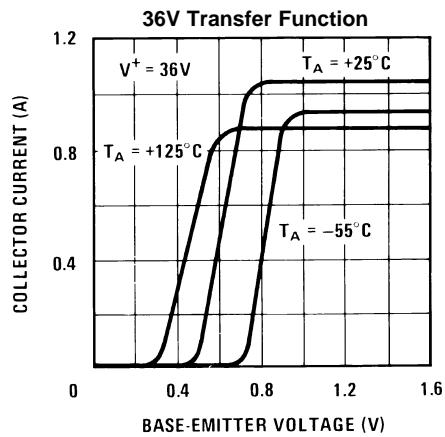


Figure 10.

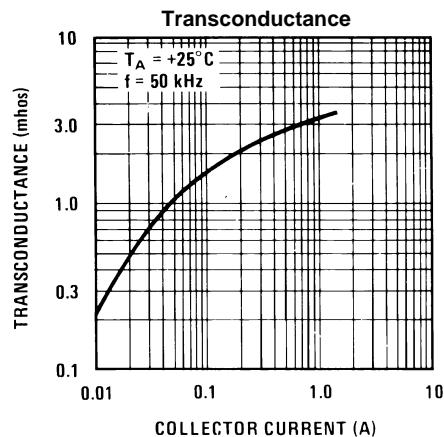


Figure 11.


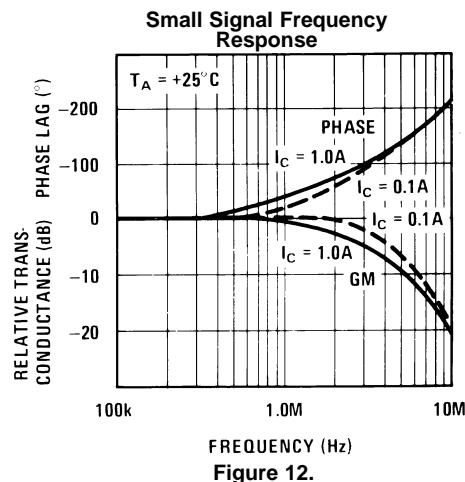


Figure 12.


## Typical Applications

### 1.0 Amp Voltage Follower

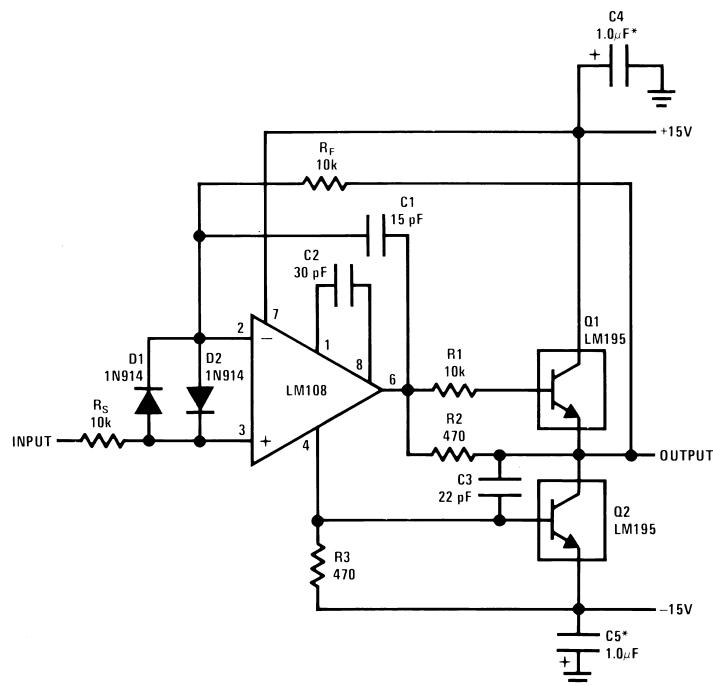

\*Solid Tantalum


### Power PNP

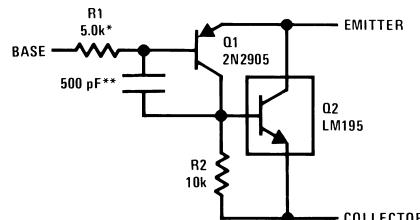


\*Protects against excessive base drive

\*\*Needed for stability


### Time Delay

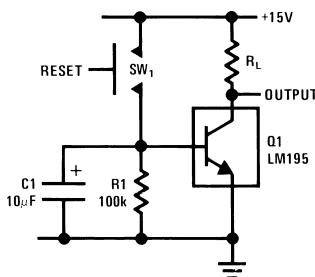

## 1.0 MHz Oscillator

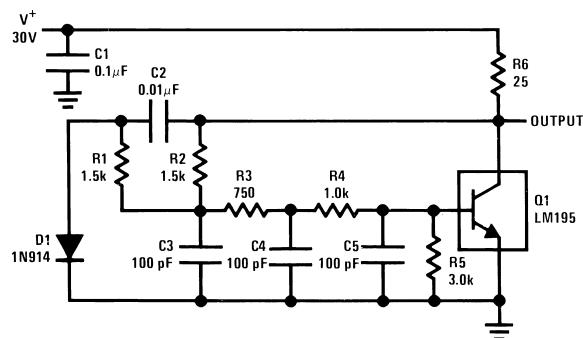


## 1.0 Amp Negative Regulator

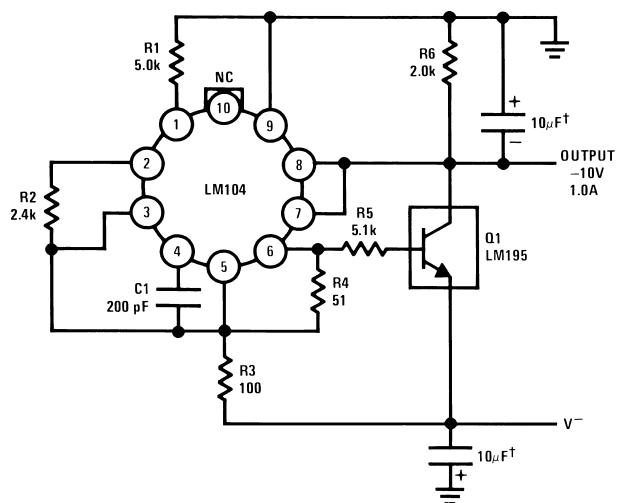


†Solid Tantalum

## 1.0 Amp Positive Voltage Regulator

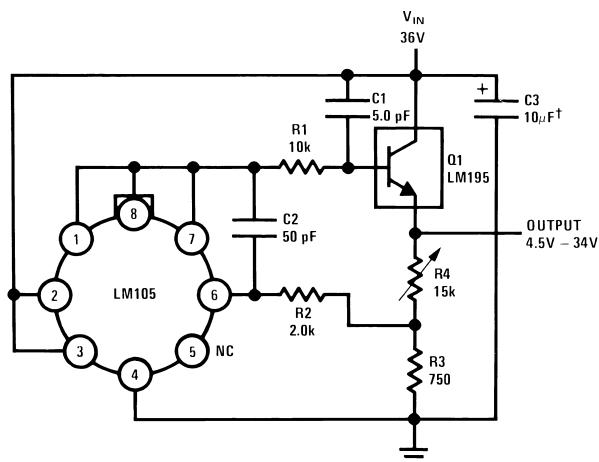


†Solid Tantalum


### Fast Optically Isolated Switch

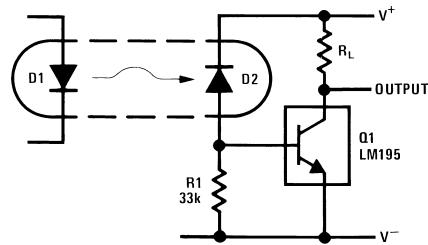


### Optically Isolated Power Transistor

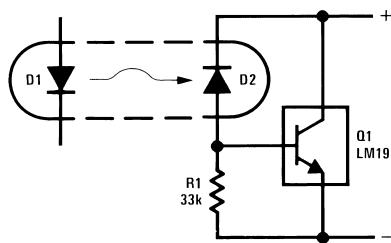


### CMOS or TTL Lamp Interface

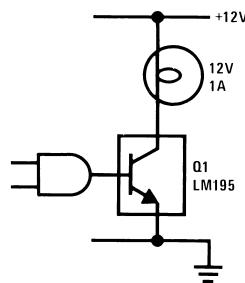

### Two Terminal Current Limiter

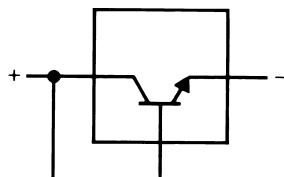


### 40V Switch

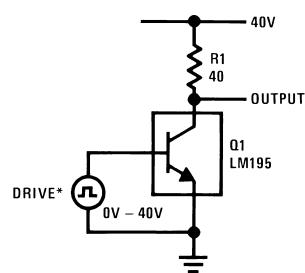


\*Drive Voltage 0V to  $\geq 10V \leq 42V$


### 6.0V Shunt Regulator with Crowbar

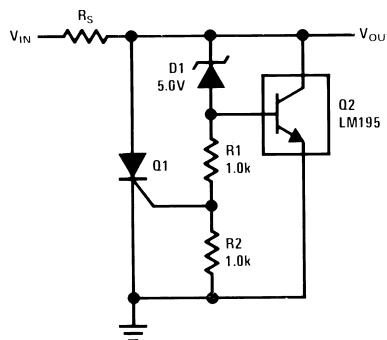

### Two Terminal 100 mA Current Regulator

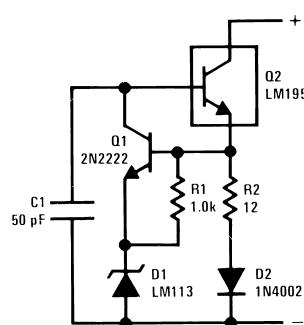


### Low Level Power Switch

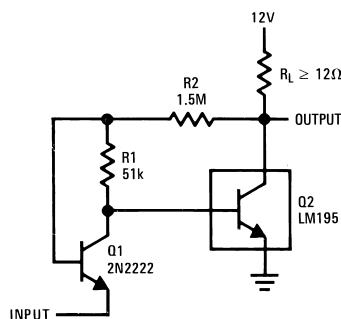

Turn ON = 350 mV

Turn OFF = 200 mV

### Power One-Shot

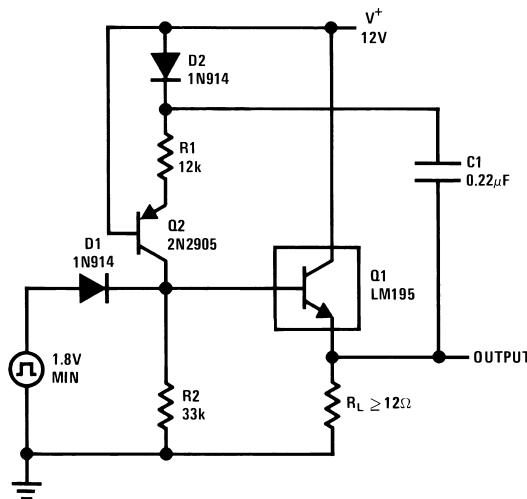


$$T = R_1 C$$

$$R_2 = 3R_1$$


$$R_2 \leq 82k$$

### Emitter Follower

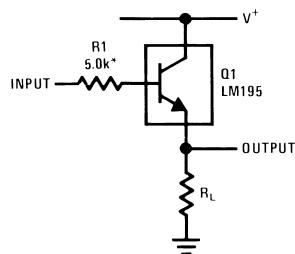


\*Need for Stability

### High Input Impedance AC Emitter Follower

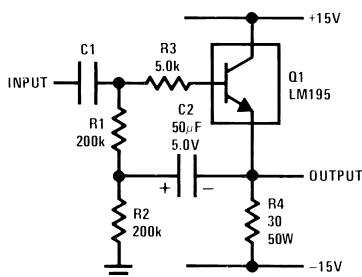


### Fast Follower

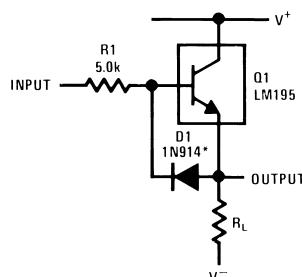

\*Prevents storage with fast fall time square wave drive


### Power Op Amp

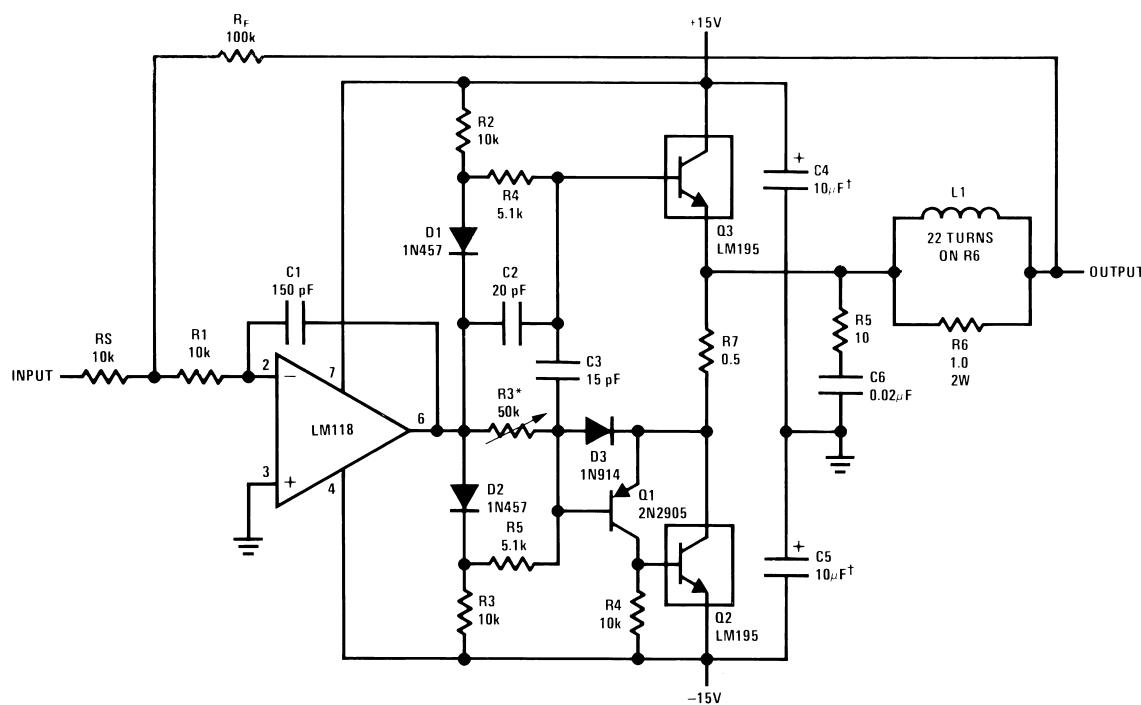

\*Adjust for 50 mA quiescent current

†Solid Tantalum

### 6.0 Amp Variable Output Switching Regulator

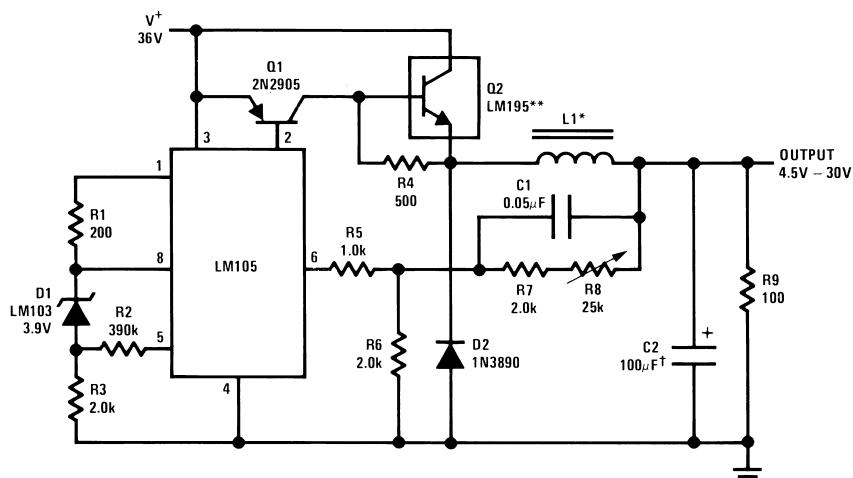

\*Sixty turns wound on Arnold Type A-083081-2 core.

\*\*Four devices in parallel

†Solid tantalum

### REVISION HISTORY SECTION

Released	Revision	Section	Changes
11/30/2010	A	New Release, Corporate format	1 MDS data sheets converted into one Corp. data sheet format. MNLM195-H Rev 0BL will be archived.
03/20/2013	A	All	Changed layout of National Data Sheet to TI format

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
5962-8777801XA	Active	Production	TO (NDT)   3	20   JEDEC TRAY (5+1)	Yes	Call TI	Level-1-NA-UNLIM	-55 to 125	LM195H/883 5962-8777801XA Q A CO 5962-8777801XA Q > T
LM195H/883	Active	Production	TO (NDT)   3	20   JEDEC TRAY (5+1)	Yes	Call TI	Level-1-NA-UNLIM	-55 to 125	LM195H/883 5962-8777801XA Q A CO 5962-8777801XA Q > T

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

---

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

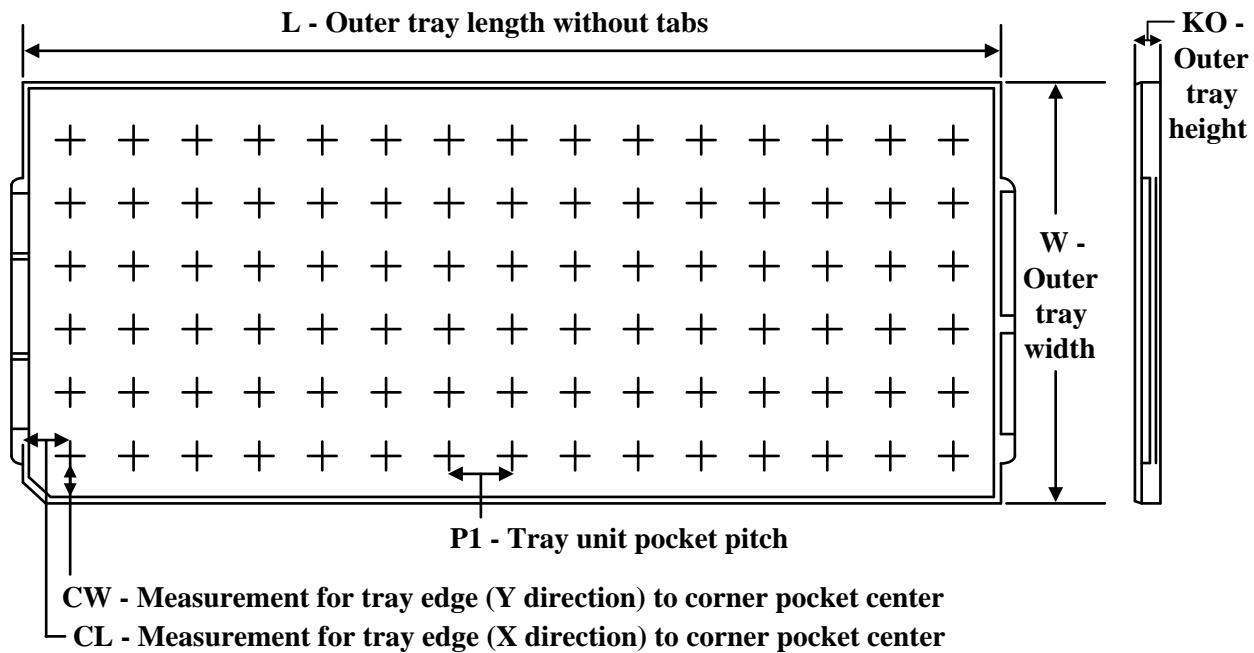**TRAY**


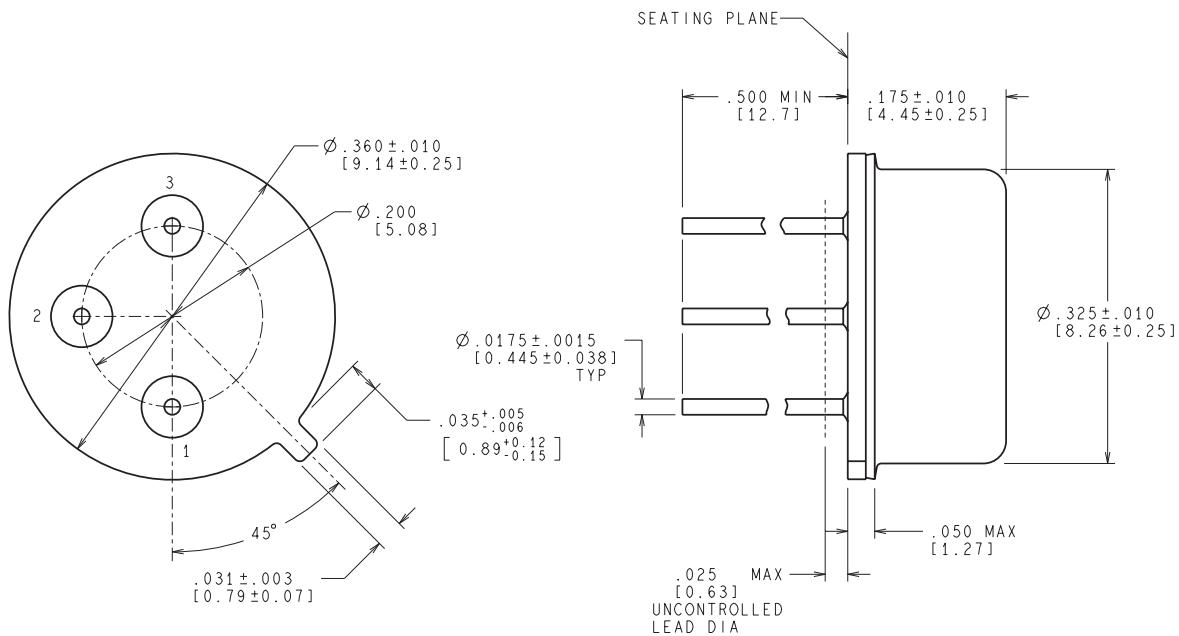
Chamfer on Tray corner indicates Pin 1 orientation of packed units.

\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	KO (µm)	P1 (mm)	CL (mm)	CW (mm)
5962-8777801XA	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54
LM195H/883	NDT	TO-CAN	3	20	2 X 10	150	126.49	61.98	8890	11.18	12.95	18.54

## MECHANICAL DATA

NDT0003A



CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

MIL-PRF-38535  
CONFIGURATION CONTROL

H03A (Rev D)

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025