SN74UVP1G07 Low-Power Single Buffer/Driver With Open-Drain Outputs

1 Features

- Extended low-voltage operaion with 0.63V to 3.6V supply range
- Extended operating temperature range: –40°C to 125°C
- Low power consumption
  - Typical of I_{CC} = 10nA
  - Typical input leakage I_I = 3nA
  - Typical output off-state leakage current I_{OZ} = 100nA
  - Typical Partial-Power-Down I_{OFF} 0.2uA
- 3.6-V tolerant input to support down translation
- Maximum t_{pd} of 9.5ns at 3.3V
- Drop-in compatible with AUP1G family and V_{CC} extended from 0.8V to 0.63V

2 Applications

- PC and Notebooks
- Data Center
- Building Automation
- Mobile Phones
- Wearables
- Wired networking

3 Description

The SN74UVP1G07 device is a single-buffer gate with open-drain output.

Package Information

PART NUMBER	PACKAGE (1)	PACKAGE SIZE(2)
SN74UVP1G07	DBV (SOT-23, 5)	2.90mm × 1.60mm
	DCK (SC-70, 5)	2.00mm × 1.25mm
	DRY (USON, 6)	1.45mm × 1.00mm
	DSF (X2SON, 6)	1.00mm × 1.00mm
	DPW (X2SON, 5)	0.80mm × 0.80mm

(1) For more information, see Section 11.
(2) The body size (length × width) is a nominal value and does not include pins.



Simplified Schematic

ADVANCE INFORMATION

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. ADVANCE INFORMATION for preproduction products; subject to change without notice.

ADVANCE INFORMATION

Table of Contents

1 Features....1
2 Applications....1
3 Description....1
4 Pin Configuration and Functions....3
5 Specifications....4
5.1 Absolute Maximum Ratings....4
5.2 ESD Ratings....4
5.3 Recommended Operating Conditions....4
5.4 Thermal Information....5
5.5 Electrical Characteristics....5
5.6 Switching Characteristics....6
6 Parameter Measurement Information....7
7 Detailed Description....8
7.1 Overview....8
7.2 Functional Block Diagram....8
7.3 Feature Description....8
7.4 Device Functional Modes....8
8 Application and Implementation....9
8.1 Application Information....9
8.2 Typical Application....9
8.3 Power Supply Recommendations....9
8.4 Layout....10
9 Device and Documentation Support....11
9.1 Documentation Support....11
9.2 Receiving Notification of Documentation Updates....11
9.3 Support Resources....11
9.4 Trademarks....11
9.5 Electrostatic Discharge Caution....11
9.6 Glossary....11
10 Revision History....11
11 Mechanical, Packaging, and Orderable Information....12
11.1 Tape and Reel Information....12
11.2 Mechanical Data....14

Copyright © 2026 Texas Instruments Incorporated

4 Pin Configuration and Functions

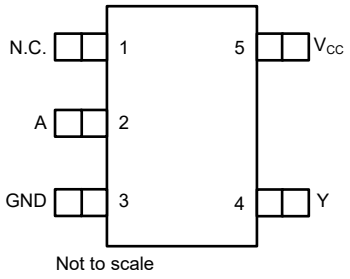


Figure 4-1. DBV or DCK Package, 5-Pin SOT-23 or SC-70 (Top View)




Figure 4-2. DPW Package, 5-Pin X2SON (Top View)

Table 4-1. Pin Functions

PIN			TYPE(1)	DESCRIPTION
NAME	DBV,DCK, DTX	DPW		
N.C.	1	1	—	Not internally connected
A	2	2	I	
GND	3	3	G	Ground pin
Y	4	4	O	Output Y (open drain)
VCC	5	5	P	Power pin

(1) I = Input, O = Output, G = Ground, P = Power




Figure 4-3. DRY or DSF Package, 5-Pin USON or X2SON (Top View)

Table 4-2. Pin Functions

PIN		TYPE(1)	DESCRIPTION
NAME	DSF, DRY		
N.C.	1, 5	—	Not internally connected
A	2	I	Input A
GND	3	G	Ground pin
Y	4	O	Output Y (open drain)
VCC	6	P	Power pin

(1) I = Input, O = Output, G = Ground, P = Power

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT
V_{CC}	Supply voltage range		-0.5	6	V
V_I	Input voltage range(2)		-0.5	6	V
V_O	Output voltage range(2)		-0.5	V_{CC} + 0.5	V
V_O	Output voltage range (2)		-0.5	6	V
I_{IK}	Input clamp current	V_I < 0V		-50	mA
I_{OK}	Output clamp current	V_O < 0V		-50	mA
I_O	Continuous output current			±50	mA
I_O	Continuous output current through V_{CC} or GND			±100	mA
T_J	Junction temperature		-65	150	°C
T_{stg}	Storage temperature		-65	150	°C

(1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If briefly operating outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

5.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
		Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002(2)	±1000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

Specifications	Description	Condition	MIN	MAX	UNIT
V_{CC}	Supply voltage		0.63	3.6	V
V_I	Input voltage		0	5.5	V
V_O	Output voltage		0	5.5	V
V_{IH}	High-level input voltage	V_{CC} = 0.63V to 0.77V	0.65 x Vcc		V
		V_{CC} = 0.72V to 0.88V	0.65 x Vcc		
		V_{CC} = 0.9V to 1.1V	0.65 x Vcc		
		V_{CC} = 1.08V to 1.32V	0.65 x Vcc		
		V_{CC} = 1.35V to 1.65V	0.65 x Vcc		
		V_{CC} = 1.62V to 1.98V	0.65 x Vcc		
		V_{CC} = 2.3V to 2.7V	1.7		
		V_{CC} = 3.0V to 3.6V	2		

Copyright © 2026 Texas Instruments Incorporated

5.3 Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)

Specifications	Description	Condition	MIN	MAX	UNIT
V_{IL}	Low-Level input voltage	V_{CC} = 0.63V to 0.77V		0.35 x Vcc	V
		V_{CC} = 0.72V to 0.88V		0.35 x Vcc	
		V_{CC} = 0.9V to 1.1V		0.35 x Vcc	
		V_{CC} = 1.08V to 1.32V		0.35 x Vcc	
		V_{CC} = 1.35V to 1.65V		0.35 x Vcc	
		V_{CC} = 1.62V to 1.98V		0.35 x Vcc	
		V_{CC} = 2.3V to 2.7V		0.7	
		V_{CC} = 3.0V to 3.6V		0.8	
I_{OL}	Low-level output current	V_{CC} = 0.63V		0.2	mA
		V_{CC} = 0.72V		0.5	
		V_{CC} = 0.9V		0.7	
		V_{CC} = 1.08V		1.1	
		V_{CC} = 1.35V		1.7	
		V_{CC} = 1.62V		1.9	
		V_{CC} = 2.3V		3.1	
		V_{CC} = 3.0V		4	
Δt/Δv	Input transition rise or fall rate	V_{cc} = 0.65V to 3.6V		200	ns/V
T_A	Operating free-air temperature		-40	125	°C

5.4 Thermal Information

PACKAGE	PINS	THERMAL METRIC(1)						UNIT
		$R_{\theta JA}$	$R_{\theta JC(top)}$	$R_{\theta JB}$	Ψ_{JT}	Ψ_{JB}	$R_{\theta JC(bot)}$	
DBV (SOT-23, 5)	5	298.6	240.2	134.6	114.5	133.9	n/a	°C/W
DCK (SC-70, 5)	5	314.4	128.7	100.6	7.1	99.8	n/a	°C/W
DRY (USON, 6)	6	554.9	385.4	388.2	159.0	384.1	n/a	°C/W
DSF (X2SON, 6)	6	407.1	232.0	306.9	40.3	306.0	n/a	°C/W
DPW (X2SON, 5)	5	291.8	224.2	245.8	31.4	245.6	195.4	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.

5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V_{CC}	MIN	TYP	MAX	UNIT
V_{OL}	I_{OL}= 20µA	0.63V to 3.6V			0.15	V
	I_{OH}= 0.7mA	1.0V			0.35	
	I_{OH}= 1.1mA	1.2V			0.25	
	I_{OH}= 1.7mA	1.5V			0.23	
	I_{OH}= 1.9mA	1.65V			0.23	
	I_{OH}= 3.1mA	2.3V			0.26	
	I_{OH}= 3.5mA	2.7V			0.27	
	I_{OH}= 4mA	3V			0.29	
I_I	V_I = V_{CC} or GND	V_{CC} = 0V to 3.6V		±0.003	±0.5	µA
I_{OFF}	V_I or V_O = V_{CC}	V_{CC} = 0V		±0.2	±1	µA

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

5.5 Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V_{CC}	MIN	TYP	MAX	UNIT
I_{OZ}	V_O = V_{CC} or GND	3.6V		±0.1	±1.5	µA
I_{CC}	V_I = V_{CC} or GND, I_O = 0	V_{CC} = 0.63V to 3.6V		0.01	1.4	µA
ΔI_{CC}	One input at V_{CC} - 0.6V, other inputs at V_{CC} or GND	3.3V			60	µA
C_I	V_I = V_{CC} or GND	3.3V		4.4		pF
C_O	V_O = V_{CC} or GND	3.3V		2.59		pF

5.6 Switching Characteristics

over operating free-air temperature range; typical values measured at T_A = 25°C (unless otherwise noted). See *Parameter Measurement Information*

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CONDITION	V_{CC}	MIN	TYP	MAX	UNIT
t_{pd}	A	Y	C_L = 5pF	0.7V ± 0.07V			320	ns
				0.8V ± 0.08V			117.3	ns
			C_L = 10pF	1.0V ± 0.1V			28.4	ns
				1.2V ± 0.12V			16.4	ns
			C_L = 15pF	1.5V ± 0.15V			6.3	ns
				1.8V ± 0.18V			5.9	ns
			C_L = 30pF	2.5V ± 0.2V			6.6	ns
				3.3V ± 0.3V			9.5	ns
C_{pd}			f = 10MHz	0.7V		0.67		pF
				0.8V		0.67		pF
				1.0V		0.70		pF
				1.2V		0.71		pF
				1.5V		0.72		pF
				1.8V		0.75		pF
				2.5V		0.95		pF
				3.3V		1.23		pF

ADVANCE INFORMATION


Copyright © 2026 Texas Instruments Incorporated

6 Parameter Measurement Information

Phase relationships between waveforms were chosen arbitrarily for the examples listed in the following table. All input pulses are supplied by generators having the following characteristics: PRR ≤ 1MHz, Z_O = 50Ω, t_t < 3 ns.


The outputs are measured individually with one input transition per measurement.

TEST	R_L	C_L	ΔV	V_{CC}
t_{pd}	20KΩ	5pF	0.07 V	0.7V
			0.08 V	0.8 V
		10pF	0.1 V	1.0V
	5KΩ	10pF	0.12 V	1.2 V
		15pF	0.15 V	1.5V
			0.18 V	1.8 V
		30pF	0.2 V	2.5V
			0.3 V	3.3 V

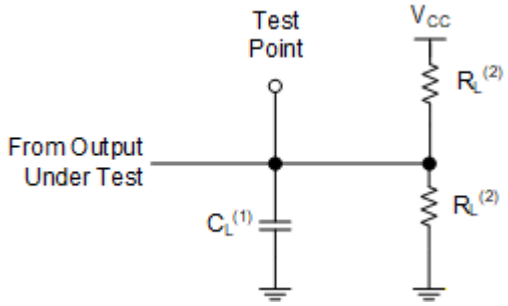

(1) C_L includes probe and test-fixture capacitance.
(2) R_L = 5kΩ or 20kΩ for enable and disable time measurement. R_L = 1MΩ for measuring propagation delays, setup and hold times, and pulse width.

Figure 6-1. Load Circuit for Open-Drain Outputs

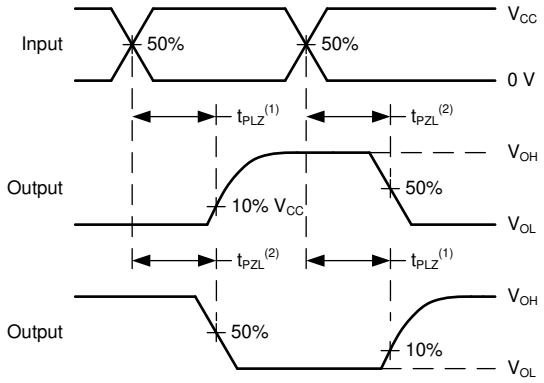

(1) If R_L = 5kΩ, the time between t_{PLZ} and t_{PZL} is the same as disable and enable time.
(2) If R_L = 1MΩ, t_{PLZ} and t_{PZL} are the same as t_{pd}.

Figure 6-2. Voltage Waveforms Propagation Delays

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

7 Detailed Description

7.1 Overview

The SN74UVP1G07 device is a single buffer gate with open drain output. The output of this single buffer/driver is open drain, and can be connected to other open-drain outputs to implement active-low wired-OR or active-high wired-AND functions.

This device is fully specified for partial-power-down applications using I_{off}. The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

7.2 Functional Block Diagram



7.3 Feature Description

- Wide operating V_{CC} range of 0.63 V to 3.6 V
- 3.6-V I/O tolerant to support down translation
- Input hysteresis allows slow input transition and better switching noise immunity at the input
- I_{OFF} feature allows voltages on the inputs and outputs when V_{CC} is 0 V
- Low noise due to slower edge rates

7.4 Device Functional Modes

Function Table

INPUT A	OUTPUT Y
H	H/Z
L	L

Copyright © 2026 Texas Instruments Incorporated

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The UVP family is TI's premier solution to the industry's low-power needs in battery-powered portable applications. This family ensures a very low static and dynamic power consumption across the entire V_{CC} range, resulting in an increased battery life. This product also maintains excellent signal integrity. It has a small amount of hysteresis built in allowing for slower or noisy input signals. The lowered drive produces slower edges and prevents overshoot and undershoot on the outputs.

8.2 Typical Application

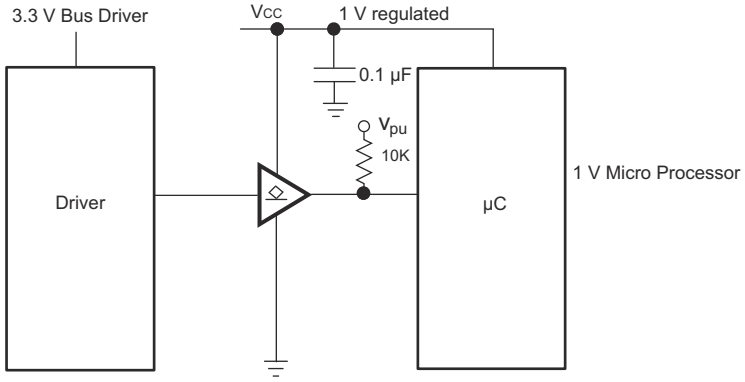


Figure 8-1. Typical Application Schematic

8.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Care should be taken to avoid bus contention because it can drive currents that would exceed maximum limits.

8.2.2 Detailed Design Procedure

1. Recommended Input conditions
   - Rise time and fall time specs. See (Δt/ΔV) in *Section 5.3*
   - Specified high and low levels. See (V_{IH} and V_{IL}) in *Section 5.3*
   - Inputs are overvoltage tolerant allowing them to go as high as 3.6 V at any valid V_{CC}
2. Recommend output conditions
   - Load currents should not exceed 20 mA on the output and 50 mA total for the part

8.3 Power Supply Recommendations

The power supply can be any voltage between the Min and Max supply voltage rating located in the *Section 5.3* table.

Each V_{CC} pin must have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1µF is recommended; if there are multiple V_{CC} pins, then 0.01µF or 0.022µF is recommended for each power pin. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. A 0.1µF and a 1µF are commonly used in parallel. Install the bypass capacitor as close to the power pin as possible for best results.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

8.4 Layout

8.4.1 Layout Guidelines

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Figure 8-2 specifies the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or V_{CC}, whichever makes more sense or is more convenient. It is generally acceptable to float outputs, unless the part is a transceiver. If the transceiver has an output enable pin, it will disable the output section of the part when asserted. This will not disable the input section of the I/Os, so they cannot float when disabled.

8.4.2 Layout Example

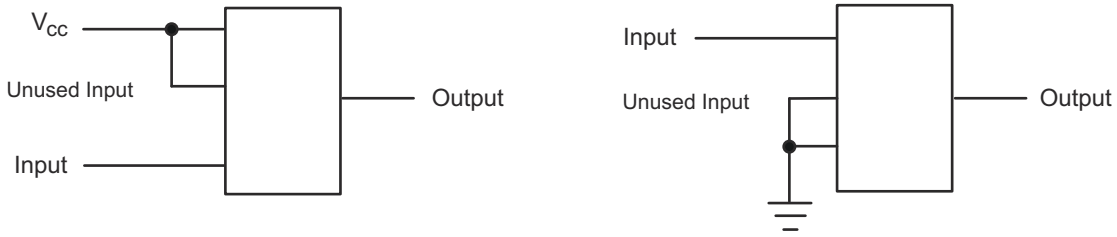


Figure 8-2. Layout Diagram

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, *CMOS Power Consumption and C_{pd} Calculation* application note
- Texas Instruments, *Designing With Logic* application note
- Texas Instruments, *Thermal Characteristics of Standard Linear and Logic (SLL) Packages and Devices* application note

9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.6 Glossary

TI Glossary	This glossary lists and explains terms, acronyms, and definitions.

10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
June 2026	*	Initial Release

ADVANCE INFORMATION


ADVANCE INFORMATION

11 Mechanical, Packaging, and Orderable Information


The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

11.1 Tape and Reel Information

REEL DIMENSIONS

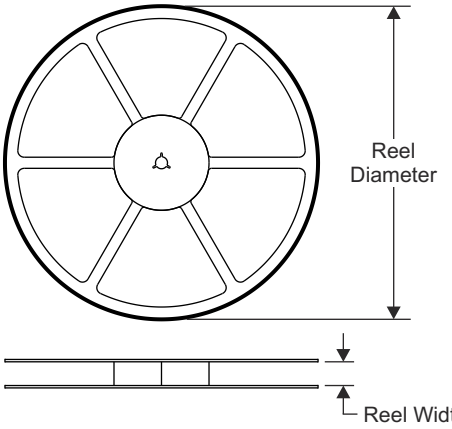


TAPE DIMENSIONS

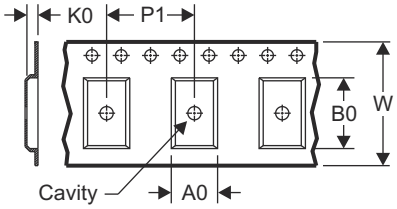

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

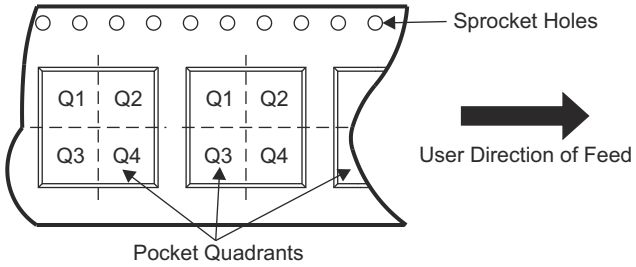

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
PSN74UVP1G07DBVR	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
PSN74UVP1G07DCKR	SC70	DCK	5	3000	178.0	8.4	2.25	2.45	1.2	4.0	8.0	Q3
PSN74UVP1G07DPWR	X2SON	DPW	5	3000	178.0	8.4	0.91	0.91	0.5	2.0	8.0	Q3
PSN74UVP1G07DRYR	USON	DRY	5	5000	180.0	9.5	1.15	1.6	0.75	4.0	8.0	Q1
PSN74UVP1G07DSFR	USON	DSF	5	5000	180.0	8.4	1.16	1.16	0.5	4.0	8.0	Q2

Copyright © 2026 Texas Instruments Incorporated

TAPE AND REEL BOX DIMENSIONS

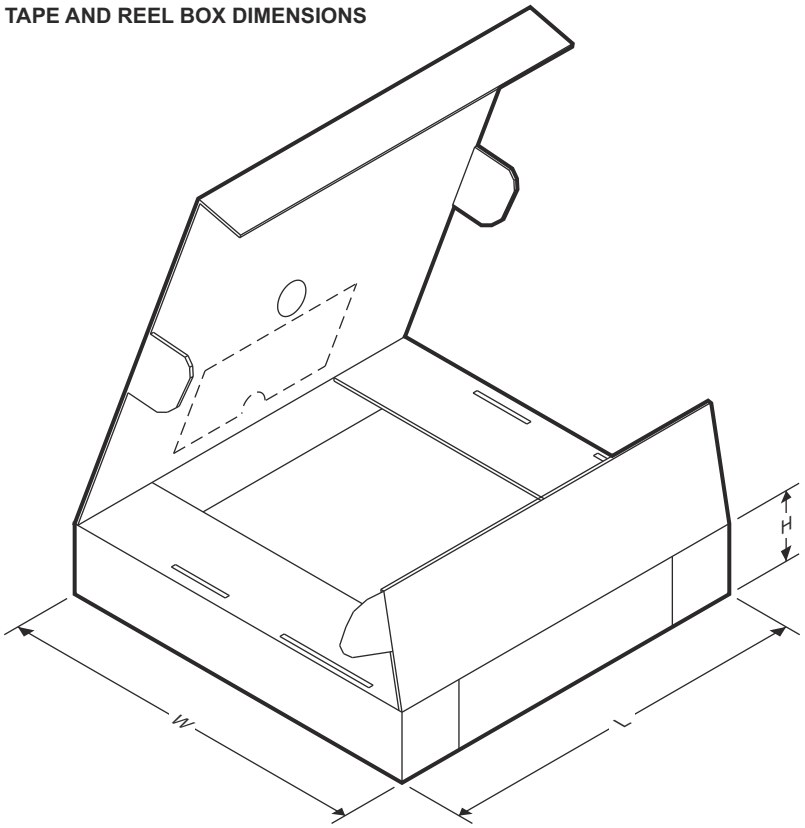

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
PSN74UVP1G07DBVR	SOT-23	DBV	5	3000	208.0	191.0	35.0
PSN74UVP1G07DCKR	SC70	DCK	5	3000	208.0	191.0	35.0
PSN74UVP1G07DPWR	X2SON	DPW	5	3000	205.0	200.0	33.0
PSN74UVP1G07DRYR	USON	DRY	5	5000	184.0	184.0	19.0
PSN74UVP1G07DSFR	USON	DSF	5	5000	210.0	185.0	35.0

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION


11.2 Mechanical Data



PACKAGE OUTLINE

DBV0005A — **SOT-23 - 1.45 mm max height**

SMALL OUTLINE TRANSISTOR

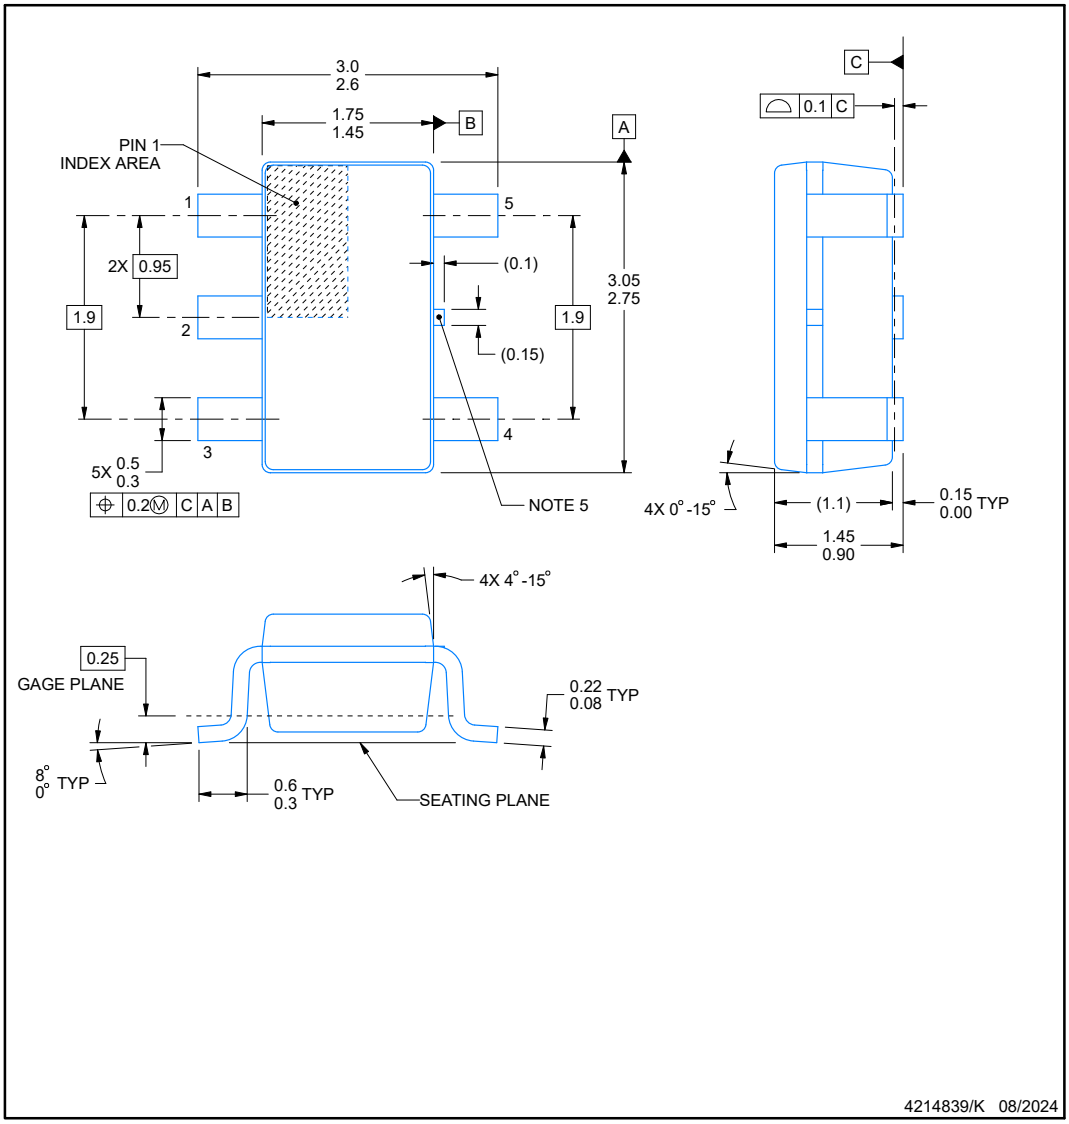

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Refernce JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

Copyright © 2026 Texas Instruments Incorporated


EXAMPLE BOARD LAYOUT

DBV0005A — **SOT-23 - 1.45 mm max height**

SMALL OUTLINE TRANSISTOR

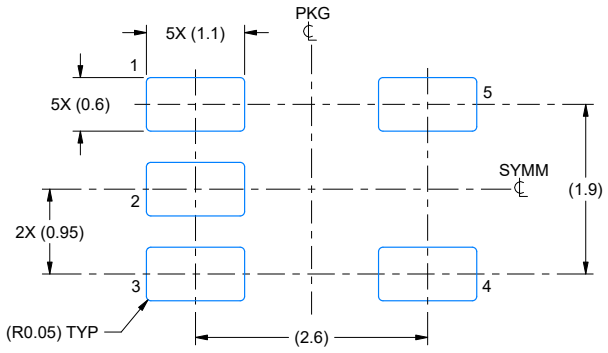

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

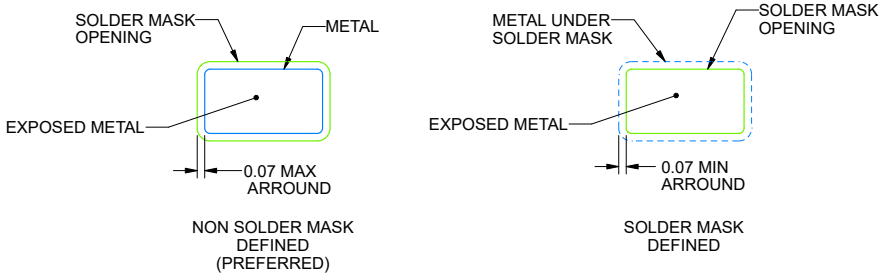

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

ADVANCE INFORMATION


Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

EXAMPLE STENCIL DESIGN

DBV0005A — **SOT-23 - 1.45 mm max height**

SMALL OUTLINE TRANSISTOR

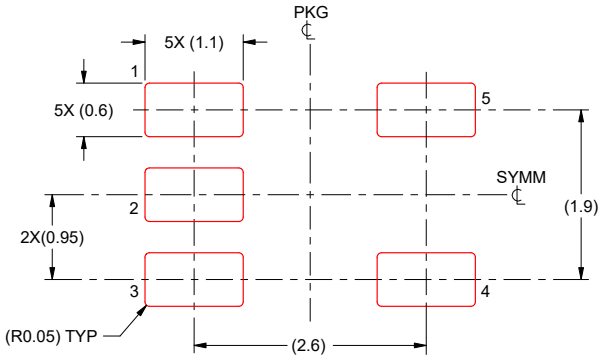

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.


Copyright © 2026 Texas Instruments Incorporated

PACKAGE OUTLINE

DCK0005A

SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

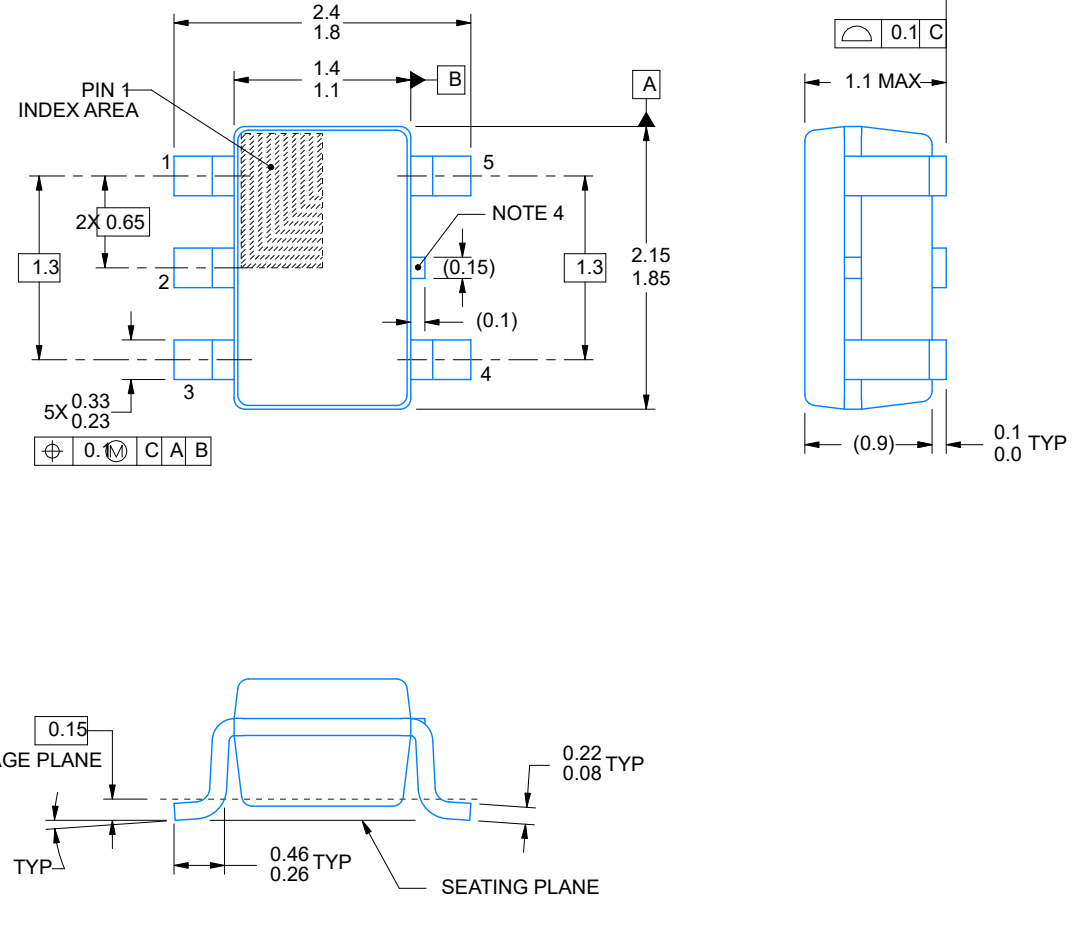

4214834/C 03/2023

ADVANCE INFORMATION

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dim ensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Refernce JEDEC MO-203.
4. Support pin may differ or may not be present.

Copyright © 2026 Texas Instruments Incorporated


EXAMPLE BOARD LAYOUT

DCK0005A


SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

ADVANCE INFORMATION

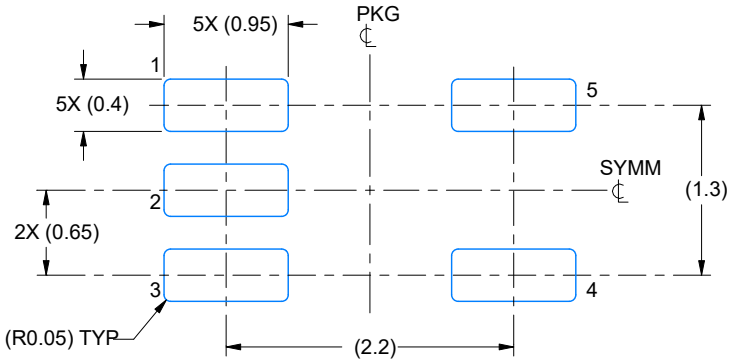

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:18X

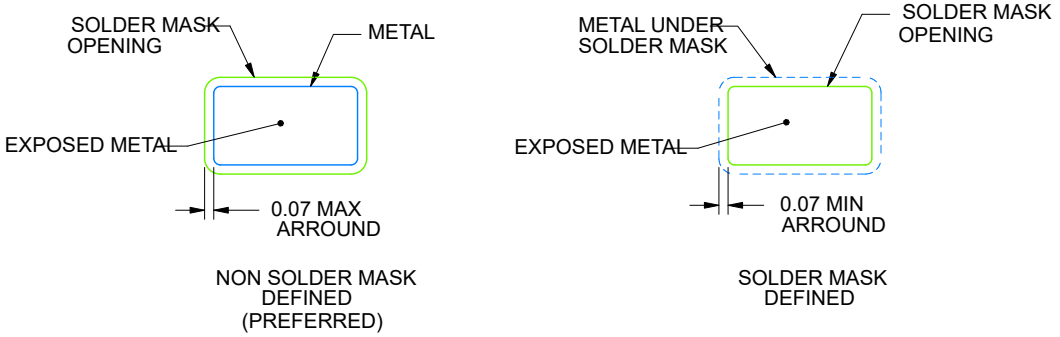

SOLDER MASK DETAILS

4214834/C 03/2023

NOTES: (continued)

4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.


Copyright © 2026 Texas Instruments Incorporated

EXAMPLE STENCIL DESIGN

DCK0005A

SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

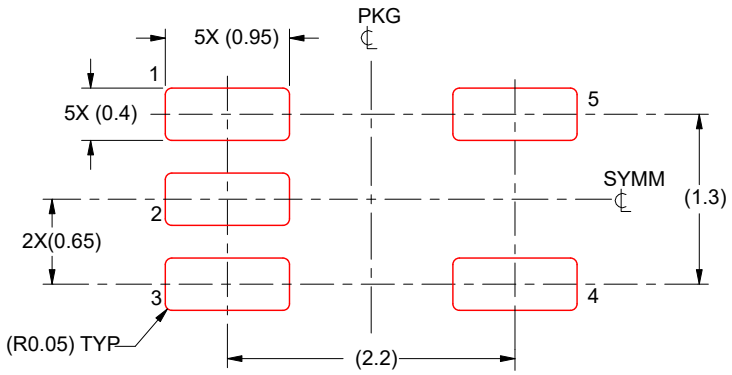

SOLDER PASTE EXAMPLE
BASED ON 0.125 THICK STENCIL
SCALE:18X

4214834/C 03/2023

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION


PACKAGE OUTLINE

DPW0005A



X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

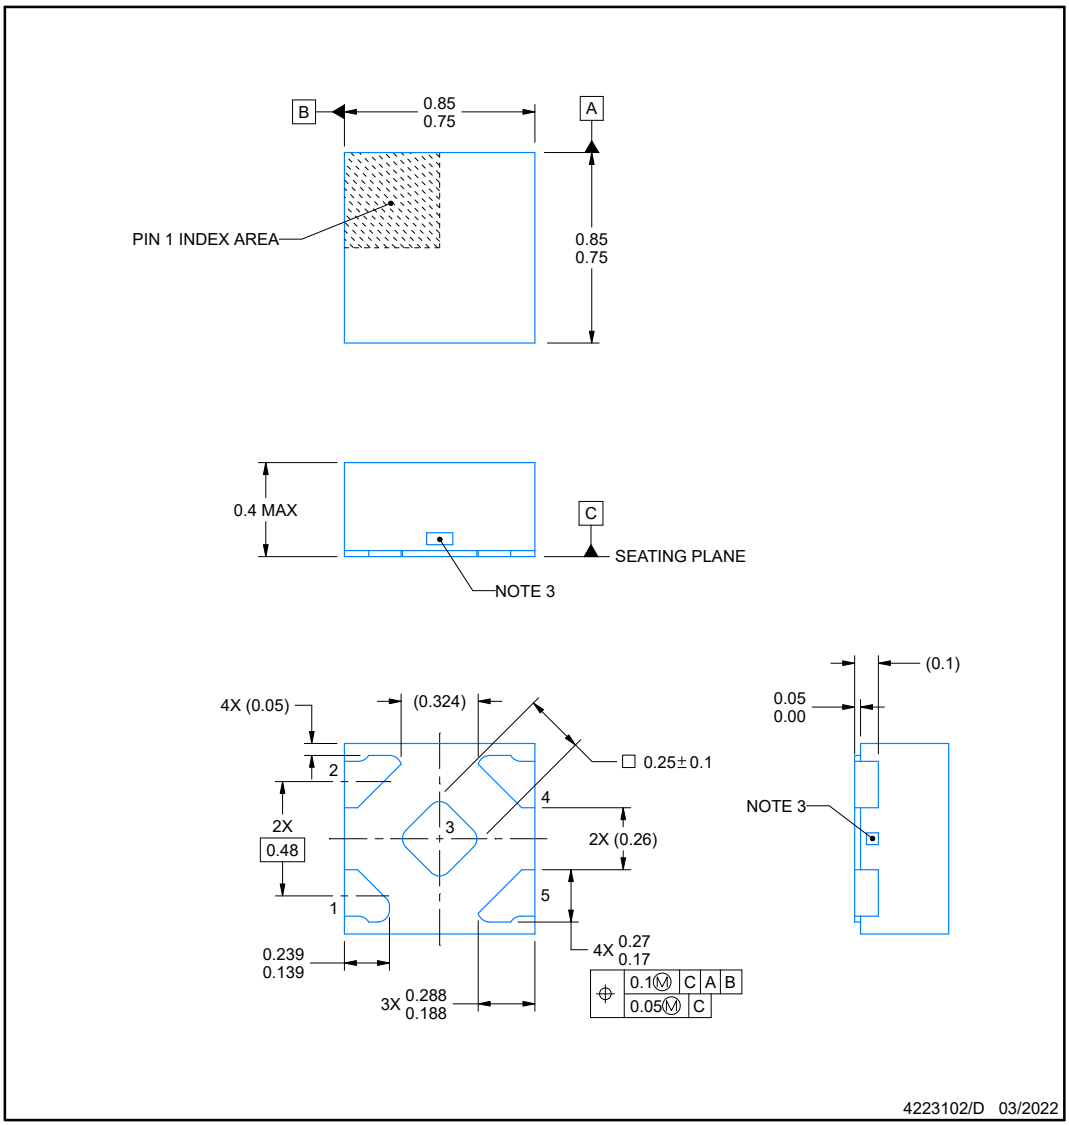

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The size and shape of this feature may vary.

Copyright © 2026 Texas Instruments Incorporated

EXAMPLE BOARD LAYOUT

DPW0005A — **X2SON - 0.4 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

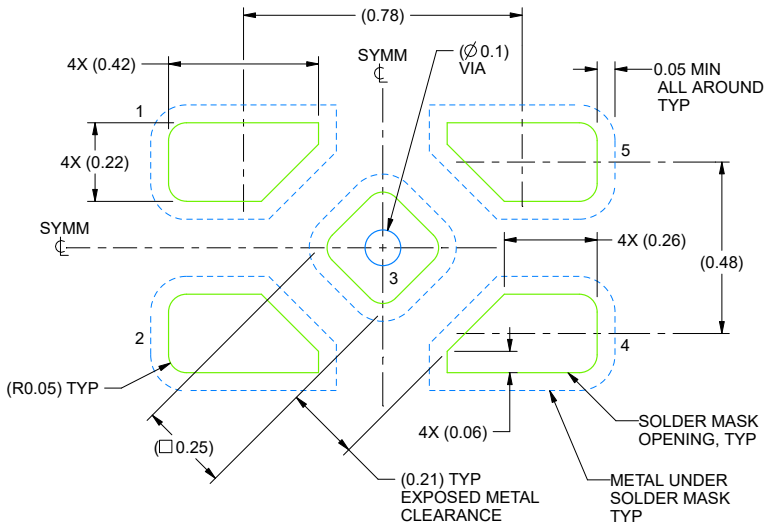

LAND PATTERN EXAMPLE
SOLDER MASK DEFINED
SCALE:60X

4223102/D 03/2022

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, refer to QFN/SON PCB application note in literature No. SLUA271 (www.ti.com/lit/slua271).

ADVANCE INFORMATION


Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

EXAMPLE STENCIL DESIGN

DPW0005A — **X2SON - 0.4 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

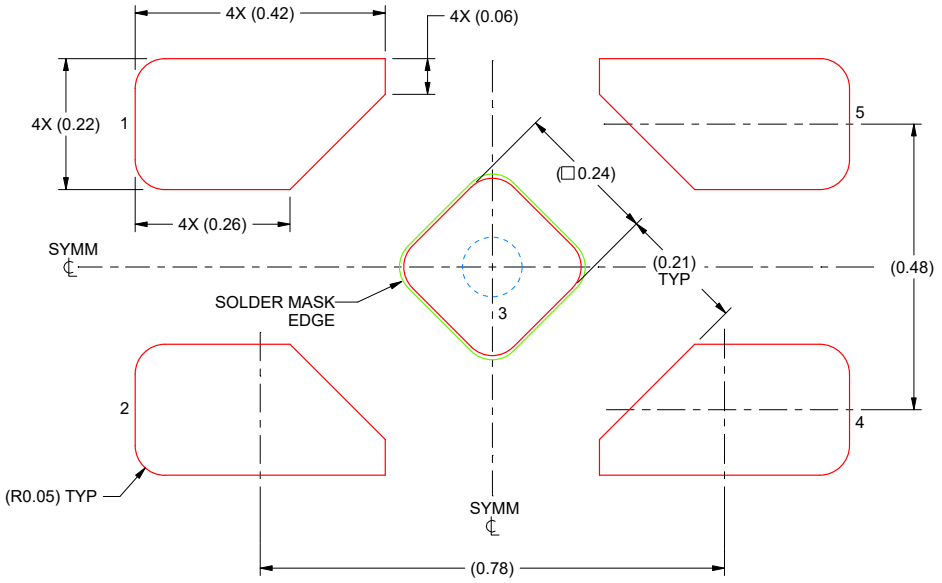

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL

EXPOSED PAD 3
92% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:100X

4223102/D 03/2022

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.


Copyright © 2026 Texas Instruments Incorporated

PACKAGE OUTLINE

DSF0006A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

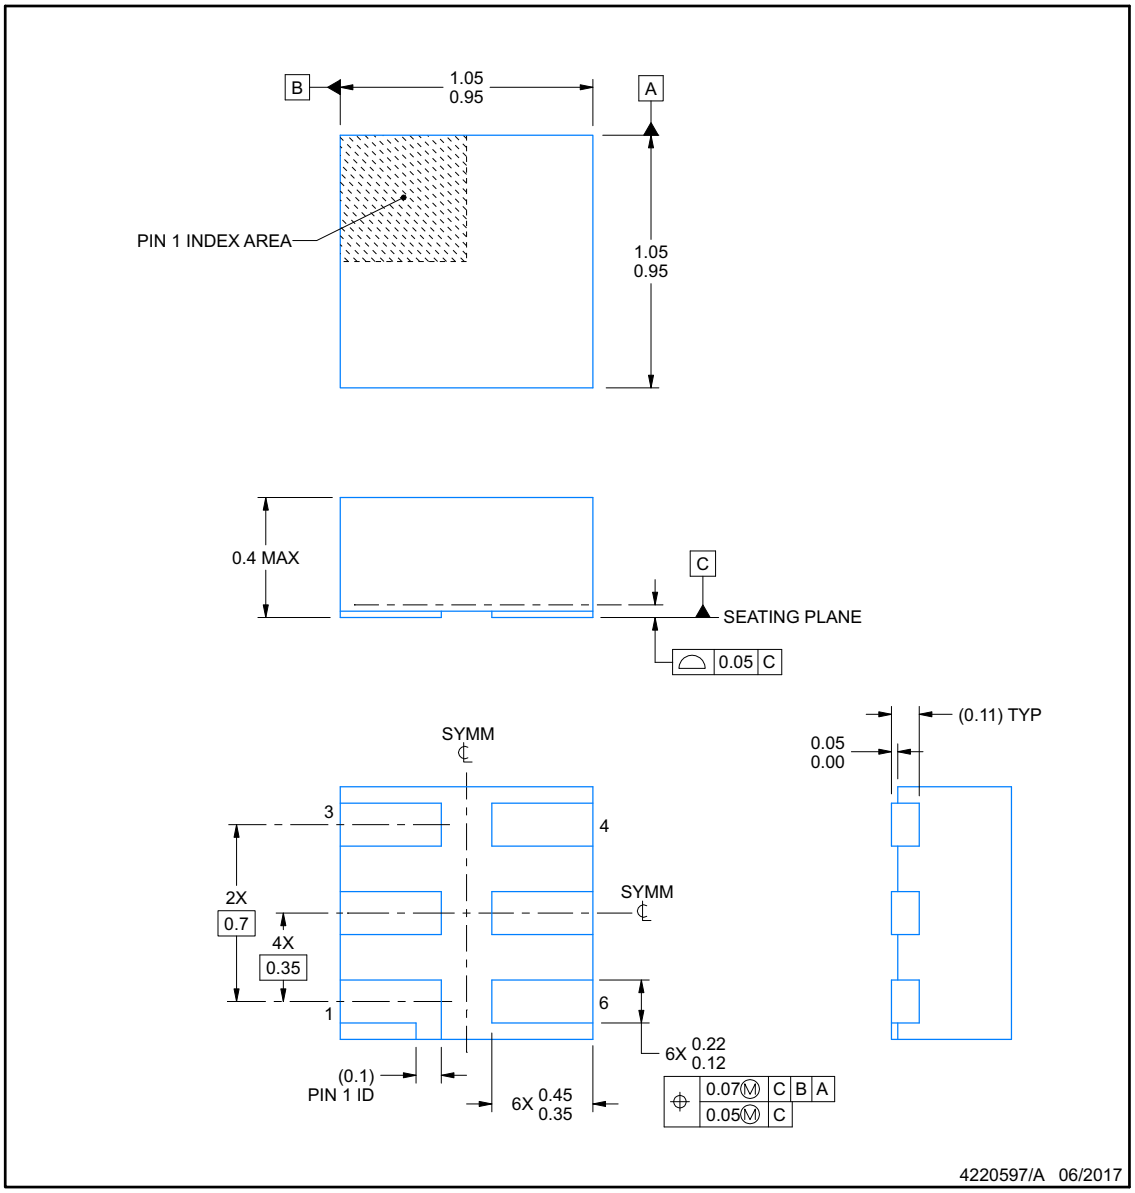

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC registration MO-287, variation X2AAF.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated


ADVANCE INFORMATION

EXAMPLE BOARD LAYOUT


DSF0006A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

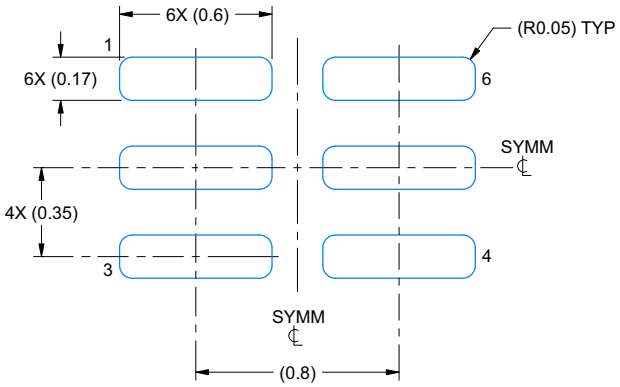

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:40X

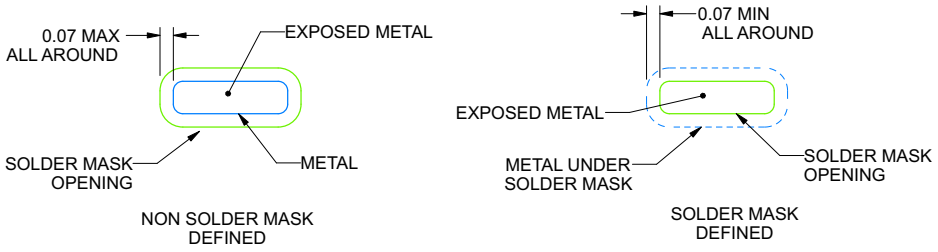

SOLDER MASK DETAILS

4220597/A 06/2017

NOTES: (continued)


4. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

Copyright © 2026 Texas Instruments Incorporated

EXAMPLE STENCIL DESIGN

DSF0006A — **X2SON - 0.4 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

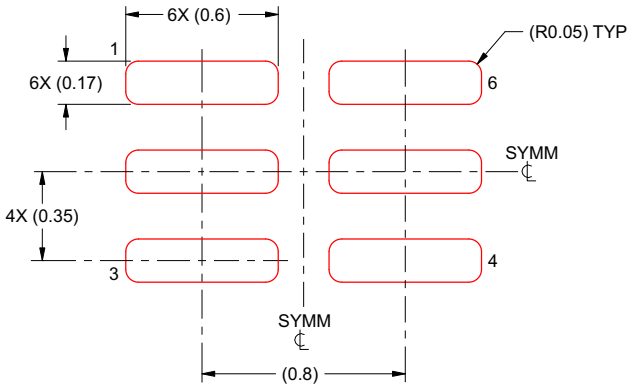

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:40X

4220597/A 06/2017

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION


PACKAGE OUTLINE

DRY0006A



USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

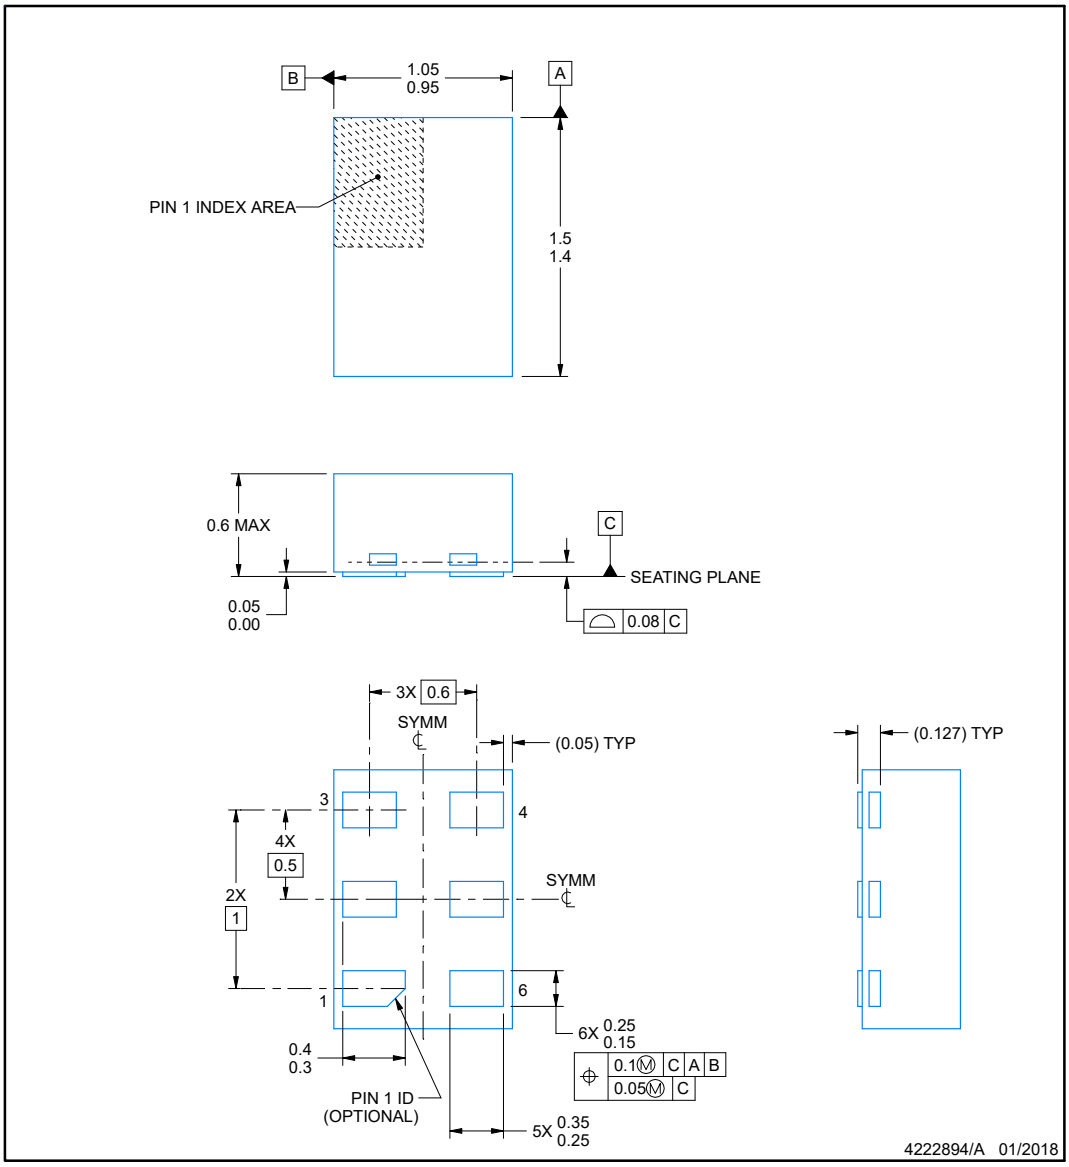

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

Copyright © 2026 Texas Instruments Incorporated


EXAMPLE BOARD LAYOUT

DRY0006A — **USON - 0.6 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

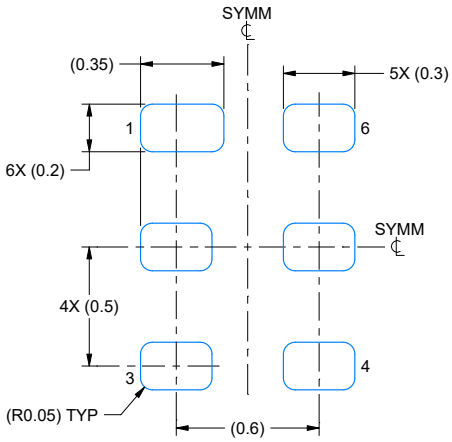

LAND PATTERN EXAMPLE
1:1 RATIO WITH PKG SOLDER PADS
EXPOSED METAL SHOWN
SCALE:40X

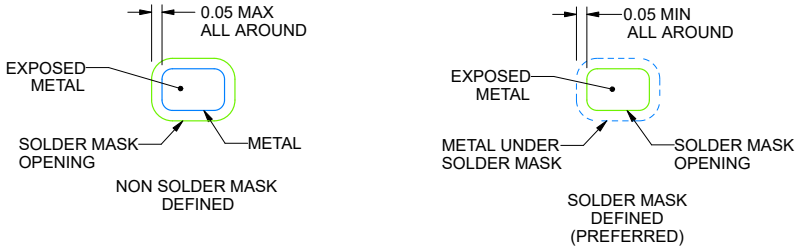

SOLDER MASK DETAILS

4222894/A 01/2018

NOTES: (continued)

3. For more information, see QFN/SON PCB application report in literature No. SLUA271 (www.ti.com/lit/slua271).

ADVANCE INFORMATION


Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

EXAMPLE STENCIL DESIGN

DRY0006A — **USON - 0.6 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

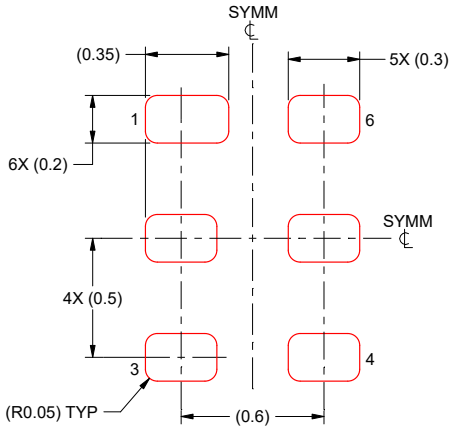

SOLDER PASTE EXAMPLE
BASED ON 0.075 - 0.1 mm THICK STENCIL
SCALE:40X

4222894/A 01/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

Copyright © 2026 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
PSN74UVP1G07DBVR	Active	Preproduction	SOT-23 (DBV) | 5	3000 | LARGE T&R	-	Call TI	Call TI	-	
PSN74UVP1G07DCKR	Active	Preproduction	SC70 (DCK) | 5	3000 | LARGE T&R	-	Call TI	Call TI	-	
PSN74UVP1G07DPWR	Active	Preproduction	X2SON (DPW) | 5	3000 | LARGE T&R	-	Call TI	Call TI	-	
PSN74UVP1G07DRYR	Active	Preproduction	SON (DRY) | 6	3000 | LARGE T&R	-	Call TI	Call TI	-	
PSN74UVP1G07DSFR	Active	Preproduction	SON (DSF) | 6	3000 | LARGE T&R	-	Call TI	Call TI	-	

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74UVP1G07 :

- Automotive : SN74UVP1G07-Q1

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025