TEXAS INSTRUMENTS
TS3A24159
JAJSH41H – MARCH 2007 – REVISED AUGUST 2022

TS3A24159 0.3Ω、2 チャネル SPDT 双方向アナログ・スイッチ デュアル・チャネル 2：1 マルチプレクサ / デマルチプレクサ

1 特長

- ブレイク・ビフォー・メイクのスイッチングを規定
- 低いオン抵抗 (最大値 0.3Ω)
- 低い電荷注入
- 非常に優れたオン抵抗マッチング
- 低い全高調波歪 (THD)
- 1.65V～3.6V の単一電源で動作
- 制御入力は 1.8V ロジック互換
- JESD 78、Class II 準拠で 100mA 超のラッチアップ性能
- JESD 22 準拠で ESD 性能を試験済み
  - 2000V、人体モデル (A114-B、Class II)
  - 1000V、荷電デバイス・モデル (C101)

2 アプリケーション

- 携帯電話
- パーソナル・デジタル・アシスタント (PDA)
- ポータブル計測装置
- オーディオおよびビデオ信号のルーティング
- 低電圧のデータ収集システム
- 通信用回路
- モデム
- ハードディスク
- コンピュータ周辺機器
- ワイヤレス端末およびペリフェラル


3 概要

TS3A24159 は 2 チャネルの単極双投 (SPDT) 双方向アナログ・スイッチで、1.65V～3.6V で動作するよう設計されています。このデバイスはオン抵抗が低く、オン抵抗マッチングが非常に優れており、Break-Before-Make 機能によってチャネル間の信号転送時に信号が歪むのを防ぎます。このデバイスは全高調波歪み (THD) 特性が非常に優れており、オン抵抗が低く、極めて低消費電力です。これらの特長も含めた多くの特長から、このデバイスは各種の市場、多くの種類のアプリケーションに適しています。

製品情報 (1)

部品番号	パッケージ	本体サイズ (公称)
TS3A24159	VSSOP (10)	3.00mm × 3.00mm
	VSON (10)	3.00mm × 3.00mm
	DSBGA (10)	1.86mm × 1.35mm

(1) 利用可能なパッケージについては、このデータシートの末尾にある注文情報を参照してください。

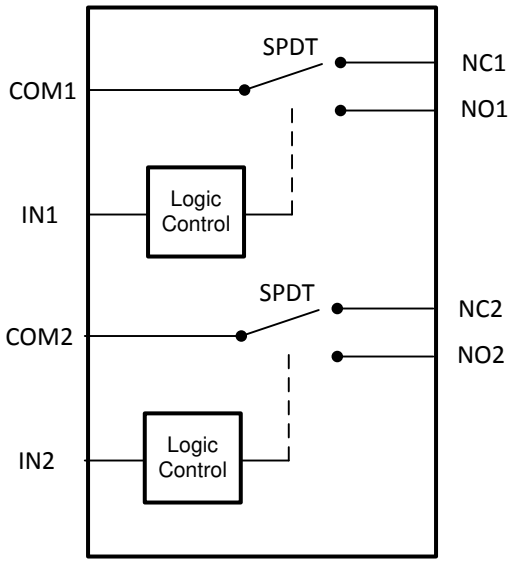

機能ブロック図

英語版の TI 製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、www.ti.com で閲覧でき、その内容が常に優先されます。TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 Revision History ... 2
5 Pin Configuration and Functions ... 3
6 Specifications ... 5
6.1 Absolute Maximum Ratings ... 5
6.2 ESD Ratings ... 5
6.3 Recommended Operating Conditions ... 5
6.4 Thermal Information ... 6
6.5 Electrical Characteristics for 3-V Supply ... 6
6.6 Electrical Characteristics for 2.5-V Supply ... 7
6.7 Electrical Characteristics for 1.8-V Supply ... 9
6.8 Switching Characteristics for a 3-V Supply ... 10
6.9 Switching Characteristics for a 2.5-V Supply ... 10
6.10 Switching Characteristics for a 1.8-V Supply ... 10
6.11 Typical Characteristics ... 12
7 Parameter Measurement Information ... 14
8 Detailed Description ... 18
8.1 Overview ... 18
8.2 Functional Block Diagram ... 18
8.3 Feature Description ... 18
8.4 Device Functional Modes ... 18
9 Application and Implementation ... 19
9.1 Application Information ... 19
9.2 Typical Application ... 19
10 Power Supply Recommendations ... 20
11 Layout ... 21
11.1 Layout Guidelines ... 21
11.2 Layout Example ... 21
12 Device and Documentation Support ... 22
12.1 Documentation Support ... 22
12.2 Receiving Notification of Documentation Updates ... 22
12.3 サポート・リソース ... 22
12.4 Trademarks ... 22
12.5 Electrostatic Discharge Caution ... 22
12.6 Glossary ... 22
13 Mechanical, Packaging, and Orderable Information ... 22

4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision G (February 2022) to Revision H (August 2022) — **Page**

- Changed the maximum V_{CC} from: *3.6 V* to: *4 V* ... 5

Changes from Revision F (September 2019) to Revision G (February 2022) — **Page**

- 文書全体にわたって表、図、相互参照の採番方法を更新 ... 1
- Updated the part number in the *Detailed Design Procedure* ... 20

Changes from Revision E (March 2019) to Revision F (September 2019) — **Page**

- Changed the YZP package image view From: Top-Through View To: Bottom View ... 3

Changes from Revision D (July 2015) to Revision E (March 2019) — **Page**

- Changed the YZP package image and deleted the *YZP Package, Terminal Assignments* table ... 3
- Changed Turnon time V_{CC} (Full) value From: 2.3 V to 2.7 V To: 2.7 V to 3.6 V in *Switching Characteristics for a 3-V Supply* ... 10
- Changed Turnon time V_{CC} (Full) value From: 2.3 V to 2.7 V To: 2.7 V to 3.6 V in *Switching Characteristics for a 2.5-V Supply* ... 10

Changes from Revision C (February 2008) to Revision D (March 2015) — **Page**

- 「*ピン構成および機能*」セクション、「*ESD 定格*」表、「*機能説明*」セクション、「*デバイスの機能モード*」セクション、「*アプリケーションと実装*」セクション、「*電源に関する推奨事項*」セクション、「*レイアウト*」セクション、「*デバイスおよびドキュメントのサポート*」セクション、「*メカニカル、パッケージ、および注文情報*」セクションを追加 ... 1
- JEDEC 規格を満たすように、文書全体にわたって V+ を V_{CC} に変更 ... 1

Copyright © 2022 Texas Instruments Incorporated

5 Pin Configuration and Functions

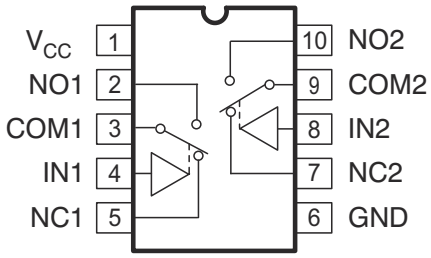


図 5-1. DGS Package, 10-Pin VSSOP (Top View)

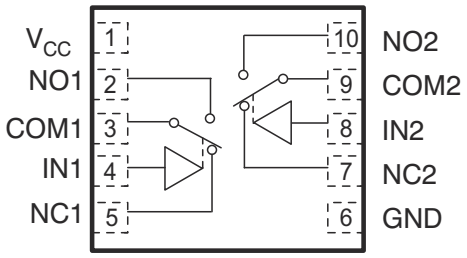


図 5-2. DRC Package, 10-Pin VSON (Top View)

表 5-1. Pin Functions – VSSOP and VSON

PIN		TYPE(1)	DESCRIPTION
NO.	NAME		
1	V_{CC}	—	Power supply
2	NO1	I/O	Normally open signal path
3	COM1	I/O	Common signal path
4	IN1	I	Digital control to connect COM to NO or NC
5	NC1	I/O	Normally closed signal path
6	GND	—	Ground
7	NC2	I/O	Normally closed signal path
8	IN2	I	Digital control to connect COM to NO or NC
9	COM2	I/O	Common signal path
10	NO2	I/O	Normally open signal path

(1) I = input, O = output

Copyright © 2022 Texas Instruments Incorporated

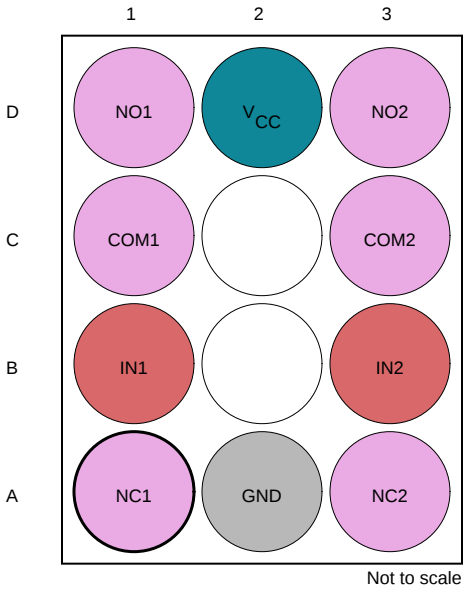


図 5-3. YZP Package, 10-Pin DSBGA (Bottom View)

Legend	
Input or Output	Input
Ground	Power

表 5-2. Pin Functions – DSBGA

PIN		TYPE(1)	DESCRIPTION
NO.	NAME		
A1	NC1	I/O	Normally closed signal path
A2	GND	—	Ground
A3	NC2	I/O	Normally closed signal path
B1	IN1	I	Digital control to connect COM to NO or NC
B3	IN2	I	Digital control to connect COM to NO or NC
C1	COM1	I/O	Common signal path
C3	COM2	I/O	Common signal path
D1	NO1	I/O	Normally open signal path
D2	V_{CC}	—	Power supply
D3	NO2	I/O	Normally open signal path

(1) I = input, O = output

Copyright © 2022 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1) (2)

			MIN	MAX	UNIT
V_{CC}	Supply voltage(3)		–0.5	4	V
V_{NC} V_{NO} V_{COM}	Signal voltage(3) (4)		–0.5	V_{CC} + 0.5	V
$I_{I/OK}$	Analog port diode current	V_{NC}, V_{NO}, V_{COM} < 0	–50	50	mA
I_{NC} I_{NO} I_{COM}	ON-state switch current	V_{NC}, V_{NO}, V_{COM} = 0 to V_{CC}	–300	300	mA
	ON-state peak switch current(5)		–500	500	
V_{IN}	Digital input voltage		–0.5	3.6	V
I_{IK}	Digital input clamp current(3)	V_I < 0	–50		mA
I_{CC}	Continuous current through V_{CC}			100	mA
I_{GND}	Continuous current through GND		–100		mA
T_{stg}	Storage temperature		–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
(3) All voltages are with respect to ground, unless otherwise specified.
(4) This value is limited to 5.5 V maximum.
(5) Pulse at 1-ms duration <10% duty cycle.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 or ANSI/ESDA/JEDEC JS-002(2)	1000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V_{CC}	Supply Voltage	1.65	3.6	V
V_{NC} V_{NO} V_{COM}	Signal Voltage	0	V_{CC}	V
V_{IN}	Digital Input Voltage	0	V_{CC}	V

Copyright © 2022 Texas Instruments Incorporated

6.4 Thermal Information

THERMAL METRIC[1]		TS3A24159			UNIT
		DGS (VSSOP)	DRC (VSON)	YZP (DSBGA)	
		10 PINS	10 PINS	10 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	154	49.4	90.9	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	37.9	71.2	0.3	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	83.6	23.8	8.3	°C/W
ψ_{JT}	Junction-to-top characterization parameter	1.4	2.2	3.2	°C/W
ψ_{JB}	Junction-to-board characterization parameter	82.2	23.8	8.3	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	6.1	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

6.5 Electrical Characteristics for 3-V Supply

V_{CC} = 2.7 V to 3.6 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
ANALOG SWITCH									
Analog signal range	V_{COM}, V_{NO}, V_{NC}					0		V_{CC}	V
Peak ON resistance	r_{peak}	0 ≤ (V_{NO} or V_{NC}) ≤ V_{CC}, I_{COM} = –100 mA,	Switch ON, See 図 7-1	25°C	2.7 V		0.2	0.3	Ω
				Full				0.35	
ON-state resistance	r_{on}	V_{NO} or V_{NC} = 2 V, I_{COM} = –100 mA,	Switch ON, See 図 7-1	25°C	2.7 V		0.26	0.3	Ω
				Full				0.34	
ON-state resistance match between channels	Δr_{on}	V_{NO} or V_{NC} = 2 V, 0.8 V, I_{COM} = –100 mA,	Switch ON, See 図 7-1	25°C	2.7 V		0.01	0.05	Ω
				Full				0.05	
ON-state resistance flatness	$r_{on(flat)}$	0 ≤ (V_{NO} or V_{NC}) ≤ V_{CC}, I_{COM} = –100 mA,	Switch ON, See 図 7-1	25°C	2.7 V		0.13		Ω
		V_{NO} or V_{NC} = 2 V, 0.8 V, I_{COM} = –100 mA,	Switch ON, See 図 7-1	25°C			0.01	0.04	Ω
				Full				0.05	
NC, NO OFF leakage current	$I_{NC(OFF)}$, $I_{NO(OFF)}$	V_{NC} or V_{NO} = 1 V, V_{COM} = 3 V, or V_{NC} or V_{NO} = 3 V, V_{COM} = 1 V,	Switch OFF, See 図 7-2	25°C	3.6 V	–10		10	nA
				Full		–50		50	
NC, NO ON leakage current	$I_{NC(ON)}$, $I_{NO(ON)}$	V_{NC} or V_{NO} = 1 V, V_{COM} = Open, or V_{NC} or V_{NO} = 3 V, V_{COM} = Open,	Switch ON, See 図 7-3	25°C	3.6 V	–10		10	nA
				Full		–100		100	
COM ON leakage current	$I_{COM(ON)}$	V_{NC} or V_{NO} = Open, V_{COM} = 1 V, or V_{NC} or V_{NO} = Open, V_{COM} = 3 V,	Switch ON, See 図 7-3	25°C	3.6 V	–10		10	nA
				Full		–100		100	
DIGITAL CONTROL INPUTS (IN1, IN2)[2]									
Input logic high	V_{IH}			Full		1.4			V
Input logic low	V_{IL}			Full				0.5	V
Input leakage current	I_{IH}, I_{IL}	V_I = 3.6 V or 0		25°C	3.6 V	–40	5	40	nA
				Full		–50		50	

Copyright © 2022 Texas Instruments Incorporated

6.5 Electrical Characteristics for 3-V Supply (continued)

V_{CC} = 2.7 V to 3.6 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
DYNAMIC									
Charge injection	Q_C	V_{GEN} = 0, R_{GEN} = 0,	C_L = 1 nF, See 図 7-10	25°C	3 V		9		pC
NC, NO OFF capacitance	$C_{NC(OFF)}$, $C_{NO(OFF)}$	V_{NC} or V_{NO} = V_{CC} or GND, Switch OFF,	See 図 7-4	25°C	3 V		90		pF
NC, NO ON capacitance	$C_{NC(ON)}$, $C_{NO(ON)}$	V_{NC} or V_{NO} = V_{CC} or GND, Switch ON,	See 図 7-4	25°C	3 V		224		pF
COM ON capacitance	$C_{COM(ON)}$	V_{COM} = V_{CC} or GND, Switch ON,	See 図 7-4	25°C	3 V		250		pF
Digital input capacitance	C_I	V_{IN} = V_{CC} or GND,	See 図 7-4	25°C	3 V		2		pF
Bandwidth	BW	R_L = 50 Ω, Switch ON,	See 図 7-7	25°C	3 V		23		MHz
OFF isolation	O_{ISO}	R_L = 50 Ω, f = 1 MHz,	See 図 7-8	25°C	3 V		–72		dB
Crosstalk	X_{TALK}	R_L = 50 Ω, f = 1 MHz,	See 図 7-9	25°C	3 V		–96		dB
Total harmonic distortion	THD	R_L = 600 Ω, C_L = 50 pF,	f = 20 Hz to 20 kHz, See 図 7-11	25°C	3 V		0.003%		
SUPPLY									
Positive supply current	I_{CC}	V_{IN} = V_{CC} or GND		25°C	3.6 V		15	100	nA
				Full			1		μA

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum
(2) All unused digital inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*.

6.6 Electrical Characteristics for 2.5-V Supply

V_{CC} = 2.3 V to 2.7 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
ANALOG SWITCH									
Analog signal range	V_{COM}, V_{NO}, V_{NC}					0		V_{CC}	V
Peak ON resistance	r_{peak}	0 ≤ (V_{NO} or V_{NC}) ≤ V_{CC}, I_{COM} = –8 mA,	Switch ON, See 図 7-1	25°C	2.3 V			0.35	Ω
				Full				0.45	
ON-state resistance	r_{on}	V_{NO} or V_{NC} = 1.8 V, I_{COM} = –8 mA,	Switch ON, See 図 7-1	25°C	2.3 V				Ω
				Full				0.4	
ON-state resistance match between channels	Δr_{on}	V_{NO} or V_{NC} = 1.8 V, 0.8 V, I_{COM} = –8 mA,	Switch ON, See 図 7-1	25°C	2.3 V		0.01	0.05	Ω
				Full			0.05	0.05	
ON-state resistance flatness	$r_{on(flat)}$	0 ≤ (V_{NO} or V_{NC}) ≤ V_{CC}, I_{COM} = –8 mA,	Switch ON, See 図 7-1	25°C	2.3 V		0.05		Ω
		V_{NO} or V_{NC} = 0.8 V, 1.8 V, I_{COM} = –8 mA,	Switch ON, See 図 7-1	25°C			0.03	0.08	
				Full				0.1	
NC, NO OFF leakage current	$I_{NC(OFF)}$, $I_{NO(OFF)}$	V_{NC} or V_{NO} = 0.5 V, V_{COM} = 2.2 V, or V_{NC} or V_{NO} = 2.2 V, V_{COM} = 0.5 V,	Switch OFF, See 図 7-2	25°C	2.7 V	–10		10	nA
				Full		–50		50	
NC, NO ON leakage current	$I_{NC(ON)}$, $I_{NO(ON)}$	V_{NC} or V_{NO} = 0.5 V, V_{COM} = Open, or V_{NC} or V_{NO} = 2.2 V, V_{COM} = Open,	Switch ON, See 図 7-3	25°C	2.7 V	–10		10	nA
				Full		–100		100	

Copyright © 2022 Texas Instruments Incorporated

6.6 Electrical Characteristics for 2.5-V Supply (continued)

V_{CC} = 2.3 V to 2.7 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
ANALOG SWITCH (continued)									
COM ON leakage current	$I_{COM(ON)}$	V_{NC} or V_{NO} = Open, V_{COM} = 0.5 V, or V_{NC} or V_{NO} = Open, V_{COM} = 2.2 V,	Switch ON, See 図 7-3	25°C	2.7 V	–10		10	nA
				Full		–100		100	
DIGITAL CONTROL INPUTS (IN1, IN2)(2)									
Input logic high	V_{IH}			Full		1.25			V
Input logic low	V_{IL}			Full				0.5	V
Input leakage current	I_{IH}, I_{IL}	V_I = 2.7 V or 0		25°C	2.7 V	–40	5	40	nA
				Full		–50		50	
DYNAMIC									
Charge injection	Q_C	V_{GEN} = 0, R_{GEN} = 0,	C_L = 1 nF, See 図 7-10	25°C	2.5 V		8		pC
NC, NO OFF capacitance	$C_{NC(OFF)}$, $C_{NO(OFF)}$	V_{NC} or V_{NO} = V_{CC} or GND, Switch OFF,	See 図 7-4	25°C	2.5 V		90		pF
NC, NO ON capacitance	$C_{NC(ON)}$, $C_{NO(ON)}$	V_{NC} or V_{NO} = V_{CC} or GND, Switch ON,	See 図 7-4	25°C	2.5 V		250		pF
COM ON capacitance	$C_{COM(ON)}$	V_{COM} = V_{CC} or GND, Switch ON,	See 図 7-4	25°C	2.5 V		250		pF
Digital input capacitance	C_I	V_I = V_{CC} or GND,	See 図 7-4	25°C	2.5 V		2		pF
Bandwidth	BW	R_L = 50 Ω, Switch ON,	See 図 7-7	25°C	2.5 V		23		MHz
OFF isolation	O_{ISO}	R_L = 50 Ω, f = 1 MHz,	See 図 7-8	25°C	2.5 V		–72		dB
Crosstalk	X_{TALK}	R_L = 50 Ω, f = 1 MHz,	See 図 7-9	25°C	2.5 V		–96		dB
Total harmonic distortion	THD	R_L = 600 Ω, C_L = 50 pF,	f = 20 Hz to 20 kHz, See 図 7-11	25°C	2.5 V		0.003%		
SUPPLY									
Positive supply current	I_{CC}	V_I = V_{CC} or GND		25°C	2.7 V		10	100	nA
				Full			700		

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
(2) All unused digital inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*.

Copyright © 2022 Texas Instruments Incorporated

6.7 Electrical Characteristics for 1.8-V Supply

V_{CC} = 1.65 V to 1.95 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
ANALOG SWITCH									
Analog signal range	V_{COM}, V_{NO}, V_{NC}					0		V_{CC}	V
Peak ON resistance	r_{peak}	0 ≤ (V_{NO} or V_{NC}) ≤V_{CC}, I_{COM} = –2 mA,	Switch ON, See 図 7-1	25°C	1.65 V		0.4	0.7	Ω
				Full				0.8	
ON-state resistance	r_{on}	V_{NO} or V_{NC} = 1.5 V, I_{COM} = –2 mA,	Switch ON, See 図 7-1	25°C	1.65 V		0.3	0.45	Ω
				Full				0.5	
ANALOG SWITCH (continued)									
ON-state resistance match between channels	Δr_{on}	V_{NO} or V_{NC} = 0.6 V, 1.5 V, I_{COM} = –2 mA,	Switch ON, See 図 7-1	25°C	1.65 V		0.02	0.04	Ω
				Full				0.05	
ON-state resistance flatness	$r_{on(flat)}$	0 ≤ (V_{NO} or V_{NC}) ≤ V_{CC}, I_{COM} = –2 mA,	Switch ON, See 図 7-1	25°C	1.65 V		0.13		Ω
		V_{NO} or V_{NC} = 0.6 V, 1.5 V, I_{COM} = –8 mA,	Switch ON, See 図 7-1	25°C			0.08	0.15	
				Full				0.2	
NC, NO OFF leakage current	$I_{NC(OFF)}$, $I_{NO(OFF)}$	V_{NC} or V_{NO} = 0.3 V, V_{COM} = 1.65 V, or V_{NC} or V_{NO} = 1.65 V, V_{COM} = 0.3 V,	Switch OFF, See 図 7-2	25°C	1.95	–10		10	nA
				Full		–50		50	
NC, NO ON leakage current	$I_{NC(ON)}$, $I_{NO(ON)}$	V_{NC} or V_{NO} = 0.3 V, V_{COM} = Open, or V_{NC} or V_{NO} = 1.65 V, V_{COM} = Open,	Switch ON, See 図 7-3	25°C	1.95 V	–10		10	nA
				Full		–100		100	
COM ON leakage current	$I_{COM(ON)}$	V_{NC} or V_{NO} = Open, V_{COM} = 0.3 V, or V_{NC} or V_{NO} = Open, V_{COM} = 1.65 V,	Switch ON, See 図 7-3	25°C	1.95 V	–10		10	nA
				Full		–100		100	
DIGITAL CONTROL INPUTS (IN1, IN2)(2)									
Input logic high	V_{IH}			Full		1			V
Input logic low	V_{IL}			Full				0.4	V
Input leakage current	I_{IH}, I_{IL}	V_I = 1.95 V or 0		25°C	1.95 V	–40	5	40	nA
				Full		–50		50	
DYNAMIC									
Charge injection	Q_C	V_{GEN} = 0, R_{GEN} = 0,	C_L = 1 nF, See 図 7-10	25°C	1.8 V		5		pC
NC, NO OFF capacitance	$C_{NC(OFF)}$, $C_{NO(OFF)}$	V_{NC} or V_{NO} = V_{CC} or GND, Switch OFF,	See 図 7-4	25°C	1.8 V		90		pF
NC, NO ON capacitance	$C_{NC(ON)}$, $C_{NO(ON)}$	V_{NC} or V_{NO} = V_{CC} or GND, Switch ON,	See 図 7-4	25°C	1.8 V		250		pF
COM ON capacitance	$C_{COM(ON)}$	V_{COM} = V_{CC} or GND, Switch ON,	See 図 7-4	25°C	1.8 V		250		pF
Digital input capacitance	C_{IN}	V_I = V_{CC} or GND,	See 図 7-4	25°C	1.8 V		2		pF
Bandwidth	BW	R_L = 50 Ω, Switch ON,	See 図 7-7	25°C	1.8 V		23		MHz
OFF isolation	O_{ISO}	R_L = 50 Ω, f = 1 MHz,	See 図 7-8	25°C	1.8 V		–73		dB
Crosstalk	X_{TALK}	R_L = 50 Ω, f = 1 MHz,	See 図 7-9	25°C	1.8 V		–97		dB
Total harmonic distortion	THD	R_L = 600 Ω, C_L = 50 pF,	f = 20 Hz to 20 kHz, See 図 7-11	25°C	1.8 V		0.005%		

Copyright © 2022 Texas Instruments Incorporated

6.7 Electrical Characteristics for 1.8-V Supply (continued)

V_{CC} = 1.65 V to 1.95 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS	T_A	V_{CC}	MIN	TYP	MAX	UNIT
SUPPLY								
Positive supply current	I_{CC}	V_I = V_{CC} or GND	25°C	1.95 V		100	50	nA
			Full				700	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum
(2) All unused digital inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*.

6.8 Switching Characteristics for a 3-V Supply

V_{CC} = 2.7 V to 3.6 V, T_A = –40°C to 85°C (unless otherwise noted)(1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
Dynamic									
Turnon time	t_{ON}	V_{COM} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-5	25°C	3.0 V		20	35	ns
				Full	2.7 V to 3.6 V			40	
Turnoff time	t_{OFF}	V_{COM} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-5	25°C	3.0 V		12	25	ns
				Full	2.7 V to 3.6 V			30	
Break-before-make time	t_{BBM}	V_{NC} = V_{NO} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-6	25°C	3.0 V	1	10	25	ns
				Full	2.7 V to 3.6 V	0.5		30	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

6.9 Switching Characteristics for a 2.5-V Supply

V_{CC} = 2.3 V to 2.7 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
Dynamic									
Turnon time	t_{ON}	V_{COM} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-5	25°C	2.5 V		23	45	ns
				Full	2.3 V to 2.7 V			50	
Turnoff time	t_{OFF}	V_{COM} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-5	25°C	2.5 V		17	27	ns
				Full	2.3 V to 2.7 V			30	
Break-before-make time	t_{BBM}	V_{NC} = V_{NO} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-6	25°C	2.5 V	2	14	30	ns
				Full	2.3 V to 2.7 V	1		35	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

6.10 Switching Characteristics for a 1.8-V Supply

V_{CC} = 1.65 V to 1.95 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER	TEST CONDITIONS	T_A	V_{CC}	MIN	TYP	MAX	UNIT
Dynamic							

Copyright © 2022 Texas Instruments Incorporated

V_{CC} = 1.65 V to 1.95 V, T_A = –40°C to 85°C (unless otherwise noted) (1)

PARAMETER		TEST CONDITIONS		T_A	V_{CC}	MIN	TYP	MAX	UNIT
Turnon time	t_{ON}	V_{COM} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-5	25°C	1.8 V		53	75	ns
				Full	1.65 V to 1.96 V			80	
Turnoff time	t_{OFF}	V_{COM} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-5	25°C	1.8 V		24	35	ns
				Full	1.65 V to 1.96 V			40	
Break-before-make time	t_{BBM}	V_{NC} = V_{NO} = V_{CC}, R_L = 50 Ω	C_L = 35 pF, See 図 7-6	25°C	1.8 V	2	30	40	ns
				Full	1.65 V to 1.96 V	1		50	

(1) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

Copyright © 2022 Texas Instruments Incorporated

6.11 Typical Characteristics

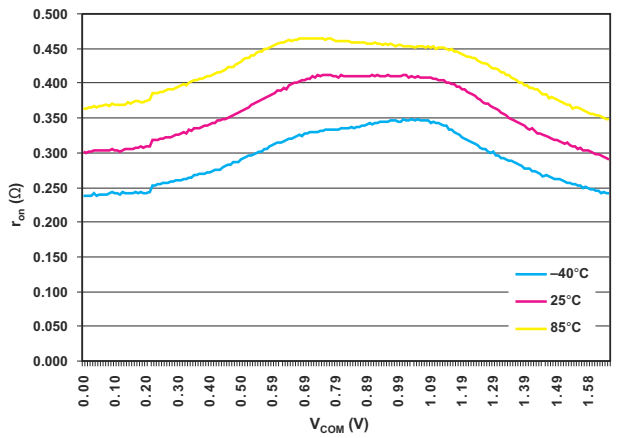


図 6-1. r_{on} vs V_{COM} (V_{CC} = 1.65 V)

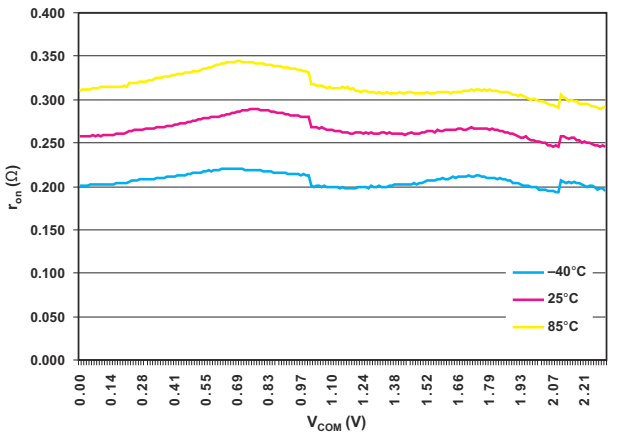


図 6-2. r_{on} vs V_{COM} (V_{CC} = 2.3 V)

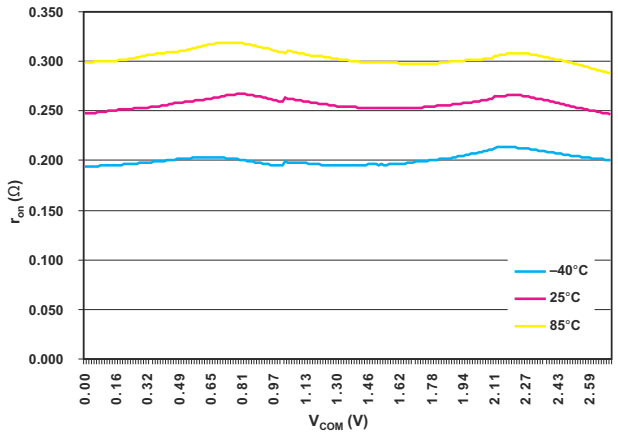


図 6-3. r_{on} vs V_{COM} (V_{CC} = 2.7 V)

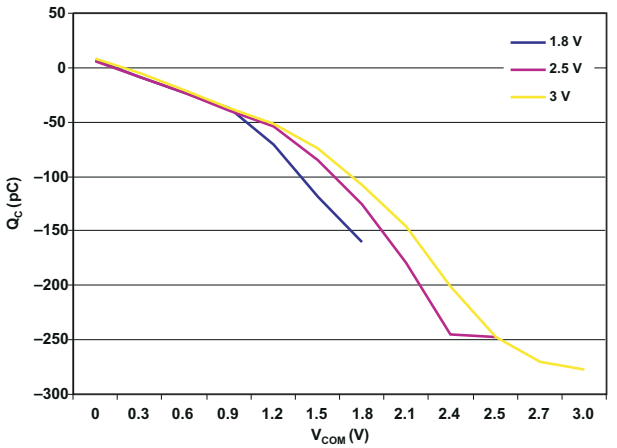


図 6-4. Charge Injection (Q_C) vs V_{COM} (T_A = 25°C)

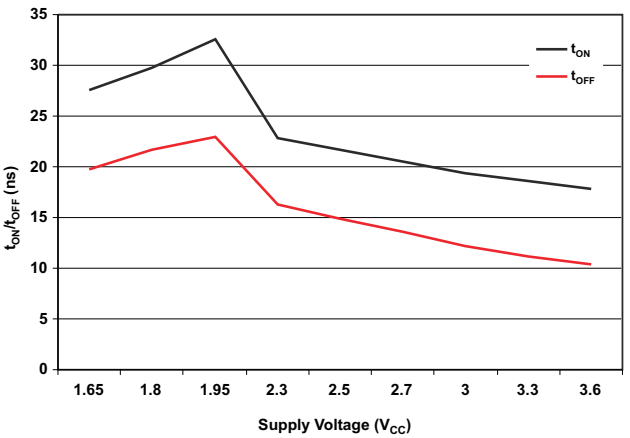


図 6-5. t_{ON} and t_{OFF} vs Supply Voltage (T_A = 25°C)

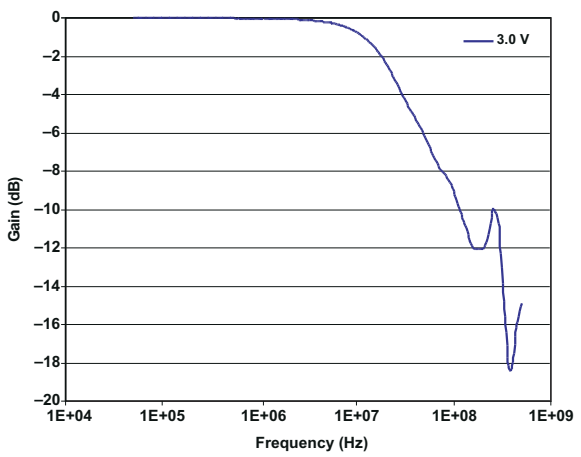


図 6-6. Bandwidth

Copyright © 2022 Texas Instruments Incorporated

6.11 Typical Characteristics (continued)

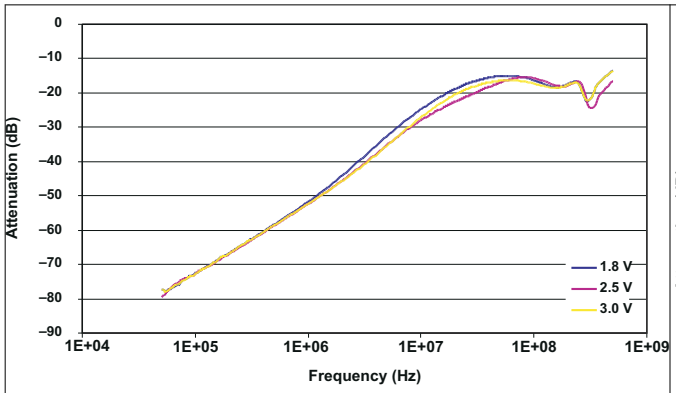


図 6-7. OFF Isolation

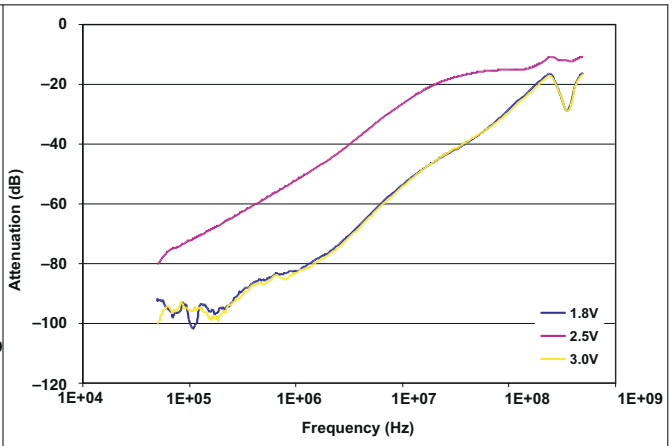


図 6-8. Crosstalk


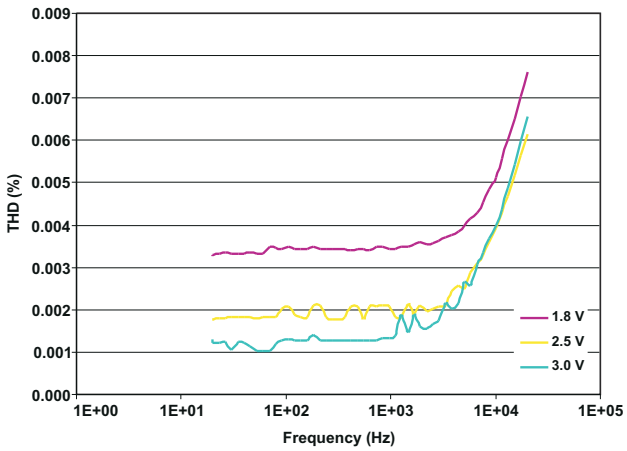


図 6-9. Total Harmonic Distortion vs Frequency

7 Parameter Measurement Information

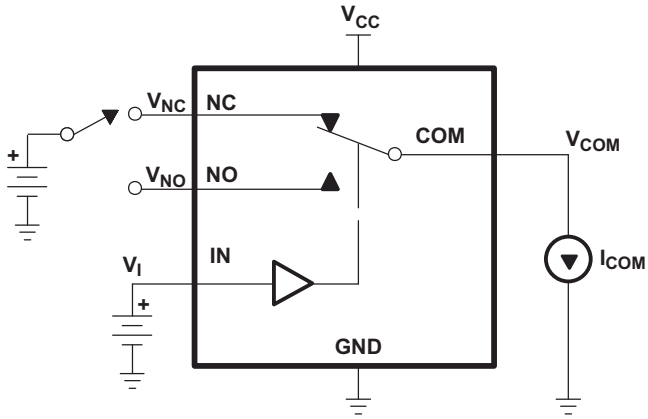


Channel ON

$$r_{on} = \frac{V_{COM} - V_{NO} \text{ or } V_{NC}}{I_{COM}} \Omega$$


$V_I = V_{IH}$ or V_{IL}

図 7-1. ON-State Resistance

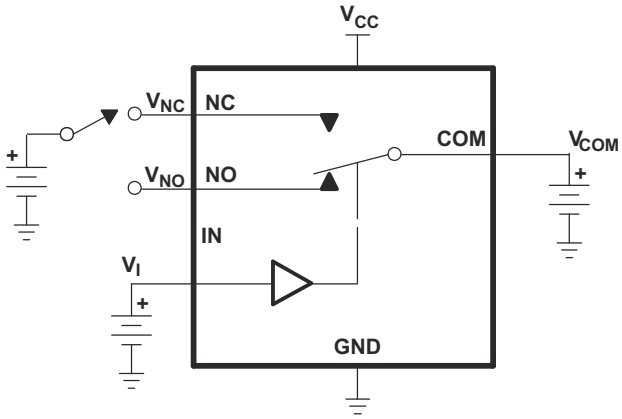

OFF-State Leakage Current
Channel OFF
$V_I = V_{IH}$ or V_{IL}

図 7-2. OFF-State Leakage Current ($I_{NC(OFF)}$, $I_{NC(PWROFF)}$, $I_{NO(OFF)}$, $I_{NO(PWROFF)}$, $I_{COM(OFF)}$, $I_{COM(PWROFF)}$)

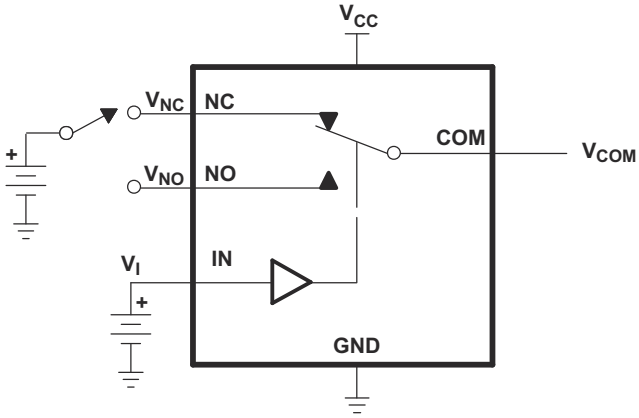

ON-State Leakage Current
Channel ON
$V_I = V_{IH}$ or V_{IL}

図 7-3. ON-State Leakage Current ($I_{COM(ON)}$, $I_{NC(ON)}$, $I_{NO(ON)}$)

Copyright © 2022 Texas Instruments Incorporated



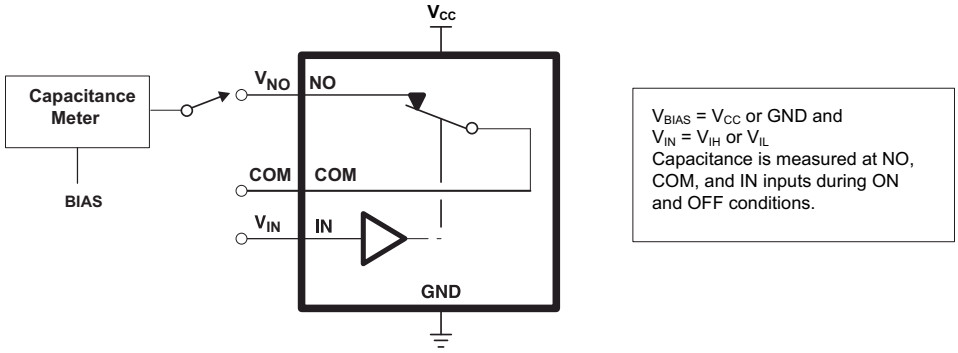


図 7-4. Capacitance C_I, $C_{NC(OFF)}$, $C_{NO(OFF)}$, $C_{NC(ON)}$, $C_{NO(ON)}$)

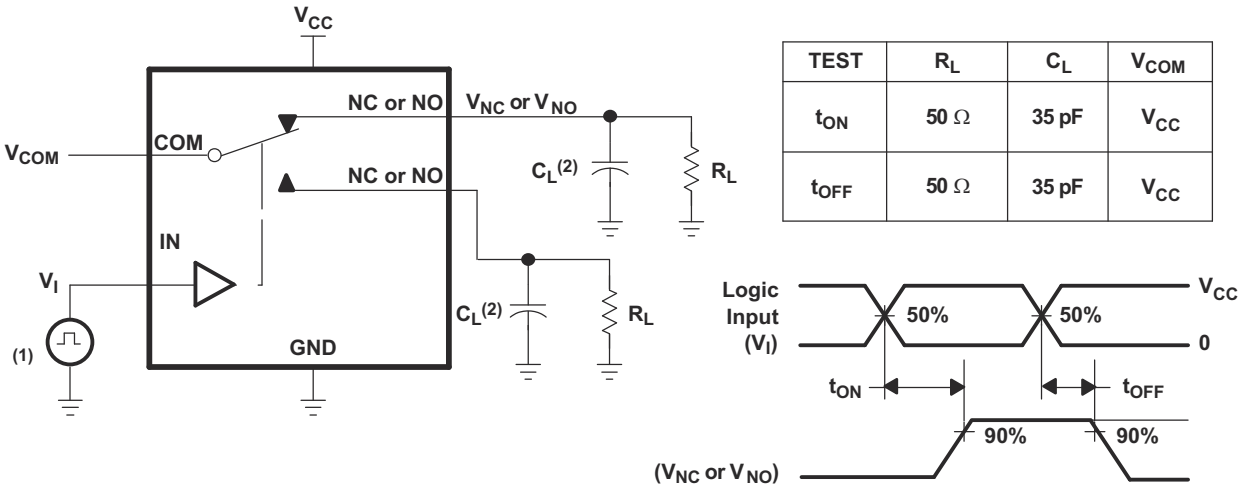

A. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r < 5 ns, t_f < 5 ns.
B. C_L includes probe and jig capacitance.

図 7-5. Turn-On (t_{ON}) and Turn-Off Time (t_{OFF})

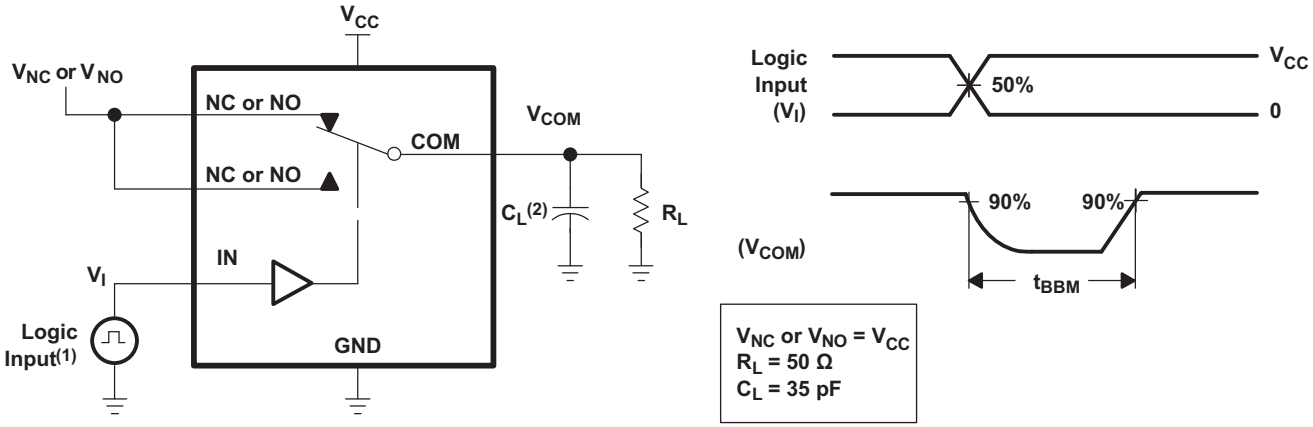

A. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r < 5 ns, t_f < 5 ns.
B. C_L includes probe and jig capacitance.

図 7-6. Break-Before-Make Time (t_{BBM})

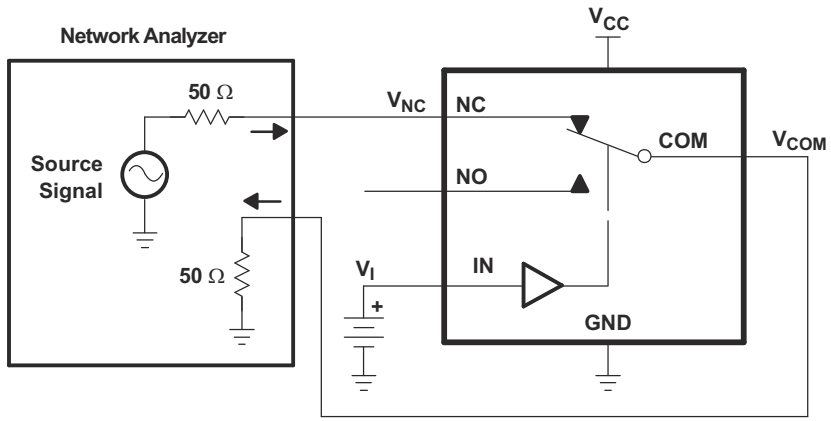


図 7-7. Bandwidth (BW)

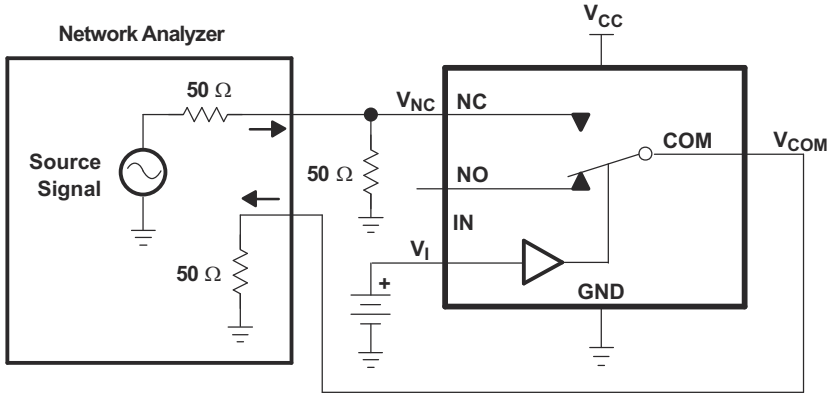


図 7-8. OFF Isolation (O_{ISO})


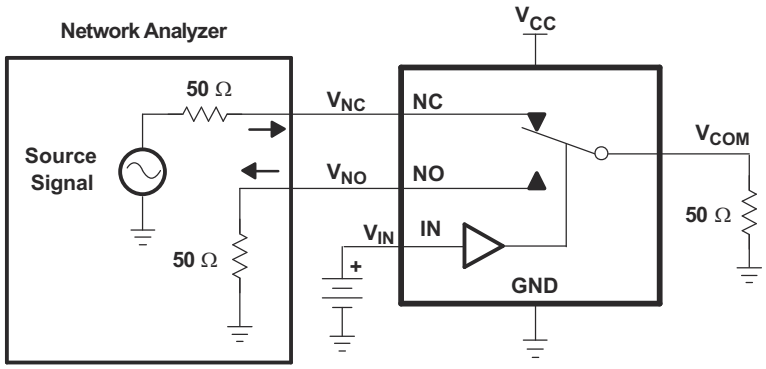



図 7-9. Crosstalk (X_{TALK})

Copyright © 2022 Texas Instruments Incorporated

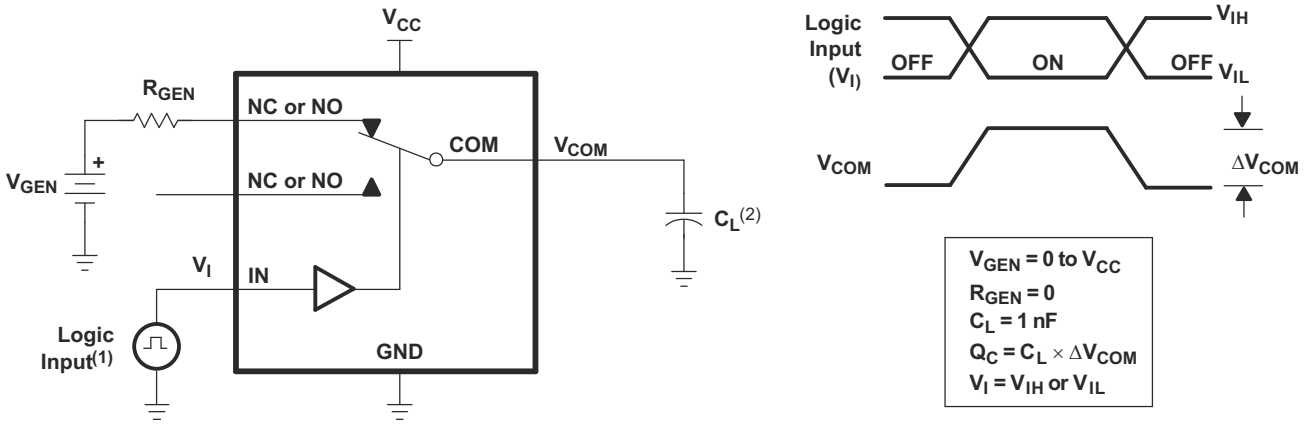

A. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r < 5 ns, t_f < 5 ns.
B. C_L includes probe and jig capacitance.

図 7-10. Charge Injection (Q_C)

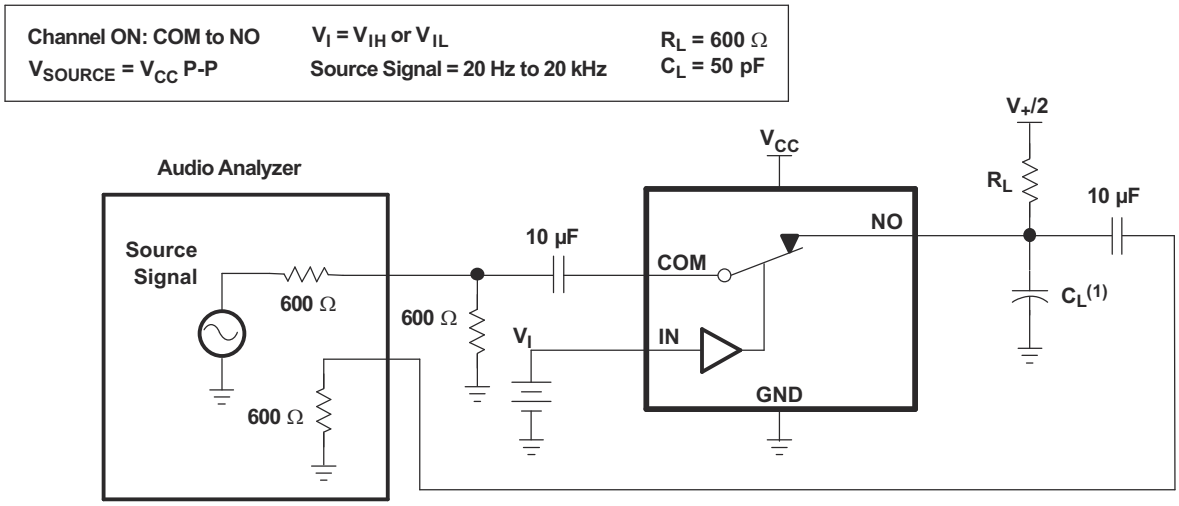

A. C_L includes probe and jig capacitance.


図 7-11. Total Harmonic Distortion (THD)

8 Detailed Description

8.1 Overview

The TS3A24159 is a 2-channel single-pole double-throw (SPDT) bidirectional analog switch that is designed to operate from 1.65 V to 3.6 V. It offers low ON-state resistance and excellent ON-state resistance matching with the break-before-make feature, to prevent signal distortion during the transferring of a signal from one channel to another. The device has excellent total harmonic distortion (THD) performance, low ON-state resistance, and consumes very low power. These are some of the features that make this device suitable for a variety of markets and many different applications.

8.2 Functional Block Diagram



8.3 Feature Description

The TS3A24159 device is bidirectional with two single-pole, double-throw switches. Each of the two switches are controlled independently by two digital signals.

8.4 Device Functional Modes

表 8-1. Function Table

IN	NC TO COM, COM TO NC	NO TO COM, COM TO NO
L	ON	OFF
H	OFF	ON

Copyright © 2022 Texas Instruments Incorporated

9 Application and Implementation


注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

9.1 Application Information

The switch of the TS3A24159 device is bidirectional. Hence, NO, NC, and COM pins can be used as both inputs or outputs.

9.2 Typical Application

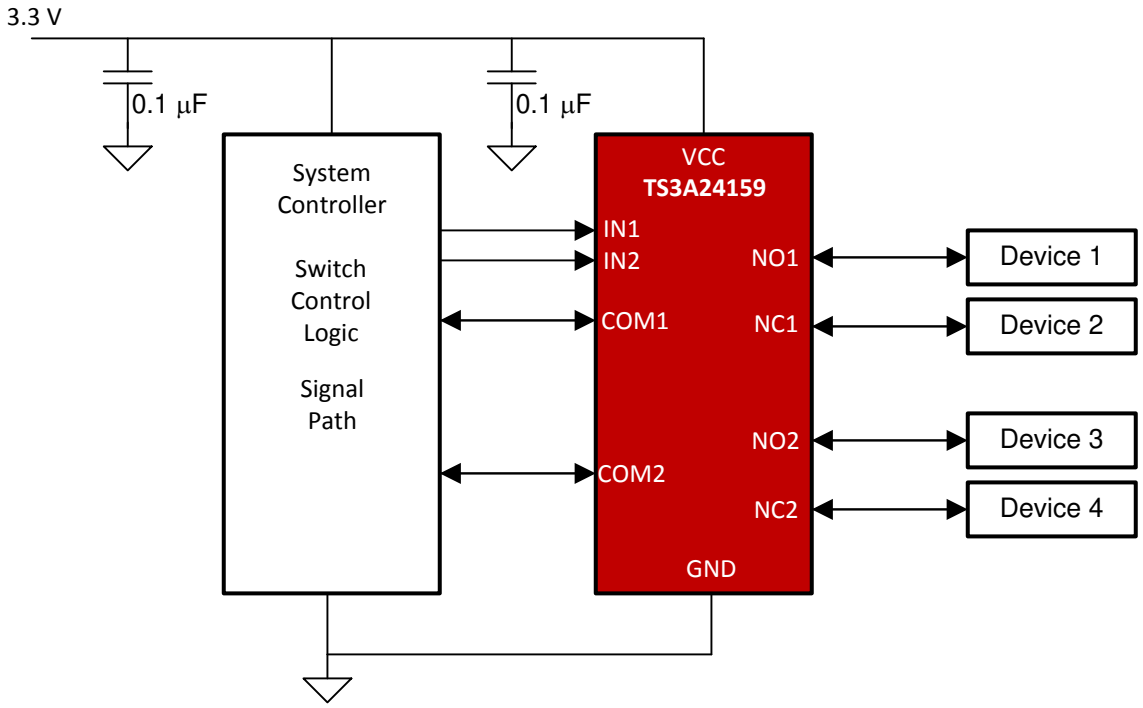

9.2.1 Design Requirements

Ensure that all of the signals passing through the switch are within the specified ranges to ensure proper performance.

表 9-1. Design Parameters

		MIN	MAX	UNIT
V_{CC}	Supply Voltage	1.65	3.6	V
V_{NC} V_{NO} V_{COM}	Signal Voltage	0	V_{CC}	V
V_{IN}	Digital Input Voltage	0	V_{CC}	V

9.2.2 Detailed Design Procedure

The TS3A24159 device can be properly operated without any external components. However, it is recommended to connect the unused pins to ground through a 50-Ω resistor to prevent signal reflections back into the device. It is also recommended that the digital control pins (IN1 and IN2) be pulled up to V_{CC} or down to GND to avoid undesired switch positions that could result from the floating pin.

Select the appropriate supply voltage to cover the entire voltage swing of the signal passing through the switch because the TS3A24159 input/output signal swing through NO and COM are dependant of the supply voltage V_{CC}.

9.2.3 Application Curve

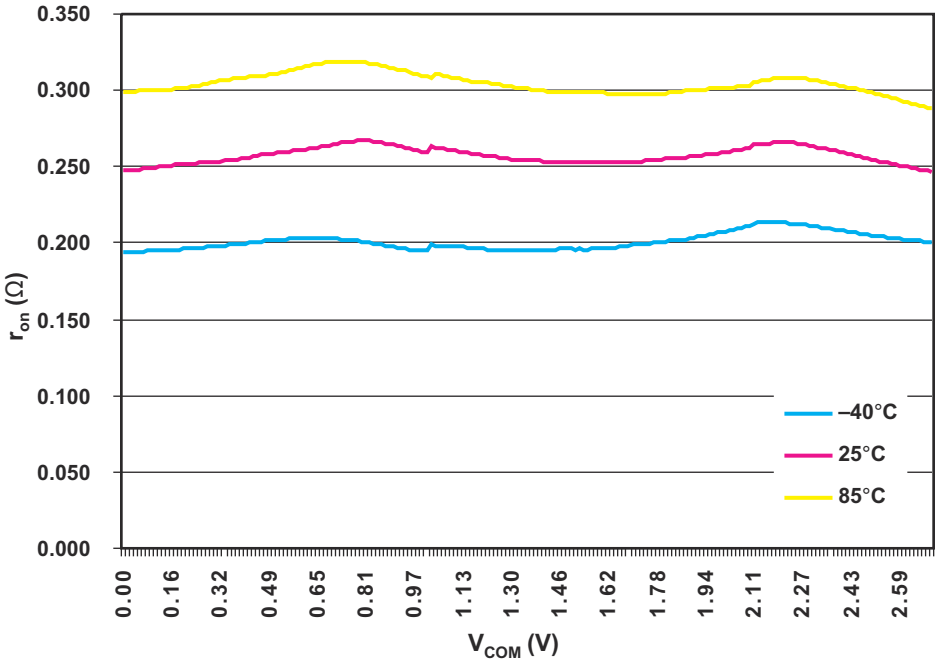


図 9-1. r_{ON} vs V_{COM}

10 Power Supply Recommendations

- Proper power-supply sequencing is recommended for all CMOS devices.
- Do not exceed the absolute maximum ratings, because stresses beyond the listed ratings can cause permanent damage to the device.
- Always sequence V_{CC} on first, followed by NO or COM.
- Although it is not required, power-supply bypassing improves noise margin and prevents switching noise propagation from the V_{CC} supply to other components.
- A 0.1-µF capacitor, connected from V_{CC} to GND, is adequate for most applications.

Copyright © 2022 Texas Instruments Incorporated

11 Layout

11.1 Layout Guidelines

To ensure reliability of the device, following common printed-circuit board layout guidelines is recommended. Bypass capacitors must be used on power supplies. Short trace lengths should be used to avoid excessive loading.

11.2 Layout Example

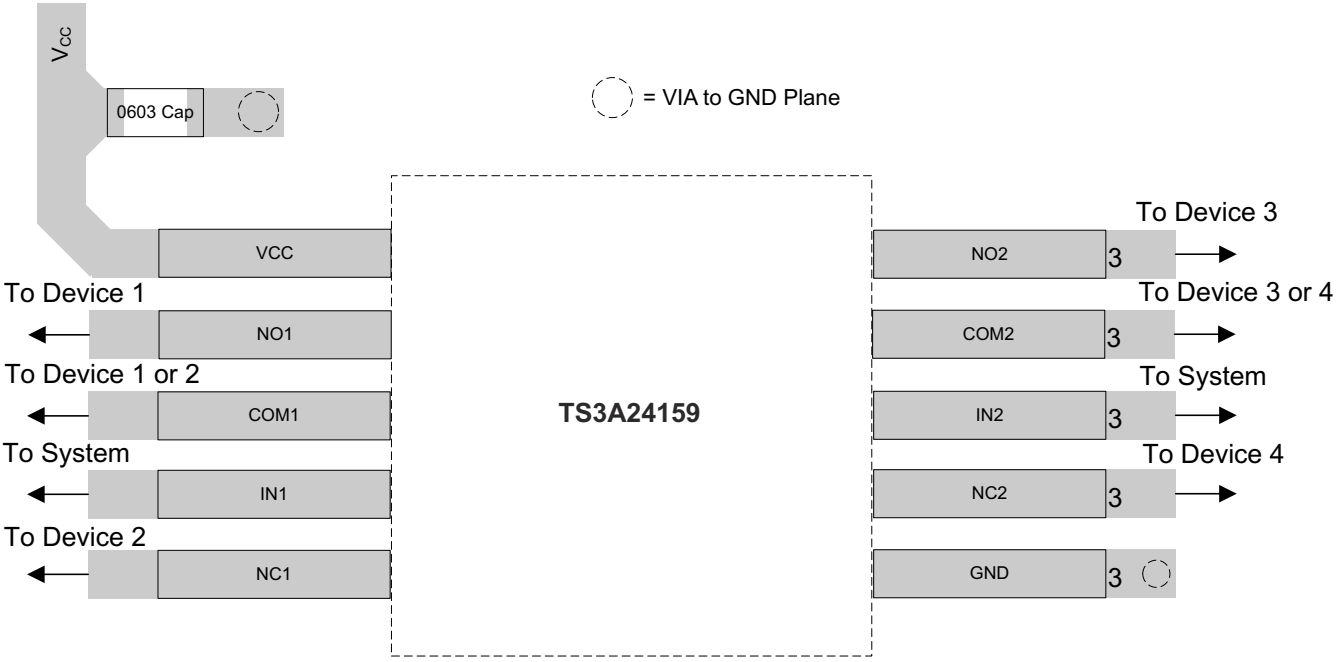


図 11-1. Layout Example

12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, *Implications of Slow or Floating CMOS Inputs* application note

12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.3 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の使用条件を参照してください。

12.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

12.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.6 Glossary

TI Glossary	This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2022 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TS3A24159DGSR	Active	Production	VSSOP (DGS) | 10	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	(L8Q, L8R)
TS3A24159DGSR.B	Active	Production	VSSOP (DGS) | 10	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	(L8Q, L8R)
TS3A24159DRCR	Active	Production	VSON (DRC) | 10	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ZWS
TS3A24159DRCR.B	Active	Production	VSON (DRC) | 10	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ZWS
TS3A24159YZPR	Active	Production	DSBGA (YZP) | 10	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	L87
TS3A24159YZPR.B	Active	Production	DSBGA (YZP) | 10	3000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	L87

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

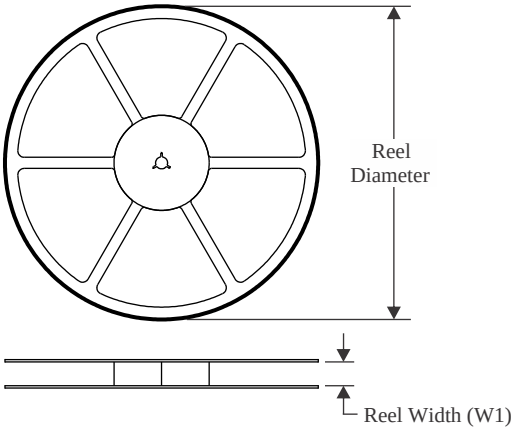


TAPE DIMENSIONS

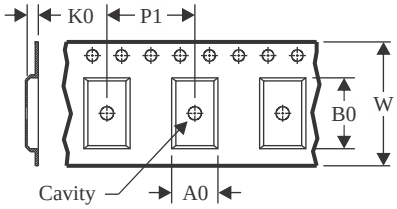

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

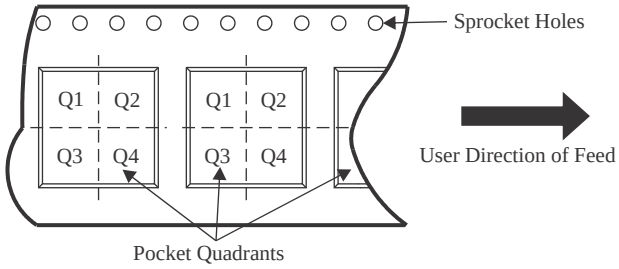

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS3A24159DGSR	VSSOP	DGS	10	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
TS3A24159DRCR	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
TS3A24159YZPR	DSBGA	YZP	10	3000	178.0	9.2	1.49	1.99	0.63	4.0	8.0	Q2

TAPE AND REEL BOX DIMENSIONS

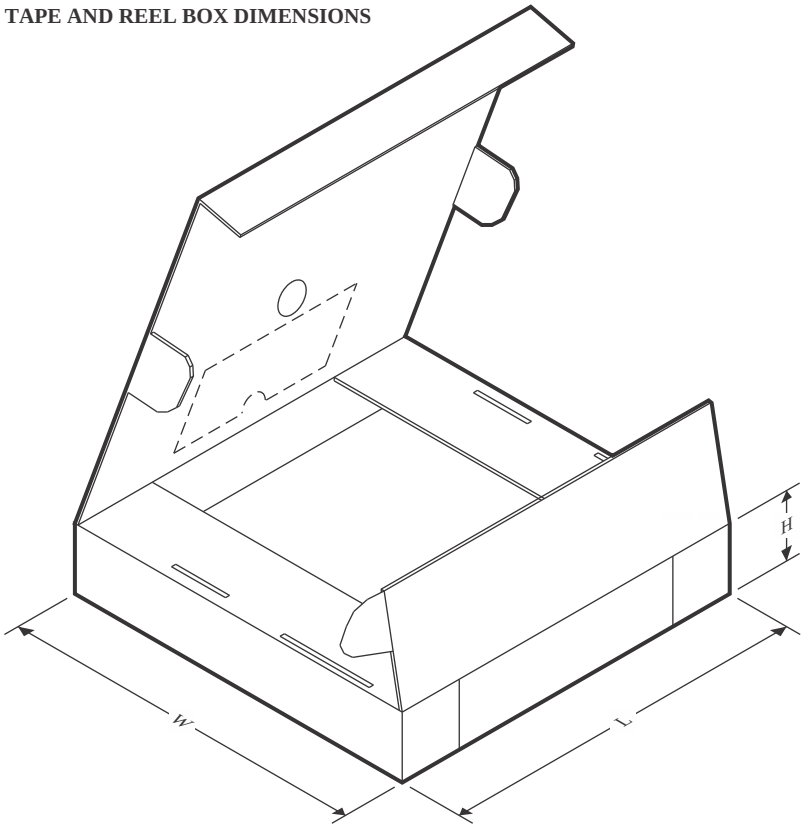

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TS3A24159DGSR	VSSOP	DGS	10	2500	358.0	335.0	35.0
TS3A24159DRCR	VSON	DRC	10	3000	353.0	353.0	32.0
TS3A24159YZPR	DSBGA	YZP	10	3000	220.0	220.0	35.0

PACKAGE OUTLINE

DGS0010A


VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

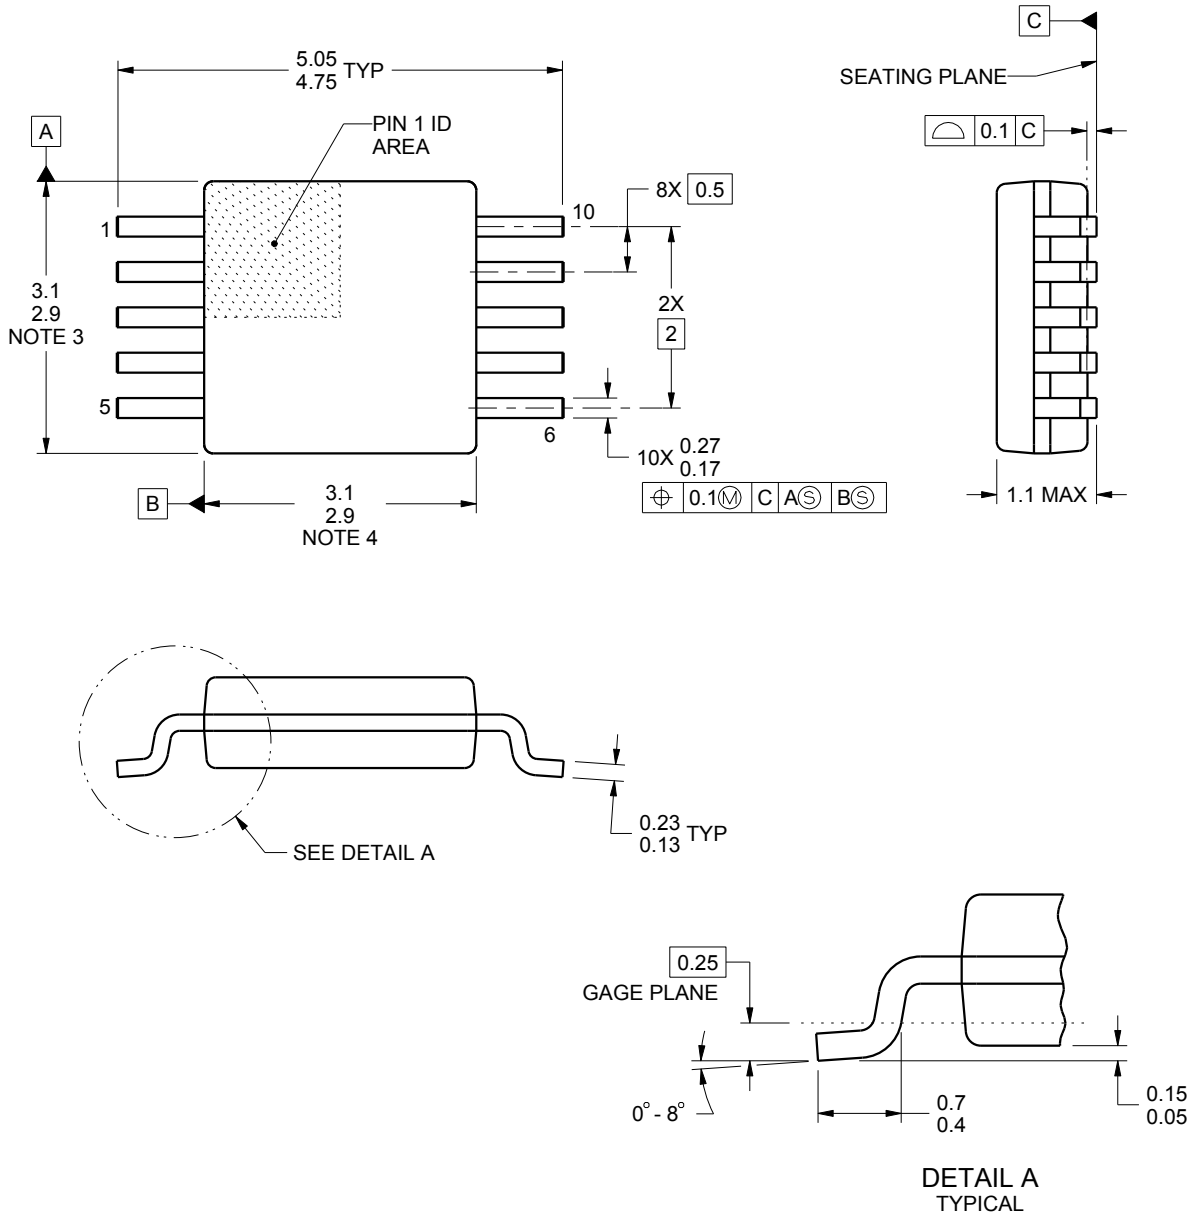


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187, variation BA.

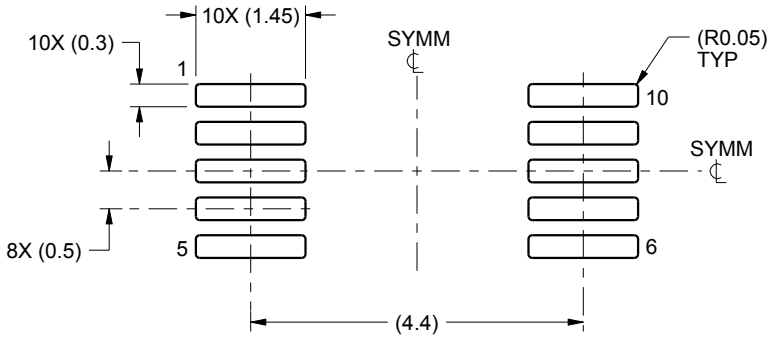

LAND PATTERN EXAMPLE
SCALE:10X

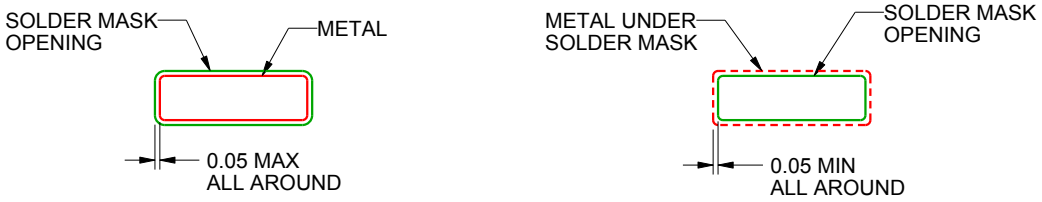


SOLDER MASK DETAILS
NOT TO SCALE

4221984/A 05/2015

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

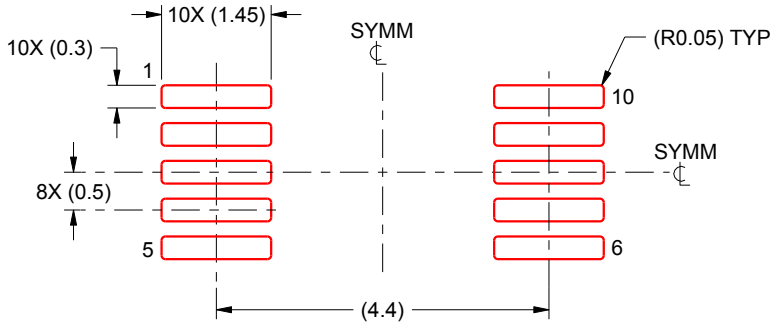

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:10X

4221984/A 05/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW


DRC 10

VSON - 1 mm max height

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

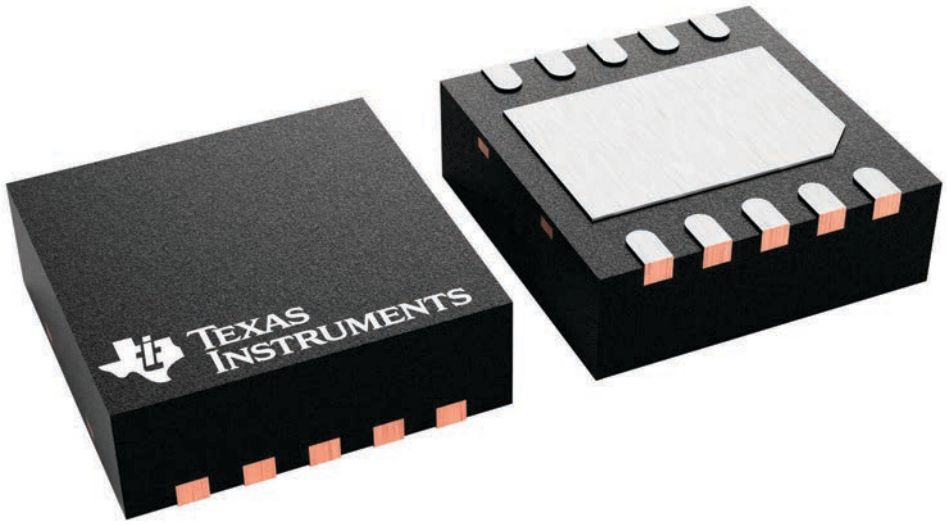


4226193/A

DRC0010J

PACKAGE OUTLINE


VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

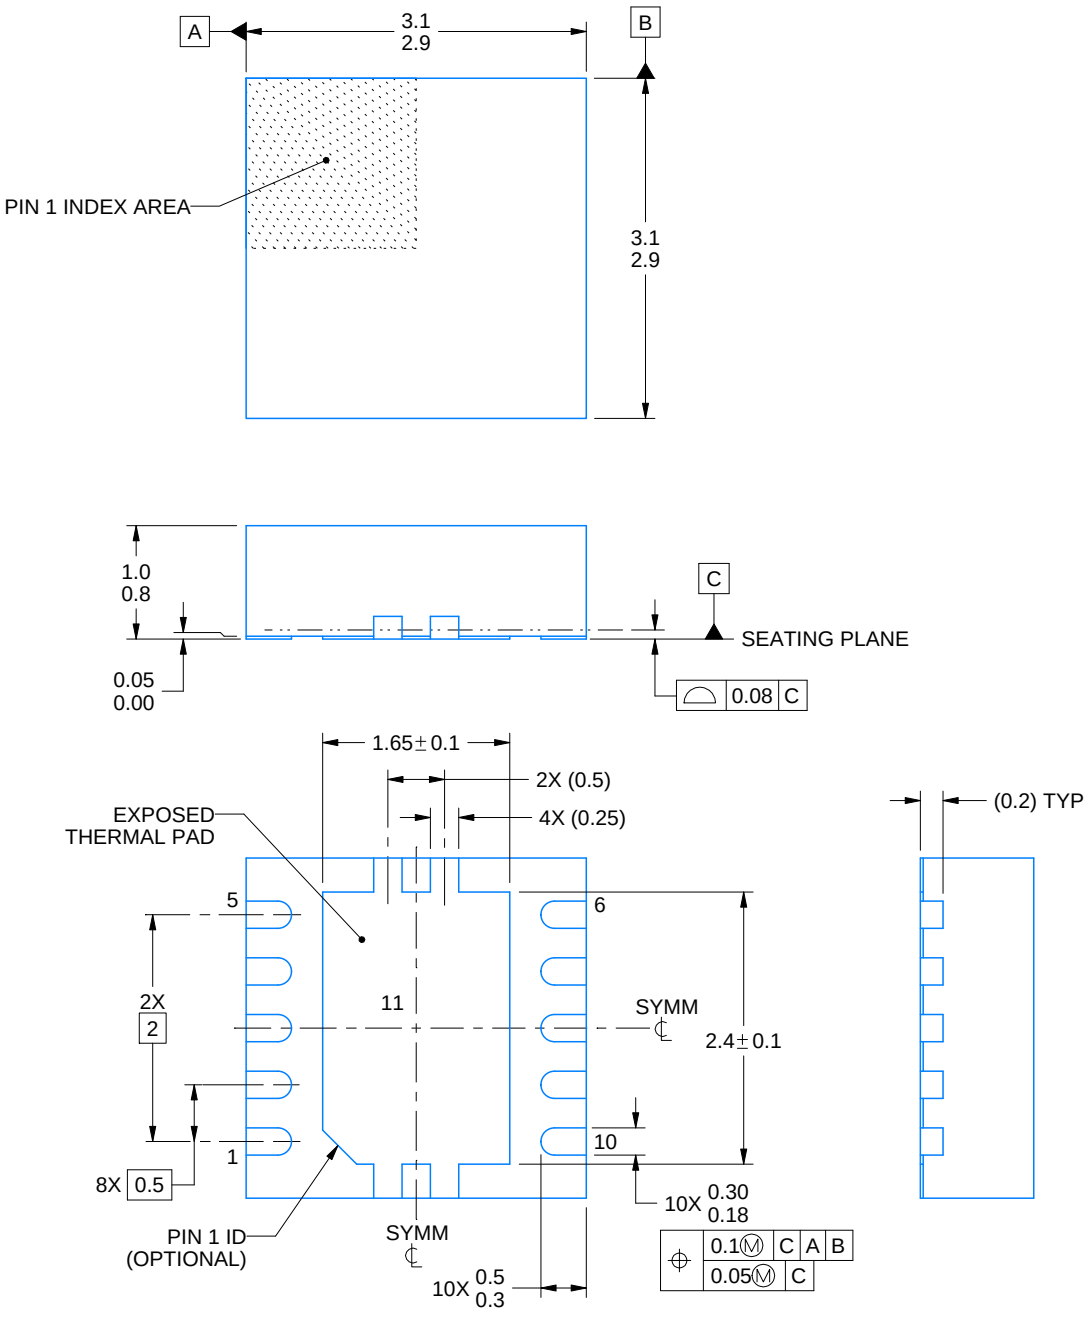


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

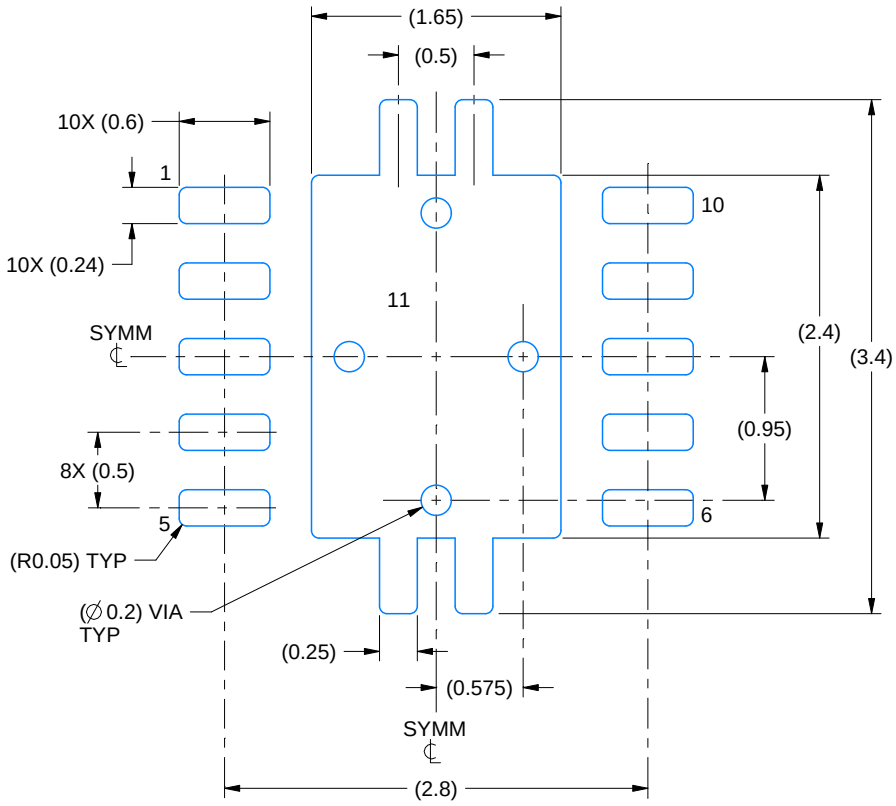

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

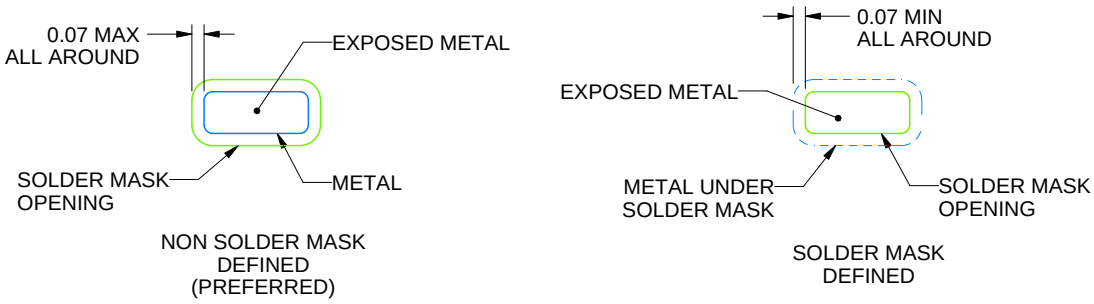

SOLDER MASK DETAILS

4218878/B 07/2018

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DRC0010J

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

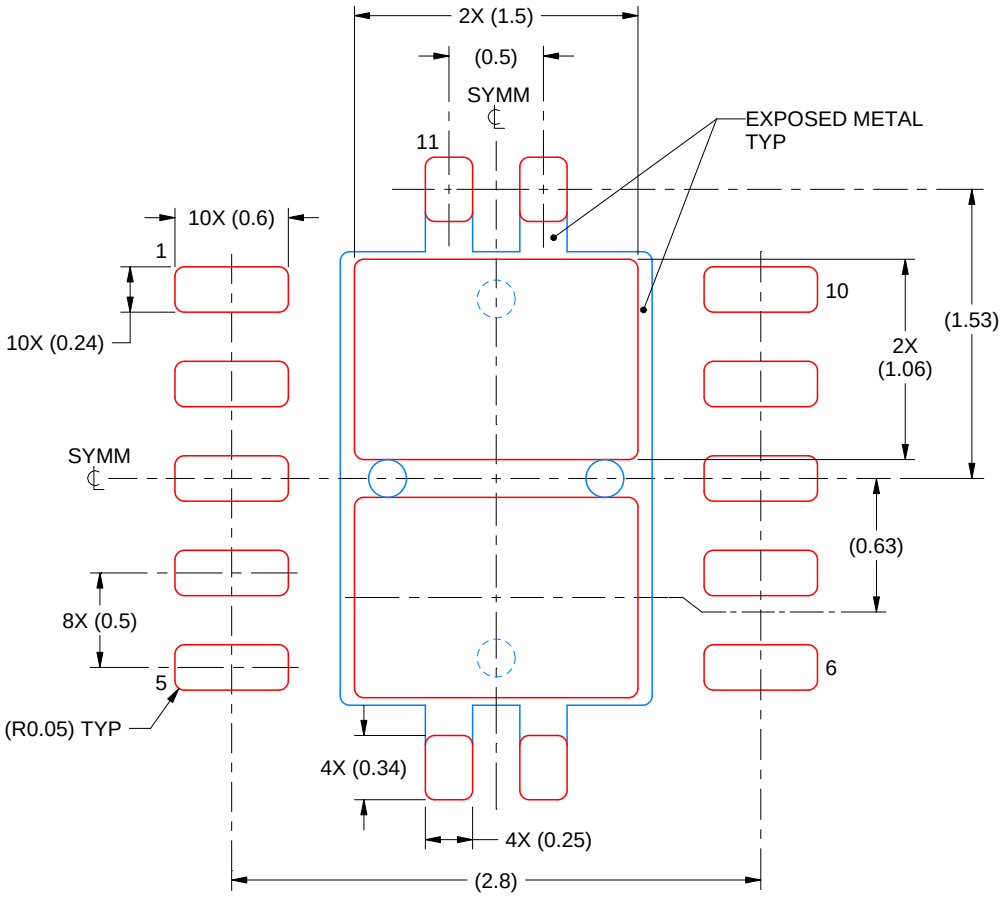


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:
80% PRINTED SOLDER COVERAGE BY AREA
SCALE:25X

4218878/B 07/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.




PACKAGE OUTLINE

YZP0010

DSBGA - 0.5 mm max height


DIE SIZE BALL GRID ARRAY

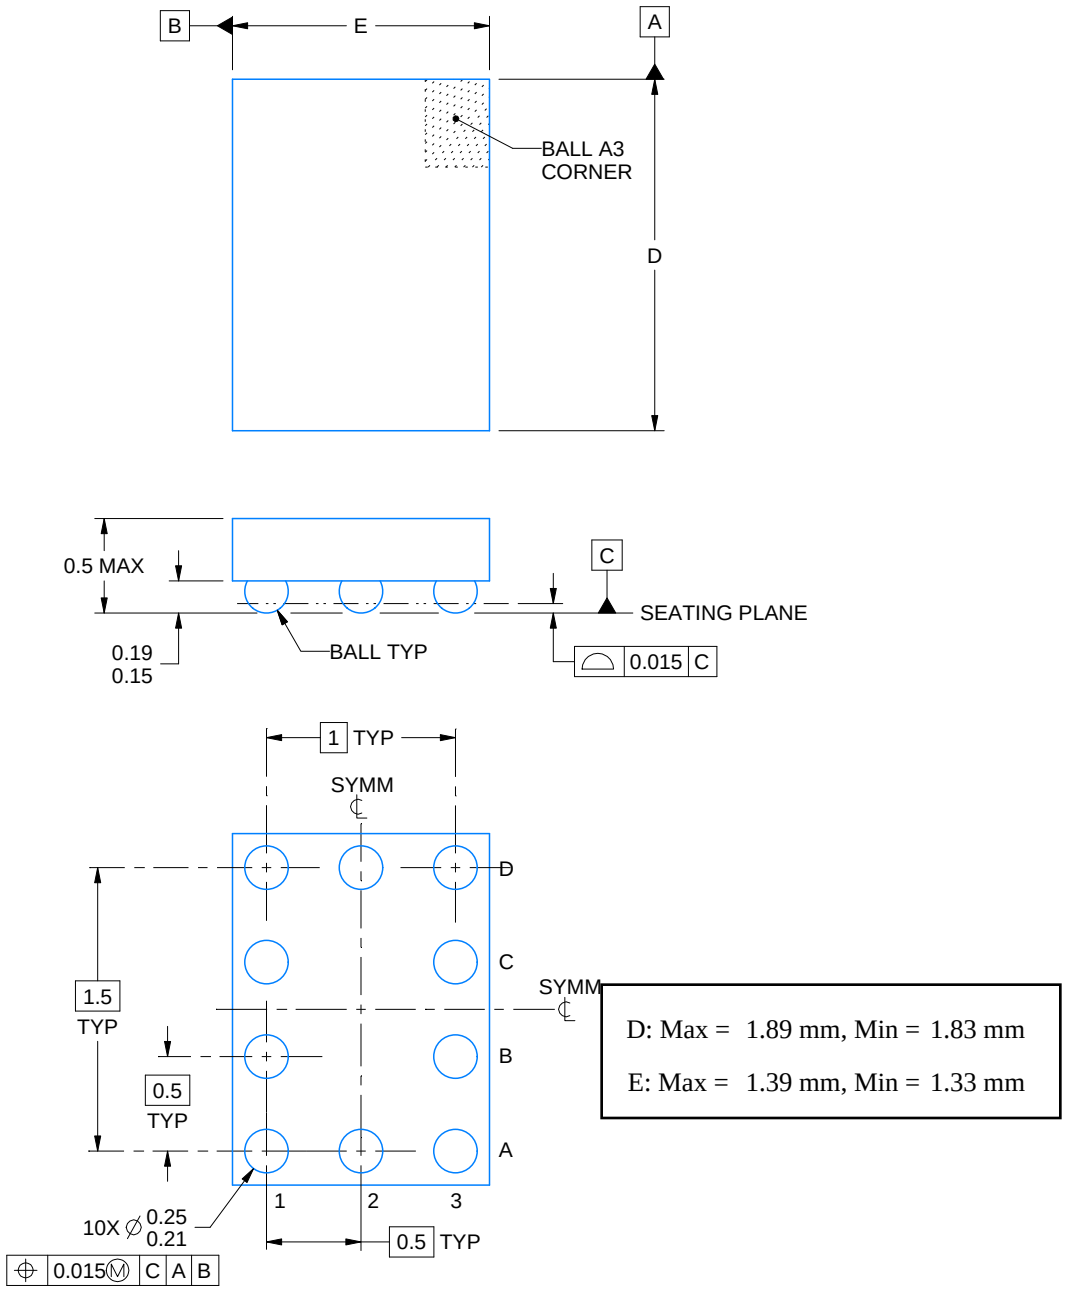


4219350/B 11/2017

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

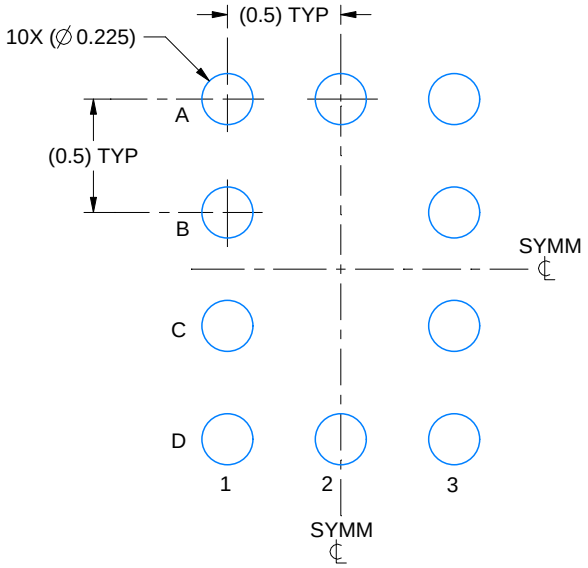

LAND PATTERN EXAMPLE
SCALE:30X

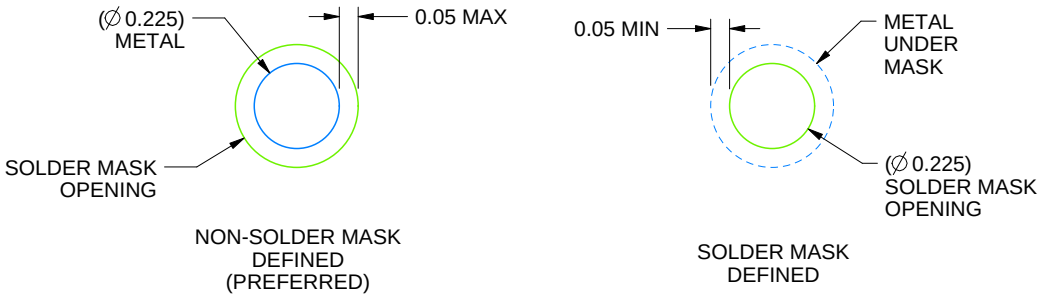

SOLDER MASK DETAILS
NOT TO SCALE

4219350/B 11/2017

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints.
For more information, see Texas Instruments literature number SBVA017 (www.ti.com/lit/sbva017).

EXAMPLE STENCIL DESIGN

YZP0010

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

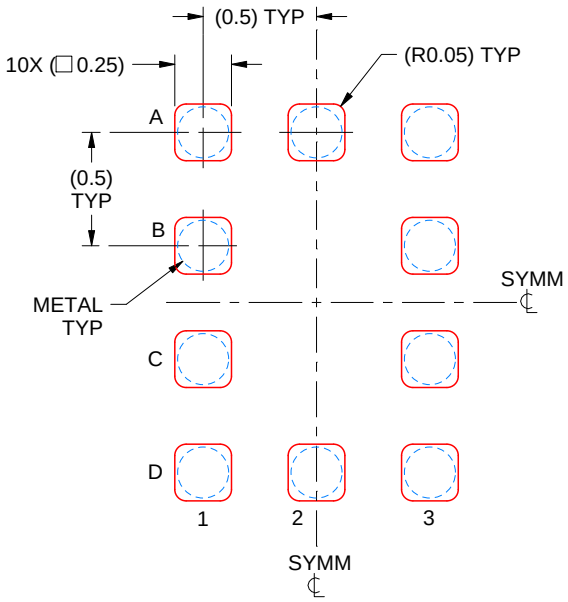

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE:30X

4219350/B 11/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月