


CLASS V, ADVANCED LinCMOS™ LOW NOISE PRECISION OPERATIONAL AMPLIFIER

Check for Samples: [TLC2201-SP](#)

FEATURES

- **QML-V Qualified SMD 5962-9088203V2A**
- **Low Input Offset Voltage: 400 μ V Max**
- **Excellent Offset Voltage Stability With Temperature: 0.5 μ V/°C Typ**
- **Rail-to-Rail Output Swing**
- **Low Input Bias Current: 1 pA Typ at $T_A = 25^\circ\text{C}$**
- **Common-Mode Input Voltage Range Includes the Negative Rail**
- **Fully Specified For Both Single-Supply and Split-Supply Operation**

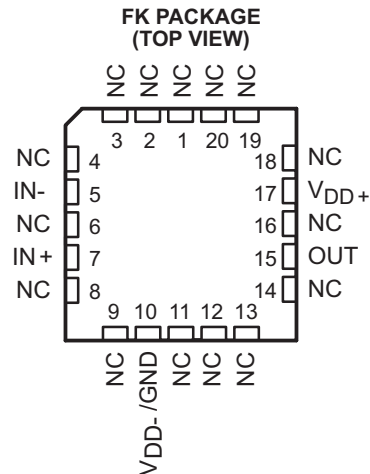

NC - No internal connection

DESCRIPTION

The TLC2201 is a precision, low-noise operational amplifier using Texas Instruments Advanced LinCMOS™ process. This device combines the noise performance of the lowest-noise JFET amplifiers with the dc precision available previously only in bipolar amplifiers. The Advanced LinCMOS™ process uses silicon-gate technology to obtain input offset voltage stability with temperature and time that far exceeds that obtainable using metal-gate technology. In addition, this technology makes possible input impedance levels that meet or exceed levels offered by top-gate JFET and expensive dielectric-isolated devices.

The combination of excellent DC and noise performance with a common-mode input voltage range that includes the negative rail makes these devices an ideal choice for high-impedance, low-level signal-conditioning applications in either single-supply or split-supply configurations.

The device inputs and outputs are designed to withstand –100-mA surge currents without sustaining latch-up. In addition, internal ESD-protection circuits prevent functional failures at voltages up to 2000 V as tested under MIL-PRF-38535, Method 3015.2; however, care should be exercised in handling these devices as exposure to ESD may result in degradation of the parametric performance.

The TLC2201 is characterized for operation over the full military temperature range of –55°C to 125°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LinCMOS is a trademark of Texas Instruments.

Parts, PSpice are trademarks of MicroSim Corporation.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

© 2011, Texas Instruments Incorporated



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

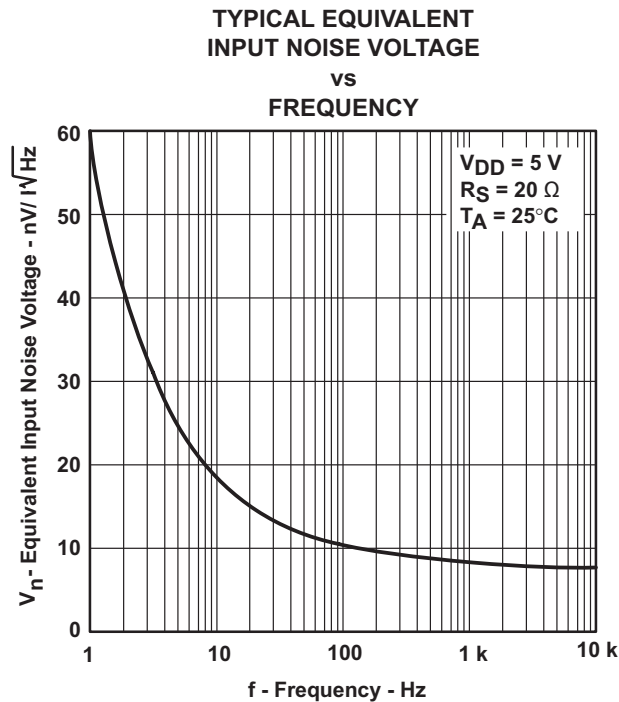


ORDERING INFORMATION⁽¹⁾

TEMPERATURE	PACKAGE ⁽²⁾	ORDERABLE PART NUMBER	TOP-SIDE MARKING
-55°C to 125°C T_{case}	20-pin FK	5962-9088203V2A	5962-9088203V2A TLC2201AMFKBQMLV

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

EQUIVALENT SCHEMATIC

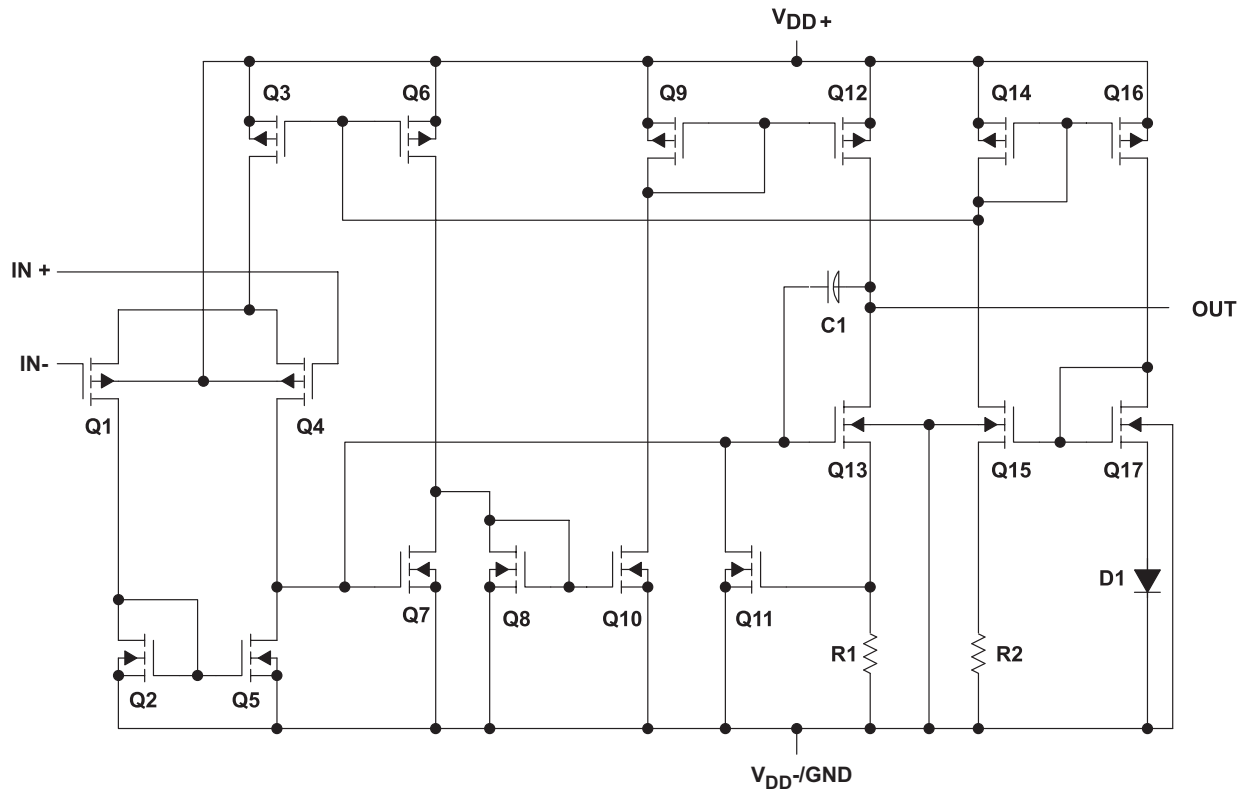

ACTUAL DEVICE COMPONENT COUNT	
COMPONENT	TLC2201
Transistors	17
Resistors	2
Diodes	1
Capacitors	1

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Over operating free-air temperature range (unless otherwise noted).

		VALUE	UNIT
V _{DD}	Supply voltage ⁽²⁾ , V _{DD-} to V _{DD+}	-8 to 8	V
V _{ID}	Differential input voltage ⁽³⁾	±16	V
V _I	Input voltage (any input)	±8	V
I _I	Input current (each input)	±5	mA
I _O	Output current (each output)	±50	mA
	Duration of short-circuit current at (or below) 25°C ⁽⁴⁾	Unlimited	
	Continuous total power dissipation	See Dissipation Ratings Table	
T _C	Operating case temperature	-55 to 125	°C
T _{stg}	Storage temperature	-65 to 150	°C
	Case temperature for 60 seconds	260	°C

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values except differential voltages are with respect to the midpoint between V_{DD+} and V_{DD-}.
- (3) Differential voltages are at IN+ with respect to IN-.
- (4) The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

THERMAL RESISTANCE FOR FK PACKAGE⁽¹⁾⁽²⁾

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
R _{θJC}	Junction-to-case thermal resistance MIL-STD-883 test method 1012			16	°C/W

- (1) Maximum power dissipation is a function of T_J (max), θ_{JC} and T_C. The maximum allowable power dissipation at any allowable case temperature is PD = (T_J (max) - T_C)/θ_{JC}. Operating at the absolute maximum T_J of 150°C can affect reliability.
- (2) The package thermal impedance is calculated in accordance with MIL-STD-883.

RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
V _{DD±}	Supply voltage	±2.3	±8	V
V _{IC}	Common-mode input voltage	V _{DD-}	V _{DD+} -2.3	V
T _C	Operating case temperature	-55	125	°C

ELECTRICAL CHARACTERISTICS

over operating free-air temperature range, $V_{DD} = 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A ⁽¹⁾	MIN	TYP	MAX	UNIT
V _{IO}	Input offset voltage	V _{IC} = 0, R _S = 50 Ω	25°C	80		200	μV
			Full range	400			
α _{VIO}	Temperature coefficient of input offset voltage		Full range	0.5		μV/°C	
	Input offset voltage long-term drift ⁽²⁾		25°C	0.001		μV/mo	
I _{IO}	Input offset current		25°C	0.5		pA	
			Full range	500			
I _{IB}	Input bias current		25°C	1		pA	
			Full range	500			
V _{ICR}	Common-mode input voltage range	R _S = 50 Ω	Full range	0 to 2.7		V	
V _{OH}	Maximum high-level output voltage	R _L = 10 kΩ	25°C	4.7	4.8	V	
			Full range	4.7			
V _{OL}	Maximum low-level output voltage	I _O = 0	25°C	0	50	mV	
			Full range	50			
A _{VD}	Large-signal differential voltage amplification	V _O = 1 V to 4 V, R _L = 500 kΩ	25°C	150	315	V/mV	
			Full range	75			
		V _O = 1 V to 4 V, R _L = 10 kΩ	25°C	25	55		
			Full range	10			
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICRmin} , V _O = 0, R _S = 50 Ω	25°C	90	110	dB	
			Full range	85			
k _{SVR}	Supply voltage rejection ratio (ΔV _{DD±} /ΔV _{IO})	V _{DD} = 4.6 V to 16 V	25°C	90	110	dB	
			Full range	85			
I _{DD}	Supply current	V _O = 2.5 V, No load	25°C	1.1	1.5	mA	
			Full range	1.5			
SR	Slew rate at unity gain	V _O = 0.5 V to 2.5 V, R _L = 10 kΩ C _L = 100 pF	25°C	1.8	2.5	V/μs	
			Full range	1.1			
V _n	Equivalent input noise voltage	f = 10 Hz	25°C	18		nV/√Hz	
		f = 1 kHz	25°C	8			
V _{n(pp)}	Peak-to-peak equivalent input noise voltage	f = 0.1 to 1 Hz	25°C	0.5		μV	
		f = 0.1 to 10 Hz	25°C	0.7			
I _n	Equivalent input noise current		25°C	0.6		fA/√Hz	
	Gain-bandwidth product	f = 10 kHz, R _L = 10 kΩ, C _L = 100 pF	25°C	1.8		MHz	
Φ _m	Phase margin at unity gain	R _L = 10 kΩ, C _L = 100 pF	25°C	45°			

(1) Full range is -55°C to 125°C .

(2) Typical values are based on the input offset voltage shift observable through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.

ELECTRICAL CHARACTERISTICS

over operating free-air temperature range, $V_{DD} = \pm 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A ⁽¹⁾	MIN	TYP	MAX	UNIT
V _{IO}	Input offset voltage	V _{IC} = 0, R _S = 50 Ω	25°C		80	200	μV
			Full range			400	
α _{VIO}	Temperature coefficient of input offset voltage		Full range		0.5	μV/°C	
	Input offset voltage long-term drift ⁽²⁾		25°C		0.001	μV/mo	
I _{IO}	Input offset current		25°C		0.5	pA	
			Full range		500		
I _{IB}	Input bias current		25°C		1	pA	
			Full range		500		
V _{ICR}	Common-mode input voltage range	R _S = 50 Ω	Full range	-5 to 2.7		V	
V _{OM+}	Maximum positive peak output voltage swing	R _L = 10 kΩ	25°C	4.7	4.8	V	
			Full range	4.7			
V _{OM-}	Maximum negative peak output voltage swing		25°C	-4.7	-4.9	V	
			Full range	-4.7			
A _{VD}	Large-signal differential voltage amplification	V _O = ±4 V, R _L = 500 kΩ	25°C	400	560	V/mV	
			Full range	200			
		V _O = ±4 V, R _L = 10 kΩ	25°C	90	100		
			Full range	45			
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICRmin} , V _O = 0, R _S = 50 Ω	25°C	90	115	dB	
			Full range	85			
k _{SVR}	Supply voltage rejection ratio (ΔV _{DD±} /ΔV _{IO})	V _{DD} = ±2.3 V to ±8 V	25°C	90	110	dB	
			Full range	85			
I _{DD}	Supply current	V _O = 0 V, No load	25°C		1.1	1.5	mA
			Full range			1.5	
SR	Slew rate at unity gain	V _O = ±2.3 V, R _L = 10 kΩ C _L = 100 pF	25°C	2	2.7	V/μs	
			Full range	1.3			
V _n	Equivalent input noise voltage	f = 10 Hz	25°C		18	nV/√Hz	
		f = 1 kHz	25°C		8		
V _{n(pp)}	Peak-to-peak equivalent input noise voltage	f = 0.1 to 1 Hz	25°C		0.5	μV	
		f = 0.1 to 10 Hz	25°C		0.7		
I _n	Equivalent input noise current		25°C		0.6	fA/√Hz	
	Gain-bandwidth product	f = 10 kHz, R _L = 10 kΩ, C _L = 100 pF	25°C		1.9	MHz	
Φ _m	Phase margin at unity gain	R _L = 10 kΩ, C _L = 100 pF	25°C		48°		

(1) Full range is -55°C to 125°C .

(2) Typical values are based on the input offset voltage shift observable through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.

PARAMETER MEASUREMENT INFORMATION






Figure 1. Noise-Voltage Test Circuit

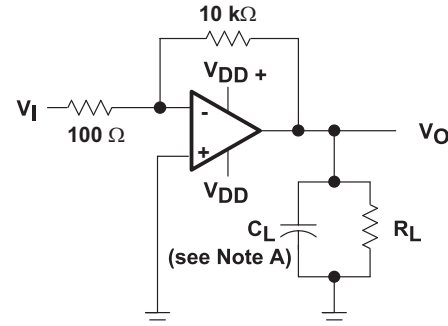

NOTE A: C_L includes fixture capacitance.

Figure 2. Phase-Margin Test Circuit



NOTE A: C_L includes fixture capacitance.

Figure 3. Slew-Rate Test Circuit




Figure 4. Input-Bias and Offset-Current Test Circuit

TYPICAL VALUES

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

INPUT BIAS AND OFFSET CURRENT

At the picoamp bias current level of the TLC2201 accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test socket leakages can easily exceed the actual device bias currents. To measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted in the socket, and a second test measuring both the socket leakage and the device input bias current is performed. The two measurements are then subtracted algebraically to determine the bias current of the device.

NOISE

Texas Instruments offers automated production noise testing to meet individual application requirements. Noise voltage at $f = 10 \text{ Hz}$ and $f = 1 \text{ kHz}$ is sample tested on every TLC2201. For other noise requirements, please contact the factory.

TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
V_{IO}	Input offset voltage	Distribution	Figure 5
I_{IB}	Input bias current	vs Common-mode input voltage	Figure 6
		vs Free-air temperature	Figure 7
V_{OM}	Maximum peak output voltage	vs Output current	Figure 8
		vs Free-air temperature	Figure 9
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	Figure 10
V_{OH}	High-level output voltage	vs Frequency	Figure 11
		vs High-level output current	Figure 12
		vs Free-air temperature	Figure 13
V_{OL}	Low-level output voltage	vs Low-level output current	Figure 14
		vs Free-air temperature	Figure 15
A_{VD}	Large-signal differential voltage amplification	vs Frequency	Figure 16
		vs Free-air temperature	Figure 17
I_{OS}	Short-circuit output current	vs Supply voltage	Figure 18
		vs Free-air temperature	Figure 19
CMRR	Common-mode rejection ratio	vs Frequency	Figure 20
I_{DD}	Supply current	vs Supply voltage	Figure 21
		vs Free-air temperature	Figure 22
	Pulse response	Small signal	Figure 23
			Figure 24
		Large signal	Figure 25
			Figure 26
SR	Slew rate	vs Supply voltage	Figure 27
		vs Free-air temperature	Figure 28
	Noise voltage (referred to input)	0.1 Hz to 1 Hz	Figure 29
		0.1 Hz to 10 Hz	Figure 30
	Gain-bandwidth product	vs Supply voltage	Figure 31
		vs Free-air temperature	Figure 32
Φ_m	Phase margin	vs Supply voltage	Figure 33
		vs Free-air temperature	Figure 34
	Phase shift	vs Frequency	Figure 16

TYPICAL CHARACTERISTICS

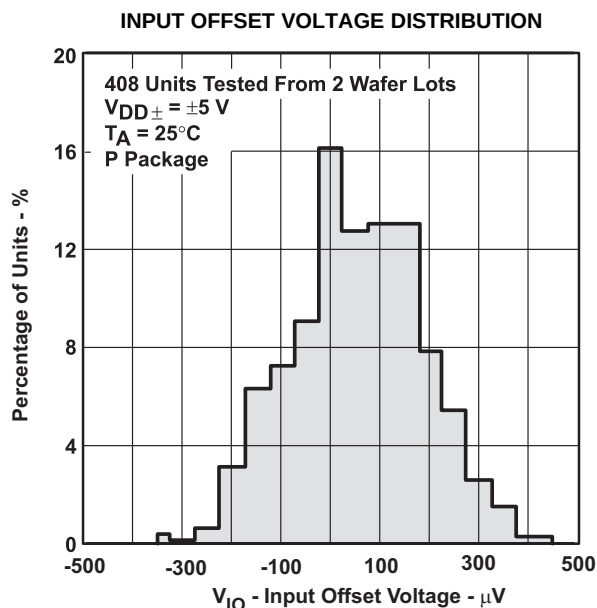


Figure 5.

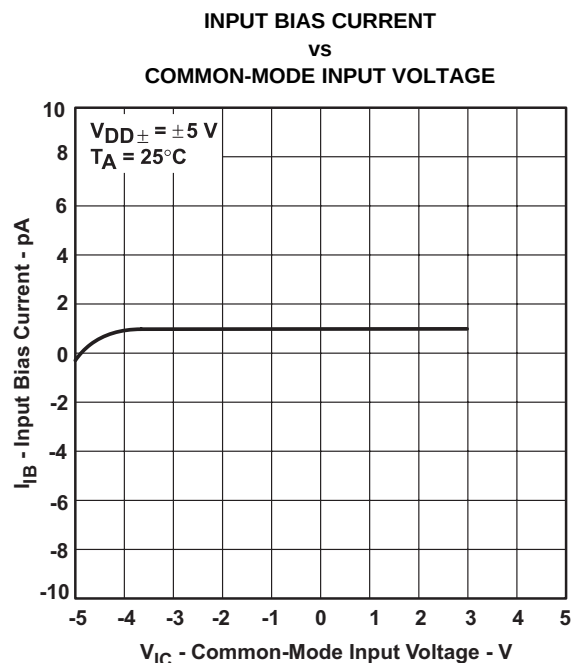


Figure 6.

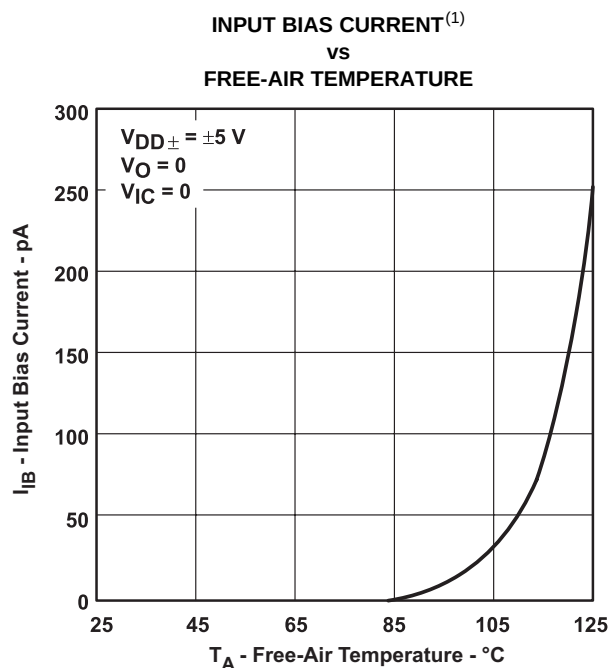


Figure 7.

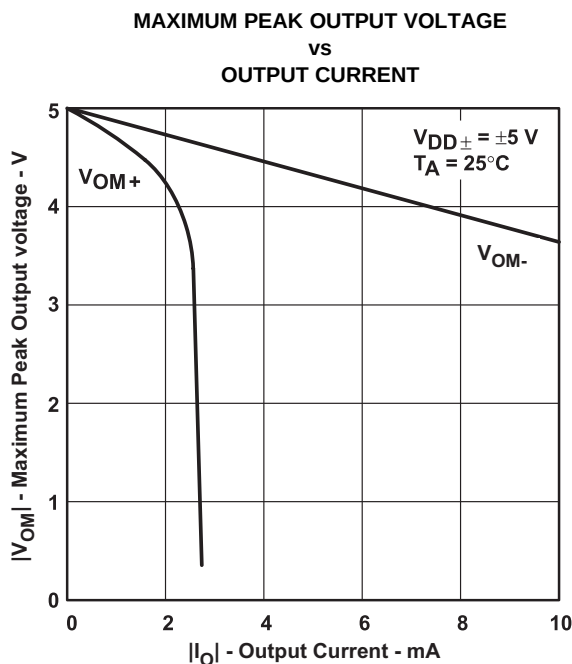


Figure 8.

(1) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS (continued)

MAXIMUM PEAK OUTPUT VOLTAGE⁽²⁾

VS

FREE-AIR TEMPERATURE

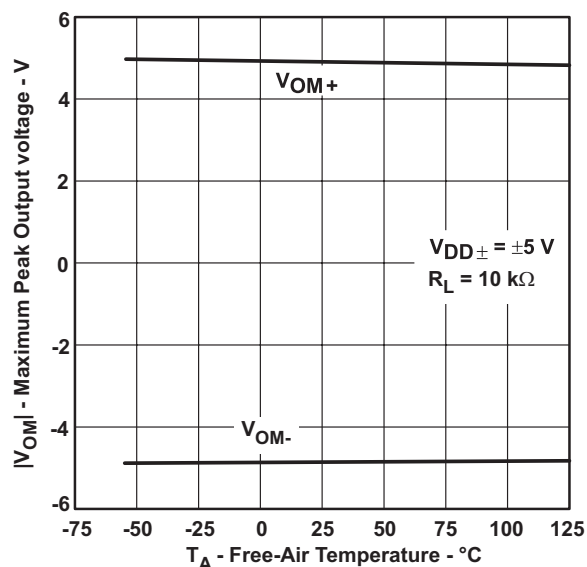


Figure 9.

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE

VS

FREQUENCY

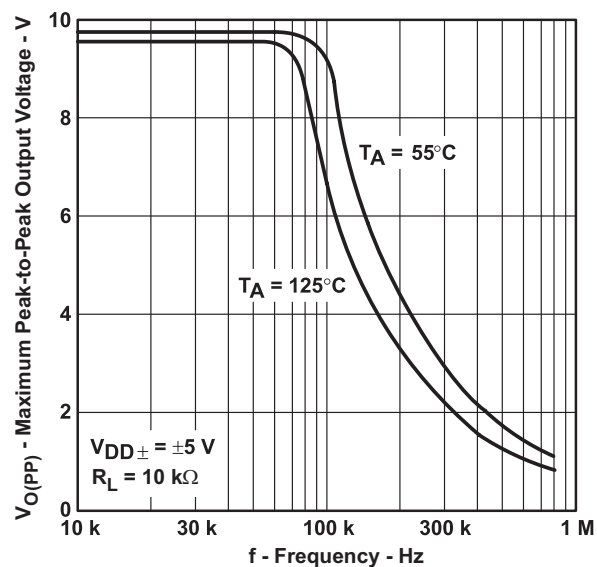


Figure 10.

HIGH-LEVEL OUTPUT VOLTAGE

VS

FREQUENCY

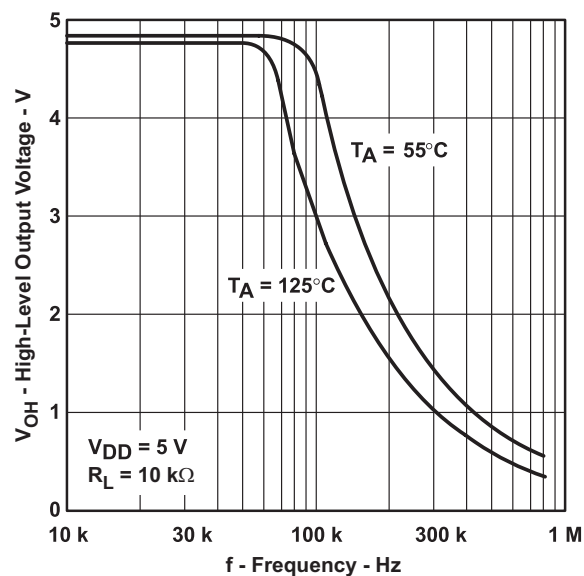


Figure 11.

HIGH-LEVEL OUTPUT VOLTAGE

VS

HIGH-LEVEL OUTPUT CURRENT

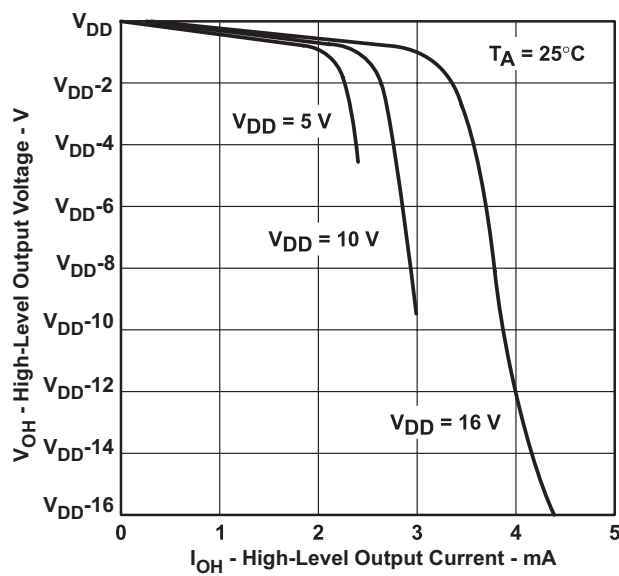


Figure 12.

(2) Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS (continued)

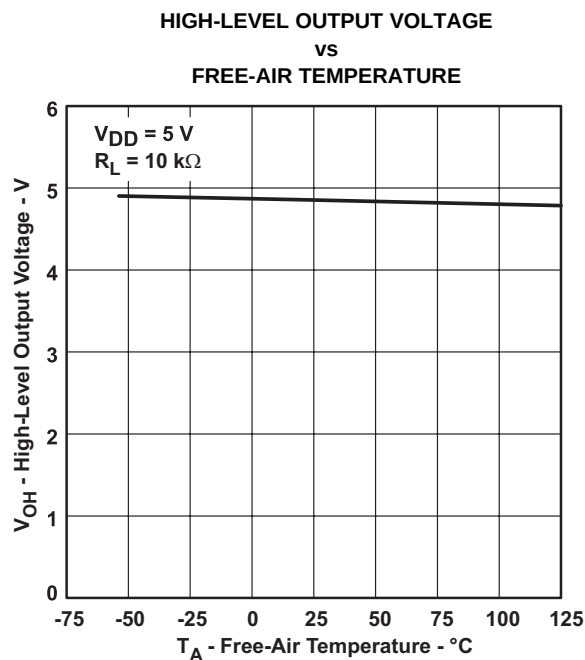


Figure 13.

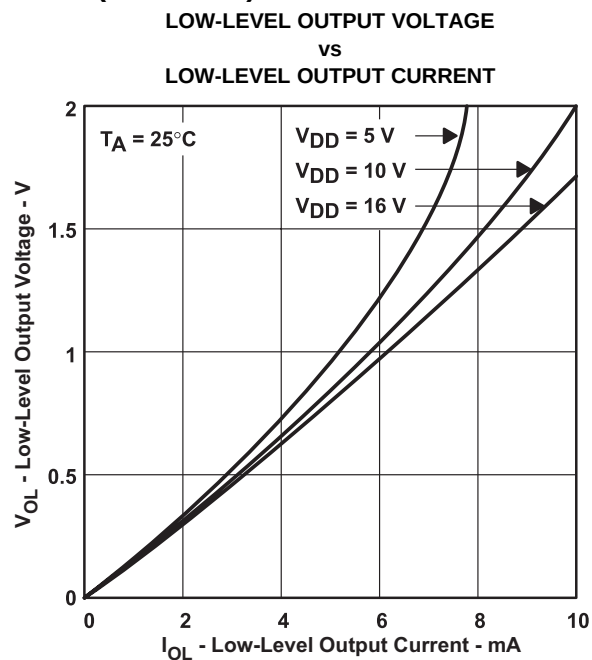


Figure 14.

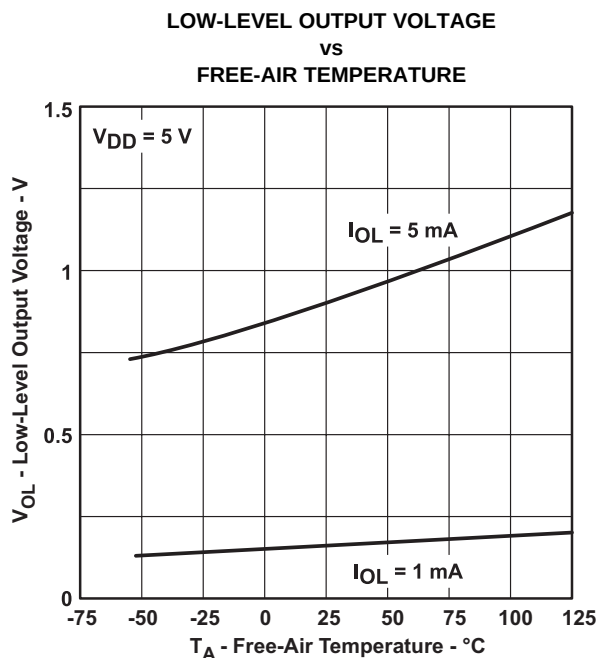


Figure 15.

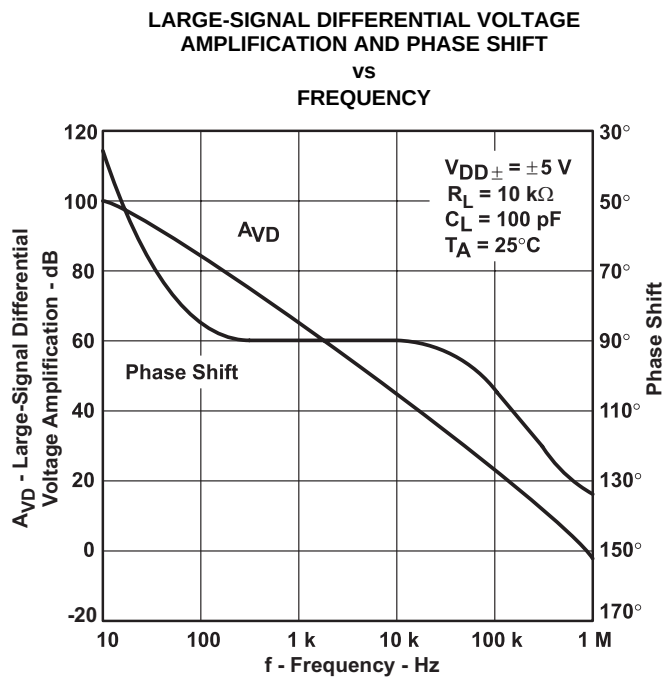


Figure 16.

TYPICAL CHARACTERISTICS (continued)

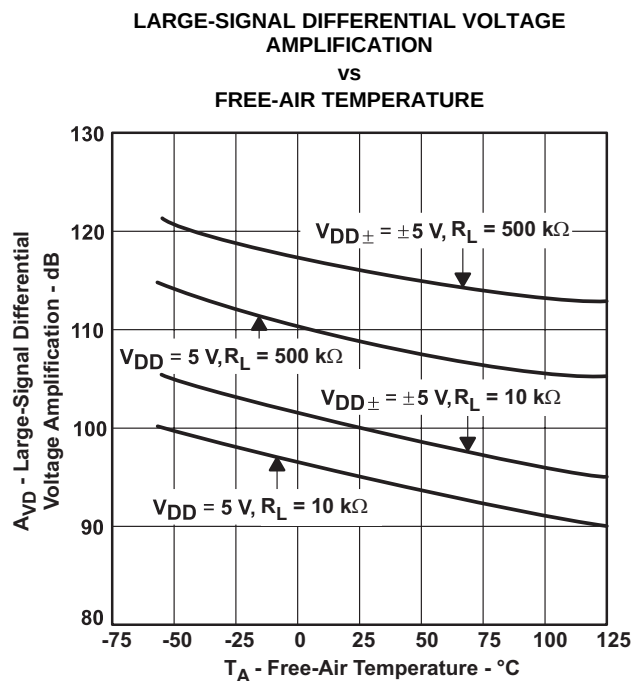


Figure 17.

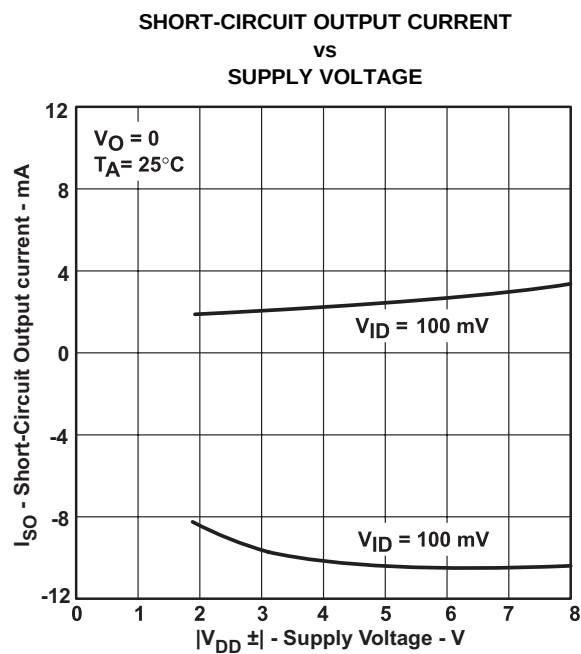


Figure 18.

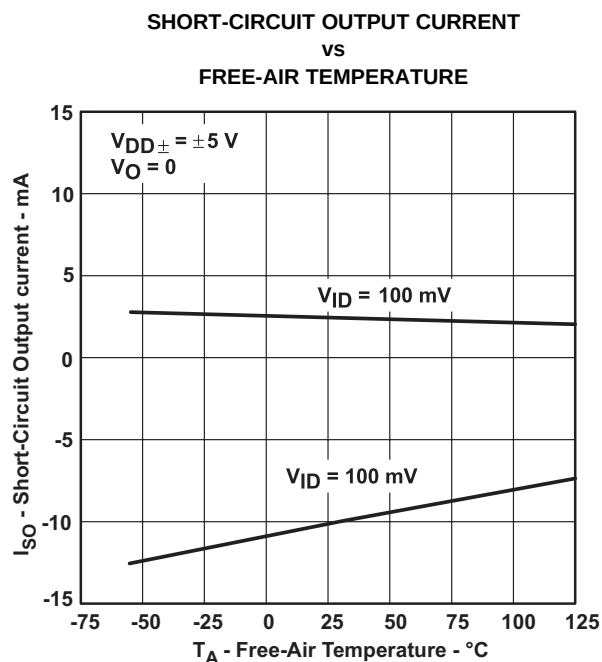


Figure 19.

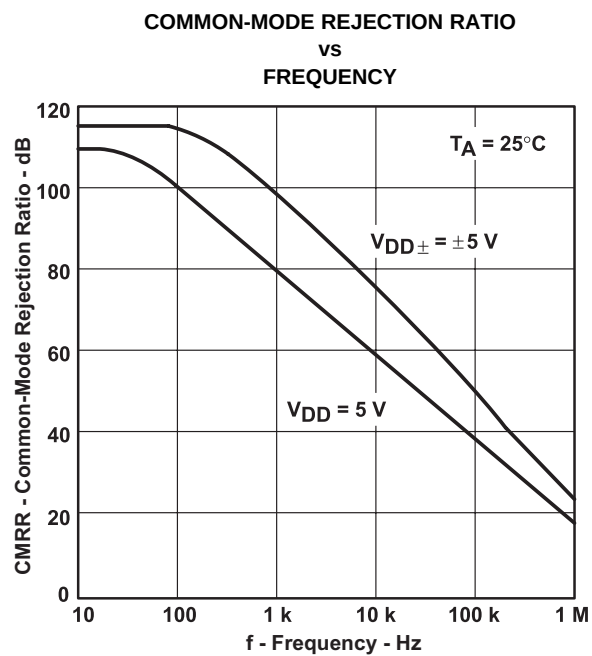


Figure 20.

TYPICAL CHARACTERISTICS (continued)

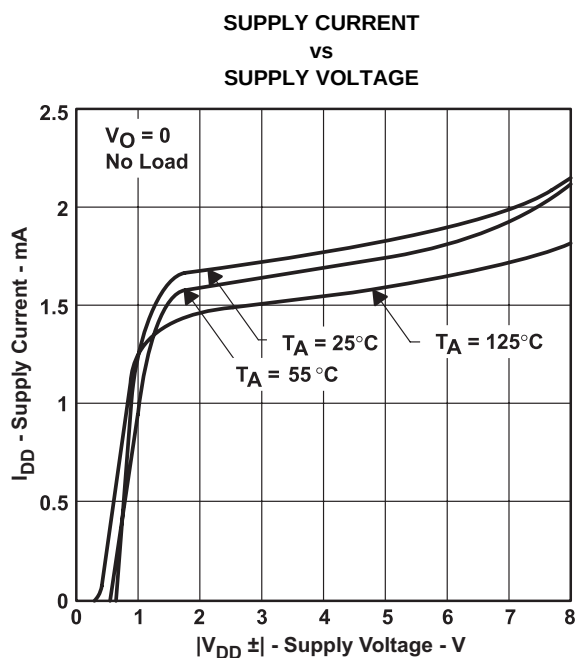


Figure 21.

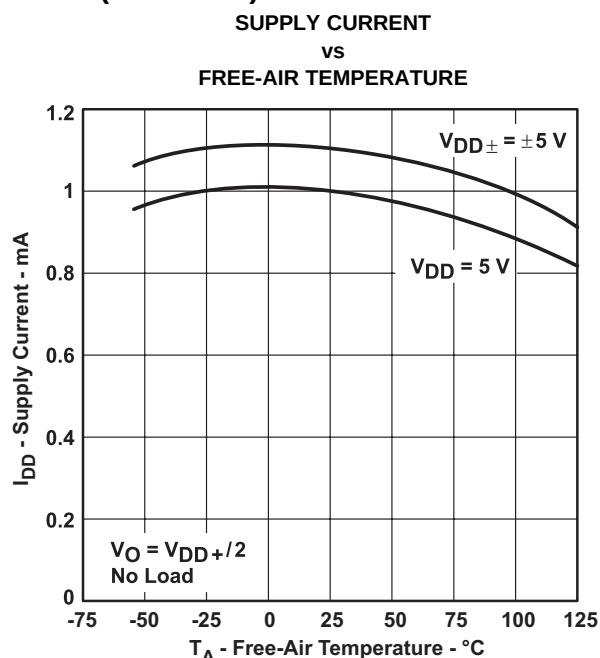


Figure 22.

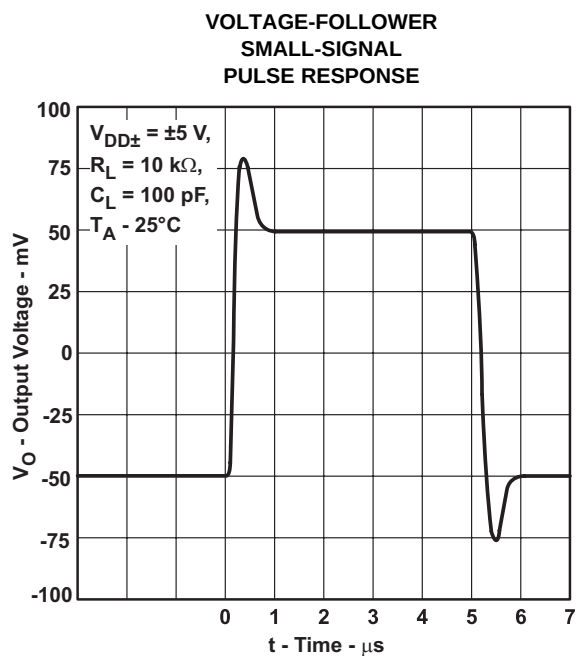


Figure 23.

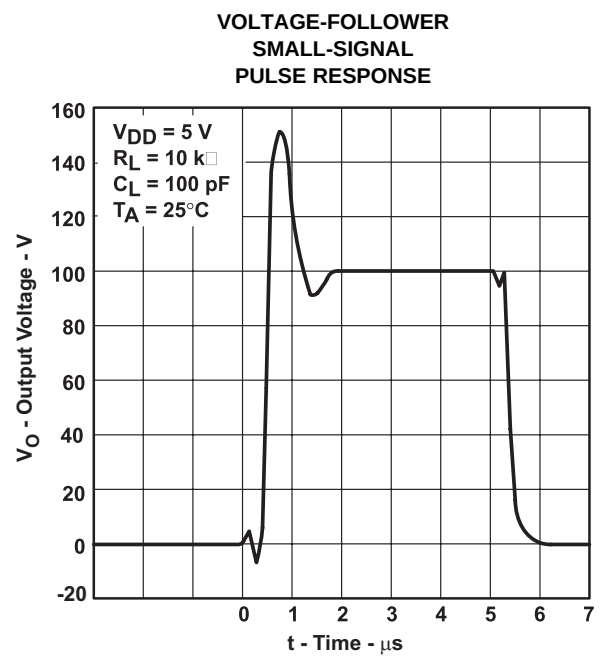


Figure 24.

TYPICAL CHARACTERISTICS (continued)

**VOLTAGE-FOLLOWER
LARGE-SIGNAL
PULSE RESPONSE**

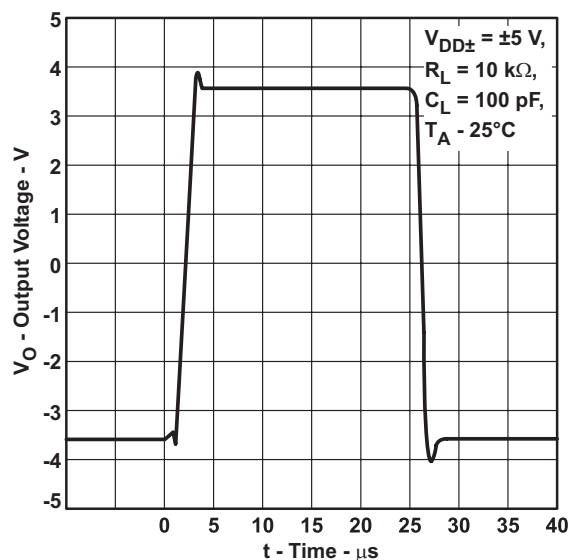


Figure 25.

**VOLTAGE-FOLLOWER
LARGE-SIGNAL
PULSE RESPONSE**

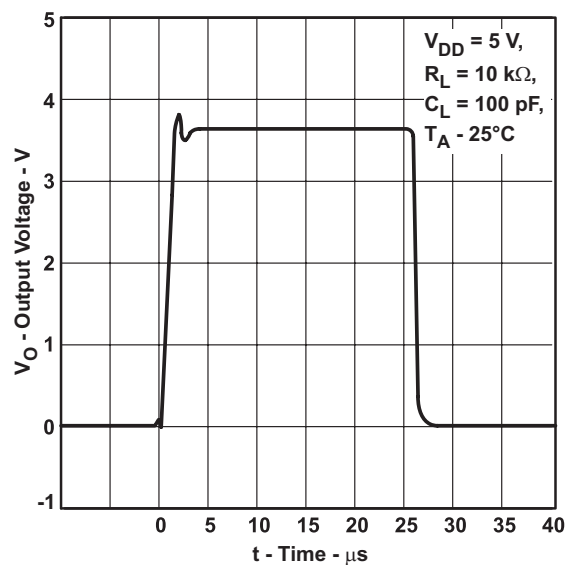


Figure 26.

**SLEW RATE
vs
SUPPLY VOLTAGE**

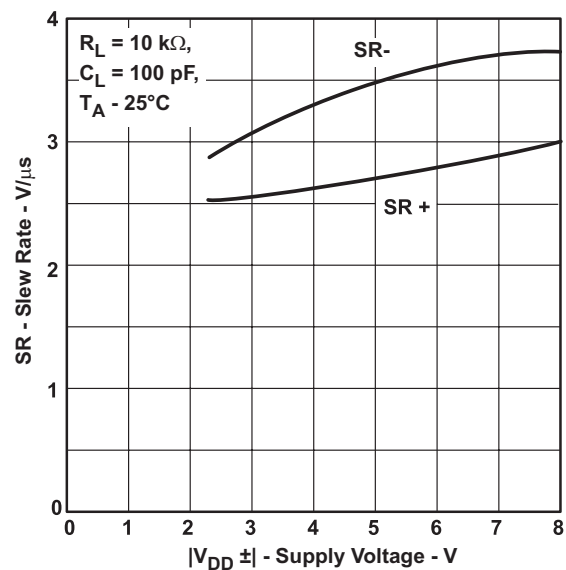


Figure 27.

**SLEW RATE
vs
FREE-AIR TEMPERATURE**

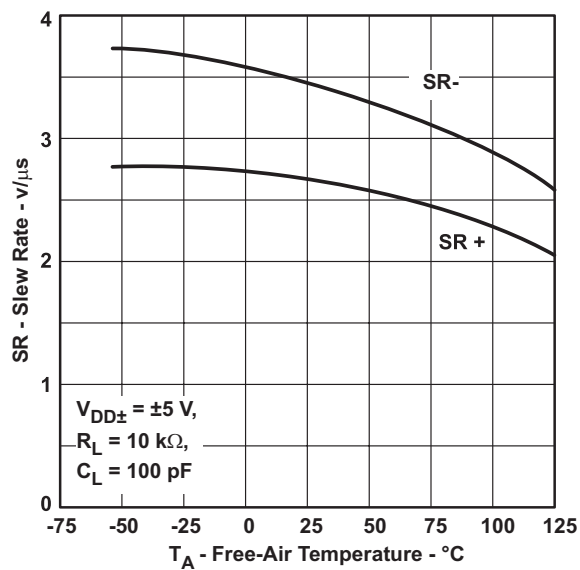


Figure 28.

TYPICAL CHARACTERISTICS (continued)

NOISE VOLTAGE
(REFERRED TO INPUT)
OVER A 10-SECOND INTERVAL

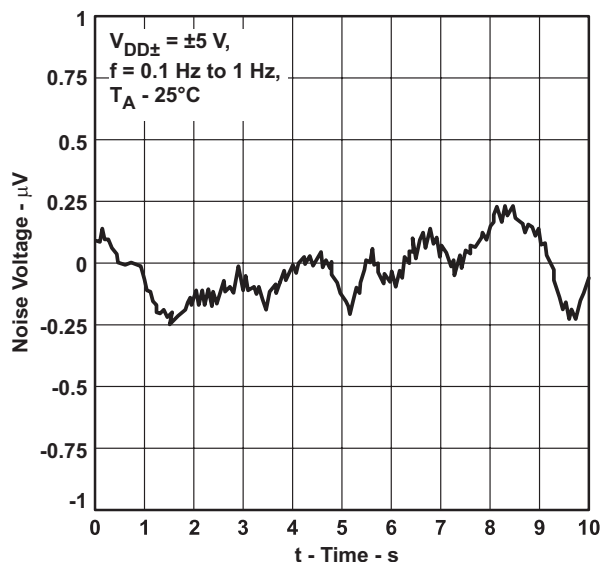


Figure 29.

NOISE VOLTAGE
(REFERRED TO INPUT)
OVER A 10-SECOND INTERVAL

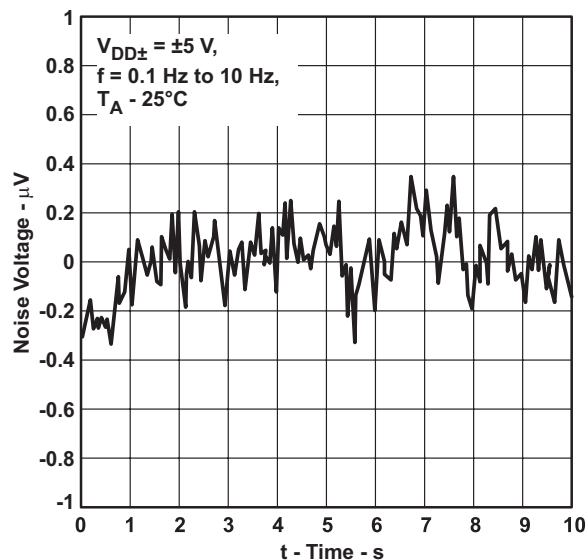


Figure 30.

GAIN-BANDWIDTH PRODUCT
vs
SUPPLY VOLTAGE

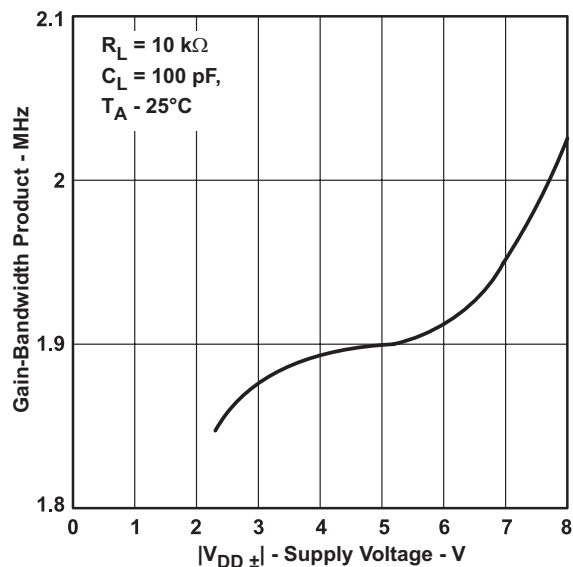


Figure 31.

GAIN-BANDWIDTH PRODUCT
vs
FREE-AIR TEMPERATURE

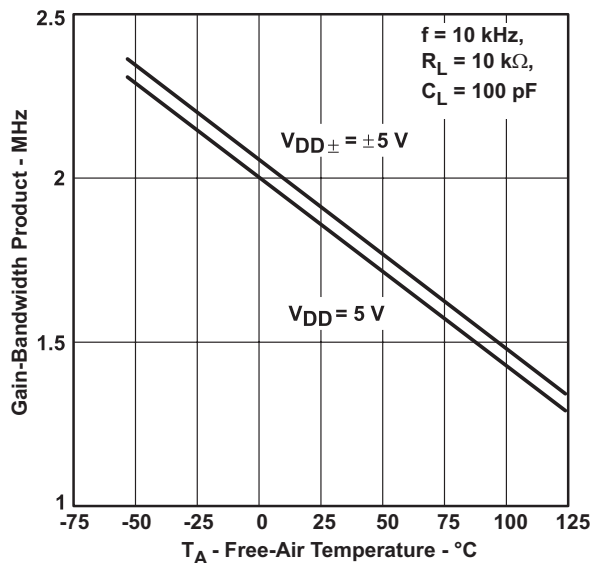


Figure 32.

TYPICAL CHARACTERISTICS (continued)

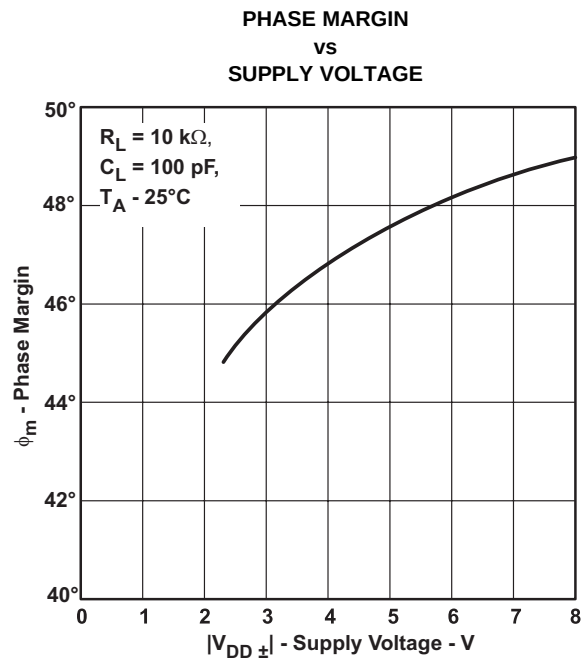


Figure 33.

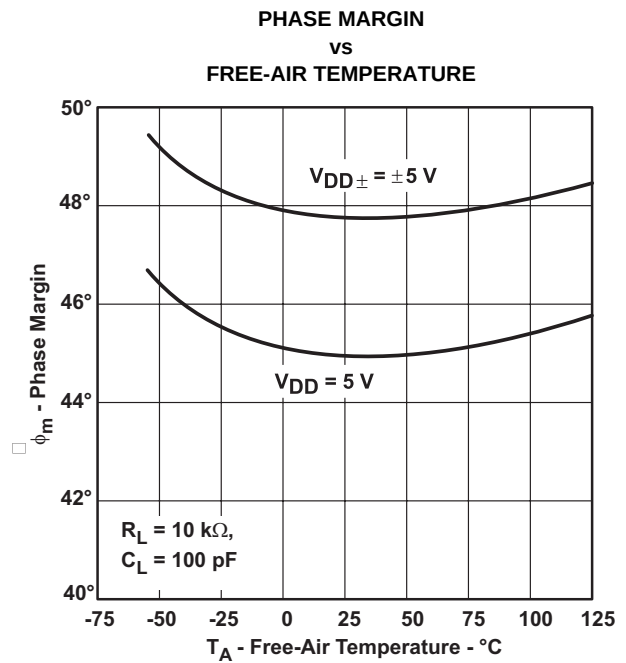


Figure 34.

APPLICATION INFORMATION

LATCH-UP AVOIDANCE

Because CMOS devices are susceptible to latch-up due to their inherent parasitic thyristors, the TLC2201 inputs and outputs are designed to withstand –100-mA surge currents without sustaining latch-up; however, techniques reducing the chance of latch-up should be used whenever possible. Internal protection diodes should not be forward biased in normal operation. Applied input and output voltages should not exceed the supply voltage by more than 300 mV. Care should be exercised when using capacitive coupling on pulse generators. Supply transients should be shunted by the use of decoupling capacitors (0.1 μ F typical) located across the supply rails as close to the device as possible.

ELECTROSTATIC DISCHARGE PROTECTION


These devices use internal ESD-protection circuits that prevent functional failures at voltages at or below 2000 V. Care should be exercised in handling these devices as exposure to ESD may result in degradation of the device parametric performance.

MACROMODEL INFORMATION

Macromodel information provided was derived using Microsim Parts™, the model generation software used with Microsim PSpice™. The Boyle macromodel⁽³⁾ and subcircuit in [Figure 35](#) were generated using the TLC2201 typical electrical and operating characteristics at 25°C. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

(3) G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", IEEE Journal of Solid-State Circuits, SC-9, 353 (1974).

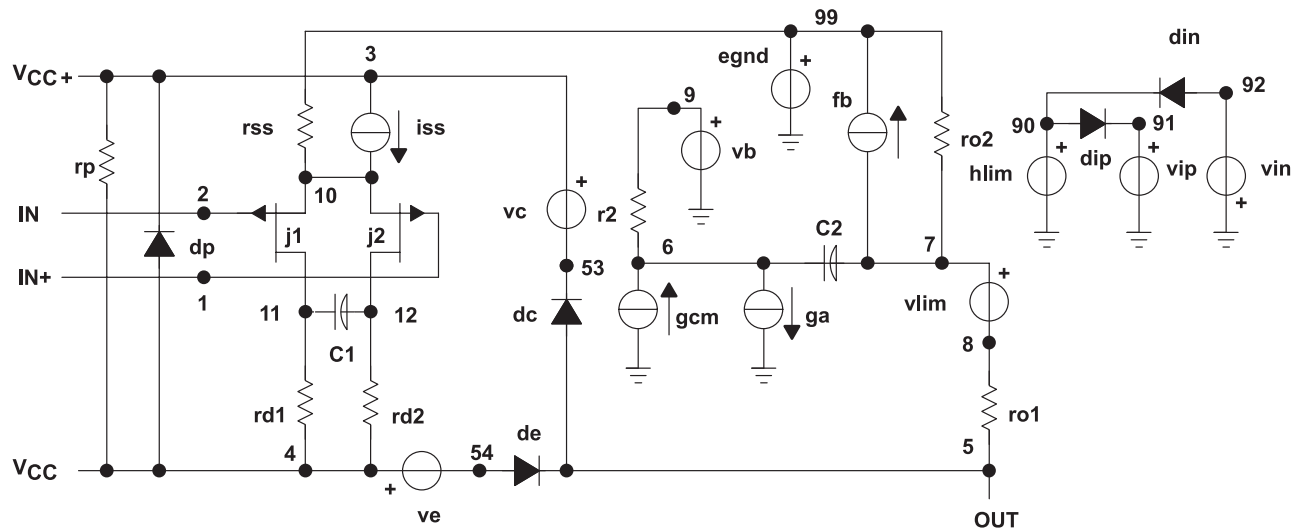

```
.subckt TLC220x 1 2 3 4 5
```

```
*
```

```
c1 11 12 8.51E12
c2 6 7 50.00E12
cpsr 85 86 79.6E9
dcm+ 81 82 dx
dcm 83 81 dx
dc 5 53 dx
de 54 5 dx
dlp 90 91 dx
dln 92 90 dx
dp 4 3 dx
ecmr 84 99 (2,99) 1
egnd 99 0 poly(2) (3,0) (4,0) 0.5 .5
epsr 85 0 poly(1) (3,4) 200E6 20E6
ense 89 2 poly(1) (88,0) 100E6 1
fb 7 99 poly(6) vb vc ve vlp vln
+ vpsr 0 + 895.9E3 90E3 90E3 90E3 90E3 895E3
ga 6 0 11 12 314.2E6
gcm 0 6 10 99 1.295E9
gpsr 85 86 (85,86) 100E6
grd1 60 11 (60,11) 3.141E4
grd2 60 12 (60,12) 3.141E4
hlim 90 0 vlim 1k
hcmr 80 1 poly(2) vcm+ vcm 0 1E2 1E2
irp 3 4 965E6
```

```
iss 3 10 dc 135.0E6
```

```
iio 2 0 .5E12
i1 88 0 1E21
j1 11 89 10 jx
j2 12 80 10 jx
r2 6 9 100.0E3
rcm 84 81 1k
rn1 88 0 1500
ro1 8 5 188
ro2 7 99 187
rss 10 99 1.481E6
vad 60 4 .3v
vcm+ 82 99 2.2
vcm 83 99 4.5
vb 9 0 dc 0
vc 3 53 dc .9
ve 54 4 dc .8
vlim 7 8 dc 0
vlp 91 0 dc 2.8
vln 0 92 dc 2.8
vpsr 0 86 dc 0
.model dx d(is=800.0E18)
.model jx pjf(is=500.0E15 beta=1.462E3
+ vto=.155 kf=1E17)
.endsx
```

Figure 35. Boyle Macromodel and Subcircuit

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
5962-9088203V2A	Active	Production	LCCC (FK) 20	55 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962- 9088203V2A TLC2201 AMFKBQMLV
5962-9088203V2A.A	Active	Production	LCCC (FK) 20	55 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962- 9088203V2A TLC2201 AMFKBQMLV

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


OTHER QUALIFIED VERSIONS OF TLC2201-SP :

- Catalog : [TLC2201](#)
- Military : [TLC2201M](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

TUBE

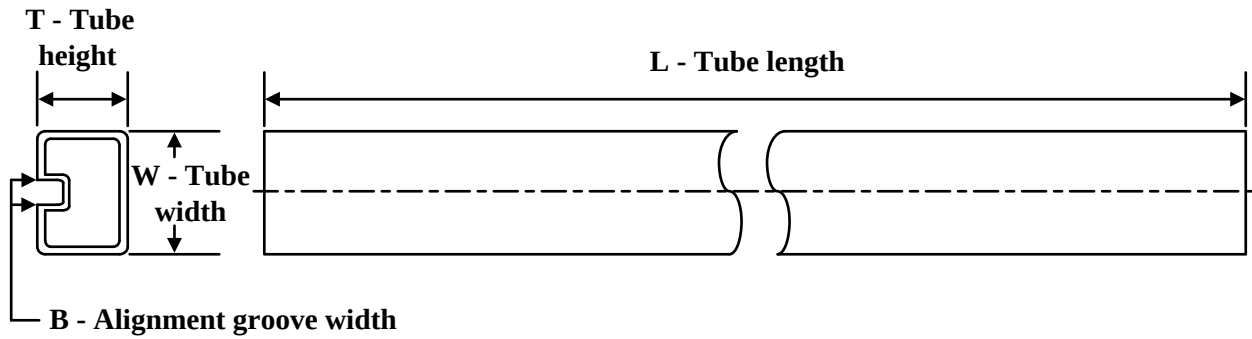

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
5962-9088203V2A	FK	LCCC	20	55	506.98	12.06	2030	NA
5962-9088203V2A.A	FK	LCCC	20	55	506.98	12.06	2030	NA

GENERIC PACKAGE VIEW


FK 20

LCCC - 2.03 mm max height

8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

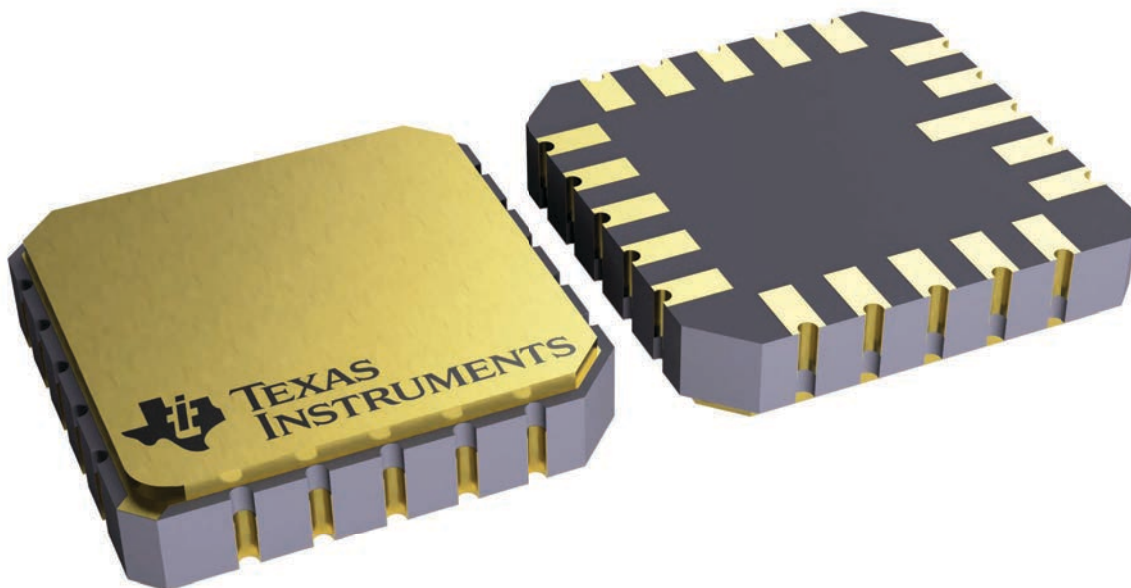

4229370VA\

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025