


## FEATURES

- High-Bandwidth Data Path (Up To 500 MHz <sup>(1)</sup>)
  - 5-V Tolerant I/Os With Device Powered Up or Powered Down
  - Low and Flat ON-State Resistance ( $r_{on}$ ) Characteristics Over Operating Range ( $r_{on} = 4.5 \Omega$  Typ)
  - Rail-to-Rail Switching on Data I/O Ports
    - 0- to 5-V Switching With 3.3-V  $V_{CC}$
    - 0- to 3.3-V Switching With 2.5-V  $V_{CC}$
  - B-Port Outputs Are Precharged by Bias Voltage (BIASV) to Minimize Signal Distortion During Live Insertion and Hot Plugging
  - Supports PCI Hot Plug
  - Bidirectional Data Flow With Near-Zero Propagation Delay
  - Low Input/Output Capacitance Minimizes Loading and Signal Distortion ( $C_{io(OFF)} = 3.5$  pF Typ)
- (1) For additional information regarding the performance characteristics of the CB3Q family, refer to the TI application report, *CBT-C, CB3T, and CB3Q Signal-Switch Families*, literature number SCDA008.
- Fast Switching Frequency ( $f_{ON} = 20$  MHz Max)
  - Data and Control Inputs Provide Undershoot Clamp Diodes
  - Low Power Consumption ( $I_{CC} = 0.75$  mA Typ)
  - $V_{CC}$  Operating Range From 2.3 V to 3.6 V
  - Data I/Os Support 0- to 5-V Signaling Levels (0.8 V, 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, 5 V)
  - Control Inputs Can Be Driven by TTL or 5-V/3.3-V CMOS Outputs
  - $I_{off}$  Supports Partial-Power-Down Mode Operation
  - Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
  - ESD Performance Tested Per JESD 22
    - 2000-V Human-Body Model (A114-B, Class II)
    - 1000-V Charged-Device Model (C101)
  - Supports Both Digital and Analog Applications: PCI Interface, Differential Signal Interface, Memory Interleaving, Bus Isolation, Low-Distortion Signal Gating

DBQ, DGV, OR PW PACKAGE  
(TOP VIEW)

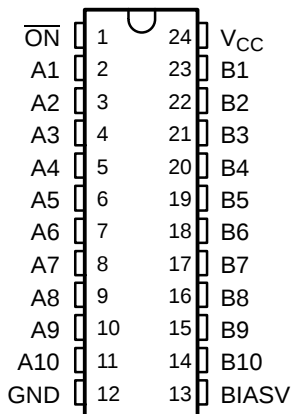

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**SN74CB3Q6800**  
**10-BIT FET BUS SWITCH WITH PRECHARGED OUTPUTS**  
**2.5-V/3.3-V LOW-VOLTAGE HIGH-BANDWIDTH BUS SWITCH**

SCDS142A–OCTOBER 2003–REVISED MARCH 2005

## DESCRIPTION/ORDERING INFORMATION

The SN74CB3Q6800 is a high-bandwidth FET bus switch utilizing a charge pump to elevate the gate voltage of the pass transistor, providing a low and flat ON-state resistance ( $r_{on}$ ). The low and flat ON-state resistance allows for minimal propagation delay and supports rail-to-rail switching on the data input/output (I/O) ports. The device also features low data I/O capacitance to minimize capacitive loading and signal distortion on the data bus. Specifically designed to support high-bandwidth applications, the SN74CB3Q6800 provides an optimized interface solution ideally suited for broadband communications, networking, and data-intensive computing systems.

The SN74CB3Q6800 is a 10-bit bus switch with a single output-enable ( $\overline{ON}$ ) input. When  $\overline{ON}$  is low, the 10-bit bus switch is ON and the A port is connected to the B port, allowing bidirectional data flow between ports. When  $\overline{ON}$  is high, the 10-bit bus switch is OFF and a high-impedance state exists between the A and B ports. The B port is precharged to bias voltage (BIASV) through the equivalent of a 10-k $\Omega$  resistor when  $\overline{ON}$  is high, or if the device is powered down ( $V_{CC} = 0$  V).

During insertion (or removal) of a card into (or from) an active bus, the card's output voltage may be close to GND. When the connector pins make contact, the card's parasitic capacitance tries to force the bus signal to GND, creating a possible glitch on the active bus. This glitching effect can be reduced by using a bus switch with precharged bias voltage (BIASV) of the bus switch equal to the input threshold voltage level of the receivers on the active bus. This method ensures that any glitch produced by insertion (or removal) of the card does not cross the input threshold region of the receivers on the active bus, minimizing the effects of live-insertion noise.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry prevents damaging current backflow through the device when it is powered down. The device has isolation during power off.

To ensure the high-impedance state during power up or power down,  $\overline{ON}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

## ORDERING INFORMATION


| $T_A$         | PACKAGE <sup>(1)</sup> |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|---------------|------------------------|---------------|-----------------------|------------------|
| –40°C to 85°C | SSOP (QSOP) – DBQ      | Tape and reel | SN74CB3Q6800DBQR      | CB3Q6800         |
|               | TSSOP – PW             | Tube          | SN74CB3Q6800PW        | BY800            |
|               |                        | Tape and reel | SN74CB3Q6800PWR       |                  |
|               | TVSOP – DGV            | Tape and reel | SN74CB3Q6800DGVR      | BY800            |

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).


## FUNCTION TABLE

| INPUT<br>$\overline{ON}$ | INPUT/OUTPUT<br>A | FUNCTION                     |
|--------------------------|-------------------|------------------------------|
| L                        | B                 | A port = B port              |
| H                        | Z                 | Disconnect<br>B port = BIASV |

### LOGIC DIAGRAM (POSITIVE LOGIC)

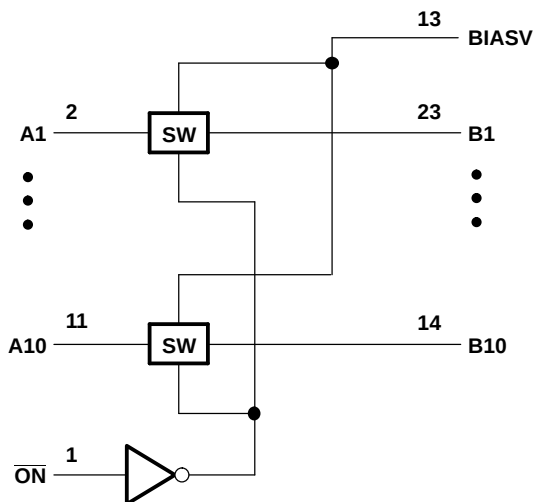

### SIMPLIFIED SCHEMATIC, EACH FET SWITCH (SW)

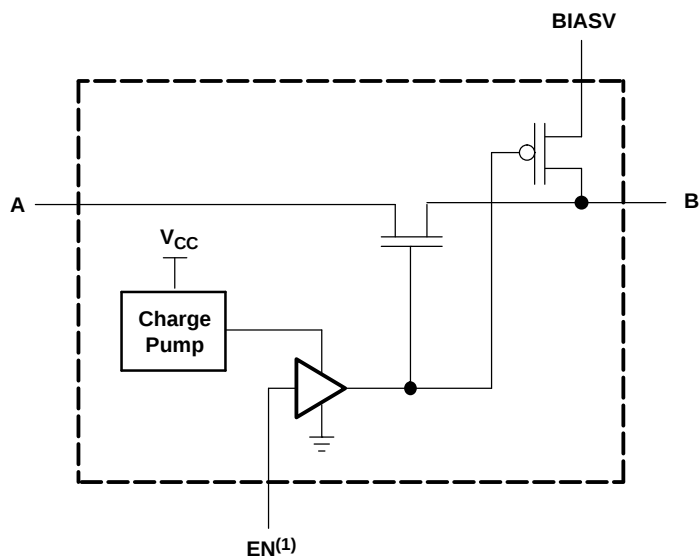

(1) EN is the internal enable signal applied to the switch.

**SN74CB3Q6800**  
**10-BIT FET BUS SWITCH WITH PRECHARGED OUTPUTS**  
**2.5-V/3.3-V LOW-VOLTAGE HIGH-BANDWIDTH BUS SWITCH**

SCDS142A—OCTOBER 2003—REVISED MARCH 2005

**Absolute Maximum Ratings<sup>(1)</sup>**

over operating free-air temperature range (unless otherwise noted)

|               |                                               |               | MIN  | MAX  | UNIT |
|---------------|-----------------------------------------------|---------------|------|------|------|
| $V_{CC}$      | Supply voltage range                          |               | -0.5 | 4.6  | V    |
| BIASV         | BIAS supply voltage range                     |               | -0.5 | 7    | V    |
| $V_{IN}$      | Control input voltage range <sup>(2)(3)</sup> |               | -0.5 | 7    | V    |
| $V_{I/O}$     | Switch I/O voltage range <sup>(2)(3)(4)</sup> |               | -0.5 | 7    | V    |
| $I_{IK}$      | Control input clamp current                   | $V_{IN} < 0$  |      | -50  | mA   |
| $I_{I/OK}$    | I/O port clamp current                        | $V_{I/O} < 0$ |      | -50  | mA   |
| $I_{I/O}$     | ON-state switch current <sup>(5)</sup>        |               |      | ±64  | mA   |
|               | Continuous current through $V_{CC}$ or GND    |               |      | ±100 | mA   |
| $\theta_{JA}$ | Package thermal impedance <sup>(6)</sup>      | DBG package   |      | 61   | °C/W |
|               |                                               | DGV package   |      | 86   |      |
|               |                                               | PW package    |      | 88   |      |
| $T_{stg}$     | Storage temperature range                     |               | -65  | 150  | °C   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, unless otherwise specified.
- (3) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (4)  $V_I$  and  $V_O$  are used to denote specific conditions for  $V_{I/O}$ .
- (5)  $I_I$  and  $I_O$  are used to denote specific conditions for  $I_{I/O}$ .
- (6) The package thermal impedance is calculated in accordance with JESD 51-7.

**Recommended Operating Conditions<sup>(1)</sup>**

|           |                                  |                                            | MIN | MAX | UNIT |
|-----------|----------------------------------|--------------------------------------------|-----|-----|------|
| $V_{CC}$  | Supply voltage                   |                                            | 2.3 | 3.6 | V    |
| BIASV     | Bias supply voltage              |                                            | 0   | 5   | V    |
| $V_{IH}$  | High-level control input voltage | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$ | 1.7 | 5.5 | V    |
|           |                                  | $V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$ | 2   | 5.5 |      |
| $V_{IL}$  | Low-level control input voltage  | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$ | 0   | 0.7 | V    |
|           |                                  | $V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$ | 0   | 0.8 |      |
| $V_{I/O}$ | Data input/output voltage        |                                            | 0   | 5.5 | V    |
| $T_A$     | Operating free-air temperature   |                                            | -40 | 85  | °C   |

- (1) All unused control inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004. BIASV is a supply voltage, not a control input.

## Electrical Characteristics<sup>(1)</sup>

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER             |                   | TEST CONDITIONS                                                        |                                                                                              | MIN | TYP <sup>(2)</sup> | MAX  | UNIT       |
|-----------------------|-------------------|------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----|--------------------|------|------------|
| $V_{IK}$              |                   | $V_{CC} = 3.6\text{ V}$ ,                                              | $I_I = -18\text{ mA}$                                                                        |     |                    | -1.8 | V          |
| $I_{IN}$              | Control inputs    | $V_{CC} = 3.6\text{ V}$ ,                                              | $V_{IN} = 0\text{ to }5.5\text{ V}$                                                          |     |                    | ±1   | μA         |
| $I_O$                 | B port            | $V_{CC} = 3\text{ V}$ ,                                                | BIASV = 2.4 V,<br>$V_O = 0$ ,<br>Switch OFF,<br>$V_{IN} = V_{CC}$ or GND                     |     | 0.2                |      | mA         |
| $I_{OZ}^{(3)}$        |                   | $V_{CC} = 3.6\text{ V}$ ,                                              | $V_O = 0\text{ to }5.5\text{ V}$ ,<br>$V_I = 0$ ,<br>Switch OFF,<br>$V_{IN} = V_{CC}$ or GND |     |                    | ±1   | μA         |
| $I_{off}$             |                   | $V_{CC} = 0$ ,                                                         | $V_O = 0\text{ to }5.5\text{ V}$ ,<br>$V_I = 0$                                              |     |                    | 1    | μA         |
| $I_{CC}$              |                   | $V_{CC} = 3.6\text{ V}$ ,                                              | $I_{I/O} = 0$ ,<br>Switch ON or OFF,<br>$V_{IN} = V_{CC}$ or GND                             |     | 0.75               | 2    | mA         |
| $\Delta I_{CC}^{(4)}$ | Control inputs    | $V_{CC} = 3.6\text{ V}$ ,                                              | One input at 3 V,<br>Other inputs at $V_{CC}$ or GND                                         |     |                    | 30   | μA         |
| $I_{CCD}^{(5)}$       | Per control input | $V_{CC} = 3.6\text{ V}$ ,<br>Control input switching at 50% duty cycle | A and B ports open,                                                                          |     | 0.38               | 0.45 | mA/<br>MHz |
| $C_{in}$              | Control inputs    | $V_{CC} = 3.3\text{ V}$ ,                                              | $V_{IN} = 5.5\text{ V}$ , 3.3 V, or 0                                                        |     | 2.5                | 3.5  | pF         |
| $C_{io(OF F)}$        | A port            | $V_{CC} = 3.3\text{ V}$ ,                                              | Switch OFF,<br>$V_{IN} = V_{CC}$ or GND,<br>$V_{I/O} = 5.5\text{ V}$ , 3.3 V, or 0           |     | 3.5                | 5    | pF         |
| $C_{io(ON)}$          |                   | $V_{CC} = 3.3\text{ V}$ ,                                              | Switch ON,<br>$V_{IN} = V_{CC}$ or GND,<br>$V_{I/O} = 5.5\text{ V}$ , 3.3 V, or 0            |     | 9                  | 11   | pF         |
| $r_{on}^{(6)}$        |                   | $V_{CC} = 2.3\text{ V}$ ,<br>TYP at $V_{CC} = 2.5\text{ V}$            | $V_I = 0$ ,<br>$I_O = 30\text{ mA}$                                                          |     | 4.5                | 8    | Ω          |
|                       |                   |                                                                        | $V_I = 1.7\text{ V}$ ,<br>$I_O = -15\text{ mA}$                                              |     | 4.8                | 9    |            |
|                       |                   | $V_{CC} = 3\text{ V}$                                                  | $V_I = 0$ ,<br>$I_O = 30\text{ mA}$                                                          |     | 4.5                | 6    |            |
|                       |                   |                                                                        | $V_I = 2.4\text{ V}$ ,<br>$I_O = -15\text{ mA}$                                              |     | 4.6                | 8    |            |

- (1)  $V_{IN}$  and  $I_{IN}$  refer to control inputs.  $V_I$ ,  $V_O$ ,  $I_I$ , and  $I_O$  refer to data pins.
- (2) All typical values are at  $V_{CC} = 3.3\text{ V}$  (unless otherwise noted),  $T_A = 25^\circ\text{C}$ .
- (3) For I/O ports, the parameter  $I_{OZ}$  includes the input leakage current.
- (4) This is the increase in supply current for each input that is at the specified TTL voltage level, rather than  $V_{CC}$  or GND.
- (5) This parameter specifies the dynamic power-supply current associated with the operating frequency of a single control input (see Figure 2).
- (6) Measured by the voltage drop between the A and B terminals at the indicated current through the switch. ON-state resistance is determined by the lower of the voltages of the two (A or B) terminals.

## Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 3)

| PARAMETER      | TEST CONDITIONS | FROM<br>(INPUT) | TO<br>(OUTPUT) | $V_{CC} = 2.5\text{ V}$<br>$\pm 0.2\text{ V}$ |       | $V_{CC} = 3.3\text{ V}$<br>$\pm 0.3\text{ V}$ |       | UNIT |
|----------------|-----------------|-----------------|----------------|-----------------------------------------------|-------|-----------------------------------------------|-------|------|
|                |                 |                 |                | MIN                                           | MAX   | MIN                                           | MAX   |      |
| $f_{ON}^{(1)}$ |                 | $\overline{ON}$ | A or B         |                                               | 10    |                                               | 20    | MHz  |
| $t_{pd}^{(2)}$ |                 | A or B          | B or A         |                                               | 0.135 |                                               | 0.225 | ns   |
| $t_{pZH}$      | BIASV = GND     | $\overline{ON}$ | A or B         | 1.5                                           | 8.5   | 1.5                                           | 6.7   | ns   |
| $t_{pZL}$      | BIASV = 3 V     |                 |                | 1.5                                           | 8.5   | 1.5                                           | 6.7   |      |
| $t_{PHZ}$      | BIASV = GND     | $\overline{ON}$ | A or B         | 1                                             | 5     | 1                                             | 5     | ns   |
| $t_{PLZ}$      | BIASV = 3 V     |                 |                | 1                                             | 6.9   | 1                                             | 6.9   |      |

- (1) Maximum switching frequency for control input ( $V_O > V_{CC}$ ,  $V_I = 5\text{ V}$ ,  $R_L \geq 1\text{ M}\Omega$ ,  $C_L = 0$ ).
- (2) The propagation delay is the calculated RC time constant of the typical ON-state resistance of the switch and the specified load capacitance, when driven by an ideal voltage source (zero output impedance).

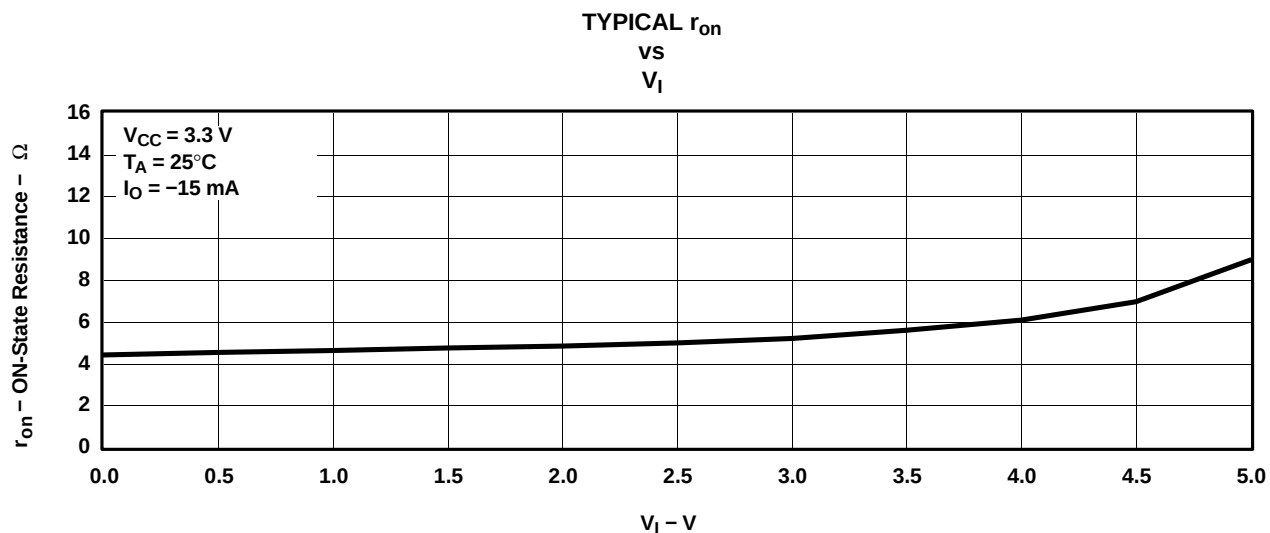


Figure 1. Typical  $r_{on}$  vs  $V_I$



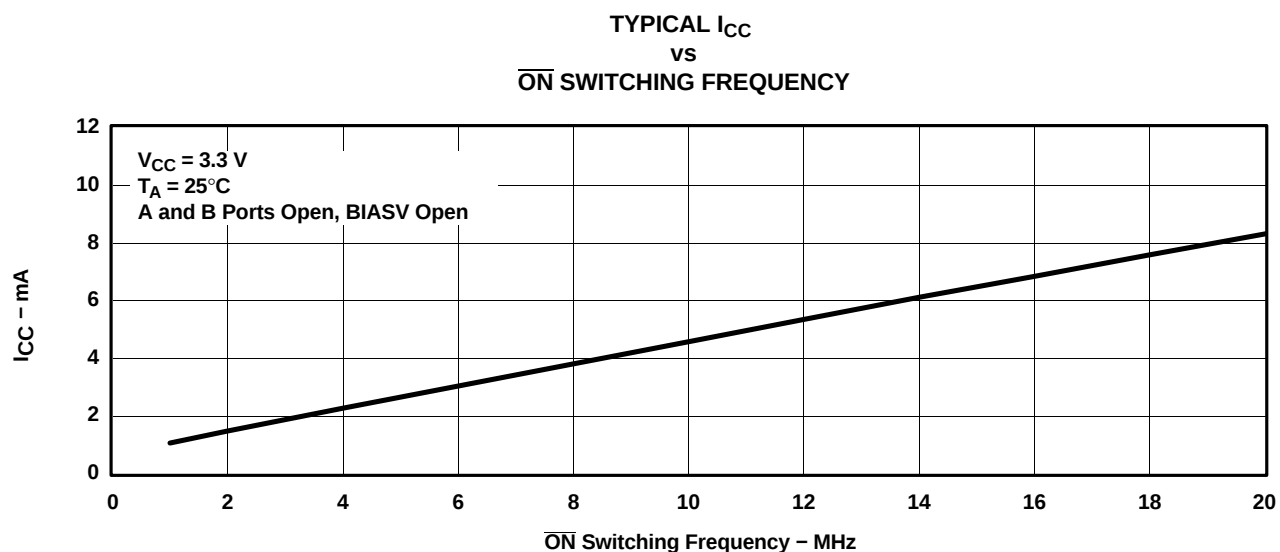


Figure 2. Typical  $I_{CC}$  vs  $\overline{ON}$  Switching Frequency


## PARAMETER MEASUREMENT INFORMATION

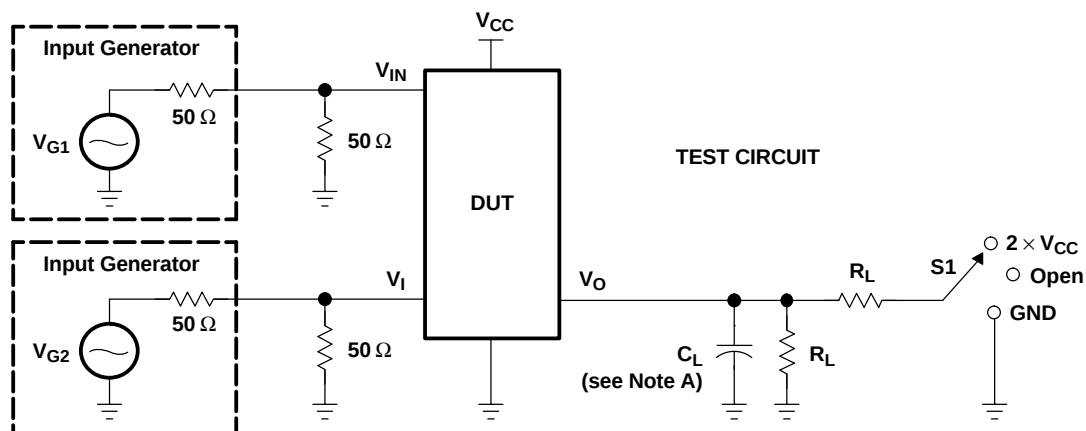

| TEST                               | V <sub>CC</sub>                | S1                                         | R <sub>L</sub> | V <sub>I</sub>                                   | C <sub>L</sub> | V <sub>Δ</sub>  |
|------------------------------------|--------------------------------|--------------------------------------------|----------------|--------------------------------------------------|----------------|-----------------|
| t <sub>pd(s)</sub>                 | 2.5 V ± 0.2 V<br>3.3 V ± 0.3 V | Open<br>Open                               | 500 Ω<br>500 Ω | V <sub>CC</sub> or GND<br>V <sub>CC</sub> or GND | 30 pF<br>50 pF |                 |
| t <sub>PLZ</sub> /t <sub>PZL</sub> | 2.5 V ± 0.2 V<br>3.3 V ± 0.3 V | 2 × V <sub>CC</sub><br>2 × V <sub>CC</sub> | 500 Ω<br>500 Ω | GND<br>GND                                       | 30 pF<br>50 pF | 0.15 V<br>0.3 V |
| t <sub>PHZ</sub> /t <sub>PZH</sub> | 2.5 V ± 0.2 V<br>3.3 V ± 0.3 V | GND<br>GND                                 | 500 Ω<br>500 Ω | V <sub>CC</sub><br>V <sub>CC</sub>               | 30 pF<br>50 pF | 0.15 V<br>0.3 V |

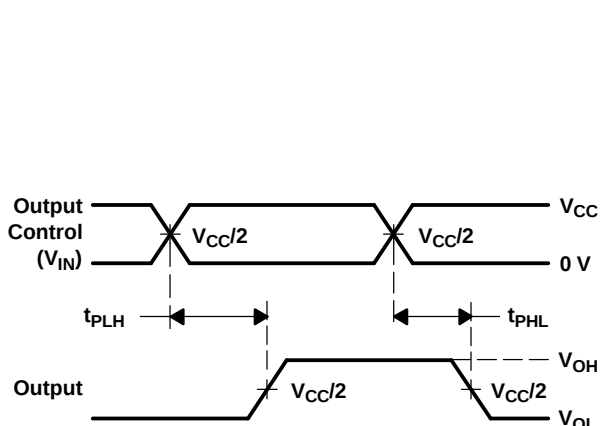

VOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES (t<sub>pd(s)</sub>)

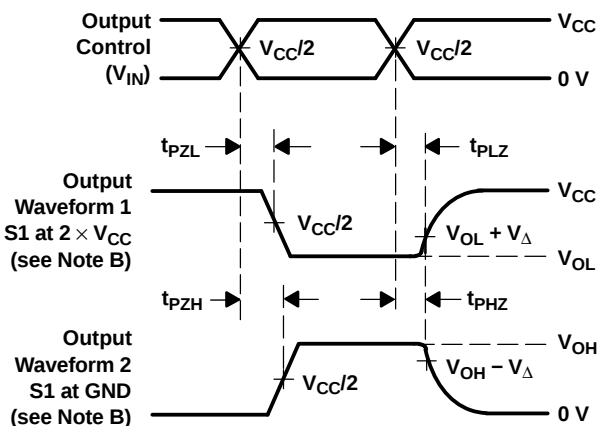

VOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES

- NOTES:
- C<sub>L</sub> includes probe and jig capacitance.
  - Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>O</sub> = 50 Ω, t<sub>r</sub> ≤ 2.5 ns, t<sub>f</sub> ≤ 2.5 ns.
  - The outputs are measured one at a time with one transition per measurement.
  - t<sub>PLZ</sub> and t<sub>PZH</sub> are the same as t<sub>dis</sub>.
  - t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
  - t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd(s)</sub>. The t<sub>pd</sub> propagation delay is the calculated RC time constant of the typical ON-state resistance of the switch and the specified load capacitance, when driven by an ideal voltage source (zero output impedance).
  - All parameters and waveforms are not applicable to all devices.

Figure 3. Test Circuit and Voltage Waveforms

## PACKAGING INFORMATION

| Orderable part number            | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">SN74CB3Q6800DBQR</a> | Active        | Production           | SSOP (DBQ)   24  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | CB3Q6800            |
| SN74CB3Q6800DBQR.B               | Active        | Production           | SSOP (DBQ)   24  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | CB3Q6800            |
| SN74CB3Q6800DBQRG4               | Active        | Production           | SSOP (DBQ)   24  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | CB3Q6800            |
| SN74CB3Q6800DBQRG4.B             | Active        | Production           | SSOP (DBQ)   24  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | CB3Q6800            |
| <a href="#">SN74CB3Q6800DGVR</a> | Active        | Production           | TVSOP (DGV)   24 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BY800               |
| SN74CB3Q6800DGVR.B               | Active        | Production           | TVSOP (DGV)   24 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BY800               |
| <a href="#">SN74CB3Q6800PW</a>   | Active        | Production           | TSSOP (PW)   24  | 60   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BY800               |
| SN74CB3Q6800PW.B                 | Active        | Production           | TSSOP (PW)   24  | 60   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BY800               |
| <a href="#">SN74CB3Q6800PWR</a>  | Active        | Production           | TSSOP (PW)   24  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BY800               |
| SN74CB3Q6800PWR.B                | Active        | Production           | TSSOP (PW)   24  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BY800               |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74CB3Q6800DBQR   | SSOP         | DBQ             | 24   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74CB3Q6800DBQRG4 | SSOP         | DBQ             | 24   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74CB3Q6800DGVR   | TVSOP        | DGV             | 24   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74CB3Q6800PWR    | TSSOP        | PW              | 24   | 2000 | 330.0              | 16.4               | 6.95    | 8.3     | 1.6     | 8.0     | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74CB3Q6800DBQR   | SSOP         | DBQ             | 24   | 2500 | 353.0       | 353.0      | 32.0        |
| SN74CB3Q6800DBQRG4 | SSOP         | DBQ             | 24   | 2500 | 353.0       | 353.0      | 32.0        |
| SN74CB3Q6800DGVR   | TVSOP        | DGV             | 24   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74CB3Q6800PWR    | TSSOP        | PW              | 24   | 2000 | 353.0       | 353.0      | 32.0        |

DBQ (R-PDSO-G24)

PLASTIC SMALL-OUTLINE PACKAGE

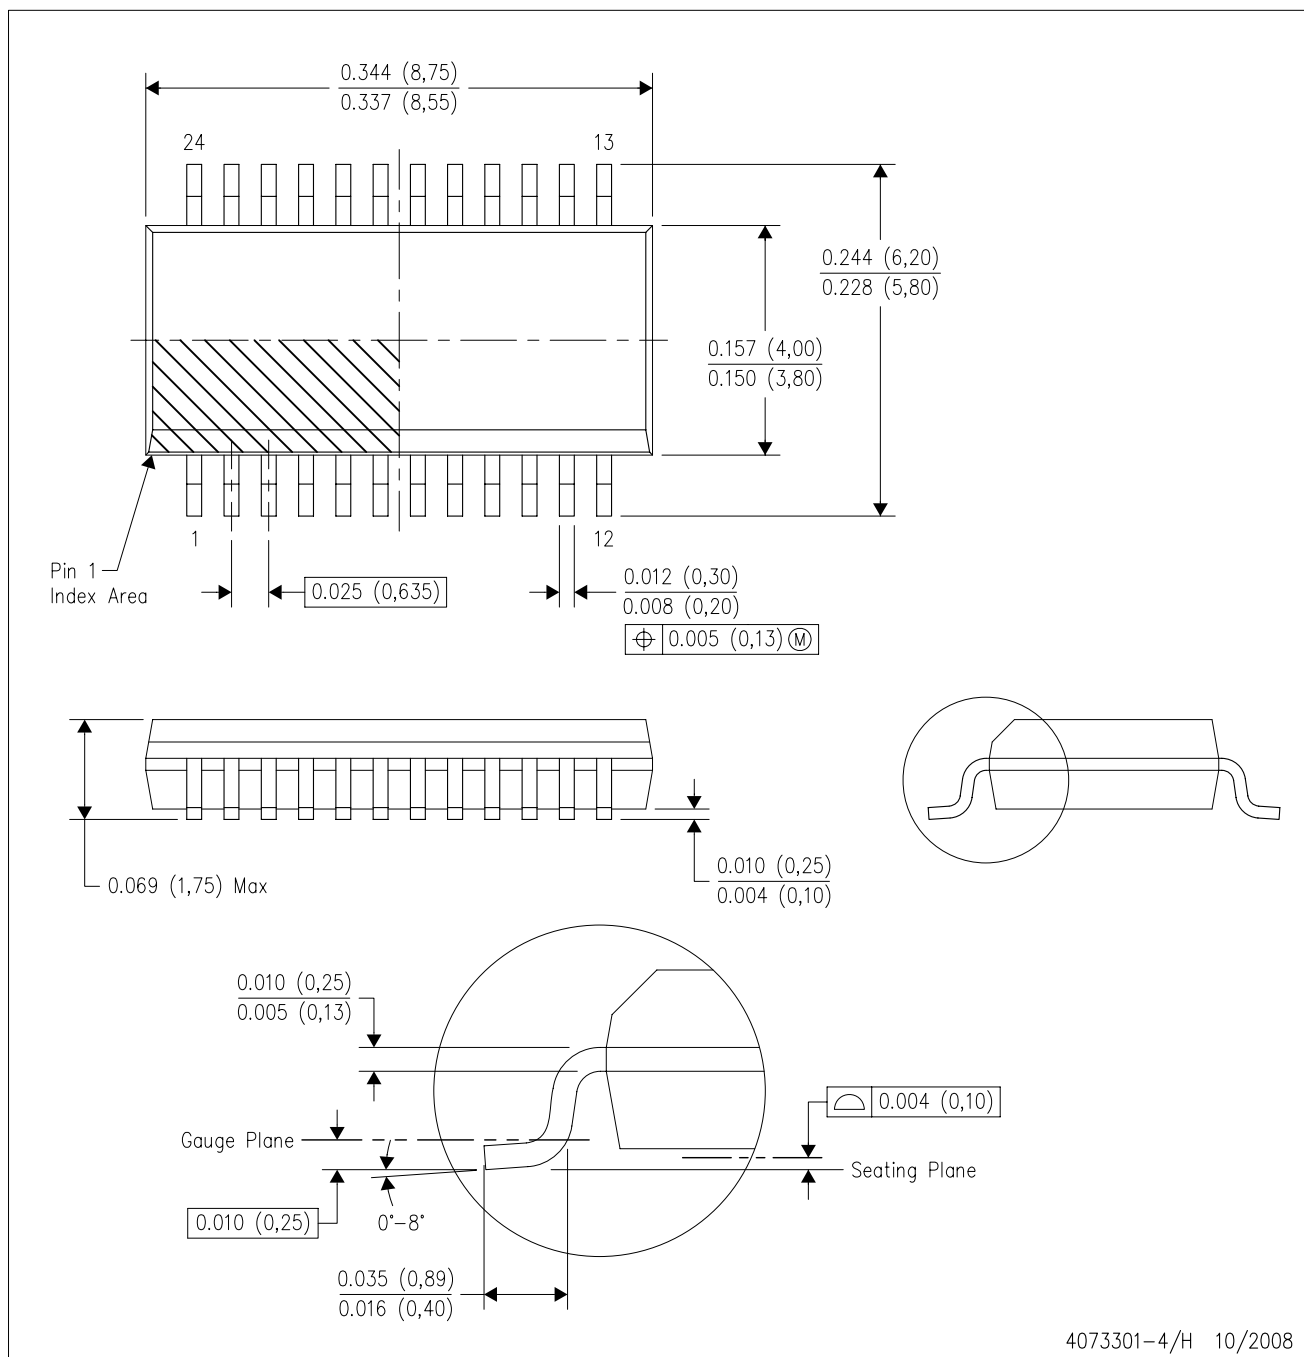


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
  - D. Falls within JEDEC MO-137 variation AE.




**PW0024A**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

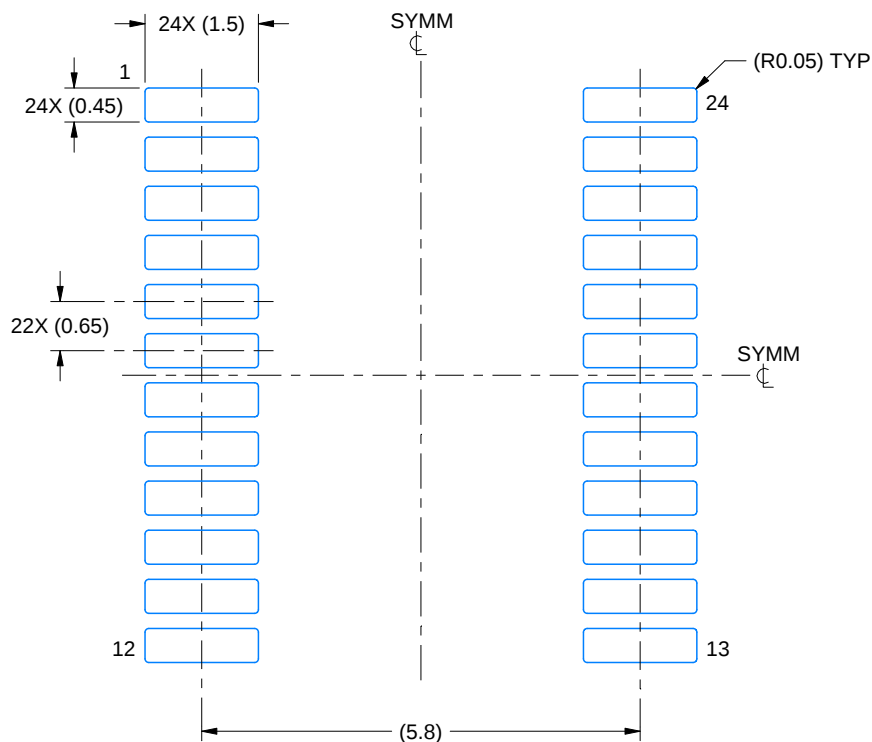

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

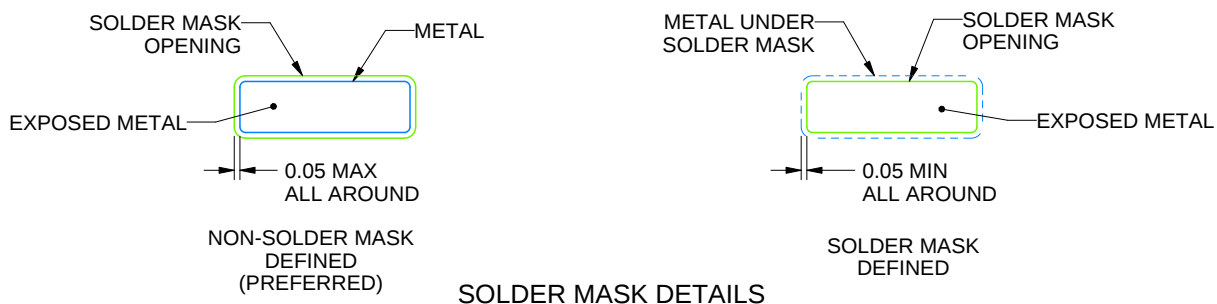

4220208/A 02/2017

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.  
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0024A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE


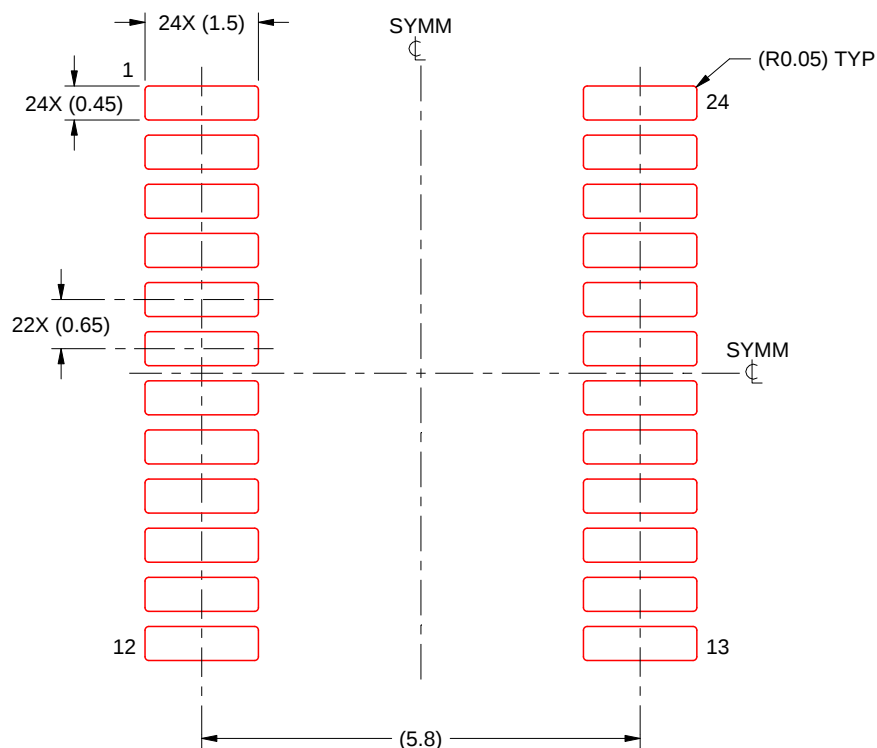


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220208/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

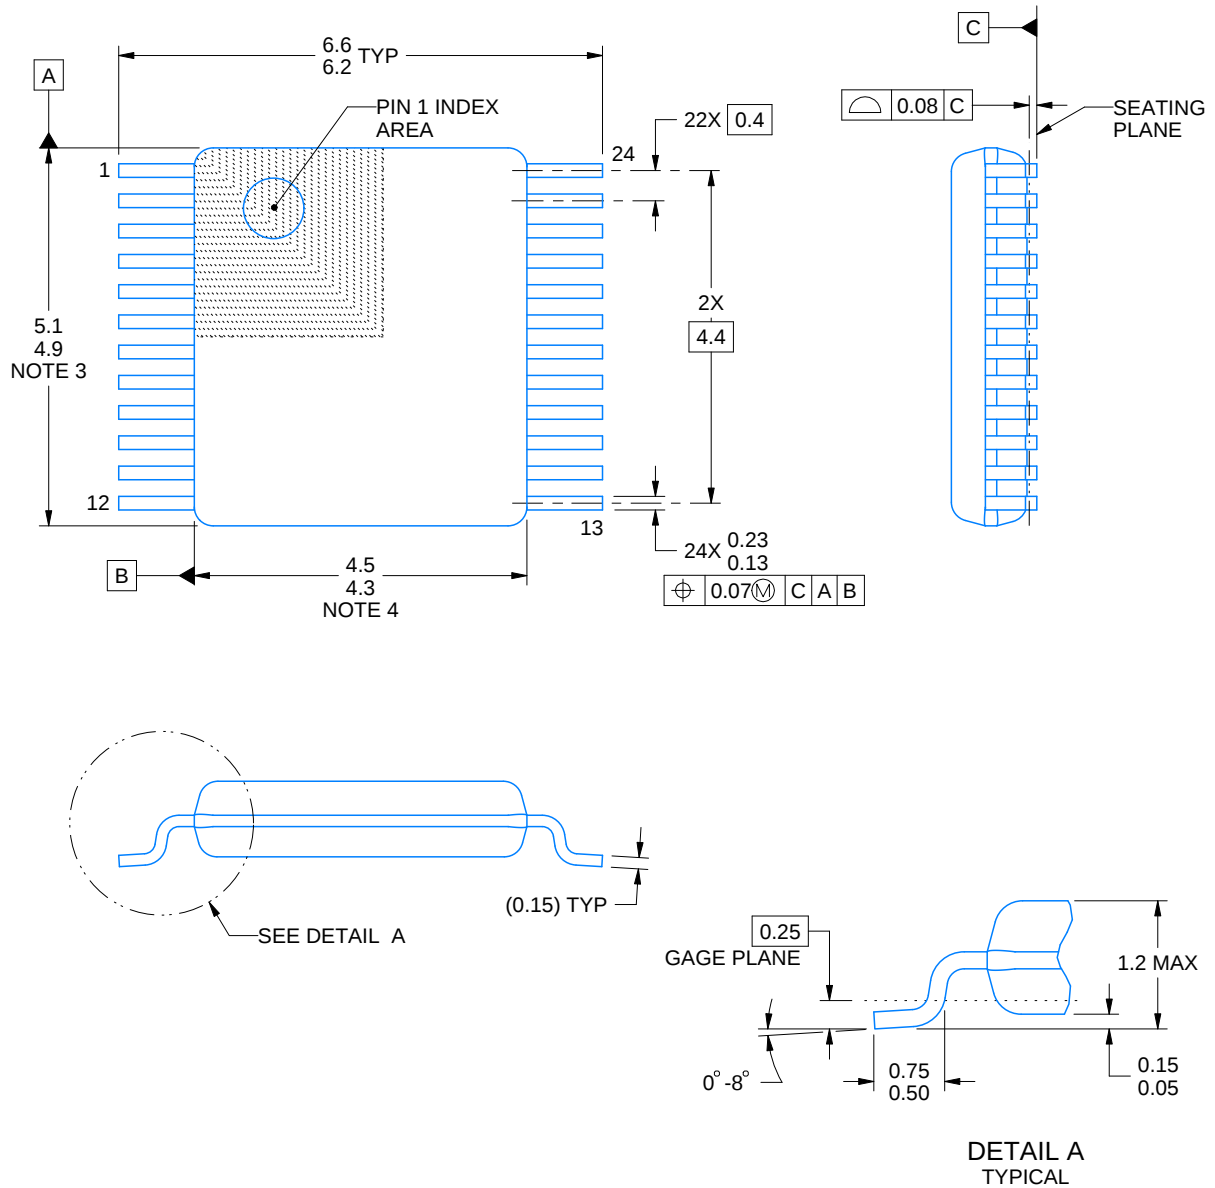

4229221/A 12/2022

**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT


DGV0024A

TVSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

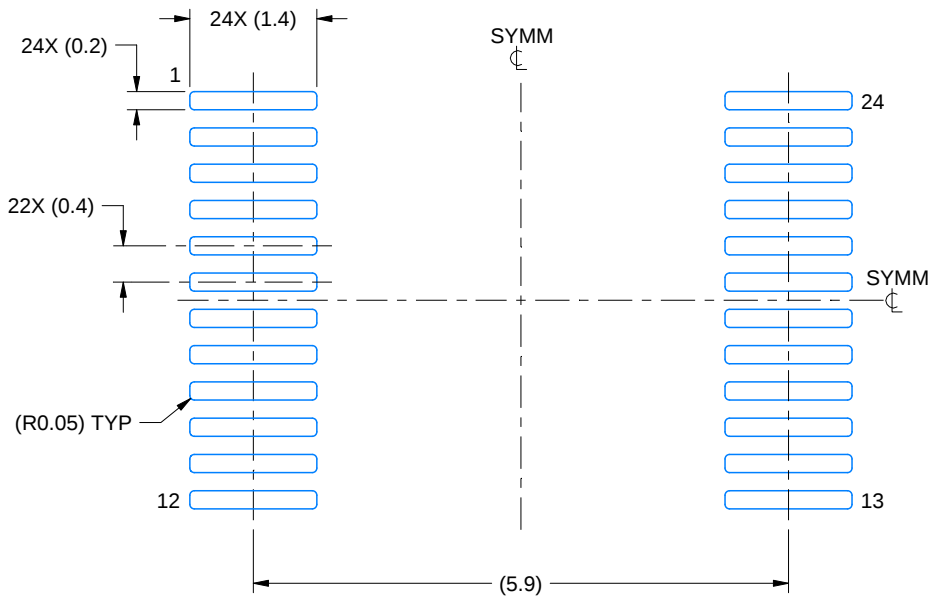

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 12X

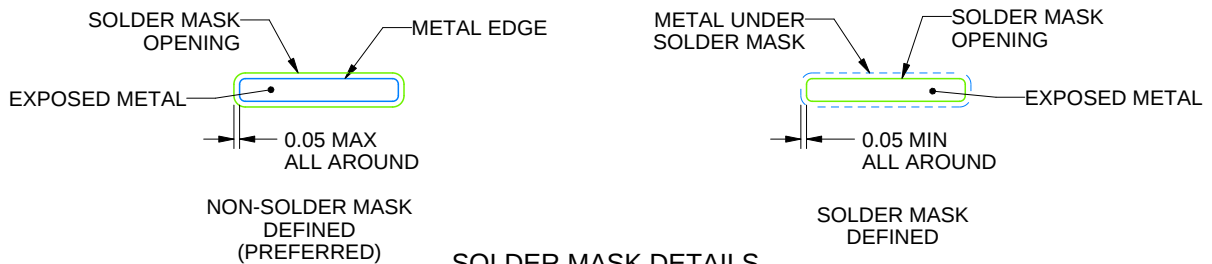

SOLDER MASK DETAILS

4229221/A 12/2022

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DGV0024A

TVSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

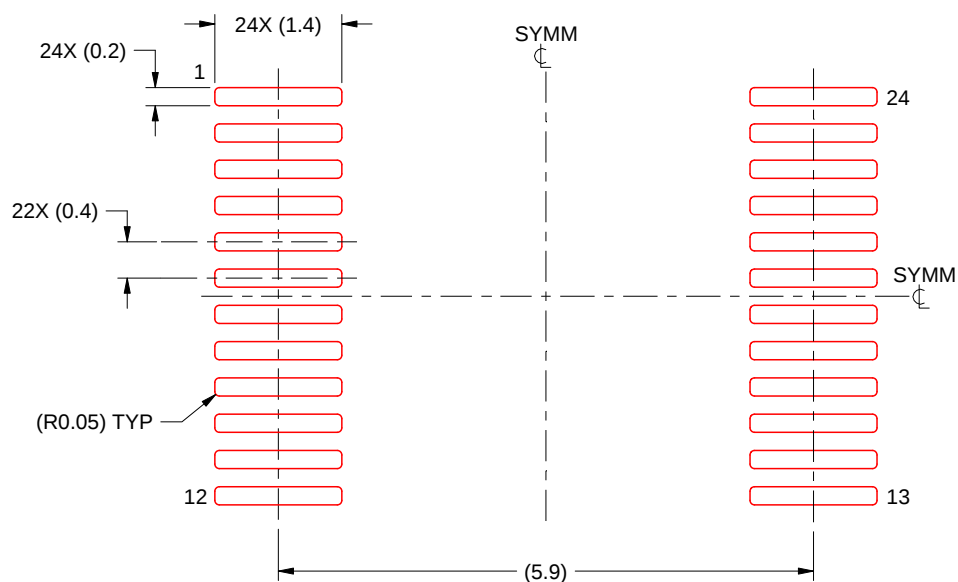

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 12X

4229221/A 12/2022

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025