

SN74LVCH8T245 8-BIT Dual-Supply Bus Transceiver


With Configurable Level-Shifting, Voltage Translation, and 3-State Outputs

1 Features

- Fully configurable dual-rail design
- Robust, glitch-free power supply sequencing
- Control inputs (DIR and \overline{OE}) V_{IH} and V_{IL} levels are referenced to V_{CCA}
- Bus hold on data inputs eliminates the need for external pullup and pulldown resistors
- V_{CC} isolation feature and V_{CC} disconnect feature
 - if either V_{CC} input is below 100mV or left floating, all I/O outputs are disabled and become high-impedance state
- I_{off} supports Partial-Power-Down mode operation
- Latch-up performance exceeds 100mA per JESD 78, class II
- ESD protection exceeds JESD 22

2 Applications

- [Video surveillance](#)
- [Smart meter](#)
- Semiconductor manufacturing
- [Data communications](#)
- [Wired networking](#)
- [Grid infrastructure](#)
- [Medical](#)

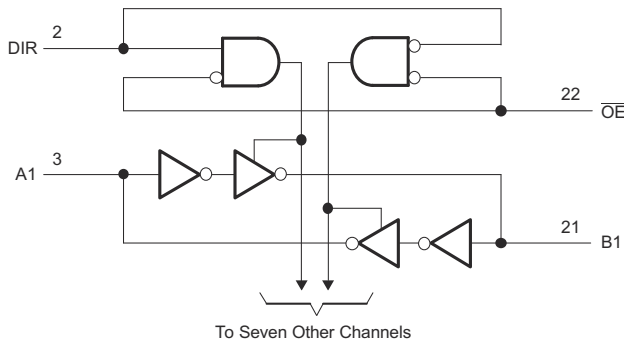

Logic Diagram (Positive Logic)

3 Description

The SN74LVCH8T245 is an 8-bit noninverting bus transceiver that uses two separate configurable power-supply rails. The A port is designed to track V_{CCA} , which accepts any supply voltage from 1.65V to 5.5V. The B port is designed to track V_{CCB} , which also accepts any supply voltage from 1.65V to 5.5V. This allows for universal low-voltage bidirectional translation between any of the 1.8V, 2.5V, 3.3V, and 5.5V voltage nodes.

The SN74LVCH8T245 is designed for asynchronous communication between two data buses. The logic levels of the direction-control (DIR) input and the output-enable (\overline{OE}) input activate either the B-port outputs, the A-port outputs, or place both output ports into a high-impedance state. The device transmits data from the A bus to the B bus when the B-port outputs are activated, and from the B bus to the A bus when the A-port outputs are activated. The input circuitry on both A and B ports are always active.

Active bus-hold circuitry holds unused or undriven inputs at a valid logic state. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended. This device is fully specified for partial-power-down applications using I_{off} . The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device. The V_{CC} isolation feature is designed so that if either V_{CCA} or V_{CCB} is at GND, then the outputs are in the high-impedance state. To put the device in the high-impedance state during power up or power down, tie \overline{OE} to V_{CCA} through a pullup resistor; the current-sinking capability of the driver determines the minimum value of the resistor.

The SN74LVCH8T245 is designed so that the control pins (DIR and \overline{OE}) are referenced to V_{CCA} .

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
SN74LVCH8T245	DB (SSOP, 24)	8.2mm × 7.8mm
	DGV (TVSOP, 24)	5mm × 6.4mm
	PW (TSSOP, 24)	7.8mm × 6.4mm
	RHL (VQFN, 24)	5.5mm × 3.5mm

(1) For more information, see [Section 11](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.



Table of Contents

1 Features	1	7.2 Functional Block Diagram.....	13
2 Applications	1	7.3 Feature Description.....	13
3 Description	1	7.4 Device Functional Modes.....	14
4 Pin Configuration and Functions	3	8 Application and Implementation	15
5 Specifications	4	8.1 Application Information.....	15
5.1 Absolute Maximum Ratings.....	4	8.2 Typical Application.....	15
5.2 ESD Ratings.....	4	8.3 Power Supply Recommendations.....	17
5.3 Recommended Operating Conditions.....	4	8.4 Layout.....	17
5.4 Thermal Information.....	5	9 Device and Documentation Support	19
5.5 Electrical Characteristics.....	6	9.1 Documentation Support.....	19
5.6 Switching Characteristics: $V_{CCA} = 1.8V \pm 0.15V$	7	9.2 Receiving Notification of Documentation Updates....	19
5.7 Switching Characteristics: $V_{CCA} = 2.5V \pm 0.2V$	8	9.3 Support Resources.....	19
5.8 Switching Characteristics: $V_{CCA} = 3.3V \pm 0.3V$	9	9.4 Trademarks.....	19
5.9 Switching Characteristics: $V_{CCA} = 5V \pm 0.5V$	10	9.5 Electrostatic Discharge Caution.....	19
5.10 Operating Characteristics.....	11	9.6 Glossary.....	19
5.11 Typical Characteristics.....	11	10 Revision History	19
6 Parameter Measurement Information	12	11 Mechanical, Packaging, and Orderable Information	20
7 Detailed Description	13		
7.1 Overview.....	13		

4 Pin Configuration and Functions

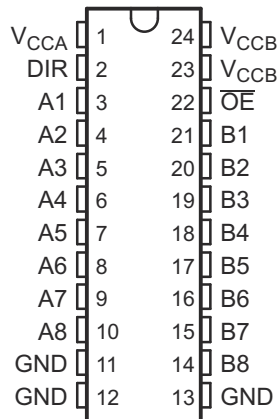


Figure 4-1. DB, DGV, or PW Packages, 24-Pin SSOP, TVSOP, or TSSOP (Top View)

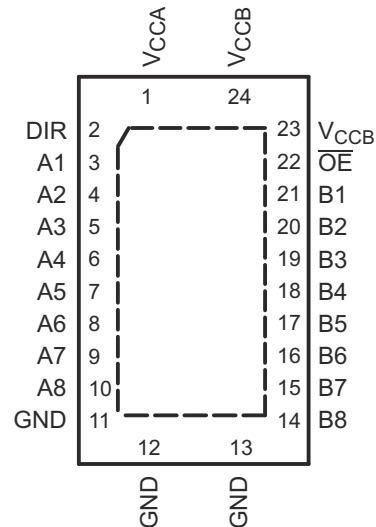


Figure 4-2. RHL Package, 24-Pin VQFN (Top View)

Table 4-1. Pin Functions

NAME	PIN		TYPE ⁽¹⁾	DESCRIPTION
	SSOP, TVSOP, TSSOP	VQFN		
A1	3	3	I/O	Input/output A1. Referenced to V_{CCA} .
A2	4	4	I/O	Input/output A2. Referenced to V_{CCA} .
A3	5	5	I/O	Input/output A3. Referenced to V_{CCA} .
A4	6	6	I/O	Input/output A4. Referenced to V_{CCA} .
A5	7	7	I/O	Input/output A5. Referenced to V_{CCA} .
A6	8	8	I/O	Input/output A6. Referenced to V_{CCA} .
A7	9	9	I/O	Input/output A7. Referenced to V_{CCA} .
A8	10	10	I/O	Input/output A8. Referenced to V_{CCA} .
B1	21	21	I/O	Input/output B1. Referenced to V_{CCB} .
B2	20	20	I/O	Input/output B2. Referenced to V_{CCB} .
B3	19	19	I/O	Input/output B3. Referenced to V_{CCB} .
B4	18	18	I/O	Input/output B4. Referenced to V_{CCB} .
B5	17	17	I/O	Input/output B5. Referenced to V_{CCB} .
B6	16	16	I/O	Input/output B6. Referenced to V_{CCB} .
B7	15	15	I/O	Input/output B7. Referenced to V_{CCB} .
B8	14	14	I/O	Input/output B8. Referenced to V_{CCB} .
DIR	2	2	I	Direction-control signal. Referenced to V_{CCA} .
\overline{OE}	22	22	I	3-state output-mode enables. Pull \overline{OE} high to place all outputs in 3-state mode. Referenced to V_{CCA} .
V_{CCA}	1	1	—	A-port supply voltage. $1.65V \leq V_{CCA} \leq 5.5V$
V_{CCB}	23, 24	23, 24	—	B-port supply voltage. $1.65V \leq V_{CCA} \leq 5.5V$
GND	11, 12, 13	11, 12, 13	—	Ground

(1) I = input, O = output

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Supply voltage	V_{CCA} and V_{CCB}	-0.5	6.5	V
Input voltage ⁽²⁾	I/O ports (A port)	-0.5	6.5	V
	I/O ports (B port)	-0.5	6.5	
	Control inputs	-0.5	6.5	
Voltage range applied to any output in the high-impedance or power-off state ⁽²⁾	A port	-0.5	6.5	V
	B port	-0.5	6.5	
Voltage range applied to any output in the high or low state ^{(2) (3)}	A port	-0.5	$V_{CCA} + 0.5$	V
	B port	-0.5	$V_{CCB} + 0.5$	
Input clamp current	$V_I < 0$		-50	mA
Output clamp current	$V_O < 0$		-50	mA
Continuous output current, I_O			±50	mA
Continuous through current	V_{CCA} , V_{CCB} , and GND		±100	mA
Junction temperature, T_J		-40	150	°C
Storage temperature, T_{stg}		-65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under [Section 5.3](#). Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The output positive-voltage rating may be exceeded up to 6.5V maximum if the output current rating is observed.

5.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±4000	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1000	

(1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)^{(1) (2) (3)}

		MIN	MAX	UNIT
V_{CCA}	Supply voltage	1.65	5.5	V
V_{CCB}		1.65	5.5	
V_{IH} High-level input voltage ⁽¹⁾	Data inputs ⁽⁴⁾	$V_{CCI} = 1.65V$ to $4.5V$	$V_{CCI} \times 0.65$	V
		$V_{CCI} = 2.3V$ to $2.7V$	1.7	
		$V_{CCI} = 3V$ to $3.6V$	2	
		$V_{CCI} = 4.5V$ to $5.5V$	$V_{CCI} \times 0.7$	
V_{IL} Low-level input voltage ⁽¹⁾	Data inputs ⁽⁴⁾	$V_{CCI} = 1.65V$ to $4.5V$	$V_{CCI} \times 0.35$	V
		$V_{CCI} = 2.3V$ to $2.7V$	0.7	
		$V_{CCI} = 3V$ to $3.6V$	0.8	
		$V_{CCI} = 4.5V$ to $5.5V$	$V_{CCI} \times 0.3$	

5.3 Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)⁽¹⁾ ⁽²⁾ ⁽³⁾

			MIN	MAX	UNIT
V _{IH}	High-level input voltage	Control inputs (referenced to V _{CCA}) ⁽⁵⁾	V _{CCI} = 1.65V to 4.5V	V _{CCA} × 0.65	V
			V _{CCI} = 2.3V to 2.7V	1.7	
			V _{CCI} = 3V to 3.6V	2	
			V _{CCI} = 4.5V to 5.5V	V _{CCA} × 0.7	
V _{IL}	Low-level input voltage	Control inputs (referenced to V _{CCA}) ⁽⁵⁾	V _{CCI} = 1.65V to 4.5V	V _{CCA} × 0.35	V
			V _{CCI} = 2.3V to 2.7V	0.7	
			V _{CCI} = 3V to 3.6V	0.8	
			V _{CCI} = 4.5V to 5.5V	V _{CCA} × 0.3	
V _I	Input voltage	Control inputs ⁽³⁾	0	5.5	V
V _{I/O}	Input/output voltage ⁽²⁾	Active state	0	V _{CCO}	V
		3-State	0	5.5	
I _{OH}	High-level output current		V _{CCO} = 1.65V to 4.5V	–4	mA
			V _{CCO} = 2.3V to 2.7V	–8	
			V _{CCO} = 3V to 3.6V	–24	
			V _{CCO} = 4.5V to 5.5V	–32	
I _{OL}	Low-level output current		V _{CCO} = 1.65V to 4.5V	4	mA
			V _{CCO} = 2.3V to 2.7V	8	
			V _{CCO} = 3V to 3.6V	24	
			V _{CCO} = 4.5V to 5.5V	32	
Δt/Δv	Input transition rise or fall rate	Data inputs	V _{CCI} = 1.65V to 4.5V	20	ns/V
			V _{CCI} = 2.3V to 2.7V	20	
			V _{CCI} = 3V to 3.6V	10	
			V _{CCI} = 4.5V to 5.5V	5	
T _A	Operating free-air temperature		–40	85	°C

- (1) V_{CCI} is the V_{CC} associated with the data input port.
- (2) V_{CCO} is the V_{CC} associated with the output port.
- (3) All unused control inputs of the device must be held at V_{CCA} or GND to ensure proper device operation and minimize power consumption. See [Implications of Slow or Floating CMOS Inputs](#).
- (4) For V_{CCI} values not specified in the data sheet, V_{IH} min = V_{CCI} × 0.7V, V_{IL} (max) = V_{CCI} × 0.3V.
- (5) For V_{CCA} values not specified in the data sheet, V_{IH} min = V_{CCA} × 0.7V, V_{IL} (max) = V_{CCA} × 0.3V.

5.4 Thermal Information

THERMAL METRIC ⁽¹⁾	SN74LVCH8T245				UNIT	
	DB (SSOP)	DGV (TVSOP)	PW (TSSOP)	RHL (VQFN)		
	24 PINS	24 PINS	24 PINS	24 PINS		
R _{θJA}	Junction-to-ambient thermal resistance	88.5	91.1	100.6	37.4	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	48.7	23.7	44.7	38.1	°C/W
R _{θJB}	Junction-to-board thermal resistance	44.1	44.5	55.8	15.2	°C/W
ψ _{JT}	Junction-to-top characterization parameter	12.8	0.6	6.8	0.7	°C/W
ψ _{JB}	Junction-to-board characterization parameter	43.6	44.1	55.4	15.2	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	—	—	—	4.3	°C/W

- (1) For more information about traditional and new thermal metrics, see the application note, [Semiconductor and IC Package Thermal Metrics](#).

5.5 Electrical Characteristics

All typical limits apply over $T_A = 25^\circ\text{C}$, and all maximum and minimum limits apply over $T_A = -40^\circ\text{C}$ to 85°C (unless otherwise noted).^{(1) (2)}

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT		
V_{OH}	High-level output voltage ⁽¹⁾	$I_{OH} = -100\mu\text{A}$, $V_I = V_{IH}$	$V_{CCA} = V_{CCB} = 1.65\text{V to } 4.5\text{V}$	$V_{CCO} - 0.1$			V		
		$I_{OH} = -4\text{mA}$, $V_I = V_{IH}$	$V_{CCA} = V_{CCB} = 1.65\text{V}$	1.2					
		$I_{OH} = -8\text{mA}$, $V_I = V_{IH}$	$V_{CCA} = V_{CCB} = 2.3\text{V}$	1.9					
		$I_{OH} = -24\text{mA}$, $V_I = V_{IH}$	$V_{CCA} = V_{CCB} = 3\text{V}$	2.4					
		$I_{OH} = -32\text{mA}$, $V_I = V_{IH}$	$V_{CCA} = V_{CCB} = 4.5\text{V}$	3.8					
V_{OL}	Low-level output voltage	$I_{OL} = 100\mu\text{A}$, $V_I = V_{IL}$	$V_{CCA} = V_{CCB} = 1.65\text{V to } 4.5\text{V}$			0.1	V		
		$I_{OL} = 4\text{mA}$, $V_I = V_{IL}$	$V_{CCA} = V_{CCB} = 1.65\text{V}$			0.45			
		$I_{OL} = 8\text{mA}$, $V_I = V_{IL}$	$V_{CCA} = V_{CCB} = 2.3\text{V}$			0.3			
		$I_{OL} = 24\text{mA}$, $V_I = V_{IL}$	$V_{CCA} = V_{CCB} = 3\text{V}$			0.55			
		$I_{OL} = 32\text{mA}$, $V_I = V_{IL}$	$V_{CCA} = V_{CCB} = 4.5\text{V}$			0.55			
I_I	Control inputs	$V_I = V_{CCA}$ or GND	$V_{CCA} = V_{CCB} = 1.65\text{V to } 4.5\text{V}$		± 0.5	± 2	μA		
I_{BHL} ⁽³⁾	Bus-hold low sustaining current	$V_I = 0.58\text{V}$	$V_{CCA} = V_{CCB} = 1.65\text{V}$		15		μA		
		$V_I = 0.7\text{V}$	$V_{CCA} = V_{CCB} = 2.3\text{V}$		45				
		$V_I = 0.8\text{V}$	$V_{CCA} = V_{CCB} = 3\text{V}$		75				
		$V_I = 1.35\text{V}$	$V_{CCA} = V_{CCB} = 4.5\text{V}$		100				
I_{BHH} ⁽⁴⁾	Bus-hold high sustaining current	$V_I = 1.07\text{V}$	$V_{CCA} = V_{CCB} = 1.65\text{V}$		-15		μA		
		$V_I = 1.7\text{V}$	$V_{CCA} = V_{CCB} = 2.3\text{V}$		-45				
		$V_I = 2\text{V}$	$V_{CCA} = V_{CCB} = 3\text{V}$		-75				
		$V_I = 3.15\text{V}$	$V_{CCA} = V_{CCB} = 4.5\text{V}$		-100				
I_{BHLO} ⁽⁵⁾	Bus-hold low overdrive current	$V_I = 0$ to V_{CC}	$V_{CCA} = V_{CCB} = 1.95\text{V}$		200		μA		
			$V_{CCA} = V_{CCB} = 2.7\text{V}$		300				
			$V_{CCA} = V_{CCB} = 3.6\text{V}$		500				
			$V_{CCA} = V_{CCB} = 5.5\text{V}$		900				
I_{BHHO} ⁽⁶⁾	Bus-hold high overdrive current	$V_I = 0$ to V_{CC}	$V_{CCA} = V_{CCB} = 1.95\text{V}$		-200		μA		
			$V_{CCA} = V_{CCB} = 2.7\text{V}$		-300				
			$V_{CCA} = V_{CCB} = 3.6\text{V}$		-500				
			$V_{CCA} = V_{CCB} = 5.5\text{V}$		-900				
I_{off}	Input and output power-off leakage current	V_I or $V_O = 0$ to 5.5V	$V_{CCA} = 0\text{V}$, $V_{CCB} = 0$ to 5.5V	A Port	± 0.5	± 2	μA		
			$V_{CCA} = 0$ to 5.5V , $V_{CCB} = 0\text{V}$	B Port	± 0.5	± 2			
I_{OZ}	Off-state output current	$V_O = V_{CCO}$ or GND, $V_I = V_{CCI}$ or GND	$\overline{OE} = V_{IH}$	$V_{CCA} = V_{CCB} = 1.65\text{V to } 4.5\text{V}$	A Port, B Port		± 2	μA	
				$\overline{OE} = X$	$V_{CCA} = 0\text{V}$, $V_{CCB} = 5.5\text{V}$	B Port			± 2
					$V_{CCA} = 5.5\text{V}$, $V_{CCB} = 0\text{V}$	A Port			± 2
I_{CCA}	Supply current A port	$V_I = V_{CCI}$ or GND, $I_O = 0$	$V_{CCA} = V_{CCB} = 1.65\text{V to } 4.5\text{V}$			8	μA		
			$V_{CCA} = 5\text{V}$, $V_{CCB} = 0\text{V}$			8			
			$V_{CCA} = 0\text{V}$, $V_{CCB} = 5\text{V}$			-2			
I_{CCB}	Supply current B port	$V_I = V_{CCI}$ or GND, $I_O = 0$	$V_{CCA} = V_{CCB} = 1.65\text{V to } 4.5\text{V}$			8	μA		
			$V_{CCA} = 5\text{V}$, $V_{CCB} = 0\text{V}$			-2			
			$V_{CCA} = 0\text{V}$, $V_{CCB} = 5\text{V}$			8			

5.5 Electrical Characteristics (continued)

All typical limits apply over $T_A = 25^\circ\text{C}$, and all maximum and minimum limits apply over $T_A = -40^\circ\text{C}$ to 85°C (unless otherwise noted).^{(1) (2)}

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
$I_{\text{CCA}}+$ I_{CCB}	Combined supply current	$V_I = V_{\text{CCI}}$ or GND, $I_O = 0$	$V_{\text{CCA}} = V_{\text{CCB}} = 1.65\text{V}$ to 4.5V			12	μA
ΔI_{CCA}	Supply-current change DIR	DIR at $V_{\text{CCA}} - 0.6\text{V}$, B port = open, A port at V_{CCA} or GND	$V_{\text{CCA}} = V_{\text{CCB}} = 3$ to 5.5V			50	μA
C_i	Input capacitance control inputs	$V_I = V_{\text{CCA}}$ or GND	$V_{\text{CCA}} = V_{\text{CCB}} = 3.3\text{V}$		4	5	pF
C_{io}	Input and output capacitance A or B port	$V_O = V_{\text{CCA/B}}$ or GND	$V_{\text{CCA}} = V_{\text{CCB}} = 3.3\text{V}$		8.5	10	pF

- (1) V_{CCO} is the V_{CC} associated with the output port.
- (2) V_{CCI} is the V_{CC} associated with the input port.
- (3) The bus-hold circuit can sink at least the minimum low sustaining current at the V_{IL} maximum. I_{BHL} should be measured after lowering V_{IN} to GND and then raising it to V_{IL} maximum.
- (4) The bus-hold circuit can source at least the minimum high sustaining current at V_{IH} min. I_{BHH} should be measured after raising V_{IN} to V_{CC} and then lowering it to V_{IH} min.
- (5) An external driver must source at least I_{BHLO} to switch this node from low to high.
- (6) An external driver must sink at least I_{BHHO} to switch this node from high to low.

5.6 Switching Characteristics: $V_{\text{CCA}} = 1.8\text{V} \pm 0.15\text{V}$

over recommended operating free-air temperature range, $V_{\text{CCA}} = 1.8\text{V} \pm 0.15\text{V}$ (unless otherwise noted) (see [Figure 6-1](#))

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	MAX	UNIT
$t_{\text{PLH}}, t_{\text{PHL}}$	A	B	$V_{\text{CCB}} = 1.8\text{V} \pm 0.15\text{V}$	1.7	21.9	ns
			$V_{\text{CCB}} = 2.5\text{V} \pm 0.2\text{V}$	1.3	9.2	
			$V_{\text{CCB}} = 3.3\text{V} \pm 0.3\text{V}$	1	7.4	
			$V_{\text{CCB}} = 5\text{V} \pm 0.5\text{V}$	0.4	7.1	
$t_{\text{PLH}}, t_{\text{PHL}}$	B	A	$V_{\text{CCB}} = 1.8\text{V} \pm 0.15\text{V}$	0.9	23.8	ns
			$V_{\text{CCB}} = 2.5\text{V} \pm 0.2\text{V}$	0.8	23.6	
			$V_{\text{CCB}} = 3.3\text{V} \pm 0.3\text{V}$	0.7	23.4	
			$V_{\text{CCB}} = 5\text{V} \pm 0.5\text{V}$	0.7	23.4	
$t_{\text{PHZ}}, t_{\text{PLZ}}$	$\overline{\text{OE}}$	A	$V_{\text{CCB}} = 1.8\text{V} \pm 0.15\text{V}$	1.5	29.6	ns
			$V_{\text{CCB}} = 2.5\text{V} \pm 0.2\text{V}$	1.5	29.4	
			$V_{\text{CCB}} = 3.3\text{V} \pm 0.3\text{V}$	1.5	29.3	
			$V_{\text{CCB}} = 5\text{V} \pm 0.5\text{V}$	1.4	29.2	
$t_{\text{PHZ}}, t_{\text{PLZ}}$	$\overline{\text{OE}}$	B	$V_{\text{CCB}} = 1.8\text{V} \pm 0.15\text{V}$	2.4	32.2	ns
			$V_{\text{CCB}} = 2.5\text{V} \pm 0.2\text{V}$	1.9	13.1	
			$V_{\text{CCB}} = 3.3\text{V} \pm 0.3\text{V}$	1.7	12	
			$V_{\text{CCB}} = 5\text{V} \pm 0.5\text{V}$	1.3	10.3	
$t_{\text{PZH}}, t_{\text{PZL}}$	$\overline{\text{OE}}$	A	$V_{\text{CCB}} = 1.8\text{V} \pm 0.15\text{V}$	0.4	24	ns
			$V_{\text{CCB}} = 2.5\text{V} \pm 0.2\text{V}$	0.4	23.8	
			$V_{\text{CCB}} = 3.3\text{V} \pm 0.3\text{V}$	0.4	23.7	
			$V_{\text{CCB}} = 5\text{V} \pm 0.5\text{V}$	0.4	23.7	

over recommended operating free-air temperature range, $V_{CCA} = 1.8V \pm 0.15V$ (unless otherwise noted) (see [Figure 6-1](#))

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	MAX	UNIT
t_{PZH}, t_{PZL}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	1.8	32	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.5	16	
			$V_{CCB} = 3.3V \pm 0.3V$	1.2	12.6	
			$V_{CCB} = 5V \pm 0.5V$	0.9	10.8	

5.7 Switching Characteristics: $V_{CCA} = 2.5V \pm 0.2V$

 over recommended operating free-air temperature range, $V_{CCA} = 2.5V \pm 0.2V$ (unless otherwise noted) (see [Figure 6-1](#))

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	MAX	UNIT
t_{PLH}, t_{PHL}	A	B	$V_{CCB} = 1.8V \pm 0.15V$	1.5	21.4	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.2	9	
			$V_{CCB} = 3.3V \pm 0.3V$	0.8	6.2	
			$V_{CCB} = 5V \pm 0.5V$	0.6	4.8	
t_{PLH}, t_{PHL}	B	A	$V_{CCB} = 1.8V \pm 0.15V$	1.2	9.3	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1	9.1	
			$V_{CCB} = 3.3V \pm 0.3V$	1	8.9	
			$V_{CCB} = 5V \pm 0.5V$	0.9	8.8	
t_{PHZ}, t_{PLZ}	\overline{OE}	A	$V_{CCB} = 1.8V \pm 0.15V$	1.4	9	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.4	9	
			$V_{CCB} = 3.3V \pm 0.3V$	1.4	9	
			$V_{CCB} = 5V \pm 0.5V$	1.4	9	
t_{PHZ}, t_{PLZ}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	2.3	29.6	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.8	11	
			$V_{CCB} = 3.3V \pm 0.3V$	1.7	9.3	
			$V_{CCB} = 5V \pm 0.5V$	0.9	6.9	
t_{PZH}, t_{PZL}	\overline{OE}	A	$V_{CCB} = 1.8V \pm 0.15V$	1	10.9	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1	10.9	
			$V_{CCB} = 3.3V \pm 0.3V$	1	10.9	
			$V_{CCB} = 5V \pm 0.5V$	1	10.9	
t_{PZH}, t_{PZL}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	1.7	28.2	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.5	12.9	
			$V_{CCB} = 3.3V \pm 0.3V$	1.2	9.4	
			$V_{CCB} = 5V \pm 0.5V$	1	6.9	

5.8 Switching Characteristics: $V_{CCA} = 3.3V \pm 0.3V$

over recommended operating free-air temperature range, $V_{CCA} = 3.3V \pm 0.3V$ (unless otherwise noted) (see [Figure 6-1](#))

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	MAX	UNIT
t_{PLH}, t_{PHL}	A	B	$V_{CCB} = 1.8V \pm 0.15V$	1.5	21.2	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.1	8.8	
			$V_{CCB} = 3.3V \pm 0.3V$	0.8	6.2	
			$V_{CCB} = 5V \pm 0.5V$	0.5	4.4	
t_{PLH}, t_{PHL}	B	A	$V_{CCB} = 1.8V \pm 0.15V$	0.8	7.2	ns
			$V_{CCB} = 2.5V \pm 0.2V$	0.8	6.2	
			$V_{CCB} = 3.3V \pm 0.3V$	0.7	6.1	
			$V_{CCB} = 5V \pm 0.5V$	0.6	6	
t_{PHZ}, t_{PLZ}	\overline{OE}	A	$V_{CCB} = 1.8V \pm 0.15V$	1.6	8.2	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.6	8.2	
			$V_{CCB} = 3.3V \pm 0.3V$	1.6	8.2	
			$V_{CCB} = 5V \pm 0.5V$	1.6	8.2	
t_{PHZ}, t_{PLZ}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	2.1	29	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.7	10.3	
			$V_{CCB} = 3.3V \pm 0.3V$	1.5	8.6	
			$V_{CCB} = 5V \pm 0.5V$	0.8	6.3	
t_{PZH}, t_{PZL}	\overline{OE}	A	$V_{CCB} = 1.8V \pm 0.15V$	0.8	8.1	ns
			$V_{CCB} = 2.5V \pm 0.2V$	0.8	8.1	
			$V_{CCB} = 3.3V \pm 0.3V$	0.8	8.1	
			$V_{CCB} = 5V \pm 0.5V$	0.8	8.1	
t_{PZH}, t_{PZL}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	1.8	27.7	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.4	12.4	
			$V_{CCB} = 3.3V \pm 0.3V$	1.1	8.5	
			$V_{CCB} = 5V \pm 0.5V$	0.9	6.4	

5.9 Switching Characteristics: $V_{CCA} = 5V \pm 0.5V$

over recommended operating free-air temperature range, $V_{CCA} = 5V \pm 0.5V$ (unless otherwise noted) (see [Figure 6-1](#))

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	MAX	UNIT
t_{PLH} , t_{PHL}	A	B	$V_{CCB} = 1.8V \pm 0.15V$	1.5	21.4	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1	8.8	
			$V_{CCB} = 3.3V \pm 0.3V$	0.7	6	
			$V_{CCB} = 5V \pm 0.5V$	0.4	4.2	
t_{PLH} , t_{PHL}	B	A	$V_{CCB} = 1.8V \pm 0.15V$	0.7	7	ns
			$V_{CCB} = 2.5V \pm 0.2V$	0.4	4.8	
			$V_{CCB} = 3.3V \pm 0.3V$	0.3	4.5	
			$V_{CCB} = 5V \pm 0.5V$	0.3	4.3	
t_{PHZ} , t_{PLZ}	\overline{OE}	A	$V_{CCB} = 1.8V \pm 0.15V$	0.3	5.4	ns
			$V_{CCB} = 2.5V \pm 0.2V$	0.3	5.4	
			$V_{CCB} = 3.3V \pm 0.3V$	0.3	5.4	
			$V_{CCB} = 5V \pm 0.5V$	0.3	5.4	
t_{PHZ} , t_{PLZ}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	2	28.7	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.6	9.7	
			$V_{CCB} = 3.3V \pm 0.3V$	1.4	8	
			$V_{CCB} = 5V \pm 0.5V$	0.7	5.7	
t_{PZH} , t_{PZL}	\overline{OE}	A	$V_{CCB} = 1.8V \pm 0.15V$	0.7	6.4	ns
			$V_{CCB} = 2.5V \pm 0.2V$	0.7	6.4	
			$V_{CCB} = 3.3V \pm 0.3V$	0.7	6.4	
			$V_{CCB} = 5V \pm 0.5V$	0.7	6.4	
t_{PZH} , t_{PZL}	\overline{OE}	B	$V_{CCB} = 1.8V \pm 0.15V$	1.5	27.6	ns
			$V_{CCB} = 2.5V \pm 0.2V$	1.3	11.4	
			$V_{CCB} = 3.3V \pm 0.3V$	1	8.1	
			$V_{CCB} = 5V \pm 0.5V$	0.9	6.5	



5.10 Operating Characteristics

T_A = 25°C


PARAMETER ⁽¹⁾		TEST CONDITIONS		TYP	UNIT
C _{pdA} ⁽²⁾	A-port input, B-port output	C _L = 0, f = 10MHz, t _r = t _f = 1ns	V _{CCA} = V _{CCB} = 1.8V	2	pF
			V _{CCA} = V _{CCB} = 2.5V	2	
			V _{CCA} = V _{CCB} = 3.3V	2	
			V _{CCA} = V _{CCB} = 5V	3	
	B-port input, A-port output	C _L = 0, f = 10MHz, t _r = t _f = 1ns	V _{CCA} = V _{CCB} = 1.8V	12	
			V _{CCA} = V _{CCB} = 2.5V	13	
			V _{CCA} = V _{CCB} = 3.3V	13	
			V _{CCA} = V _{CCB} = 5V	16	
C _{pdB} ⁽²⁾	A-port input, B-port output	C _L = 0, f = 10MHz, t _r = t _f = 1ns	V _{CCA} = V _{CCB} = 1.8V	13	pF
			V _{CCA} = V _{CCB} = 2.5V	13	
			V _{CCA} = V _{CCB} = 3.3V	14	
			V _{CCA} = V _{CCB} = 5V	16	
	B-port input, A-port output	C _L = 0, f = 10MHz, t _r = t _f = 1ns	V _{CCA} = V _{CCB} = 1.8V	2	
			V _{CCA} = V _{CCB} = 2.5V	2	
			V _{CCA} = V _{CCB} = 3.3V	2	
			V _{CCA} = V _{CCB} = 5V	3	

- (1) See *CMOS Power Consumption and Cpd Calculation*, [SCAA035](#).
- (2) Power dissipation capacitance per transceiver.

5.11 Typical Characteristics


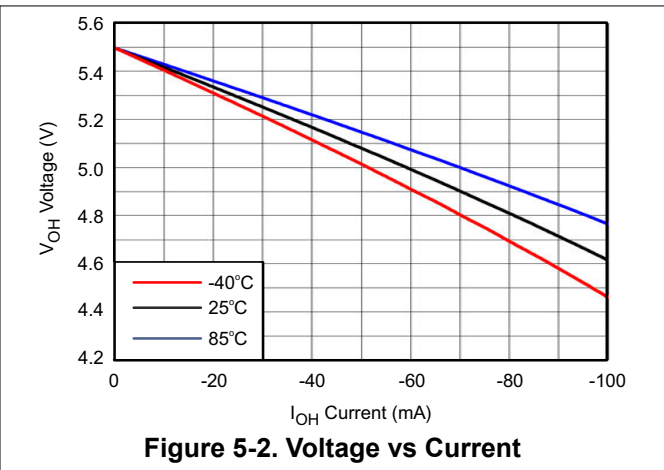
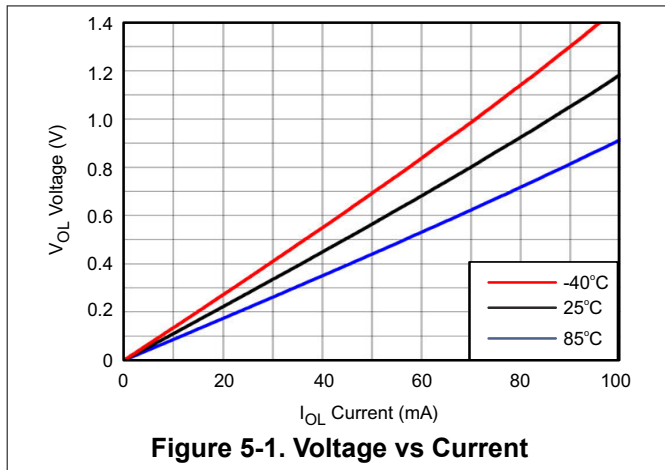


6 Parameter Measurement Information

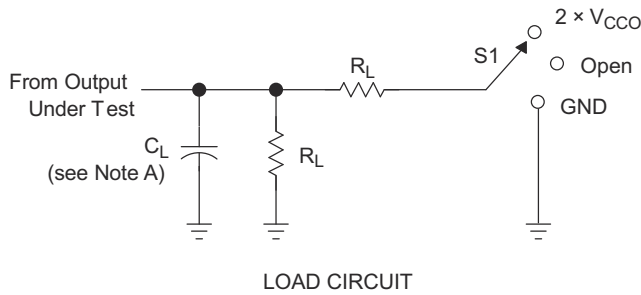

TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	$2 \times V_{CCO}$
t_{PHZ}/t_{PZH}	GND

V_{CCO}	C_L	R_L	V_{TP}
$1.8 \text{ V} \pm 0.15 \text{ V}$	15 pF	2 kW	0.15 V
$2.5 \text{ V} \pm 0.2 \text{ V}$	15 pF	2 kW	0.15 V
$3.3 \text{ V} \pm 0.3 \text{ V}$	15 pF	2 kW	0.3 V
$5 \text{ V} \pm 0.5 \text{ V}$	15 pF	2 kW	0.3 V

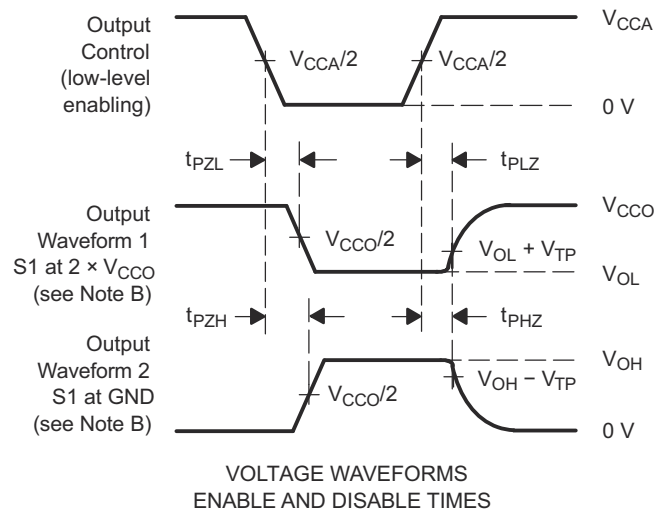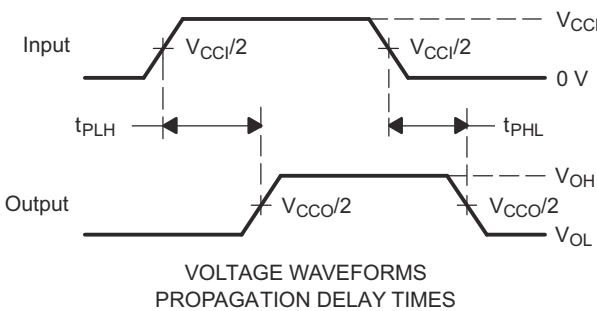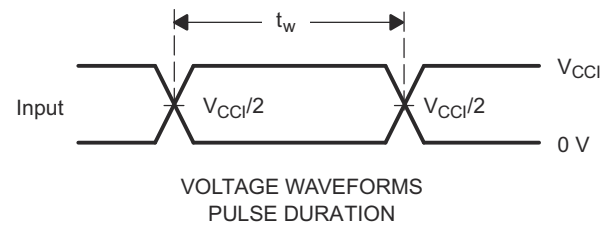

- NOTES:
- A. C_L includes probe and jig capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 - C. All input pulses are supplied by generators having the following characteristics: PRR = 10 MHz, $Z_O = 50 \Omega$, $dv/dt \geq 1 \text{ V/ns}$.
 - D. The outputs are measured one at a time, with one transition per measurement.
 - E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
 - F. t_{PZL} and t_{PZH} are the same as t_{en} .
 - G. t_{PLH} and t_{PHL} are the same as t_{pd} .
 - H. V_{CCi} is the V_{CC} associated with the input port.
 - I. V_{CCO} is the V_{CC} associated with the output port.
 - J. All parameters and waveforms are not applicable to all devices.


Figure 6-1. Load Circuit and Voltage Waveforms

7 Detailed Description

7.1 Overview

The SN74LVCH8T245 is an 8-bit, dual supply noninverting voltage level translator. Pins A1 through A4, and the control pins (DIR and \overline{OE}) are referenced to V_{CCA} , while pins B1 through B4 are referenced to V_{CCB} . Both the A port and B port can accept I/O voltages ranging from 1.65V to 5.5V. Glitch-free power supply sequencing allows either supply rail to be powered on or off in any order while providing robust power sequencing performance. The high on DIR allows data transmission from Port A to Port B, and a low on DIR allows data transmission from Port B to Port A. For more information, see [AVC Logic Family Technology and Applications](#).

7.2 Functional Block Diagram

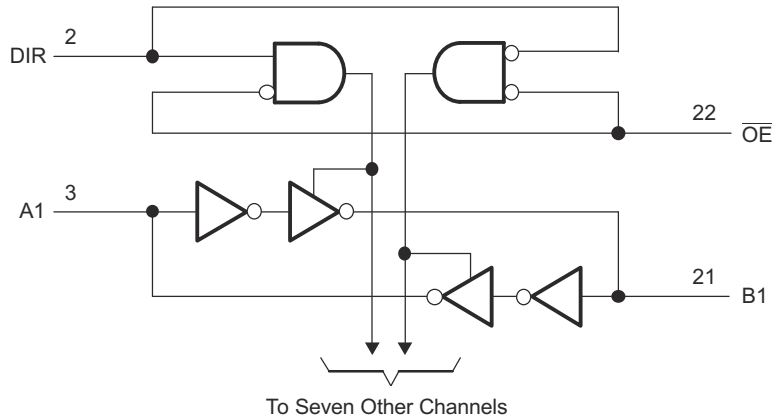

7.3 Feature Description

7.3.1 Fully Configurable Dual-Rail Design

Both V_{CCA} and V_{CCB} can be supplied at any voltage from 1.65V to 5.5V, making the device suitable for translating between any of the voltage nodes: 1.8V, 2.5V, 3.3V, and 5V.

7.3.2 Partial-Power-Down Mode Operation

I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down. This can occur in applications where subsections of a system are powered down (partial power down) to reduce power consumption. The maximum leakage into or out of any input or output pin on the device is specified by I_{off} in the [Electrical Characteristics](#).

7.3.3 Glitch-free Power Supply Sequencing

Either supply rail can be powered on or off in any order without producing a glitch on the I/Os (that is, where the output erroneously transitions to VCC when it must be held low or vice versa). Glitches of this nature can be misinterpreted by a peripheral as a valid data bit, which could trigger a false device reset of the peripheral, a false device configuration of the peripheral, or even a false data initialization by the peripheral.

7.3.4 Active Bus Hold Circuitry

Active bus-hold circuitry holds unused or undriven inputs at a valid logic state, which helps with board space savings and reduced component costs. Use of pullup or pulldown resistors with the bus-hold circuitry is not recommended as this eliminates the bus-hold feature.

7.3.5 Balanced High-Drive CMOS Push-Pull Outputs

A balanced output allows the device to sink and source similar currents. The high drive capability of this device creates fast edges into light loads so routing and load conditions should be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. Two outputs can be connected together for 2X stronger output drive strength. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

7.3.6 V_{CC} Isolation and V_{CC} Disconnect

The I/O's enter a high-impedance state when either supply is <100mV or left floating (disconnected), while the other supply is still connected to the device. It is recommended that the I/O's for this device are not driven or kept low before floating (disconnecting) either supply. The maximum leakage into or out of any input or output pin on the device is specified by I_{off} in the *Electrical Characteristics*.

7.4 Device Functional Modes

Table 7-1 lists the functional modes of the SN74LVCH8T245.

Table 7-1. Function Table (Each 8-Bit Section)

CONTROL INPUTS ⁽¹⁾		OUTPUT CIRCUITS		OPERATION
\overline{OE}	DIR	A PORT	B PORT	
L	L	Enabled	Hi-Z	B data to A bus
L	H	Hi-Z	Enabled	A data to B bus
H	X	Hi-Z	Hi-Z	Isolation

(1) Input circuits of the data I/Os are always active.

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The SN74LVCH8T245 device can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The maximum output current can be up to 32mA when device is powered by 5V.

8.2 Typical Application

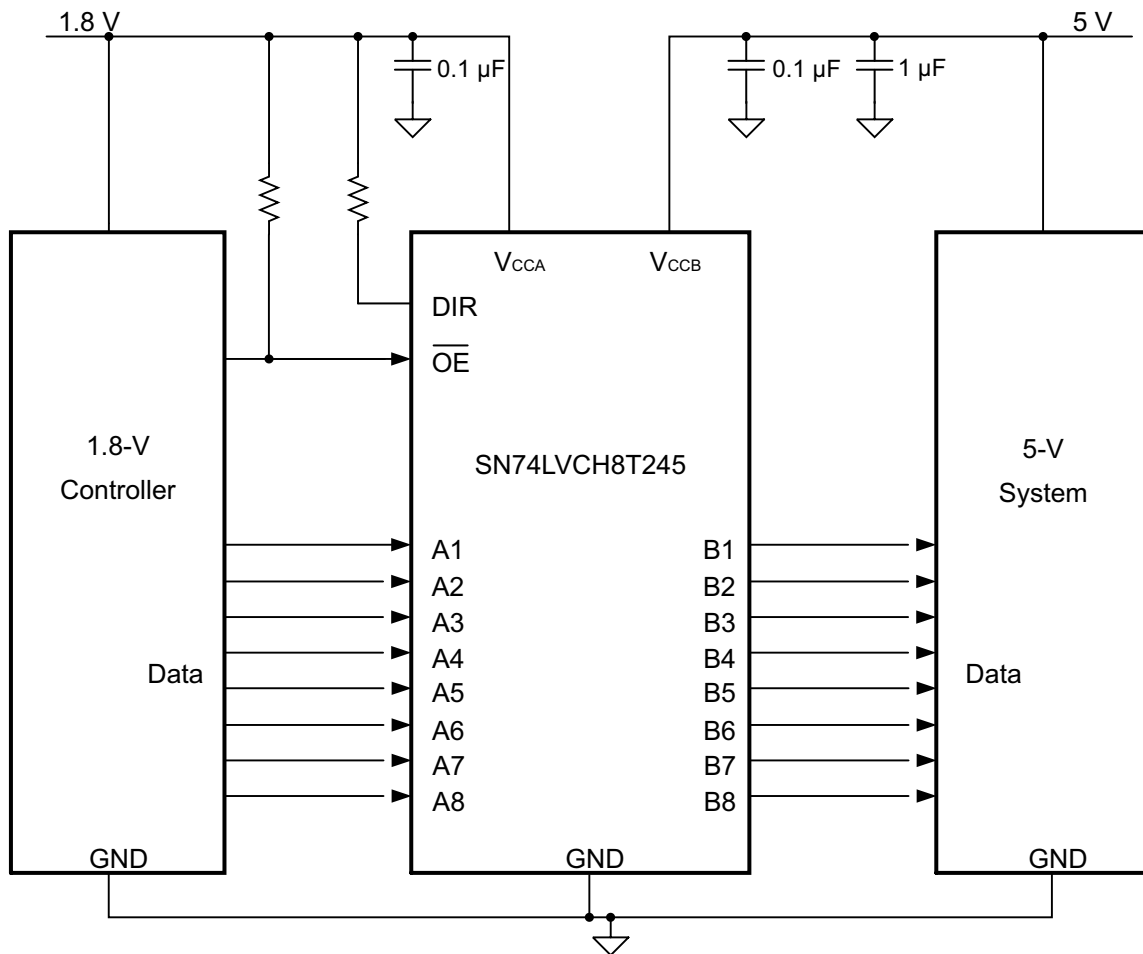


Figure 8-1. Typical Application Circuit

8.2.1 Design Requirements

For this design example, use the parameters listed in [Table 8-1](#).

Table 8-1. Design Parameters

PARAMETERS	VALUES
Input voltage	1.65V to 5.5V
Output voltage	1.65V to 5.5V

8.2.2 Detailed Design Procedure

To begin the design process, determine the following:

- Input voltage range
 - Use the supply voltage of the device that is driving the SN74LVCH8T245 to determine the input voltage range. For a valid logic high, the value must exceed the V_{IH} of the input port. For a valid logic low, the value must be less than the V_{IL} of the input port.
- Output voltage range
 - Use the supply voltage of the device that the SN74LVCH8T245 is driving to determine the output voltage range.

8.2.2.1 Enable Times

Calculate the enable times for the SN74LVCH8T245 using [Equation 1](#), [Equation 2](#), [Equation 3](#), and [Equation 4](#):

$$t_{PZH} \text{ (DIR to A)} = t_{PLZ} \text{ (DIR to B)} + t_{PLH} \text{ (B to A)} \quad (1)$$

$$t_{PZL} \text{ (DIR to A)} = t_{PHZ} \text{ (DIR to B)} + t_{PHL} \text{ (B to A)} \quad (2)$$

$$t_{PZH} \text{ (DIR to B)} = t_{PLZ} \text{ (DIR to A)} + t_{PLH} \text{ (A to B)} \quad (3)$$

$$t_{PZL} \text{ (DIR to B)} = t_{PHZ} \text{ (DIR to A)} + t_{PHL} \text{ (A to B)} \quad (4)$$

In a bidirectional application, these enable times provide the maximum delay from the time the DIR bit is switched until an output is expected. For example, if the device initially is transmitting from A to B, then the DIR bit is switched; the B port of the device must be disabled before presenting it with an input. After the B port has been disabled, an input signal applied to it appears on the corresponding A port after the specified propagation delay.

8.2.3 Application Curve

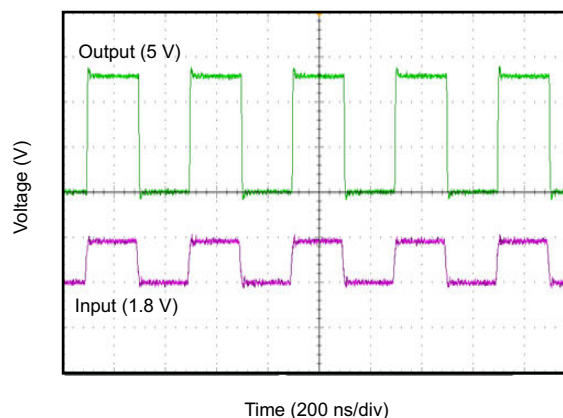


Figure 8-2. Translation Up (1.8V to 5V) at 2.5MHz

8.3 Power Supply Recommendations

Always apply a ground reference to the GND pins first. This device is designed for glitch free power sequencing without any ramp order requirements.

This device is designed with various power supply sequencing methods in mind to help prevent unintended triggering of downstream devices, as described in [Section 7.3.3](#).

8.4 Layout

8.4.1 Layout Guidelines

To ensure reliability of the device, TI recommends the following common printed-circuit board layout guidelines.

- Bypass capacitors should be used on power supplies.
- Short trace lengths should be used to avoid excessive loading.
- Placing pads on the signal paths for loading capacitors or pullup resistors helps adjust rise and fall times of signals depending on the system requirements.

8.4.2 Layout Example

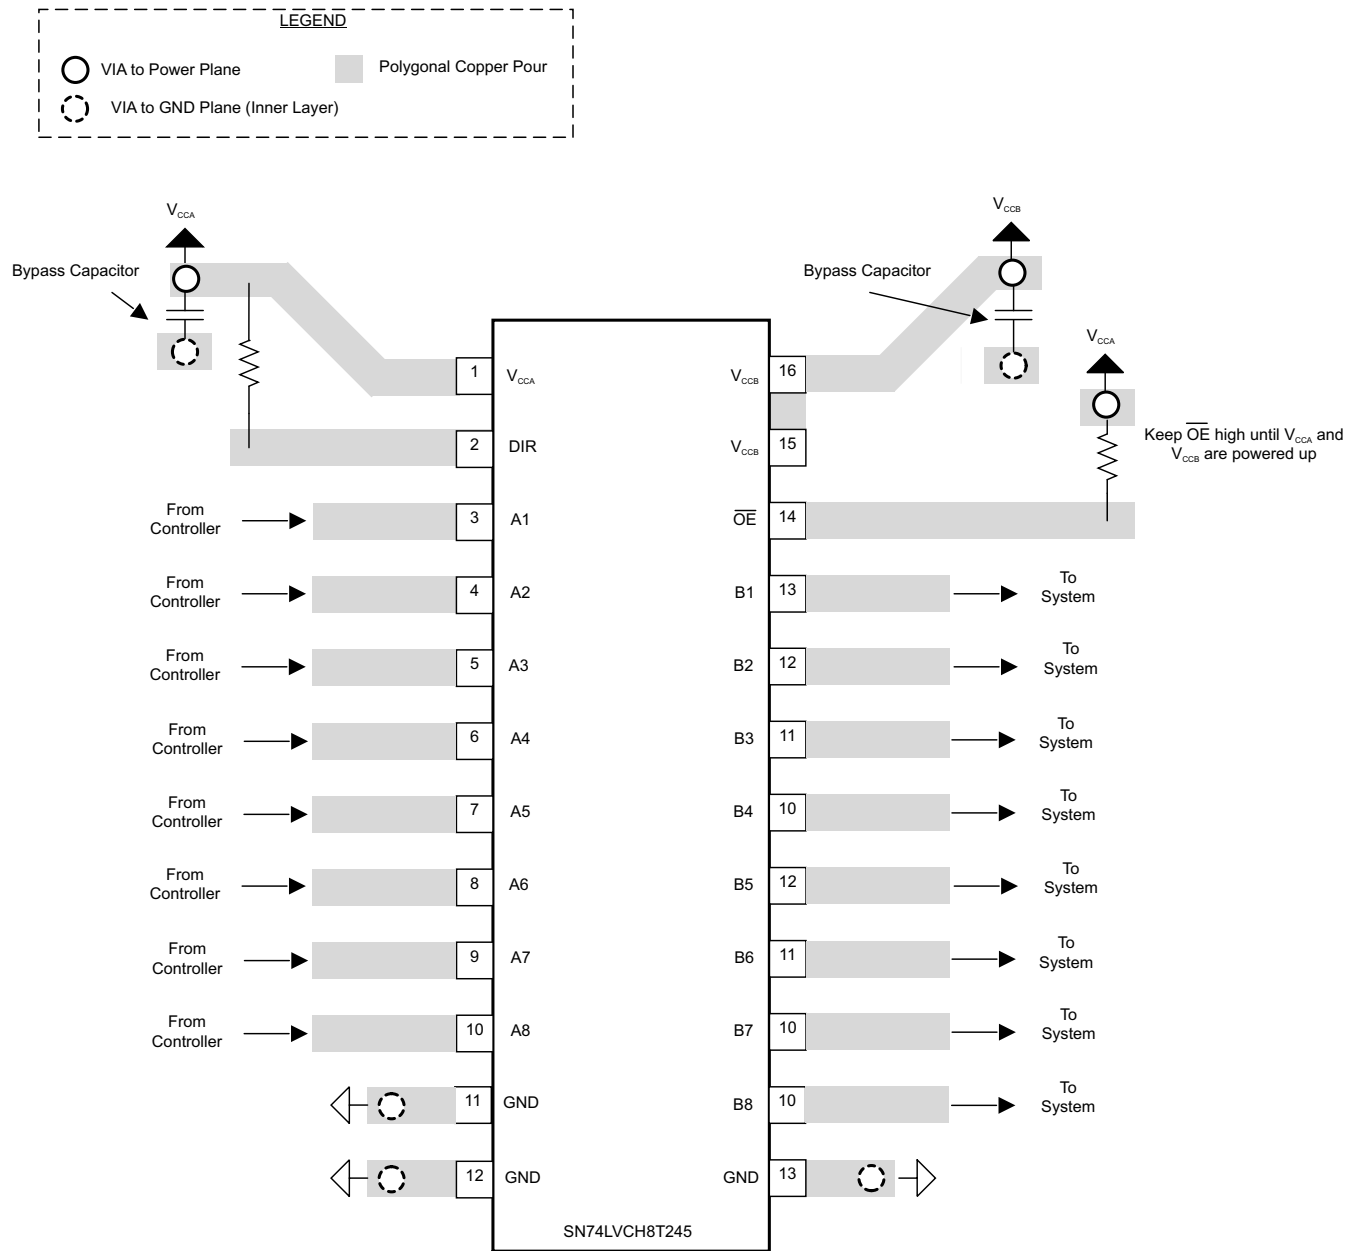


Figure 8-3. SN74LVCH8T245 Layout

9 Device and Documentation Support

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [Designing with SN74LVCXT245 and SN74LVCHXT245 Family of Direction Controlled Voltage Translators/Level-Shifters](#)
- Texas Instruments, [Bus-Hold Circuit](#)
- Texas Instruments, [AVC Logic Family Technology and Applications](#)
- Texas Instruments, [CMOS Power Consumption and Cpd Calculation](#)

9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision C (December 2022) to Revision D (May 2026)	Page
• Added additional features.....	1
• Updated the <i>Electrical Characteristics</i> section.....	6
• Added Section 7.3.3	13
• Updated the <i>Power Supply Recommendations</i> section.....	17

Changes from Revision B (January 2016) to Revision C (December 2022)	Page
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Updated thermals for PW package.....	5
• Removed the <i>Supports High-Speed Translation</i> and added the <i>Balanced High-Drive CMOS Push-Pull Outputs</i> section.....	13

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
74LVCH8T245DGVRG4	Active	Production	TVSOP (DGV) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
74LVCH8T245DGVRG4.B	Active	Production	TVSOP (DGV) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
74LVCH8T245RHRLRG4	Active	Production	VQFN (RHL) 24	1000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	NJ245
74LVCH8T245RHRLRG4.B	Active	Production	VQFN (RHL) 24	1000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	NJ245
SN74LVCH8T245DBR	Active	Production	SSOP (DB) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245DBR.B	Active	Production	SSOP (DB) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245DBRG4	Active	Production	SSOP (DB) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245DBRG4.B	Active	Production	SSOP (DB) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245DGVR	Active	Production	TVSOP (DGV) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245DGVR.B	Active	Production	TVSOP (DGV) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PW	Active	Production	TSSOP (PW) 24	60 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PW.B	Active	Production	TSSOP (PW) 24	60 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PWE4	Active	Production	TSSOP (PW) 24	60 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PWR	Active	Production	TSSOP (PW) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PWR.A	Active	Production	TSSOP (PW) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PWRG4	Active	Production	TSSOP (PW) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245PWRG4.A	Active	Production	TSSOP (PW) 24	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	NJ245
SN74LVCH8T245RHRL	Active	Production	VQFN (RHL) 24	1000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	NJ245
SN74LVCH8T245RHRL.B	Active	Production	VQFN (RHL) 24	1000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	NJ245

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
74LVCH8T245DGVRG4	TVSOP	DGV	24	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
74LVCH8T245RHRLRG4	VQFN	RHL	24	1000	180.0	12.4	3.8	5.8	1.2	8.0	12.0	Q1
SN74LVCH8T245DBR	SSOP	DB	24	2000	330.0	16.4	8.2	8.8	2.5	12.0	16.0	Q1
SN74LVCH8T245DBRG4	SSOP	DB	24	2000	330.0	16.4	8.2	8.8	2.5	12.0	16.0	Q1
SN74LVCH8T245DGVR	TVSOP	DGV	24	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVCH8T245PWR	TSSOP	PW	24	2000	330.0	16.4	6.95	8.3	1.6	8.0	16.0	Q1
SN74LVCH8T245PWRG4	TSSOP	PW	24	2000	330.0	16.4	6.95	8.3	1.6	8.0	16.0	Q1
SN74LVCH8T245RHRLR	VQFN	RHL	24	1000	180.0	12.4	3.8	5.8	1.2	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
74LVCH8T245DGVRG4	TVSOP	DGV	24	2000	353.0	353.0	32.0
74LVCH8T245RHLRG4	VQFN	RHL	24	1000	213.0	191.0	35.0
SN74LVCH8T245DBR	SSOP	DB	24	2000	353.0	353.0	32.0
SN74LVCH8T245DBRG4	SSOP	DB	24	2000	353.0	353.0	32.0
SN74LVCH8T245DGVR	TVSOP	DGV	24	2000	353.0	353.0	32.0
SN74LVCH8T245PWR	TSSOP	PW	24	2000	353.0	353.0	32.0
SN74LVCH8T245PWRG4	TSSOP	PW	24	2000	353.0	353.0	32.0
SN74LVCH8T245RHLR	VQFN	RHL	24	1000	213.0	191.0	35.0

TUBE


*All dimensions are nominal


Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
SN74LVCH8T245PW	PW	TSSOP	24	60	530	10.2	3600	3.5
SN74LVCH8T245PW.B	PW	TSSOP	24	60	530	10.2	3600	3.5
SN74LVCH8T245PWE4	PW	TSSOP	24	60	530	10.2	3600	3.5

PW0024A



PACKAGE OUTLINE
TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

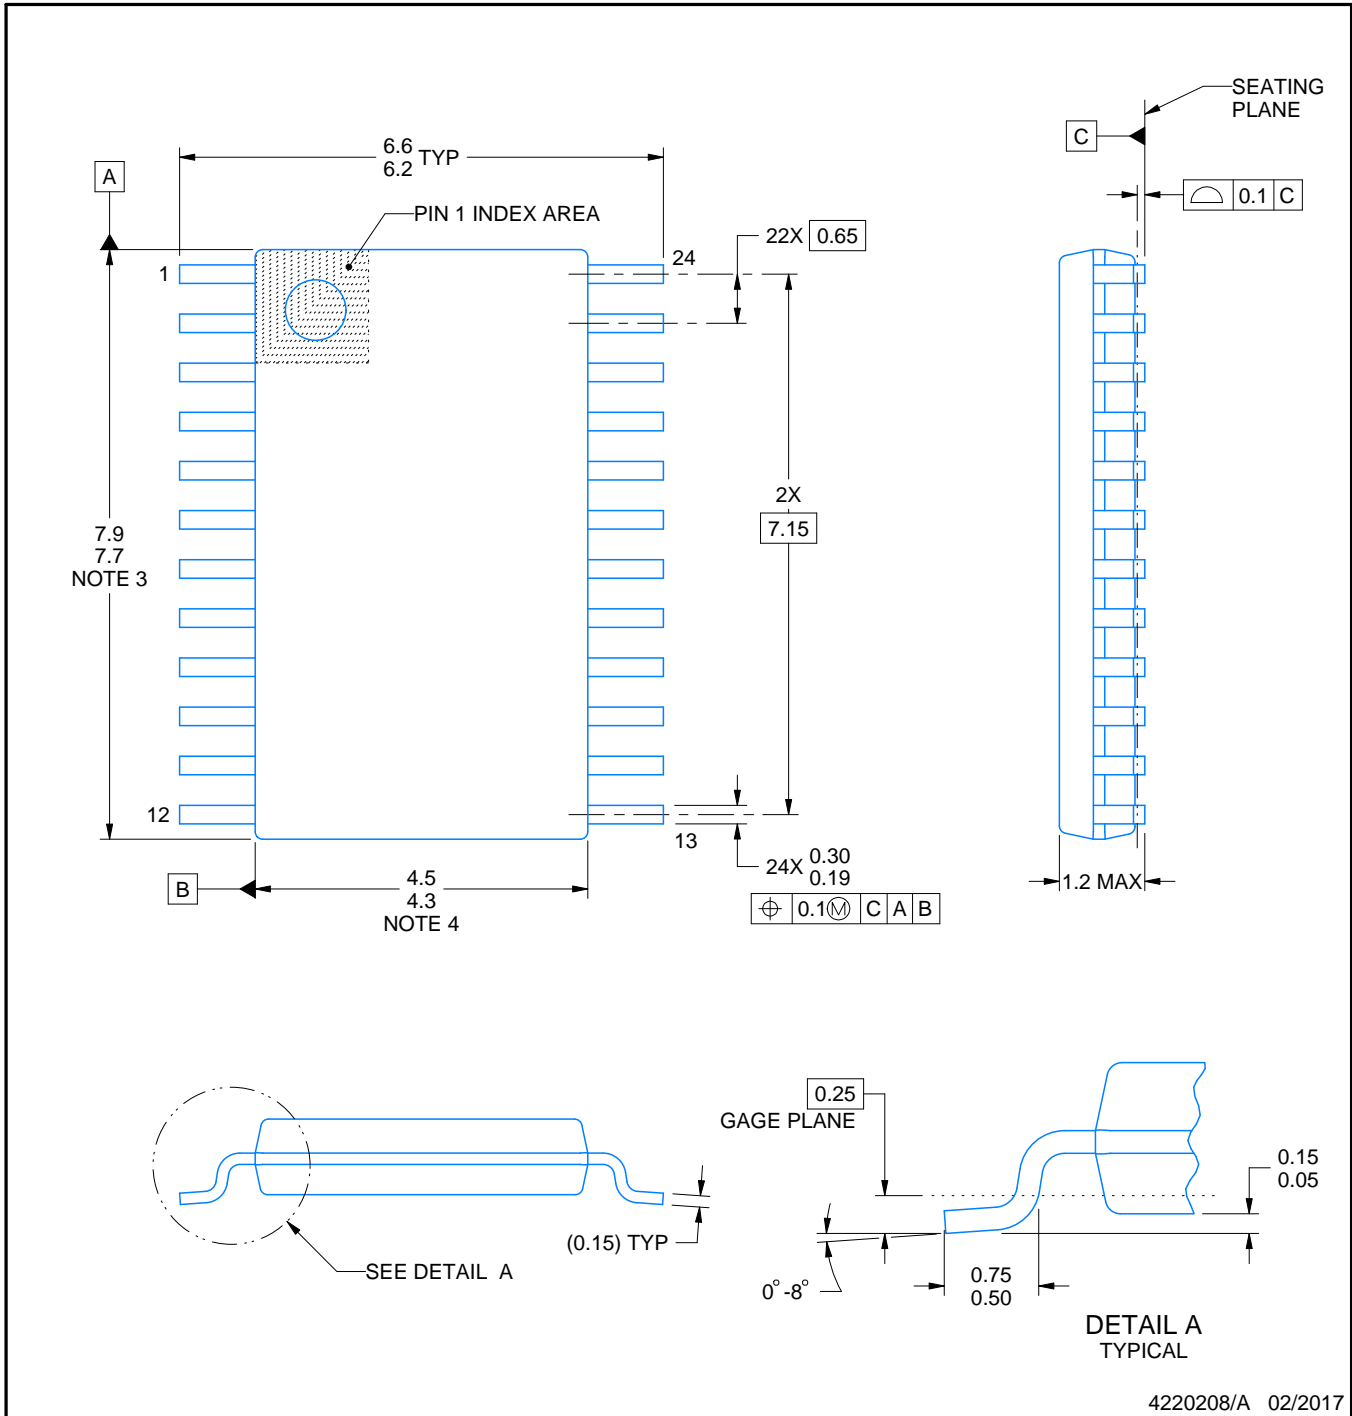

4220208/A 02/2017

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT


PW0024A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

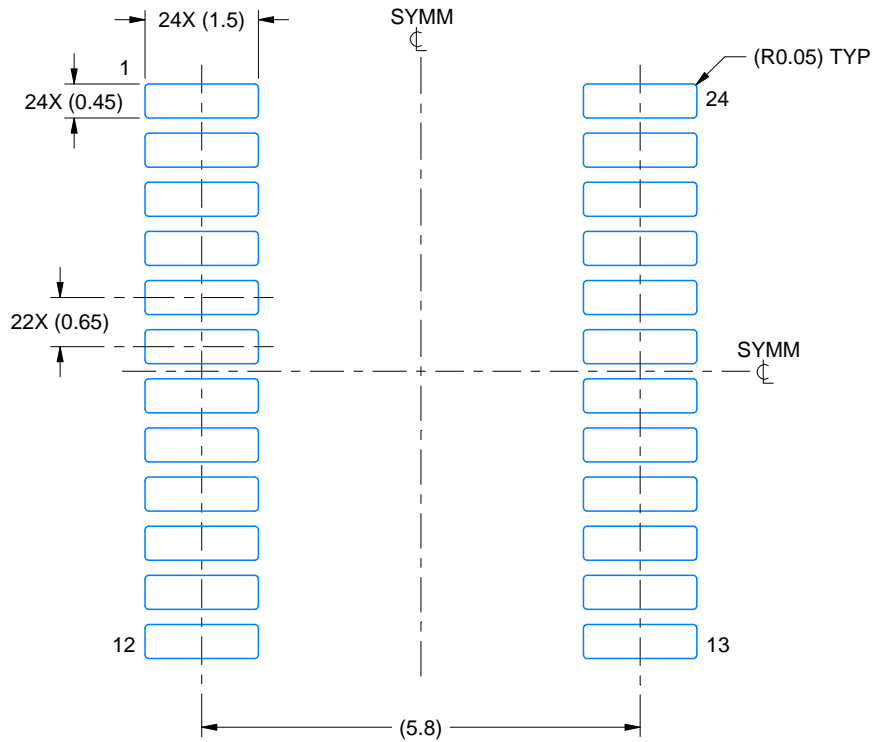

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

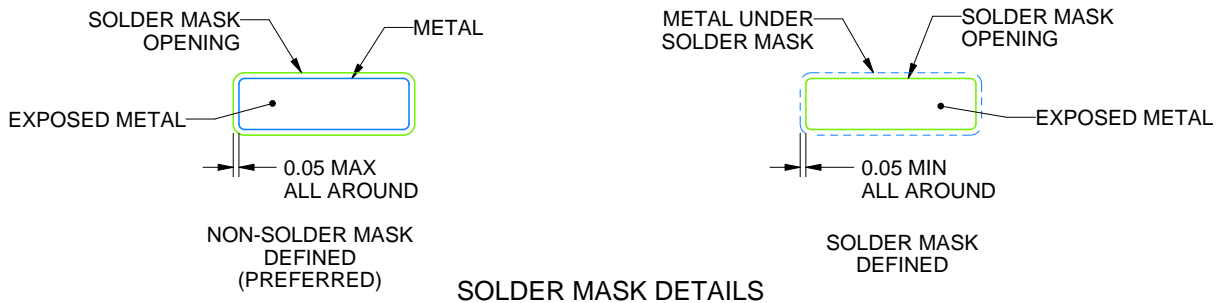

SOLDER MASK DETAILS

4220208/A 02/2017

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0024A



TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

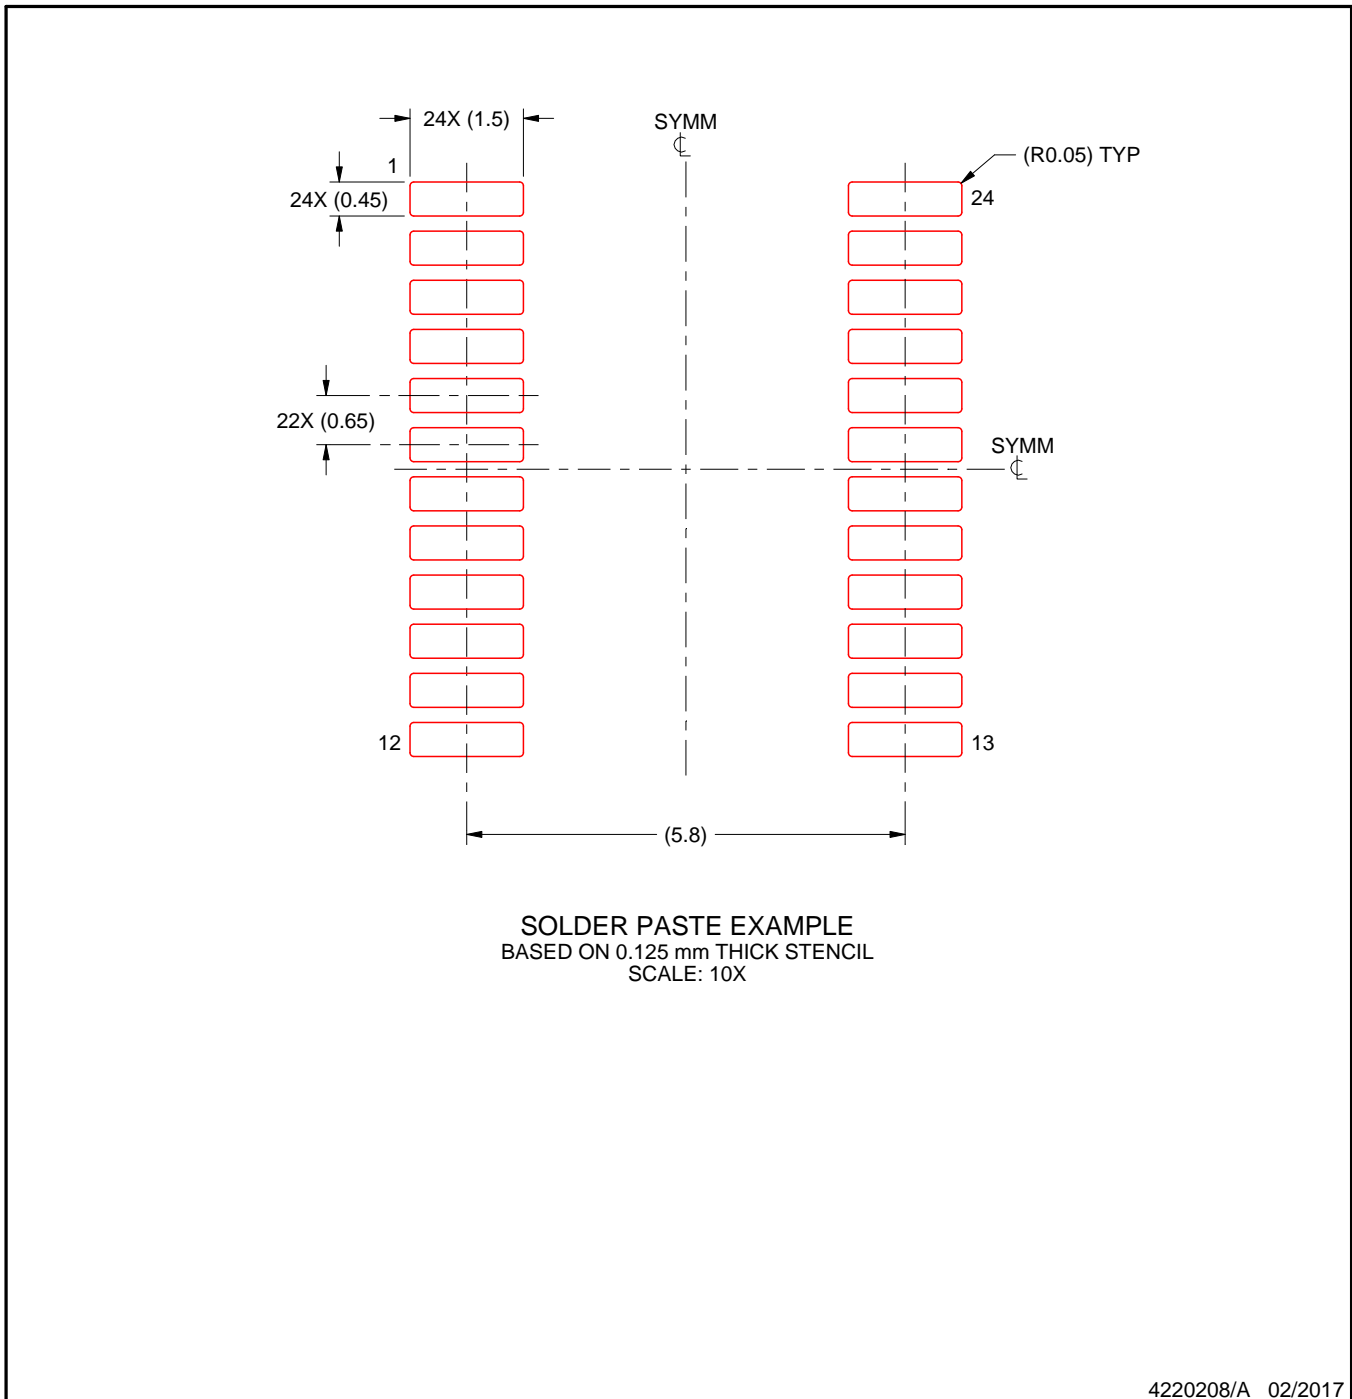

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

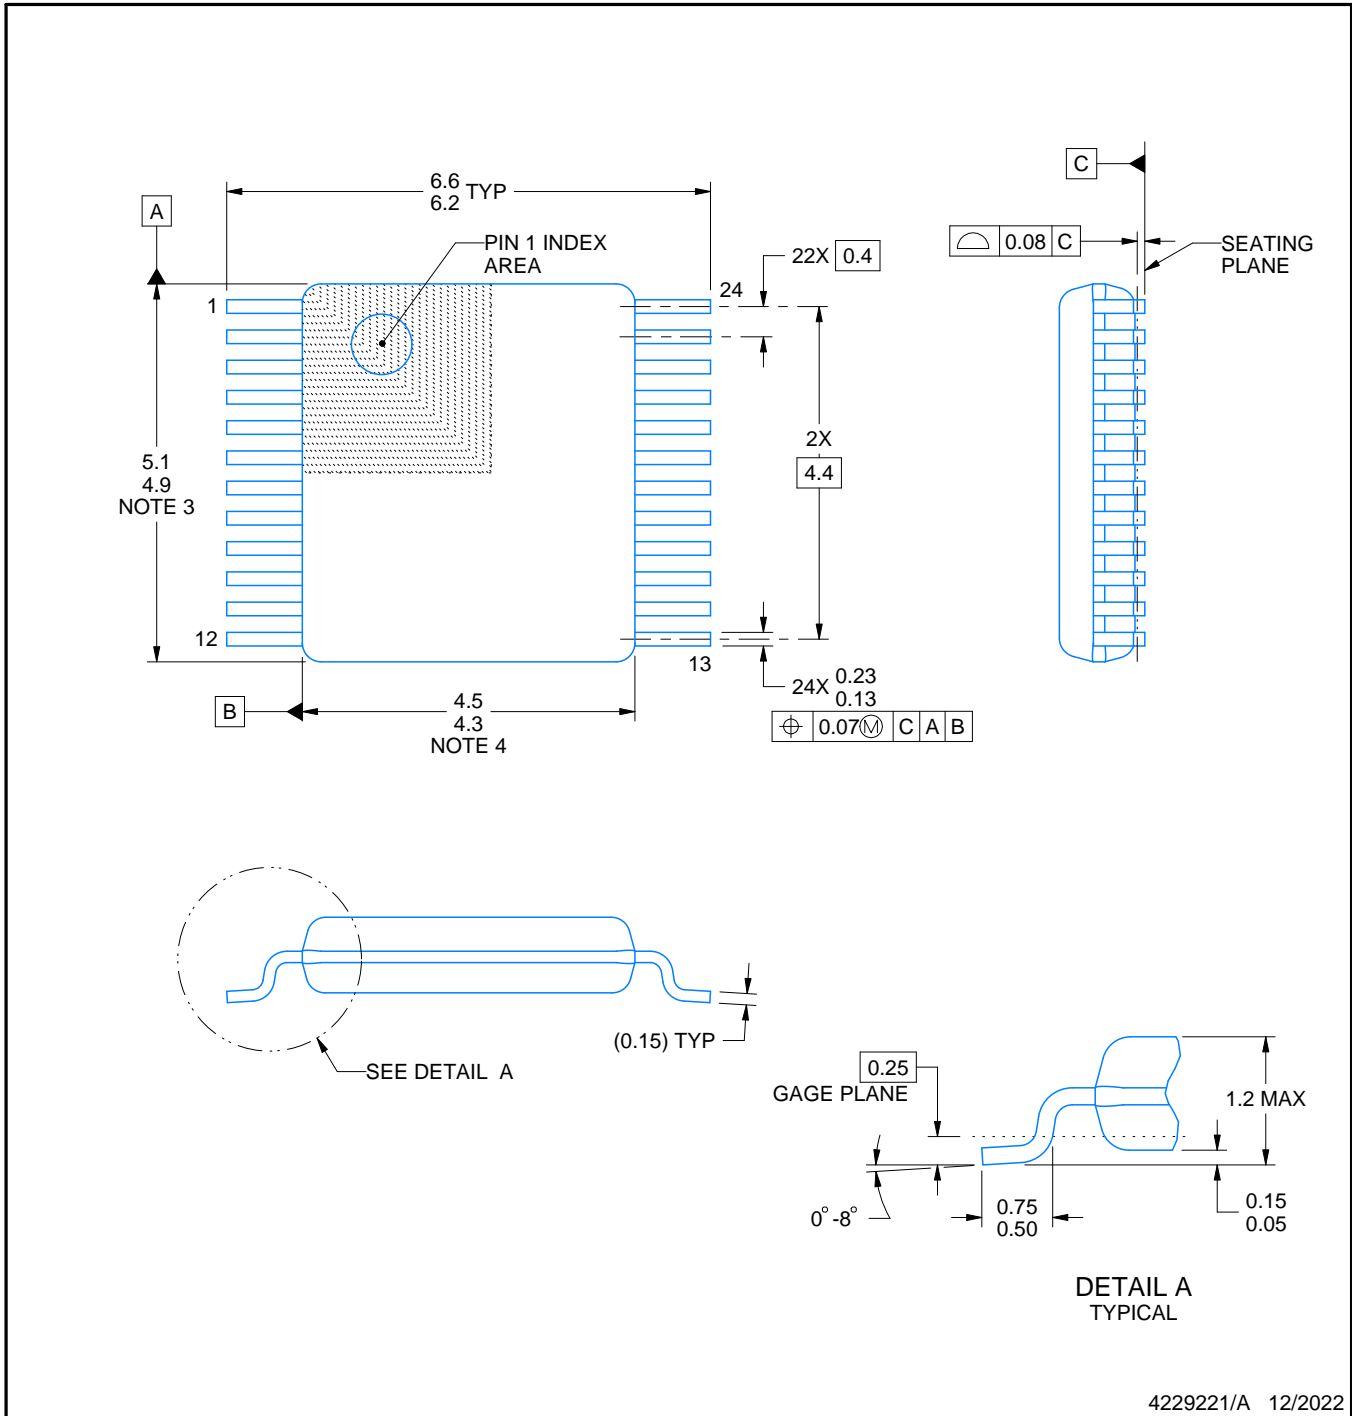

4229221/A 12/2022

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT


DGV0024A

TVSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

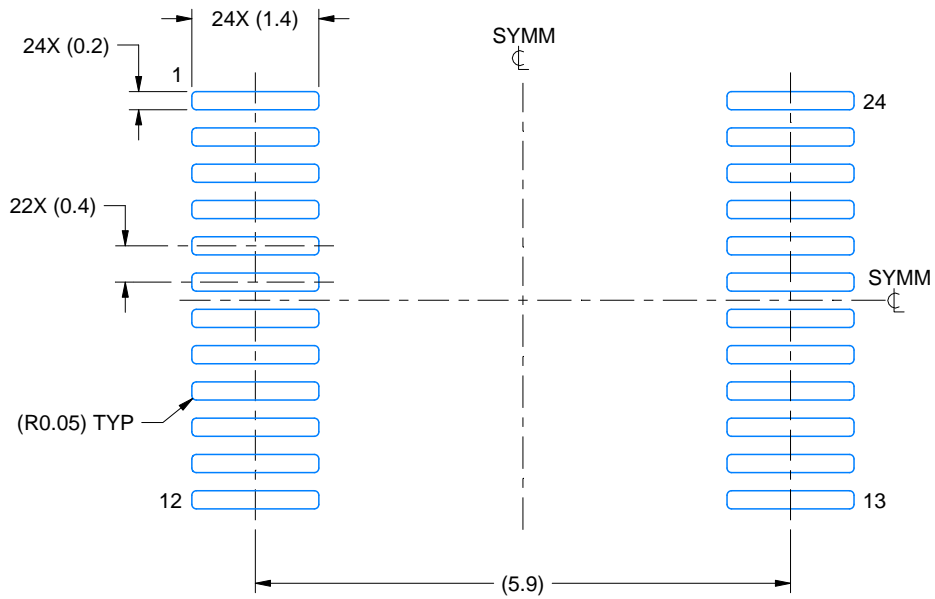

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 12X

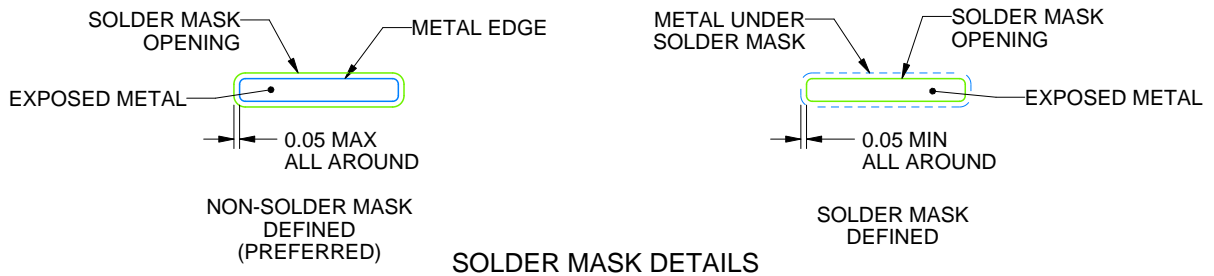

SOLDER MASK DETAILS

4229221/A 12/2022

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DGV0024A

TVSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

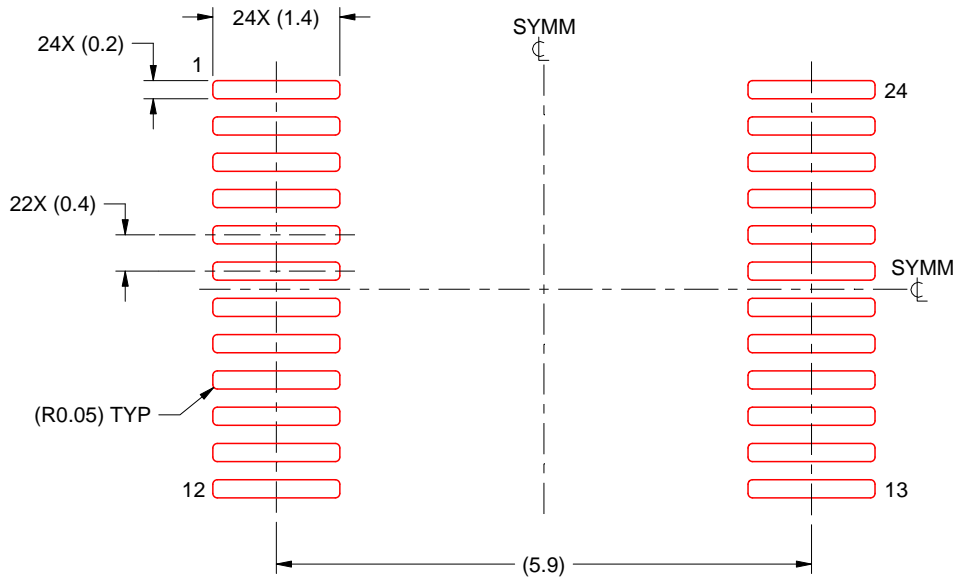

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 12X

4229221/A 12/2022

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.


DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-150

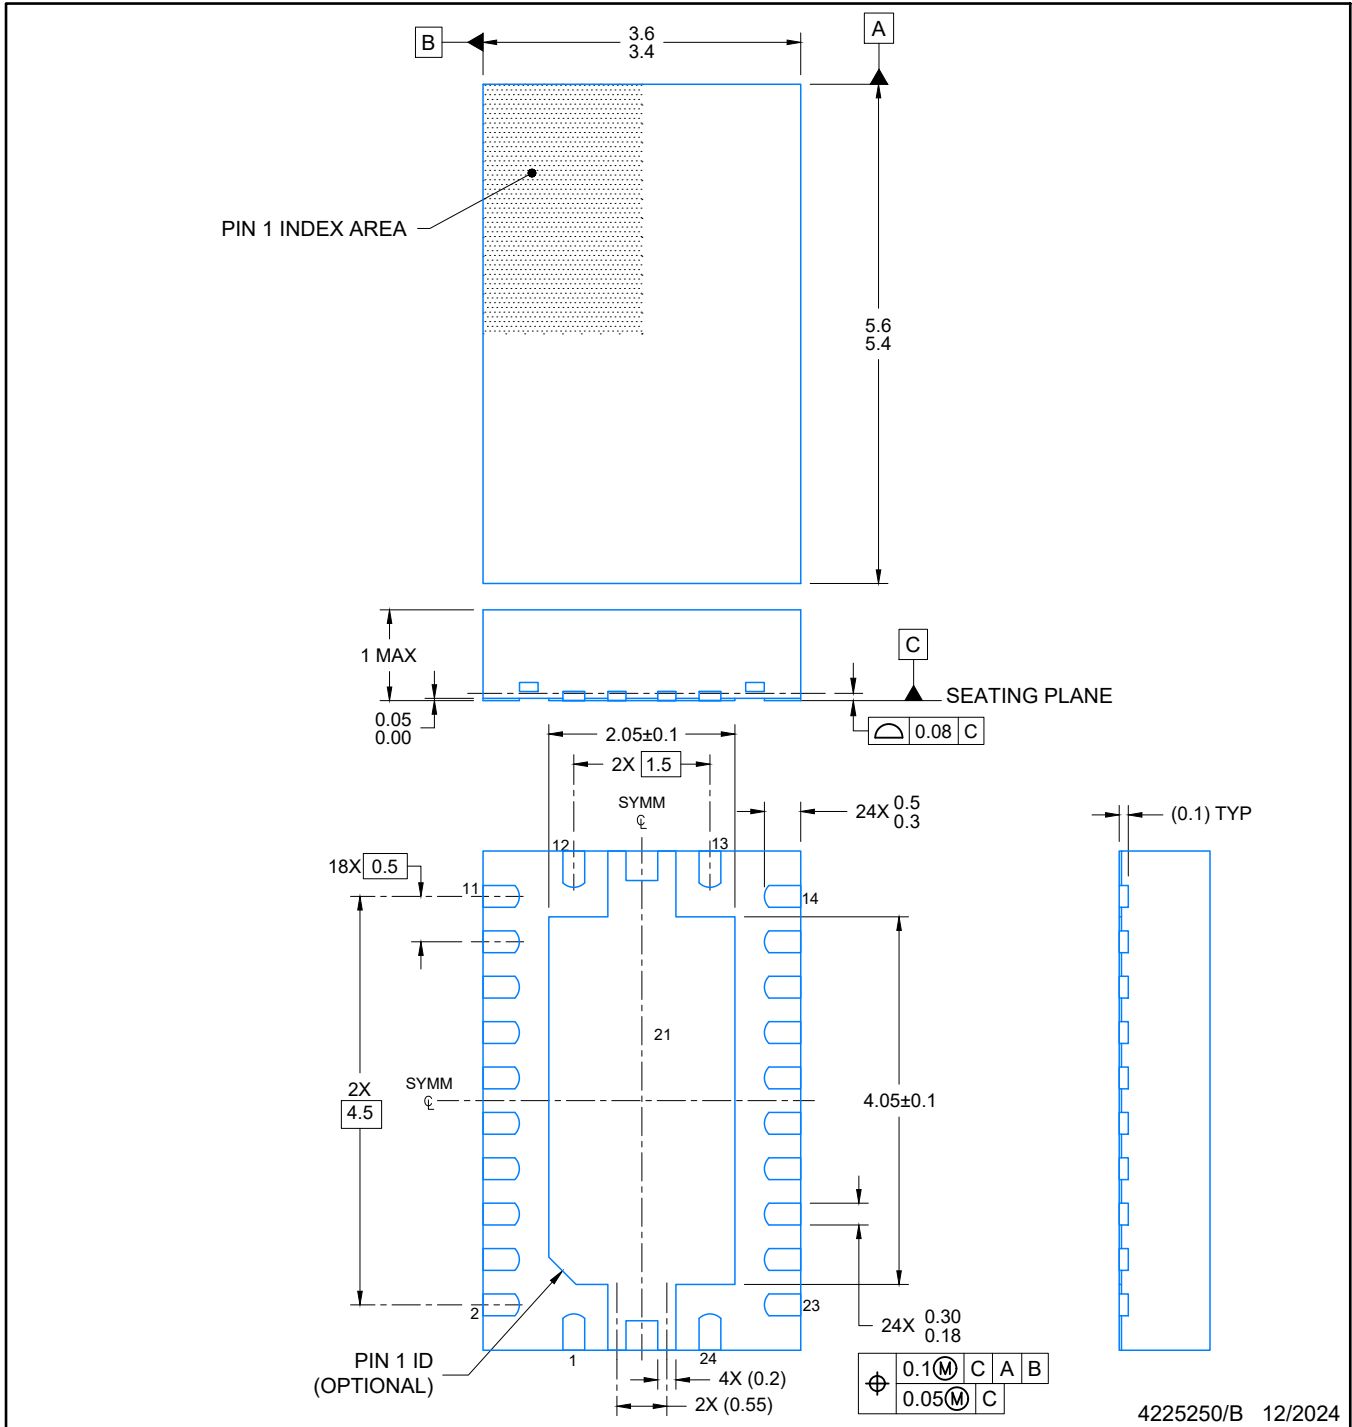

4225250/B 12/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025