

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

- Suitable for IEEE Standard 896 Applications<sup>†</sup>
- SN75ALS056 is an Octal Transceiver
- SN75ALS057 is a Quad Transceiver
- High-Speed Advanced Low-Power Schottky (ALS) Circuitry
- Low Power Dissipation:  
52.5 mW/Channel Max
- High-Impedance pnp Inputs
- Logic-Level 1-V Bus Swing Reduces Power Consumption
- Trapezoidal Bus Output Waveform Reduces Noise Coupling to Adjacent Lines
- Power-Up/Power-Down Protection (Glitch Free)
- Open-Collector Driver Outputs Allow Wired-OR Connections
- Designed to Be a Faster, Lower-Power Functional Equivalent of National DS3896, DS3897


## description

The SN75ALS056 is an eight-channel, monolithic, high-speed, advanced low-power Schottky (ALS) device designed for two-way data communication in a densely populated backplane. The SN75ALS057 is a four-channel version with independent driver-input (Dn) and receiver-output (Rn) pins and a separate driver disable for each driver (En).


These transceivers feature open-collector driver outputs with series Schottky diodes to reduce capacitive loading to the bus. By using a 2-V pullup termination on the bus, the output signal swing is approximately 1 V, which reduces the power necessary to drive the bus load capacitance. The driver outputs generate trapezoidal waveforms that reduce crosstalk between channels. The drivers are capable of driving an equivalent dc load as low as 18.5  $\Omega$ . The receivers have internal low-pass filters to further improve noise immunity.

The SN75ALS056 and SN75ALS057 are characterized for operation from 0°C to 70°C.

SN75ALS056 . . . DW OR N PACKAGE  
(TOP VIEW)

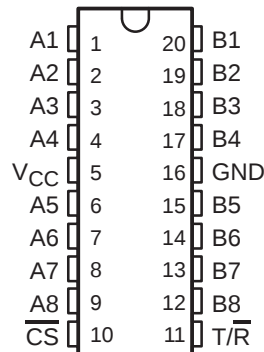

SN75ALS057 . . . DW OR N PACKAGE  
(TOP VIEW)

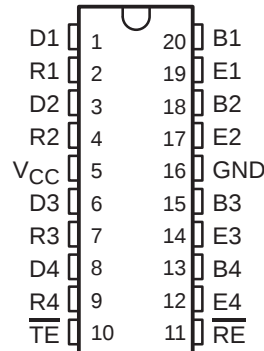

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

<sup>†</sup> The transceivers are suitable for IEEE Standard 896 applications to the extent of the operating conditions and characteristics specified in this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998, Texas Instruments Incorporated

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

logic symbol<sup>†</sup>

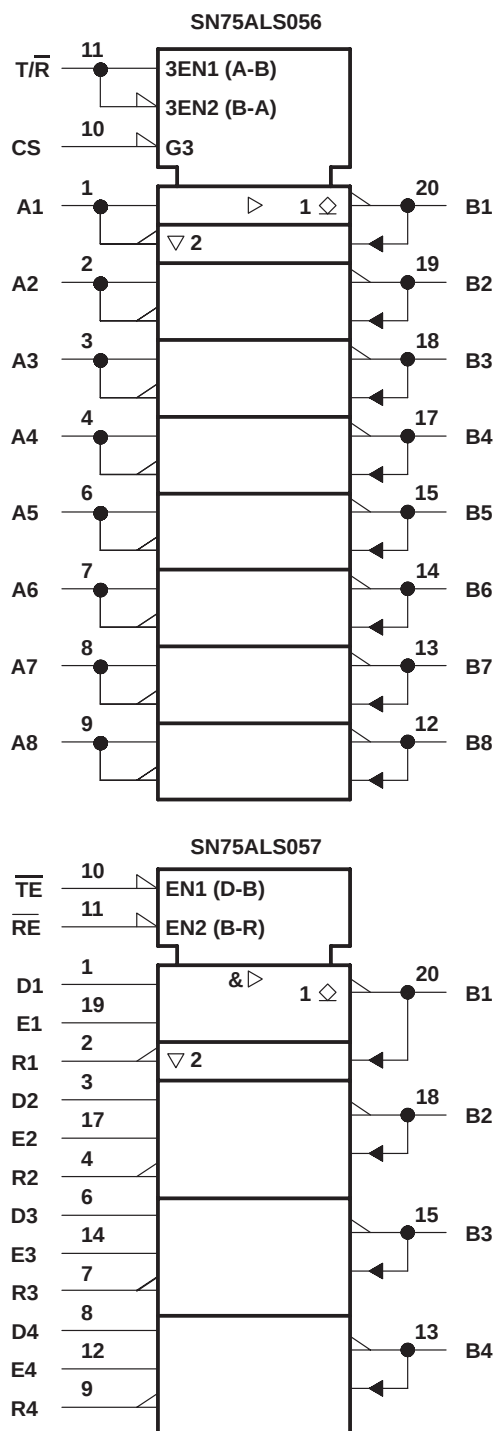


<sup>†</sup> These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

logic diagram (positive logic)

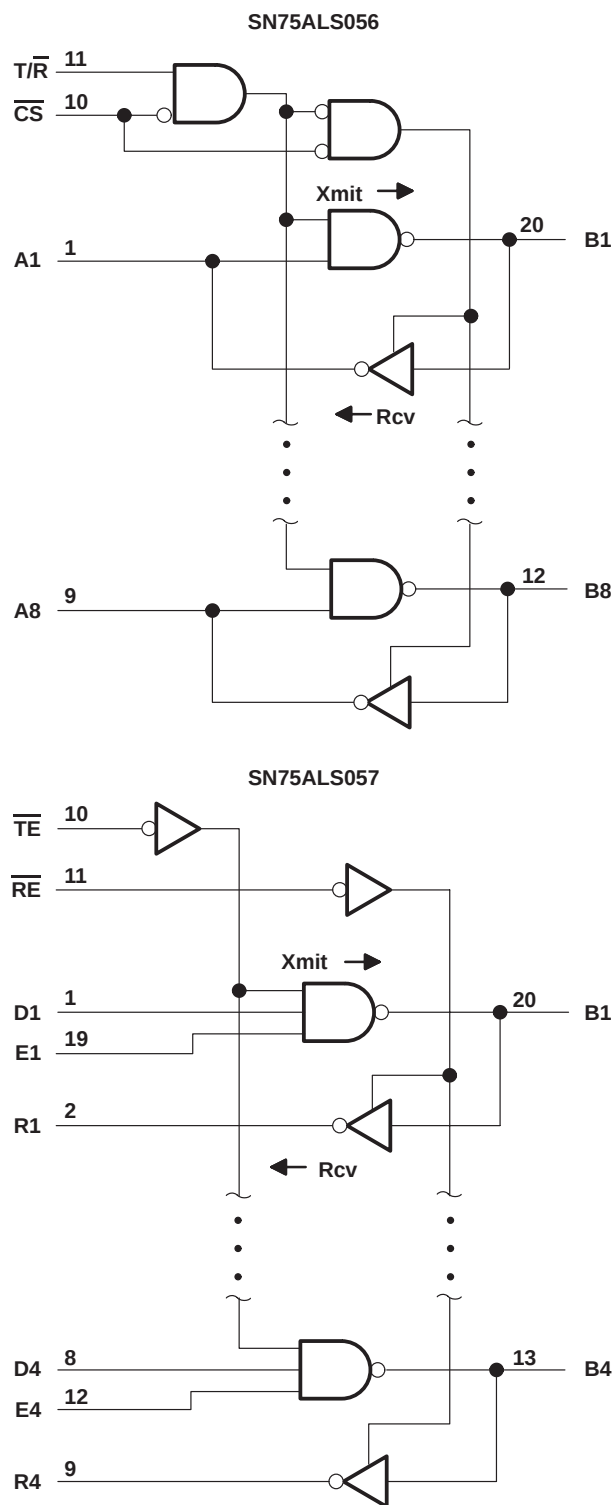

† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

## Function Tables

SN75ALS056  
TRANSMIT/RECEIVE

| CONTROLS               |                                | CHANNELS                            |
|------------------------|--------------------------------|-------------------------------------|
| $\overline{\text{CS}}$ | $\text{T}/\overline{\text{R}}$ | $\text{A} \leftrightarrow \text{B}$ |
| L                      | H                              | T(A B)                              |
| L                      | L                              | R(B A)                              |
| H                      | X                              | D                                   |

SN75ALS057  
TRANSMIT/RECEIVE

| CONTROLS               |                        |             | CHANNELS |   |   |   |
|------------------------|------------------------|-------------|----------|---|---|---|
| $\overline{\text{TE}}$ | $\overline{\text{RE}}$ | $\text{En}$ | D        | B | B | R |
| L                      | L                      | L           | D        |   |   | R |
| L                      | L                      | H           | T        |   |   | R |
| L                      | H                      | L           | D        |   |   | D |
| L                      | H                      | H           | T        |   |   | D |
| H                      | L                      | X           | D        |   |   | R |
| H                      | H                      | X           | D        |   |   | D |


H = high level, L = low level, R = receive, T = transmit,  
D = disable, X = irrelevant

Direction of data transmission is from  $\text{A}_n$  to  $\text{B}_n$  for the SN75ALS056 and from  $\text{D}_n$  to  $\text{B}_n$  for the SN75ALS057. Direction of data reception is from  $\text{B}_n$  to  $\text{A}_n$  for the SN75ALS056 and from  $\text{B}_n$  to  $\text{R}_n$  for the SN75ALS057. Data transfer is inverting in both directions.

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

## schematics of inputs and outputs

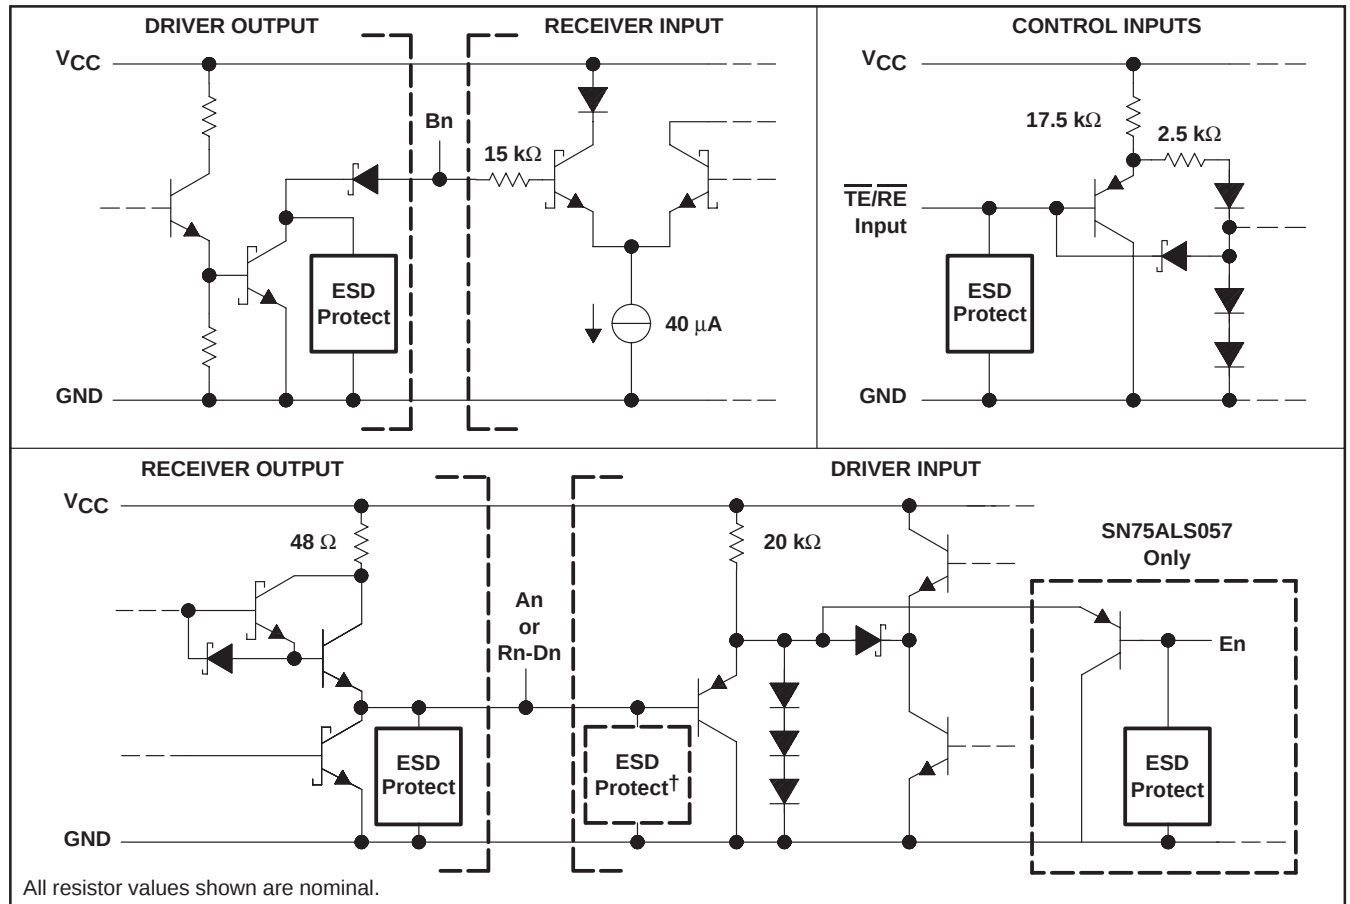

† Additional ESD protection is on the SN75ALS057, which has separate receiver-output and driver-input pins.

## absolute maximum ratings over operating free-air temperature (unless otherwise noted)<sup>‡</sup>

|                                                                               |                              |
|-------------------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{CC}$ (see Note 1)                                         | 6 V                          |
| Control input voltage, $V_I$                                                  | 5.5 V                        |
| Driver input voltage, $V_I$                                                   | 5.5 V                        |
| Driver output voltage, $V_O$                                                  | 2.5 V                        |
| Receiver input voltage, $V_I$                                                 | 2.5 V                        |
| Receiver output voltage, $V_O$                                                | 5.5 V                        |
| Continuous total power dissipation                                            | See Dissipation Rating Table |
| Storage temperature range, $T_{stg}$                                          | –65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: DW or N package | 260 °C                       |

<sup>‡</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Voltage values are with respect to network ground terminal.

# SN75ALS056, SN75ALS057

## TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|-------------------------------------------|
| DW      | 1025 mW                                     | 8.2 mW/ $^\circ\text{C}$                          | 656 mW                                   | —                                         |
| N       | 1150 mW                                     | 9.2 mW/ $^\circ\text{C}$                          | 736 mW                                   | —                                         |

### recommended operating conditions

|                                                       | MIN  | NOM | MAX  | UNIT             |
|-------------------------------------------------------|------|-----|------|------------------|
| Supply voltage, $V_{CC}$                              | 4.75 | 5   | 5.25 | V                |
| High-level driver and control input voltage, $V_{IH}$ | 2    |     |      | V                |
| Low-level driver and control input voltage, $V_{IL}$  |      |     | 0.8  | V                |
| Bus termination voltage                               | 1.9  |     | 2.1  | V                |
| Operating free-air temperature, $T_A$                 | 0    |     | 70   | $^\circ\text{C}$ |

### electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

| PARAMETER  |                                                                      | TEST CONDITIONS†                                                                                                                   | SN75ALS056 |      |      | UNIT          |
|------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------|------|------|---------------|
|            |                                                                      |                                                                                                                                    | MIN        | TYP† | MAX  |               |
| $V_{IK}$   | Input clamp voltage at An, $\overline{T/R}$ , or $\overline{CS}$     | $I_I = -18\text{ mA}$                                                                                                              |            |      | -1.5 | V             |
| $V_{IT}$   | Receiver input threshold voltage at Bn                               |                                                                                                                                    | 1.405      |      | 1.69 | V             |
| $V_{OH}$   | High-level output voltage at An                                      | Bn at 1.2 V, $\overline{CS}$ at 0.8 V,<br>$\overline{T/R}$ at 0.8 V, $I_{OH} = -400\text{ }\mu\text{A}$                            | 2.4        |      |      | V             |
| $V_{OL}$   | Low-level output voltage                                             | An at 2 V, $\overline{CS}$ at 0.8 V,<br>$\overline{T/R}$ at 0.8 V, $I_{OL} = 16\text{ mA}$                                         |            |      | 0.5  | V             |
|            |                                                                      | Bn at 2 V, $\overline{CS}$ at 0.8 V,<br>$\overline{T/R}$ at 2 V, $V_L = 2\text{ V}$ ,<br>$R_L = 18.5\text{ }\Omega$ , See Figure 1 | 0.75       |      | 1.2  |               |
| $I_{IH}$   | High-level input current                                             | An, $\overline{T/R}$ or $\overline{CS}$                                                                                            |            |      | 40   | $\mu\text{A}$ |
|            |                                                                      | Bn                                                                                                                                 |            |      | 100  |               |
| $I_{IL}$   | Low level input current at An, $\overline{T/R}$ , or $\overline{CS}$ | $V_I = 0.4\text{ V}$                                                                                                               |            |      | -400 | $\mu\text{A}$ |
| $I_{OS}$   | Short-circuit output current at An                                   | An at 0, Bn at 1.2 V,<br>$\overline{CS}$ at 0.8 V, $\overline{T/R}$ at 0.8 V                                                       | -40        |      | -120 | mA            |
| $I_{CC}$   | Supply current                                                       |                                                                                                                                    |            |      | 75   | mA            |
| $C_{O(B)}$ | Driver output capacitance                                            |                                                                                                                                    |            | 4.5  |      | pF            |

† Typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# SN75ALS056, SN75ALS057

## TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

**electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)**

| PARAMETER         |                                                                                       | TEST CONDITIONS                                                                                                                  | SN75ALS057 |                  |      | UNIT    |
|-------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|------------|------------------|------|---------|
|                   |                                                                                       |                                                                                                                                  | MIN        | TYP <sup>†</sup> | MAX  |         |
| V <sub>IK</sub>   | Input clamp voltage at Dn, En, $\overline{\text{TE}}$ , or $\overline{\text{RE}}$     | I <sub>I</sub> = –18 mA                                                                                                          |            |                  | –1.5 | V       |
| V <sub>IT</sub>   | Receiver input threshold voltage at Bn                                                |                                                                                                                                  | 1.41       |                  | 1.69 | V       |
| V <sub>OH</sub>   | High-level output voltage at Rn                                                       | Bn at 1.2 V, $\overline{\text{RE}}$ at 0.8 V,<br>I <sub>OH</sub> = –400 $\mu$ A                                                  |            | 2.4              |      | V       |
| V <sub>OL</sub>   | Low-level output voltage                                                              | Rn<br>Bn at 2 V, $\overline{\text{RE}}$ at 0.8 V,<br>I <sub>OL</sub> = 16 mA                                                     |            |                  | 0.5  | V       |
|                   |                                                                                       | Dn at 2 V, En at 2 V,<br>$\overline{\text{TE}}$ at 0.8 V, V <sub>L</sub> = 2 V,<br>R <sub>L</sub> = 18.5 $\Omega$ , See Figure 1 |            | 0.75             | 1.2  |         |
| I <sub>IH</sub>   | High-level input current                                                              | $\overline{\text{Dn}}$ , En, $\overline{\text{TE}}$ , or $\overline{\text{RE}}$                                                  |            |                  | 40   | $\mu$ A |
|                   |                                                                                       | Bn                                                                                                                               |            |                  | 100  |         |
| I <sub>IL</sub>   | Low-level input current at Dn, En, $\overline{\text{TE}}$ , or $\overline{\text{RE}}$ | V <sub>I</sub> = 0.4 V                                                                                                           |            |                  | –400 | $\mu$ A |
| I <sub>OS</sub>   | Short-circuit output current at Rn                                                    | Rn at 0, Bn at 1.2 V,<br>$\overline{\text{RE}}$ at 0.8 V                                                                         | –40        |                  | –120 | mA      |
| I <sub>CC</sub>   | Supply current                                                                        |                                                                                                                                  |            |                  | 40   | mA      |
| C <sub>O(B)</sub> | Driver output capacitance                                                             |                                                                                                                                  |            | 4.5              |      | pF      |

<sup>†</sup> Typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

**switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)**

| PARAMETER         | FROM<br>(INPUT)          | TO<br>(OUTPUT) | TEST CONDITIONS                                                                                                                                                                                       | SN75ALS056<br>DRIVER |                  |     | UNIT |
|-------------------|--------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|-----|------|
|                   |                          |                |                                                                                                                                                                                                       | MIN                  | TYP <sup>†</sup> | MAX |      |
| t <sub>PLH1</sub> | $\overline{\text{CS}}$   | Bn             | An and T/ $\overline{\text{R}}$ at 2 V, V <sub>L</sub> = 2 V,<br>R <sub>L1</sub> = 18 $\Omega$ , C <sub>L</sub> = 30 pF,<br>R <sub>L2</sub> not connected, See Figure 2                               |                      |                  | 24  | ns   |
| t <sub>PHL1</sub> |                          |                |                                                                                                                                                                                                       |                      |                  | 20  |      |
| t <sub>PLH2</sub> | An                       | Bn             | $\overline{\text{CS}}$ at 0.8 V, T/ $\overline{\text{R}}$ at 2 V,<br>V <sub>L</sub> = 2 V, R <sub>L1</sub> = 18 $\Omega$ ,<br>R <sub>L2</sub> not connected, C <sub>L</sub> = 30 pF,<br>See Figure 2, |                      |                  | 19  | ns   |
| t <sub>PHL2</sub> |                          |                |                                                                                                                                                                                                       |                      |                  | 18  |      |
| t <sub>PLH3</sub> | T/ $\overline{\text{R}}$ | Bn             | V <sub>I</sub> (An) = 5 V, $\overline{\text{CS}}$ at 0.8 V,<br>R <sub>L1</sub> = 18 $\Omega$ , C <sub>L</sub> = 30 pF,<br>R <sub>L2</sub> not connected, V <sub>L</sub> = 2 V,<br>See Figure 3,       |                      |                  | 25  | ns   |
| t <sub>PHL3</sub> |                          |                |                                                                                                                                                                                                       |                      |                  | 35  |      |
| t <sub>TLH</sub>  | An                       | Bn             | $\overline{\text{CS}}$ at 0.8 V, T/ $\overline{\text{R}}$ at 2 V,<br>V <sub>L</sub> = 2 V, C <sub>L</sub> = 30 pF,<br>R <sub>L1</sub> = 18 $\Omega$ , R <sub>L2</sub> not connected,<br>See Figure 2  | 1                    | 3                | 11  | ns   |
| t <sub>THL</sub>  |                          |                |                                                                                                                                                                                                       | 1                    | 3                | 6   |      |

<sup>†</sup> Typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C



# SN75ALS056, SN75ALS057

## TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

| PARAMETER          |                                                     | FROM<br>(INPUT)  | TO<br>(OUTPUT) | TEST CONDITIONS                                                                                                                                            | SN75ALS056<br>RECEIVER |     | UNIT |
|--------------------|-----------------------------------------------------|------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----|------|
|                    |                                                     |                  |                |                                                                                                                                                            | MIN                    | MAX |      |
| t <sub>PLH4</sub>  | Propagation delay time,<br>low-to-high-level output | Bn               | An             | $\overline{CS}$ at 0.8 V, $T/\overline{R}$ at 0.8 V, $R_{L1} = 390\ \Omega$ ,<br>$R_{L2} = 1.6\ k\Omega$ , $C_L = 30\ pF$ , See Figure 4                   | 18                     |     | ns   |
| t <sub>PHL4</sub>  | Propagation delay time,<br>high-to-low-level output |                  |                |                                                                                                                                                            | 18                     |     |      |
| t <sub>PLZ1</sub>  | Output disable time from<br>low level               | $T/\overline{R}$ | An             | $\overline{CS}$ at 0.8 V, $V_I(Bn) = 2\ V$ , $V_L = 5\ V$ ,<br>$R_{L1} = 390\ \Omega$ , $R_{L2}$ not connected,<br>$C_L = 15\ pF$ , See Figure 3           | 20                     |     | ns   |
| t <sub>PZL1</sub>  | Output enable time to<br>low level                  | $T/\overline{R}$ | An             | $\overline{CS}$ at 0.8 V, $V_I(Bn) = 2\ V$ , $V_L = 5\ V$ ,<br>$R_{L1} = 390\ \Omega$ , $R_{L2} = 1.6\ k\Omega$ ,<br>$C_L = 30\ pF$ , See Figure 3         | 40                     |     | ns   |
| t <sub>PHZ1</sub>  | Output disable time from<br>high level              | $T/\overline{R}$ | An             | $\overline{CS}$ at 0.8 V, $V_I(Bn) = 0$ , $V_L = 0$ ,<br>$R_{L1} = 390\ \Omega$ , $R_{L2}$ not connected,<br>$C_L = 15\ pF$ , See Figure 3                 | 17                     |     | ns   |
| t <sub>PZH1</sub>  | Output enable time to<br>high level                 | $T/\overline{R}$ | An             | $\overline{CS}$ at 0.8 V, $V_I(Bn) = 0$ , $V_L = 0$ ,<br>$R_{L1}$ not connected, $R_{L2} = 1.6\ k\Omega$ ,<br>$C_L = 30\ pF$ , See Figure 3                | 15                     |     | ns   |
| t <sub>PLZ2</sub>  | Output disable time from<br>low level               | $\overline{CS}$  | An             | Bn at 2 V, $T/\overline{R}$ at 0.8 V, $C_L = 5\ pF$ ,<br>$V_L = 5\ V$ , $R_{L1} = 390\ \Omega$ ,<br>$R_{L2}$ not connected, See Figure 5                   | 18                     |     | ns   |
| t <sub>PZL2</sub>  | Output enable time to<br>low level                  | $\overline{CS}$  | An             | Bn at 2 V, $T/\overline{R}$ at 0.8 V, $C_L = 30\ pF$ ,<br>$V_L = 5\ V$ , $R_{L1} = 390\ \Omega$ , $R_{L2} = 1.6\ k\Omega$ ,<br>See Figure 5                | 15                     |     | ns   |
| t <sub>PHZ2</sub>  | Output disable time from<br>high level              | $\overline{CS}$  | An             | Bn at 0.8 V, $T/\overline{R}$ at 0.8 V, $C_L = 5\ pF$ ,<br>$V_L = 0$ , $R_{L1} = 390\ \Omega$ ,<br>$R_{L2}$ not connected, See Figure 5                    | 8                      |     | ns   |
| t <sub>PZH2</sub>  | Output enable time to<br>high level                 | $\overline{CS}$  | An             | Bn at 0.8 V, $T/\overline{R}$ at 0.8 V, $C_L = 30\ pF$ ,<br>$V_L = 0$ , $R_{L1}$ not connected,<br>$R_{L2} = 1.6\ k\Omega$ , See Figure 5                  | 17                     |     | ns   |
| t <sub>w(NR)</sub> | Receiver noise rejection<br>pulse duration          | Bn               | An             | $\overline{CS}$ at 0.8 V, $T/\overline{R}$ at 0.8 V, $R_{L1} = 390\ \Omega$ ,<br>$R_{L2} = 1.6\ k\Omega$ , $C_L = 30\ pF$ , $V_L = 5\ V$ ,<br>See Figure 6 | 3                      |     | ns   |

# SN75ALS056, SN75ALS057

## TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

**switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)**

| PARAMETER         |                                                     | FROM<br>(INPUT) | TO<br>(OUTPUT) | TEST CONDITIONS                                                                                                                                                               | SN75ALS057<br>DRIVER |                  |     | UNIT |
|-------------------|-----------------------------------------------------|-----------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|-----|------|
|                   |                                                     |                 |                |                                                                                                                                                                               | MIN                  | TYP <sup>†</sup> | MAX |      |
| t <sub>PLH1</sub> | Propagation delay time,<br>low-to-high-level output | $\overline{TE}$ | Bn             | Dn, En, $\overline{RE}$ at 2 V, V <sub>L</sub> = 2 V,<br>R <sub>L2</sub> not connected, R <sub>L1</sub> = 18 Ω,<br>See Figure 2, C <sub>L</sub> = 30 pF                       | 24                   |                  |     | ns   |
| t <sub>PHL1</sub> | Propagation delay time,<br>high-to-low-level output |                 |                |                                                                                                                                                                               | 20                   |                  |     |      |
| t <sub>PLH2</sub> | Propagation delay time,<br>low-to-high-level output | Dn or En        | Bn             | $\overline{TE}$ at 0.8 V, $\overline{RE}$ at 2 V,<br>V <sub>L</sub> = 2 V, R <sub>L1</sub> = 18 Ω,<br>R <sub>L2</sub> not connected, C <sub>L</sub> = 30 pF,<br>See Figure 2  | 19                   |                  |     | ns   |
| t <sub>PHL2</sub> | Propagation delay time,<br>high-to-low-level output |                 |                |                                                                                                                                                                               | 18                   |                  |     |      |
| t <sub>TLH</sub>  | Transition time,<br>low-to-high-level output        | Dn or En        | Bn             | $\overline{RE}$ at 2 V, V <sub>L</sub> = 2 V,<br>$\overline{TE}$ at 0.8 V, R <sub>L1</sub> = 18 Ω,,<br>R <sub>L2</sub> not connected, C <sub>L</sub> = 30 pF,<br>See Figure 2 | 1                    | 3                | 11  | ns   |
| t <sub>THL</sub>  | Transition time,<br>high-to-low-level output        |                 |                |                                                                                                                                                                               | 1                    | 3                | 6   |      |

<sup>†</sup> Typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

**switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (continued)**

| PARAMETER           |                                                     | FROM<br>(INPUT) | TO<br>(OUTPUT) | TEST CONDITIONS                                                                                                                                       | SN75ALS057<br>RECEIVER |     | UNIT |
|---------------------|-----------------------------------------------------|-----------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----|------|
|                     |                                                     |                 |                |                                                                                                                                                       | MIN                    | MAX |      |
| tPLH4               | Propagation delay time,<br>low-to-high-level output | Bn              | Rn             | $\overline{RE}$ at 0.8 V, $\overline{TE}$ at 2 V, $V_L = 5$ V,<br>$R_{L1} = 390\ \Omega$ , $R_{L2} = 1.6\ k\Omega$ , $C_L = 30\ pF$ ,<br>See Figure 4 | 18                     |     | ns   |
| tPHL4               | Propagation delay time,<br>high-to-low-level output |                 |                |                                                                                                                                                       | 18                     |     |      |
| tPLZ2               | Output disable time<br>from low level               | $\overline{RE}$ | Rn             | Bn at 2 V, $\overline{TE}$ at 2 V, $V_L = 5$ V,<br>$C_L = 5\ pF$ , $R_{L1} = 390\ \Omega$ ,<br>$R_{L2}$ not connected, See Figure 5                   | 18                     |     | ns   |
| tPZL2               | Output enable time to<br>low level                  | $\overline{RE}$ | Rn             | Bn at 2 V, $\overline{TE}$ at 2 V, $V_L = 5$ V,<br>$C_L = 30\ pF$ , $R_{L1} = 390\ \Omega$ , $R_{L2} = 1.6\ k\Omega$ ,<br>See Figure 5                | 15                     |     | ns   |
| tPHZ2               | Output disable time<br>from high level              | $\overline{RE}$ | Rn             | Bn at 0.8 V, $\overline{TE}$ at 2 V, $V_L = 0$ ,<br>$C_L = 5\ pF$ , $R_{L1} = 390\ \Omega$ ,<br>$R_{L2}$ not connected, See Figure 5                  | 17                     |     | ns   |
| tPZH2               | Output enable time to<br>high level                 | $\overline{RE}$ | Rn             | Bn at 0.8 V, $\overline{TE}$ at 2 V, $V_L = 0$ ,<br>$C_L = 30\ pF$ , $R_{L1}$ not connected,<br>$R_{L2} = 1.6\ k\Omega$ , See Figure 5                | 17                     |     | ns   |
| t <sub>w</sub> (NR) | Receiver noise<br>rejection pulse duration          | Bn              | Rn             | $\overline{TE}$ at 2 V, $\overline{RE}$ at 0.8 V, $V_L = 0$ ,<br>$R_{L1} = 390\ \Omega$ , $R_{L2} = 1.6\ k\Omega$ , $C_L = 30\ pF$ ,<br>See Figure 6  | 3                      |     | ns   |

SN75ALS056, SN75ALS057

TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (continued)

| PARAMETER         |                                                     | FROM<br>(INPUT) | TO<br>(OUTPUT) | TEST CONDITIONS                                                                                                                                 | SN75ALS057<br>DRIVER PLUS<br>RECEIVER |     | UNIT |
|-------------------|-----------------------------------------------------|-----------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----|------|
|                   |                                                     |                 |                |                                                                                                                                                 | MIN                                   | MAX |      |
| t <sub>PLH6</sub> | Propagation delay time,<br>low-to-high-level output | Dn              | Rn             | $\overline{RE}$ at 0.8 V, $\overline{TE}$ at 0.8 V, R <sub>L1</sub> = 390 Ω,<br>R <sub>L2</sub> = 1.6 kΩ,, C <sub>L</sub> = 30 pF, See Figure 7 | 40                                    |     | ns   |
| t <sub>PHL6</sub> | Propagation delay time,<br>high-to-low-level output |                 |                |                                                                                                                                                 | 40                                    |     |      |

PARAMETER MEASUREMENT INFORMATION

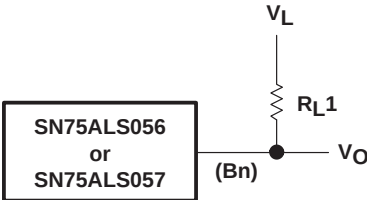


Figure 1. Driver Low-Level-Output-Voltage Test Circuit

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

## PARAMETER MEASUREMENT INFORMATION


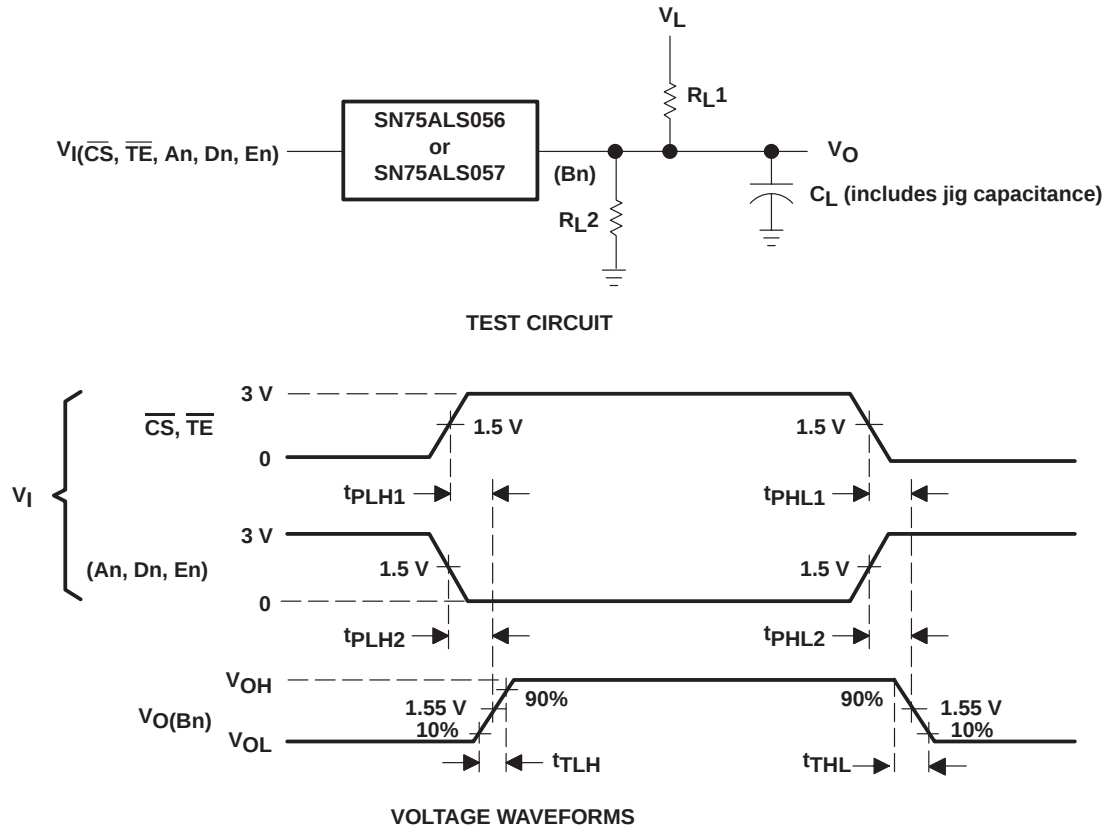


Figure 2. Driver Test Circuit and Voltage Waveforms


# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

## PARAMETER MEASUREMENT INFORMATION

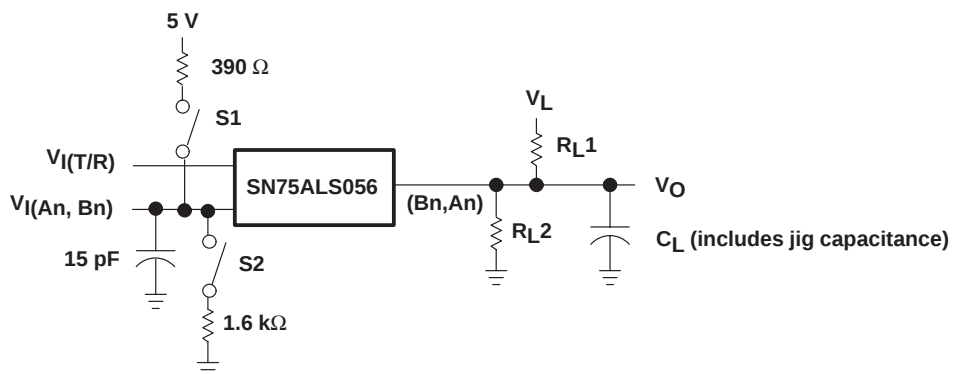

## TEST CIRCUIT

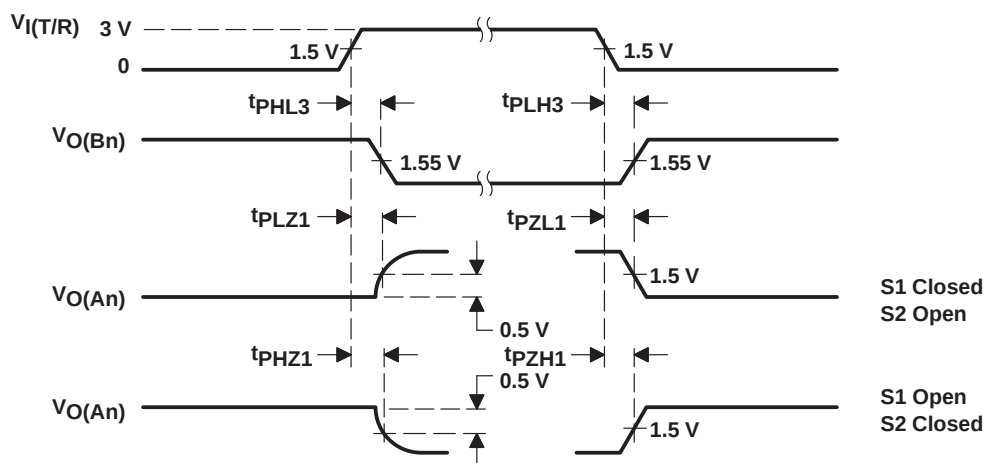


## VOLTAGE WAVEFORMS

NOTE A:  $t_r = t_f \leq 5$  ns from 10% to 90%

Figure 3. Propagation Delay From T/R to An or Bn Test Circuit and Voltage Waveforms


# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS

SLLS028G – AUGUST 1987 – REVISED JUNE 1998

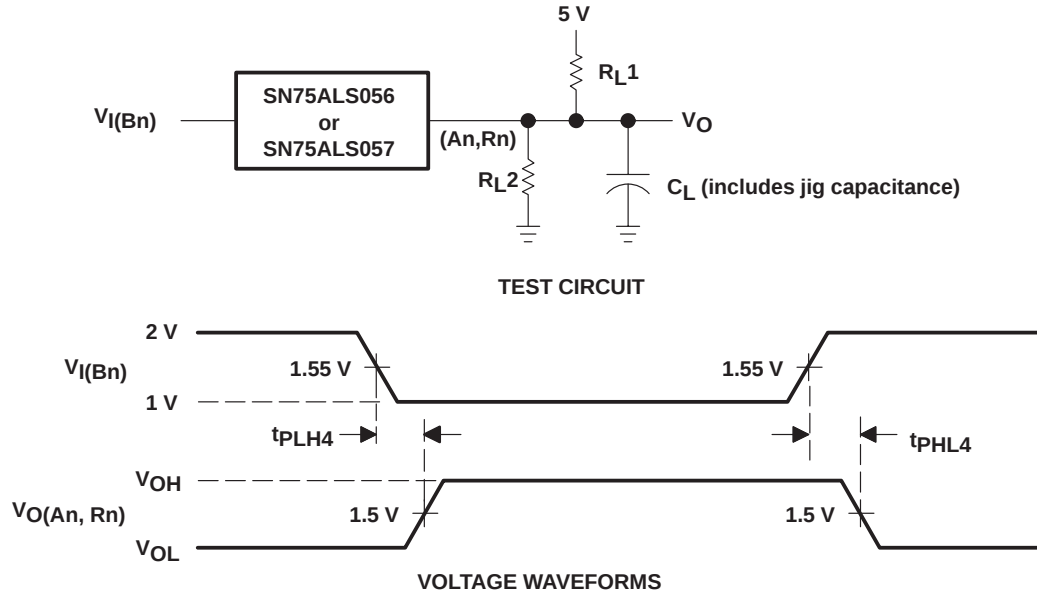

NOTE A:  $t_r = t_f \leq 5$  ns from 10% to 90%

Figure 4. Receiver Test Circuit and Voltage Waveforms

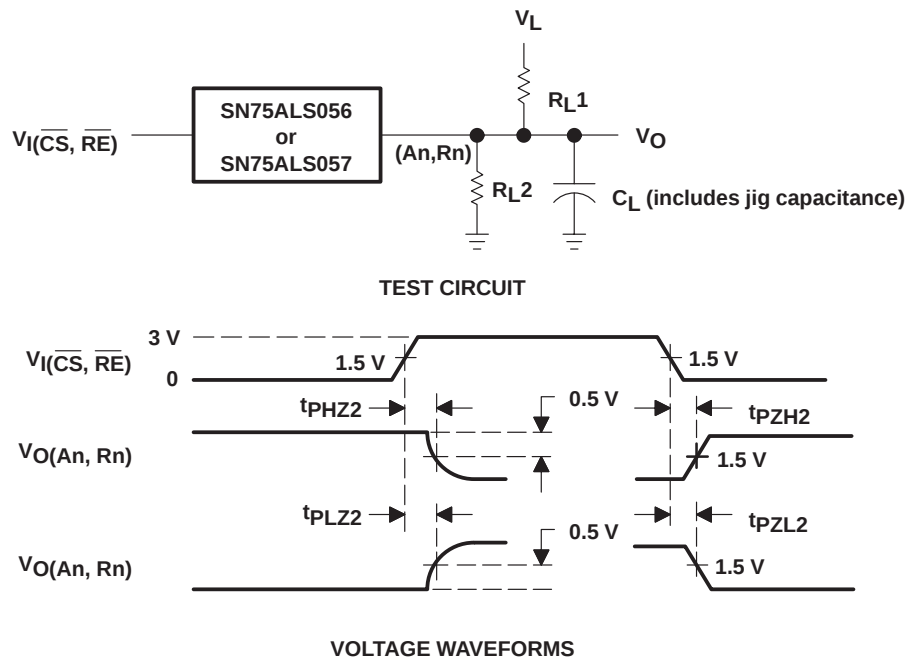


NOTE A:  $t_r = t_f \leq 5$  ns from 10% to 90%

Figure 5. Propagation Delay From  $\overline{CS}$  to An or  $\overline{RE}$  to Rn Test Circuit and Voltage Waveforms

# SN75ALS056, SN75ALS057 TRAPEZOIDAL-WAVEFORM INTERFACE BUS TRANSCEIVERS


SLLS028G – AUGUST 1987 – REVISED JUNE 1998

## PARAMETER MEASUREMENT INFORMATION

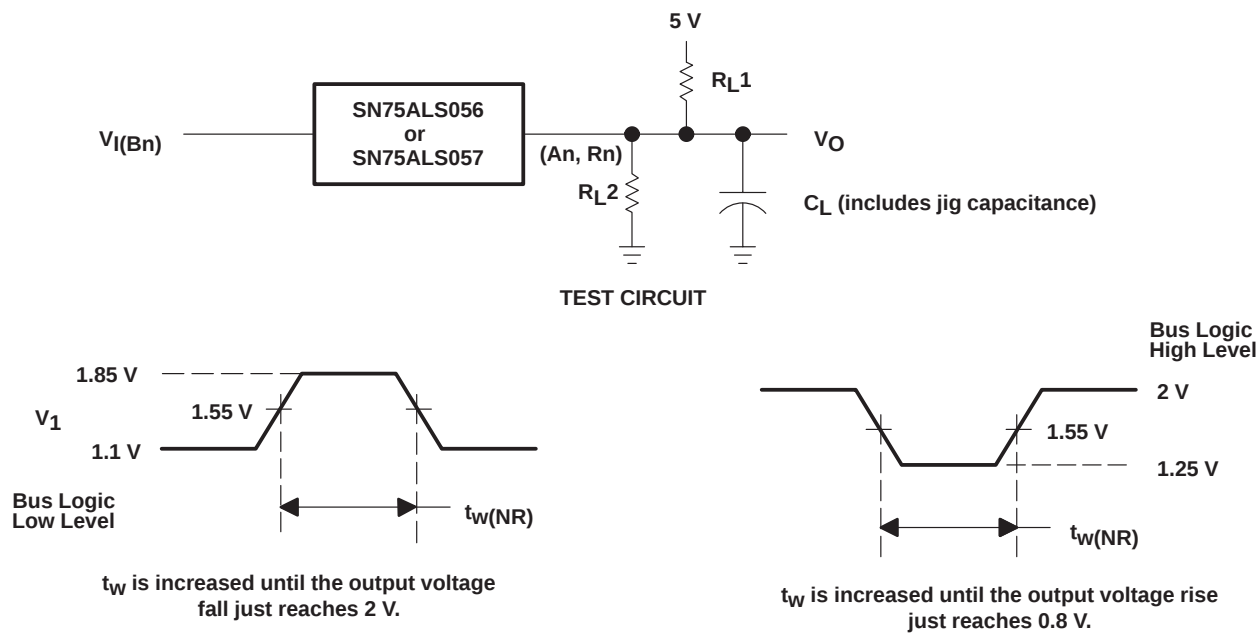

NOTE A:  $t_r = t_f \leq 5$  ns from 10% to 90%

Figure 6. Receiver Noise-Immunity Test Circuit and Voltage Waveforms

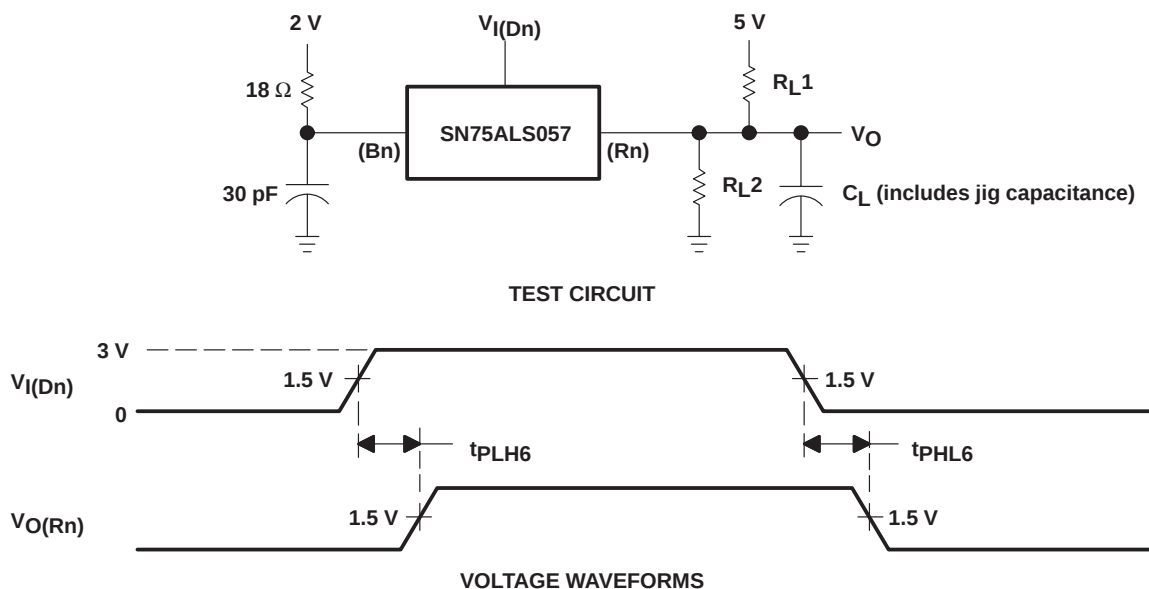

NOTE A:  $t_r = t_f \leq 5$  ns from 10% to 90%

Figure 7. Driver Plus Receiver Delay-Times Test Circuits and Voltage Waveforms

## PACKAGING INFORMATION

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">SN75ALS056DW</a>  | Active        | Production           | SOIC (DW)   20 | 25   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 75ALS056            |
| SN75ALS056DW.A                | Active        | Production           | SOIC (DW)   20 | 25   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 75ALS056            |
| <a href="#">SN75ALS057DW</a>  | Active        | Production           | SOIC (DW)   20 | 25   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 75ALS057            |
| SN75ALS057DW.A                | Active        | Production           | SOIC (DW)   20 | 25   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 75ALS057            |
| <a href="#">SN75ALS057DWR</a> | Active        | Production           | SOIC (DW)   20 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 75ALS057            |
| SN75ALS057DWR.A               | Active        | Production           | SOIC (DW)   20 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 75ALS057            |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## TAPE AND REEL INFORMATION



\*All dimensions are nominal


| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN75ALS057DWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.3    | 2.7     | 12.0    | 24.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN75ALS057DWR | SOIC         | DW              | 20   | 2000 | 350.0       | 350.0      | 43.0        |

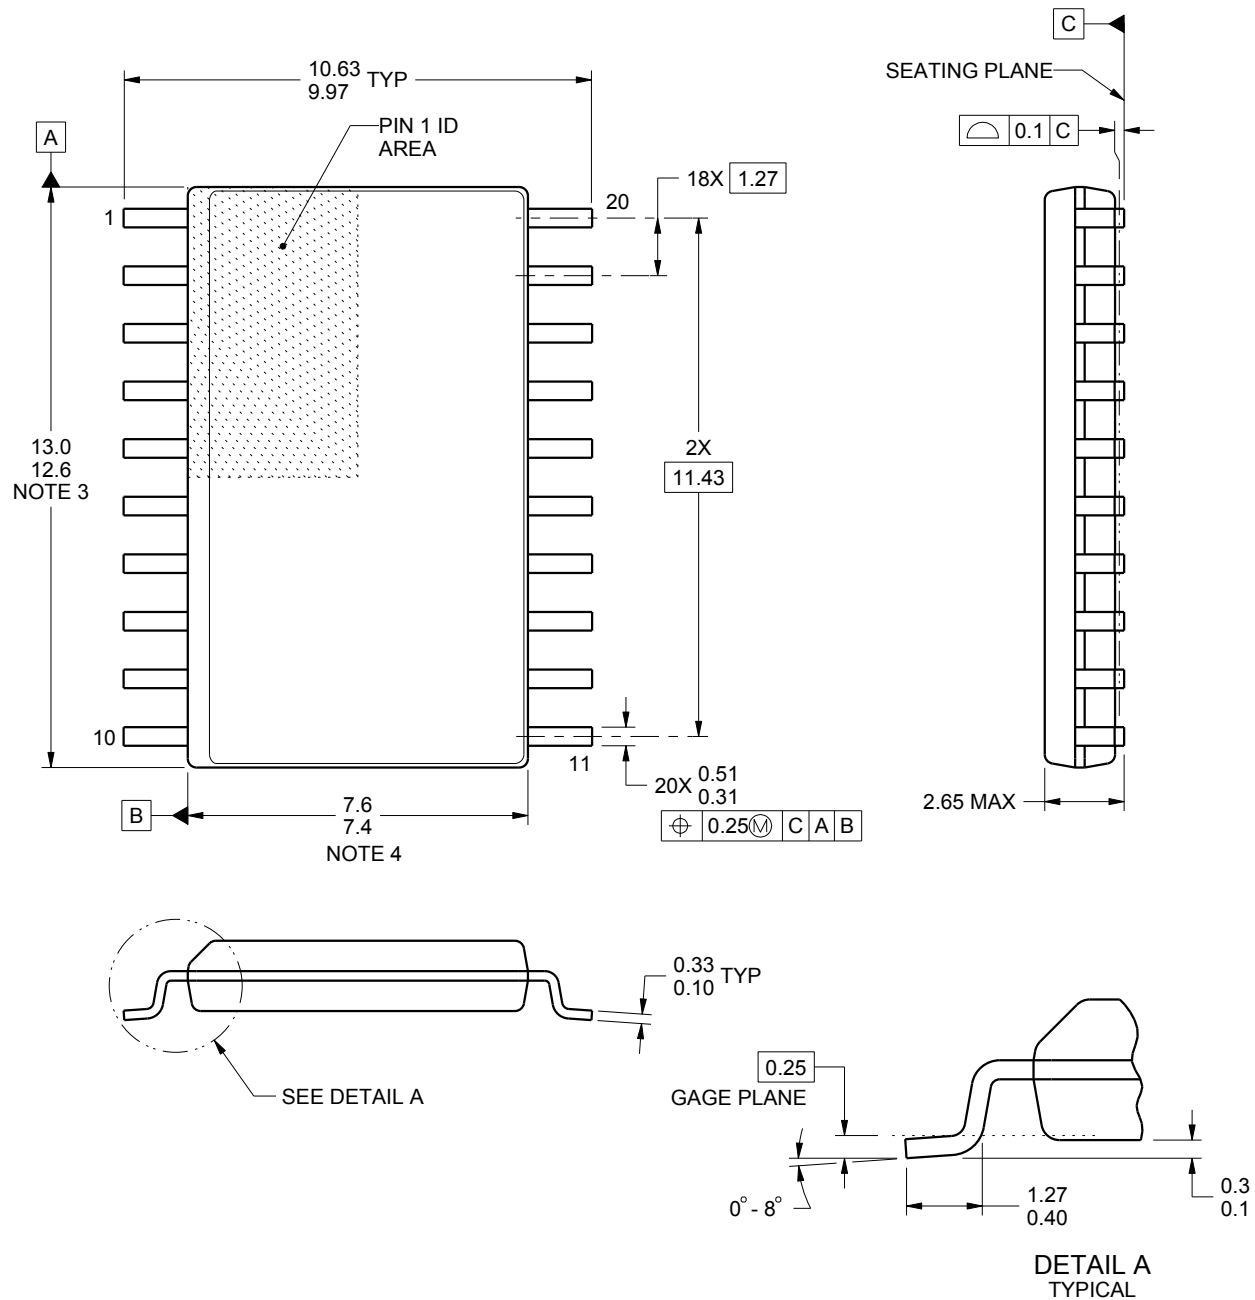

4220724/A 05/2016

## NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
5. Reference JEDEC registration MS-013.

# EXAMPLE BOARD LAYOUT



DW0020A

SOIC - 2.65 mm max height

SOIC

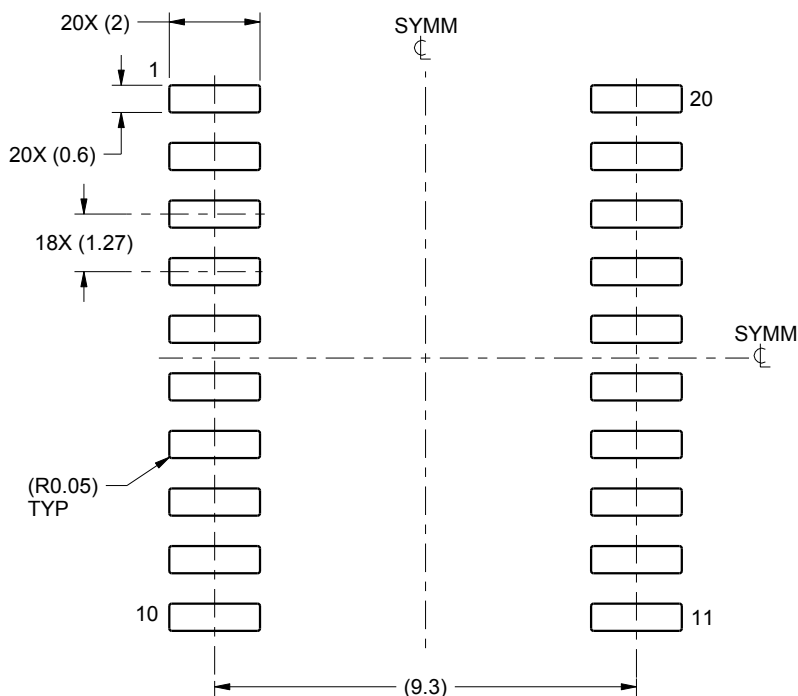

LAND PATTERN EXAMPLE  
SCALE:6X

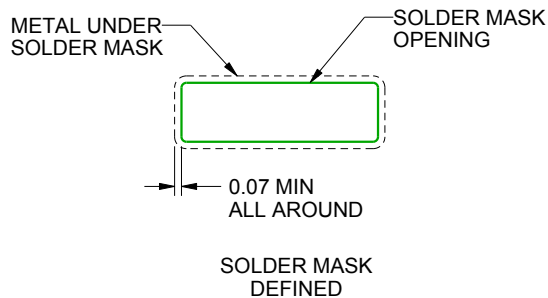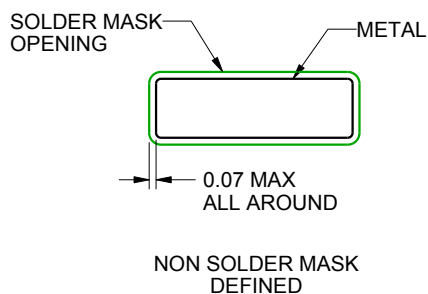

SOLDER MASK DETAILS

4220724/A 05/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DW0020A

SOIC - 2.65 mm max height

SOIC



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:6X

4220724/A 05/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025