# TXG404x 4-bit, ±40V Ground-Level Translator

## 1 Features

- Supports DC ground shifts up to 40V
- AC Noise Rejection of $80V_{PP}$ up to 5MHz
- CMTI of 1kV/µs
- Low Prop Delay (<5ns) and Ch-Ch Skew (0.35ns)
- Greater than 250Mbps
- Low power consumption (0.65mA per channel at 1Mbps, 1.8V)
- Fully configurable dual-rail design allows each port to operate from 1.71V to 5.5V
- 4, 2, 1 channel devices available
- Two device variants:
  - TXG4041: 3 forward, 1 reverse
  - TXG4042: 2 forward, 2 reverse
- Supports $V_{CC}$ disconnect feature (I/Os are forced into high-Z)
- Schmitt-trigger inputs allows for slow and noisy signals
- Inputs with integrated static pull-down resistors prevent channels from floating
- Operating temperature from –40°C to +125°C
- Latch-up performance exceeds 100mA per JESD 78, class II
- ESD protection exceeds JESD 22
  - 4000V human-body model
  - 500V charged-device model
- Package options provided:
  - RUC (X2QFN-14)
  - DYY (SOT-14)
  - DBQ (QSOP-16)

## 2 Applications

- Test and Measurement
- Industrial Automation
- Appliances
- Robotics
- Energy Storage Systems

## 3 Description

The TXG404x is a 4-bit, fixed direction, non-galvanic based voltage and ground-level translator that supports both logic-level shifting between 1.71V to 5.5V and ground-level shifting up to ±40V. Compared to traditional level shifters, the TXG404x family solves the challenges of voltage translation across different ground levels. The Simplified Diagram shows a common use case where DC shift occurs between GNDA to GNDB due to parasitic resistance or capacitance.


$V_{CCA}$ is referenced to GNDA and $V_{CCB}$ is referenced to GNDB. Ax pins are referenced to $V_{CCA}$ logic level while Bx pins are referenced to $V_{CCB}$ logic levels. Both A port and B port accept voltages from 1.71V to 5.5V. This device includes two enable pins that can place the respective outputs in a high-impedance state when the OE pin is connected to GND or left floating. In the event of input power or signal loss, the output is default low when OE is High (refer to Table 7-1). The leakage between GNDA and GNDB is <45nA when $V_{CC}$ to GND is shorted.

The TXG404x device helps improve noise immunity and power sequencing across different ground domains while providing low power consumption, latency, and channel-to-channel skew. The device supresses noise levels of $80V_{PP}$ up to 5MHz (Figure 7-5). TXG404x can support multiple interfaces such as SPI, UART, GPIO, and I2S.

**Package Information**

| PART NUMBER | PACKAGE (1) | BODY SIZE (NOM) |
|---|---|---|
| TXG4041<br>TXG4042 | DYY (SOT-14) | 4.20mm × 2.00mm |
| | DBQ (QSOP-16) | 4.90mm x 3.90mm |
| | RUC (X2QFN-14) | 2.00mm × 2.00mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

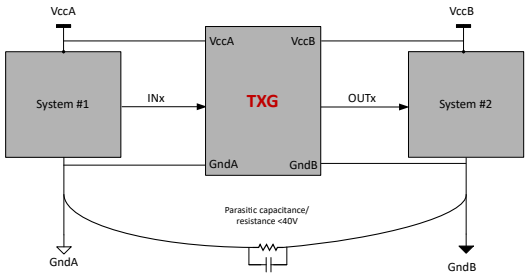


**Simplified Diagram**

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

# Table of Contents

**1 Features**....1
**2 Applications**....1
**3 Description**....1
**4 Pin Configuration and Functions**....3
**5 Specifications**....9
5.1 Absolute Maximum Ratings....9
5.2 ESD Ratings....9
5.3 Recommended Operating Conditions....10
5.4 Thermal Information....10
5.5 Electrical Characteristics....11
5.6 Supply Current....13
5.7 Switching Characteristics, $V_{CCA}$ = 1.8 ± 0.15V....16
5.8 Switching Characteristics, $V_{CCA}$ = 2.5 ± 0.2V....17
5.9 Switching Characteristics, $V_{CCA}$ = 3.3 ± 0.3V....18
5.10 Switching Characteristics, $V_{CCA}$ = 5.0 ± 0.5V....19
5.11 Switching Characteristics: $T_{sk}$, $T_{MAX}$....20
5.12 Typical Characteristics....22
**6 Parameter Measurement Information**....23
6.1 Load Circuit and Voltage Waveforms....23
**7 Detailed Description**....25
7.1 Overview....25
7.2 Functional Block Diagram....25
7.3 Feature Description....27
7.4 Device Functional Modes....30
**8 Application and Implementation**....31
8.1 Application Information....31
8.2 Typical Application....31
8.3 Power Supply Recommendations....33
8.4 Layout....33
**9 Device and Documentation Support**....34
9.1 Documentation Support....34
9.2 Receiving Notification of Documentation Updates....34
9.3 Support Resources....34
9.4 Trademarks....34
9.5 Electrostatic Discharge Caution....34
9.6 Glossary....34
**10 Revision History**....34
**11 Mechanical, Packaging, and Orderable Information**....34


Copyright © 2025 Texas Instruments Incorporated

# 4 Pin Configuration and Functions

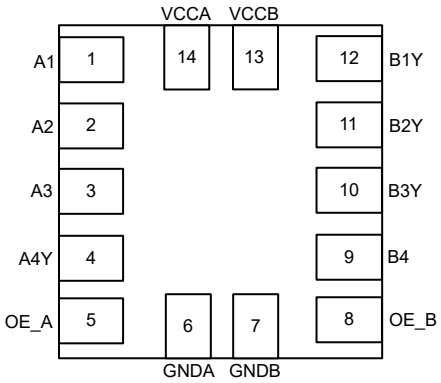



**Figure 4-1. TXG4041 RUC Package 14-Pin X2QFN Top View**

**Table 4-1. TXG4041 RUC Pin Functions**

| PIN | | I/O | DESCRIPTION |
|---|---|---|---|
| Name | TXG4041 | | |
| A1 | 1 | I | Input A1. Referenced to $V_{CCA}$ |
| A2 | 2 | I | Input A2. Referenced to $V_{CCA}$ |
| A3 | 3 | I | Input A3. Referenced to $V_{CCA}$ |
| A4Y | 4 | O | Output A4. Referenced to $V_{CCA}$ |
| B1Y | 12 | O | Output B1. Referenced to $V_{CCB}$ |
| B2Y | 11 | O | Output B2. Referenced to $V_{CCB}$ |
| B3Y | 10 | O | Output B3. Referenced to $V_{CCB}$ |
| B4 | 9 | I | Input B4. Referenced to $V_{CCB}$ |
| OE_A | 5 | I | Active-High Output Enable (A side). Pull to GND to place all outputs in high-impedance mode. |
| OE_B | 8 | I | Active-High Output Enable (B side). Pull to GND to place all outputs in high-impedance mode. |
| $V_{CCA}$ | 14 | — | A side supply voltage. 1.71V ≤ $V_{CCA}$ ≤ 5.5V |
| $V_{CCB}$ | 13 | — | B side supply voltage. 1.71V ≤ $V_{CCB}$ ≤ 5.5V |
| GNDA | 6 | — | Ground reference for $V_{CCA}$ |
| GNDB | 7 | — | Ground reference for $V_{CCB}$ |

Copyright © 2025 Texas Instruments Incorporated

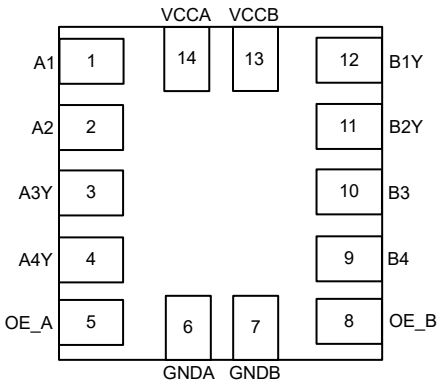



**Figure 4-2. TXG4042 RUC Package 14-Pin X2QFN Top View**

**Table 4-2. TXG4042 RUC Pin Functions**

| PIN | | I/O | DESCRIPTION |
|---|---|---|---|
| Name | TXG4042 | | |
| A1 | 1 | I | Input A1. Referenced to $V_{CCA}$ |
| A2 | 2 | I | Input A2. Referenced to $V_{CCA}$ |
| A3Y | 3 | O | Output A3. Referenced to $V_{CCA}$ |
| A4Y | 4 | O | Output A4. Referenced to $V_{CCA}$ |
| B1Y | 12 | O | Output B1. Referenced to $V_{CCB}$ |
| B2Y | 11 | O | Output B2. Referenced to $V_{CCB}$ |
| B3 | 10 | I | Input B3. Referenced to $V_{CCB}$ |
| B4 | 9 | I | Input B4. Referenced to $V_{CCA}$ |
| OE_A | 5 | I | Active-High Output Enable (A side). Pull to GND to place all outputs in high-impedance mode. |
| OE_B | 8 | I | Active-High Output Enable (B side). Pull to GND to place all outputs in high-impedance mode. |
| $V_{CCA}$ | 14 | — | A side supply voltage. 1.71V ≤ $V_{CCA}$ ≤ 5.5V |
| $V_{CCB}$ | 13 | — | B side supply voltage. 1.71V ≤ $V_{CCB}$ ≤ 5.5V |
| GNDA | 6 | — | Ground reference for $V_{CCA}$ |
| GNDB | 7 | — | Ground reference for $V_{CCB}$ |


Copyright © 2025 Texas Instruments Incorporated

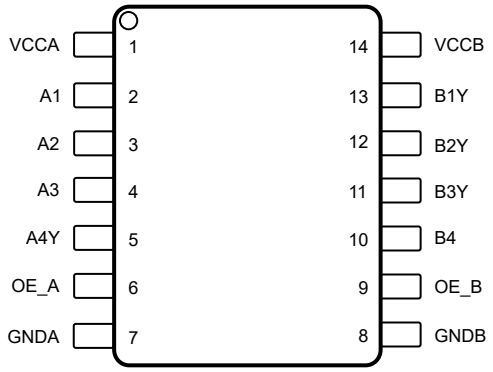



**Figure 4-3. TXG4041 DYY 14-Pin SOT Top View**

**Table 4-3. TXG4041 DYY Pin Functions**

| PIN | | I/O | DESCRIPTION |
|---|---|---|---|
| Name | TXG4041 | | |
| A1 | 2 | I | Input A1. Referenced to $V_{CCA}$ |
| A2 | 3 | I | Input A2. Referenced to $V_{CCA}$ |
| A3 | 4 | I | Input A3. Referenced to $V_{CCA}$ |
| A4Y | 5 | O | Output A4. Referenced to $V_{CCA}$ |
| B1Y | 13 | O | Output B1. Referenced to $V_{CCB}$ |
| B2Y | 12 | O | Output B2. Referenced to $V_{CCB}$ |
| B3Y | 11 | O | Output B3. Referenced to $V_{CCB}$ |
| B4 | 10 | I | Input B4. Referenced to $V_{CCB}$ |
| OE_A | 6 | I | Active-High Output Enable (A side). Pull to GND to place all outputs in high-impedance mode. |
| OE_B | 9 | I | Active-High Output Enable (B side). Pull to GND to place all outputs in high-impedance mode. |
| $V_{CCA}$ | 1 | — | A side supply voltage. $1.71V \le V_{CCA} \le 5.5V$ |
| $V_{CCB}$ | 14 | — | B side supply voltage. $1.71V \le V_{CCB} \le 5.5V$ |
| GNDA | 7 | — | Ground reference for $V_{CCA}$ |
| GNDB | 8 | — | Ground reference for $V_{CCB}$ |

Copyright © 2025 Texas Instruments Incorporated

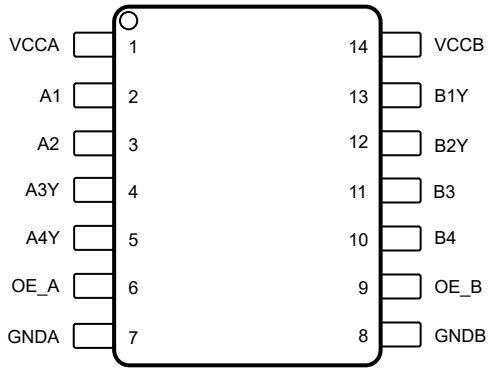



**Figure 4-4. TXG4042 DYY 14-Pin SOT Top View**

**Table 4-4. TXG4042 DYY Pin Functions**

| PIN | | I/O | DESCRIPTION |
|---|---|---|---|
| Name | TXG4042 | | |
| A1 | 2 | I | Input A1. Referenced to $V_{CCA}$ |
| A2 | 3 | I | Input A2. Referenced to $V_{CCA}$ |
| A3Y | 4 | O | Output A3. Referenced to $V_{CCA}$ |
| A4Y | 5 | O | Output A4. Referenced to $V_{CCA}$ |
| B1Y | 13 | O | Output B1. Referenced to $V_{CCB}$ |
| B2Y | 12 | O | Output B2. Referenced to $V_{CCB}$ |
| B3 | 11 | I | Input B3. Referenced to $V_{CCB}$ |
| B4 | 10 | I | Input B4. Referenced to $V_{CCA}$ |
| OE_A | 6 | I | Active-High Output Enable (A side). Pull to GND to place all outputs in high-impedance mode. |
| OE_B | 9 | I | Active-High Output Enable (B side). Pull to GND to place all outputs in high-impedance mode. |
| $V_{CCA}$ | 1 | — | A side supply voltage. $1.71V \le V_{CCA} \le 5.5V$ |
| $V_{CCB}$ | 14 | — | B side supply voltage. $1.71V \le V_{CCB} \le 5.5V$ |
| GNDA | 7 | — | Ground reference for $V_{CCA}$ |
| GNDB | 8 | — | Ground reference for $V_{CCB}$ |


Copyright © 2025 Texas Instruments Incorporated

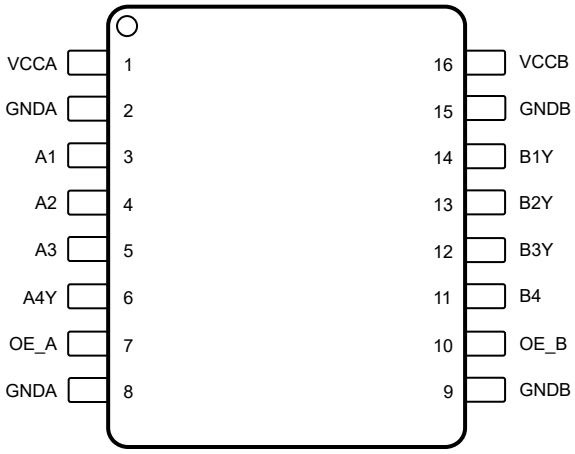



**Figure 4-5. TXG4041 DBQ 16-Pin QSOP Top View**

**Table 4-5. TXG4041 DBQ Pin Functions**

| PIN | | I/O | DESCRIPTION |
|---|---|---|---|
| Name | TXG4041 | | |
| A1 | 3 | I | Input A1. Referenced to $V_{CCA}$ |
| A2 | 4 | I | Input A2. Referenced to $V_{CCA}$ |
| A3 | 5 | I | Input A3. Referenced to $V_{CCA}$ |
| A4Y | 6 | O | Output A4. Referenced to $V_{CCA}$ |
| B1Y | 14 | O | Output B1. Referenced to $V_{CCB}$ |
| B2Y | 13 | O | Output B2. Referenced to $V_{CCB}$ |
| B3Y | 12 | O | Output B3. Referenced to $V_{CCB}$ |
| B4 | 11 | I | Input B4. Referenced to $V_{CCB}$ |
| OE_A | 7 | I | Active-High Output Enable (A side). Pull to GND to place all outputs in high-impedance mode. |
| OE_B | 10 | I | Active-High Output Enable (B side). Pull to GND to place all outputs in high-impedance mode. |
| $V_{CCA}$ | 1 | — | A side supply voltage. $1.71V \le V_{CCA} \le 5.5V$ |
| $V_{CCB}$ | 16 | — | B side supply voltage. $1.71V \le V_{CCB} \le 5.5V$ |
| GNDA | 2, 8 | — | Ground reference for $V_{CCA}$ |
| GNDB | 9, 15 | — | Ground reference for $V_{CCB}$ |

Copyright © 2025 Texas Instruments Incorporated

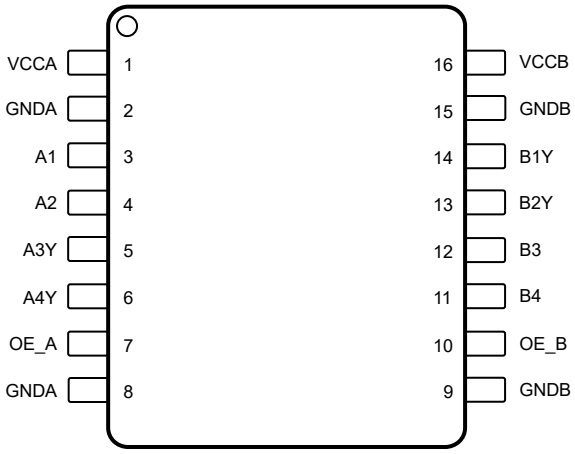



**Figure 4-6. TXG4042 DBQ 16-Pin QSOP Top View**

**Table 4-6. TXG4042 DBQ Pin Functions**

| PIN | | I/O | DESCRIPTION |
|---|---|---|---|
| Name | TXG4042 | | |
| A1 | 3 | I | Input A1. Referenced to $V_{CCA}$ |
| A2 | 4 | I | Input A2. Referenced to $V_{CCA}$ |
| A3Y | 5 | O | Output A3. Referenced to $V_{CCA}$ |
| A4Y | 6 | O | Output A4. Referenced to $V_{CCA}$ |
| B1Y | 14 | O | Output B1. Referenced to $V_{CCB}$ |
| B2Y | 13 | O | Output B2. Referenced to $V_{CCB}$ |
| B3 | 12 | I | Input B3. Referenced to $V_{CCB}$ |
| B4 | 11 | I | Input B4. Referenced to $V_{CCB}$ |
| OE_A | 7 | I | Active-High Output Enable (A side). Pull to GND to place all outputs in high-impedance mode. |
| OE_B | 10 | I | Active-High Output Enable (B side). Pull to GND to place all outputs in high-impedance mode. |
| $V_{CCA}$ | 1 | — | A side supply voltage. 1.71V ≤ $V_{CCA}$ ≤ 5.5V |
| $V_{CCB}$ | 16 | — | B side supply voltage. 1.71V ≤ $V_{CCB}$ ≤ 5.5V |
| GNDA | 2, 8 | — | Ground reference for $V_{CCA}$ |
| GNDB | 9, 15 | — | Ground reference for $V_{CCB}$ |


Copyright © 2025 Texas Instruments Incorporated

# 5 Specifications

## 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

| | | | MIN | MAX | UNIT |
|---|---|---|---|---|---|
| $V_{CCA}$ to $V_{GNDA}$ | Supply voltage A to Ground voltage A | | –0.5 | 6.5 | V |
| $V_{CCB}$ to $V_{GNDB}$ | Supply voltage B to Ground voltage B | | –0.5 | 6.5 | V |
| $V_{GNDA}$ to $V_{GNDB}$ | Voltage between GNDA and GNDB | | -45 | 45 | V |
| $V_I$ | Input Voltage(2) | I/O Ports (A Port) to $V_{GNDA}$ | –0.5 | 6.5 | V |
| | | I/O Ports (B Port) to $V_{GNDB}$ | –0.5 | 6.5 | |
| | | OE | –0.5 | 6.5 | V |
| $V_O$ | Voltage applied to any output in the high-impedance or power-off state(2) | A Port to $V_{GNDA}$ | –0.5 | 6.5 | V |
| | | B Port to $V_{GNDB}$ | –0.5 | 6.5 | |
| $V_O$ | Voltage applied to any output in the high or low state(2) (3) | A Port to $V_{GNDA}$ | –0.5 | 6.5 | V |
| | | B Port to $V_{GNDB}$ | –0.5 | 6.5 | |
| $I_{IK}$ | Input clamp current | $V_I$ < 0 | –20 | | mA |
| $I_{OK}$ | Output clamp current | $V_O$ < 0 | –20 | | mA |
| $I_O$ | Continuous output current | | –16 | 16 | mA |
| | Continuous current through $V_{CCx}$ or GNDx | | –64 | 64 | mA |
| $T_j$ | Junction Temperature | | | 150 | °C |
| $T_{stg}$ | Storage temperature | | –65 | 150 | °C |

(1) Stresses beyond those listed under *Section 5.1* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Section 5.3* Exposure beyond the limits listed in *Section 5.3* may affect device reliability.
(2) The input voltage and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
(3) The output positive-voltage rating may be exceeded up to 6.5V maximum if the output current rating is observed.

## 5.2 ESD Ratings

| | | | VALUE | UNIT |
|---|---|---|---|---|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001(1) | ±4000 | V |
| | | Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002(2) | ±500 | |

(1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2025 Texas Instruments Incorporated

## 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted) (1) (2) (3)

| | | | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| $V_{CCA}$ | Supply voltage A - Relative to GNDA | | 1.71 | | 5.5 | V |
| $V_{CCB}$ | Supply voltage B - Relative to GNDB | | 1.71 | | 5.5 | V |
| $V_{GNDA}$ to $V_{GNDB}$ | Voltage between GNDA and GNDB | | -40 | | 40 | V |
| $I_{OH}$ | High-level output current | $V_{CCO}$ = 1.71V | –4.5 | | | mA |
| | | $V_{CCO}$ = 2.3V | –8 | | | |
| | | $V_{CCO}$ = 3V | –10 | | | |
| | | $V_{CCO}$ = 4.5V | –12 | | | |
| $I_{OL}$ | Low-level output current | $V_{CCO}$ = 1.71V | | | 4.5 | mA |
| | | $V_{CCO}$ = 2.3V | | | 8 | |
| | | $V_{CCO}$ = 3V | | | 10 | |
| | | $V_{CCO}$ = 4.5V | | | 12 | |
| $V_I$ | Input voltage - Relative to GNDx | | 0 | | 5.5 | V |
| $V_O$ | Output voltage - Relative to GNDx | | 0 | | $V_{CCO}$ | V |
| $T_A$ | Operating free-air temperature | | –40 | | 125 | °C |

(1) $V_{CCI}$ is the $V_{CC}$ associated with the input port.
(2) $V_{CCO}$ is the $V_{CC}$ associated with the output port.
(3) All control inputs and data I/Os of this device have weak pulldowns to ensure the line is not floating when undefined external to the device. The input leakage from these weak pulldowns is defined by the $I_I$ specification indicated under *Section 5.5*.

## 5.4 Thermal Information

| THERMAL METRIC(1) | | TXGx041 and TXGx042 | | | UNIT |
|---|---|---|---|---|---|
| | | DYY (SOT) | RUC (X2QFN) | DBQ (QSOP) | |
| | | 14 PINS | 14 PINS | 16 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 128.4 | 99.7 | 143.1 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 52.4 | 57.9 | 82.3 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 58.5 | 51.9 | 46.9 | °C/W |
| $Y_{JT}$ | Junction-to-top characterization parameter | 2.7 | 8.1 | 1.2 | °C/W |
| $Y_{JB}$ | Junction-to-board characterization parameter | 51.9 | 57.2 | 81.9 | °C/W |

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application note.


Copyright © 2025 Texas Instruments Incorporated

## 5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)(1) (2)

| PARAMETER | | TEST CONDITIONS | $V_{CCA}$ | $V_{CCB}$ | Operating free-air temperature ($T_A$) | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | –40°C to 125°C | | | |
| | | | | | MIN | TYP | MAX | |
| $V_{OH}$ | High-level output voltage (3) | $I_{OH}$ = –4.5mA | 1.71V | 1.71V | 1.5 | | | V |
| | | $I_{OH}$ = –8mA | 2.3V | 2.3V | 2.0 | | | |
| | | $I_{OH}$ = –10mA | 3V | 3V | 2.6 | | | |
| | | $I_{OH}$ = –12mA | 4.5V | 4.5V | 4.0 | | | |
| $V_{OL}$ | Low-level output voltage (4) | $I_{OL}$ = 4.5mA | 1.71V | 1.71V | | | 0.18 | V |
| | | $I_{OL}$ = 8mA | 2.3V | 2.3V | | | 0.33 | |
| | | $I_{OL}$ = 10mA | 3V | 3V | | | 0.41 | |
| | | $I_{OL}$ = 12mA | 4.5V | 4.5V | | | 0.49 | |
| $V_{T+}$ | Positive-going input-threshold voltage | Data Inputs (Ax, Bx) (Referenced to $V_{CCI}$) | 1.71V | 1.71V | | | 1.14 | V |
| | | | 2.3V | 2.3V | | | 1.42 | |
| | | | 3V | 3V | | | 1.74 | |
| | | | 4.5V | 4.5V | | | 2.47 | |
| | | | 5.5V | 5.5V | | | 2.97 | |
| $V_{T+}$ | Positive-going input-threshold voltage | OE (Referenced to $V_{CCA}$ or $V_{CCB}$) | 1.71V | 1.71V | | | 1.12 | V |
| | | | 2.3V | 2.3V | | | 1.42 | |
| | | | 3V | 3V | | | 1.73 | |
| | | | 4.5V | 4.5V | | | 2.47 | |
| | | | 5.5V | 5.5V | | | 2.94 | |
| $V_{T-}$ | Negative-going input-threshold voltage | Data Inputs (Ax, Bx) (Referenced to $V_{CCI}$) | 1.71V | 1.71V | 0.52 | | | V |
| | | | 2.3V | 2.3V | 0.76 | | | |
| | | | 3V | 3V | 1.09 | | | |
| | | | 4.5V | 4.5V | 1.77 | | | |
| | | | 5.5V | 5.5V | 2.28 | | | |
| $V_{T-}$ | Negative-going input-threshold voltage | OE (Referenced to $V_{CCA}$ or $V_{CCB}$) | 1.71V | 1.71V | 0.46 | | | V |
| | | | 2.3V | 2.3V | 0.76 | | | |
| | | | 3V | 3V | 1.04 | | | |
| | | | 4.5V | 4.5V | 1.86 | | | |
| | | | 5.5V | 5.5V | 2.5 | | | |
| $\Delta V_T$ | Input-threshold hysteresis ($V_{T+} – V_{T-}$) | Data Inputs (Ax, Bx) (Referenced to $V_{CCI}$) | 1.71V | 1.71V | 0.24 | | 0.54 | V |
| | | | 2.3V | 2.3V | 0.29 | | 0.60 | |
| | | | 3V | 3V | 0.33 | | 0.54 | |
| | | | 4.5V | 4.5V | 0.38 | | 0.82 | |
| | | | 5.5V | 5.5V | 0.37 | | 0.96 | |
| $\Delta V_T$ | Input-threshold hysteresis ($V_{T+} – V_{T-}$) | OE (Referenced to $V_{CCA}$ or $V_{CCB}$) | 1.71V | 1.71V | 0.24 | | 0.45 | V |
| | | | 2.3V | 2.3V | 0.28 | | 0.58 | |
| | | | 3V | 3V | 0.32 | | 0.54 | |
| | | | 4.5V | 4.5V | 0.35 | | 0.58 | |
| | | | 5.5V | 5.5V | 0.39 | | 0.62 | |
| $I_I$ | Input leakage current | Data Inputs (Ax, Bx) $V_I$ = $V_{CCI}$ or GND | 1.71V – 5.5V | 1.71V – 5.5V | | | 1.6 | µA |

Copyright © 2025 Texas Instruments Incorporated

over operating free-air temperature range (unless otherwise noted)(1) (2)

| PARAMETER | | TEST CONDITIONS | $V_{CCA}$ | $V_{CCB}$ | Operating free-air temperature ($T_A$) –40°C to 125°C | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | MIN | TYP | MAX | |
| $I_{off-float}$ | Floating supply Partial power down current | A Port or B Port $V_I$ = GND | Floating(5) | 0V - 5.5V | –2.5 | | 2.5 | µA |
| | | | 0V - 5.5V | Floating(5) | –2.5 | | 2.5 | |
| $I_O$ | Tri-state output Output current | A or B Port: $V_I = V_{CCA}$ or $V_{GNDA}$ OE = GND | 1.71V – 5.5V | 1.1V – 5.5V | –5 | | 5 | µA |
| $C_i$ | Control Input Capacitance | $V_I$ = 3.3V or $V_{GNDA}$ | 3.3V | 3.3V | | 2 | | pF |
| $C_{io}$ | Data I/O Capacitance | OE = GND, $V_O$ = 1.71V DC +1MHz -16dBm sine wave | 3.3V | 3.3V | | 5 | | pF |
| $C_{GND}$ | Cap between grounds | All channels combined ($V_{CC}$ both sides are powered on) | | | | | 49 | pF |
| | | All channels combined ($V_{CC}$ to GND shorted) | | | | | 54 | pF |
| Leakage | Current Leakage between GndA to GndB | All channels combined ($V_{CC}$ to GND shorted) | 1.71V – 5.5V | 1.71V – 5.5V | | 45 | | nA |
| | | All channels combined ($V_{CC}$ both sides are powered on and inputs are all low) | 1.71V – 5.5V | 1.71V – 5.5V | | 45 | | nA |
| | | All channels combined ($V_{CC}$ both sides are powered on and inputs are all high) | 1.71V – 5.5V | 1.71V – 5.5V | | 33 | | µA |
| CMTI | Common Mode Transient Immunity | Input toggling at 100Mbps Ground shift up to 40V | 1.71V – 5.5V | 1.71V – 5.5V | | | 1 | kV/µs |
| $V_{UVLO+}$ | Positive-Going Undervoltage Lockout Voltage | A Supply | 1.71V – 5.5V | | | | 1.55 | V |
| | | B Supply | | 1.71V – 5.5V | | | 1.55 | |
| $V_{UVLO-}$ | Negative-Going Undervoltage Lockout Voltage | A Supply | 1.71V – 5.5V | | 1.36 | | | V |
| | | B Supply | | 1.71V – 5.5V | 1.36 | | | |
| $V_{UVLO_Hys}$ | Undervoltage Lockout Hysteresis | A Supply | 1.71V – 5.5V | | 36 | | 147 | mV |
| | | B Supply | | 1.71V – 5.5V | 36 | | 147 | |

(1) $V_{CCI}$ is the $V_{CC}$ associated with the input port and referenced to $GND_A$
(2) $V_{CCO}$ is the $V_{CC}$ associated with the output port and referenced to $GND_B$
(3) Tested at $V_I = V_{T+(MAX)}$
(4) Tested at $V_I = V_{T-(MIN)}$
(5) Floating is defined as a node that is both not actively driven by an external device and has leakage not exeeding 10nA


Copyright © 2025 Texas Instruments Incorporated

## 5.6 Supply Current

over operating free-air temperature range (unless otherwise noted)(1) (2)

| PARAMETER | | TEST CONDITIONS | $V_{CCA}$ | $V_{CCB}$ | Operating free-air temperature ($T_A$) | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | –40°C to 125°C | | | |
| | | | | | MIN | TYP | MAX | |
| **TXGx041** | | | | | | | | |
| $I_{CCA}$ | $V_{CCA}$ supply current | $V_I = V_{CCI}$ or GND<br>$I_O = 0$ | 1.71V – 5.5V | 1.71V – 5.5V | 546 | | 1220 | µA |
| | | | 0V | 5.5V | -3 | | 13 | |
| | | | 5.5V | 0V | 509 | | 1050 | |
| | | $V_I$ = GND<br>$I_O = 0$ | 5.5V | Floating(3) | 509 | | 1050 | |
| $I_{CCB}$ | $V_{CCB}$ supply current | $V_I = V_{CCI}$ or GND<br>$I_O = 0$ | 1.71V – 5.5V | 1.71V – 5.5V | 750 | | 1836 | µA |
| | | | 0V | 5.5V | 654 | | 1350 | |
| | | | 5.5V | 0V | -3 | | 36 | |
| | | $V_I$ = GND<br>$I_O = 0$ | Floating(3) | 5.5V | 656 | | 1350 | |
| $I_{CCA} + I_{CCB}$ | Supply Current - Disable | EN = 0 | 1.8V | 1.8V | 1.9 | | 3.1 | mA |
| | | | 2.5V | 2.5V | 1.9 | | 3.1 | |
| | | | 3.3V | 3.3V | 2.0 | | 3.1 | |
| | | | 5V | 5V | 2.1 | | 3.3 | |
| $I_{CCA} + I_{CCB}$ | Supply Current - DC Signal | $V_I = V_{CCI}$ | 1.8V | 1.8V | 1 | | 2.65 | mA |
| | | | 2.5V | 2.5V | 1.3 | | 2.7 | |
| | | | 3.3V | 3.3V | 1.3 | | 2.8 | |
| | | | 5V | 5V | 1.4 | | 3.1 | |
| | | $V_I$ = GND | 1.8V | 1.8V | 1.2 | | 2.7 | |
| | | | 2.5V | 2.5V | 1.3 | | 2.7 | |
| | | | 3.3V | 3.3V | 1.3 | | 2.8 | |
| | | | 5V | 5V | 1.4 | | 3.1 | |

Copyright © 2025 Texas Instruments Incorporated

over operating free-air temperature range (unless otherwise noted)(1) (2)

| PARAMETER | | TEST CONDITIONS | $V_{CCA}$ | $V_{CCB}$ | Operating free-air temperature ($T_A$) –40°C to 125°C | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | MIN | TYP | MAX | |
| $I_{CCA}$ + $I_{CCB}$ | Supply Current - AC Signal | All channels switching with square wave clock input; $C_L$ = 15pF, 1Mbps | 1.8V | 1.8V | 1.5 | | 2.6 | mA |
| | | | 2.5V | 2.5V | 1.6 | | 2.7 | |
| | | | 3.3V | 3.3V | 1.6 | | 2.8 | |
| | | | 5V | 5V | 1.9 | | 3.3 | |
| | | All channels switching with square wave clock input; $C_L$ = 15pF, 50Mbps | 1.8V | 1.8V | 9.2 | | 12.1 | |
| | | | 2.5V | 2.5V | 10.8 | | 14 | |
| | | | 3.3V | 3.3V | 12.4 | | 16.2 | |
| | | | 5V | 5V | 17.6 | | 20.6 | |
| | | All channels switching with square wave clock input; $C_L$ = 15pF, 100Mbps | 1.8V | 1.8V | 16.5 | | 20.1 | |
| | | | 2.5V | 2.5V | 20.2 | | 24.7 | |
| | | | 3.3V | 3.3V | 24.1 | | 29 | |
| | | | 5V | 5V | 35 | | 38 | |
| **TXGx042** | | | | | | | | |
| $I_{CCA}$ | $V_{CCA}$ supply current | $V_I$ = $V_{CCI}$ or GND $I_O$ = 0 | 1.71V – 5.5V | 1.71V – 5.5V | 547 | | 1365 | µA |
| | | | 0V | 5.5V | -2.6 | | 25 | |
| | | | 5.5V | 0V | 625 | | 1052 | |
| | | $V_I$ = GND $I_O$ = 0 | 5.5V | Floating(3) | 625 | | 1052 | |
| $I_{CCB}$ | $V_{CCB}$ supply current | $V_I$ = $V_{CCI}$ or GND $I_O$ = 0 | 1.71V – 5.5V | 1.71V – 5.5V | 753 | | 1692 | µA |
| | | | 0V | 5.5V | 819 | | 1380 | |
| | | | 5.5V | 0V | -2.4 | | 25 | |
| | | $V_I$ = GND $I_O$ = 0 | Floating(3) | 5.5V | 823 | | 1380 | |
| $I_{CCA}$ + $I_{CCB}$ | Supply Current - Disable | EN = 0 | 1.8V | 1.8V | 1.9 | | 3.1 | mA |
| | | | 2.5V | 2.5V | 1.9 | | 3.1 | |
| | | | 3.3V | 3.3V | 2 | | 3.1 | |
| | | | 5V | 5V | 2.1 | | 3.3 | |


Copyright © 2025 Texas Instruments Incorporated

over operating free-air temperature range (unless otherwise noted)(1) (2)

| PARAMETER | | TEST CONDITIONS | $V_{CCA}$ | $V_{CCB}$ | Operating free-air temperature ($T_A$) | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | –40°C to 125°C | | | |
| | | | | | MIN | TYP | MAX | |
| $I_{CCA}$ + $I_{CCB}$ | Supply Current - DC Signal | $V_I$ = $V_{CCI}$ | 1.8V | 1.8V | 1.2 | | 2.7 | mA |
| | | | 2.5V | 2.5V | 1.3 | | 2.6 | |
| | | | 3.3V | 3.3V | 1.3 | | 2.7 | |
| | | | 5V | 5V | 1.4 | | 3.1 | |
| | | $V_I$ = GND | 1.8V | 1.8V | 1.2 | | 2.7 | |
| | | | 2.5V | 2.5V | 1.3 | | 2.6 | |
| | | | 3.3V | 3.3V | 1.3 | | 2.7 | |
| | | | 5V | 5V | 1.4 | | 3.1 | |
| $I_{CCA}$ + $I_{CCB}$ | Supply Current - AC Signal | All channels switching with square wave clock input; $C_L$ = 15pF, 1Mbps | 1.8V | 1.8V | 1.5 | | 2.6 | mA |
| | | | 2.5V | 2.5V | 1.6 | | 2.7 | |
| | | | 3.3V | 3.3V | 1.6 | | 2.8 | |
| | | | 5V | 5V | 1.9 | | 3.3 | |
| | | All channels switching with square wave clock input; $C_L$ = 15pF, 50Mbps | 1.8V | 1.8V | 9.5 | | 12.9 | |
| | | | 2.5V | 2.5V | 10.6 | | 13.9 | |
| | | | 3.3V | 3.3V | 12.9 | | 15.9 | |
| | | | 5V | 5V | 17.7 | | 20.8 | |
| | | All channels switching with square wave clock input; $C_L$ = 15pF, 100Mbps | 1.8V | 1.8V | 16.5 | | 20 | |
| | | | 2.5V | 2.5V | 20.5 | | 25.2 | |
| | | | 3.3V | 3.3V | 24.4 | | 28.7 | |
| | | | 5V | 5V | 34.9 | | 38.4 | |

(1) $V_{CCI}$ is the $V_{CC}$ associated with the input port
(2) $V_{CCO}$ is the $V_{CC}$ associated with the output port
(3) Floating is defined as a node that is both not actively driven by an external device and has leakage not exeeding 10nA

Copyright © 2025 Texas Instruments Incorporated

## 5.7 Switching Characteristics, $V_{CCA}$ = 1.8 ± 0.15V

| PARAMETER | | TEST CONDITIONS | FROM | TO | TEMPERATURE | B-Port Supply Voltage ($V_{CCB}$) | | | | | | | | | | | | UNIT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 1.8 ± 0.15V | | | 2.5 ± 0.2V | | | 3.3 ± 0.3V | | | 5.0 ± 0.5V | | | |
| | | | | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| $t_{pd}$ | Propagation delay | 1Mbps all 4 channels toggling | A | B | -40°C to 85°C | 3 | | 7.4 | 3 | | 7.5 | 3.1 | | 7.5 | 3.1 | | 7.9 | ns |
| | | | A | B | -40°C to 125°C | 3 | | 7.8 | 3 | | 7.8 | 3.1 | | 7.9 | 3.1 | | 8.4 | |
| | | | B | A | -40°C to 85°C | 3 | | 7.4 | 2.8 | | 5.8 | 2.8 | | 5.2 | 2.8 | | 4.9 | |
| | | | B | A | -40°C to 125°C | 3 | | 7.8 | 2.8 | | 6.1 | 2.8 | | 5.5 | 2.8 | | 5.2 | |
| $t_{dis}$ | Disable time | | OE | A | -40°C to 85°C | 16.1 | | 35 | 16.1 | | 35 | 16.1 | | 35 | 16.1 | | 35 | ns |
| | | | OE | A | -40°C to 125°C | 16.1 | | 35.6 | 16.1 | | 35.5 | 16.1 | | 35.6 | 16.1 | | 35.6 | |
| | | | OE | B | -40°C to 85°C | 17.6 | | 40.9 | 12.6 | | 28.2 | 14.7 | | 27.4 | 10 | | 18.8 | |
| | | | OE | B | -40°C to 125°C | 17.6 | | 42 | 12.6 | | 29.1 | 14.7 | | 28 | 10 | | 19.3 | |
| $t_{en}$ | Enable time | | OE | A | -40°C to 85°C | 5.4 | | 18.1 | 5.4 | | 18.1 | 5.4 | | 18.1 | 5.4 | | 18.1 | ns |
| | | | OE | A | -40°C to 125°C | 5.4 | | 18.9 | 5.4 | | 18.8 | 5.4 | | 18.9 | 5.4 | | 18.8 | |
| | | | OE | B | -40°C to 85°C | 7.5 | | 26.5 | 5.5 | | 15.3 | 4.5 | | 11 | 3.8 | | 7.9 | |
| | | | OE | B | -40°C to 125°C | 7.9 | | 27.5 | 5.5 | | 16.3 | 4.5 | | 11.8 | 3.8 | | 8.4 | |
| PWD | Pulse width distortion | $\lvert t_{phl} - t_{plh} \rvert$ | A | B | -40°C to 85°C | 0.7 | | 1.5 | 0.6 | | 1.4 | 0.6 | | 1.3 | 0.5 | | 1.2 | ns |
| | | | A | B | -40°C to 125°C | 0.7 | | 1.5 | 0.6 | | 1.4 | 0.6 | | 1.3 | 0.5 | | 1.2 | |
| | | | B | A | -40°C to 85°C | 0.7 | | 1.5 | 0.6 | | 1.4 | 0.6 | | 1.3 | 0.5 | | 1.2 | |
| | | | B | A | -40°C to 125°C | 0.7 | | 1.5 | 0.6 | | 1.4 | 0.6 | | 1.3 | 0.5 | | 1.2 | |
| $t_r$ | Output signal rise time | | A | B | -40°C to 85°C | 0.6 | | 1.1 | 0.5 | | 1.2 | 0.5 | | 1.5 | 0.6 | | 1.8 | ns |
| | | | A | B | -40°C to 125°C | 0.6 | | 1.3 | 0.5 | | 1.5 | 0.5 | | 1.6 | 0.6 | | 1.9 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 0.9 | 0.5 | | 1 | 0.5 | | 0.9 | 0.5 | | 0.9 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1 | 0.5 | | 1.1 | 0.5 | | 1 | 0.5 | | 1.1 | |
| tf | Output signal fall time | | A | B | -40°C to 85°C | 0.5 | | 1.3 | 0.5 | | 1.6 | 0.5 | | 1.6 | 0.6 | | 1.9 | ns |
| | | | A | B | -40°C to 125°C | 0.5 | | 1.6 | 0.5 | | 1.8 | 0.5 | | 1.9 | 0.6 | | 2.2 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 1.1 | 0.5 | | 1.1 | 0.5 | | 1.1 | 0.5 | | 1.1 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1.4 | 0.5 | | 1.5 | 0.5 | | 1.4 | 0.5 | | 1.4 | |
| $t_{DO}$ | Default output delay time from input power loss | Measured from the time $V_{CC}$ goes below 1.36V | | | -40°C to 85°C | | | 8.4 | | | 8.3 | | | 8.2 | | | 8 | µs |
| | | | | | -40°C to 125°C | | | 8.4 | | | 8.3 | | | 8.2 | | | 8 | |
| $t_{PU}$ | Time from ULVO to valid output data | | | | -40°C to 85°C | | | 66.8 | | | 66.8 | | | 66.8 | | | 66.9 | µs |
| | | | | | -40°C to 125°C | | | 66.8 | | | 66.8 | | | 66.8 | | | 66.9 | |


Copyright © 2025 Texas Instruments Incorporated

## 5.8 Switching Characteristics, $V_{CCA}$ = 2.5 ± 0.2V

| PARAMETER | | TEST CONDITIONS | FROM | TO | TEMPERATURE | B-Port Supply Voltage ($V_{CCB}$) | | | | | | | | | | | | UNIT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 1.8 ± 0.15V | | | 2.5 ± 0.2V | | | 3.3 ± 0.3V | | | 5.0 ± 0.5V | | | |
| | | | | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| $t_{pd}$ | Propagation delay | 1Mbps all 4 channels toggling | A | B | -40°C to 85°C | 2.9 | | 5.9 | 2.9 | | 5.9 | 2.9 | | 6 | 3 | | 6.2 | ns |
| | | | A | B | -40°C to 125°C | 2.9 | | 6.1 | 2.9 | | 6.2 | 2.9 | | 6.3 | 3 | | 6.6 | |
| | | | B | A | -40°C to 85°C | 3 | | 7.4 | 2.9 | | 5.9 | 2.8 | | 5.2 | 2.8 | | 5 | |
| | | | B | A | -40°C to 125°C | 3 | | 7.8 | 2.9 | | 6.2 | 2.8 | | 5.6 | 2.8 | | 5.4 | |
| $t_{dis}$ | Disable time | | OE | A | -40°C to 85°C | 11.6 | | 24.7 | 11.6 | | 24.7 | 11.6 | | 24.7 | 11.6 | | 24.7 | ns |
| | | | OE | A | -40°C to 125°C | 11.6 | | 25.2 | 11.6 | | 25.2 | 11.6 | | 25.2 | 11.6 | | 25.2 | |
| | | | OE | B | -40°C to 85°C | 17.6 | | 40.9 | 12.6 | | 28.3 | 14.7 | | 27.4 | 10.1 | | 18.8 | |
| | | | OE | B | -40°C to 125°C | 17.6 | | 41.9 | 12.6 | | 29.1 | 14.7 | | 28 | 10.1 | | 19.3 | |
| $t_{en}$ | Enable time | | OE | A | -40°C to 85°C | 3.8 | | 10.9 | 3.8 | | 10.9 | 3.8 | | 10.9 | 3.8 | | 10.9 | ns |
| | | | OE | A | -40°C to 125°C | 3.8 | | 11.6 | 3.8 | | 11.6 | 3.8 | | 11.6 | 3.8 | | 11.6 | |
| | | | OE | B | -40°C to 85°C | 7.5 | | 26.5 | 5.5 | | 15.3 | 4.5 | | 11 | 3.8 | | 7.8 | |
| | | | OE | B | -40°C to 125°C | 7.9 | | 27.5 | 5.5 | | 16.3 | 4.5 | | 11.8 | 3.8 | | 8.4 | |
| PWD | Pulse width distortion | $\lvert t_{phl} - t_{plh} \rvert$ | A | B | -40°C to 85°C | 0.1 | | 0.6 | 0.1 | | 0.57 | 0.002 | | 0.56 | 0.002 | | 0.48 | ns |
| | | | A | B | -40°C to 125°C | 0.1 | | 0.6 | 0.1 | | 0.57 | 0.002 | | 0.56 | 0.002 | | 0.48 | |
| | | | B | A | -40°C to 85°C | 0.1 | | 0.6 | 0.1 | | 0.57 | 0.002 | | 0.56 | 0.002 | | 0.48 | |
| | | | B | A | -40°C to 125°C | 0.1 | | 0.6 | 0.1 | | 0.57 | 0.002 | | 0.56 | 0.002 | | 0.48 | |
| $t_r$ | Output signal rise time | | A | B | -40°C to 85°C | 0.6 | | 1.1 | 0.5 | | 1.2 | 0.5 | | 1.5 | 0.6 | | 1.8 | ns |
| | | | A | B | -40°C to 125°C | 0.6 | | 1.3 | 0.5 | | 1.4 | 0.5 | | 1.7 | 0.6 | | 1.9 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 1 | 0.5 | | 1 | 0.5 | | 1 | 0.5 | | 1 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1.1 | 0.5 | | 1.2 | 0.5 | | 1.2 | 0.5 | | 1.1 | |
| tf | Output signal fall time | | A | B | -40°C to 85°C | 0.5 | | 1.2 | 0.5 | | 1.5 | 0.5 | | 1.7 | 0.5 | | 1.9 | ns |
| | | | A | B | -40°C to 125°C | 0.5 | | 1.6 | 0.5 | | 1.7 | 0.5 | | 1.8 | 0.5 | | 2.1 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 1.3 | 0.5 | | 1.3 | 0.5 | | 1.4 | 0.5 | | 1.3 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1.5 | 0.5 | | 1.5 | 0.5 | | 1.5 | 0.5 | | 1.6 | |
| $t_{DO}$ | Default output delay time from input power loss | Measured from the time $V_{CC}$ goes below 1.36V | | | -40°C to 85°C | | | 8.1 | | | 8.1 | | | 8 | | | 7.8 | µs |
| | | | | | -40°C to 125°C | | | 8.1 | | | 8.1 | | | 8 | | | 7.8 | |
| $t_{PU}$ | Time from ULVO to valid output data | | | | -40°C to 85°C | | | 71.3 | | | 71.3 | | | 71.3 | | | 71.3 | µs |
| | | | | | -40°C to 125°C | | | 71.3 | | | 71.3 | | | 71.3 | | | 71.3 | |

Copyright © 2025 Texas Instruments Incorporated

## 5.9 Switching Characteristics, $V_{CCA}$ = 3.3 ± 0.3V

| PARAMETER | | TEST CONDITIONS | FROM | TO | TEMPERATURE | B-Port Supply Voltage ($V_{CCB}$) | | | | | | | | | | | | UNIT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 1.8 ± 0.15V | | | 2.5 ± 0.2V | | | 3.3 ± 0.3V | | | 5.0 ± 0.5V | | | |
| | | | | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| $t_{pd}$ | Propagation delay | 1Mbps all 4 channels toggling | A | B | -40°C to 85°C | 2.9 | | 5.2 | 2.9 | | 5.3 | 2.8 | | 5.4 | 3 | | 5.7 | ns |
| | | | A | B | -40°C to 125°C | 2.9 | | 5.5 | 2.9 | | 5.6 | 2.8 | | 5.8 | 3 | | 6.1 | |
| | | | B | A | -40°C to 85°C | 3 | | 7.5 | 2.9 | | 5.9 | 2.8 | | 5.3 | 2.8 | | 5.1 | |
| | | | B | A | -40°C to 125°C | 3 | | 7.9 | 2.9 | | 6.3 | 2.8 | | 5.7 | 2.8 | | 5.5 | |
| $t_{dis}$ | Disable time | | OE | A | -40°C to 85°C | 13.9 | | 25.3 | 13.8 | | 25.3 | 13.8 | | 25.3 | 13.8 | | 25.3 | ns |
| | | | OE | A | -40°C to 125°C | 13.9 | | 25.7 | 13.8 | | 25.7 | 13.8 | | 25.7 | 13.8 | | 25.7 | |
| | | | OE | B | -40°C to 85°C | 17.6 | | 40.9 | 12.6 | | 28.2 | 14.7 | | 27.4 | 10.1 | | 18.8 | |
| | | | OE | B | -40°C to 125°C | 17.6 | | 41.9 | 12.6 | | 29 | 14.7 | | 28 | 10.1 | | 19.3 | |
| $t_{en}$ | Enable time | | OE | A | -40°C to 85°C | 3 | | 8 | 3.1 | | 8 | 3.1 | | 8 | 3 | | 8 | ns |
| | | | OE | A | -40°C to 125°C | 3 | | 8.5 | 3.1 | | 8.5 | 3.1 | | 8.6 | 3 | | 8.5 | |
| | | | OE | B | -40°C to 85°C | 7.5 | | 26.5 | 5.5 | | 15.3 | 4.5 | | 11 | 3.8 | | 7.8 | |
| | | | OE | B | -40°C to 125°C | 8 | | 27.5 | 5.5 | | 16.3 | 4.5 | | 11.8 | 3.8 | | 8.4 | |
| PWD | Pulse width distortion | $\lvert t_{phl} - t_{plh} \rvert$ | A | B | -40°C to 85°C | 0.006 | | 0.37 | 0.002 | | 0.37 | 0.001 | | 0.34 | 0 | | 0.36 | ns |
| | | | A | B | -40°C to 125°C | 0.006 | | 0.37 | 0.002 | | 0.37 | 0.001 | | 0.34 | 0 | | 0.36 | |
| | | | B | A | -40°C to 85°C | 0.006 | | 0.37 | 0.002 | | 0.37 | 0.001 | | 0.34 | 0 | | 0.36 | |
| | | | B | A | -40°C to 125°C | 0.006 | | 0.37 | 0.002 | | 0.37 | 0.001 | | 0.34 | 0 | | 0.36 | |
| $t_r$ | Output signal rise time | | A | B | -40°C to 85°C | 0.6 | | 1.1 | 0.6 | | 1.2 | 0.5 | | 1.5 | 0.6 | | 1.8 | ns |
| | | | A | B | -40°C to 125°C | 0.6 | | 1.3 | 0.6 | | 1.5 | 0.5 | | 1.7 | 0.6 | | 1.9 | |
| | | | B | A | -40°C to 85°C | 0.6 | | 1.1 | 0.6 | | 1.2 | 0.5 | | 1.5 | 0.6 | | 1.8 | |
| | | | B | A | -40°C to 125°C | 0.6 | | 1.3 | 0.6 | | 1.5 | 0.5 | | 1.7 | 0.6 | | 1.9 | |
| tf | Output signal fall time | | A | B | -40°C to 85°C | 0.5 | | 1.2 | 0.5 | | 1.6 | 0.5 | | 1.6 | 0.6 | | 1.9 | ns |
| | | | A | B | -40°C to 125°C | 0.5 | | 1.7 | 0.5 | | 1.7 | 0.5 | | 1.8 | 0.6 | | 2.1 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 1.4 | 0.5 | | 1.5 | 0.5 | | 1.4 | 0.5 | | 1.5 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1.7 | 0.5 | | 1.7 | 0.5 | | 1.7 | 0.5 | | 1.6 | |
| $t_{DO}$ | Default output delay time from input power loss | Measured from the time $V_{CC}$ goes below 1.36V | | | -40°C to 85°C | | | 8 | | | 7.9 | | | 7.9 | | | 7.7 | µs |
| | | | | | -40°C to 125°C | | | 8 | | | 7.9 | | | 7.9 | | | 7.7 | µs |
| $t_{PU}$ | Time from ULVO to valid output data | | | | -40°C to 85°C | | | 79.1 | | | 79.1 | | | 79.1 | | | 79.1 | µs |
| | | | | | -40°C to 125°C | | | 79.1 | | | 79.1 | | | 79.1 | | | 79.1 | µs |


Copyright © 2025 Texas Instruments Incorporated

## 5.10 Switching Characteristics, $V_{CCA}$ = 5.0 ± 0.5V

| PARAMETER | | TEST CONDITIONS | FROM | TO | TEMPERATURE | B-Port Supply Voltage ($V_{CCB}$) | | | | | | | | | | | | UNIT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | 1.8 ± 0.15V | | | 2.5 ± 0.2V | | | 3.3 ± 0.3V | | | 5.0 ± 0.5V | | | |
| | | | | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| $t_{pd}$ | Propagation delay | 1Mbps all 4 channels toggling | A | B | -40°C to 85°C | 2.8 | | 5 | 2.8 | | 5 | 2.9 | | 5.2 | 2.9 | | 5.5 | ns |
| | | | A | B | -40°C to 125°C | 2.8 | | 5.3 | 2.8 | | 5.3 | 2.9 | | 5.6 | 2.9 | | 5.9 | |
| | | | B | A | -40°C to 85°C | 3.1 | | 7.8 | 3 | | 6.3 | 2.9 | | 5.7 | 2.8 | | 5.6 | |
| | | | B | A | -40°C to 125°C | 3.1 | | 8.3 | 3 | | 6.6 | 2.9 | | 6.1 | 2.8 | | 5.8 | |
| $t_{dis}$ | Disable time | | OE | A | -40°C to 85°C | 9.4 | | 17.4 | 9.4 | | 17.4 | 9.4 | | 17.4 | 9.4 | | 17.4 | ns |
| | | | OE | A | -40°C to 125°C | 9.4 | | 17.7 | 9.4 | | 17.7 | 9.4 | | 17.7 | 9.4 | | 17.7 | |
| | | | OE | B | -40°C to 85°C | 17.7 | | 40.9 | 12.6 | | 28.3 | 14.7 | | 27.4 | 10.1 | | 18.8 | |
| | | | OE | B | -40°C to 125°C | 17.7 | | 41.9 | 12.6 | | 29.1 | 14.7 | | 28 | 10.1 | | 19.4 | |
| $t_{en}$ | Enable time | | OE | A | -40°C to 85°C | 2.5 | | 5.9 | 2.5 | | 5.9 | 2.5 | | 5.9 | 2.5 | | 5.9 | ns |
| | | | OE | A | -40°C to 125°C | 2.5 | | 6.3 | 2.5 | | 6.3 | 2.5 | | 6.3 | 2.5 | | 6.3 | |
| | | | OE | B | -40°C to 85°C | 7.5 | | 26.5 | 5.5 | | 15.3 | 4.5 | | 11 | 3.8 | | 7.8 | |
| | | | OE | B | -40°C to 125°C | 8 | | 27.5 | 5.5 | | 16.3 | 4.5 | | 11.8 | 3.8 | | 8.4 | |
| PWD | Pulse width distortion | $\lvert t_{phl} - t_{plh} \rvert$ | A | B | -40°C to 85°C | 0 | | 0.2 | 0 | | 0.3 | 0.003 | | 0.4 | 0.011 | | 0.7 | ns |
| | | | A | B | -40°C to 125°C | 0 | | 0.2 | 0 | | 0.3 | 0.003 | | 0.4 | 0.011 | | 0.7 | |
| | | | B | A | -40°C to 85°C | 0 | | 0.2 | 0 | | 0.3 | 0.003 | | 0.4 | 0.011 | | 0.7 | |
| | | | B | A | -40°C to 125°C | 0 | | 0.2 | 0 | | 0.3 | 0.003 | | 0.4 | 0.011 | | 0.7 | |
| $t_r$ | Output signal rise time | | A | B | -40°C to 85°C | 0.6 | | 1.1 | 0.5 | | 1.1 | 0.5 | | 1.6 | 0.6 | | 1.8 | ns |
| | | | A | B | -40°C to 125°C | 0.6 | | 1.3 | 0.5 | | 1.5 | 0.5 | | 1.7 | 0.6 | | 1.9 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 1.6 | 0.5 | | 1.6 | 0.5 | | 1.7 | 0.5 | | 1.7 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1.7 | 0.5 | | 1.7 | 0.5 | | 1.8 | 0.5 | | 1.7 | |
| tf | Output signal fall time | | A | B | -40°C to 85°C | 0.5 | | 1.4 | 0.4 | | 1.6 | 0.5 | | 1.8 | 0.6 | | 1.9 | ns |
| | | | A | B | -40°C to 125°C | 0.5 | | 1.7 | 0.5 | | 1.7 | 0.5 | | 1.8 | 0.6 | | 2.2 | |
| | | | B | A | -40°C to 85°C | 0.5 | | 1.4 | 0.5 | | 1.6 | 0.5 | | 1.8 | 0.6 | | 1.9 | |
| | | | B | A | -40°C to 125°C | 0.5 | | 1.7 | 0.5 | | 1.7 | 0.5 | | 1.8 | 0.6 | | 2.2 | |
| $t_{DO}$ | Default output delay time from input power loss | Measured from the time $V_{CC}$ goes below 1.36V | | | -40°C to 85°C | | | 7.9 | | | 7.8 | | | 7.7 | | | 7.6 | µs |
| | | | | | -40°C to 125°C | | | 7.9 | | | 7.8 | | | 7.7 | | | 7.6 | |
| $t_{PU}$ | Time from ULVO to valid output data | | | | -40°C to 85°C | | | 98.3 | | | 98.3 | | | 98.3 | | | 98.3 | µs |
| | | | | | -40°C to 125°C | | | 98.3 | | | 98.3 | | | 98.3 | | | 98.3 | |

Copyright © 2025 Texas Instruments Incorporated

## 5.11 Switching Characteristics: $T_{sk}$, $T_{MAX}$

over operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | | $V_{CCI}$ | $V_{CCO}$ | Operating free-air temperature ($T_A$) -40°C to 125°C | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | MIN | TYP | MAX | |
| $T_{MAX}$ - Maximum Data Rate | 50% Duty Cycle Input<br>One channel switching<br>20% of pulse > 0.7*$V_{CCO}$<br>20% of pulse < 0.3*$V_{CCO}$ | No Translation | 1.65V - 1.95V | 1.65V - 1.95V | 264 | | | Mbps |
| | | | 2.3V - 2.7V | 2.3V - 2.7V | 264 | | | Mbps |
| | | | 3.0V - 3.6V | 3.0V - 3.6V | 176 | | | Mbps |
| | | | 4.5V - 5.5V | 4.5V - 5.5V | 176 | | | Mbps |
| $T_{MAX}$ - Maximum Data Rate | 50% Duty Cycle Input<br>One channel switching<br>20% of pulse > 0.7*$V_{CCO}$<br>20% of pulse < 0.3*$V_{CCO}$ | Up Translation | 1.65V - 1.95V | 2.3V - 2.7V | 264 | | | Mbps |
| | | | 1.65V - 1.95V | 3.0V - 3.6V | 264 | | | Mbps |
| | | | 1.65V - 1.95V | 4.5V - 5.5V | 264 | | | Mbps |
| | | | 2.3V - 2.7V | 3.0V - 3.6V | 264 | | | Mbps |
| | | | 2.3V - 2.7V | 4.5V - 5.5V | 220 | | | Mbps |
| | | | 3.0V - 3.6V | 4.5V - 5.5V | 176 | | | Mbps |
| $T_{MAX}$ - Maximum Data Rate | 50% Duty Cycle Input<br>One channel switching<br>20% of pulse > 0.7*$V_{CCO}$<br>20% of pulse < 0.3*$V_{CCO}$ | Down Translation | 2.3V - 2.7V | 1.65V - 1.95V | 285 | | | Mbps |
| | | | 3.0V - 3.6V | 2.3V - 2.7V | 220 | | | Mbps |
| | | | 3.0V - 3.6V | 1.65V - 1.95V | 220 | | | Mbps |
| | | | 4.5V - 5.5V | 3.0V - 3.6V | 176 | | | Mbps |
| | | | 4.5V - 5.5V | 2.3V - 2.7V | 220 | | | Mbps |
| | | | 4.5V - 5.5V | 1.65V - 1.95V | 220 | | | Mbps |
| $t_{sk}$ - Output skew | Timing skew between any switching outputs on the rising or falling edge (same direction channels) | No Translation | 1.65V - 1.95V | 1.65V - 1.95V | | | 0.35 | ns |
| | | | 2.3V - 2.7V | 2.3V - 2.7V | | | 0.35 | ns |
| | | | 3.0V - 3.6V | 3.0V - 3.6V | | | 0.35 | ns |
| | | | 4.5V - 5.5V | 4.5V - 5.5V | | | 0.35 | ns |
| $t_{sk}$ - Output skew | Timing skew between any switching outputs on the rising or falling edge (same direction channels) | Up Translation | 1.65V - 1.95V | 2.3V - 2.7V | | | 0.35 | ns |
| | | | 1.65V - 1.95V | 3.0V - 3.6V | | | 0.35 | ns |
| | | | 1.65V - 1.95V | 4.5V - 5.5V | | | 0.35 | ns |
| | | | 2.3V - 2.7V | 3.0V - 3.6V | | | 0.35 | ns |
| | | | 2.3V - 2.7V | 4.5V - 5.5V | | | 0.35 | ns |
| | | | 3.0V - 3.6V | 4.5V - 5.5V | | | 0.35 | ns |


Copyright © 2025 Texas Instruments Incorporated

over operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | | $V_{CCI}$ | $V_{CCO}$ | Operating free-air temperature ($T_A$) | | | UNIT |
|---|---|---|---|---|---|---|---|---|
| | | | | | -40°C to 125°C | | | |
| | | | | | MIN | TYP | MAX | |
| $t_{sk}$ - Output skew | Timing skew between any switching outputs on the rising or falling edge (same direction channels) | Down Translation | 2.3V - 2.7V | 1.65V - 1.95V | | | 0.35 | ns |
| | | | 3.0V - 3.6V | 2.3V - 2.7V | | | 0.35 | ns |
| | | | 3.0V - 3.6V | 1.65V - 1.95V | | | 0.35 | ns |
| | | | 4.5V - 5.5V | 3.0V - 3.6V | | | 0.35 | ns |
| | | | 4.5V - 5.5V | 2.3V - 2.7V | | | 0.35 | ns |
| | | | 4.5V - 5.5V | 1.65V - 1.95V | | | 0.35 | ns |

Copyright © 2025 Texas Instruments Incorporated

## 5.12 Typical Characteristics

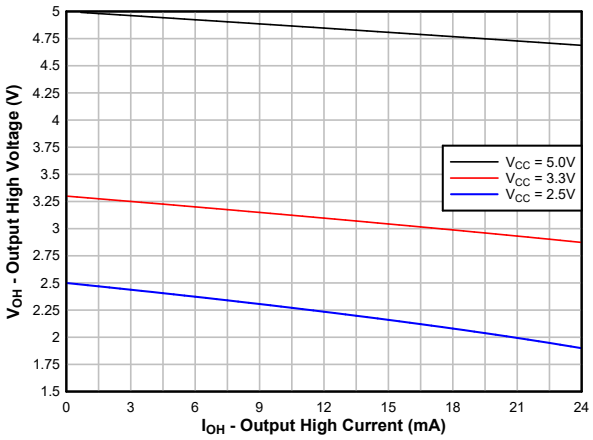



**Figure 5-1. Typical ($T_A$=25°C) Output High Voltage ($V_{OH}$) vs Source Current ($I_{OH}$)**

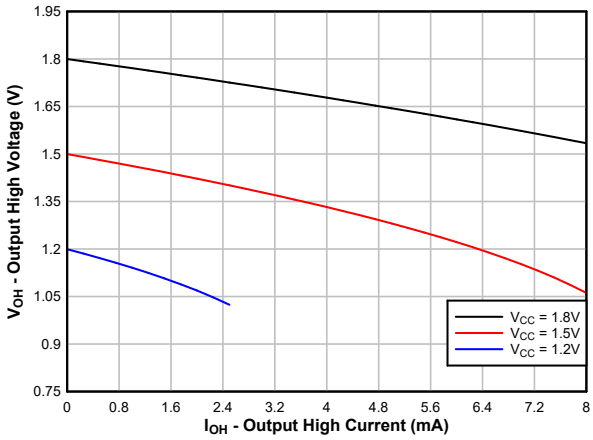



**Figure 5-2. Typical ($T_A$=25°C) Output High Voltage ($V_{OH}$) vs Source Current ($I_{OH}$)**

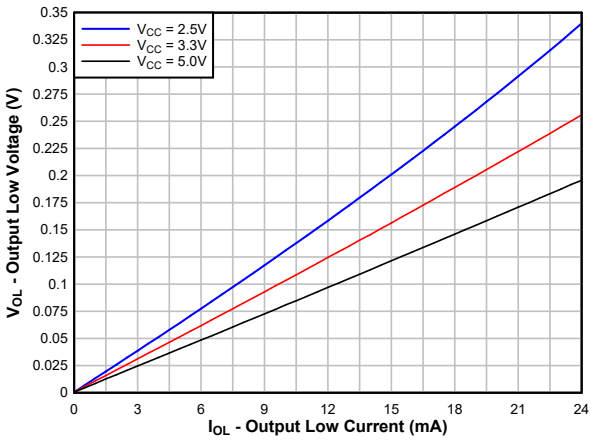



**Figure 5-3. Typical ($T_A$=25°C) Output Low Voltage ($V_{OL}$) vs Sink Current ($I_{OL}$)**

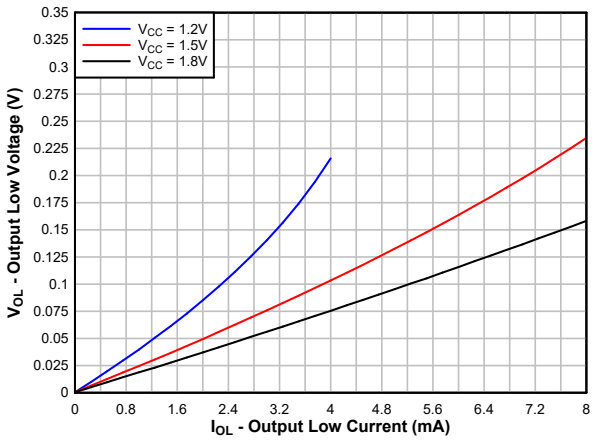



**Figure 5-4. Typical ($T_A$=25°C) Output Low Voltage ($V_{OL}$) vs Sink Current ($I_{OL}$)**

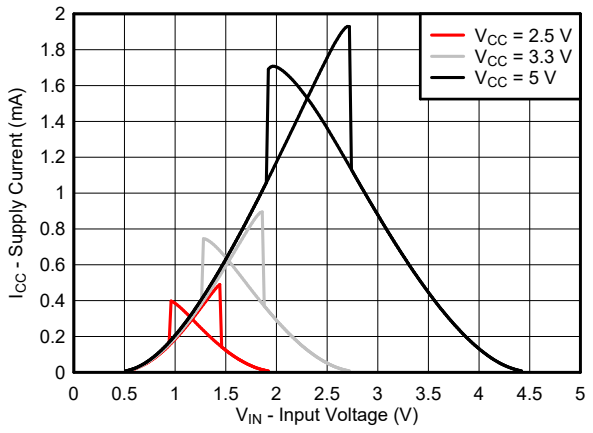



**Figure 5-5. Typical ($T_A$=25°C) Supply Current ($I_{CC}$) vs Input Voltage ($V_{IN}$)**

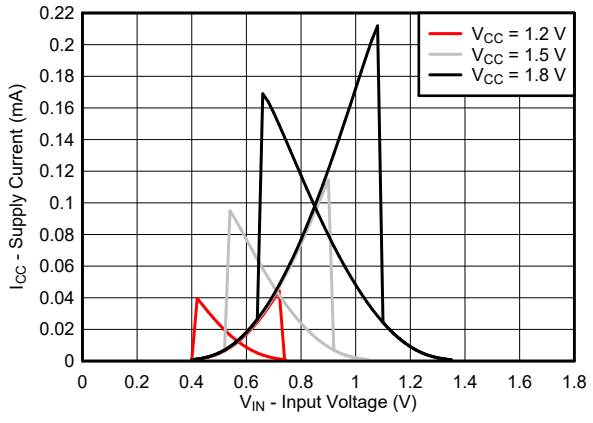



**Figure 5-6. Typical ($T_A$=25°C) Supply Current ($I_{CC}$) vs Input Voltage ($V_{IN}$)**



Copyright © 2025 Texas Instruments Incorporated

# 6 Parameter Measurement Information

## 6.1 Load Circuit and Voltage Waveforms

Unless otherwise noted, generators supply all input pulses that have the following characteristics:

- f = 1MHz
- $Z_O$ = 50Ω
- Δt/ΔV ≤ 1ns/V

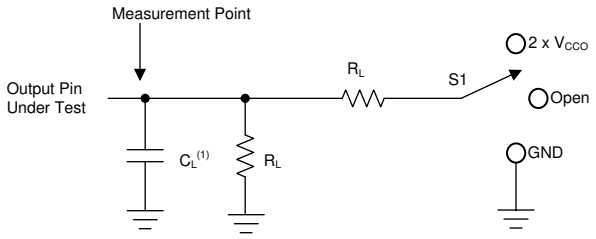



A. 1. $C_L$ includes probe and jig capacitance.

**Figure 6-1. Load Circuit**


**Table 6-1. Load Circuit Conditions**

| Parameter | | $V_{CCO}$ | $R_L$ | $C_L$ | $S_1$ | $V_{TP}$ |
|---|---|---|---|---|---|---|
| $t_{pd}$ | Propagation (delay) time | 1.71V – 5.5V | 10kΩ | 15pF | Open | N/A |
| $t_{en}$, $t_{dis}$ | Enable time, disable time | 1.71V – 2.7V | 10kΩ | 15pF | 2 × $V_{CCO}$ | 0.15V |
| | | 3.0V – 5.5V | 10kΩ | 15pF | 2 × $V_{CCO}$ | 0.3V |
| $t_{en}$, $t_{dis}$ | Enable time, disable time | 1.71V – 2.7V | 10kΩ | 15pF | GND | 0.15V |
| | | 3.0V – 5.5V | 10kΩ | 15pF | GND | 0.3V |

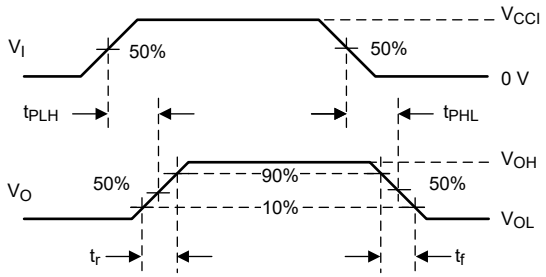



1. $V_{CCI}$ is the supply pin associated with the input port.
2. $V_{OH}$ and $V_{OL}$ are typical output voltage levels that occur with specified $R_L$, $C_L$, and $S_1$

**Figure 6-2. Switching Characteristics Voltage Waveforms**

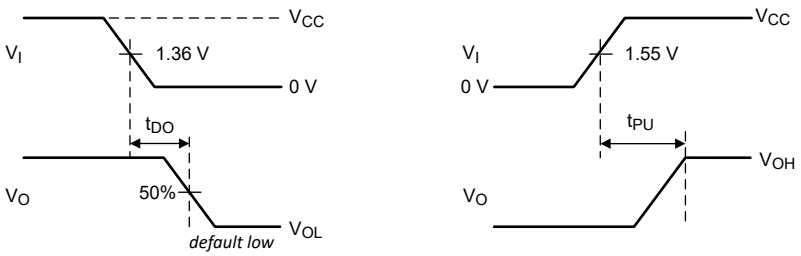



1. $V_{CCI}$ is the supply pin associated with the input port.
2. $V_{OH}$ and $V_{OL}$ are typical output voltage levels that occur with specified $R_L$, $C_L$, and $S_1$

**Figure 6-3. Default Output Delay Time & Time from UVLO to Valid Output Voltage Waveform**

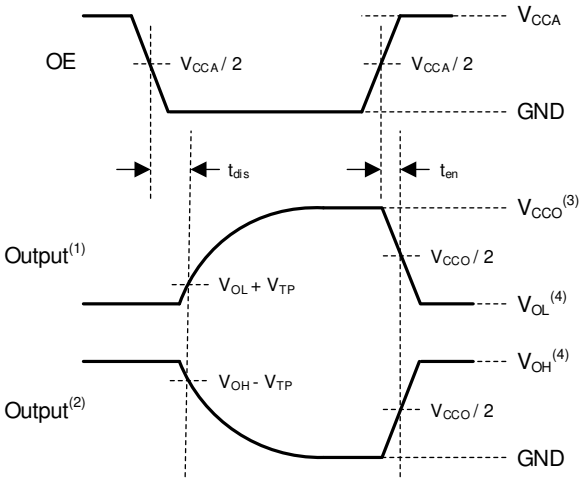


1. Output waveform on the condition that input is driven to a valid Logic Low.
2. Output waveform on the condition that input is driven to a valid Logic High.
3. $V_{CCO}$ is the supply pin associated with the output port.
4. $V_{OH}$ and $V_{OL}$ are typical output voltage levels with specified $R_L$, $C_L$, and $S_1$.

**Figure 6-4. Enable Time And Disable Time**

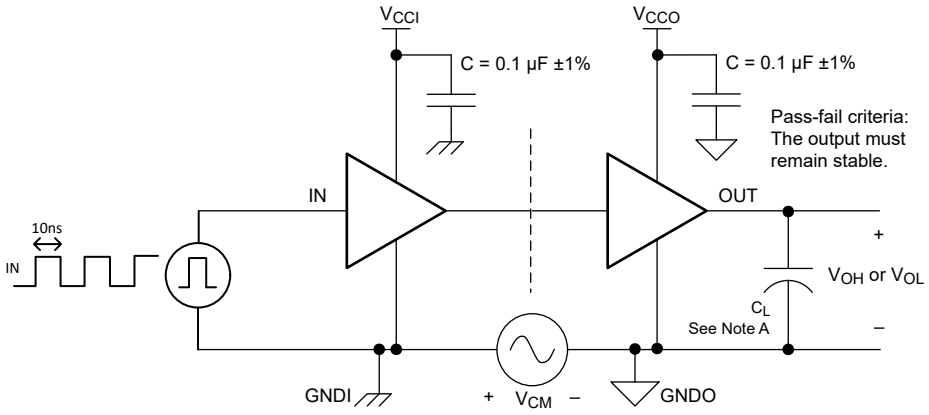


1. $C_L$ = 15pF and includes instrumentation and fixture capacitance within ±20%.

**Figure 6-5. Common-Mode Transient Immunity Test Circuit**


Copyright © 2025 Texas Instruments Incorporated

# 7 Detailed Description

## 7.1 Overview

The TXG404x is a 4-bit ground-level translator that uses two individually configurable power-supply rails, which allows it to translate across two different power domains. The device is operational with $V_{CCA}$ and $V_{CCB}$ supplies as low as 1.71V and as high as 5.5V. The A port is designed to track $V_{CCA}$ and the B port is designed to track $V_{CCB}$. In addition to I/O level shifting, this translator can support a difference of -40V to +40V between GNDA and GNDB. $V_{CCA}$ is referenced to GNDA and $V_{CCB}$ is referenced to GNDB.

The TXG404x device is designed for asynchronous communication between data buses. The TXG404x transmits data with fixed direction from the A bus to the B bus on some channels and from the B bus to the A bus on the remaining channels. The output-enable input (OE) is used to disable the outputs so the buses are effectively isolated. The OE_A pin is referenced to $V_{CCA}$ and OE_B pin is referenced to $V_{CCB}$. The OE pin can be left floating or externally pulled down to ground to keep the translator outputs in a high-impedance state during power-up or power-down.

The $V_{CC}$ disconnect feature ensures that if $V_{CC}$ is disconnected with the complementary supply within recommended operating conditions, outputs are disabled and set to the high-impedance state while the supply current is maintained. The $I_{off\text{-}float}$ circuitry is designed so that no excessive current is drawn from or sourced into an input or output while the supply is floating.

Glitch-free power supply sequencing allows for the supply rail to be powered on or off in any order, while providing robust power sequencing performance.

## 7.2 Functional Block Diagram

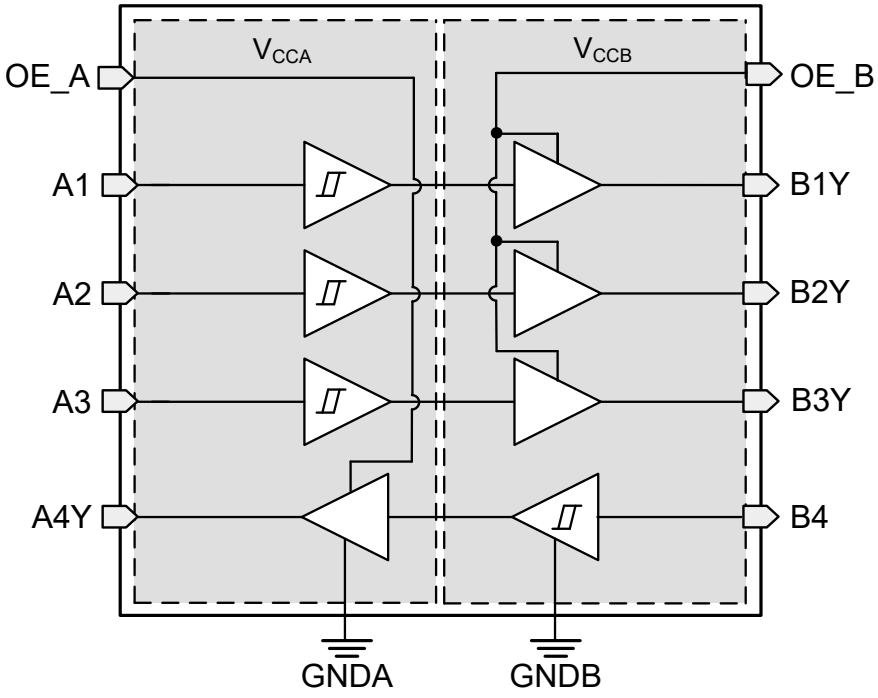



**Figure 7-1. TXG4041 Functional Block Diagram**

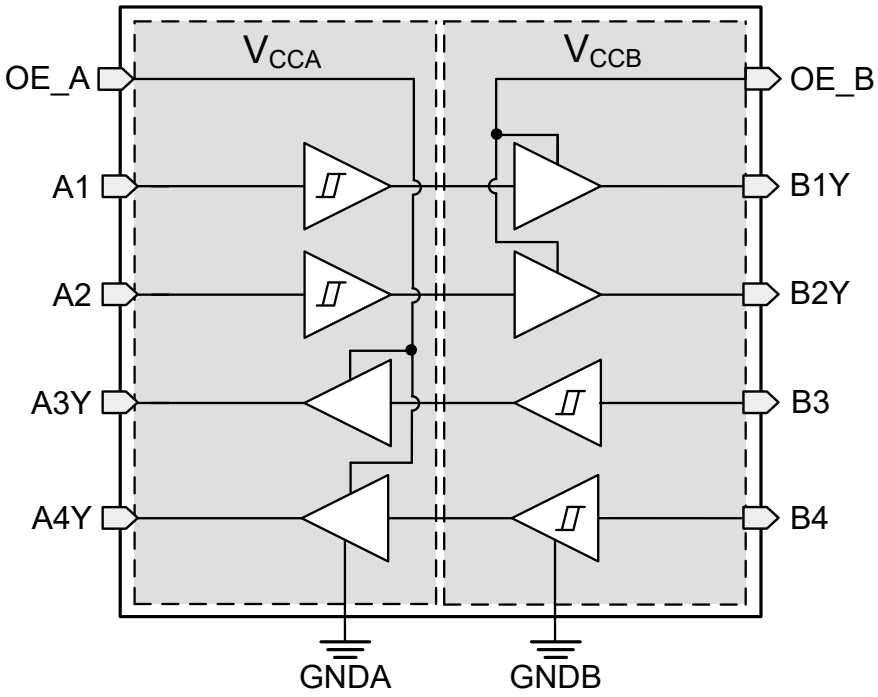



**Figure 7-2. TXG4042 Functional Block Diagram**


Copyright © 2025 Texas Instruments Incorporated

## 7.3 Feature Description

### 7.3.1 CMOS Schmitt-Trigger Inputs with Integrated Pulldowns

Standard CMOS inputs are high impedance and are typically modeled as a resistor in parallel with the input capacitance given in *Section 5.5*. The worst case resistance is calculated with the maximum input voltage, given in *Section 5.1*, and the maximum input leakage current, given in *Section 5.5*, using Ω's law (R = V ÷ I).

The Schmitt-trigger input architecture provides hysteresis as defined by $\Delta V_T$ in the electrical characteristics, which makes this device extremely tolerant to slow or noisy inputs. Driving the inputs slowly increases dynamic current consumption of the device. See Understanding Schmitt Triggers for additional information regarding Schmitt-trigger inputs.

#### 7.3.1.1 Inputs with Integrated Static Pull-Down Resistors

This device has 5MΩ typical integrated weak pull-downs for each input. This feature allows all inputs to be left floating without the concern for unstable outputs or increased current consumption. This also helps to reduce external component count for applications where not all channels are used or need to be fixed low. If an external pull-up is required, it must be no larger than 1MΩ to avoid contention with the 5MΩ internal pull-down.

### 7.3.2 Balanced High-Drive CMOS Push-Pull Outputs

A balanced output allows the device to sink and source similar currents. The high drive capability of this device creates fast edges into light loads, so routing and load conditions must be considered to prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. Section 5.1 defines the electrical and thermal limits that must be followed at all times.

### 7.3.3 $V_{CC}$ Disconnect

The outputs for this device are disabled and enter a high-impedance state when either supply is left floating (disconnected), and with the complementary supply within recommended operating conditions. It is recommended that the inputs are kept low before floating (disconnecting) either supply.

The $I_{CCx(floating)}$ in the *Section 5.5* specifies the maximum supply current. The $I_{off(float)}$ in the *Section 5.5* specifies the maximum leakage into or out of any input or output pin on the device.

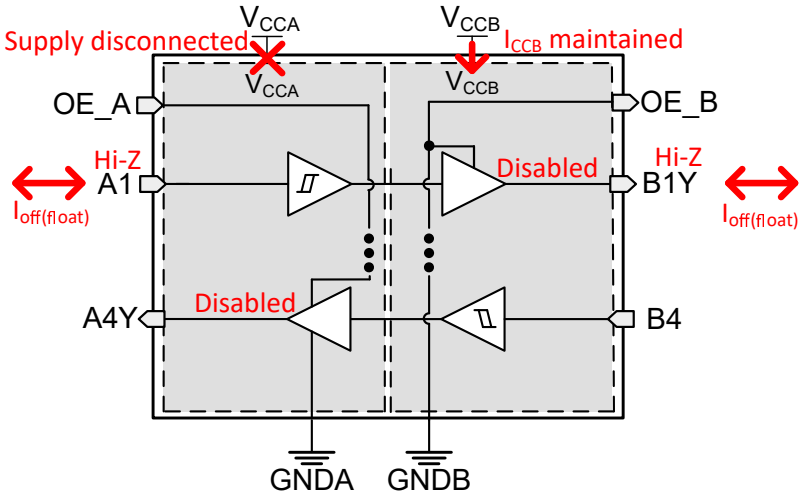



**Figure 7-3. $V_{CC}$ Disconnect Feature**

### 7.3.4 Over-Voltage Tolerant Inputs

Input signals to this device can be driven above the supply voltage so long as they remain below the maximum input voltage value specified in the *Section 5.3*.

### 7.3.5 Glitch-Free Power Supply Sequencing

Either supply rail may be powered on or off in any order without producing a glitch on the inputs or outputs (where the output erroneously transitions to VCC when it should be held low or vice versa). Glitches of this nature can be misinterpreted by a peripheral as a valid data bit, which could trigger a false device reset of the peripheral, a false device configuration of the peripheral, or a false data initialization by the peripheral.

### 7.3.6 Negative Clamping Diodes

Figure 7-4 depicts the inputs and outputs to this device that have negative clamping diodes.

**CAUTION**

Voltages beyond the values specified in the *Section 5.1* table can cause damage to the device. The input negative-voltage and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

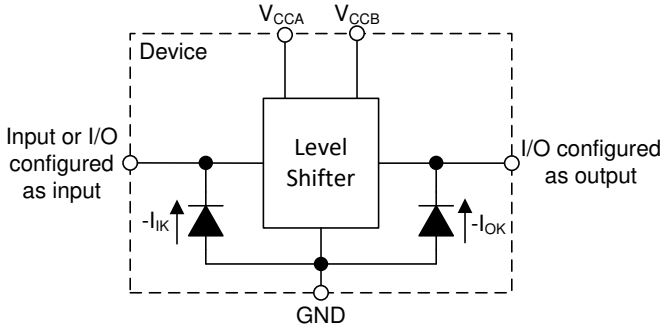



**Figure 7-4. Electrical Placement of Clamping Diodes for Each Input and Output**

### 7.3.7 Fully Configurable Dual-Rail Design

The $V_{CCA}$ and $V_{CCB}$ pins can be supplied at any voltage from 1.71V to 5.5V, making the device suitable for translating between any of the voltage nodes (1.8V, 3.3V, and 5.0V).

### 7.3.8 Supports High-Speed Translation

The TXG404x device can support high data-rate applications. The translated signal data rate can be up to 250Mbps when the signal is translated from 1.71V to 5.5V.


Copyright © 2025 Texas Instruments Incorporated

### 7.3.9 AC Noise Rejection

TXG404x supports I/O voltage translation in environments with noisy grounds. The plot below illustrates the amount of noise that GNDA and GNDB can reject in terms peak-to-peak voltage over frequency without disrupting communication between two systems. As an example, Figure 7-6 below shows GNDA with a ground bounce of $2V_{PP}$ at 10kHz but still effectively translating 5V to 2.5V without any degradation.


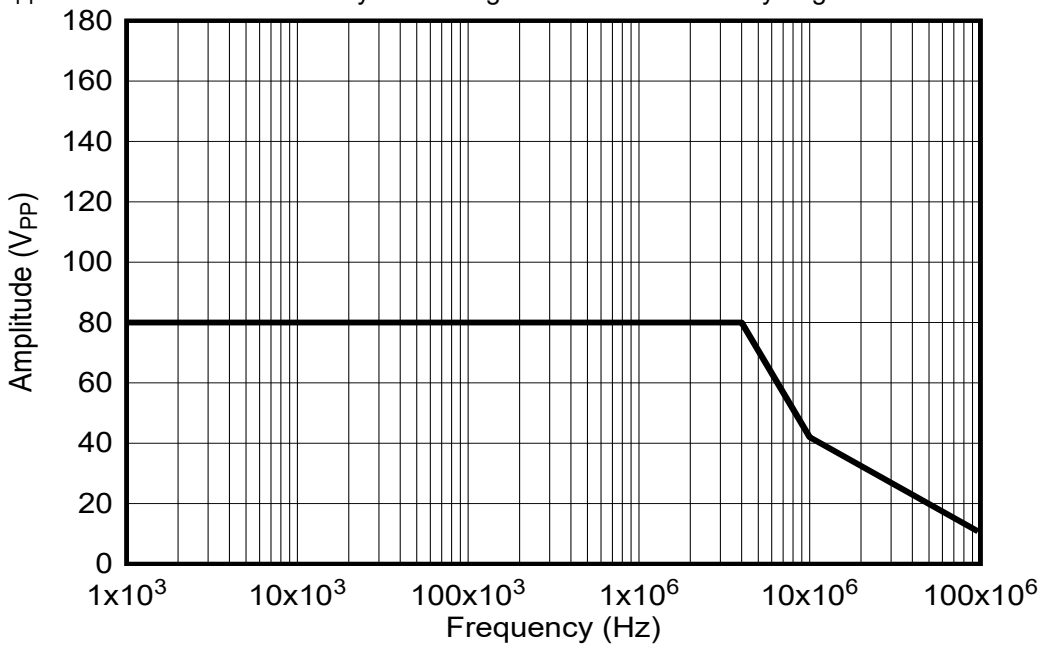



**Figure 7-5. AC Noise Rejection Plot**

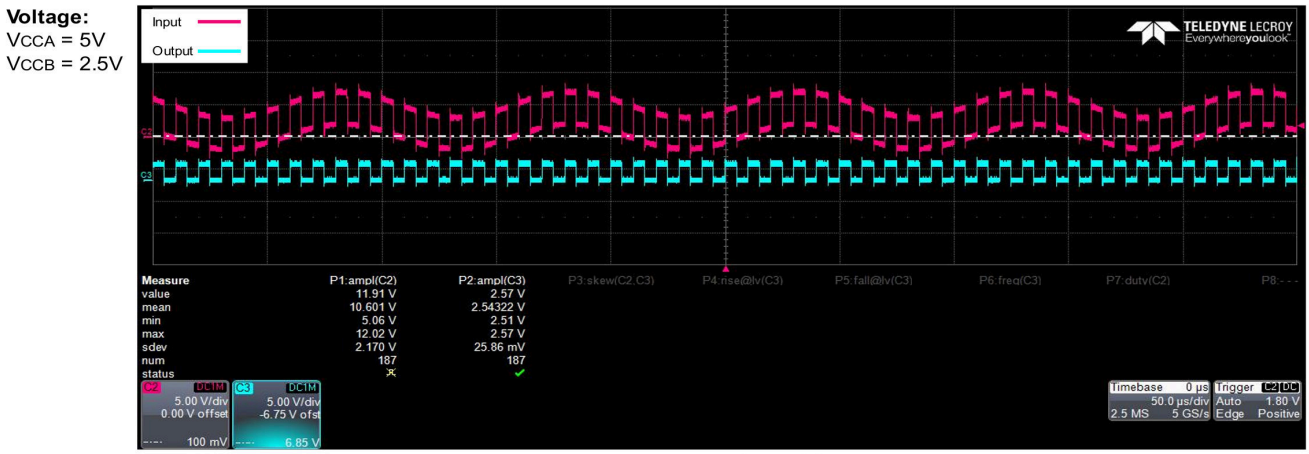


*Note: Offset voltage on the output to show both signals side-by-side

**Figure 7-6. Waveform showing 5V to 2.5V I/O translation with AC Ground Noise of $2V_{PP}$ at 10kHz**

## 7.4 Device Functional Modes

**Table 7-1. Function Table**

| Power Supply (1) | | Control Inputs | Port Status | |
|---|---|---|---|---|
| VCCI | VCCO | OE | Input | Output |
| PU | PU | H | H | H |
| PU | PU | H | L | L |
| PU | PU | L or Open | X | Hi-Z |
| PU | PU | H | Open | L |
| PD | PU | H | X | L |
| X | PU | L or Open | X | High-Z |
| X | PU | H | X | L |
| X | PD | X | X | Undetermined |

(1) In the table above: PU = Powered Up; PD = Powered Down; X = Irrelevant; H = High Level; L = Low Level; Open = Floating


Copyright © 2025 Texas Instruments Incorporated

# 8 Application and Implementation

**Note**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

## 8.1 Application Information

The TXG404x is used for level translation, enabling communication between devices or systems operating at different interface and ground voltages. The TXG404x device is ideal for use in applications where a push-pull driver is connected to the data inputs. Figure 8-1 is an example of two systems that translate from 1.8V to 3.3V across a SPI interface while also seeing a ground shift of -3V on GNDB while GNDA is at 0V. The ground shift of 3V is from the noisy power ground of the Digital-to-Analog Converter (DAC).

## 8.2 Typical Application

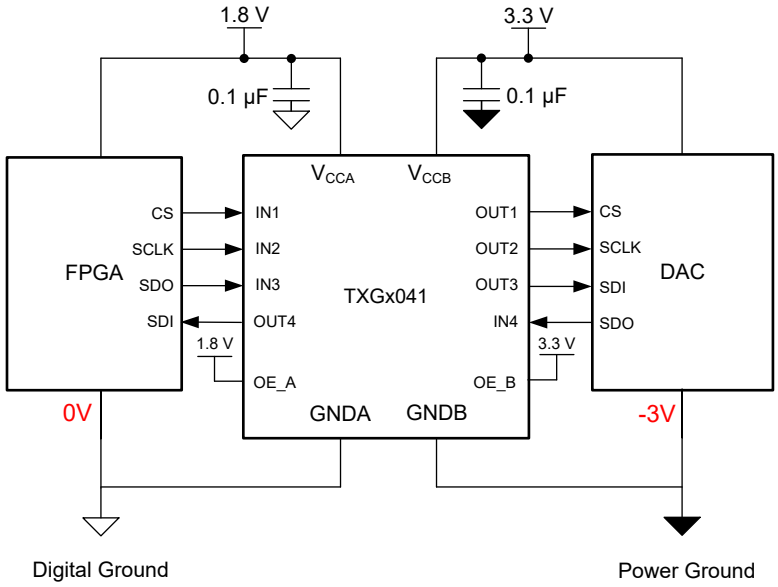



**Figure 8-1. TXG404x in Test and Measurement**

### *8.2.1 Design Requirements*

Use the parameters listed in Table 8-1 for this design example.

**Table 8-1. Design Parameters**

| DESIGN PARAMETERS | EXAMPLE VALUES |
|---|---|
| Input voltage range | 1.71V to 5.5V |
| Output voltage range | 1.71V to 5.5V |

Copyright © 2025 Texas Instruments Incorporated

### 8.2.2 Detailed Design Procedure

To begin the design process, determine the following:

- Input voltage range
  - Use the supply voltage of the device that is driving the TXG404x device to determine the input voltage range. For a valid logic-high, the value must exceed the positive-going input-threshold voltage ($V_{T+}$) of the input port. For a valid logic low the value must be less than the negative-going input-threshold voltage ($V_{T-}$) of the input port.
- Output voltage range
  - Use the supply voltage of the device that the TXG404x device is driving to determine the output voltage range.

### 8.2.3 Application Curve

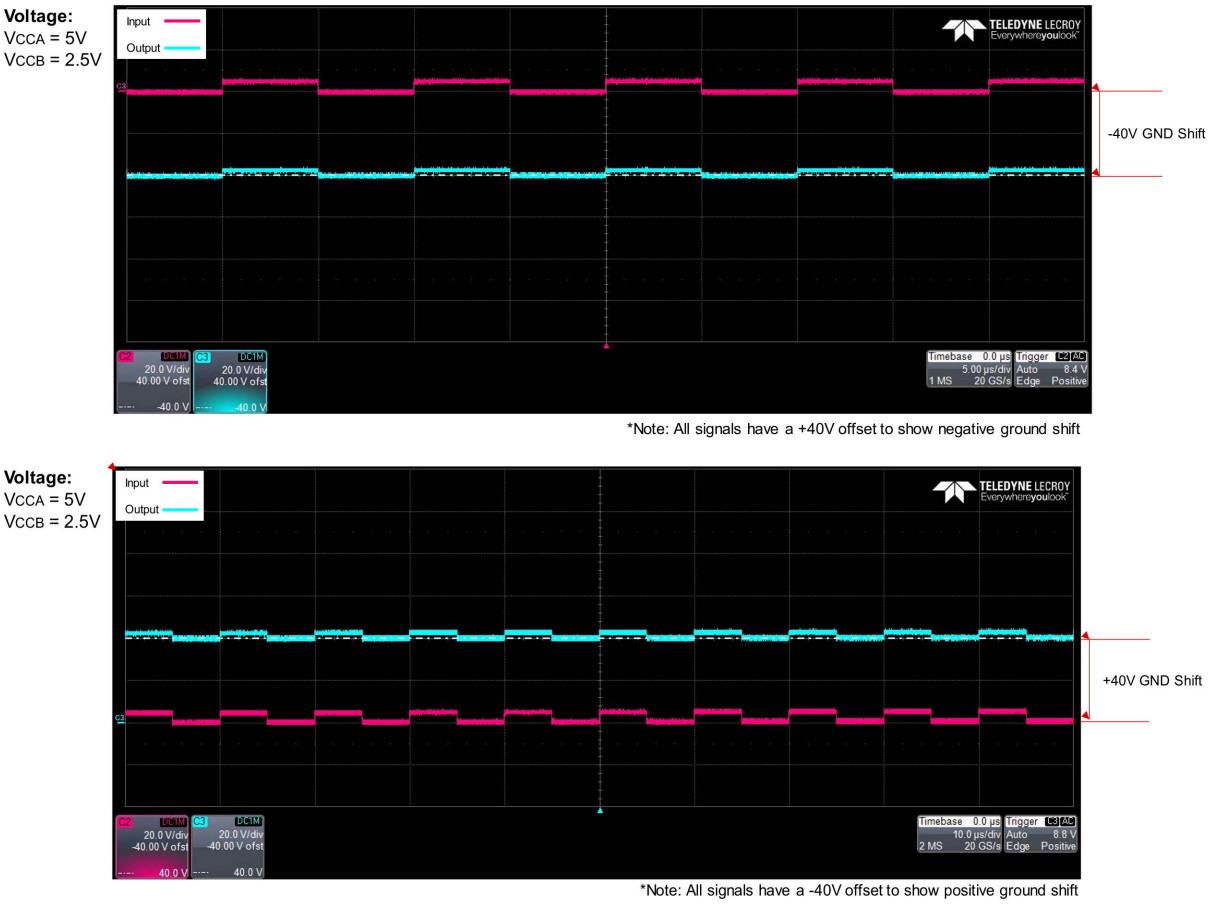



**Figure 8-2. Waveform showing -40V (top) and +40V (bottom) Ground Shift with 2.25V to 5V I/O Translation**


Copyright © 2025 Texas Instruments Incorporated

## 8.3 Power Supply Recommendations

Always apply a ground reference to the GND pins first. This device is designed for glitch free power sequencing without any supply sequencing requirements such as ramp order or ramp rate. Please make sure the difference between VCC and GND remains at 6.5V max at all times.

## 8.4 Layout

### *8.4.1 Layout Guidelines*

To ensure reliability of the device, following common printed-circuit board layout guidelines are recommended:

- Use bypass capacitors on the power supply pins and place them as close to the device as possible. A 0.1µF capacitor is recommended, but transient performance can be improved by having 1µF and 0.1µF capacitors in parallel as bypass capacitors.
- The high drive capability of this device creates fast edges into light loads so routing and load conditions should be considered to prevent ringing.
- A 0.1µF capacitor can be added between GNDA and GNDB to improve performances of CMTI.

### *8.4.2 Layout Example*

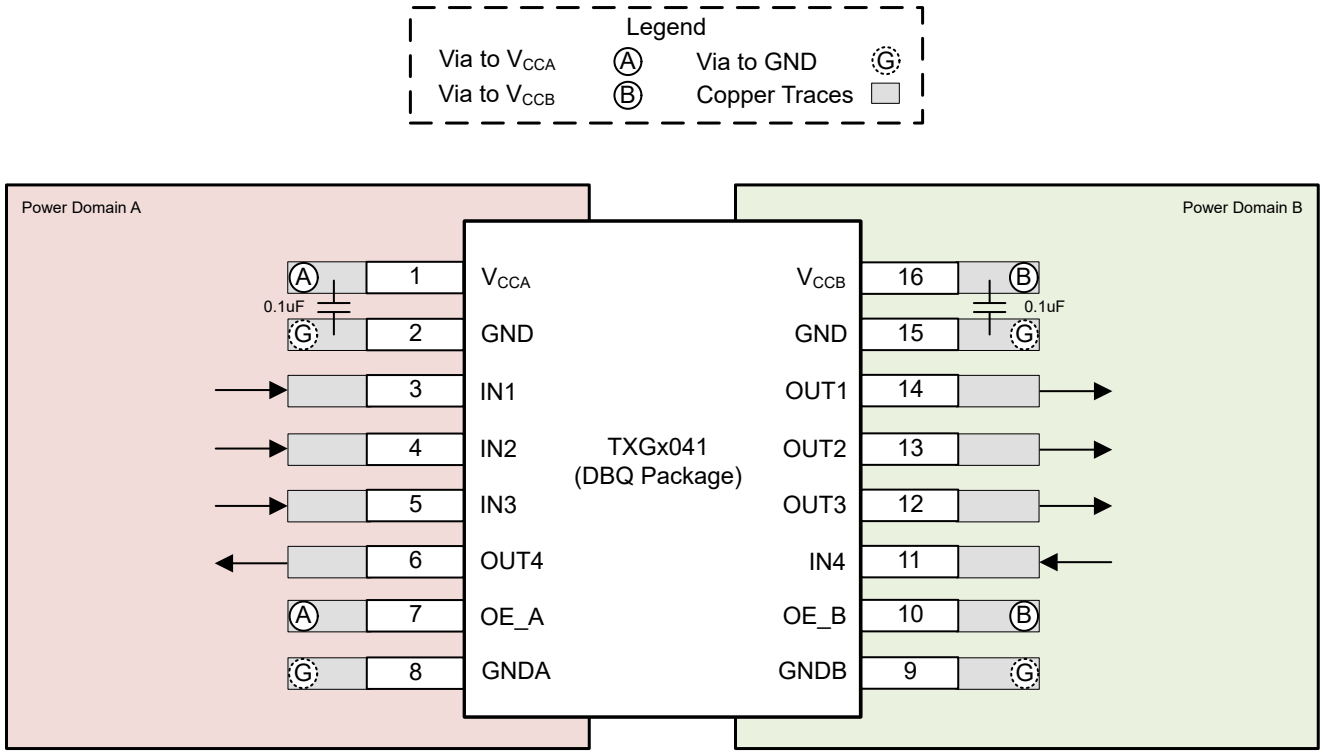



**Figure 8-3. Layout Example**

# 9 Device and Documentation Support

## 9.1 Documentation Support

### *9.1.1 Related Documentation*

For related documentation, see the following:

- Texas Instruments, *Understanding Schmitt Triggers* application report
- Texas Instruments, *CMOS Power Consumption and $C_{pd}$ Calculation* application report

## 9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 9.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

## 9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

## 9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 9.6 Glossary

| | |
|---|---|
| TI Glossary | This glossary lists and explains terms, acronyms, and definitions. |

# 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision * (June 2025) to Revision A (September 2025) | Page |
|---|---|
| • Updated data sheet status from *Advanced Information* to *Production Data* | 1 |

# 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.


Copyright © 2025 Texas Instruments Incorporated

## PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package \| Pins | Package qty \| Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|---|---|---|---|---|---|---|---|---|---|
| TXG4041DBQR | Active | Production | SSOP (DBQ) \| 16 | 2500 \| LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | TGX041 |
| TXG4041DYYR | Active | Production | SOT-23-THIN (DYY) \| 14 | 2500 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | TGX041 |
| TXG4042DBQR | Active | Production | SSOP (DBQ) \| 16 | 2500 \| LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | TGX042 |
| TXG4042DYYR | Active | Production | SOT-23-THIN (DYY) \| 14 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | TGX042 |

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TXG4041, TXG4042 :**


- Automotive : TXG4041-Q1, TXG4042-Q1

NOTE: Qualified Version Definitions:


- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

## TAPE AND REEL INFORMATION

**REEL DIMENSIONS**

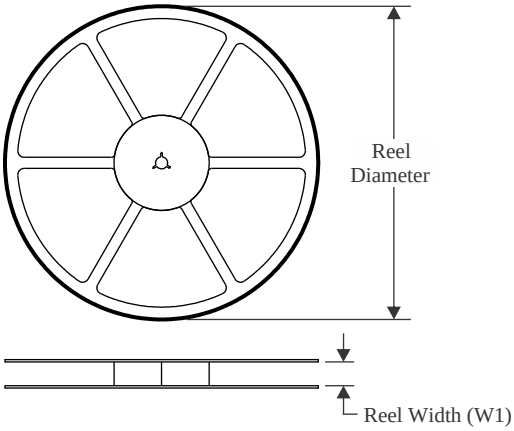



**TAPE DIMENSIONS**

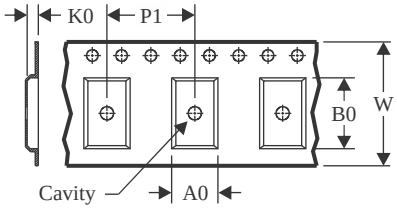


| | |
|---|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |


**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**

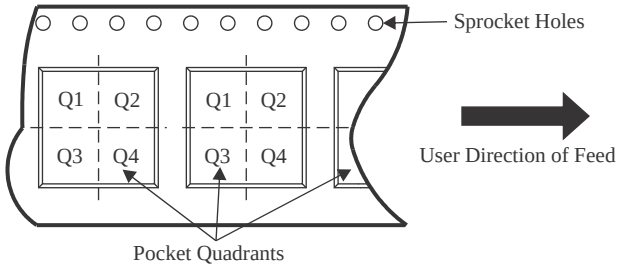


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| TXG4041DBQR | SSOP | DBQ | 16 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| TXG4041DYYR | SOT-23-THIN | DYY | 14 | 2500 | 330.0 | 12.4 | 4.8 | 3.6 | 1.6 | 8.0 | 12.0 | Q3 |
| TXG4042DBQR | SSOP | DBQ | 16 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| TXG4042DYYR | SOT-23-THIN | DYY | 14 | 3000 | 330.0 | 12.4 | 4.8 | 3.6 | 1.6 | 8.0 | 12.0 | Q3 |

TAPE AND REEL BOX DIMENSIONS

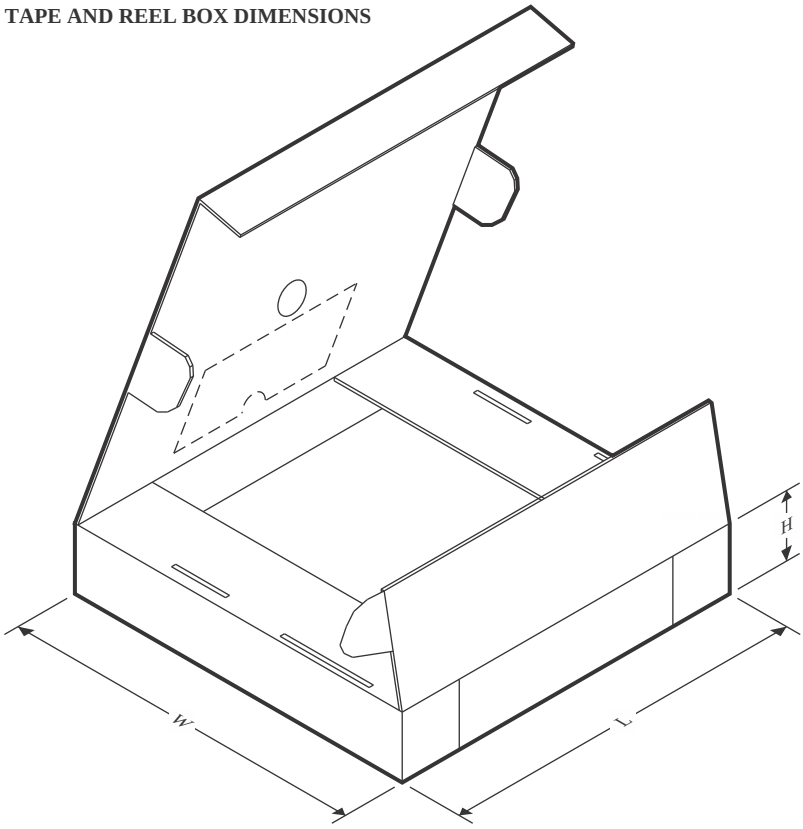


*All dimensions are nominal


| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---|---|---|---|---|---|---|---|
| TXG4041DBQR | SSOP | DBQ | 16 | 2500 | 353.0 | 353.0 | 32.0 |
| TXG4041DYYR | SOT-23-THIN | DYY | 14 | 2500 | 336.6 | 336.6 | 31.8 |
| TXG4042DBQR | SSOP | DBQ | 16 | 2500 | 353.0 | 353.0 | 32.0 |
| TXG4042DYYR | SOT-23-THIN | DYY | 14 | 3000 | 336.6 | 336.6 | 31.8 |

# PACKAGE OUTLINE

## DYY0014A


## SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

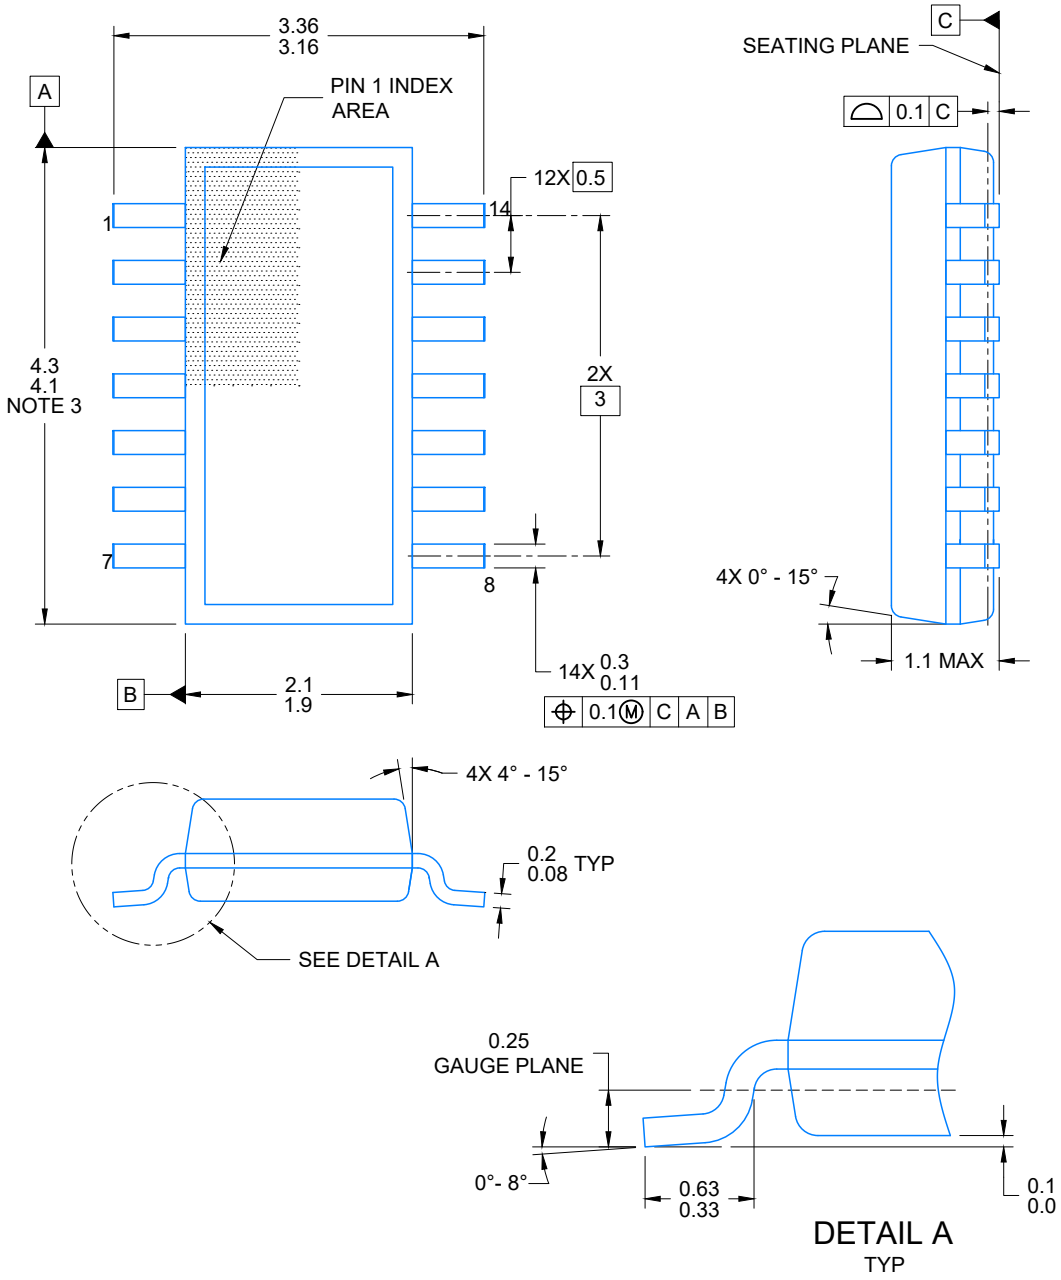



NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
5. Reference JEDEC Registration MO-345, Variation AB

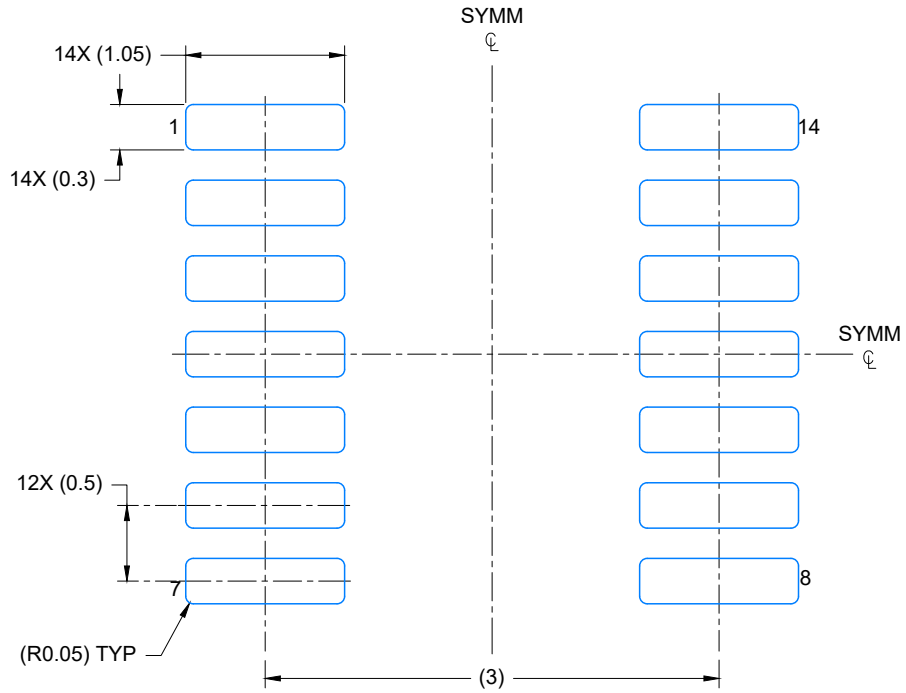


LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 20X

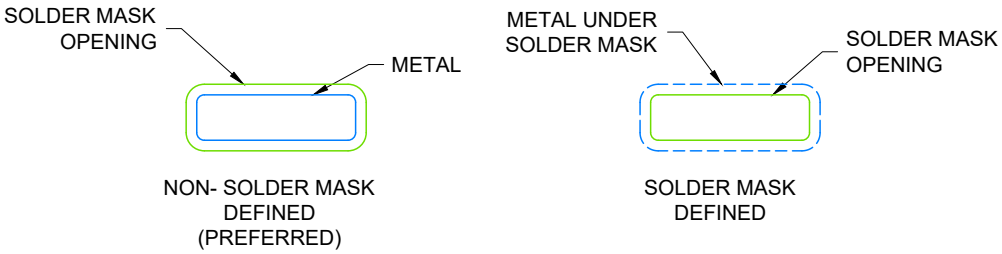



SOLDER MASK DETAILS

4224643/D 07/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

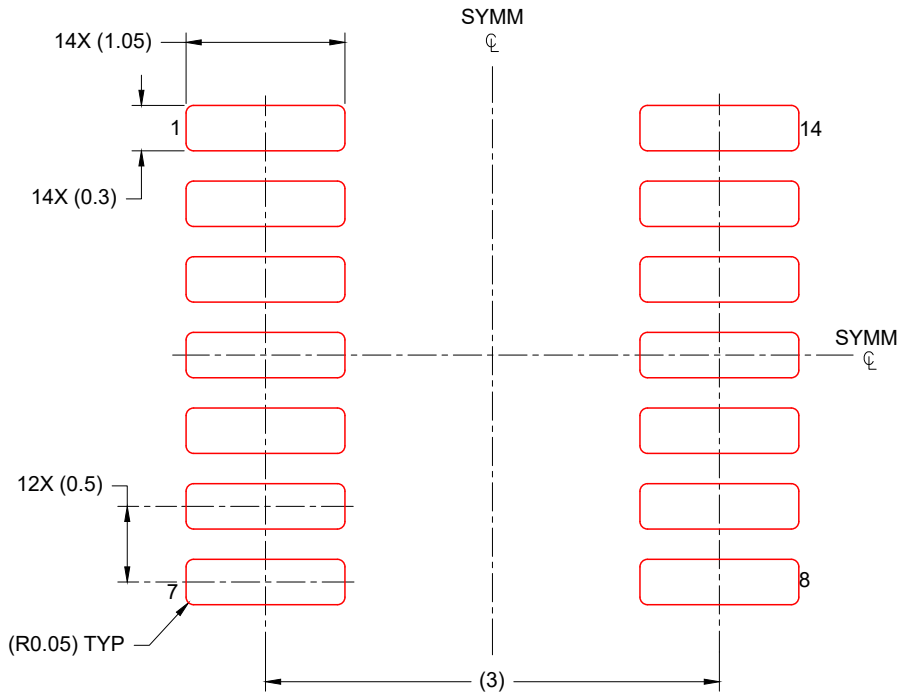



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 20X

4224643/D 07/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.




# PACKAGE OUTLINE

## DBQ0016A


## SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

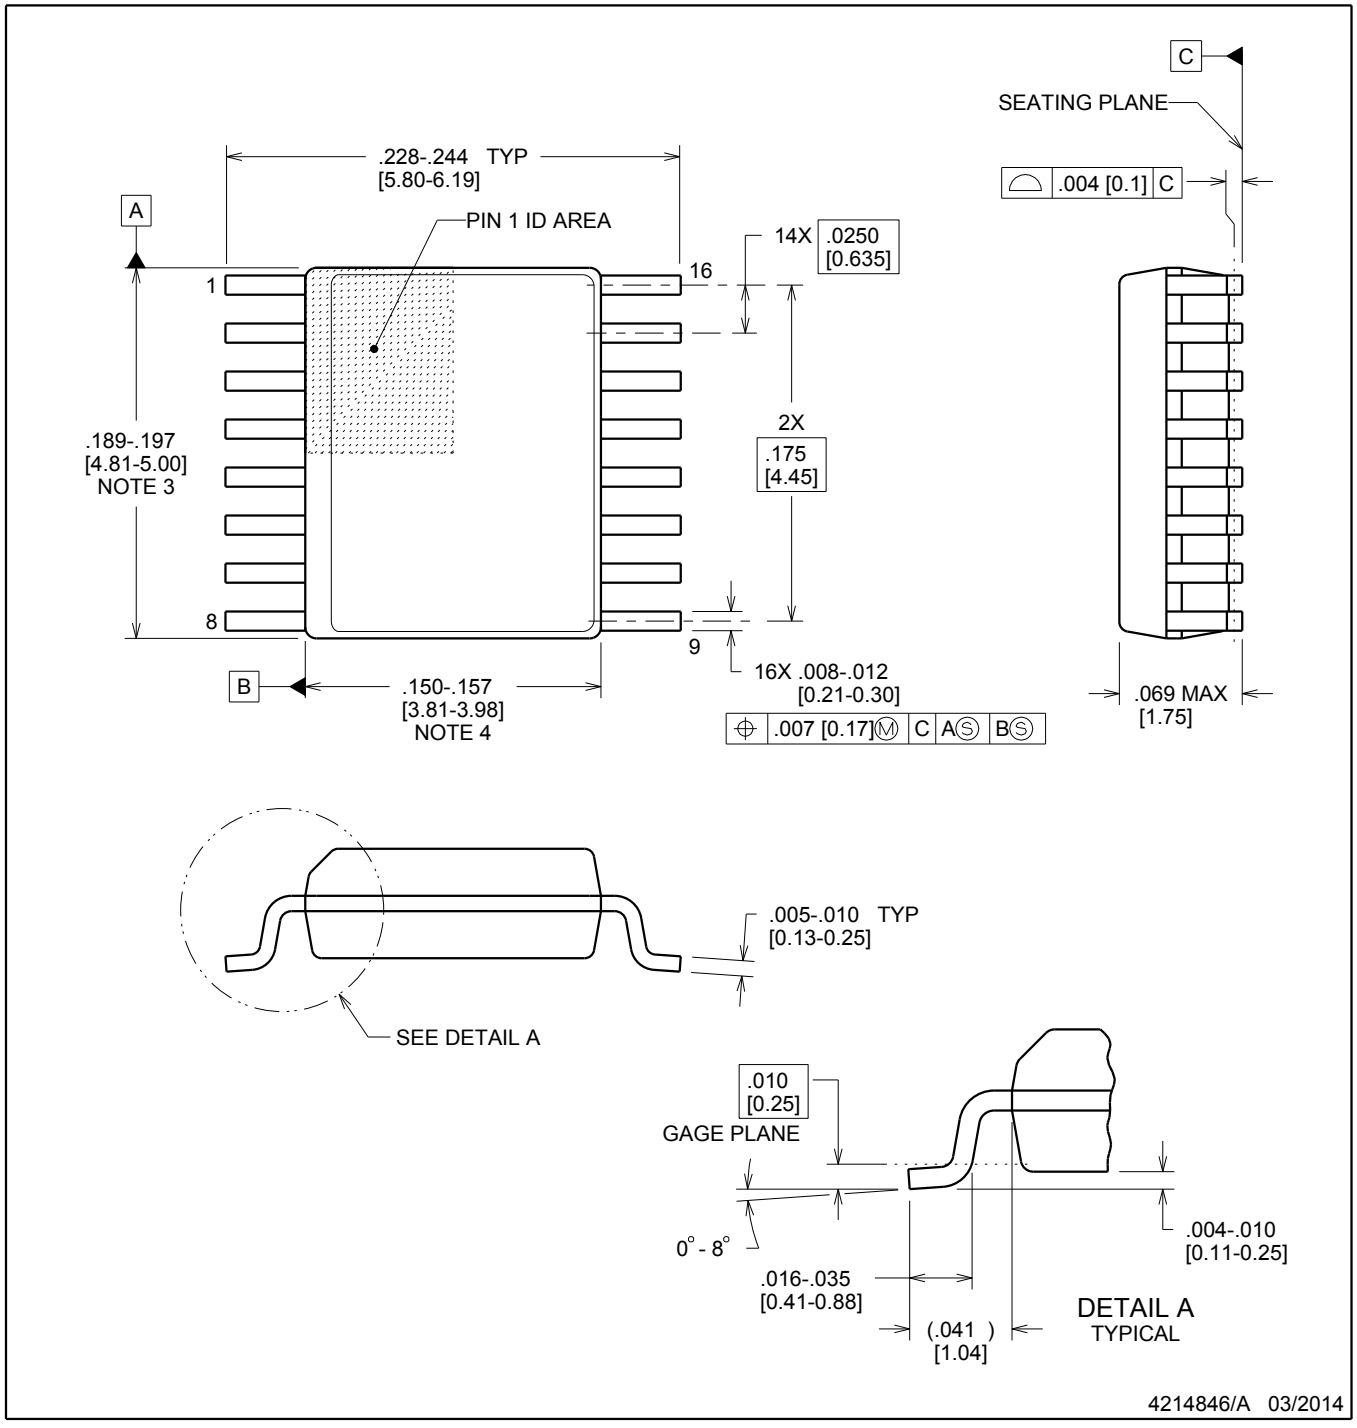



NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 inch, per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MO-137, variation AB.

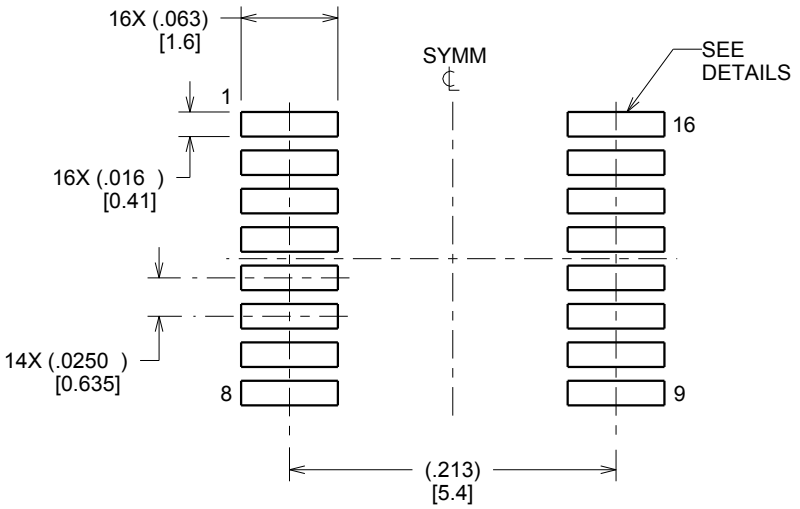


LAND PATTERN EXAMPLE
SCALE:8X

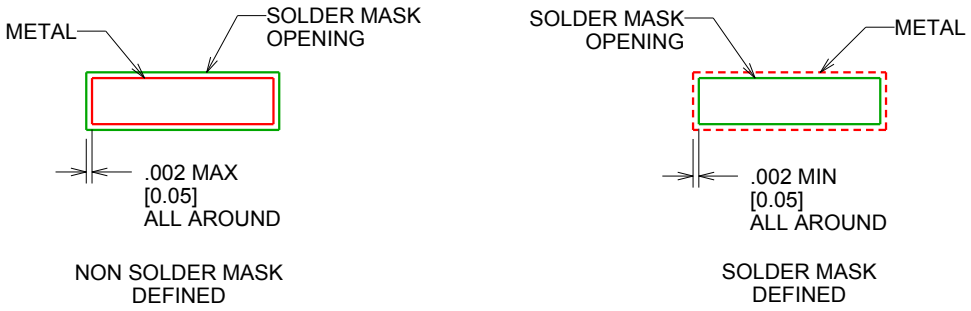


SOLDER MASK DETAILS

4214846/A 03/2014

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

## DBQ0016A

## SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

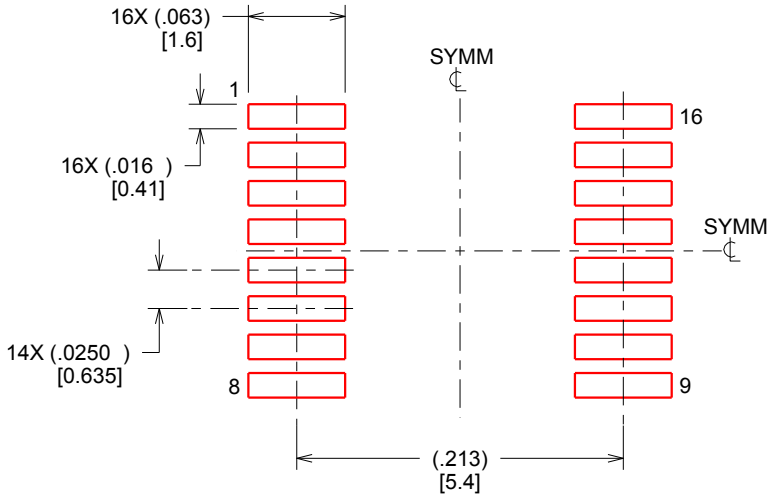


SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.127 MM] THICK STENCIL
SCALE:8X

4214846/A 03/2014

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025