

## Gated-Class H, Dual-Port VDSL2 Line Driver

 Check for Samples: [THS6226](#)

### FEATURES

- **Digitally-Adjustable Quiescent Current:** 7.6mA to 23.0mA
- **1.0mA Bias Current Step**
- **Independent Voltage Boost and Main Line Driver Disable**
- **Low-Power Line Termination Mode**
- **Full Capacitor Recharge: 3ms**
- **Low Input Voltage Noise Density:** 6.3 nV/ $\sqrt{\text{Hz}}$  Input-Referred Voltage Noise
- **Low MTPR Distortion:** 70dB with +19.8dBm G.993.2—Profile 8b
- **–91dBc HD3 (1MHz, 60 $\Omega$  Differential)**
- **High Output Current: (383mA into 60 $\Omega$ )**
- **Wide Output Swing: 40V<sub>PP</sub> (+12V, 60 $\Omega$  Differential Load with a 1:1.4 Transformer)**
- **Wide Bandwidth: 125MHz**
- **Port-to-Port Separation of 90dB at 1MHz**
- **PSRR: 70dB at 1MHz for Good Isolation**

### APPLICATIONS

- **Ideal for All VDSL2 Profiles**
- **Backwards-Compatible with ADSL/ADSL2+/ADSL2++ Systems**


### DESCRIPTION

The THS6226 is a dual-port, class H, current-feedback architecture, differential line driver amplifier system ideal for xDSL systems. The device is targeted for use in very-high-bit-rate digital subscriber line 2 (VDSL2) line driver systems that enable native DTM signals while supporting greater than +20.5dBm line power (up to 8.5MHz) with good linearity, supporting the G.993.2 VDSL2 8b profile. It is also fast enough to support central-office transmission of +14.5dBm line power up to 30MHz.

The unique architecture of the THS6226 allows quiescent current to be minimal while still achieving very high linearity. Differential distortion, under full bias conditions, is –91dBc at 1MHz and reduces to only –75dBc at 5MHz. Fixed multiple bias settings of the amplifiers offer enhanced power savings for line lengths where the full performance of the amplifier is not required. To allow for even more flexibility and power savings on all profiles, quiescent current is digitally adjustable from 7.6mA to 23mA with a bias current step of 1.0mA. For systems where additional power savings while not transmitting are desired, the THS6226 can be used in its line termination mode to maintain impedance matching.

The wide output swing on +12V power supplies, coupled with excellent current drive, allows for wide dynamic headroom, keeping distortion minimal.

The THS6226 is available in a QFN-32 PowerPAD™ package.

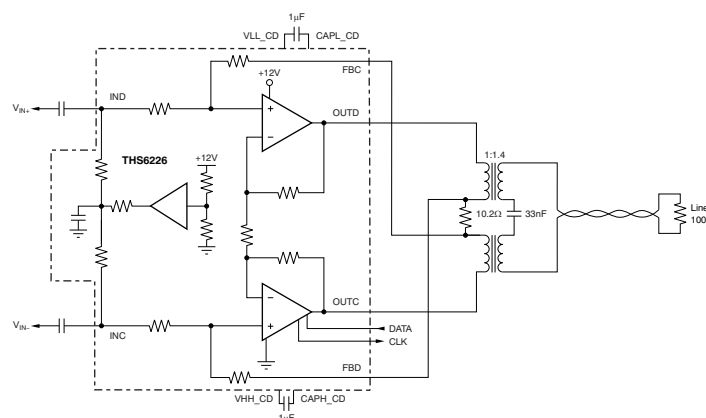

Typical VDSL2 Line Driver Circuit Using One Port of the THS6226



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments, Inc.

All other trademarks are the property of their respective owners.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### ORDERING INFORMATION<sup>(1)</sup>

PRODUCT <sup>(2)</sup>	PACKAGE-LEAD	PACKAGE DESIGNATOR	PACKAGE MARKING	TRANSPORT MEDIA, QUANTITY
THS6226IRHBT	VQFN-32	RHB	THS6226IRHB	Tape and Reel, 250
THS6226IRHBR				Tape and Reel, 3000

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or visit the device product folder at [www.ti.com](http://www.ti.com).
- (2) The PowerPAD is electrically isolated from all other pins.

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

Over operating free-air temperature range, unless otherwise noted.

PARAMETER		THS6226	UNIT
Supply voltage, GND to $V_{S+}$ , class AB only		15	V
Supply voltage, GND to $V_{S+}$ , class H only		12.5	V
Input voltage, $V_I$		15	V
Output current, $I_O$ : static dc <sup>(2)</sup>		±100	mA
Continuous power dissipation		See <a href="#">Thermal Information</a> table	
Normal storage temperature		–40 to +85	°C
Maximum junction temperature, any condition, $T_J$ <sup>(3)</sup>		+150	°C
Maximum junction temperature, continuous operation, long-term reliability, $T_J$ <sup>(4)</sup>		+130	°C
Storage temperature range, $T_{STG}$		–65 to +150	°C
ESD ratings:	Human body model (HBM)	2000	V
	Charged device model (CDM)	500	V
	Machine model (MM)	100	V

- (1) Stresses above those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute maximum rated conditions for extended periods may degrade device reliability.
- (2) The THS6226 incorporates a PowerPAD on the underside of the chip. This acts as a heatsink and must be connected to a thermally dissipating plane for proper power dissipation. Failure to do so may result in exceeding the maximum junction temperature which could permanently damage the device. See TI Technical Brief [SLMA002](#) for more information about utilizing the PowerPAD thermally-enhanced package. Under high-frequency ac operation (> 10kHz), the short-term output current capability is much greater than the continuous dc output current rating. This short-term output current rating is about 8.5x the dc capability, or approximately ±850mA.
- (3) The absolute maximum junction temperature under any condition is limited by the constraints of the silicon process.
- (4) The absolute maximum junction temperature for continuous operation is limited by the package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

### THERMAL INFORMATION

THERMAL METRIC <sup>(1)</sup>		THS6226	UNITS
		RHB	
		32 PINS	
$\theta_{JA}$	Junction-to-ambient thermal resistance	35.1	°C/W
$\theta_{JCTop}$	Junction-to-case (top) thermal resistance	22.1	
$\theta_{JB}$	Junction-to-board thermal resistance	7.0	
$\Psi_{JT}$	Junction-to-top characterization parameter	0.3	
$\Psi_{JB}$	Junction-to-board characterization parameter	6.9	
$\theta_{JCbott}$	Junction-to-case (bottom) thermal resistance	1.3	

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

**ELECTRICAL CHARACTERISTICS:  $V_S = +12V$** 
**Boldface** limits are tested at **+25°C**.

 At  $T_A = +25^\circ\text{C}$ , with  $R_{MATCH} = 10.2\Omega$ , transformer turn ratio 1:1.4,  $R_L = 100\Omega$  differential at transformer output, Full Bias Mode, and active impedance circuit configuration, unless otherwise noted. Each port is tested independently.

PARAMETER	CONDITIONS	THS6226IRHB			UNIT	TEST LEVEL <sup>(1)</sup>
		MIN	TYP	MAX		
<b>AC PERFORMANCE</b>						
Small-signal bandwidth, –3dB	$V_O = 2V_{PP}$ , differential at OUTCD and OUTAB, gain = 19V/V		125		MHz	C
0.1dB bandwidth flatness	$V_O = 2V_{PP}$		37		MHz	C
Large-signal bandwidth	$V_O = 10V_{PP}$		125		MHz	C
Slew rate (10% to 90% level)	$V_O = 15V$ step, differential		1500		V/ $\mu\text{s}$	C
Rise and fall time	$V_O = 2V_{PP}$		2.8		ns	C
Harmonic distortion	$V_O = 2V_{PP}$ , $R_L = 60\Omega$ differential					C
Second harmonic	Full bias, $f = 1\text{MHz}$		–91		dBc	C
Third harmonic	Full bias, $f = 1\text{MHz}$		–91		dBc	C
Second harmonic	Full bias, $f = 5\text{MHz}$		–70		dBc	C
	Low bias, $f = 5\text{MHz}$		–64		dBc	C
Third harmonic	Full bias, $f = 5\text{MHz}$		–75		dBc	C
	Low bias, $f = 5\text{MHz}$		–47		dBc	C
Differential input voltage noise	$f = 1\text{MHz}$ , input-referred		6.3		nV/ $\sqrt{\text{Hz}}$	C
<b>DC PERFORMANCE</b>						
Differential gain			19		V/V	C
Differential gain error <sup>(2)</sup>				<b><math>\pm 2.5</math></b>	%	A
Input offset voltage			$\pm 1$	<b><math>\pm 5</math></b>	mV	A
	–40°C to +85°C			$\pm 6$	mV	B
Input offset voltage drift				15	$\mu\text{V}/^\circ\text{C}$	B
Input offset voltage matching	Channels 1 to 2 and 3 to 4 only		$\pm 1$	<b><math>\pm 5</math></b>	mV	A
<b>INPUT CHARACTERISTICS</b>						
Noninverting input resistance			500    2		k $\Omega$    pF	C
Input bias voltage		<b>5.8</b>	6	<b>6.2</b>	V	A
<b>OUTPUT CHARACTERISTICS</b>						
Class H output voltage swing	$R_L = 60\Omega$ differential, class H operation <sup>(3)(4)</sup> , each output	<b>+16/–4</b>	+17.5/–5.5		V	A
	–40°C to +85°C <sup>(3)(4)</sup>	+15.7/–3.7			V	B
Class H output current (sourcing, sinking)	$R_L = 60\Omega$ differential, class H operation	<b><math>\pm 333</math></b>	$\pm 383$		mA	A
	–40°C to +85°C	$\pm 323$			mA	B
Class AB output voltage swing	$R_L = 60\Omega$ differential, normal operation <sup>(3)</sup> , each output	<b>+9.9/+2.1</b>	+10.1/+1.9		V	A
	–40°C to +85°C <sup>(3)</sup>	+9.8/+2.2			V	B
Class AB output current (sourcing, sinking)	$R_L = 60\Omega$ differential, normal operation	<b><math>\pm 130</math></b>	$\pm 137$		mA	A
	–40°C to +85°C	$\pm 126$			mA	B
Short-circuit output current			1		A	C
Output impedance	$f = 1\text{MHz}$ , differential		0.2		$\Omega$	C
Crosstalk	$f = 1\text{MHz}$ , $V_{OUT} = 2V_{PP}$ , port 1 to port 2		–90		dB	C

- (1) Test levels: **(A)** 100% tested at +25°C. Over temperature limits set by characterization and simulation. **(B)** Limits set by characterization and simulation. **(C)** Typical value only for information.
- (2) Negative feedback loop only.
- (3) Measured at amplifier output (pin 17, 20, 21, and 24).
- (4) Capacitor fully charged, no droop.

**ELECTRICAL CHARACTERISTICS:  $V_S = +12V$  (continued)**
**Boldface** limits are tested at **+25°C**.


 At  $T_A = +25^\circ\text{C}$ , with  $R_{MATCH} = 10.2\Omega$ , transformer turn ratio 1:1.4,  $R_L = 100\Omega$  differential at transformer output, Full Bias Mode, and active impedance circuit configuration, unless otherwise noted. Each port is tested independently.

PARAMETER	CONDITIONS	THS6226IRHB			UNIT	TEST LEVEL <sup>(1)</sup>
		MIN	TYP	MAX		
<b>POWER SUPPLY</b>						
Maximum operating voltage	Class AB	<b>+10</b>	+12	<b>+15</b>	V	A
	–40°C to +85°C	+10		+15	V	B
	Class H	+10	+12	+12.5	V	B
	–40°C to +85°C	+10		+12.5		B
$I_{S+}$ quiescent current	Per port, full bias, class H enable (power supply connected together)	<b>22.5</b>	23.5	<b>24.5</b>	mA	A
	–40°C to +85°C	<b>21.8</b>		<b>25.2</b>	mA	B
	Per port, full bias, class H disable (power supply connected together)	<b>22.0</b>	23.0	<b>24.0</b>	mA	A
	–40°C to +85°C	<b>21.3</b>		24.7	mA	B
	Bias current step		1.0		mA	C
	Per port, low bias, class H disable (power supply connected together)	<b>7.2</b>	7.6	<b>8</b>	mA	A
	–40°C to +85°C	<b>6.9</b>		8.3	mA	B
	Per port, line termination mode (B9 = B8 = B7 = B6 = 0) (power supply connected together)		4.4		mA	C
	Both ports, main amplifiers and class H disable (B9 = B8 = B7 = B6 = 0)		1.7	<b>2.2</b>	mA	A
	–40°C to +85°C			2.3	mA	B
Power-supply rejection (PSRR)	Differential, from +12V, GND	<b>60</b>	70		dB	A
	–40°C to +85°C	58			dB	B
<b>LOGIC</b>						
Logic pin logic threshold	Logic 1, with respect to GND <sup>(5)</sup>	1.9			V	C
	Logic 0, with respect to GND <sup>(5)</sup>			0.8	V	C
Logic pin quiescent current	Logic X = 0.5V (logic 0)		10	<b>25</b>	$\mu\text{A}$	A
	–40°C to +85°C			30	$\mu\text{A}$	B
	Logic X = 3.3V (logic 1)		66	<b>125</b>	$\mu\text{A}$	A
	–40°C to +85°C			130	$\mu\text{A}$	B
Turn-on time delay ( $t_{ON}$ )	Time for $I_S$ to reach 50% of final value		1		$\mu\text{s}$	C
Turn-off time delay ( $t_{OFF}$ )	Time for $I_S$ to reach 50% of final value		1		$\mu\text{s}$	C
Logic pin input impedance			50    1		k $\Omega$    pF	C

 (5) The GND pin usable range is from  $V_{S-}$  to  $(V_{S+} - 5V)$ .

**PIN CONFIGURATIONS**

**QFN-32<sup>(1)(2)</sup>  
RHB PACKAGE  
(TOP VIEW)**

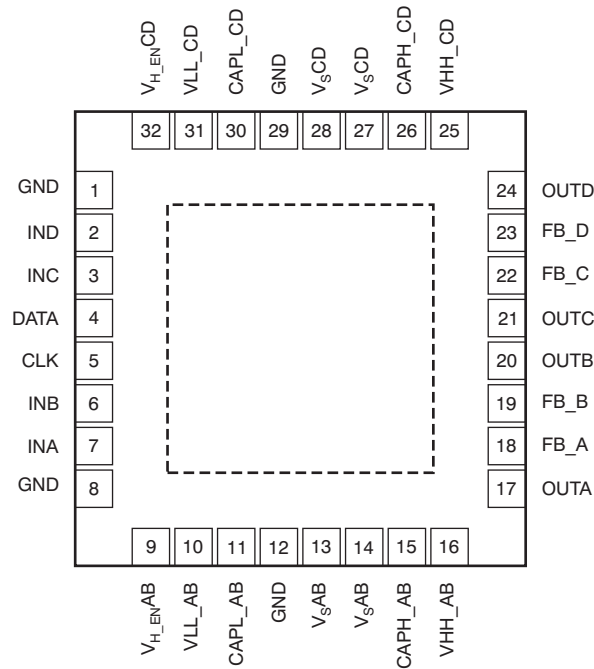


- (1) The PowerPAD is electrically isolated from all other pins and can be connected to any potential voltage range from  $V_{S-}$  to  $V_{S+}$ . Typically, the PowerPAD is connected to the GND plane because this plane tends to physically be the largest and is able to dissipate the most amount of heat.
- (2) The THS6226 defaults to the disabled mode at power-up.

**PIN DESCRIPTIONS**

NAME	PIN	DESCRIPTION
GND	1	Analog ground
IND	2	Input D of amplifier CD
INC	3	Input C of amplifier CD
DATA	4	Serial interface data pin
CLK	5	Serial interface CLK pin
INB	6	Input B of amplifier AB
INA	7	Input A of amplifier AB
GND	8	Analog ground
V <sub>H_ENAB</sub>	9	Class H mode control pin for amplifier AB
V <sub>LL_AB</sub>	10	Amplifier AB low pump supply
CAP <sub>L_AB</sub>	11	Amplifier AB negative voltage pump capacitor pin
GND	12	Analog ground
V <sub>S_AB</sub>	13	Amplifier AB supply voltage
V <sub>S_AB</sub>	14	Amplifier AB supply voltage
CAP <sub>H_AB</sub>	15	Amplifier AB positive voltage pump capacitor pin
V <sub>HH_AB</sub>	16	Amplifier AB high pump supply
OUTA	17	Output A of amplifier AB
FB_A	18	Feedback for active output impedance of amplifier AB
FB_B	19	Feedback for active output impedance of amplifier AB
OUTB	20	Output B of amplifier AB
OUTC	21	Output C of amplifier CD
FB_C	22	Feedback for active output impedance of amplifier CD
FB_D	23	Feedback for active output impedance of amplifier CD
OUTD	24	Output D of amplifier CD
V <sub>HH_CD</sub>	25	Amplifier CD high pump supply
CAP <sub>H_CD</sub>	26	Amplifier CD positive voltage pump capacitor pin
V <sub>S_CD</sub>	27	Amplifier CD supply voltage
V <sub>S_CD</sub>	28	Amplifier CD supply voltage
GND	29	Analog ground
CAP <sub>L_CD</sub>	30	Amplifier CD negative voltage pump capacitor pin
V <sub>LL_CD</sub>	31	Amplifier CD low pump supply
V <sub>H_ENCD</sub>	32	Class H mode control pin for amplifier CD

**TIMING CHARACTERISTICS**

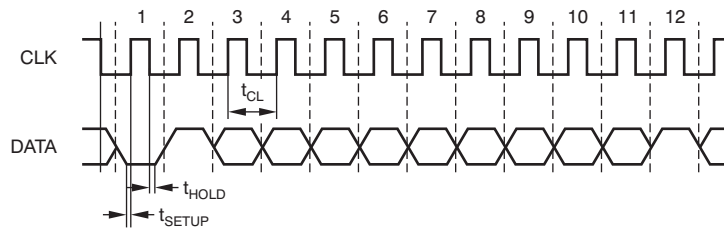

**Figure 1. Serial Interface Timing**

PARAMETER	DESCRIPTION	THS6226		UNITS
		MIN	MAX	
$t_{SETUP}$	Setup time	3		ns
$t_{HOLD}$	Hold time	0.5		ns
$t_{CL}$	Clock period	200		ns

**TYPICAL CHARACTERISTICS:  $V_S = +12V$**

At  $T_A = +25^\circ C$  and Full Bias Mode, unless otherwise noted

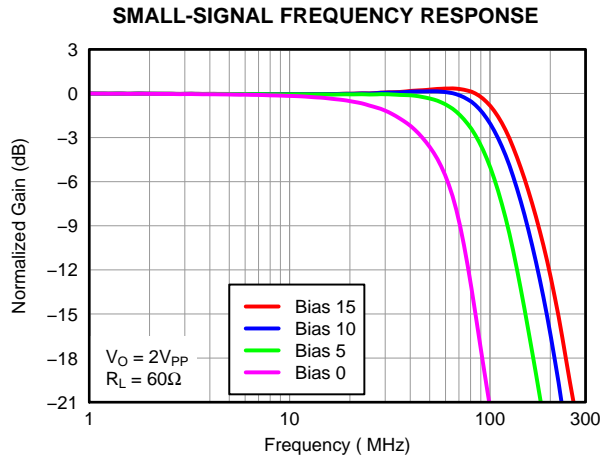


Figure 2.

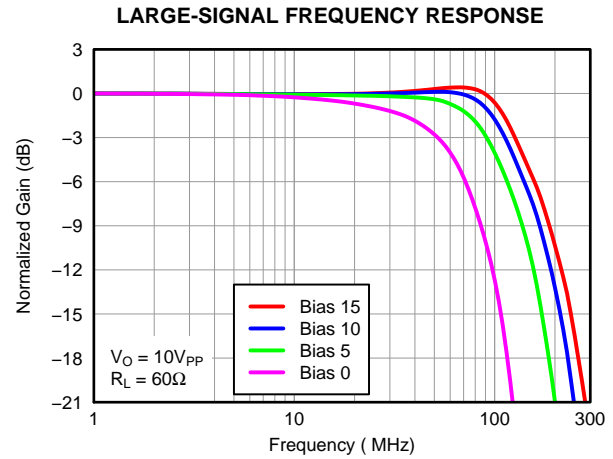


Figure 3.

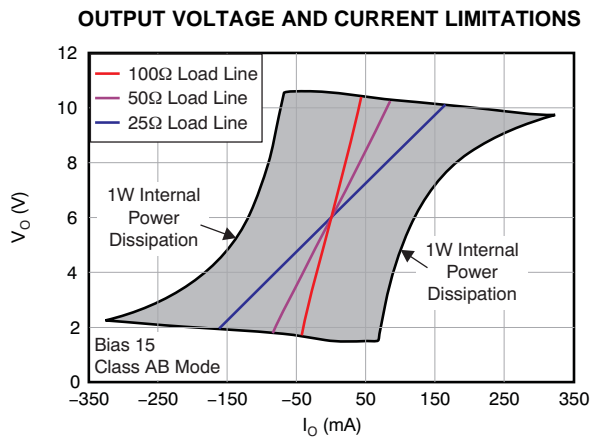


Figure 4.

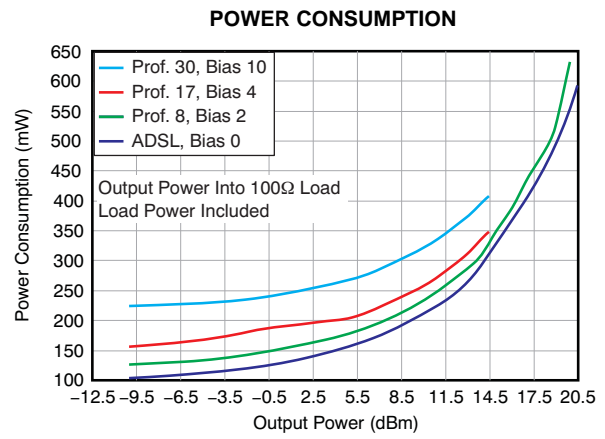


Figure 5.

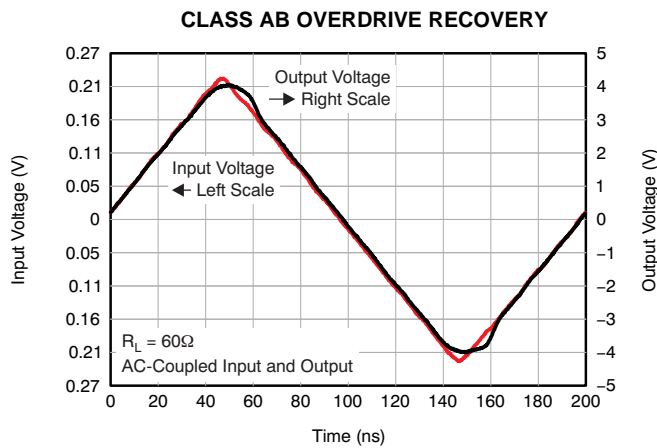


Figure 6.


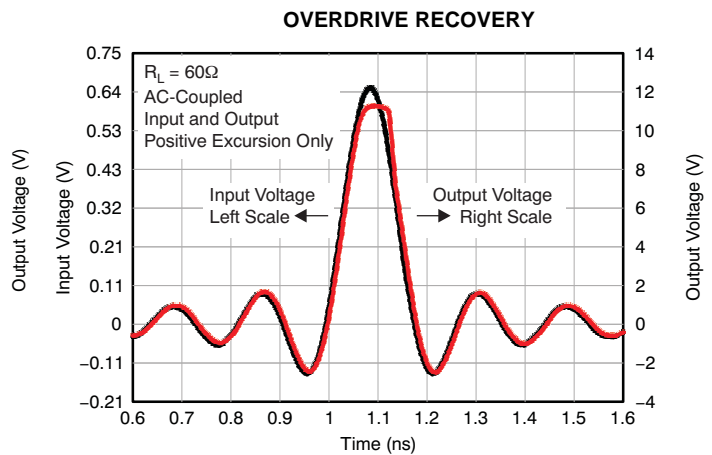


Figure 7.

**TYPICAL CHARACTERISTICS:  $V_S = +12V$  (continued)**


At  $T_A = +25^\circ C$  and Full Bias Mode, unless otherwise noted

**INPUT NOISE DENSITY**

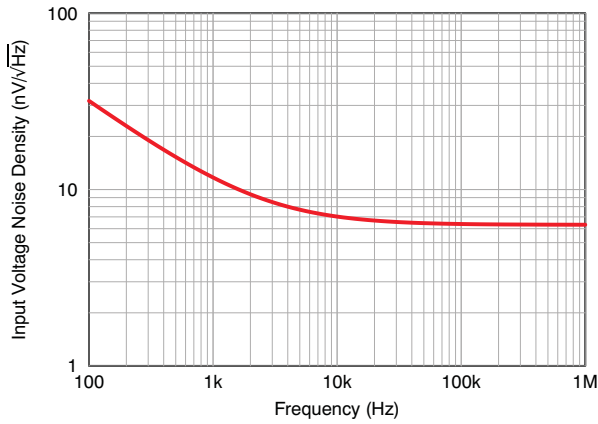


**Figure 8.**

**HARMONIC DISTORTION vs FREQUENCY**

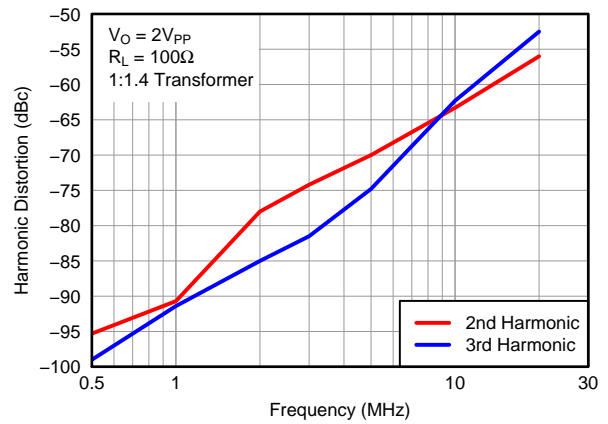


**Figure 9.**

**HARMONIC DISTORTION vs LOAD**

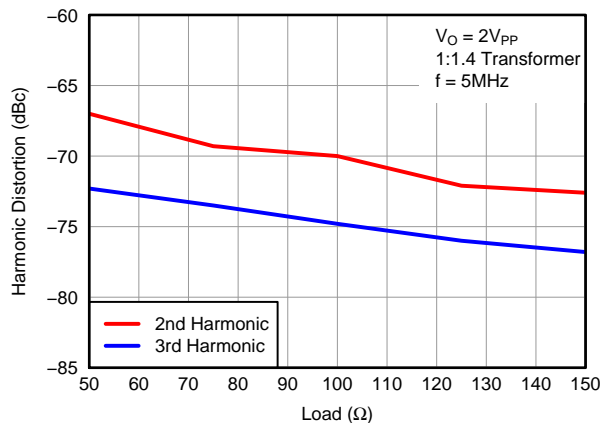


**Figure 10.**

**TWO-TONE, THIRD-ORDER INTERMODULATION SPURIOUS**

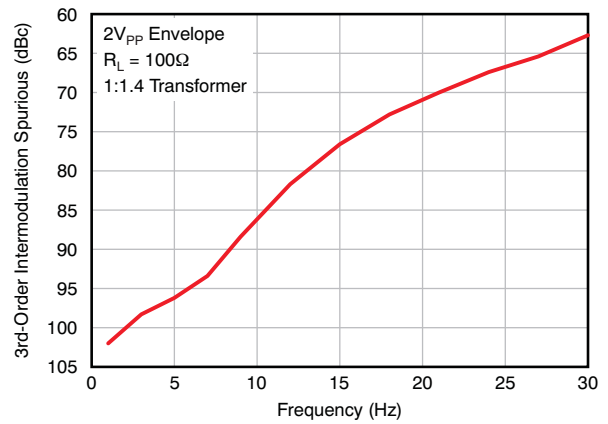


**Figure 11.**

**HARMONIC DISTORTION vs OUTPUT VOLTAGE**

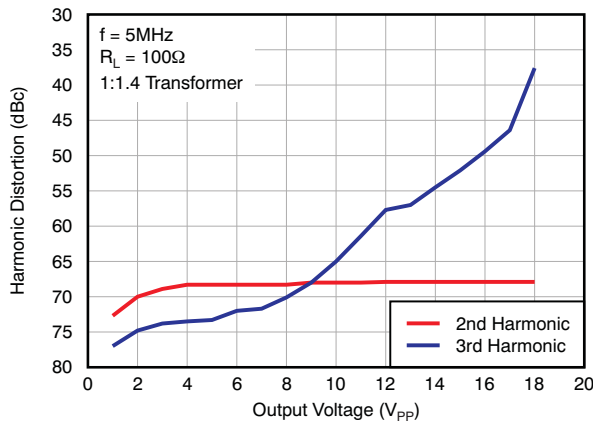

**Figure 12.**

**HARMONIC DISTORTION vs BIAS CURRENT**

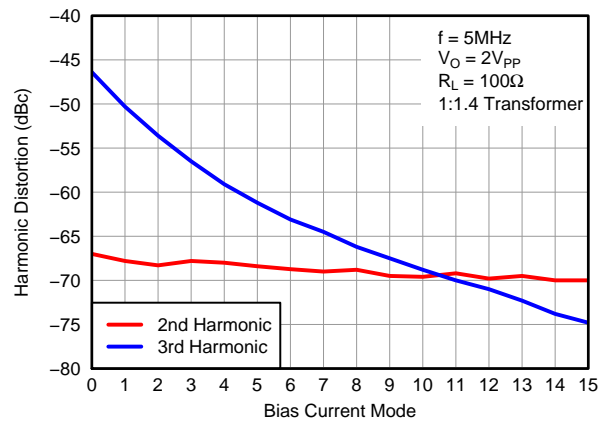

**Figure 13.**



**TYPICAL CHARACTERISTICS:  $V_S = +12V$  (continued)**

At  $T_A = +25^\circ C$  and Full Bias Mode, unless otherwise noted

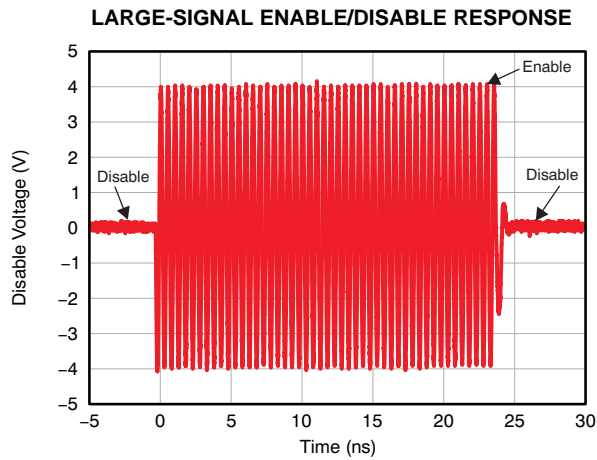


Figure 14.

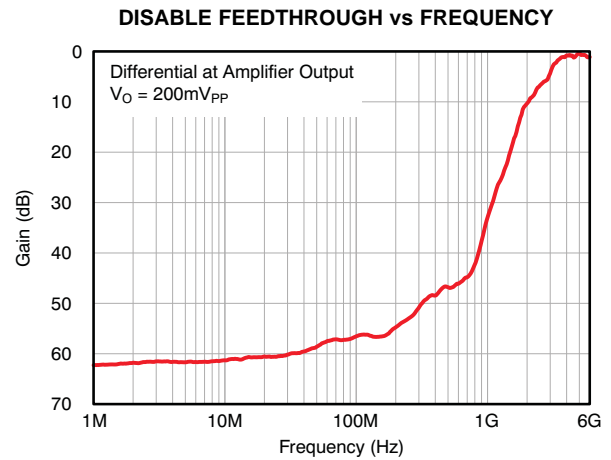


Figure 15.

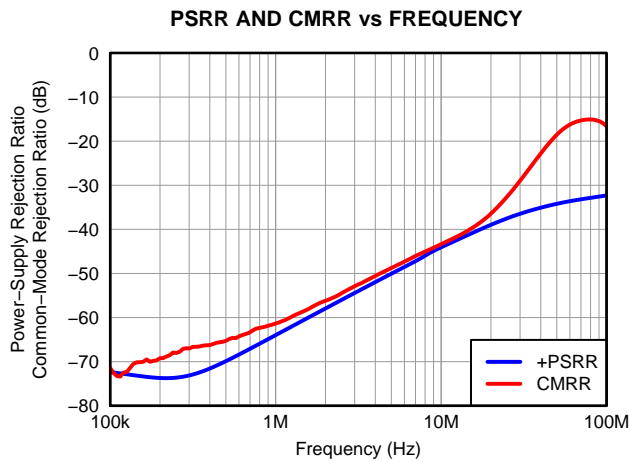


Figure 16.

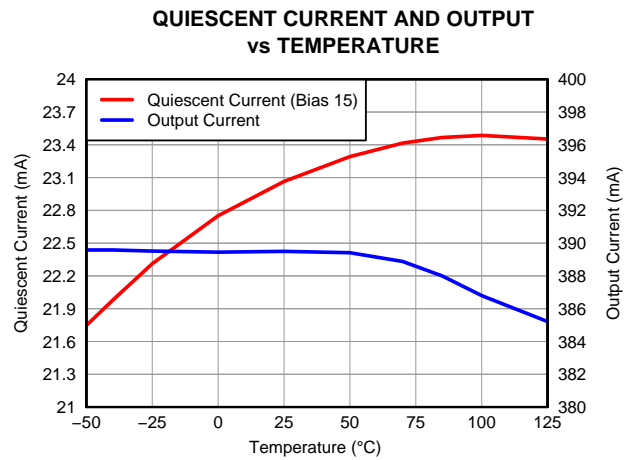


Figure 17.

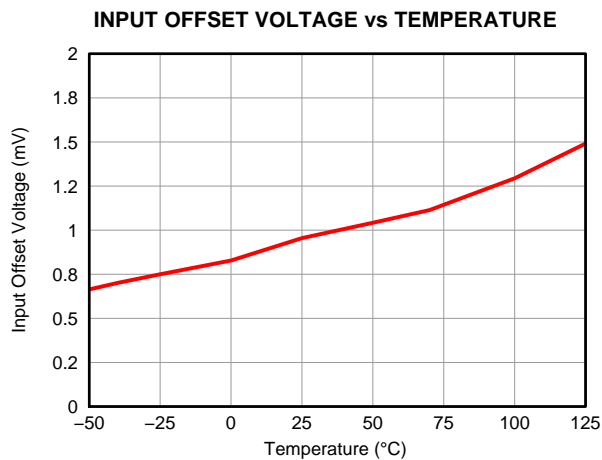


Figure 18.

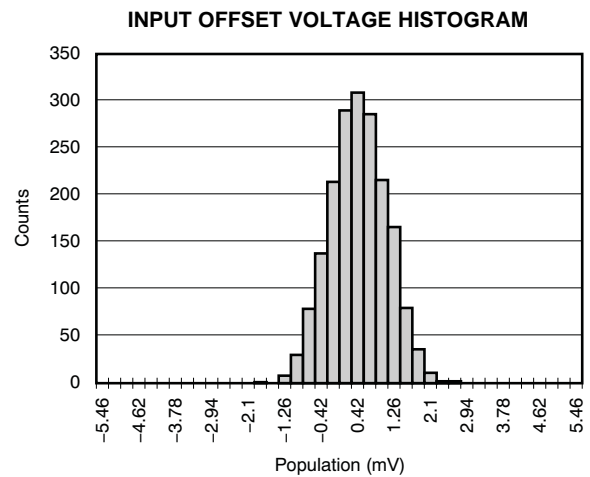


Figure 19.

### APPLICATION INFORMATION

The THS6226 class H line driver provides exceptional ac performance in conjunction with wide output voltage swing. The class H operation allows voltage swings to exceed the power supply for short intervals limited only by the charge in the capacitor. In class AB mode, the THS6226 is capable of driving a 60Ω load from +1.9V to +10.1V. In class H mode, under the same conditions, the output voltage range becomes an impressive –5.5V to +17.5V, or 46V<sub>PP</sub> differentially with the capacitor fully charged.

Figure 20 shows a fully-differential, noninverting amplifier configuration with active impedance. In this configuration, the 10.2Ω matching resistance appears through the transformer as 100Ω, minimizing reflection on the line, while also minimizing transmission losses. The THS6226 gain is fixed and equal to 19V/V from input of the amplifier to the output of the amplifier (IN<sub>CD</sub> to OUT<sub>CD</sub>), not including the transformer-turn ratio.

To simplify the implementation as well as provide design flexibility, the THS6226 contains an integrated mid-supply buffer that provides the correct biasing to the amplifier core without requiring any external components. Also present is a two-pin serial interface that provides exceptional design flexibility and allows minimal power consumption for each xDSL profile.

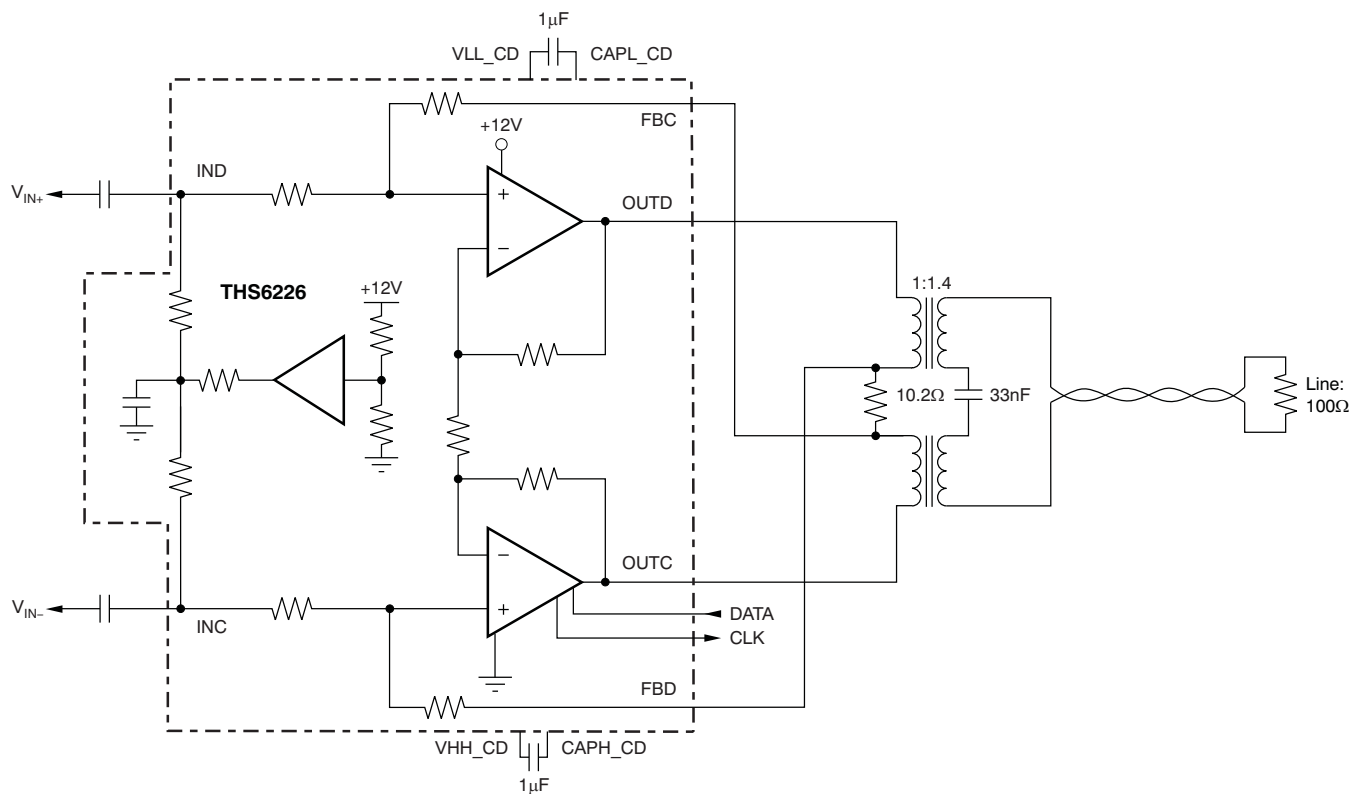


Figure 20. Multi-Tone Power Ratio (MTPR) Test Circuit

## PROGRAMMING THE THS6226

Programming of the THS6226 is realized through a serial interface (pins 4 and 5) and proceeds in the following sequence.

Two start bits are required B0 = 0 followed by B1 = 1.

B2 through B9 are used to program the THS6226.

Refer to [Table 1](#) for the bit descriptions.

B10 (refer to [Table 2](#)) is the parity bit that controls if the word is or is not loaded.


B11 is the stop bit and should be set to B11 = 1. [Figure 21](#) shows the sequence to be adopted.

**Table 1. SDATA**

PARAMETER	DESCRIPTION
B0, B1	Start bit
B2, B3	Channel select
B4, B5	Power-down features
B6-B9	Quiescent current setting
B10	Parity bit
B11	Stop bit

**Table 2. Parity Bit**

B10	ODD PARITY BIT
0	If odd, number of high bits in B2 to B9
1	If even, number of high bits in B2 to B9

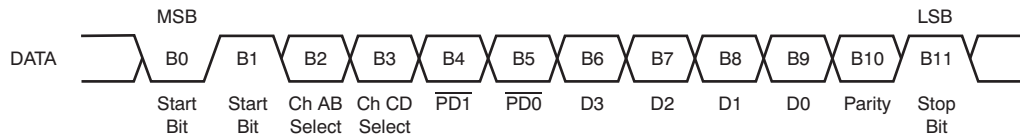

**Figure 21. DATA Description**

## QUIESCENT CURRENT

The quiescent current of the THS6226 is dissipated in two main modules of the THS6226: the class AB and the charge pump. B4 and B5 select the mode of operation, class AB operating with or without the charge pump enabled, powering down the entire port, or operating in a line termination mode. [Table 4](#) lists the details on each bit functionality and the approximate quiescent current.

The class AB quiescent current is set by bits B6 to B9, using B4 and B5 for the power-down function, and B2 and B3 for channel select. The approximate quiescent current for the amplifier core is shown in [Table 3](#).

**Table 3. Class AB Quiescent Current**

B6 (D3)	B7 (D2)	B8 (D1)	B9 (D0)	QUIESCENT CURRENT SETTING	APPROXIMATE $I_Q$ (mA/Port)
0	0	0	0	ADSL2+ mode	7.6
0	0	0	1		8.7
0	0	1	0	Profile 8b mode	9.8
0	0	1	1		10.9
0	1	0	0	Profile 17a mode	12
0	1	0	1		13
0	1	1	0		14
0	1	1	1		15
1	0	0	0		16
1	0	0	1		17
1	0	1	0	Profile 30a mode	18
1	0	1	1		19
1	1	0	0		20
1	1	0	1		21
1	1	1	0		22
1	1	1	1		23

The various power modes are shown in [Table 4](#). For all modes, when B6 through B9 are not defined, set B9 = B8 = B7 = B6 = 0 to achieve the lowest power dissipation possible.

**Table 4. Power Modes**

B4 (PD1)	B5 (PD0)	POWER-DOWN MODE	APPROXIMATE $I_Q$ (mA/Port)
0	0	Power-down (B9, B8, B7, B6 = 0)	0.85
0	1	Line termination mode (B9, B8, B7, B6 = 0)	4.4
1	0	Class AB driver $I_Q$ set by B6 to B9, class H disabled	—
1	1	Class AB driver $I_Q$ set by B6 to B9, class H enabled	—

Channel selection is shown in [Table 5](#). Each channel can be programmed independently, or together if both B2 and B3 are set to '1'.

**Table 5. Channel Selection**

B2 (Channel AB)	B3 (Channel CD)	CHANNEL SELECT
0	0	Bits B4 to B9 are ignored
0	1	Channel B programmed with B4 to B9
1	0	Channel A programmed with B4 to B9
1	1	Channels A and B programmed with B4 to B9

At startup, the internal register is set as shown in [Table 6](#).

**Table 6. Internal Register**

B2 (Channel AB)	B3 (Channel CD)	B4 (PD1)	B5 (PD0)	B6 (D3)	B7 (D2)	B8 (D1)	B9 (D0)
0	0	0	0	0	0	0	0

In this condition, the total quiescent power dissipation is 10.2mW/port on a +12V supply.

## REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from Revision B (February 2011) to Revision C</b>	<b>Page</b>
• Changed LOGIC, <i>Logic pin input impedance</i> typical specification and unit in Electrical Characteristics table .....	4
• Changed Timing Characteristics section .....	6

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">THS6226IRHBR</a>	Active	Production	VQFN (RHB)   32	3000   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	THS6226 IRHB
THS6226IRHBR.A	Active	Production	VQFN (RHB)   32	3000   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	THS6226 IRHB
<a href="#">THS6226IRHBT</a>	Active	Production	VQFN (RHB)   32	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	THS6226 IRHB
THS6226IRHBT.A	Active	Production	VQFN (RHB)   32	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	THS6226 IRHB

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.





**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS6226IRHBR	VQFN	RHB	32	3000	330.0	12.4	5.3	5.3	1.1	8.0	12.0	Q2
THS6226IRHBT	VQFN	RHB	32	250	180.0	12.4	5.3	5.3	1.1	8.0	12.0	Q2

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS6226IRHBR	VQFN	RHB	32	3000	346.0	346.0	33.0
THS6226IRHBT	VQFN	RHB	32	250	210.0	185.0	35.0

## GENERIC PACKAGE VIEW

**RHB 32**

**VQFN - 1 mm max height**

5 x 5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4224745/A



NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.




# EXAMPLE STENCIL DESIGN

RHB0032E

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

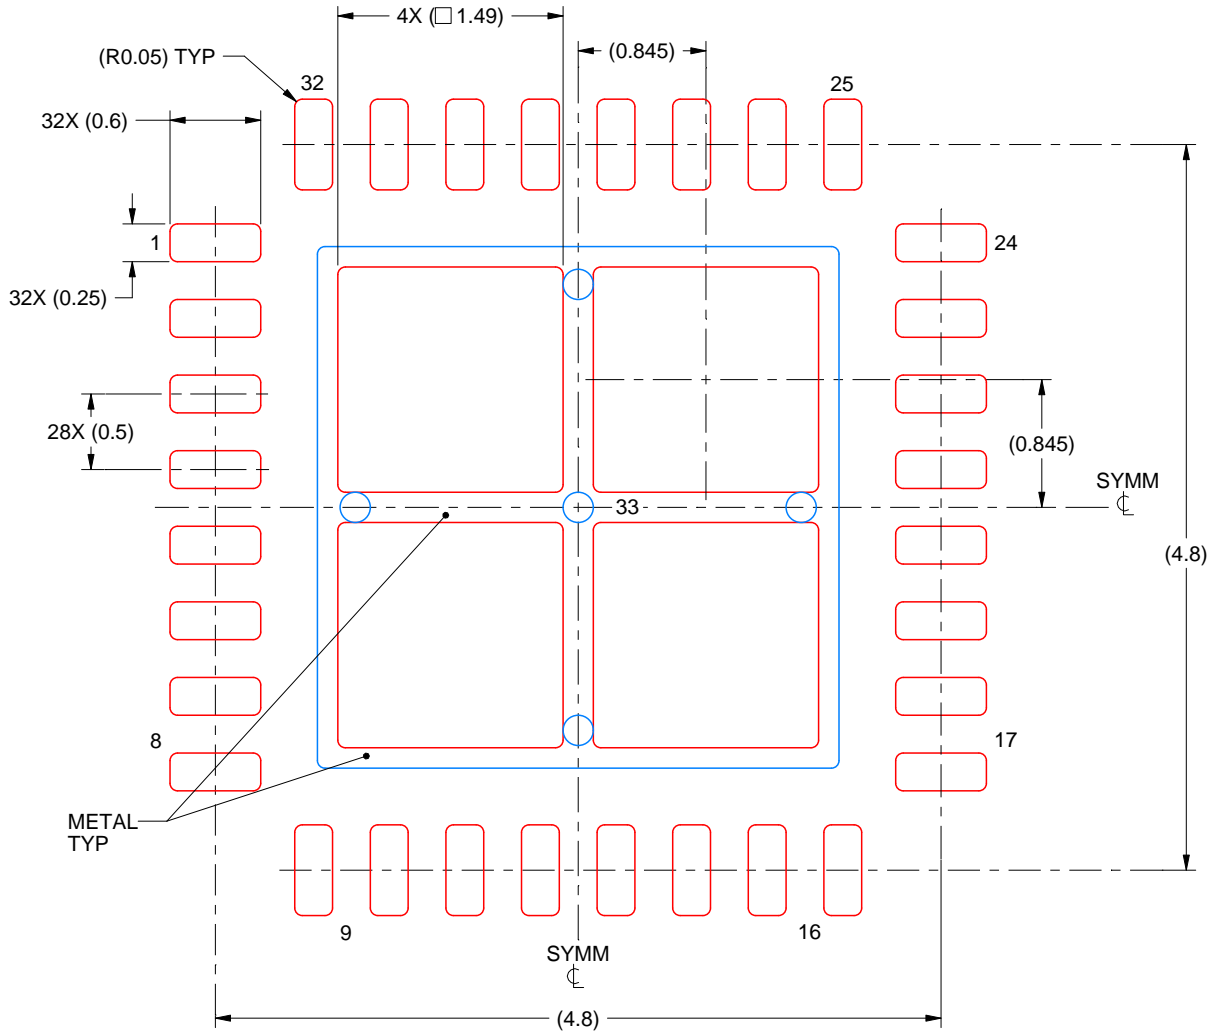

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 33:  
75% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4223442/B 08/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025