

TSMU816A030 8-Channel, 16-Bit, 30V, 100mA-Output, High-Capacitive-Drive Parametric Measurement Unit (PMU)

1 Features

- 8-channel 4-quadrant PMU
 - FV, FI, FZ (high-Z), MV, and MI functions
- Programmable current ranges
 - Internal $\pm 5\mu\text{A}$, $\pm 40\mu\text{A}$, $\pm 200\mu\text{A}$, $\pm 2\text{mA}$ ranges
 - Up to $\pm 100\text{mA}$ with external R_{SENSE}
- 30V FV span with asymmetrical range choices
- Stable operation with up to $10\mu\text{F}$ C_{LOAD}
- Channel independent DACs
 - 16-bit force DAC with multiple voltage ranges
 - 16-bit offset, and voltage clamp DACs
 - 15-bit current clamp DACs
- Offset error and gain error calibration with true 16-bit endpoint performance
- Dual configuration state digital architecture
- Fast current clamps

2 Applications

- Memory test
- Semiconductor test
- Source measurement units

3 Description

The TSMU816A030 is a high-performance, highly integrated parametric measurement unit (PMU)


consisting of eight independent channels. Each channel includes one voltage output DAC that sets the programmable input levels for the force voltage amplifier, and two clamp input DACs. Five resistor-based, programmable, force-and-measure current ranges are available, ranging from $\pm 5\mu\text{A}$ to $\pm 100\text{mA}$. Four of these ranges use on-chip sense resistors.

Measurements for the eight channels can be multiplexed in a wired-or configuration, which eliminates the need for an external multiplexer. Individual measurement outputs for respective channels are also available. The PMU functions are controlled using a simple SPI-compatible serial interface. An interface clock of 80MHz allows for fast-mode updates and state changes with the dual-state, double-buffered architecture. Configuration registers provide the ability to easily change force or measure conditions, DAC levels, and selected current ranges.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
TSMU816A030	ACQ (FCBGA, 144)	16mm × 16mm
	AMO (FCBGA, 196)	20mm × 20mm

- For more information, see [Section 11](#).
- The package size (length × width) is a nominal value and includes pins, where applicable.

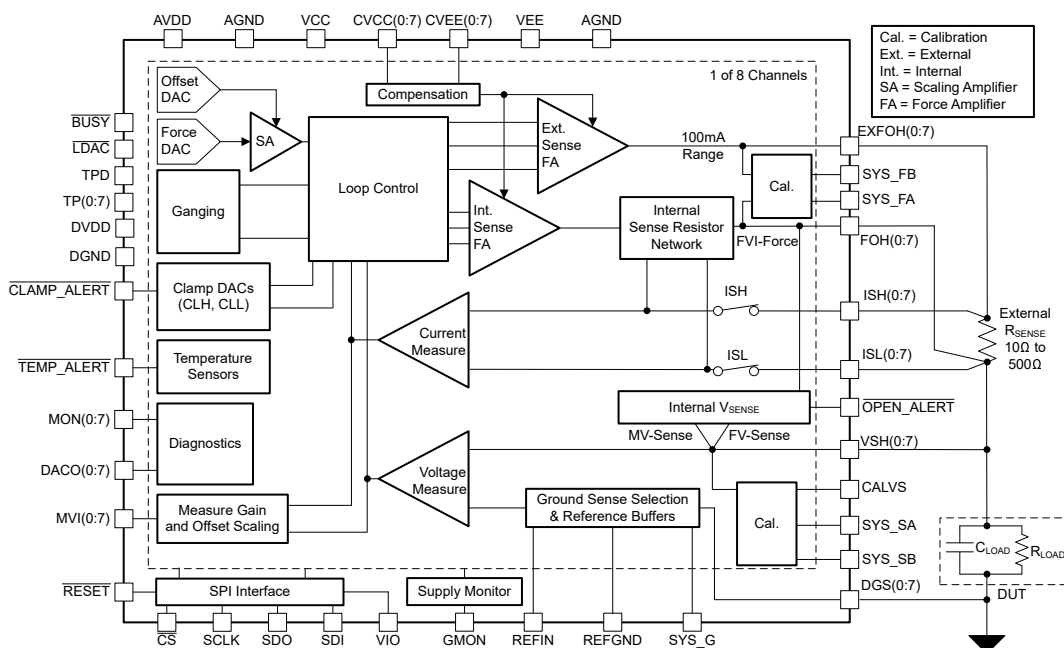

Block Diagram



4 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and aid development are listed below.

4.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

4.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

4.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

4.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

4.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
December 2025	*	Initial Release

6 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025