


# TPS7B4256-Q1 トラッキング許容誤差 6mV、車載用、70mA、40V、電圧トラッキング LDO

## 1 特長

- 車載アプリケーション用に AEC-Q100 認定済み：
  - 温度グレード 1：-40°C ~ +125°C、 $T_A$
  - 接合部温度：-40°C ~ +150°C、 $T_J$
- 幅広い入力電圧範囲：
  - 絶対最大入力範囲：-40V ~ +45V
  - 動作範囲：3V ~ 40V
- 出力電圧：
  - 広い動作範囲：2V ~ 40V
  - 出力電圧の柔軟性：分圧器構成で外付け抵抗を使用して、 $V_{OUT}$  を基準電圧より高い値または低い値にスケールリング可能
- 最大出力電流：70mA
- 非常に厳格な出力トラッキング許容誤差：6mV (最大値)
- Low ドロップアウト電圧：70mA のとき 225mV (最大値)
- イネーブル機能と基準電圧機能の組み合わせ
- 低い静止電流 (軽負荷時)：60 $\mu$ A
- 幅広いセラミック出力コンデンサの値全体で安定：
  - $C_{OUT}$  範囲：1 $\mu$ F ~ 100 $\mu$ F
  - ESR 範囲：1m $\Omega$  ~ 2 $\Omega$
- 内蔵保護機能：
  - 逆電流保護
  - 逆極性保護
  - 過熱保護
  - グラウンド / 電源への出力短絡に対する保護
- 以下の熱抵抗の小さい 8 ピンのパッケージで供給：
  - HSOIC (DDA)、 $R_{\theta JA} = 53.3^\circ\text{C/W}$
  - SOIC (D)、 $R_{\theta JA} = 101^\circ\text{C/W}$

## 2 アプリケーション

- パワートレインの圧力センサ
- パワートレインの温度センサ
- パワートレインの排気ガス・センサ
- パワートレインの液体濃度センサ
- 車体制御モジュール (BCM)

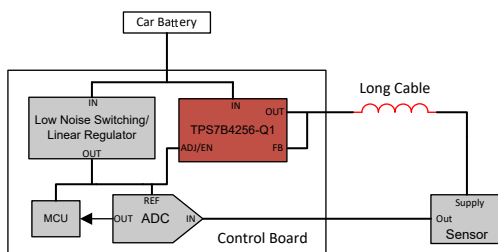

代表的なアプリケーション

## 3 概要

TPS7B4256-Q1 は、モノリシックの統合型低ドロップアウト (LDO) 電圧トラッカーです。このデバイスは、8 ピンの SOIC および HSOIC パッケージで供給されます。TPS7B4256-Q1 は、車載環境でオフボード・センサに電源を供給するよう設計されています。オフボード電力を供給するケーブル上で障害が発生するリスクが高いため、このデバイスには、逆電流 (バッテリーへの短絡)、逆極性、出力からグラウンドへの短絡 (電流制限)、過熱 (サーマル・シャットダウン) などのフォルト条件に対する保護機能が内蔵されています。このデバイスには、背中合わせに接続した PMOS トポロジが組み込まれているため、逆電流の原因となるフォルト条件から保護するための外付けダイオードが不要になります。このデバイスは、45V (絶対最大定格) までの入力電圧に対応し、車載向けの負荷ダンプ過渡条件に耐えられるように設計されています。

可変入力ピン (ADJ/EN) に印加される基準電圧は、FB ピンの温度範囲全体にわたって 6mV (最大値) の非常に厳しい公差でトラッキングされます。このトラッキングにより、TPS7B4256-Q1 は、最大 70mA の負荷に対して高精度で電源電圧を供給できます。基準電圧は、ADJ/EN ピンに直接接続することも、ADJ/EN ピンに接続する外付け抵抗分圧器を使用して最小 2V まで低減することもできます。FB ピンを OUT ピンに直接結線するか、FB と OUT ピンの間の抵抗分圧器を使用してより高い値にスケールリングすることにより、出力電圧を ADJ/EN ピン (±トラッキング許容誤差) の電圧と等しくすることもできます。

### パッケージ情報

部品番号	パッケージ <sup>(1)</sup>	パッケージ・サイズ <sup>(2)</sup>
TPS7B4256-Q1	DDA (HSOIC, 8)	4.9mm × 6mm
	D (SOIC, 8)	

- 詳細については、「[メカニカル、パッケージ、および注文情報](#)」を参照してください。
- パッケージ・サイズ (長さ×幅) は公称値であり、該当する場合はピンも含まれます。



TPS7B4256-Q1 は、ADC の基準電圧に対する効果的なバッファとして機能し、この電圧 (またはそのスケールされた電圧) を長いケーブルで安全に送信して、オフボード・センサに電力を供給します。センサがレシオメトリックで、出力が ADC によってサンプリングされる場合、TPS7B4256-Q1 の説明した機能により、センサ測定の信頼性と精度の大幅な向上が可能になります。

ADJ/EN 入力ピンを Low に設定することで、TPS7B4256-Q1 はスタンバイモードに切り替わり、低ドロップアウトレギュレータ (LDO) の静止電流消費を 3.5 $\mu$ A 未満に低減できます。

## Table of Contents

<b>1 特長</b> .....	1	<b>7 Application and Implementation</b> .....	18
<b>2 アプリケーション</b> .....	1	7.1 Application Information.....	18
<b>3 概要</b> .....	1	7.2 Typical Application.....	19
<b>4 Pin Configuration and Functions</b> .....	4	7.3 Power Supply Recommendations.....	22
<b>5 Specifications</b> .....	5	7.4 Layout.....	22
5.1 Absolute Maximum Ratings.....	5	<b>8 Device and Documentation Support</b> .....	26
5.2 ESD Ratings.....	5	8.1 Device Support.....	26
5.3 Recommended Operating Conditions.....	5	8.2 ドキュメントの更新通知を受け取る方法.....	26
5.4 Thermal Information.....	6	8.3 サポート・リソース.....	26
5.5 Electrical Characteristics.....	6	8.4 Trademarks.....	26
5.6 Typical Characteristics.....	7	8.5 静電気放電に関する注意事項.....	26
<b>6 Detailed Description</b> .....	11	8.6 用語集.....	26
6.1 Overview.....	11	<b>9 Revision History</b> .....	26
6.2 Functional Block Diagram.....	11	<b>10 Mechanical, Packaging, and Orderable Information</b> .....	27
6.3 Feature Description.....	11		
6.4 Device Functional Modes.....	17		

## 4 Pin Configuration and Functions

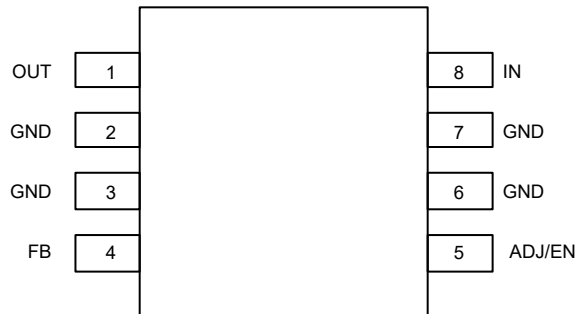


図 4-1. D Package, 8-Pin SOIC (Top View)

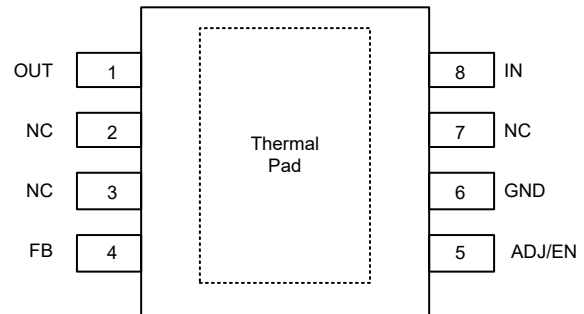


図 4-2. DDA Package, 8-Pin HSOIC (Top View)

表 4-1. Pin Functions

NAME	PIN		TYPE	DESCRIPTION
	D	DDA		
ADJ/EN	5	5	I	Adjustable/enable input pin. Connect the external reference voltage to this pin. This pin connects to the inverting input of the error amplifier internally. A low signal below $V_{IL}$ disables the device, and a high signal above $V_{IH}$ enables the device. Connect the voltage reference directly, or with a voltage divider to attain output voltages lower than the reference; see the <a href="#">Tracker Output Voltage (<math>V_{OUT}</math>)</a> section for more details. To compensate for line influences, place a 0.1- $\mu$ F capacitor close to this pin.
FB	4	4	I	Feedback pin. This pin is connected to the noninverting input of the error amplifier internally and can be used to control the output voltage. For output voltages equal to or less than the external reference voltage, connect this pin directly to the output pin. To attain output voltage values higher than the reference, use a voltage divider with external feedback resistors; see the <a href="#">Tracker Output Voltage (<math>V_{OUT}</math>)</a> section for more details.
GND	2, 3, 6, 7	6	G	GND pin. Connect this pin to a low impedance path to ground.
IN	8	8	I	Input power-supply voltage pin. For best transient response and to minimize input impedance, use the recommended value or larger ceramic capacitor from IN to GND, as listed in the <a href="#">Recommended Operating Conditions</a> table. Place the input capacitor as close to the input pin of the device as possible to compensate for line influences.
NC	—	2, 3, 7	—	Not internally connected. For best thermal performance, connect these pins to GND.
OUT	1	1	O	Regulated output voltage pin. A capacitor is required from OUT to GND for stability. For best transient response, use the nominal recommended value or larger ceramic capacitor from OUT to GND; see the <a href="#">Recommended Operating Conditions</a> table. Place the output capacitor as close to output of the device as possible.
Thermal Pad	—	Pad		Thermal pad. Connect the pad to GND for best possible thermal performance.

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
V <sub>IN</sub>	Unregulated input	-40	45	V
V <sub>OUT</sub>	Regulated output	-5	45	V
V <sub>FB</sub>	Feedback	-5	45	V
V <sub>ADJ/EN</sub>	Adjustable reference and enable input voltage	-40	45	V
T <sub>J</sub>	Operating junction temperature	-40	150	°C
T <sub>stg</sub>	Storage temperature	-65	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may effect the device reliability, functionality, performance, and shorten the device lifetime.

### 5.2 ESD Ratings

			VALUE	UNIT	
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup>	±2500	V	
		Charged-device model (CDM), per AEC Q100-011	All pins		±1000
			Corner pins		

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
V <sub>IN</sub>	Input voltage	3		40	V
V <sub>OUT</sub>	Output voltage	2		40	V
V <sub>ADJ/EN</sub>	Adjust pin voltage	2		40	V
V <sub>FB</sub>	Feedback pin voltage	0		40	V
I <sub>OUT</sub>	Output current	0		70	mA
C <sub>IN</sub>	Input capacitor <sup>(1)</sup>		1		µF
C <sub>OUT</sub>	Output capacitor <sup>(2)</sup>	1		100	µF
ESR	Output capacitor ESR requirements	0.001		2	Ω
T <sub>J</sub>	Operating junction temperature	-40		150	°C

- (1) For robust EMI performance the minimum input capacitance recommended is 500 nF.  
 (2) Effective output capacitance of 500 nF minimum is required for stability.

## 5.4 Thermal Information

THERMAL METRIC <sup>(1) (2)</sup>		TPS7B4256-Q1		
		D (SOIC)	DDA (HSOIC)	UNIT
		8 PINS	8 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	100.9	53.3	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	50.2	75.2	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	38.3	28.1	°C/W
ψ <sub>JT</sub>	Junction-to-top characterization parameter	8.4	10.9	°C/W
ψ <sub>JB</sub>	Junction-to-board characterization parameter	37.9	28	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	-	13.3	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.
- (2) The thermal data is based on the JEDEC standard high-K board layout, JESD 51-7. This is a two-signal, two-plane, four-layer board with 2-oz. copper on the external layers. The copper pad is soldered to the thermal land pattern. Also, correct attachment procedure must be incorporated.







## 5.5 Electrical Characteristics

specified at T<sub>J</sub> = -40°C to +150°C, V<sub>IN</sub> = 13.5 V, V<sub>OUT</sub> = V<sub>FB</sub>, I<sub>OUT</sub> = 100 μA, C<sub>OUT</sub> = 1 μF, C<sub>IN</sub> = 1 μF and V<sub>ADJ/EN</sub> = 5 V (unless otherwise noted); typical values are at T<sub>J</sub> = 25°C







PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I <sub>Q</sub>	Quiescent current	V <sub>IN</sub> = 5.4 V to 40 V, V <sub>ADJ/EN</sub> = 5 V, I <sub>OUT</sub> = 100 μA, T <sub>J</sub> = 25°C		50	60	μA
		V <sub>IN</sub> = 5.4 V to 40 V, V <sub>ADJ/EN</sub> = 5 V, I <sub>OUT</sub> = 100 μA, -40°C < T <sub>J</sub> < 85°C			65	
		V <sub>IN</sub> = 5.4 V to 40 V, V <sub>ADJ/EN</sub> = 5 V, I <sub>OUT</sub> = 100 μA			70	
I <sub>GND</sub>	Ground current	V <sub>IN</sub> = 5.4 V to 40 V, V <sub>ADJ/EN</sub> = 5 V, I <sub>OUT</sub> = 70 mA			1	mA
I <sub>SHUTDOWN</sub>	Shutdown supply current	V <sub>EN</sub> = 0 V			3.5	μA
I <sub>ADJ/EN</sub>	ADJ/EN pin current	I <sub>OUT</sub> = 100 μA to 70 mA			0.9	μA
V <sub>UVLO(RISING)</sub>	Rising input supply UVLO	V <sub>IN</sub> rising, I <sub>OUT</sub> = 5 mA	2.6	2.7	2.85	V
V <sub>UVLO(FALLING)</sub>	Falling input supply UVLO	V <sub>IN</sub> falling, I <sub>OUT</sub> = 5 mA	2.3	2.4	2.5	V
V <sub>UVLO(HYST)</sub>	V <sub>UVLO(IN)</sub> hysteresis			300		mV
V <sub>IL</sub>	Enable logic input low level				0.8	V
V <sub>IH</sub>	Enable logic input high level		1.8			V
V <sub>OUT</sub>	Regulated output	V <sub>IN</sub> = V <sub>OUT</sub> + 400 mV to 40 V, I <sub>OUT</sub> = 100 μA to 70 mA	-6		6	mV
ΔV <sub>OUT(ΔVIN)</sub>	Line regulation	V <sub>IN</sub> = V <sub>OUT</sub> + 400 mV to 40 V, I <sub>OUT</sub> = 100 μA	-0.4		0.4	mV
ΔV <sub>OUT(ΔIOUT)</sub>	Load regulation	V <sub>IN</sub> = V <sub>OUT</sub> + 400 mV, I <sub>OUT</sub> = 100 μA to 70 mA <sup>(1)</sup>	-0.5		0.5	mV
V <sub>DO</sub>	Dropout voltage	I <sub>OUT</sub> = 70 mA, V <sub>ADJ/EN</sub> ≥ 3.3 V, V <sub>IN</sub> = V <sub>ADJ/EN</sub>		130	225	mV
I <sub>CL</sub>	Output current limit	V <sub>IN</sub> = V <sub>OUT</sub> + 1 V, V <sub>OUT</sub> short to 90% x V <sub>ADJ/EN</sub>	85	105	125	mA
PSRR	Power-supply ripple rejection	V <sub>ripple</sub> = 1 V <sub>PP</sub> , frequency = 100 Hz, I <sub>OUT</sub> ≥ 5 mA		80		dB
V <sub>n</sub>	Output noise voltage	V <sub>OUT</sub> = 3.3 V, I <sub>OUT</sub> = 1 mA, a 5 μV <sub>RMS</sub> reference is used for this measurement		150		μV <sub>RMS</sub>
I <sub>REV</sub>	Reverse current at V <sub>IN</sub>	V <sub>IN</sub> = 0 V, V <sub>OUT</sub> = 32 V, V <sub>ADJ/EN</sub> = 5 V	-0.6		0.6	μA
I <sub>REV-N1</sub>	Reverse current at negative V <sub>IN</sub>	V <sub>IN</sub> = -20 V, V <sub>OUT</sub> = 20 V, V <sub>ADJ/EN</sub> = 5 V	-1.1		1.1	μA
I <sub>REV-N2</sub>	Reverse current at negative V <sub>IN</sub>	V <sub>IN</sub> = -20 V, V <sub>OUT</sub> = 0 V, V <sub>ADJ/EN</sub> = 5 V	-0.6		0.6	μA
I <sub>FB</sub>	Feedback pin current			0.1	0.25	μA
T <sub>J</sub>	Junction temperature		-40		150	°C
T <sub>SD(SHUTDOWN)</sub>	Junction shutdown temperature			175		°C
T <sub>SD(HYST)</sub>	Hysteresis of thermal shutdown			15		°C

- (1) Power dissipation is limited to 2 W for device production testing purposes. The power dissipation can be higher during normal operation. See the thermal dissipation section for more information on how much power the device can dissipate while maintaining a junction temperature below 150°C.


### 5.6 Typical Characteristics

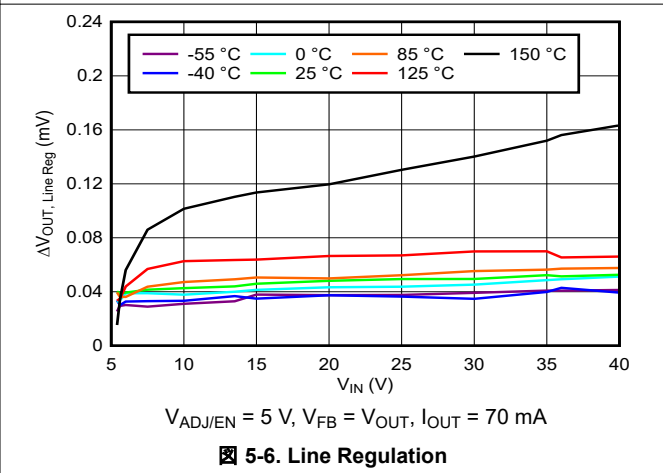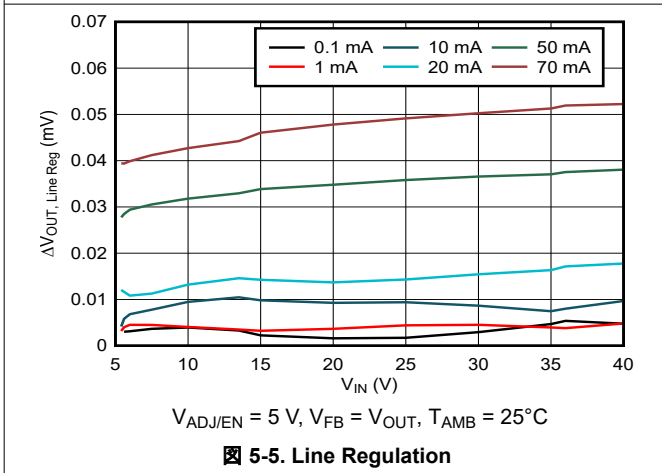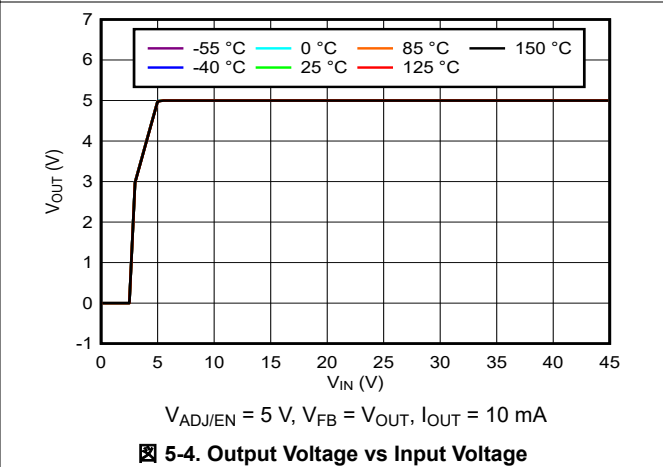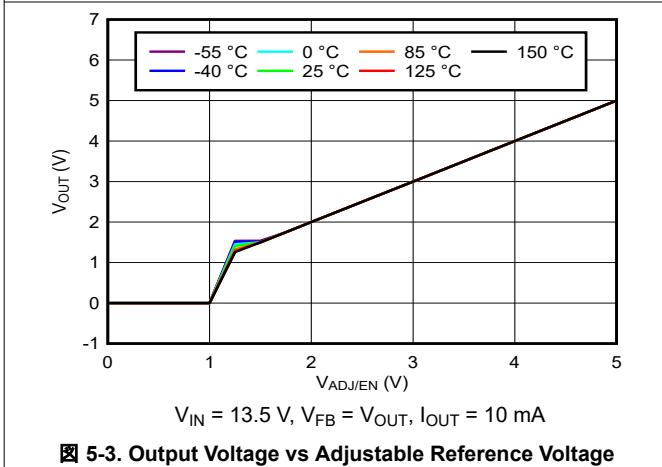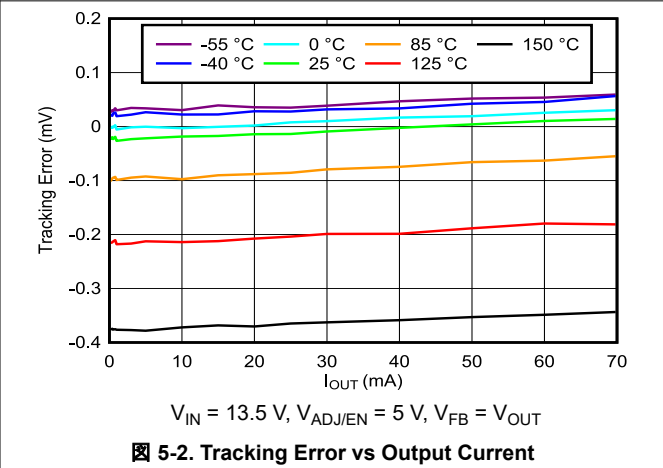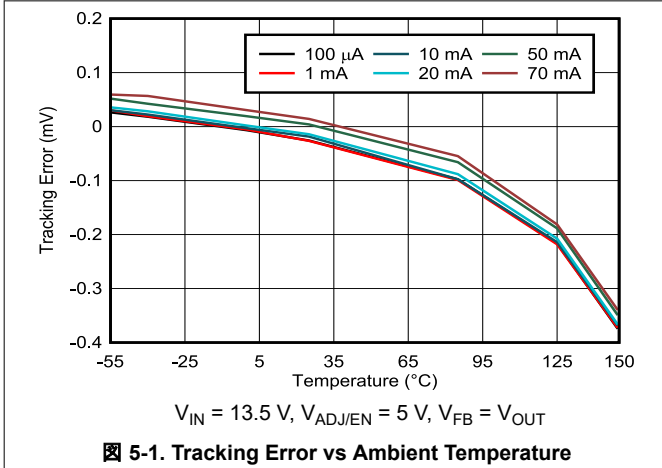

### 5.6 Typical Characteristics (continued)

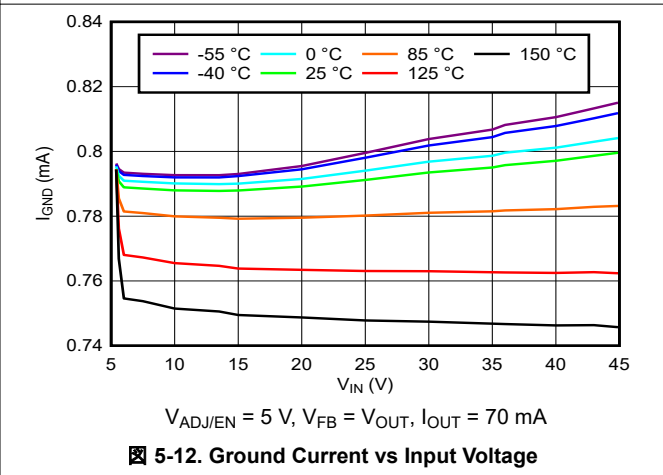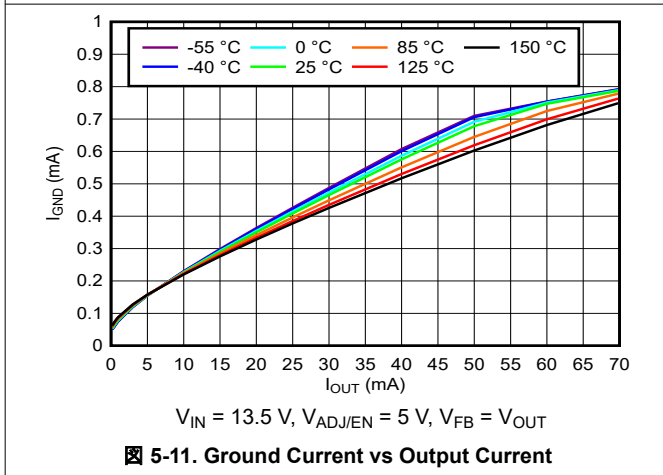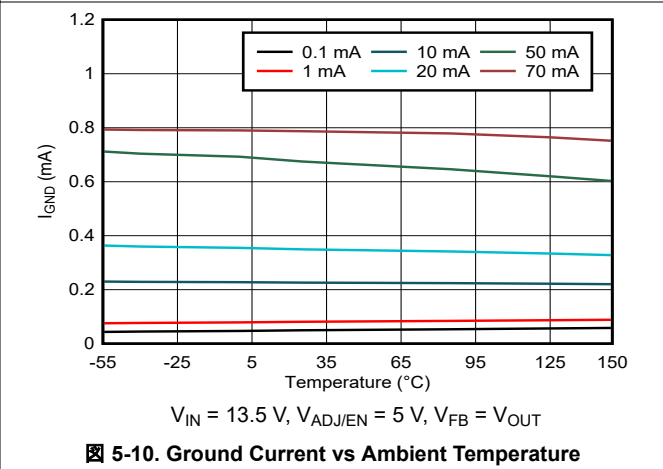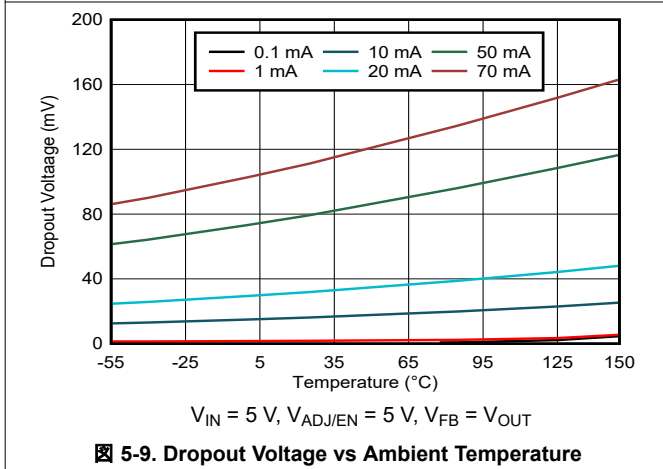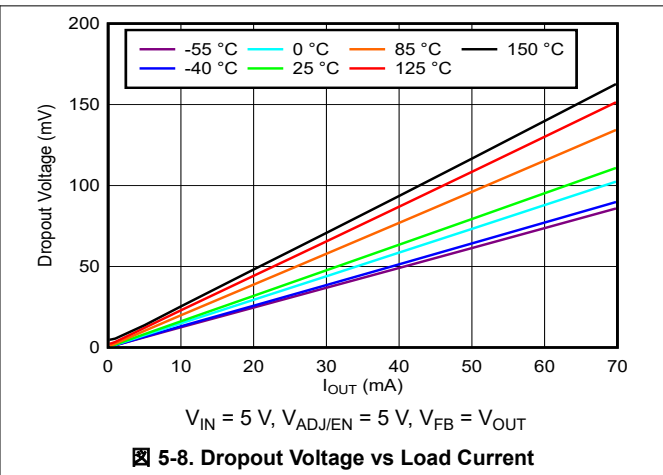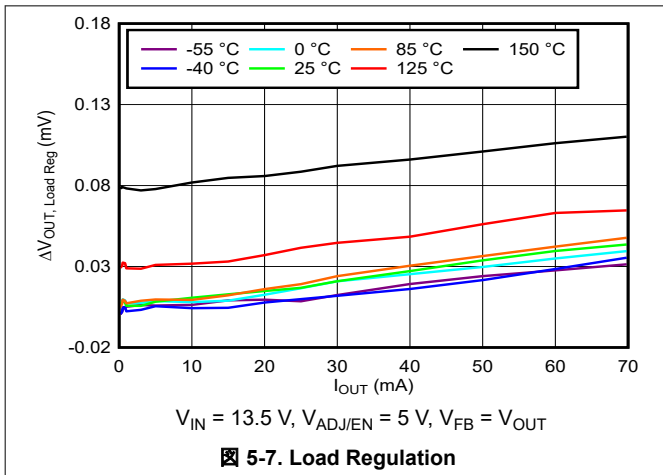


### 5.6 Typical Characteristics (continued)

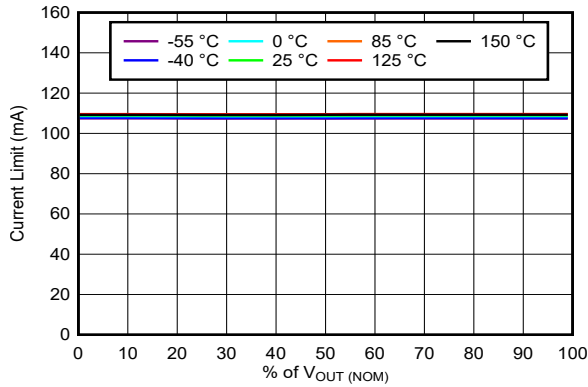


$V_{IN} = 13.5 \text{ V}$ ,  $V_{ADJ/EN} = 5 \text{ V}$ ,  $V_{FB} = V_{OUT}$

図 5-13. Current Limit vs Output Voltage

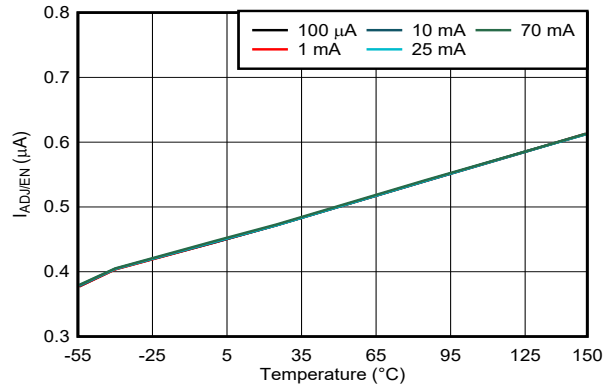


$V_{IN} = 13.5 \text{ V}$ ,  $V_{ADJ/EN} = 5 \text{ V}$ ,  $V_{FB} = V_{OUT}$

図 5-14. Adjustable Pin Current vs Ambient Temperature

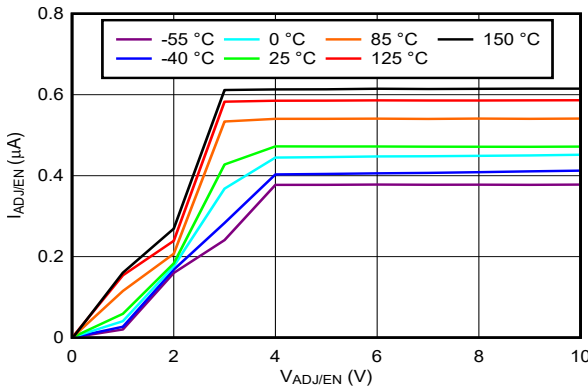


$V_{IN} = 13.5 \text{ V}$ ,  $V_{FB} = V_{OUT}$ ,  $I_{OUT} = 70 \text{ mA}$

図 5-15. Adjustable Pin Current vs Adjustable Pin Voltage

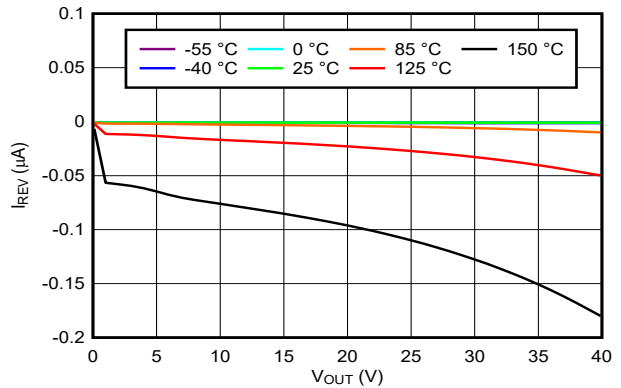


$V_{IN} = 0 \text{ V}$ ,  $V_{ADJ/EN} = 5 \text{ V}$ ,  $V_{FB} = V_{OUT}$

図 5-16. Reverse Current vs Output Voltage

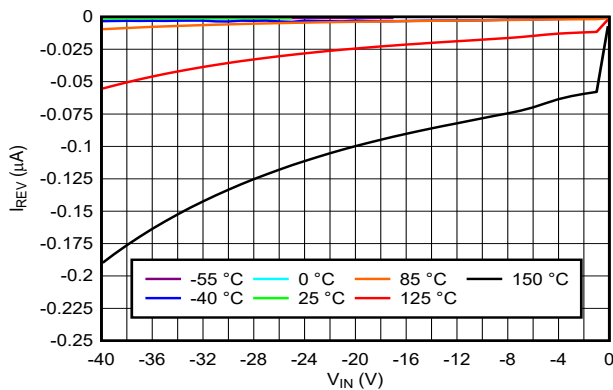

$V_{OUT} = 0 \text{ V}$ ,  $V_{ADJ/EN} = 5 \text{ V}$ ,  $V_{FB} = V_{OUT}$





図 5-17. Reverse Current vs Input Voltage

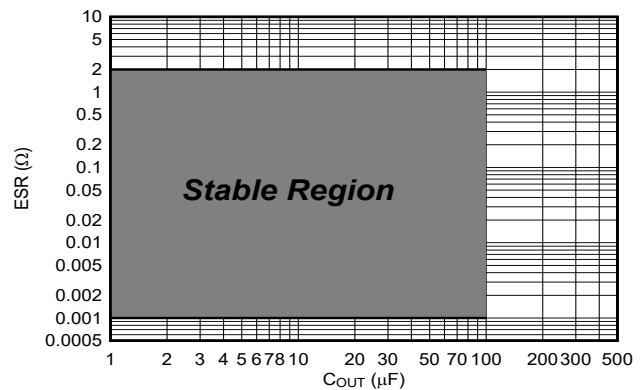

Stable region =  $1 \text{ m}\Omega \leq \text{ESR} \leq 2 \Omega$ ,  $1 \mu\text{F} \leq C_{OUT} \leq 100 \mu\text{F}$

図 5-18. ESR vs Load Capacitance

### 5.6 Typical Characteristics (continued)

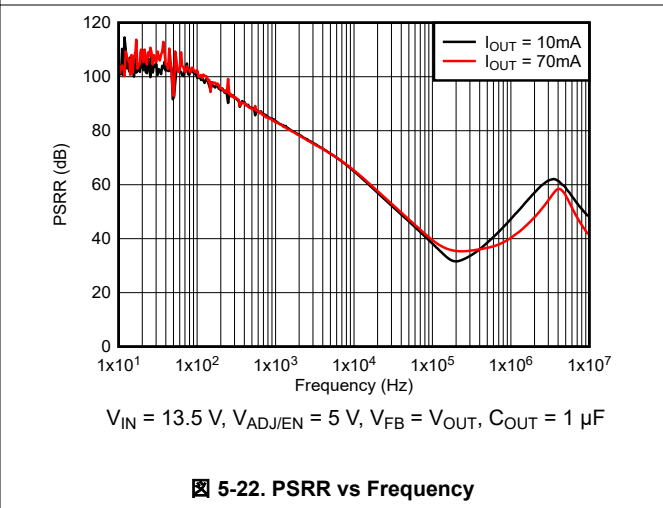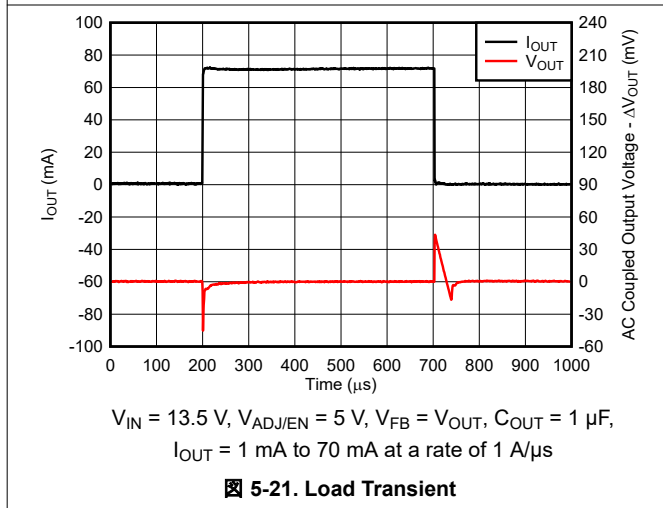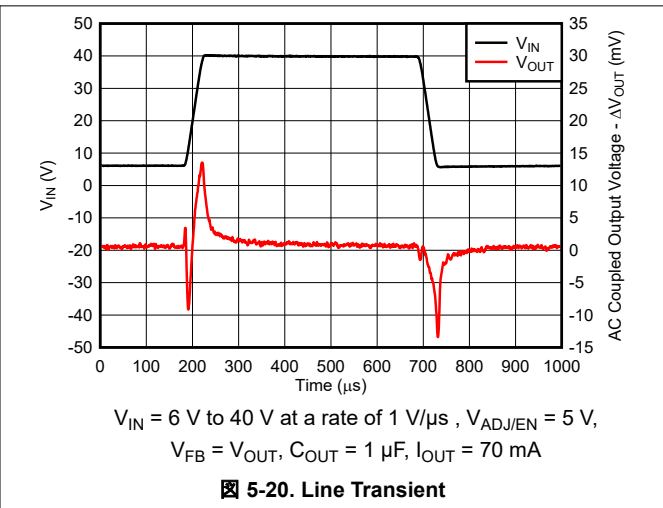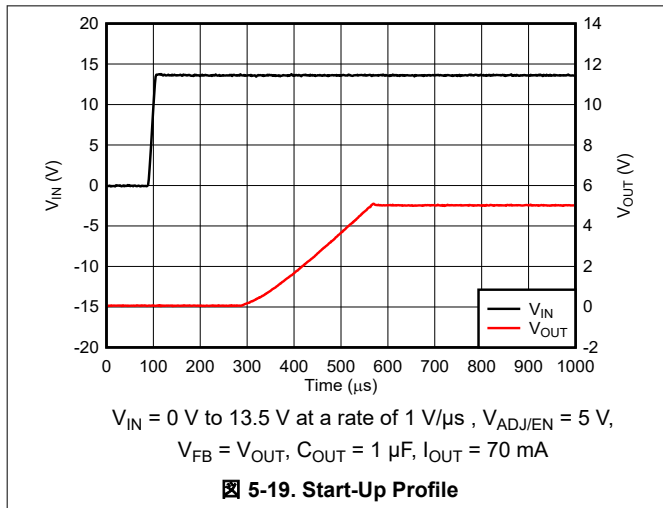


## 6 Detailed Description

### 6.1 Overview

The TPS7B4256-Q1 is an integrated, low-dropout (LDO) voltage tracker with ultra-low tracking tolerance. Because of the high risk of cable shorts when powering off-board sensors, multiple features are built into the LDO to protect against fault conditions resulting in short to battery, short to GND, and reverse current protection.

In addition, this device also features thermal shutdown protection, brick-wall current limiting, undervoltage lockout (UVLO), and reverse polarity protection.

### 6.2 Functional Block Diagram

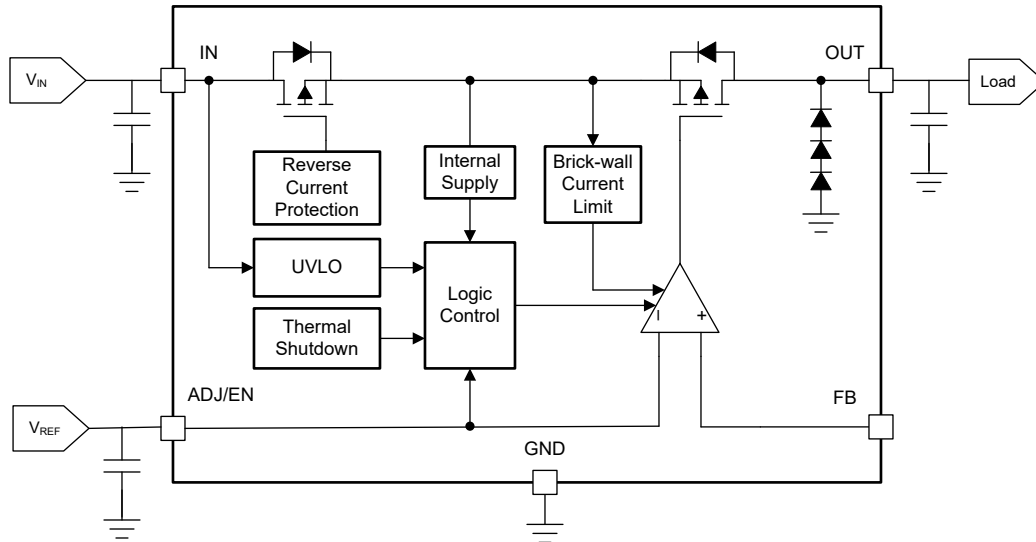

☒ 6-1. Functional Block Diagram

### 6.3 Feature Description


#### 6.3.1 Tracker Output Voltage ( $V_{OUT}$ )

Because this device is a tracking LDO, the output voltage is determined by the voltage provided to the ADJ/EN pin. The LDO remains disabled as long as  $V_{ADJ/EN}$  is less than  $V_{IL}$ . When  $V_{ADJ/EN}$  exceeds  $V_{IH}$ , the output voltage  $V_{OUT}$  begins to rise. The device has a soft-start feature incorporated, which allows the output voltage to rise linearly and limits the in-rush current at start-up. After start-up and upon attaining steady state, the feedback pin voltage  $V_{FB}$  remains within  $\pm 6$  mV from the voltage set on the ADJ/EN pin over all specified operating conditions.

### 6.3.1.1 Output Voltage Equal to Reference Voltage

As shown in [Figure 6-2](#), with the external reference voltage applied directly to the ADJ/EN pin and the FB pin connected to the OUT pin, the LDO output voltage is equal to the reference voltage, as given in [Equation 1](#).

$$V_{OUT} = V_{REF} \tag{1}$$

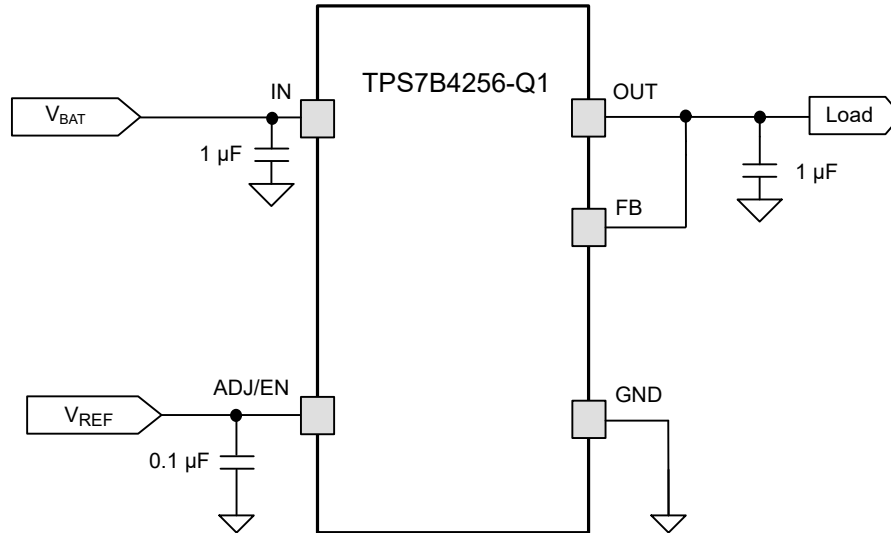


**Figure 6-2. Tracker Output Voltage equal to Reference Voltage**

### 6.3.1.2 Output Voltage Less Than the Reference Voltage

Connecting an external resistor divider at the ADJ/EN pin, as shown in [Figure 6-3](#), can help generate an output voltage that is lower than the reference voltage. Both  $R_1$  and  $R_2$  must be less than 100 k $\Omega$  to minimize the error in voltage caused by the ADJ/EN pin leakage current. [Equation 2](#) calculates  $V_{OUT}$ .

$$V_{OUT} = \frac{(V_{REF} \times R_2)}{R_1 + R_2} \tag{2}$$

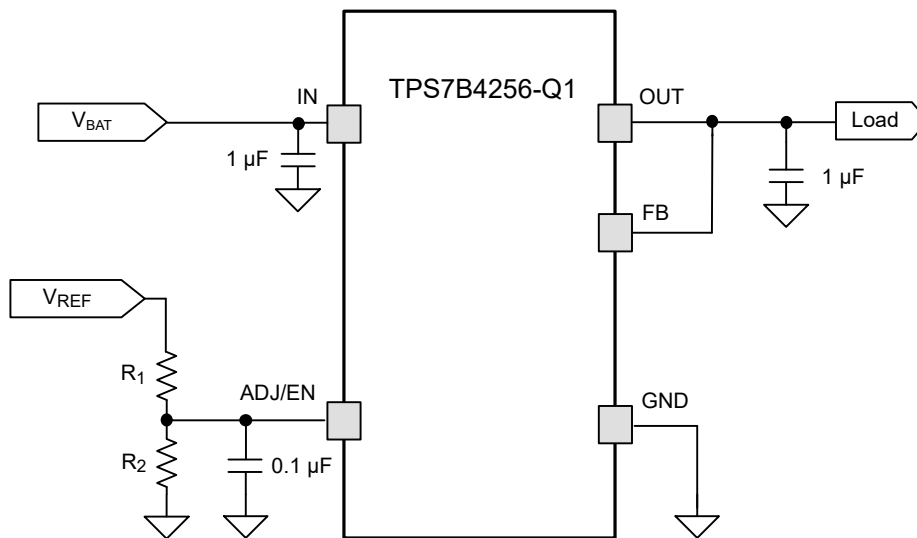

**Figure 6-3. Tracker Output Voltage Lower Than the Reference Voltage**

### 6.3.1.3 Output Voltage Larger Than the Reference Voltage

Connecting an external resistor divider between the OUT and FB pin, as shown in 図 6-4, can help generate an output voltage that is higher than the reference voltage. Both  $R_1$  and  $R_2$  must be less than 100 k $\Omega$  to minimize the error in voltage caused by the FB pin leakage current,  $I_{FB}$ . 式 3 calculates  $V_{OUT}$ .

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R_1}{R_2}\right) \quad (3)$$

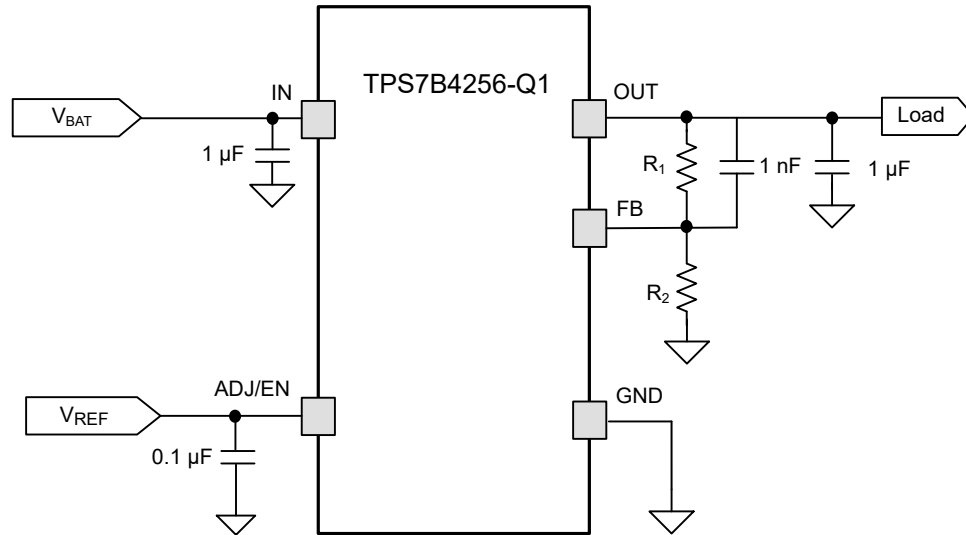


図 6-4. Tracker Output Voltage Higher Than the Reference Voltage

### 6.3.2 Reverse Current Protection

The TPS7B4256-Q1 incorporates a back-to-back PMOS topology that protects the device from damage against a fault condition, resulting in  $V_{OUT}$  being higher than  $V_{IN}$  and the subsequent flow of reverse current. No damage occurs to the device if this fault condition occurs, provided the *Absolute Maximum Ratings* are not violated. This integrated protection feature eliminates the need for an external diode. The reverse current comparator typically responds to a reverse voltage condition in 1  $\mu$ s, and along with the body diode of the blocking PMOS transistor, limits the reverse current to  $I_{REV}$ .

### 6.3.3 Undervoltage Lockout

The device has an internally fixed undervoltage lockout (UVLO) threshold. Undervoltage lockout activates when the input voltage  $V_{IN}$  drops below the undervoltage lockout level (see the  $V_{UVLO(FALLING)}$  parameter in the *Electrical Characteristics* table). This activation makes sure that the regulator is not latched into an unknown state during a low input supply voltage. If the input voltage has a negative transient that drops below the UVLO threshold and recovers, the regulator shuts down and powers up in the standard power-up sequence when the input voltage recovers to the required level (see the  $V_{UVLO(RISING)}$  parameter in the *Electrical Characteristics* table).


### 6.3.4 Thermal Protection

Thermal protection disables the output when the junction temperature rises to approximately 175°C, which allows the device to cool. When the junction temperature cools to approximately 160°C, the output circuitry enables. Although the device can enable at such high temperatures, the device parameters and performance are specified up to a junction temperature of 150°C. Based on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit can cycle off and on until the condition that causes excessive power dissipation is removed. This cycling limits the dissipation of the regulator, thus protecting the regulator from damage as a result of overheating.

The internal protection circuitry of the TPS7B4256-Q1 is designed to protect against overload conditions. This circuitry is not intended to replace proper heat sinking. Continuously running the TPS7B4256-Q1 into thermal shutdown degrades device reliability.

### 6.3.5 Current Limit

The device has an internal current limit circuit to protect the device during overcurrent or shorting conditions. The current-limit circuit, as shown in [Figure 6-5](#), is a brick-wall scheme. When the device is in current limit, the device sources  $I_{CL}$  and the output voltage is not regulated. In this scenario, the output voltage depends on the load impedance.

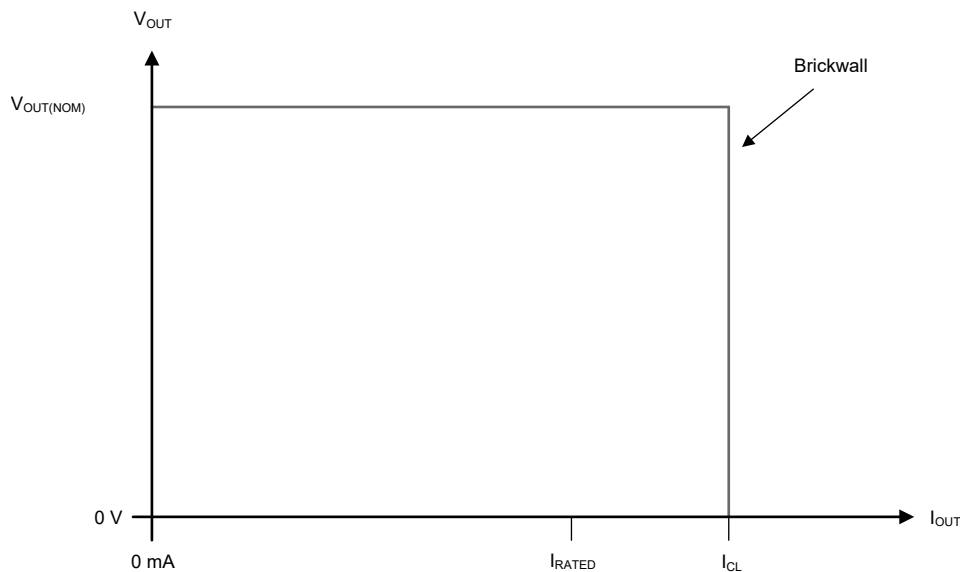


**Figure 6-5. Current Limit: Brick-Wall Scheme**


During a current-limit event, the potential for high power dissipation exists because of the elevated current level and the increased input-to-output differential voltage ( $V_{IN} - V_{OUT}$ ). If the device heats enough, the device can enter thermal shutdown. If the current-limit condition is not removed when the device turns back on after cooling, the device can enter thermal shutdown again and continue this cycle until the current-limit condition is removed. The device survives this fault, but repeatedly operating in this mode degrades long-term reliability.

### 6.3.6 Output Short to Battery

When the output is shorted to the battery (see [Figure 6-6](#)), the TPS7B4256-Q1 survives and no damage occurs to the device. A short to the battery can also occur when the device is powered by an isolated supply (see [Figure 6-7](#)) at a lower voltage. In this case, the TPS7B4256-Q1 supply input voltage is set at  $7\text{ V}$  when a short to battery ( $14\text{ V}$  typical) occurs on  $V_{OUT}$ , which typically runs at  $5\text{ V}$ . The back-to-back PMOS topology helps limit the continuous reverse current flowing through  $V_{IN}$  to  $I_{REV}$ , as provided in the [Electrical Characteristics](#) table.

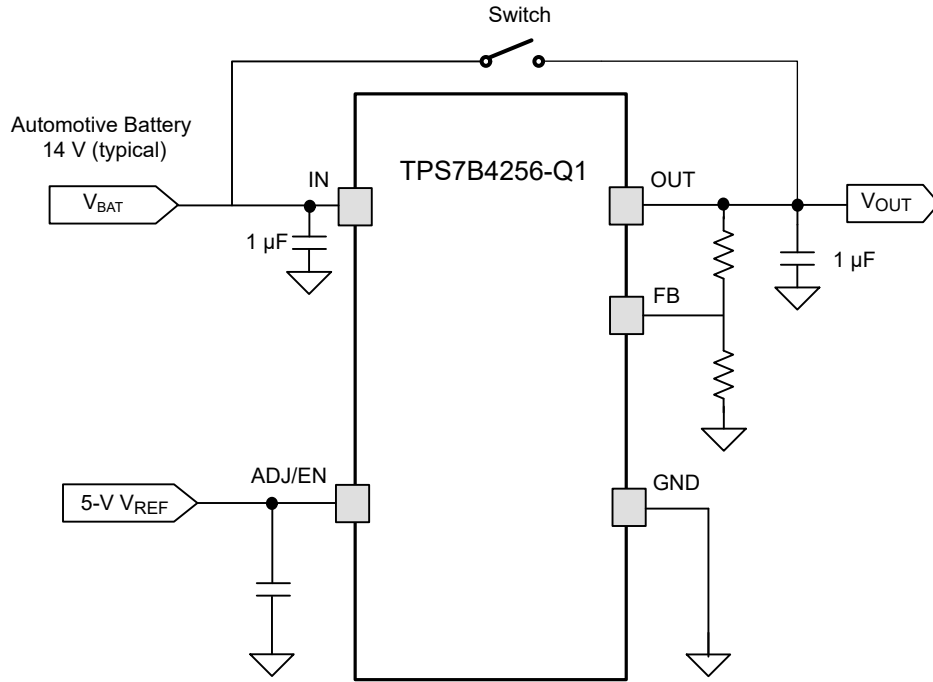

**図 6-6. Output Voltage Short to Battery**

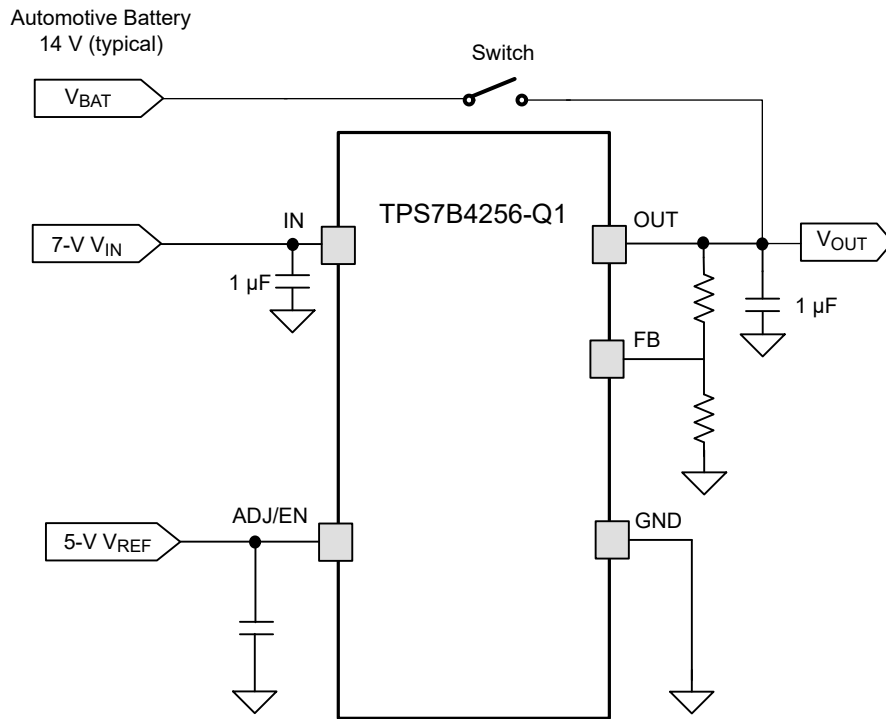

**図 6-7. Output Voltage Higher Than the Input**

### 6.3.7 Tracking Regulator With an Enable Circuit

By pulling the reference voltage below  $V_{IL}$ , the device disables and enters a sleep state where the device draws 3.5  $\mu\text{A}$  (max) from the power supply. In a typical application, the reference voltage is generally sourced from another LDO voltage rail. A scenario where the device must be disabled without a shutdown of the reference voltage can occur. The device can be configured as shown in Figure 6-8 in this case. The TPS7B84-Q1 is a 150-mA LDO with ultra-low quiescent current that provides the reference voltage to both the TPS7B4256-Q1 and the ADC. The operational status of the device is controlled by a microcontroller (MCU) input or output (I/O).

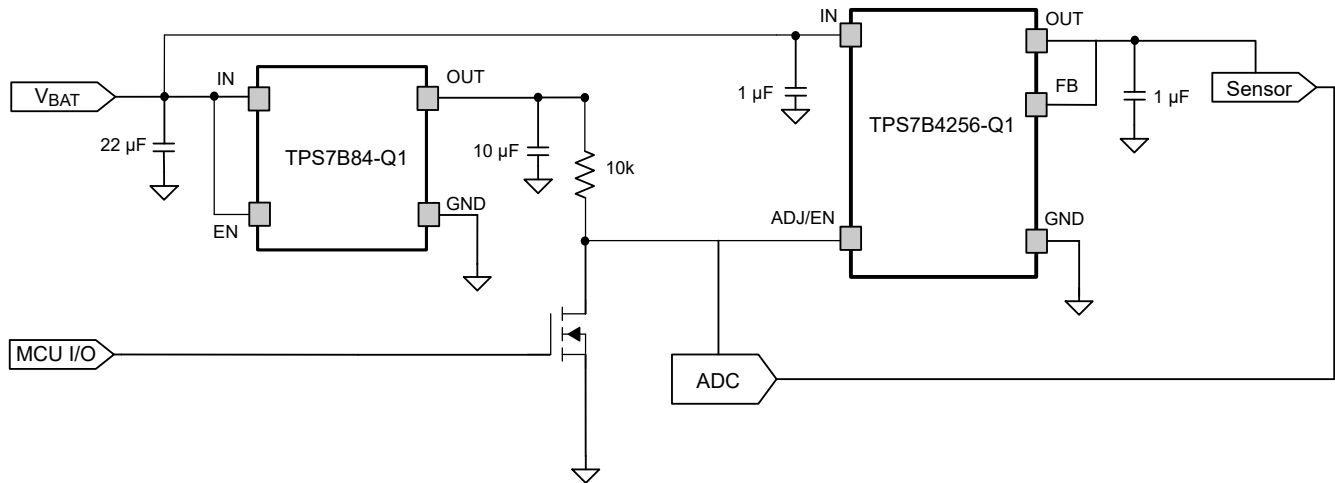


Figure 6-8. Tracking an LDO With an Enable Circuit

## 6.4 Device Functional Modes

表 6-1 shows the conditions that lead to the different modes of operation. See the [Electrical Characteristics](#) table for parameter values.

**表 6-1. Device Functional Mode Comparison**

OPERATING MODE	PARAMETER <sup>(1)</sup>			
	V <sub>IN</sub>	V <sub>ADJ/EN</sub>	I <sub>OUT</sub>	T <sub>J</sub>
Normal operation	V <sub>IN</sub> > V <sub>OUT(Nom)</sub> + V <sub>DO</sub> and V <sub>IN</sub> ≥ V <sub>IN(min)</sub>	V <sub>ADJ/EN</sub> > V <sub>IH</sub>	I <sub>OUT</sub> ≤ I <sub>OUT(max)</sub>	T <sub>J</sub> < T <sub>SD(shutdown)</sub>
Dropout operation	V <sub>IN(min)</sub> < V <sub>IN</sub> < V <sub>OUT(nom)</sub> + V <sub>DO</sub>	V <sub>ADJ/EN</sub> > V <sub>IH</sub>	I <sub>OUT</sub> ≤ I <sub>OUT(max)</sub>	T <sub>J</sub> < T <sub>SD(shutdown)</sub>
Disabled (any true condition disables the device)	V <sub>IN</sub> < V <sub>UVLO</sub>	V <sub>ADJ/EN</sub> < V <sub>IL</sub>	Not applicable	T <sub>J</sub> > T <sub>SD(shutdown)</sub>

(1) The device turns on when V<sub>IN</sub> is greater than V<sub>UVLO(RISING)</sub> and V<sub>ADJ/EN</sub> is greater than the enable rising threshold V<sub>IH</sub>.

### 6.4.1 Normal Operation

The device output voltage V<sub>OUT(Nom)</sub> tracks the reference voltage at the ADJ/EN pin when the following conditions are met:

- The input voltage is at least 3 V (V<sub>IN(min)</sub>) and greater than the nominal output voltage plus the dropout voltage (V<sub>OUT(nom)</sub> + V<sub>DO</sub>)
- The reference voltage at the ADJ/EN pin is greater than the enable rising threshold V<sub>IH</sub> and stays stable at the appropriate V<sub>REF</sub> value
- The output current is less than I<sub>OUT(max)</sub> (I<sub>OUT</sub> ≤ 70 mA)
- The device junction temperature is less than the thermal shutdown temperature (T<sub>J</sub> < T<sub>SD</sub>)

### 6.4.2 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout mode. In this mode, the output voltage tracks the input voltage. During this mode, the transient performance of the device becomes significantly degraded because the pass transistor is in the ohmic or triode region, and acts as a switch. Line or load transients in dropout can result in large output-voltage deviations.

When the device is in a steady dropout state (defined as when the device is in dropout, V<sub>IN</sub> < V<sub>OUT(NOM)</sub> + V<sub>DO</sub>, directly after being in a normal regulation state, but *not* during start up), the pass transistor is driven into the ohmic or triode region. When the input voltage returns to a value greater than or equal to the nominal output voltage plus the dropout voltage (V<sub>OUT(NOM)</sub> + V<sub>DO</sub>), the output voltage can overshoot for a short period of time while the device pulls the pass transistor back into the saturation region.

### 6.4.3 Operation With V<sub>IN</sub> < 3 V

For input voltages below 3 V and above V<sub>UVLO(FALLING)</sub>, the LDO continues to operate but certain internal circuits can possibly not have the proper headroom to operate within specification. When the input voltage drops below V<sub>UVLO(FALLING)</sub> the device shuts off.

### 6.4.4 Disable With ADJ/EN Control

The ADJ/EN pin operates as both the reference and the enable pin to the LDO. The output of the device can be shutdown by forcing V<sub>ADJ/EN</sub> less than V<sub>IL</sub>. When disabled, the pass transistor is turned off, the internal circuits are shutdown, and the LDO is in a low-power mode.

## 7 Application and Implementation

### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 7.1 Application Information

#### 7.1.1 Dropout Voltage

Dropout voltage ( $V_{DO}$ ) is defined as the input voltage minus the output voltage ( $V_{IN} - V_{OUT}$ ) when the pass transistor is fully on. This condition arises when the input voltage falls to the point where the error amplifier must drive the gate of the pass transistor to the rail and has no remaining headroom for the control loop to operate. The pass transistor is in the ohmic or triode region of operation, and acts as a switch. The dropout voltage directly specifies a minimum input voltage greater than the nominal programmed output voltage at which the output voltage is expected to stay in regulation. If the input voltage falls to less than the nominal output regulation, then the output voltage follows, minus the dropout voltage ( $V_{DO}$ ).

In dropout mode, the output voltage is no longer regulated, and transient performance is severely degraded. The device loses PSRR, and load transients can cause large output voltage deviation.

For a CMOS regulator, the dropout voltage is determined by the drain-source on-state resistance ( $R_{DS(ON)}$ ) of the pass transistor. Therefore, if the linear regulator operates at less than the rated output current ( $I_{RATED}$ , see the [Recommended Operating Conditions](#) table), the dropout voltage for that current scales accordingly. The following equation calculates the  $R_{DS(ON)}$  of the device.

$$R_{DS(ON)} = \frac{V_{DO}}{I_{RATED}} \quad (4)$$

#### 7.1.2 Reverse Current

The TPS7B4256-Q1 incorporates reverse current protection that prevents damage from a fault condition, resulting in  $V_{OUT}$  being higher than  $V_{IN}$ . During such a fault condition, where the  $V_{IN}$  and  $V_{OUT}$  absolute maximum ratings are not violated and  $V_{OUT} - V_{IN}$  is less than 40 V, no damage occurs and less than 1.1  $\mu\text{A}$  of reverse current flows through the LDO. The reverse current comparator typically responds to a reverse voltage condition and, along with the body diode of the blocking PMOS transistor, limits the reverse current in 1  $\mu\text{s}$ .

## 7.2 Typical Application

Figure 7-1 shows a typical application circuit for the TPS7B4256-Q1.

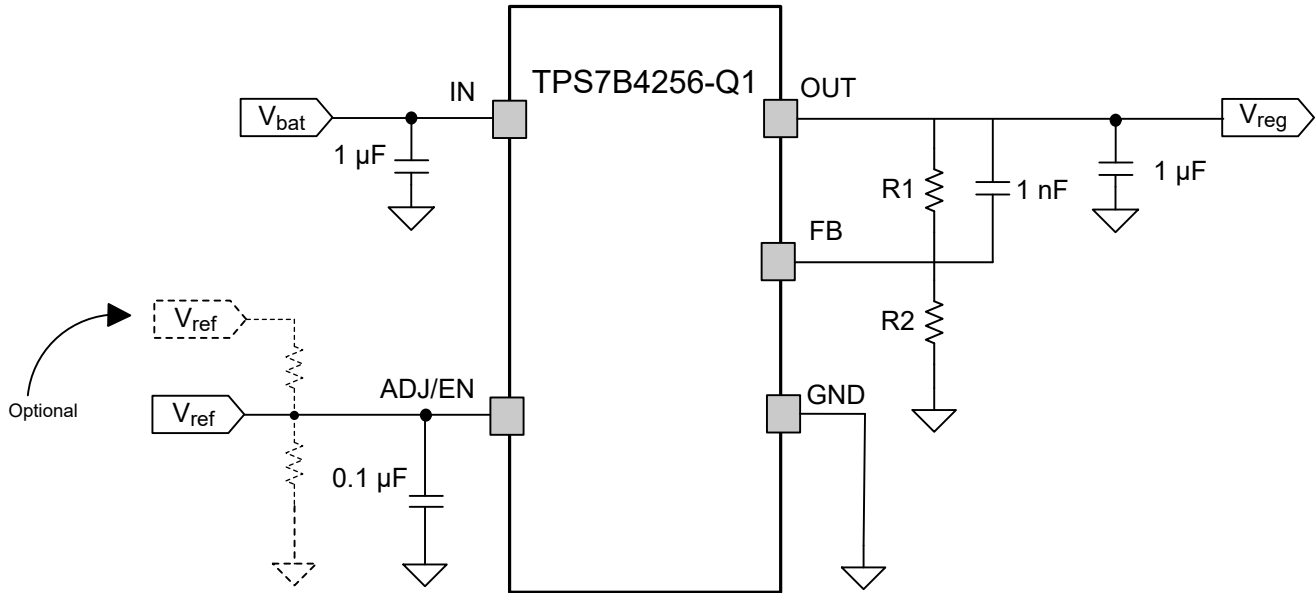


Figure 7-1. Typical Application Schematic

### 7.2.1 Design Requirements

Use the parameters listed in Table 7-1 for this design example.

Table 7-1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUES
Input voltage	3 V to 40 V
ADJ/EN reference voltage	2 V to 40 V
Output voltage	2 V to 40 V
Output current rating	70 mA
Output capacitor range	1 µF to 100 µF
Output capacitor ESR range	1 mΩ to 2 Ω

### 7.2.2 Detailed Design Procedure

#### 7.2.2.1 Input and Output Capacitor Selection

Depending on the end application, different values of external components can be used. An application can require a larger output capacitor during fast load steps to prevent a reset from occurring. Use a low ESR ceramic capacitor with a dielectric of type X5R or X7R for better load transient response.

The TPS7B4256-Q1 requires an output capacitor of at least 1 µF (500 nF or larger capacitance) for stability and an equivalent series resistance (ESR) between 0.001 Ω and 2 Ω. Without the output capacitor, the regulator oscillates. For best transient performance, use X5R- and X7R-type ceramic capacitors because these capacitors have minimal variation in value and ESR over temperature. When choosing a capacitor for a specific application, be mindful of the DC bias characteristics for the capacitor. Higher output voltages cause a significant derating of the capacitor. For best performance, the maximum recommended output capacitor is 100 µF.

An input capacitor is not required for stability, however, good analog practice is to connect a capacitor (500 nF or higher) between the GND and IN pin of the TPS7B4256-Q1. Some input supplies have a high impedance, thus placing the input capacitor on the input supply helps reduce input impedance. This capacitor counteracts reactive input sources and improves transient response, input ripple, and PSRR. If the input supply has a high

impedance over a large range of frequencies, use several input capacitors in parallel to lower the impedance over frequency. Use a higher-value capacitor if large, fast rise-time load transients are anticipated, or if the device is located several inches from the input power source.

### 7.2.2.2 Feedback Resistor Selection

$V_{OUT}$  is set by the voltage at the ADJ/EN pin and the external feedback resistors  $R_1$  and  $R_2$  according to the following equation:

$$V_{OUT} = V_{ADJ/EN} \times \left(1 + \frac{R_1}{R_2}\right) \quad (5)$$

To ignore the FB pin current error term in the  $V_{OUT}$  equation, set the feedback divider current to 100 times the FB pin current listed in the [Electrical Characteristics](#) table. This setting provides the maximum feedback divider series resistance, as shown in the following equation:

$$R_1 + R_2 \leq \frac{V_{OUT}}{(I_{FB} \times 100)} \quad (6)$$

### 7.2.2.3 Feedforward Capacitor

A feedforward capacitor ( $C_{FF}$ ) is recommended to be connected between the OUT pin and the FB pin.  $C_{FF}$  improves transient, noise, and PSRR performance. A higher capacitance  $C_{FF}$  can be used; however, the start-up time increases. For a detailed description of  $C_{FF}$  tradeoffs, see the [Pros and Cons of Using a Feedforward Capacitor with a Low-Dropout Regulator application note](#).

As shown in [Figure 7-2](#), poor layout practices and using long traces at the FB pin results in the formation of a parasitic capacitor ( $C_{FB}$ ).

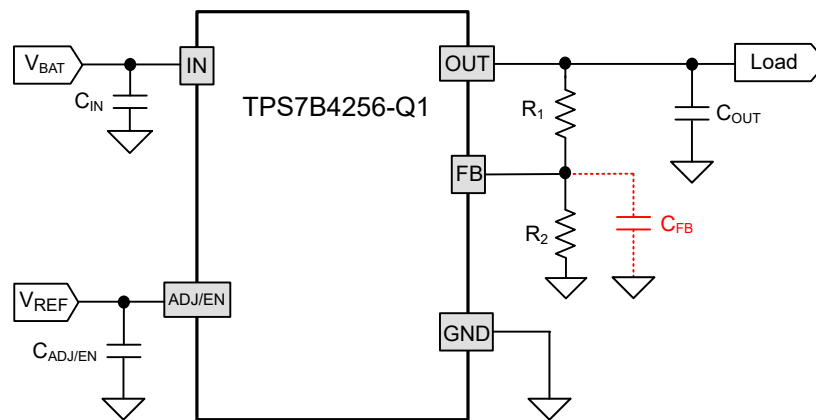


图 7-2. Formation of Parasitic Capacitor at the FB Pin

$C_{FB}$ , along with the feedback resistors  $R_1$  and  $R_2$  can result in the formation of an uncompensated pole in the transfer function of the loop gain. A  $C_{FB}$  value as small as 7 pF can cause the parasitic pole frequency, given by [Equation 7](#), to fall within the bandwidth of the LDO and result in instability.

$$f_P = \frac{1}{(2 \times \pi \times C_{FB} \times (R_1 \parallel R_2))} \quad (7)$$

Adding a feedforward capacitor ( $C_{FF}$ ), as shown in 図 7-3, creates a zero in the loop gain transfer function that can compensate for the parasitic pole created by  $C_{FB}$ . 式 8 and 式 9 calculate the pole and zero frequencies.

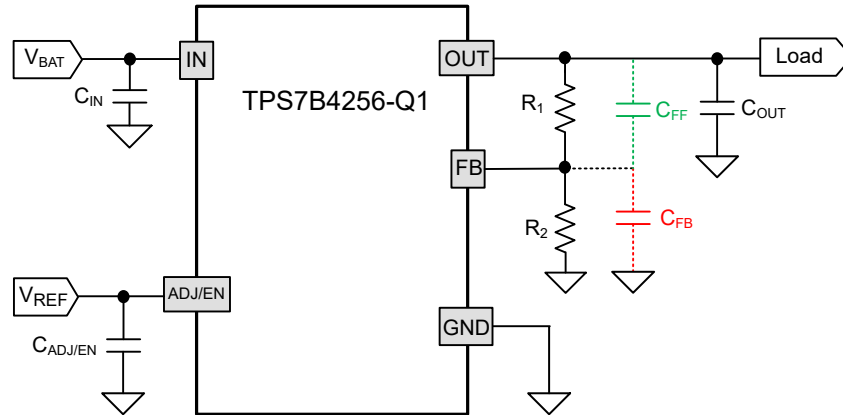


図 7-3. Feedforward Capacitor Can Compensate the Effects of the Parasitic Capacitor

$$f_P = \frac{1}{(2 \times \pi \times (R_1 \parallel R_2) \times (C_{FF} + C_{FB}))} \quad (8)$$

$$f_Z = \frac{1}{(2 \times \pi \times C_{FF} \times R_1)} \quad (9)$$

The  $C_{FF}$  value that makes  $f_P$  equal to  $f_Z$ , and result in a pole-zero cancellation, depends on the values of  $C_{FB}$  and the feedback resistors used in the application. Alternatively, if the feedforward capacitor is selected so that  $C_{FF} \gg C_{FB}$ , then the pole and zero frequencies given by 式 8 and 式 9 are related as:


$$\frac{f_P}{f_Z} \approx \left(1 + \frac{R_1}{R_2}\right) = \frac{V_{OUT}}{V_{ADJ/EN}} \quad (10)$$

In most applications, particularly where a 3.3-V or 5-V  $V_{OUT}$  is generated, this ratio is not very large, implying that the frequencies are located close to each other and therefore the parasitic pole is compensated. Even for large  $V_{OUT}$  values, where this ratio can be as large as 20, a  $C_{FF}$  value in the range  $100 \text{ pF} \leq C_{FF} \leq 10 \text{ nF}$  typically helps prevent instability caused by the parasitic capacitance on the feedback node.

Following good layout practices, as described in the [Layout Guidelines](#) section and in the [TRKRLDOEVM-119 General-Purpose Tracker LDO Evaluation Module user guide](#), helps minimize the parasitic feedback pin capacitance to values that prevent the resulting parasitic pole from causing instability.

### 7.2.3 Application Curves

The following images illustrate the functions of  $R_{\theta JA}$  and  $\psi_{JB}$  versus copper area and thickness for the SOIC-8 (D) and HSOIC-8 (DDA) packages. These plots are generated with a 101.6-mm × 101.6-mm × 1.6-mm PCB of two and four layers. For the 2-layer board, the bottom layer is a ground plane of constant size, and the top layer copper is connected to GND and varied. For the 4-layer board, the second layer is a ground plane of constant size, the third layer is a power plane of constant size, and the top and bottom layers copper fills are connected to GND and varied at the same rate. For the 4-layer board, inner planes use 1-oz copper thickness. Outer layers are simulated with both 1-oz and 2-oz copper thickness. A 3 × 3 array of thermal vias with a 300- $\mu$ m drill diameter and 25- $\mu$ m copper plating is located underneath the device. The thermal vias connect the top layer, the bottom layer and, in the case of the 4-layer board, the first inner GND plane. [PowerPAD™ Thermally Enhanced Package application note](#) discusses the impact that thermal vias have on thermal performance.

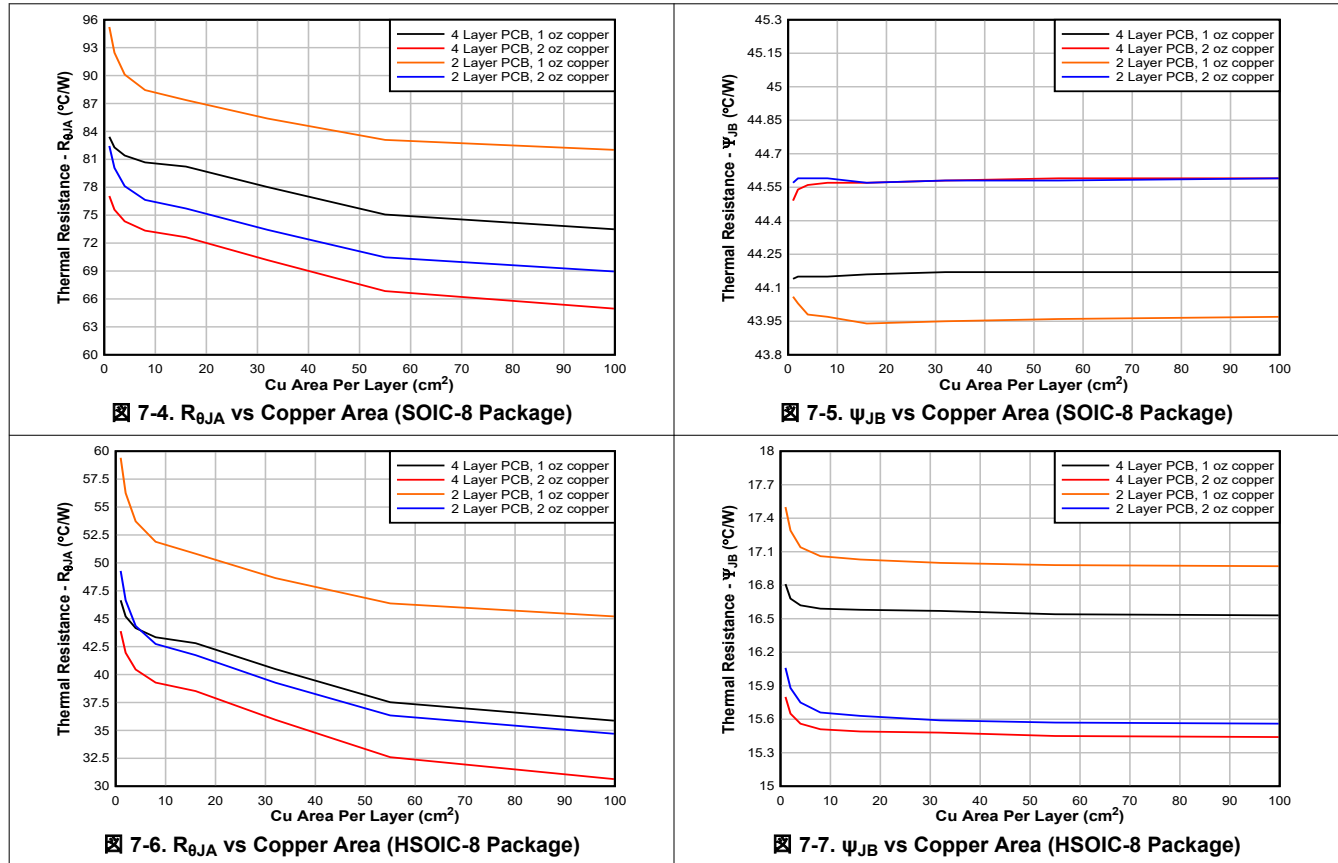

### 7.3 Power Supply Recommendations

The device is designed to operate from an input voltage supply range from 3 V to 40 V.

### 7.4 Layout

#### 7.4.1 Layout Guidelines

For best overall performance, place all circuit components on the same side of the circuit board and as near as practical to the respective LDO pin connections. Place ground return connections to the input and output capacitor, and to the LDO ground pin as close as possible to each other, connected by a wide, component-side, copper surface. Using vias and long traces to the input and output capacitors is strongly discouraged and negatively affects system performance. Use a ground reference plane either embedded in the PCB or located on the bottom side of the PCB opposite the components. This reference plane serves to provide accuracy of the output voltage, shield noise, and behaves similarly to a thermal plane to spread (or sink) heat from the LDO

device when connected to the thermal pad. In most applications, this ground plane is necessary to meet thermal requirements.

#### 7.4.1.1 Package Mounting

Solder-pad footprint recommendations for the TPS7B4256-Q1 are available at the end of this document and at [www.ti.com](http://www.ti.com).

#### 7.4.1.2 Board Layout Recommendations to Improve PSRR and Noise Performance

To improve AC performance (such as PSRR, output noise, and transient response), design the board with separate ground planes for  $V_{IN}$  and  $V_{OUT}$ , with each ground plane connected only at the GND pin of the device. In addition, the ground connection for the output capacitor must connect directly to the GND pin of the device.

Equivalent series inductance (ESL) and ESR must be minimized in order to maximize performance and provide stability. Every capacitor must be placed as close as possible to the device and on the same side of the printed circuit board (PCB) as the regulator.

Do not place any of the capacitors on the opposite side of the PCB from where the regulator is installed. The use of vias and long traces is strongly discouraged because of the negative impact on system performance. Vias and long traces can also cause instability.

If possible, and to provide the maximum performance denoted in this product data sheet, use the same layout pattern used for the TPS7B4256-Q1 evaluation board, available at [www.ti.com](http://www.ti.com).

#### 7.4.1.3 Power Dissipation and Thermal Considerations

式 11 calculates the device power dissipation.

$$P_D = I_{OUT} \times (V_{IN} - V_{OUT}) + I_Q \times V_{IN} \quad (11)$$

where:

- $P_D$  = Continuous power dissipation
- $I_{OUT}$  = Output current
- $V_{IN}$  = Input voltage
- $V_{OUT}$  = Output voltage
- $I_Q$  = Quiescent current

Because  $I_Q$  is much less than  $I_{OUT}$ , the term  $I_Q \times V_{IN}$  in 式 11 can be ignored.

Calculate the junction temperature ( $T_J$ ) with 式 12 for a device under operation at a given ambient air temperature ( $T_A$ ).

$$T_J = T_A + (R_{\theta JA} \times P_D) \quad (12)$$

where:

- $R_{\theta JA}$  = Junction-to-junction-ambient air thermal impedance

式 13 calculates a rise in junction temperature because of power dissipation.


$$\Delta T = T_J - T_A = (R_{\theta JA} \times P_D) \quad (13)$$

The maximum ambient air temperature ( $T_{AMAX}$ ) at which the device can operate can be calculated with 式 14 for a given maximum junction temperature ( $T_{JMAX}$ ).

$$T_{AMAX} = T_{JMAX} - (R_{\theta JA} \times P_D) \quad (14)$$


### 7.4.1.4 Thermal Performance Versus Copper Area

The most used thermal resistance parameter  $R_{\theta JA}$  is highly dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The  $R_{\theta JA}$  recorded in the *Thermal Information* table is determined by the JEDEC standard (☒ 7-8), PCB, and copper-spreading area, and is only used as a relative measure of package thermal performance. For a well-designed thermal layout,  $R_{\theta JA}$  is actually the sum of the package junction-to-case (bottom) thermal resistance ( $R_{\theta JCbot}$ ) plus the thermal resistance contribution by the PCB copper.

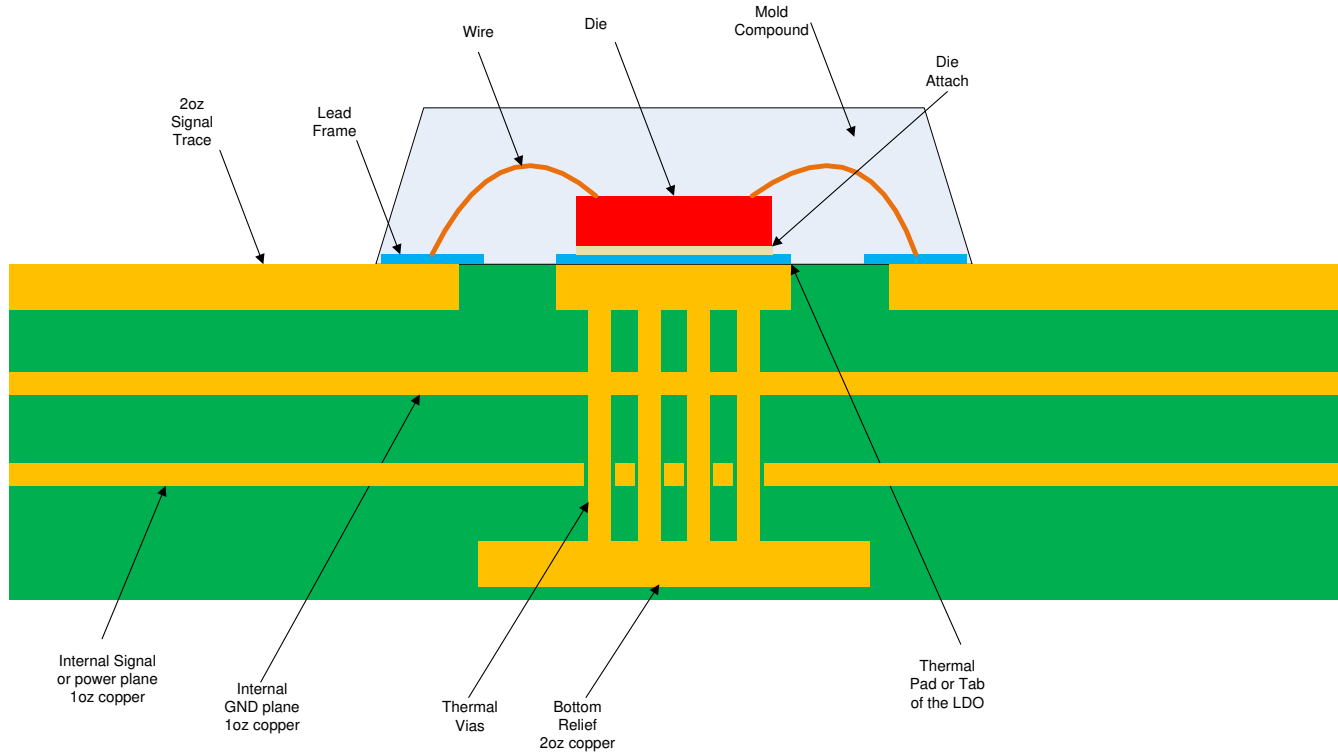


☒ 7-8. JEDEC Standard 2s2p PCB

### 7.4.1.5 Layout Examples

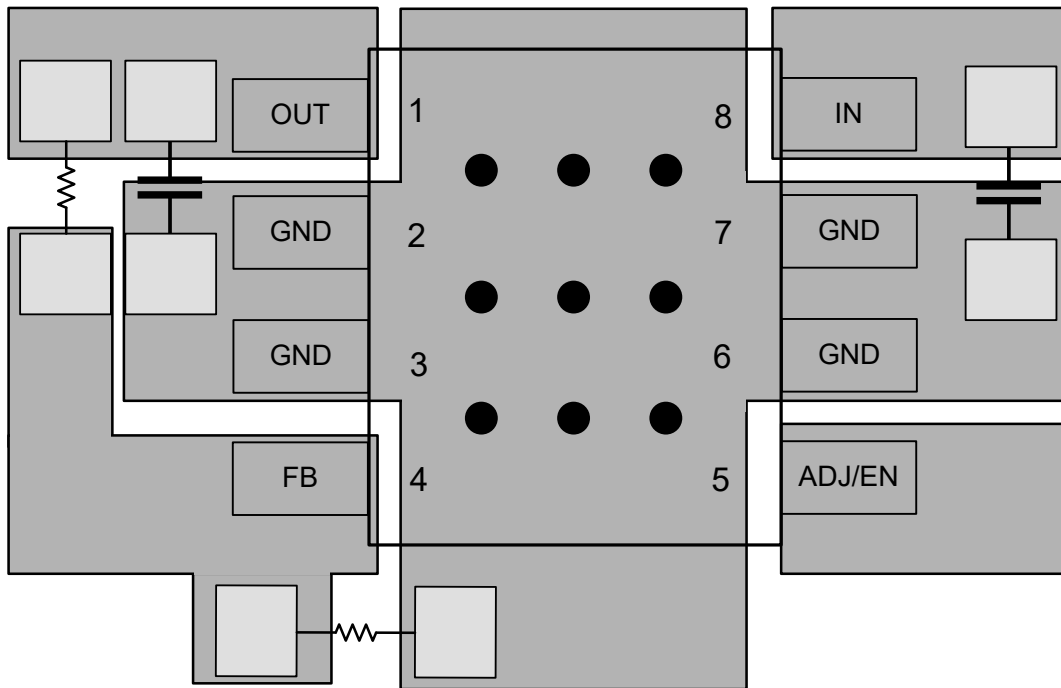

● Circles denote PCB via connections

☒ 7-9. D Package Layout Example

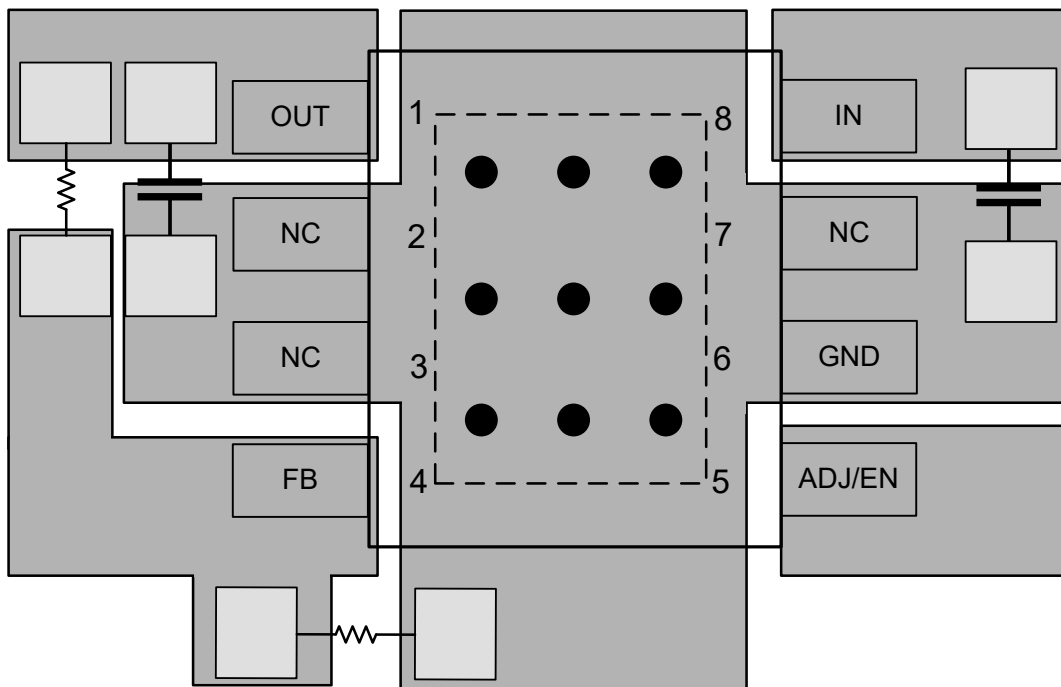

● Circles denote PCB via connections

☒ 7-10. DDA Package Layout Example

## 8 Device and Documentation Support

### 8.1 Device Support

#### 8.1.1 Device Nomenclature

表 8-1. Device Nomenclature<sup>(1)</sup>

PRODUCT	V <sub>OUT</sub>
TPS7B4256Q DDAR Q1	In the HSOIC (DDA) package: Q indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. R is the packaging quantity. Q1 indicates that this device is an automotive grade (AEC-Q100) device.
TPS7B4256Q DR Q1	In the SOIC (D) package: Q indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. R is the packaging quantity. Q1 indicates that this device is an automotive grade (AEC-Q100) device.

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or visit the device product folder on [www.ti.com](http://www.ti.com).

### 8.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[www.tij.co.jp](http://www.tij.co.jp) のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

### 8.3 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

### 8.4 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 8.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

### 8.6 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

## 9 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

### Changes from Revision \* (September 2023) to Revision A (November 2023)

Page

• ドキュメントのステータスを「事前情報」から「量産データ」に変更..... 1

## 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TPS7B4256QDDARQ1</a>	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	FULL NIPDAU	Level-2-260C-1 YEAR	-40 to 125	B4256F
TPS7B4256QDDARQ1.A	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	FULL NIPDAU	Level-2-260C-1 YEAR	-40 to 125	B4256F
<a href="#">TPS7B4256QDRQ1</a>	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	B4256E
TPS7B4256QDRQ1.A	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	B4256E

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS7B4256QDDARQ1	SO PowerPAD	DDA	8	2500	330.0	12.5	6.4	5.2	2.1	8.0	12.0	Q1
TPS7B4256QDRQ1	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

**TAPE AND REEL BOX DIMENSIONS**



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS7B4256QDDARQ1	SO PowerPAD	DDA	8	2500	353.0	353.0	32.0
TPS7B4256QDRQ1	SOIC	D	8	2500	340.5	338.1	20.6

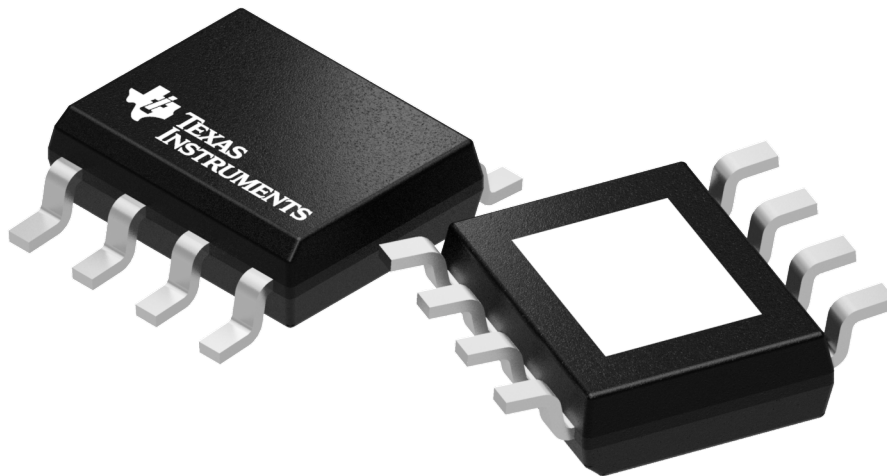

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.


# DDA0008B



# PACKAGE OUTLINE

## PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

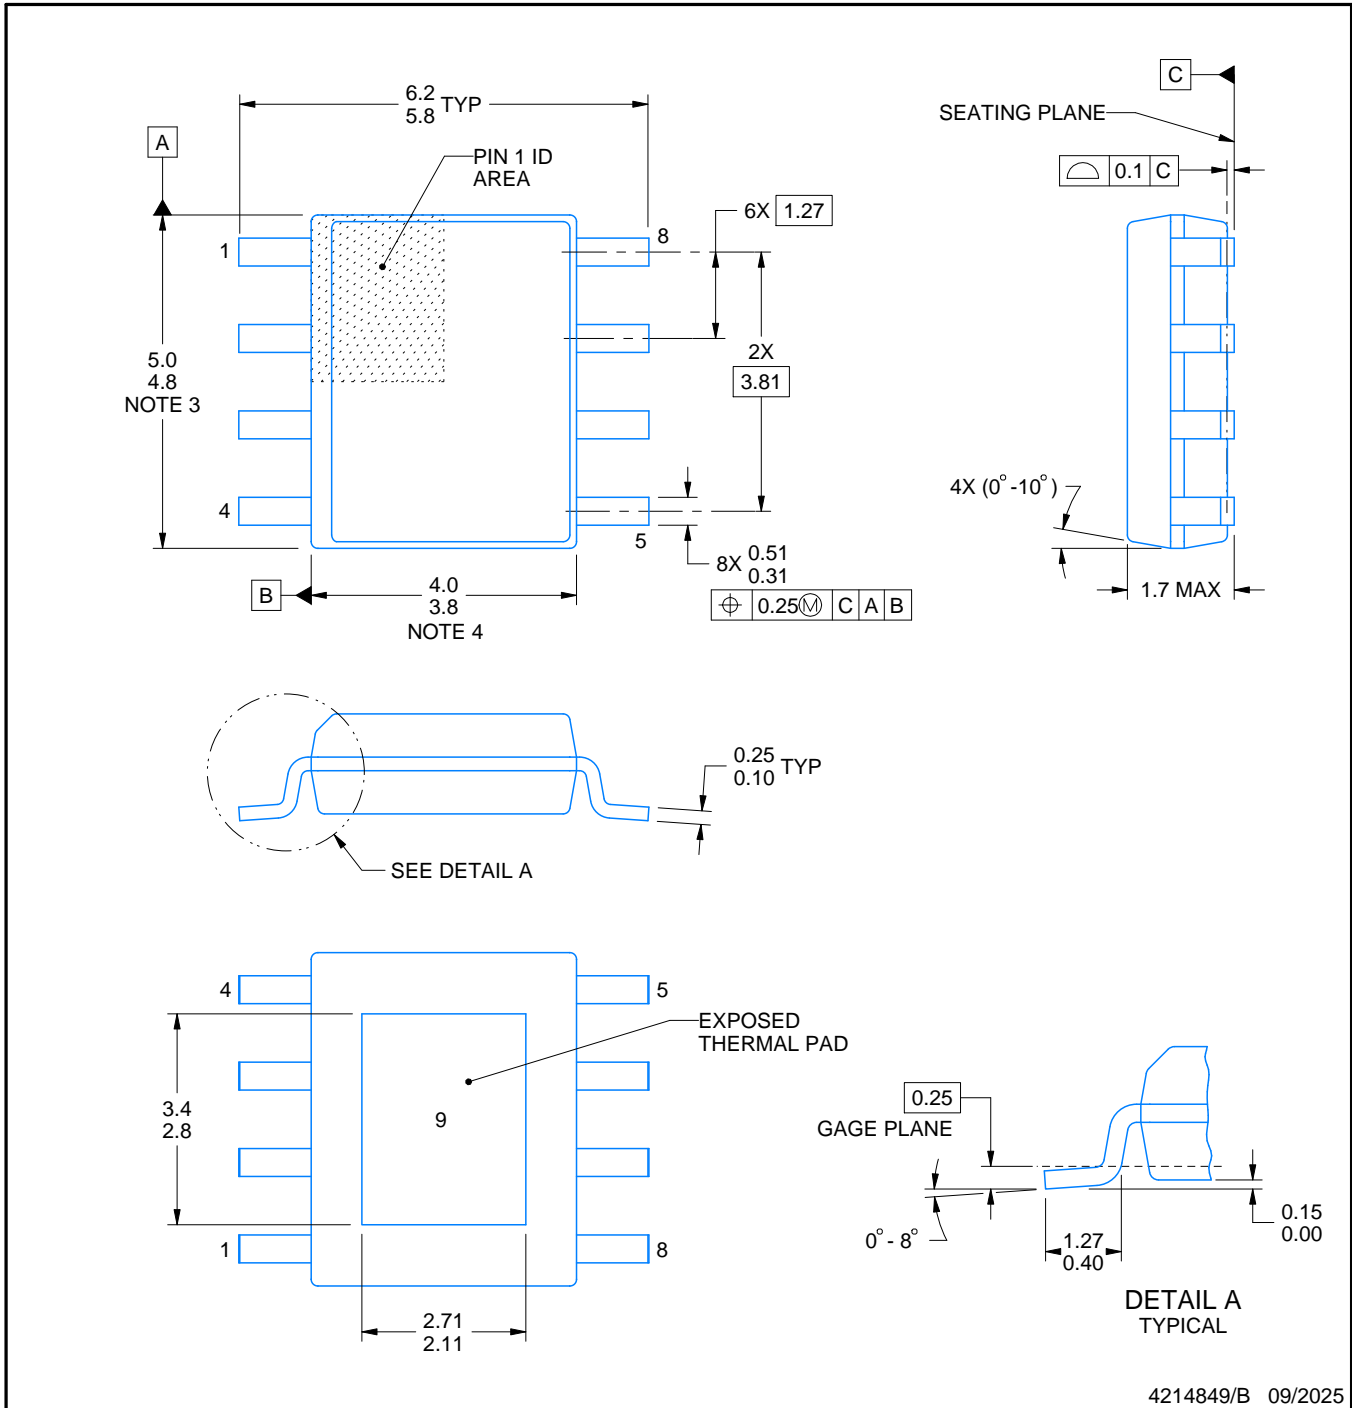

4214849/B 09/2025

### NOTES:

PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MS-012.




# EXAMPLE STENCIL DESIGN

DDA0008B

PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

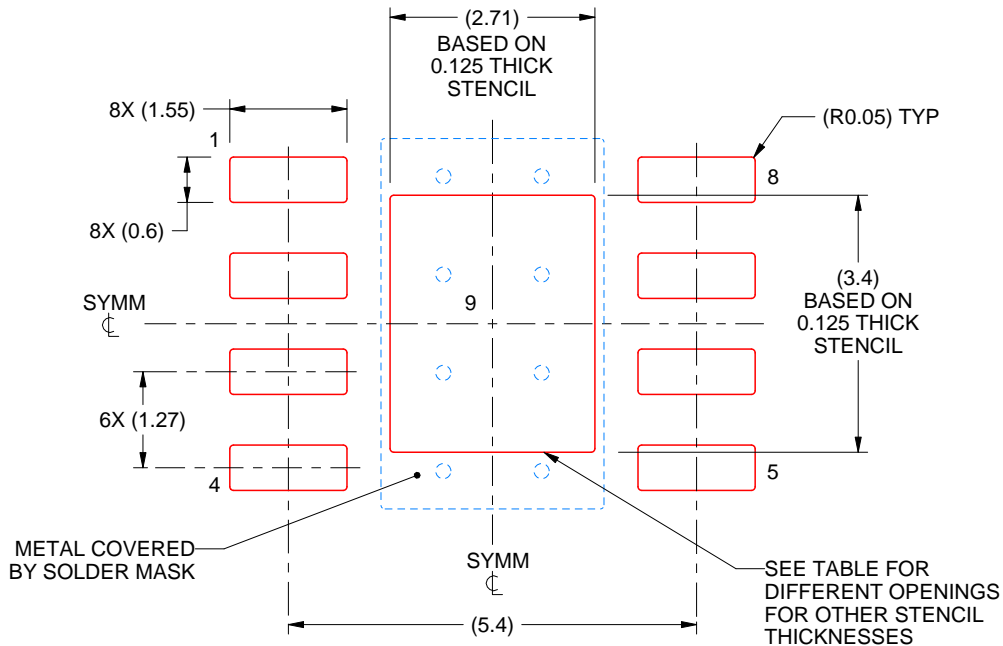

SOLDER PASTE EXAMPLE  
 EXPOSED PAD  
 100% PRINTED SOLDER COVERAGE BY AREA  
 SCALE:10X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	3.03 X 3.80
0.125	2.71 X 3.40 (SHOWN)
0.150	2.47 X 3.10
0.175	2.29 X 2.87

4214849/B 09/2025

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.



D0008A

# PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

### NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed  $.006$  [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
 EXPOSED METAL SHOWN  
 SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日 : 2025 年 10 月