



Texas Instruments

PMP4317 REVA Test Procedure

China Power Reference Design

REVA

9/16/11



1 **General**

1.1 **PURPOSE**

To provide detailed data for evaluating and verifying the PMP4317.

1.2 **REFERENCE DOCUMENTATION**

Schematic PMP4317\_REVA\_SCH.PDF

Assembly PMP4317\_REVA\_PCB.PDF

BOM

1.3 **TEST EQUIPMENTS**

Multi-meter: Fluke 289

Power Analyser:PM100

AC Source: Agilent 6813B


Ambient Temperature at 25DegC

2: INPUT CHARACTERISTICS

2.1 **Power Factor**

**Pass/Fail criteria:** 0.99 typical at 100% load.

Vin(Vac)	Freq(Hz)	PF	Io(Arms)
90	60	<b>0.999</b>	Full Load
110	60	<b>0.999</b>	Full Load
230	50	<b>0.977</b>	Full Load
264	50	<b>0.961</b>	Full Load

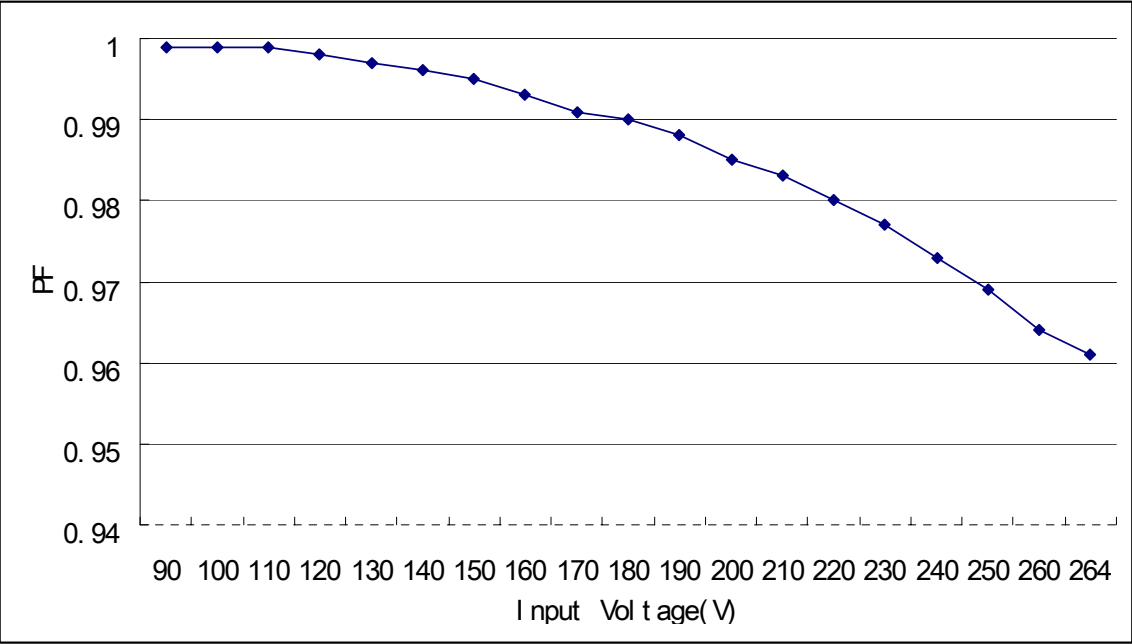

The test was executed under the condition of full load.

2.2: Efficiency

**Pass/Fail criteria:** 90% minimum with 230V AC input at 100% load

Vin(Vac)	Freq(Hz)	Pin	Po	Eff(%)	Pass/Fail
90	60	153.13	139.40	91.0	PASS
110	60	151.22	139.41	92.2	PASS
230	50	147.76	139.48	94.4	PASS
264	50	147.61	139.56	94.5	PASS

The test was executed under the condition of full load.


2.3: Maximum input current

Pass/Fail criteria: XX Amps RMS maximum at low line, full load.


Vin(Vac)	Freq(Hz)	Iin(Arms)	Pass/Fail
90	60	1.701	PASS

2.4: Output Current

Vin	Io
90	0.7000
100	0.7000
110	0.7000
120	0.7000
130	0.7000
140	0.7000
150	0.7000
160	0.7000
170	0.7000
180	0.7000
190	0.7000
200	0.7000
210	0.7000
220	0.7000
230	0.7000
240	0.7000
254	0.7000
264	0.7000

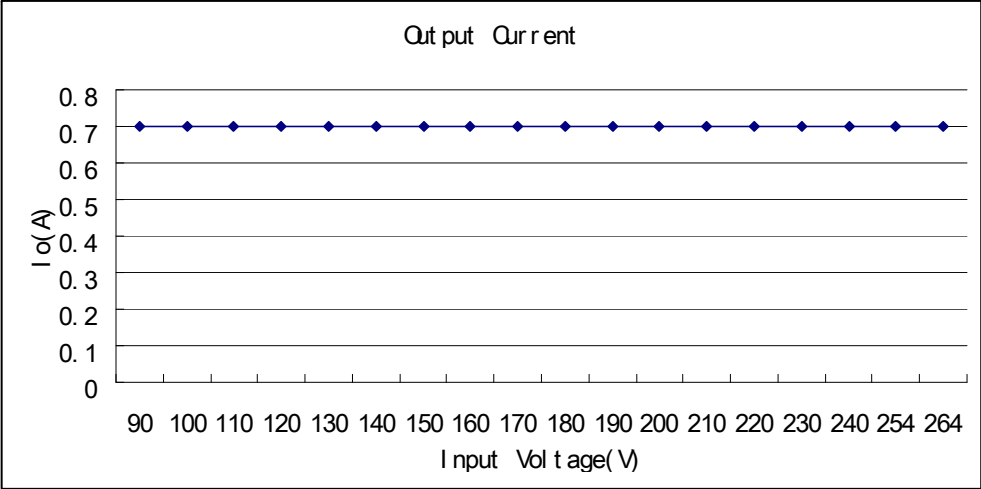


Output current ripple waveforms at 230V input  
CH2: LED Output Voltage 10V/Div  
CH3: LED Output Current 100mA/Div

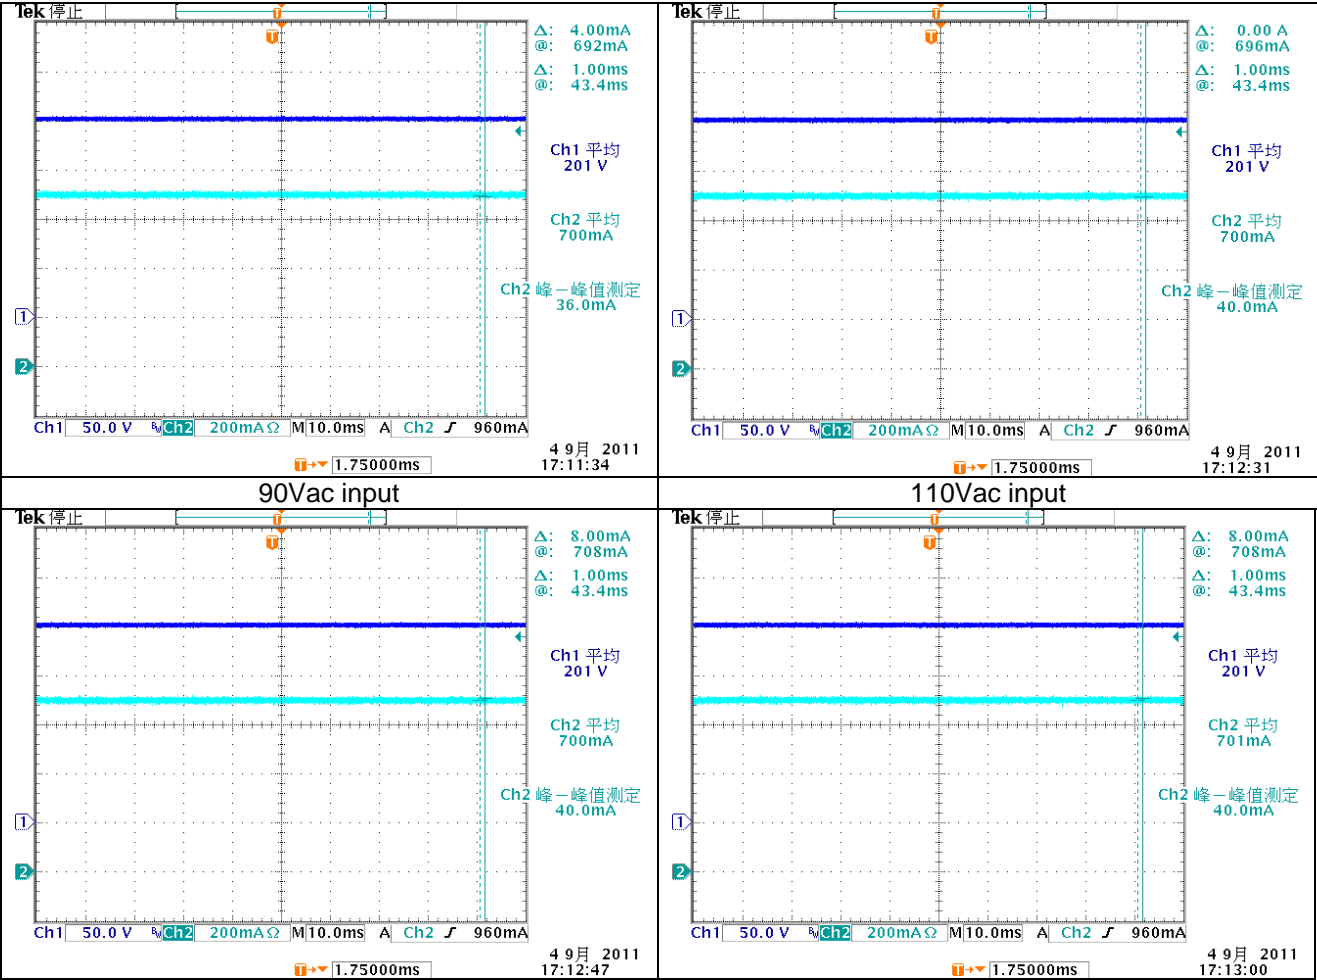

230Vac input	264Vac input
--------------	--------------

2.5: Output Analog Dimming Control

Dimming Voltage	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
Io(A)	0.074	0.130	0.190	0.260	0.315	0.382	0.316	0.512	0.581	0.639	0.703

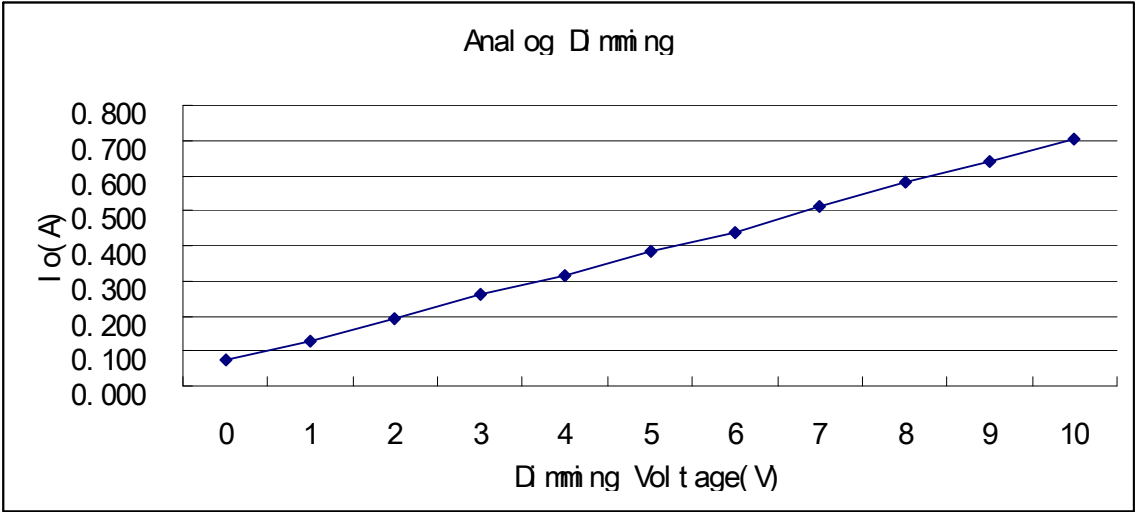

2.6: Output Dimming Control

230Vin		
Dimming	Io(mA)	%
1%	66.1	9.4
2%	93.2	13.3

5%	150.1	21.4
10%	216.2	30.9
20%	310	44.3
30%	381.5	54.5
40%	441.3	63.0
50%	494	70.6
60%	541.6	77.4
70%	585.2	83.6
80%	625.9	89.4
90%	664.1	94.9
99%	698	99.7
100%	702	100.3

1. Waveform from LED Output Current is controlled by 300Hz PWM dimming.  
It was tested under the condition of 230Vac input.  
CH1: LEDSW MOSFET Vgs 5V/Div      CH3: LED Output Current 1A/Div  
CH4: DSR 2V/Div







1% PWM Dimming




2% PWM Dimming

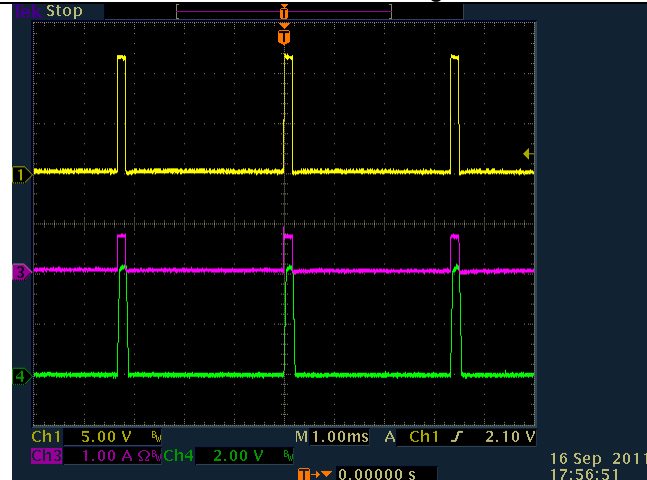


5% PWM Dimming

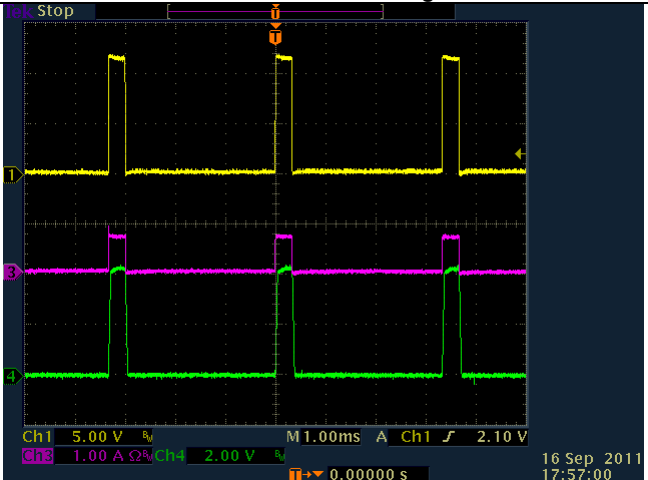


10% PWM Dimming

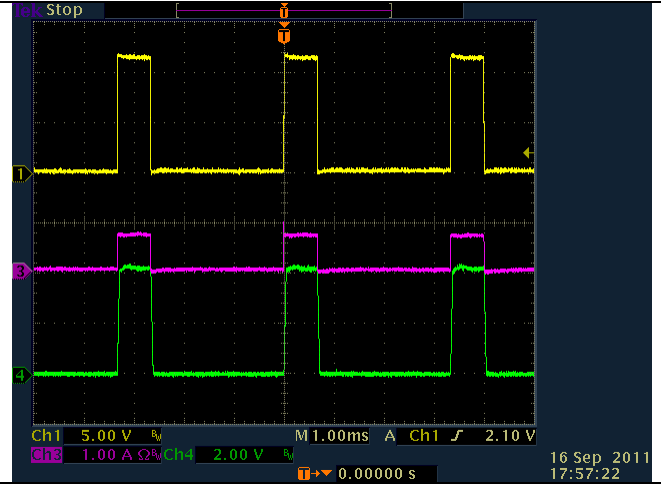


20% PWM Dimming

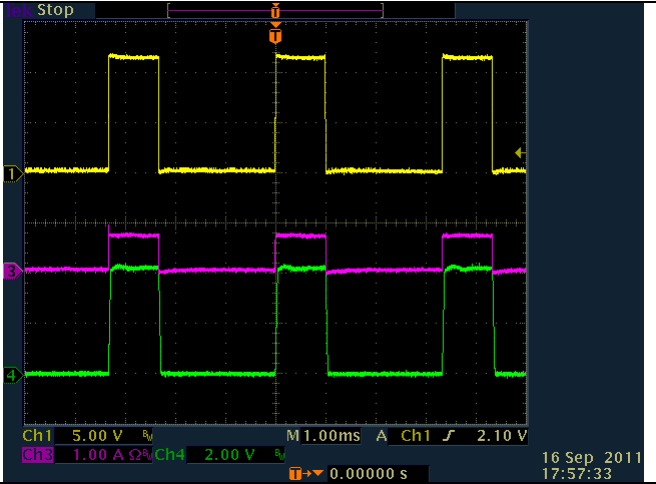


30% PWM Dimming

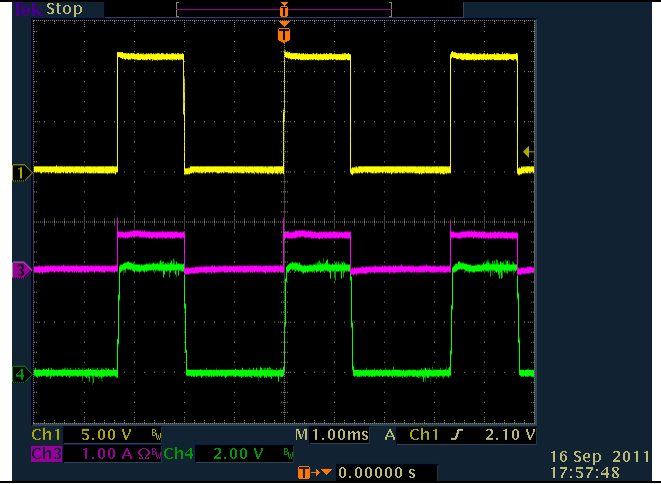

40% PWM Dimming

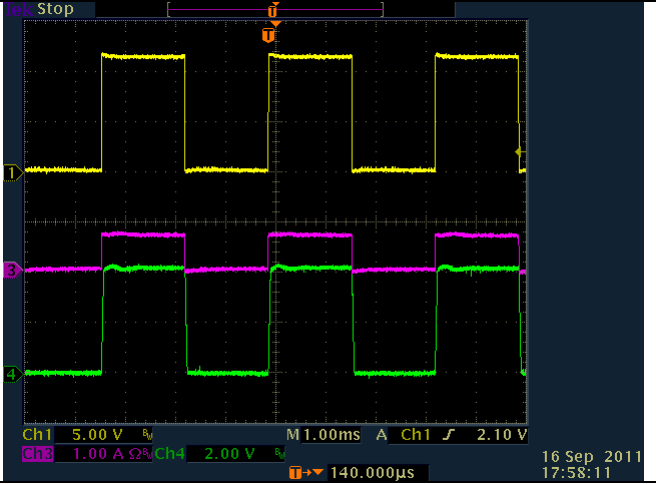


50% PWM Dimming

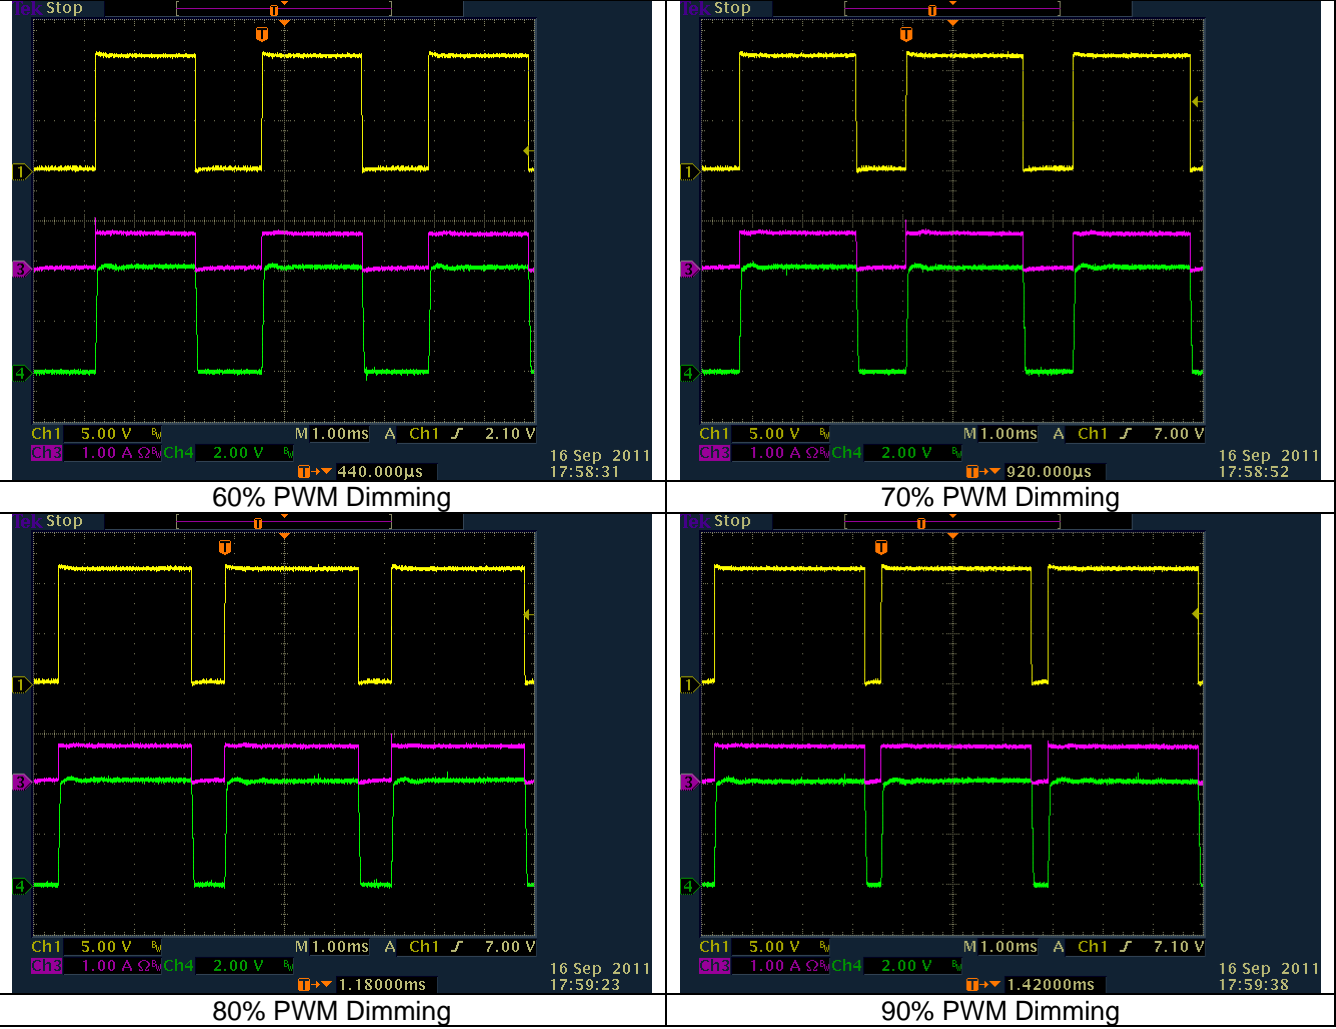


2.7: Start-up waveform  
CH1: Primary Current 2A/Div

CH3: LED Output Current 200mA/Div


CH4: LEDSW MOSFET Vgs 5V/Div

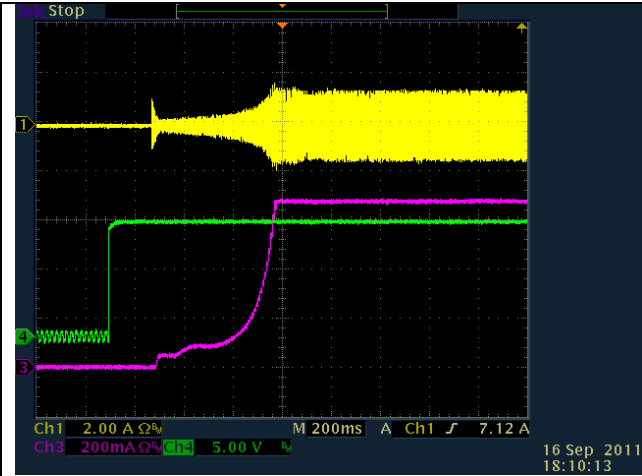


110Vac input

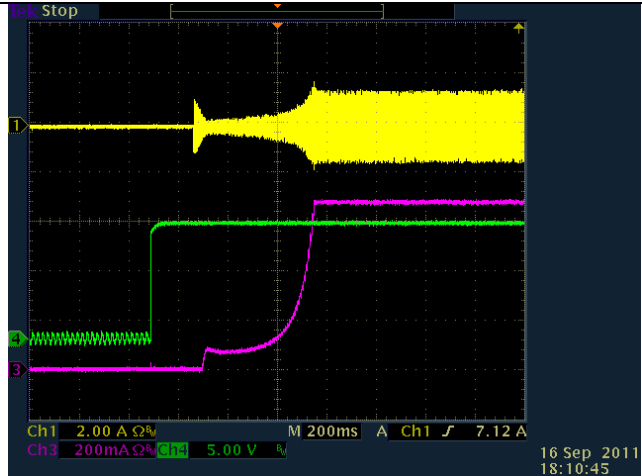

230Vac input

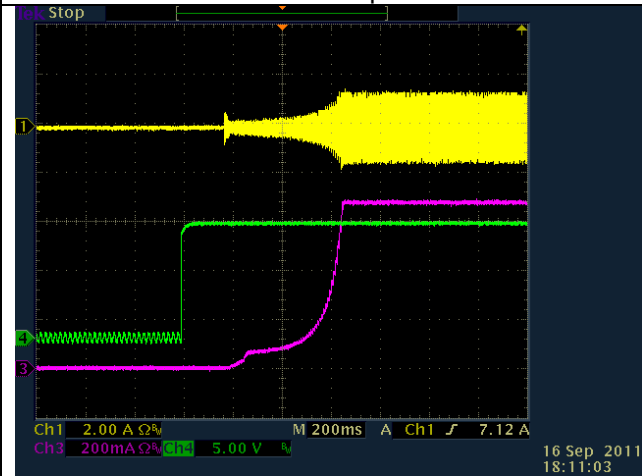

264Vac input

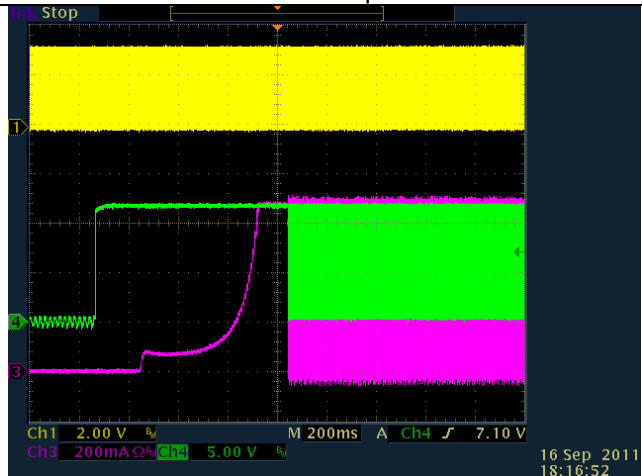

Start up with 50% dimming 230Vac input  
CH1: Input Dimming signal 2V/Div  
CH3: LED Output Current 200mA/Div


	CH4: LEDSW MOSFET Vgs 5V/Div
--	------------------------------

2.8: Operating waveform


CH1: Primary MOSFET Vds 100V/Div

CH2: LED Output Current 200mA/Div

CH4: Primary Current 1A/Div

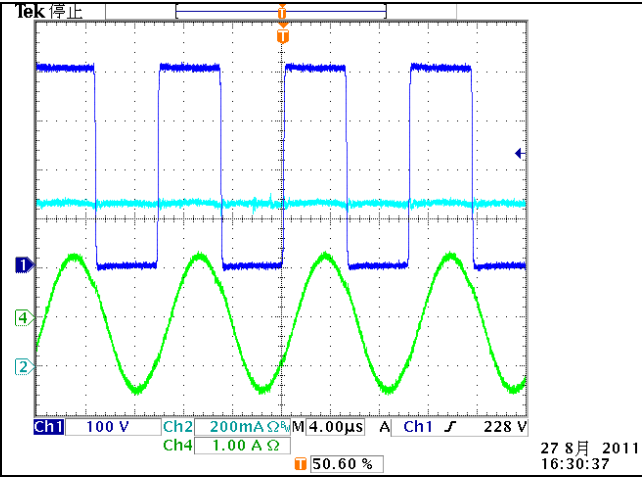


90Vac input

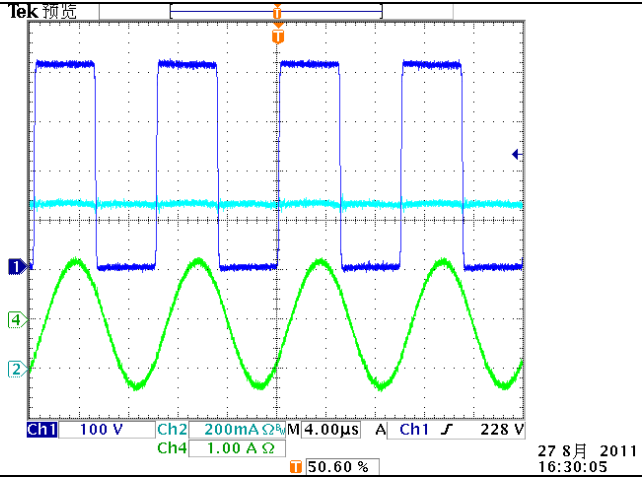


230Vac input

2.9: Bode Plot

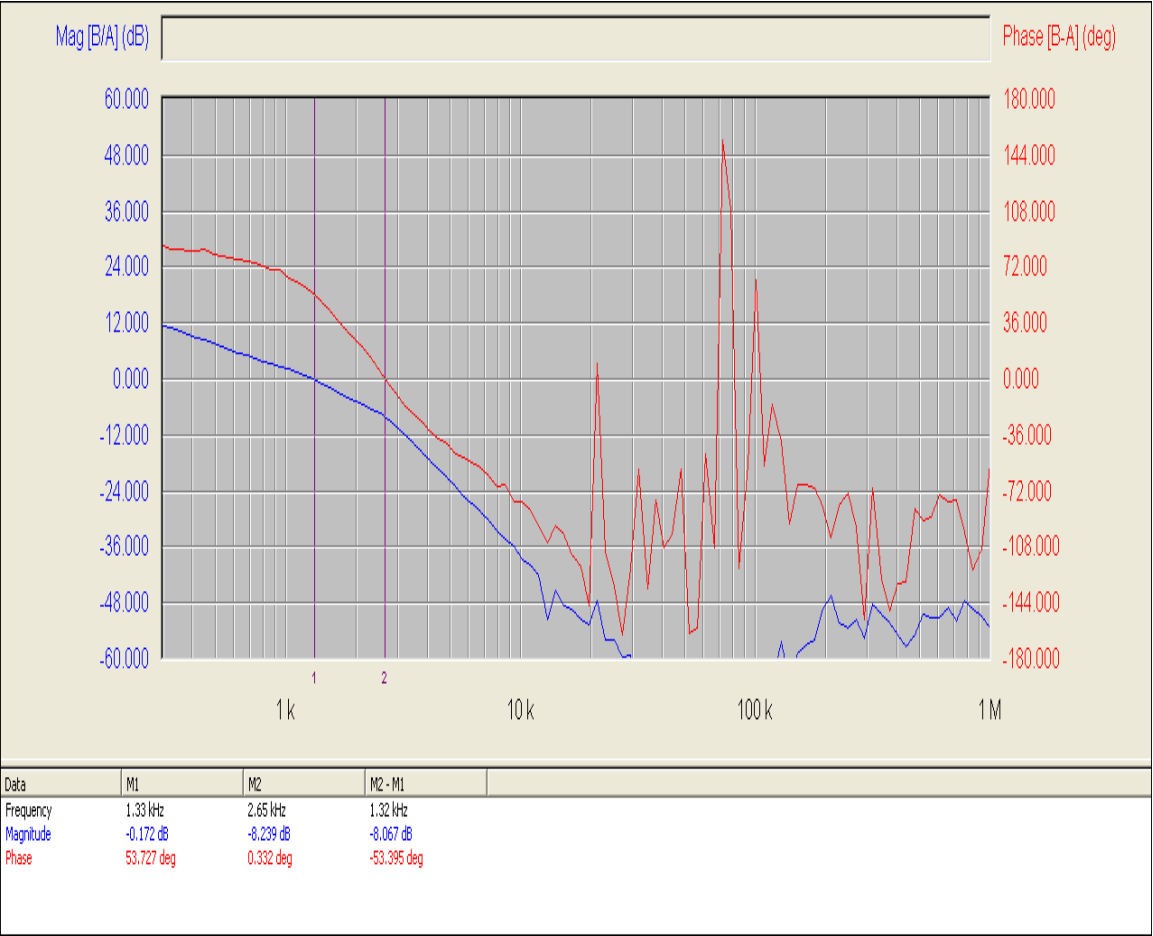


2.10: Thermal Test  
Test condition: Room Temperature  
Top Side full view

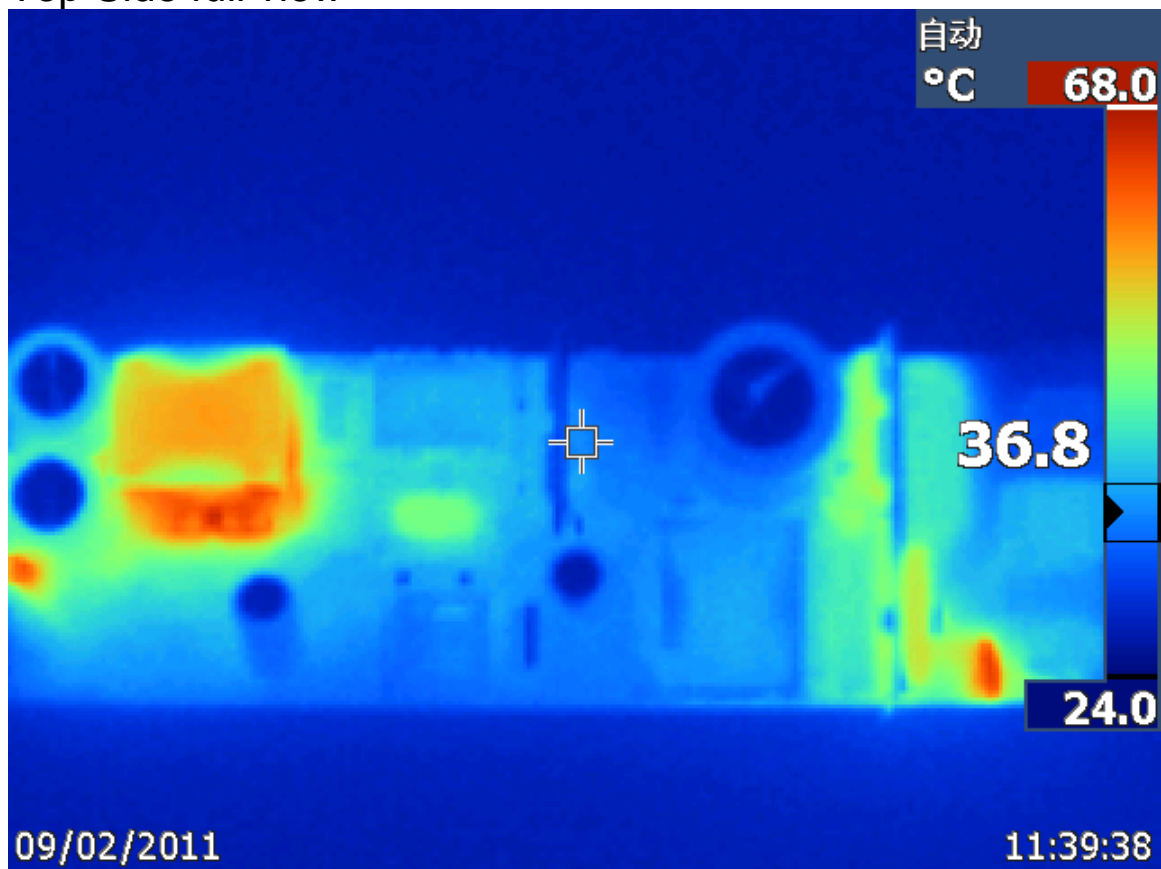


Main Transformer Temperature view



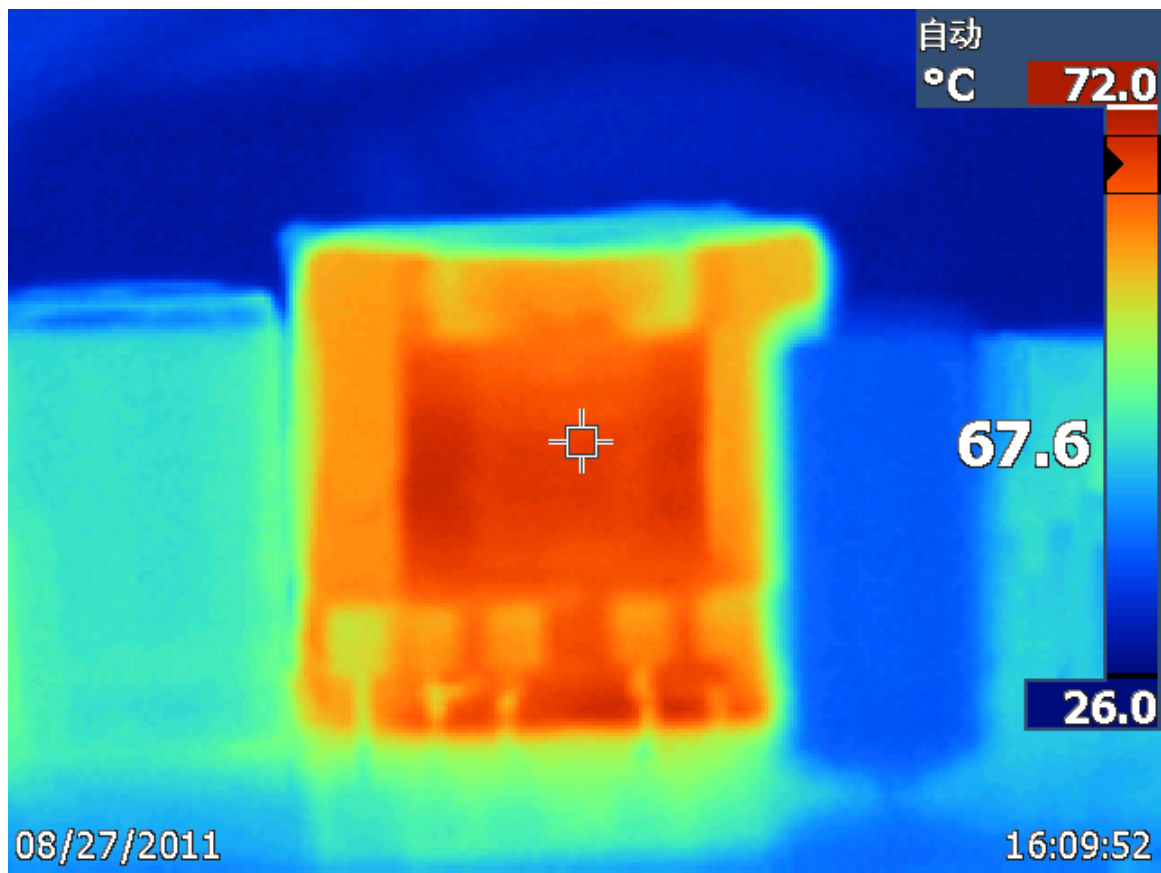

Bottom Output rectifier diode view

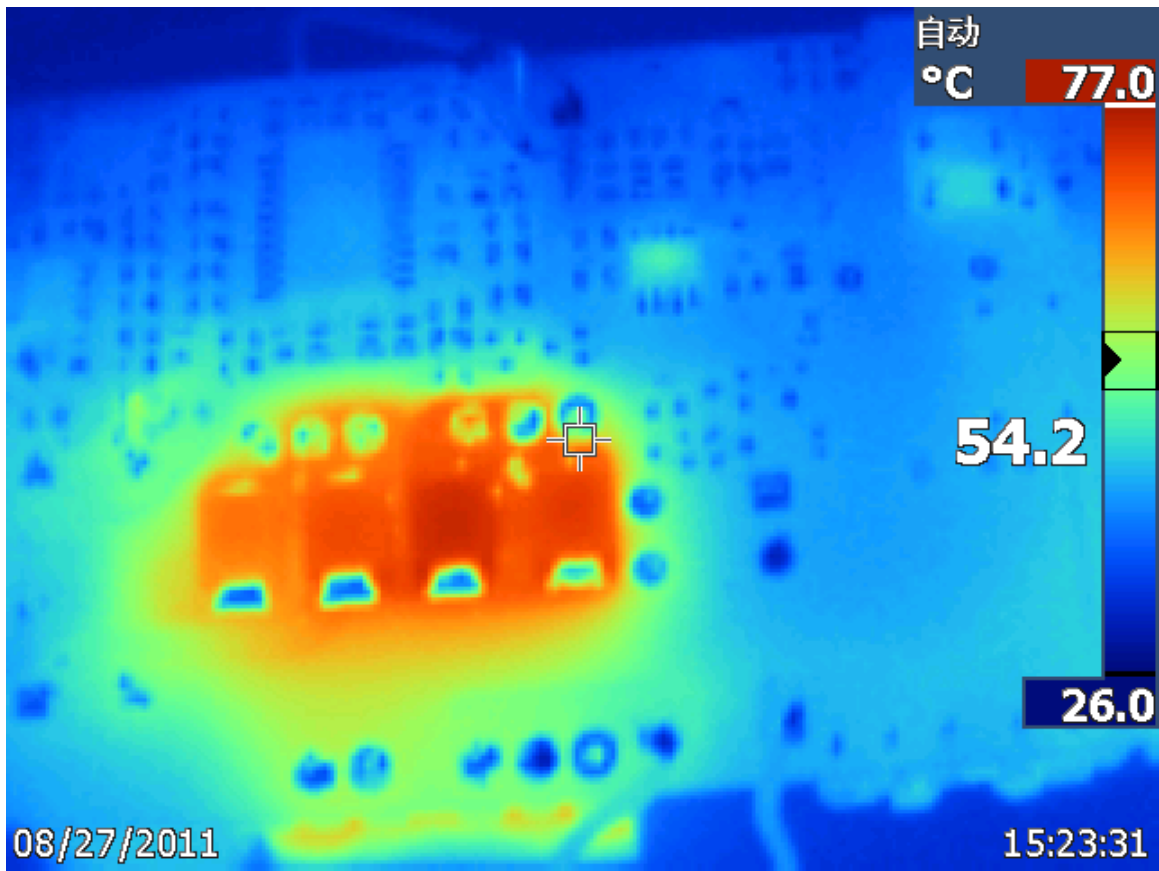

## 2.11: EMI test

Vin=230V

L5 changed to 47uH common mode choke (Würth PN: 744841247)

L6 changed to 20mH common mode choke (Würth PN: 744841247)

L1 changed to 300uH difference mode choke (Würth PN: 7447060)

Rectifier bridge and PFC heatsink connected to PGND

EMI TEST REPORT

parameter


Organization:	Operator:	EUT:
Place:	Time: 2011/9/7/17:35	
Detector: PK+AV	Test-time(ms): 30	
Limit: EN55015	Transductor(PK/AV): PK1 / AV1	
Remark:		

freq, step

Start(MHz)	End(MHz)	Step(MHz)
0.009	0.150	0.000
0.150	2.000	0.002
2.000	10.000	0.010
10.000	30.000	0.025

scan result

dBuV

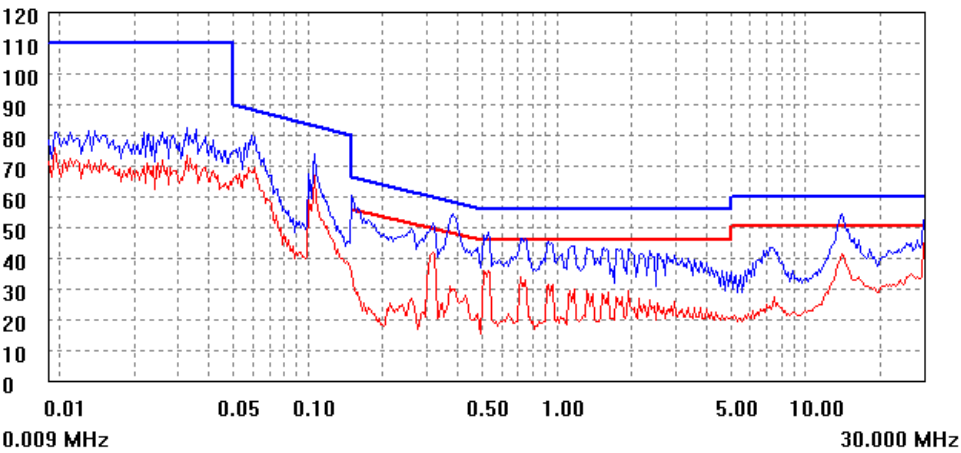

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated