

# TI-RSLK

Texas Instruments Robotics System Learning Kit



# Module 13

Quiz: Timers



# Quiz: Timers

## Q1 Timer\_A

- a) What determines the resolution of the periodic interrupt?
- b) What determines the maximum period for a Timer\_A period interrupt?
- c) What determines the minimum period for a Timer\_A period interrupt?

## Q2 Timer\_A

Explain how you could use two timers to make a very slow periodic interrupt (once an hour). This is a hardware solution, meaning the ISR runs exactly once an hour. You are allowed to use MSP432 pins.

## Q3 Timer\_A

Write a C program that maintains the time in hours, minutes and seconds using Timer A2 interrupts. Basically update these three global variables. Assume some other software initializes them to the correct time. Assume the bus clock is 48 MHz and SMCLK is 12 MHz.


```
uint8_t Hour; // 0 to 23
uint8_t Minute; // 0 to 59
uint8_t Second; // 0 to 59
```

## Q4 PWM

How does one choose the period with which run a PWM control of a motor? In particular, for what reason is it better to choose a longer (slower) period? For what reason is it better to choose a shorter (faster) period?

## Q5 Timer\_A

Use Timer A0 to create stepper motor outputs. There is an initialization function and a Timer A0 ISR that outputs the four signals run continuously. Assume the bus clock is 48 MHz and SMCLK is 12 MHz. The stepper motor has 200 steps per rotation; so if the signals change (step) every 50 ms, the motor spins at 1 rps. The duty cycle for each wave is 50%. The software rotates the stepper motor using the standard full-step (5-6-10-9...) sequence

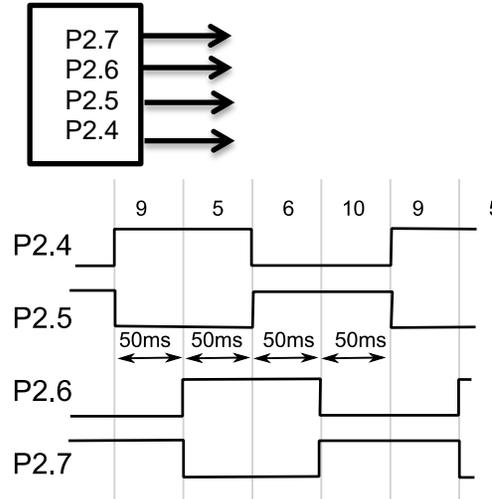

## Q6 PWM

Create a 5 kHz 50% duty cycle output on P2.4.

**[ti.com/rslk](https://ti.com/rslk)**

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2019, Texas Instruments Incorporated