



LM5020-2 Boost Converter for 2 LED Strings

TI reference design number: PMP10521 REV A

**Input: 55VDC to 135VDC
Output: 141 VDC @ 130mA**

DC – DC Test Results

Table of Contents

1	Test Specifications.....	3
2	Circuit Description.....	3
3	Board Photos	3
4	Efficiency	5
4.1	Efficiency Results	5
4.2	Efficiency Data.....	5
5	Thermal	6
5.1	Thermal Image	6
6	Startup and Shut Down.....	7
6.1	Startup and Shut Down into 130mA Load	7
6.1	Startup and Shut Down into No Load	7
7	Switch Voltage and Sense Voltage Ripple.....	8
8	Load Transient Response.....	9
9	Control Loop Frequency Response	10
9.1	50 Ω and 133V Constant Voltage Load	10
9.2	10mA Constant Current Load	10
9.3	No Load	11

1 Test Specifications


Vin Minimum	55 VDC
Vin Maximum	135 VDC
Vout	141 VDC
Iout	130mA

2 Circuit Description


PMP10521 is a boost converter for LEDs which utilizes the LM5020-2 controller. The switching frequency is set to 100 kHz for high efficiency at a nominal output power of 18.5W. The design features switch current limiting, output over-voltage limiting and summing feedback for multiple LED strings. Constant current regulation allows for wide variation of output voltage.

3 Board Photos

The design is built on PMP10505 Rev A printed circuit board. This is a 2-layer PCB with 1 oz. copper. PCB dimensions are 2.75 x 2.2 inch.

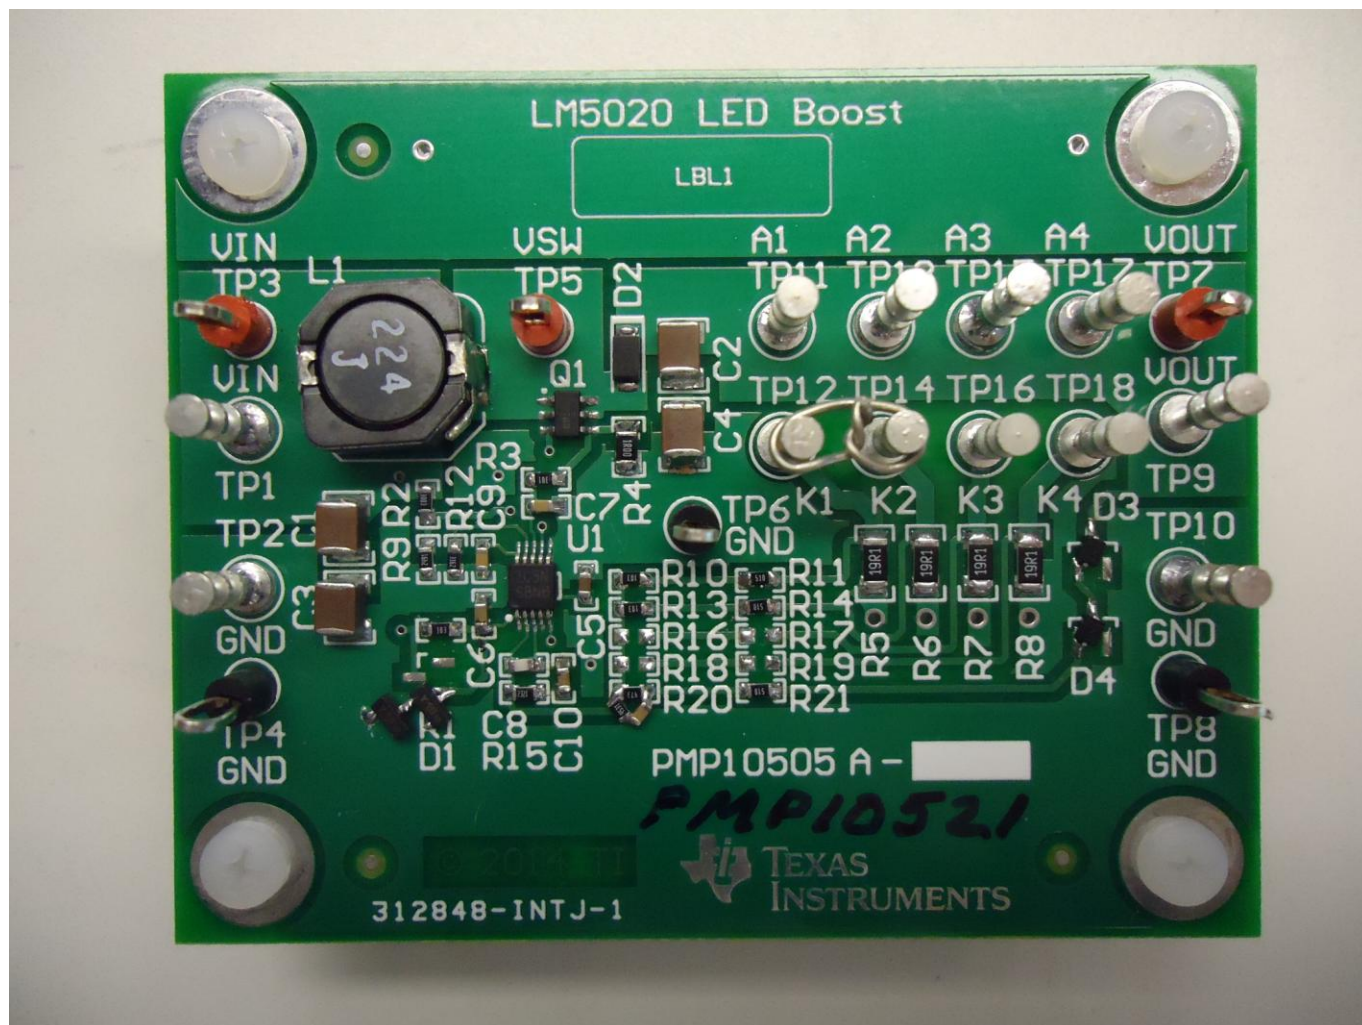


PMP10521 Test Results

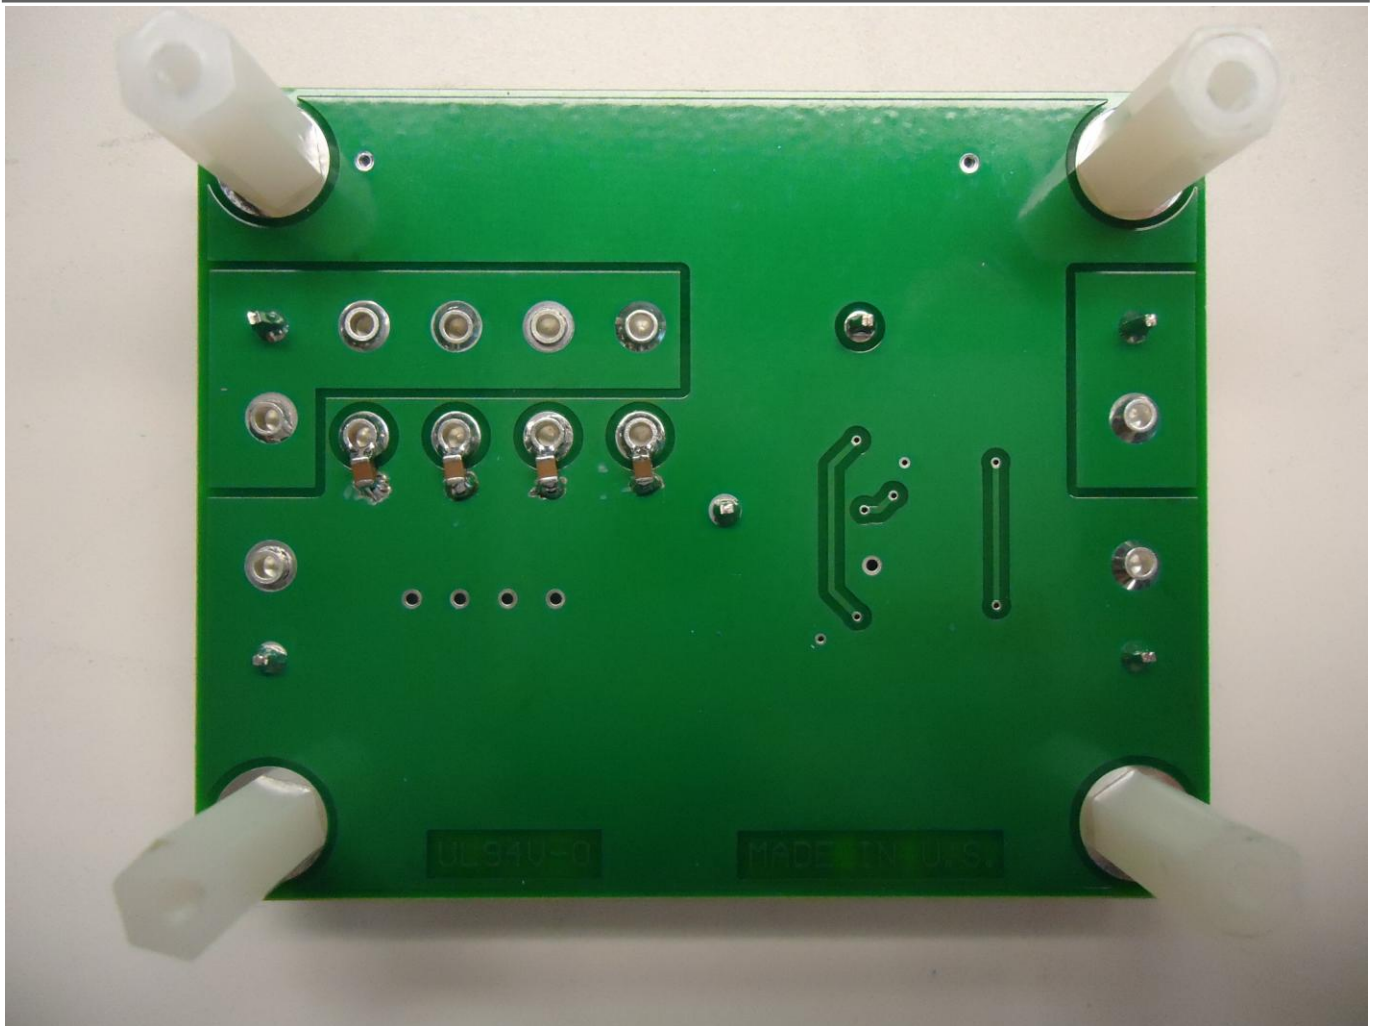

PMP10521 Test Results

4 Efficiency

4.1 Efficiency Results

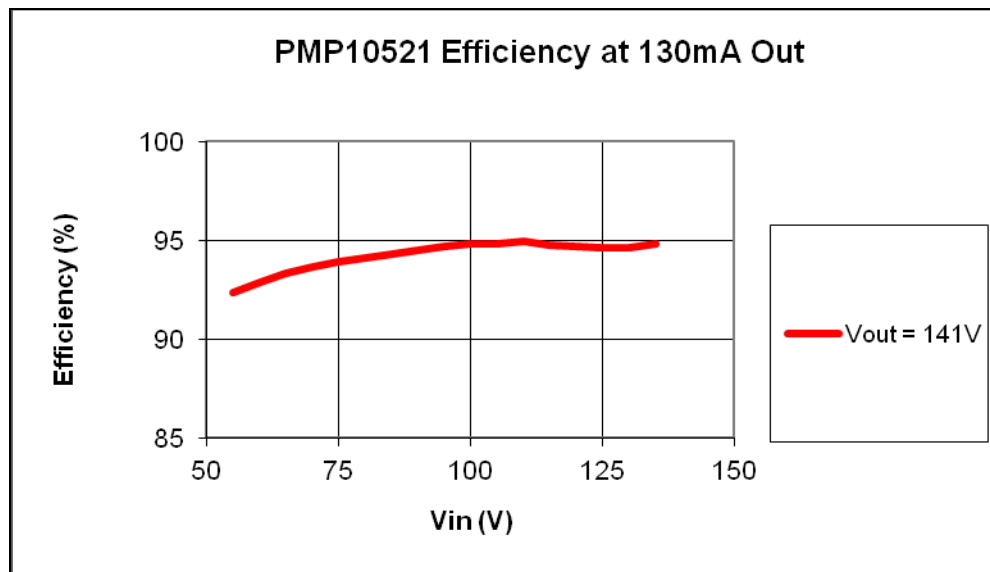


4.2 Efficiency Data

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Pdis (W)	Efficiency (%)
54.970	0.3623	140.86	0.1306	19.92	18.40	1.52	92.371
59.968	0.3303	140.86	0.1306	19.81	18.40	1.41	92.876
64.976	0.3033	140.87	0.1306	19.71	18.40	1.31	93.355
69.980	0.2808	140.87	0.1306	19.65	18.40	1.25	93.625
74.984	0.2612	140.87	0.1306	19.59	18.40	1.19	93.933
79.982	0.2444	140.87	0.1306	19.55	18.40	1.15	94.117
84.988	0.2295	140.87	0.1306	19.50	18.40	1.11	94.324
89.993	0.2163	140.87	0.1306	19.47	18.40	1.07	94.514
94.990	0.2046	140.87	0.1306	19.43	18.40	1.04	94.663
99.993	0.1941	140.87	0.1306	19.41	18.40	1.01	94.791
104.992	0.1848	140.87	0.1306	19.40	18.40	1.00	94.821
109.998	0.1762	140.87	0.1306	19.38	18.40	0.98	94.923
115.000	0.1688	140.87	0.1306	19.41	18.40	1.01	94.774
120.010	0.1619	140.87	0.1306	19.43	18.40	1.03	94.689
125.000	0.1555	140.87	0.1306	19.44	18.40	1.04	94.650
129.990	0.1496	140.87	0.1306	19.45	18.40	1.05	94.606
135.000	0.1437	140.87	0.1306	19.40	18.40	1.00	94.836

5 Thermal


5.1 Thermal Image

85V input to 141V output 130mA load.

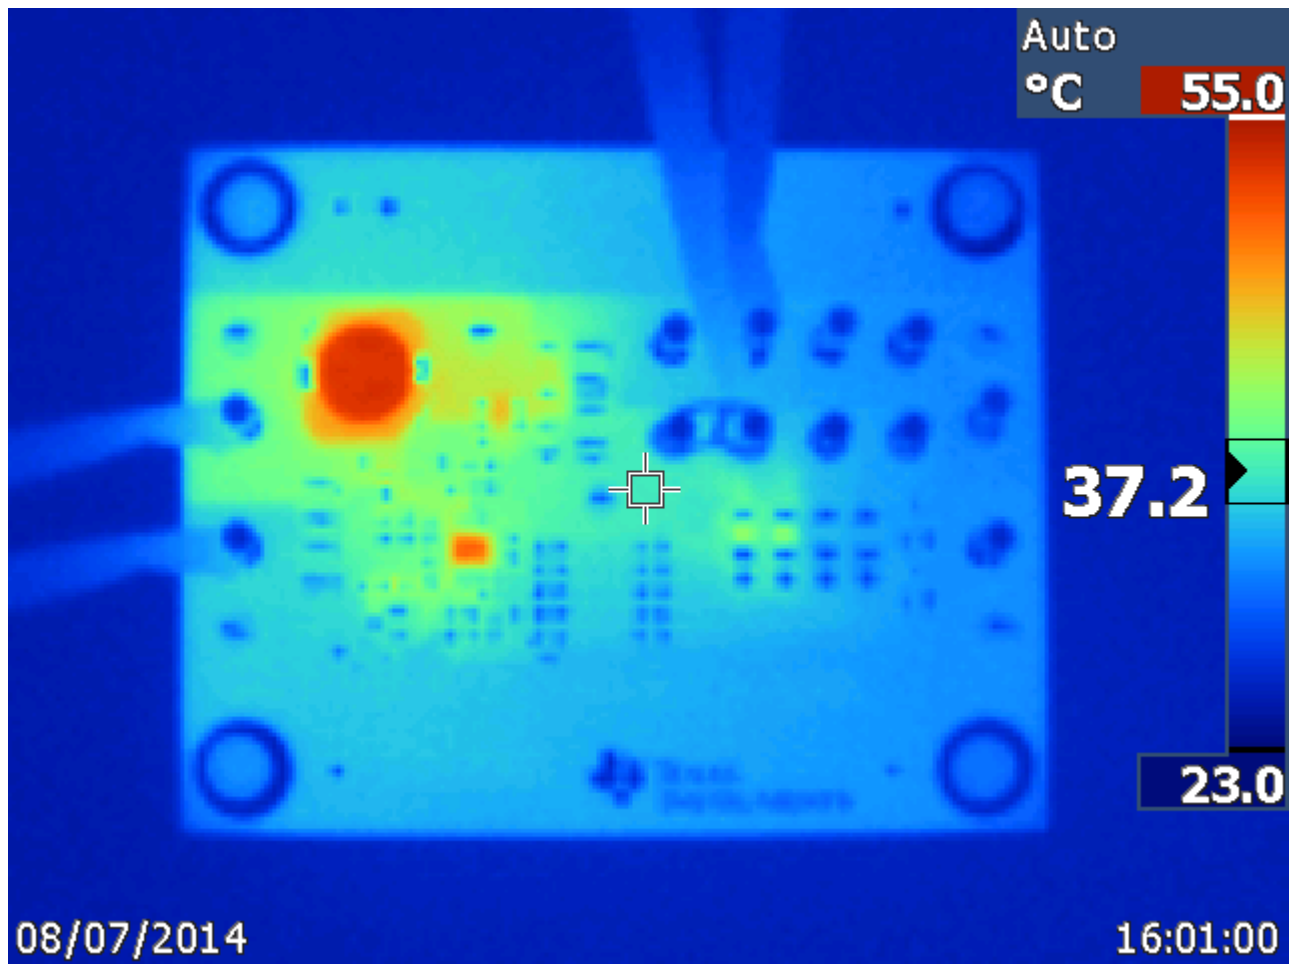


6 Startup and Shut Down

6.1 Startup and Shut Down into 130mA Load


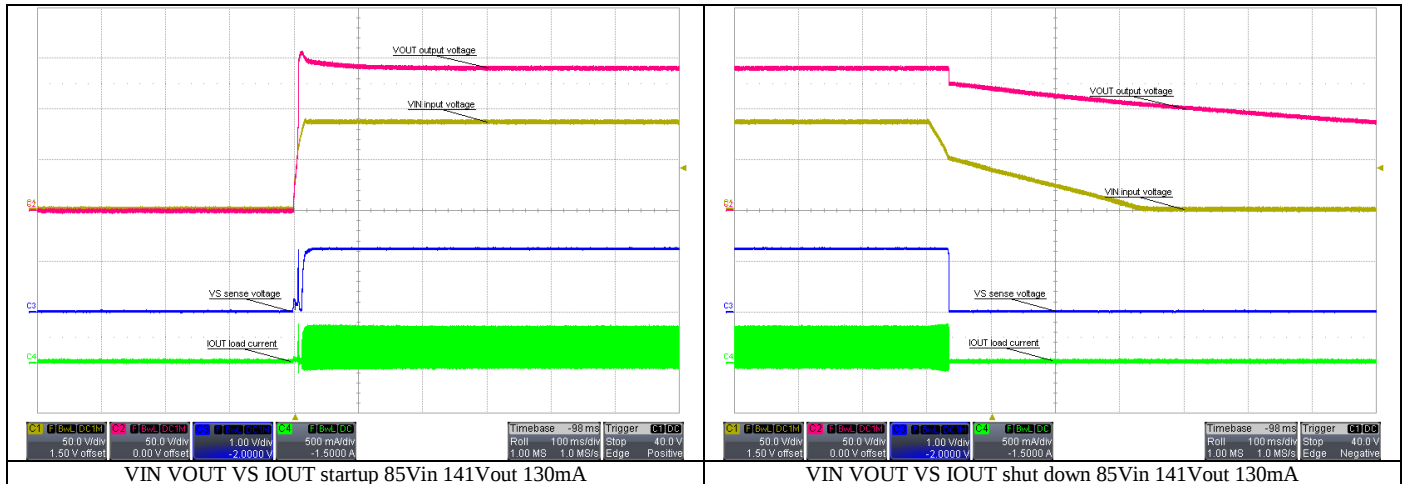


6.1 Startup and Shut Down into No Load

This demonstrates output over-voltage limiting at 160V.

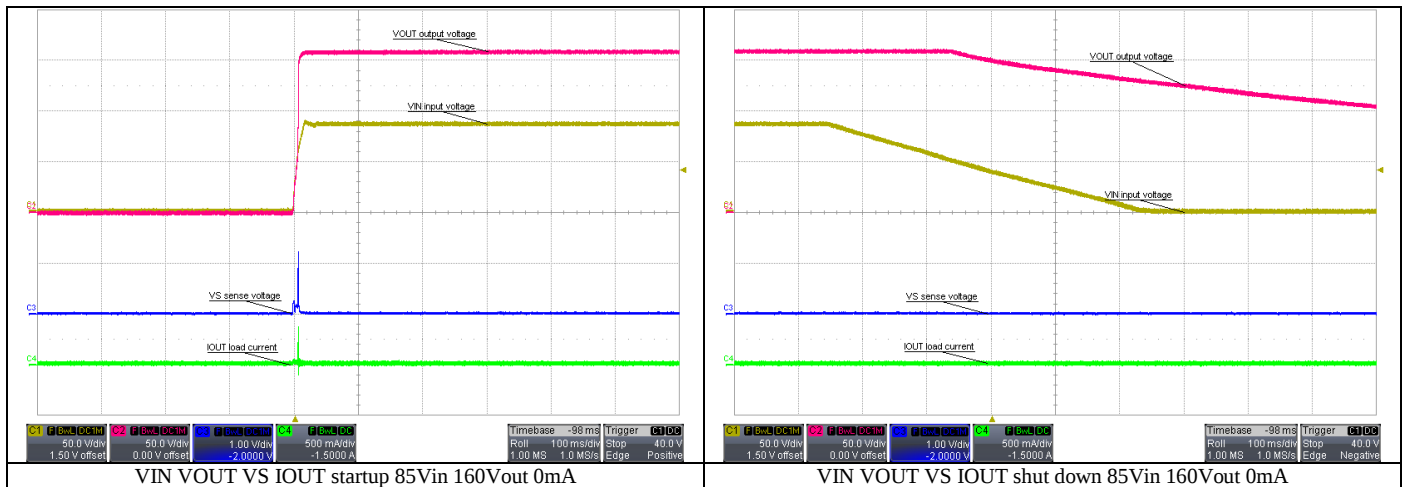


7 Switch Voltage and Sense Voltage Ripple

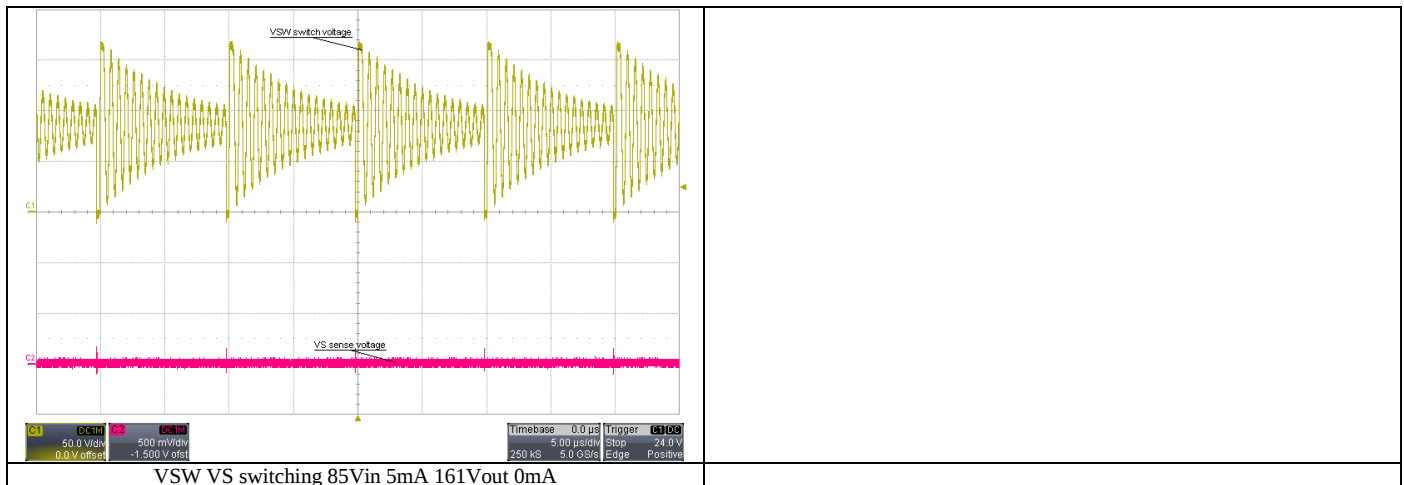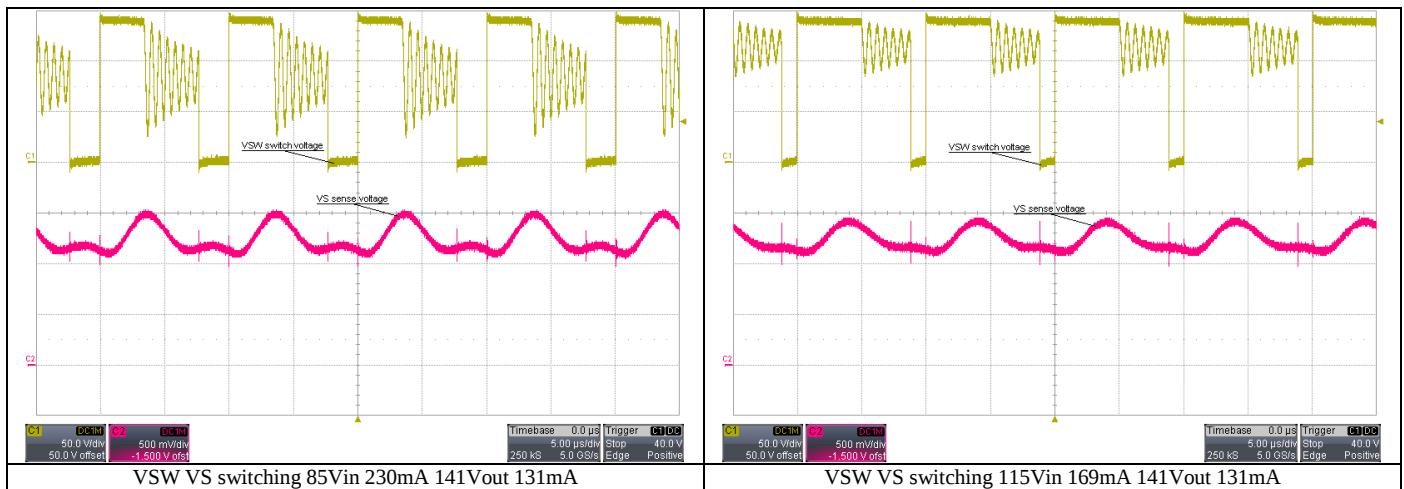

PMP10521 Test Results





8 Load Transient Response

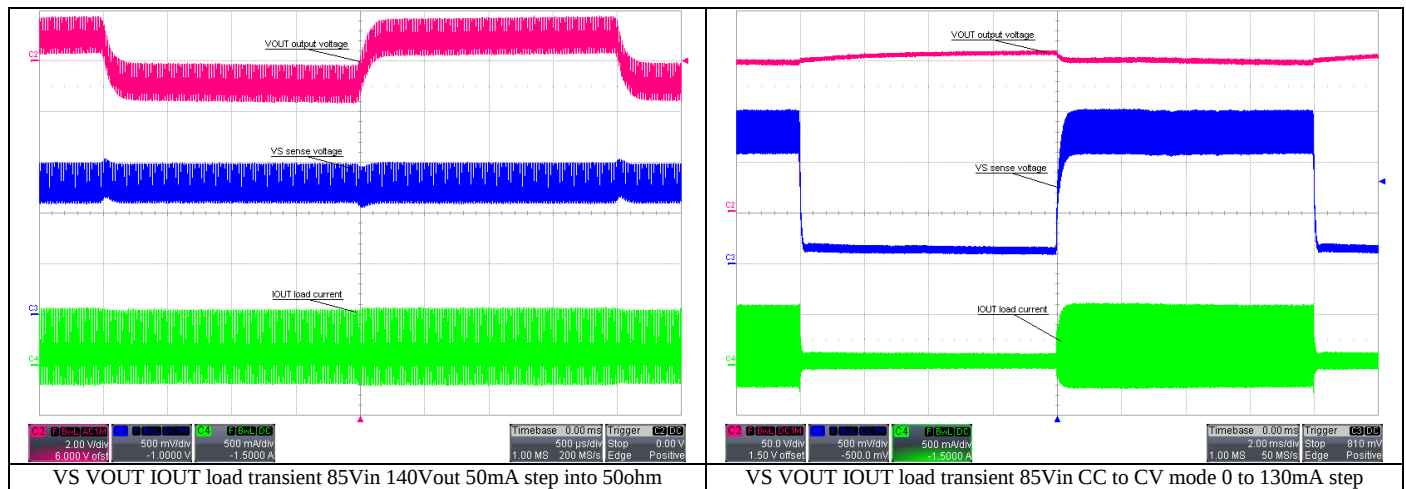


9 Control Loop Frequency Response


9.1 50Ω and 133V Constant Voltage Load

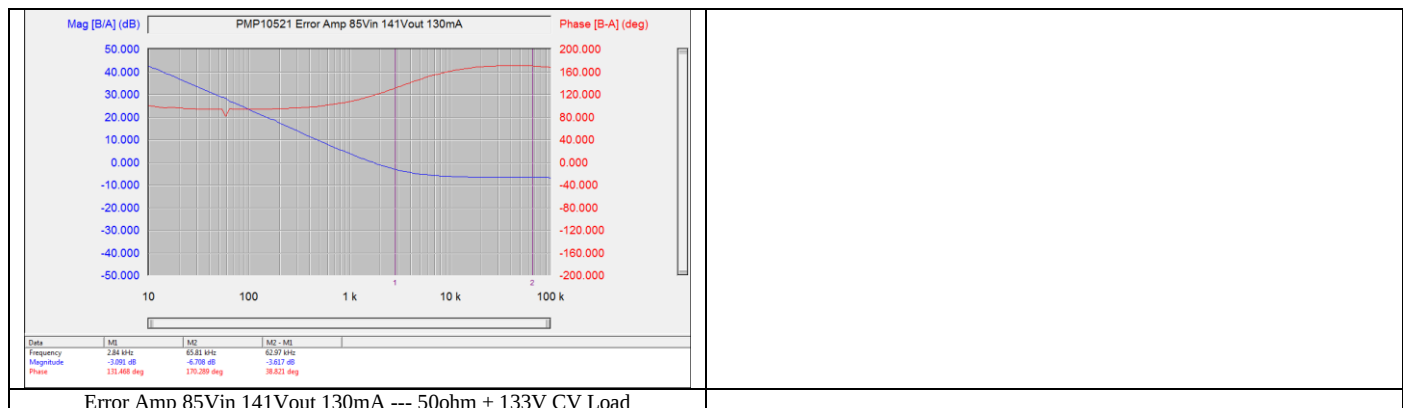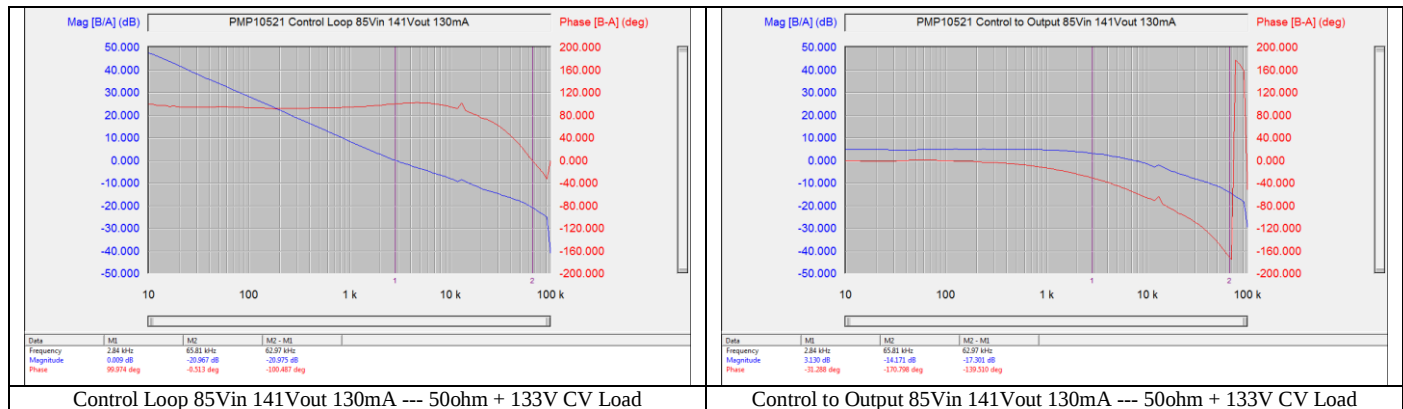



9.2 10mA Constant Current Load

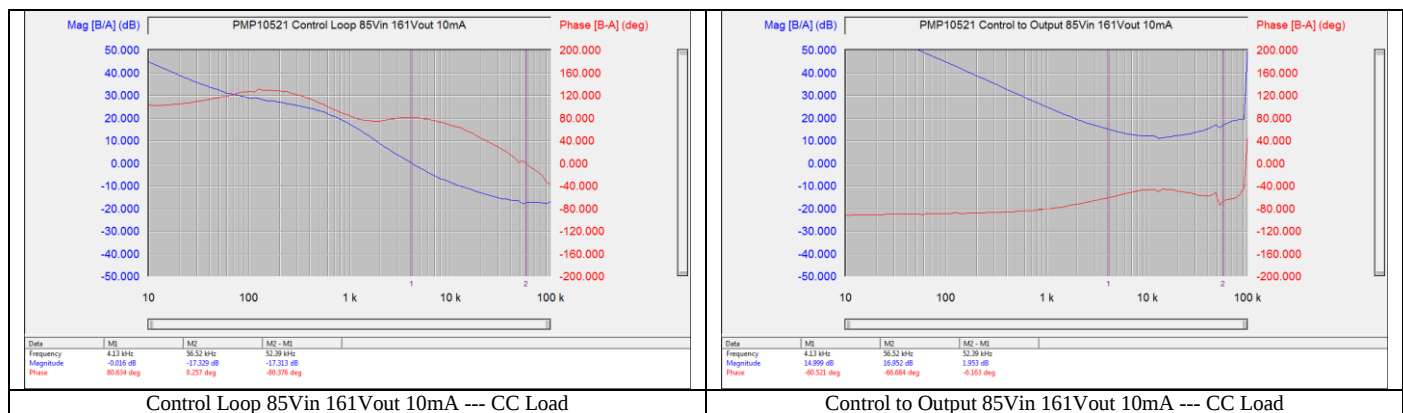

PMP10521 Test Results

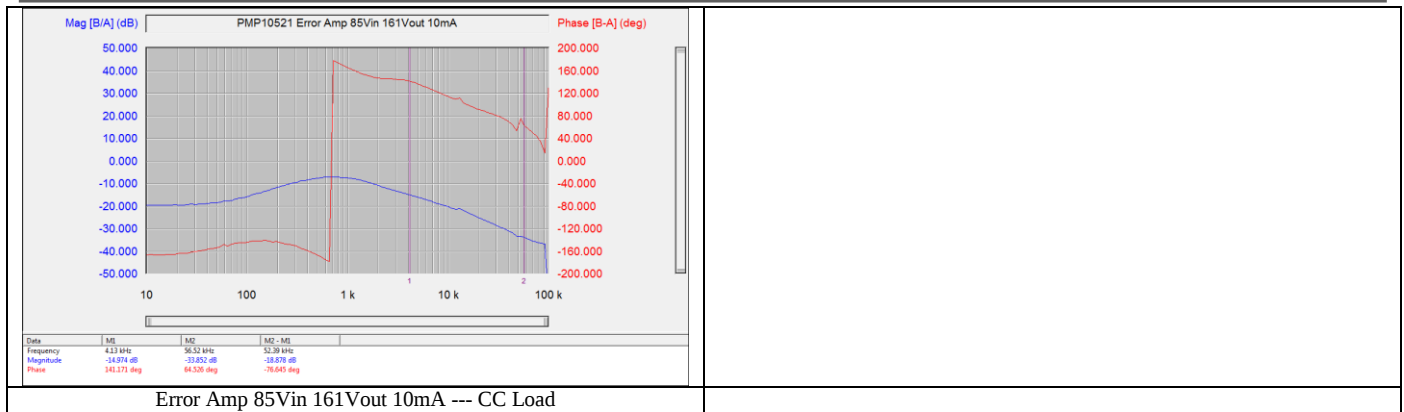

9.3 No Load

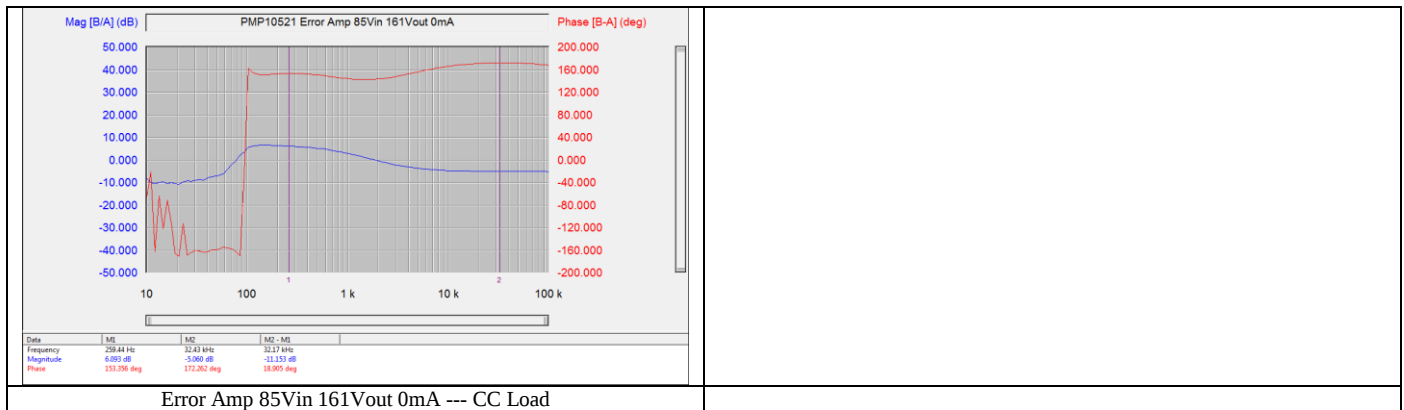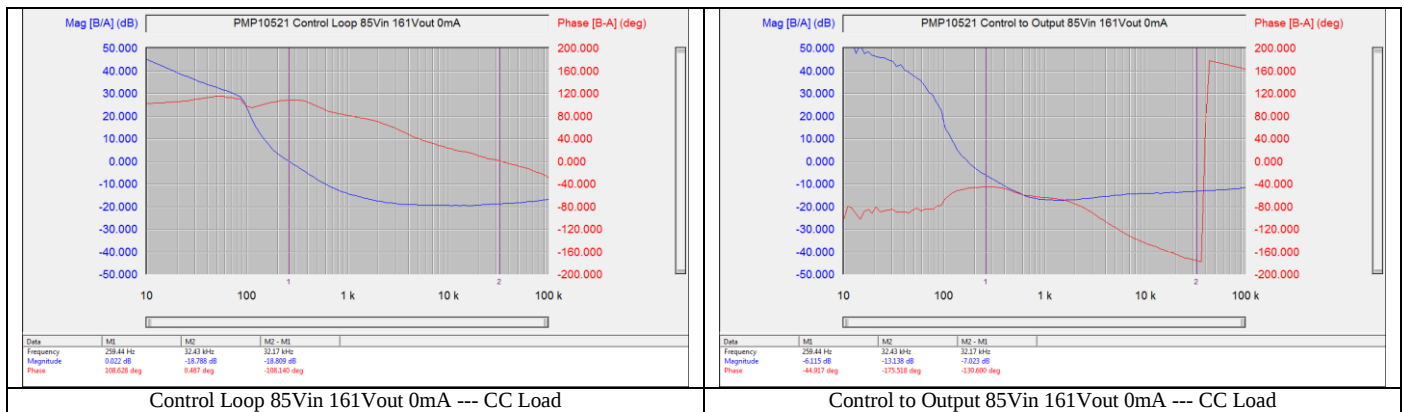

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated