

# High-Accuracy Isolated Voltage Measurements in HEV/EV Subsystems Using AMC1311-Q1 and AMC1211-Q1



## Introduction

Most electric vehicles (EV) and hybrid electric vehicles (HEV) have multiple high-voltage (HV) powertrain subsystems, including:

- **Traction inverter & motor control** – drives 3-phase traction motor by converting HV DC battery to multi-phase AC
- **On-board charger (OBC)** – charges HV DC battery by converting AC line voltage to DC
- **DC/DC converters** – converts HV DC battery voltage to low voltage auxiliary power supplies for various electric loads such as infotainment systems, headlights, etc.
- **Battery management systems (BMS)** – monitors, controls and protects the charging and discharging of HV DC battery

Figure 1 shows the relationship between these subsystems in a typical HEV/EV system.

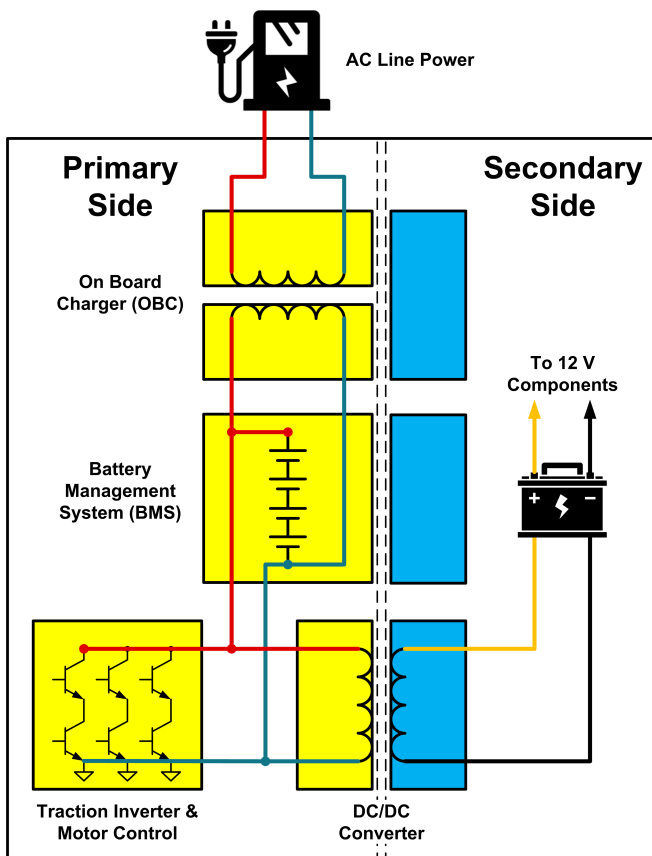


Figure 1. HEV/EV Powertrain Block Diagram

Since HEV/EVs operate at high voltages in very harsh environments, high-performance isolated voltage and current measurement solutions are critical for maintaining powertrain efficiency and long-term reliability. To meet these performance and isolation requirements, Texas Instruments has released the **AMC1311-Q1**, an AEC-Q100 qualified, high-accuracy, reinforced isolation amplifier.

## AMC1311-Q1 for Isolated Voltage Measurements

While Texas Instruments offers a wide variety of **isolated amplifiers** and **modulators** for voltage and current measurements, the AMC1311-Q1 has several features that make this device particularly well-suited for isolated voltage sensing. The AMC1311-Q1 offers high input impedance (1 GΩ typical), a wide input full-scale range (0–2 V) and excellent DC accuracy and drift performance, enabling high performance resistor-divider-based voltage measurements over a wide temperature range.

Additionally, the AMC1311-Q1 offers high common-mode transient immunity (CMTI) and several fail-safe output modes to ensure reliable and accurate operation, even in noisy automotive environments.

## AMC1311-Q1 in an HEV/EV Subsystem

In any typical HEV/EV subsystem, some isolated voltage measurements are required to ensure proper operation. For example, a traction inverter requires an isolated voltage measurement between the positive and negative bus voltages ( $\pm V_{BUS}$ ), as shown in Figure 2.

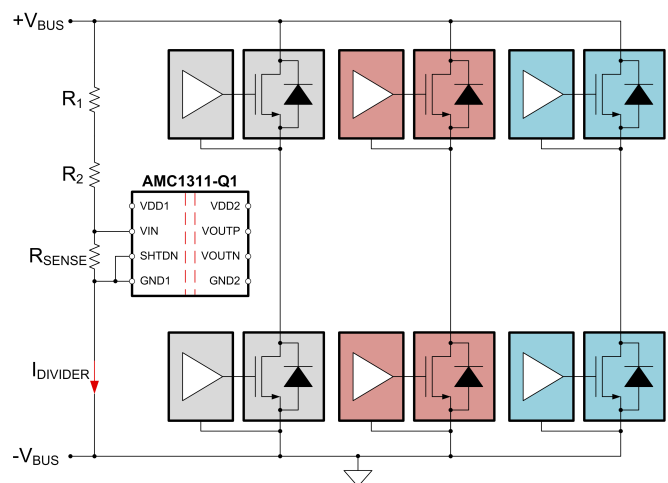


Figure 2. Traction Inverter Block Diagram

This bus voltage is commonly measured using a resistor divider network ( $R_1$ ,  $R_2$  and  $R_{SENSE}$  in [Figure 2](#)). This network divides the bus voltage down to a level that is within the isolated amplifier's linear input range. The values of these resistors can be calculated from the subsystem parameters and the isolation amplifier's specifications.

### Resistor Divider Calculations

The values of  $R_1$ ,  $R_2$  and  $R_{SENSE}$  can be calculated from the following parameters:

- Amplifier's maximum input voltage ( $V_{IN}$ )
- Maximum resistor divider current ( $I_{DIVIDER}$ )
- Bus voltage ( $V_{BUS}$ )

[Table 1](#) summarizes these system parameters and how each are determined, as well as provides some typical values.

**Table 1. Typical Inverter System Parameters**

Parameter	Value	Choosing a Value
$V_{BUS}$	800 V	EV bus voltage
$V_{IN}$ (max)	2 V	Maximize amplifier's allowable input voltage for best dynamic range
$I_{DIVIDER}$ (max)	100 $\mu$ A	Tradeoff between size of $R_{SENSE}$ and reducing heat dissipation across $R_{SENSE}$

The required value of  $R_{SENSE}$  is calculated using Ohm's law. Assuming  $R_1 = R_2$ , the values of  $R_1$  and  $R_2$  can be calculated as shown below:

$$R_{SENSE} = V_{IN} / I_{DIVIDER} = 2 \text{ V} / 100 \text{ } \mu\text{A} = 20 \text{ k}\Omega \quad (1)$$

$$R_1, R_2 = (V_{BUS} - V_{IN}) / 2 \cdot I_{DIVIDER} \quad (2)$$

$$R_1, R_2 = (800 \text{ V} - 2 \text{ V}) / 2 \cdot 100 \text{ } \mu\text{A} = 3.99 \text{ M}\Omega \quad (3)$$

The 20 k $\Omega$  sense resistor in parallel with the AMC1311-Q1's 1 G $\Omega$  input impedance results in a negligible 0.002% error contribution.

### AMC1311-Q1 vs AMC1311B-Q1

Texas Instruments offers two versions of the AMC1311-Q1. These devices have different performance levels depending on the needs of the system:

- Standard grade (AMC1311-Q1)
- High grade (AMC1311B-Q1)

[Table 2](#) summarizes the differences between the two devices. Please note that the minimum and maximum specifications of the AMC1311-Q1 in [Table 2](#) apply from  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ .

**Table 2. AMC1311-Q1 vs AMC1311B-Q1**

Parameter	AMC1311-Q1	AMC1311B-Q1
Bandwidth (kHz) (min / typ)	100 / 220	220 / 275
Initial Gain Error (%) (max)	$\pm 1$	$\pm 0.3$
Gain Error Drift (ppm/ $^\circ\text{C}$ ) (max)	$\pm 30$ (typ)	$\pm 45$
Initial Input Offset (mV) (max)	$\pm 9.9$	$\pm 1.5$
Offset Drift ( $\mu\text{V}/^\circ\text{C}$ ) (max)	$\pm 20$ (typ)	$\pm 15$
High-Side Supply Voltage (max)	4.5 V to 5.5 V	3 V to 5.5 V
CMTI (kV/ $\mu\text{s}$ ) (min / typ)	15 / 30	75 / 140
Price (1kU, \$USD)	<a href="#">Click here</a>	

Additionally, Texas Instruments offers the [AMC1211A-Q1](#), a basic isolated amplifier that is pin-compatible to the AMC1311x-Q1 devices. The AMC1211A-Q1 offers the same performance as the AMC1311B-Q1 in [Table 2](#), except for a lower CMTI of 30 kV/ $\mu\text{s}$  (min) and 45 kV/ $\mu\text{s}$  (typ). Also, the AMC1211A-Q1's working voltage is 1 kV<sub>RMS</sub>, compared to 1.5 kV<sub>RMS</sub> for the AMC1311x-Q1 devices.

### Alternative Measurement Methods

While the AMC1311-Q1 isolation amplifier offers excellent performance and high input impedance for isolated voltage measurements, alternative measurement methods exist.

One such method uses an isolated delta-sigma modulator that sends a digital bitstream across the isolation barrier to be filtered by a microcontroller (MCU) or field-programmable gate array (FPGA). Another method uses a [precision SAR or delta-Sigma ADC](#) and a digital isolator. [Table 3](#) highlights some devices recommendations for these alternative methods.

**Table 3. Device Recommendations for Alternative Isolated Voltage Measurement Methods**

Device	Description
<a href="#">AMC1304-Q1</a>	Isolated delta-sigma modulator
<a href="#">ADS1118-Q1 + ISO7741-Q1</a>	16-bit delta-sigma ADC + high speed, 3/1 digital isolator

### Conclusion

As the HEV and EV market continues to grow, so too will the need for high-performance isolated voltage measurements. Texas Instruments' AMC1311-Q1 is a high-input impedance, AEC-Q100 qualified, reinforced isolation amplifier specifically designed to provide accurate isolated voltage measurements that help maintain reliable vehicle operation.

## IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2018, Texas Instruments Incorporated