

TIC Digital Interface

Martin Seeger and Eric Djakam

ABSTRACT

Interfaces for the TIC protocol are mainly based on analog circuits, containing transistor, amplifier, and comparator stages. They require effort in analog engineering, and the reliability suffers from tolerances, shifting, and aging analog components.

This application report presents a TIC Digital Interface, which considers an early analog-to-digital conversion with the help of a $\Delta\Sigma$ -modulator AMC1204 device and, for data processing, a MSP430 microcontroller. Out of the analog TIC signal, the AMC1204 device generates a bit stream, which is used as clock input for a MSP430 timer module. A transmitted logical “1” leads to a slow-counting frequency, whereas a “0” leads to a fast-counting frequency. The sampled data is forwarded to the application with a distinction between cases and a synchronization clock of the MSP430.

Due to its simple design and the internal isolation of the AMC1204 device, the TIC Digital Interface does not require a transformer in the signal path, unlike analog solutions, which require a transformer.

1 Objective

The goal of the project is to provide an interface for electricity meters. Those meters, used by Electricity of France (EDF), offer a 2-wire analog interface and allow monitoring of network utilization and power consumption. The digital interface is designed to convert the analog signal into a digital data stream.

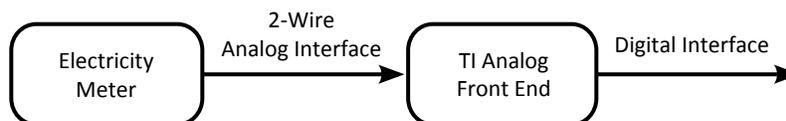


Figure 1.

The following parameters describe the input signal of the analog interface:

- Differential signal
- On-off-keying (OOK) with $f = 50$ kHz
- Low-Active:
 - Logical 1 = Signal off
 - Logical 0 = Signal on
- Baud rate: 1200 or 9600 Bd

2 Concept Overview

2.1 System Overview

The proposed interface consists of two components from Texas Instruments:

- $\Delta\Sigma$ -Modulator: AMC1204
- Microcontroller: MSP430

The electricity meter is connected via a 2-wire interface (differential signaling) to the AMC1204 device. The information, sent by the meter, is transmitted with a baud rate of 1200 Bd or 9600 Bd. The modulator generates a serial bit stream (see [Section 2.2](#)), which is captured by the MSP430. Besides the capturing this stream, the MSP430 has to process the data and it also provides realtime functionality to generate a synchronized data stream (see [Section 2.3](#)).

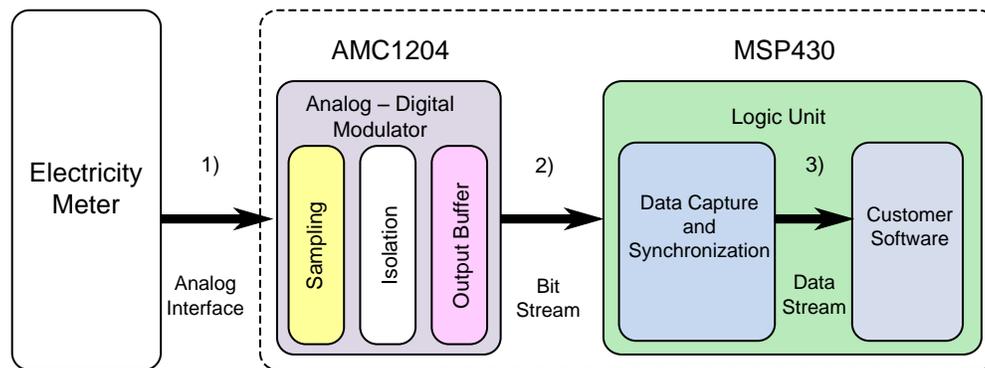


Figure 2. System Overview

2.2 Expected Signals and Streams

The relationship of the modulator output to the input difference is described in the AMC1204 device [data sheet](#):

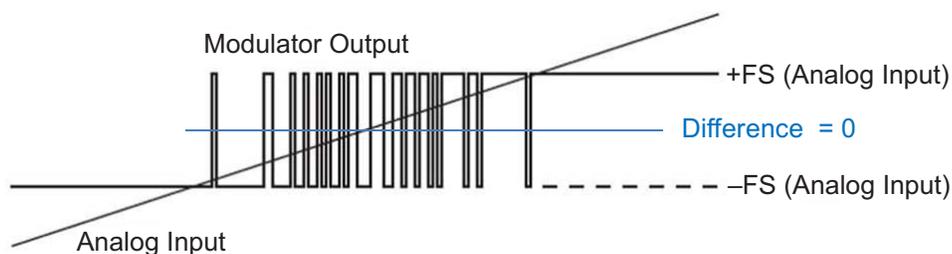


Figure 3. Analog Input versus Modulator Output ⁽¹⁾

With this information, the following bit stream is expected:

⁽¹⁾ Texas Instruments, [data sheet](#) AMC1204

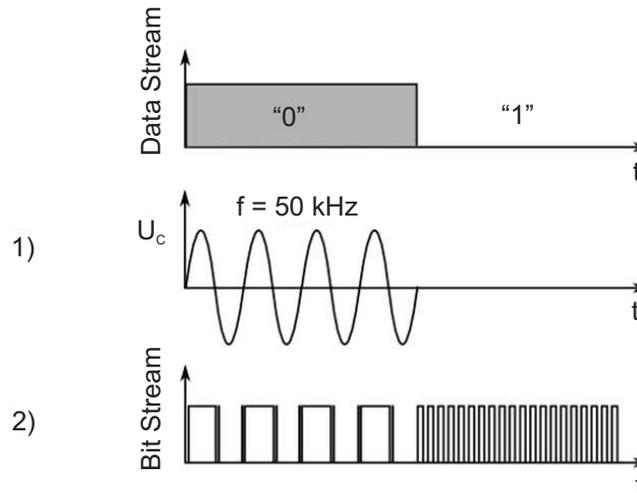


Figure 4. Expected Bit Stream from the AMC Modulator

If the amplitude of the input signal is high, the AMC input stage is saturated and the output stage generates a rectangular signal with $f = 50 \text{ kHz}$. With an input signal difference of "0", the output stage generates a high-frequency signal, which is expected to range in MHz (depending on the input clock of the AMC).

2.3 Software Model: Data Sampling and Digital Data Stream

As described in the system overview, the microcontroller MSP430 has two tasks:

1. Sampling the information of the input signal
2. Synchronization and generation of a digital data stream with a baud rate of 1200 or 9600 Bd

For these tasks, two timers are used.

Timer A – Counter Mode for Sampling Data

The clock input of the first timer is connected to the data output pin of the $\Delta\Sigma$ -Modulator AMC1204 device. Section 2.2) shows that a low-input difference (transmitting a "1") at the modulator generates a high-frequency signal, which makes the timer count fast. If the input difference is high (transmitting a "0"), the output signal does not count many edges and timer A counts slowly.

Timer B – Synchronization

The second timer module is used to generate an interrupt event. The event is triggered five times within the time of a symbol. The following is an example for the higher baud rate:

- Baud rate: $v = 9600 \text{ Bd}$
- Time of a transmitted symbol: $T_{sym} = \frac{1}{v} = \frac{1}{9600 \text{ Bd}} = 104.1\bar{6} \mu\text{s}$
- Oversampling: $n = 5$
- Time of Timer A's counter value: $T_{ISR} = \frac{T_{sym}}{n} = \frac{104.1\bar{6} \mu\text{s}}{5} = 20.8\bar{3} \mu\text{s}$

The main clock MCLK of the microcontroller is set to $f_{MCLK} = 12 \text{ MHz}$. The counter compare value is set to:

- Timer B's counter compare value: $n = T_{ISR} \times f_{MCLK} = 20.8\bar{3} \mu\text{s} \times 12 \text{ MHz} = 250$

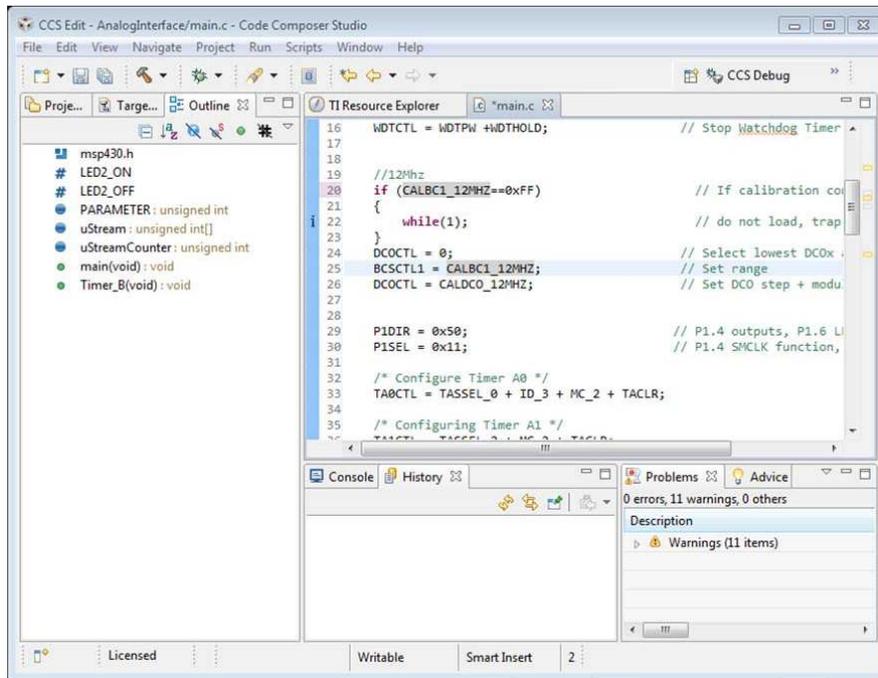


Figure 7. Code Composer Studio™ 5.4

Verifying the expected waveforms and signals:

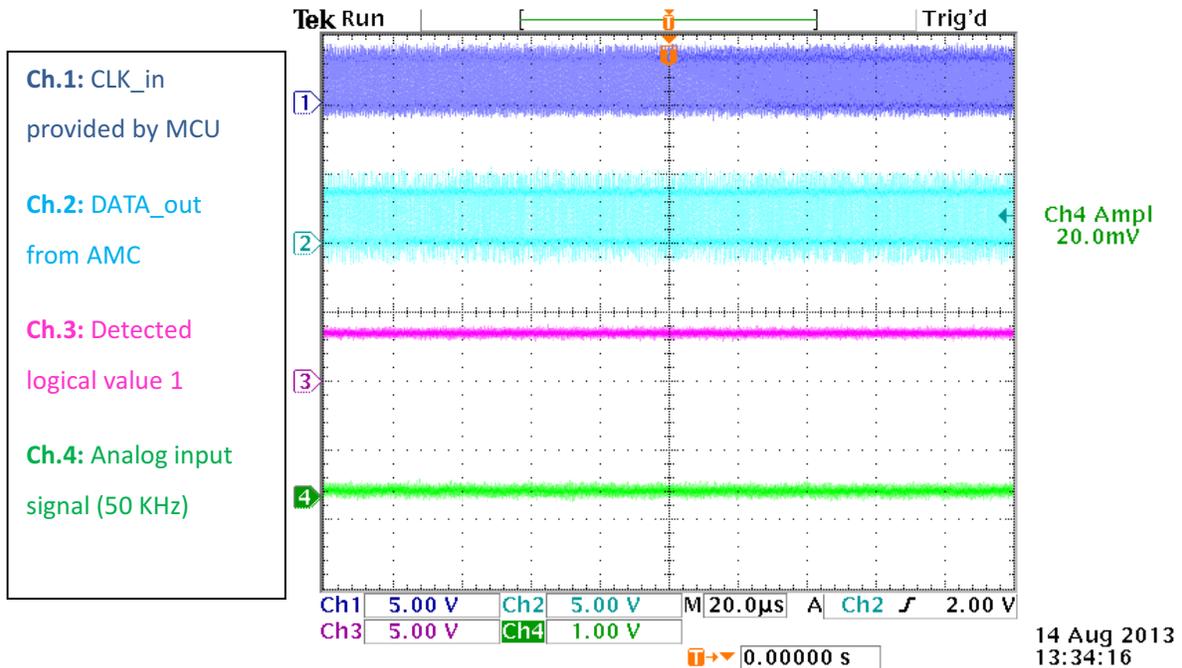


Figure 8. Transmitting a Logical "1"

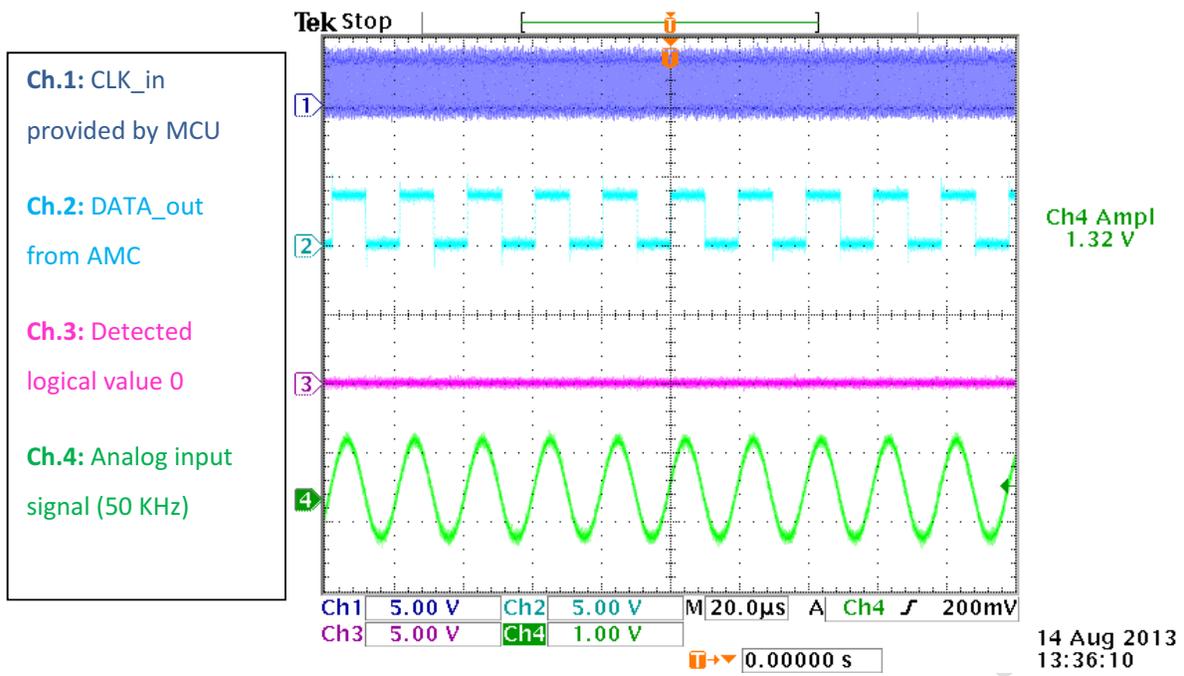


Figure 9. Transmitting a Logical "0"

4 Summary

In this application study, a frontend is considered which uses a $\Delta\Sigma$ -modulator AMC1204 device and a microcontroller of the MSP430 family from Texas Instruments. A short summary is shown in Figure 10:

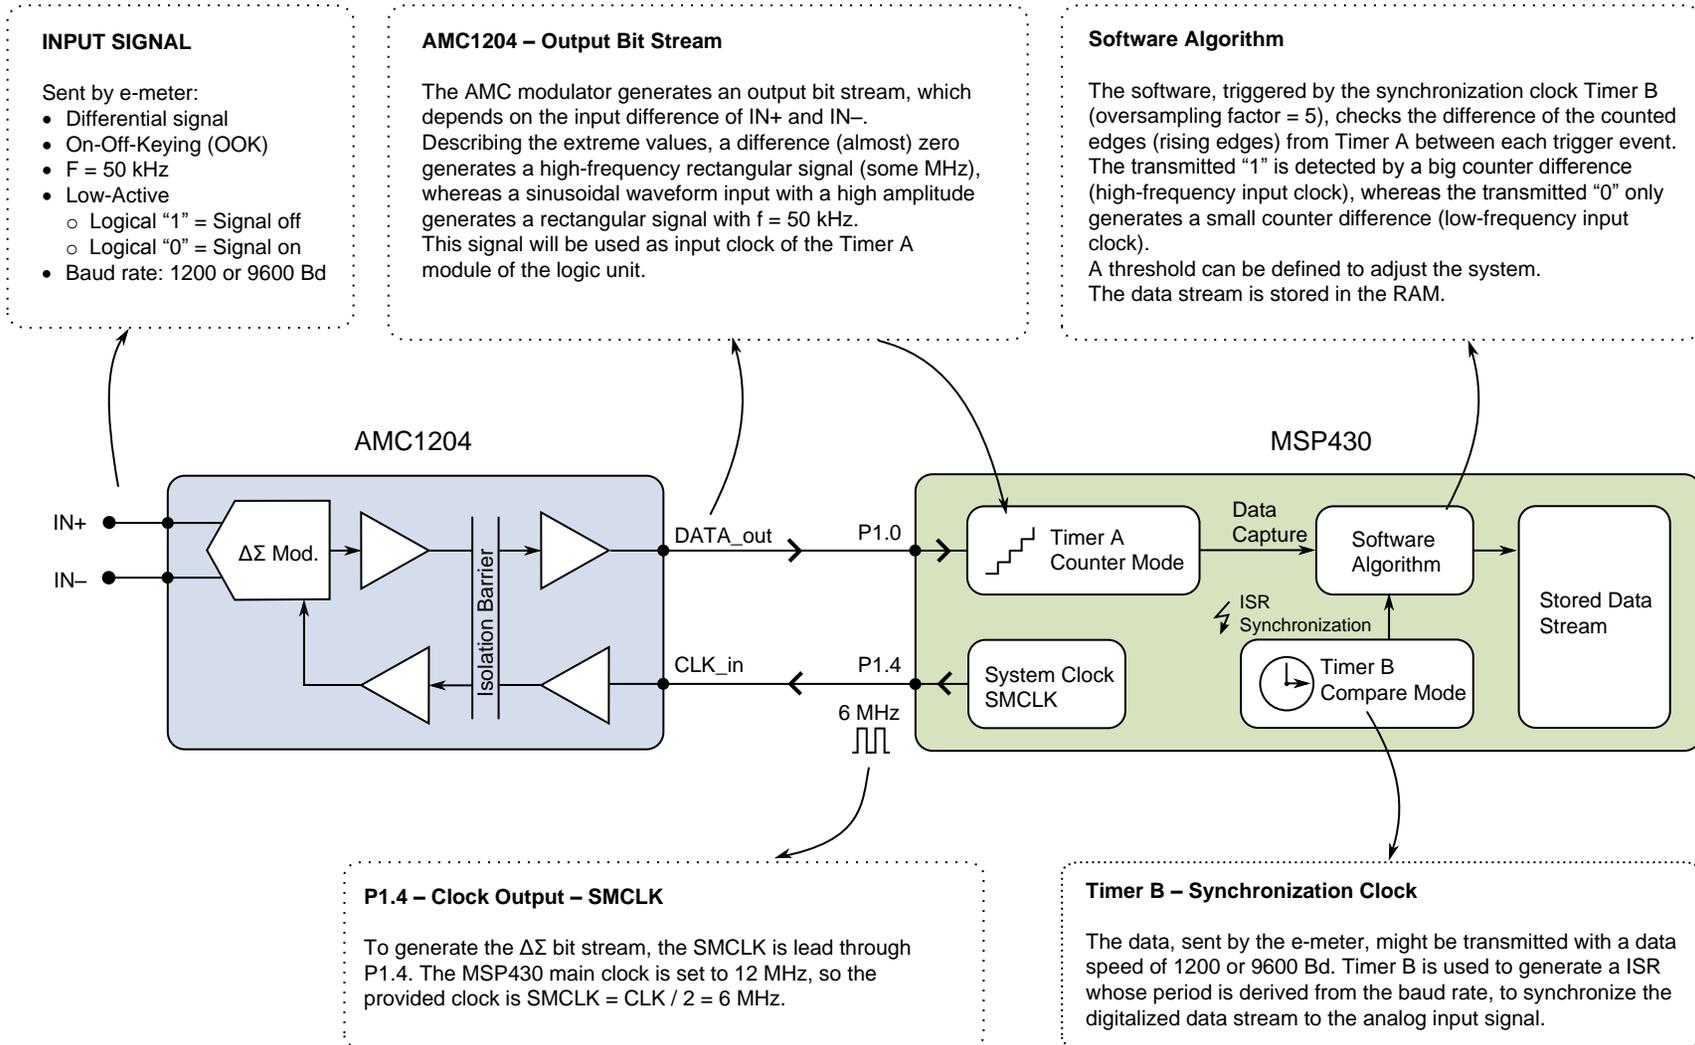


Figure 10. Concept Overview

The TIC Digital Interface was built with official TI evaluation modules: [AMC1204 Evaluation Module](#) and [MSP430 LaunchPad Value Line Development Kit](#). The principle was tested and proved in the laboratory.

Recommended next work packages:

- **Test in a real environment:** As the TIC digital interface was only tested in the laboratory without an actual meter, TI recommends to prove this concept with an electricity meter.
- **Termination:** The principle was tested with a TTL output of the waveform generator. Optional impedance matching has to be designed.
- **Isolation:** Referring to the [data sheet](#), the AMC1204 device allows isolation:
 - Isolation Voltage: 4250 V_{PEAK} (AMC1204B device)
 - Working Voltage: 1200 V_{PEAK}

NOTE: The isolation level must be confirmed with official regulations and specifications.

5 Test Setting and Results

To verify the concept, the system is tested with following setup:

1. **Data stream generator:** A pseudo-random data stream is used as the trigger input for the waveform generator (2) – dark blue line (indicated by "Ch 1" label in [Figure 11](#))
2. **Waveform generator:** With the trigger input, the waveform generator generates the OOK-signal (see [Section 1](#)). The analog signal is used as the input signal for the frontend – turquoise line (indicated by "Ch 2" label in [Figure 11](#))
3. **TI analog front end:** connections → see [Figure 10](#); internal delta-sigma stream – pink line (indicated by "Ch 3" label in [Figure 11](#)) between AMC EVM and MSP430 Launchpad
4. **Oscilloscope:** The oscilloscope measures the following signals:
 - Ch.1: Generated bit stream – dark blue line
 - Ch.2: OOK- Signal waveform generator – turquoise line
 - Ch.3: Delta-sigma stream – pink line
 - Ch.4: Output data – green testpoint

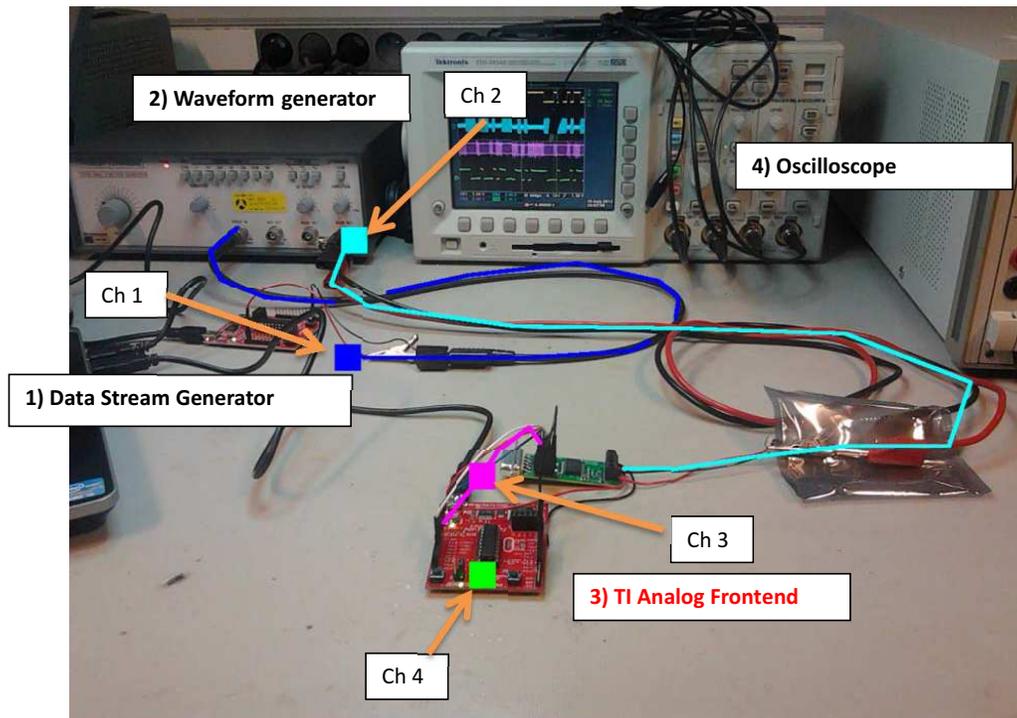


Figure 11. Test Setup

Figure 12 shows the test results:

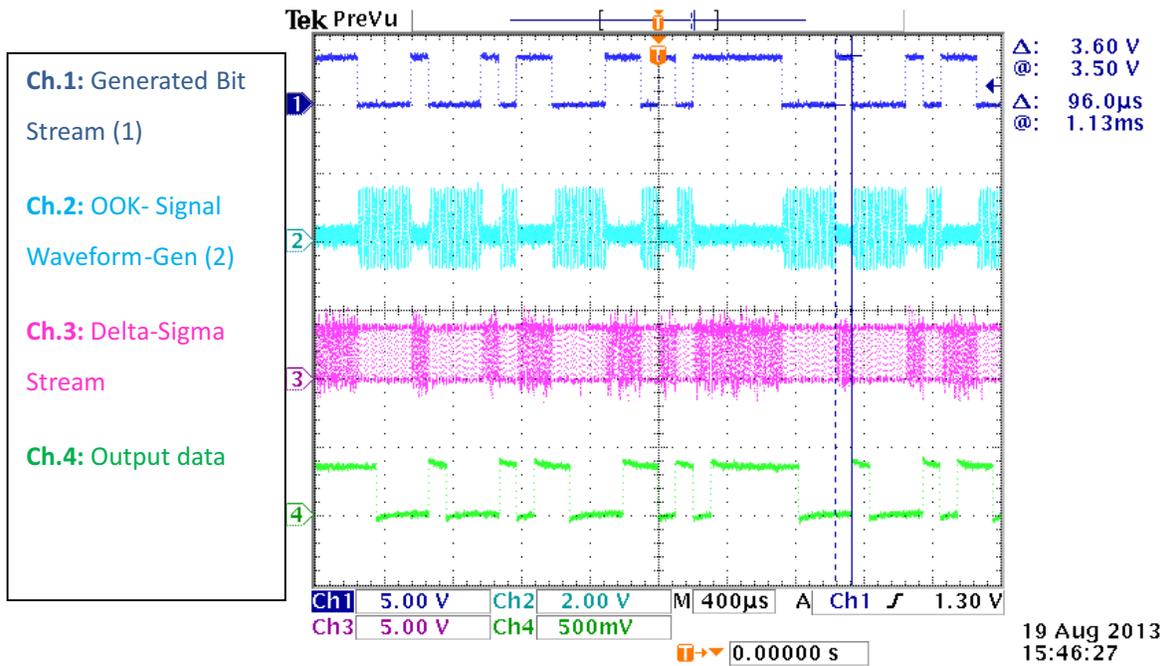


Figure 12. Test Results

The oscilloscope shows that the input data are correctly digitalized from the analog OOK signal. Due to data processing, a latency of $\approx 100 \mu\text{s}$ is measured.

Appendix A References With Links

- Texas Instruments, AMC1204 [data sheet](#)
- Texas Instruments, AMC1204 [Evaluation Module](#)
- Texas Instruments, MSP430 LaunchPad Value Line [development kit](#)
- Texas Instruments, [MSP430G2553](#)
- Texas Instruments, [Code Composer Studio 5.4](#)
- EDF, "[Sorties de télé-information client des appareils de comptage électroniques utilisés par ERDF](#)"

Revision History

Changes from Original (November 2013) to A Revision

Page

-
- Updated interface graphic 1
-

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com