

Programmable Clock Source Using MSP430™ MCUs



Introduction

The programmable clock source function uses the [MSP430FR2000](#) microcontroller (MCU) to offer a simple way to generate multiple fixed frequencies with or without an external crystal oscillator. This design can achieve output frequencies of 1 MHz, 2 MHz, 4 MHz, 8 MHz, or 16 MHz using the internal digitally controlled oscillator (DCO) stabilized with an internal frequency locked loop (FLL). A fixed 32.768-kHz frequency is also output for use with real-time applications. The MSP430™ MCU can receive commands over a SPI or a 4800-baud UART interface, and the ferroelectric random access memory (FRAM) allows the device to recover to the last programmed frequency after reset. This type of functionality is useful for systems that need to generate multiple frequencies using a minimum number of components. To get started, [download project files and a code example](#) demonstrating this functionality.

Implementation

The clock system in the MSP430FR2000 device features an FLL that can be used to stabilize the internal DCO and achieve clock frequencies up to 16 MHz. The FLL requires a reference clock that can be sourced from either an internal 32.768-kHz reference oscillator (REFO) or an external crystal of the same frequency. However, TI recommends using a high-accuracy external 32.768-kHz crystal for best performance. [Figure 1](#) shows the inputs and outputs of the programmable clock source.

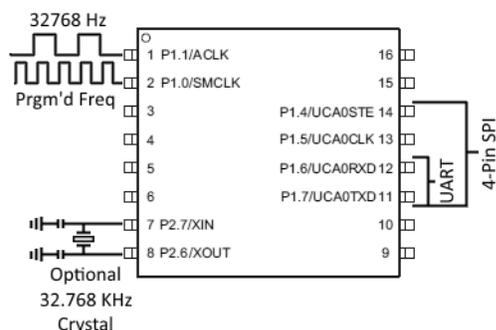


Figure 1. Programmable Clock Source Inputs/Outputs

After a device reset, the MSP430 MCU sources the subsystem master clock (SMCLK) from the DCO configured to run at 16 MHz. The device then executes a frequency command stored in FRAM that divides SMCLK to the last known frequency before device reset. This frequency is then output on P1.0, and the FLL reference is output on P1.1.

When the MSP430 MCU is first programmed, the default output frequency is 1 MHz. This default frequency can be altered by changing the initialization value of the *command* variable found in the accompanying software example. Then, as previously described, the MSP430 device will output the last known frequency upon device start-up.

The programmable clock source can receive commands from a host processor through a 4800-baud UART or a 4-wire SPI. The UART interface uses P1.6 and P1.7 as receive and transmit respectively. The SPI uses P1.4 to P1.7, and [Table 1](#) lists the phase and polarity settings required for proper communication.

Table 1. 4-Wire SPI Settings

Slave or Master	CLK Phase	CLK Polarity	CS Polarity
Slave	Data changed on first clock edge and captured on second	Inactive state is low	Active low

Either interface allows a host processor to set the desired output frequency using any of the commands listed in [Table 2](#). Each command is only one byte in length to maintain simplicity and reduce code size.

Table 2. Programmable Clock Source Command Set

Command Description	Hex Value
COMMAND_SET_1MHZ	0x00
COMMAND_SET_2MHZ	0x02
COMMAND_SET_4MHZ	0x04
COMMAND_SET_8MHZ	0x06
COMMAND_SET_16MHZ	0x08
COMMAND_GET_STATUS	0x0A

When using the UART interface, the MSP430 MCU will respond with a single byte when a command has completed execution. When using a SPI interface, the host processor must use `COMMAND_GET_STATUS` to query the execution status of the last command. [Table 3](#) lists the three responses that can be issued from the programmable clock source.

Table 3. Programmable Clock Source Responses

Response Description	Hex Value
Command executed successfully	0x00
Incorrect command	0x01
Command is still being processed	0x02

Performance

The programmable clock source can achieve 1-MHz, 2-MHz, 4-MHz, 8-MHz, or 16-MHz frequency output at $\pm 2\%$ accuracy using the internal REFO or $\pm 0.5\%$ accuracy using an external crystal. More detailed performance specifications can be found in the clock specifications section of the [MSP430FR2000 MCU data sheet](#). Overall, the accuracy and power consumption is improved when using an external crystal oscillator.

Several design decisions were made to ensure the code could fit into the limited 512-byte memory space of the MSP430FR2000 device. Of these decisions, the 4800 baud rate has the most affect.

In this application, the UART module receives its source clock from either REFO or the 32.678-kHz external crystal. This was done so the baud rate registers did not need to be altered when the user changed the device's frequency. Consequently, this greatly reduced the amount of code required to

implement UART communication. Finally, a baud rate of 4800 was chosen because of the relatively low error when compared to a 9600-baud rate source from a 32.678-kHz clock. There are no such limitations when using SPI communication.

To ensure the clock source is always active, the deepest low-power mode (LPM) the MSP430 MCU can enter is LPM0. Therefore the programmable clock source typically consumes 402 μA of current at 3 V, regardless of the selected output frequency.

Finally, the code has two infinite loops that have the potential to keep the device from outputting the correct frequency at startup. The first is a loop checking for the external crystal stability. The second is a loop checking for the FLL locking to a frequency of 16 MHz. When the device is stuck in either loop, the response to sending a `COMMAND_GET_STATUS` is always 0x02, as described in [Table 3](#). If this problem occurs, reset the MSP430 MCU.

Device Recommendations

The device used in this example is part of the MSP430 Value Line Sensing portfolio of low-cost MCUs, designed for sensing and measurement applications. This example can be used with the devices shown in [Table 4](#) with minimal code changes. For more information on the entire Value Line Sensing MCU portfolio, visit www.ti.com/MSP430ValueLine.

Table 4. Device Recommendations

Part Number	Key Features
MSP430FR2000	0.5KB FRAM, 0.5KB RAM, eComp
MSP430FR2100	1KB FRAM, 0.5KB RAM, 10-bit ADC, eComp
MSP430FR2110	2KB FRAM, 1KB of RAM, 10-bit ADC, eComp
MSP430FR2111	3.75KB FRAM, 1KB RAM, 10-bit ADC, eComp

IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2017, Texas Instruments Incorporated