

Application Brief

5-V Interface



Description

This example demonstrates how to interface with signals up to 5 V using open-drain IOs (ODIOs) on an MSPM0 device. With the use of external pullup resistors, the open-drain IOs allow for communication across multiple voltage domains at voltage levels higher than the MSPM0 V_{DD} supply voltage.

Figure 1 displays a functional block diagram of the peripherals used in this example.

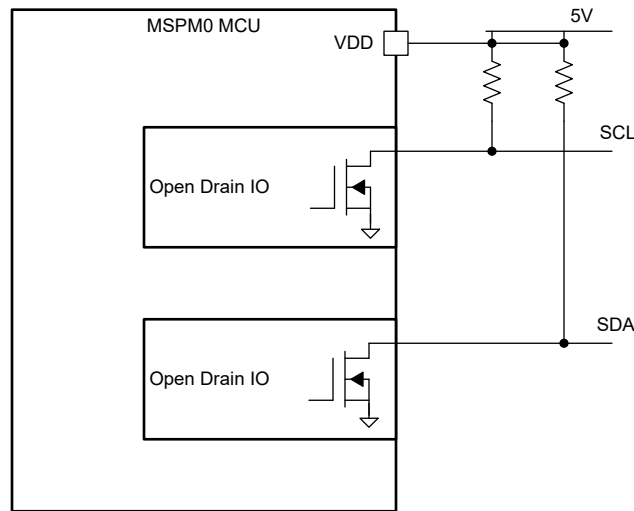


Figure 1. Subsystem Functional Block Diagram

Required Peripherals

This application can use up to two open-drain IOs.

Table 1.

Sub-block Functionality	Peripheral Use	Notes
IO	2 GPIO pins	PA0 and PA1, can only use 5-V tolerant open-drain IOs

Compatible devices

Based on the requirements in Table 1, this example is compatible with the devices in Table 2. The corresponding EVM can be used for prototyping.

Table 2.

Compatible Devices	EVM
MSPM0Lxxx	LP-MSPM0L1306
MSPM0Gxxx	LP-MSPM0G3507

Design steps

1. Connect appropriate jumpers.
2. Determine the pullup resistance needed for your application.
 - a. The required pullup strength depends on the timing requirements of your application and the capacitance of your connections. For greater capacitance, you need to have a stronger (that is, low resistance) pullup. A discussion on determining the exact resistance of a pullup is beyond the scope of this document but can be found in the [I2C Bus Pullup Resistor Calculation application note](#).
3. Configure peripherals that are used on these pins in software (for example, UART, I2C, or Timer) in [SysConfig](#).
4. Write application code, dependent on peripherals used.

Design considerations

1. Pullup resistor: A pullup resistor is required to output high for I2C and UART functions on ODIOs.
2. Drive strength control: This is not available for ODIO types.

Additional Resources

- [Download the MSPM0 SDK](#)
- [Learn more about SysConfig](#)
- [MSPM0L LaunchPad](#)
- [MSPM0G LaunchPad](#)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2023, Texas Instruments Incorporated