

TPS57112-Q1 High Frequency (2.35 MHz) Operation

Krishnamurthy Hegde, Sateesh Pillai, Pauline Wang

MSA-ASP

ABSTRACT

This document describes the TPS57112-Q1 High Frequency (2.35 MHz) operation and (2.5 MHz) simulation test results. This application report is applicable to TPS57114-Q1 and TPS54388-Q1 devices also as these two devices belong to the same family as TPS57112-Q1 device.

1 Introduction

The TPS57112-Q1 device is a full-featured 6-V_{in}, 2-A, synchronous step-down current-mode DC-DC converter with two integrated metal–oxide–semiconductor field-effect transistors (MOSFETs). The TPS57112-Q1 device can operate in a wide range of switching frequencies from 200-KHz to 2-MHz. The switching frequency can be set using a pulldown resistor or an externally applied signal at the RT pin as shown in [Figure 1](#). Refer to *Interfacing TPS57xxx-Q1, TPS65320-Q1 Family, and TPS65321-Q1 Devices With Low Impedance External Clock Drivers*, [SLVA755](#), for more information regarding interfacing an external clock to TPS57112-Q1 family of devices.

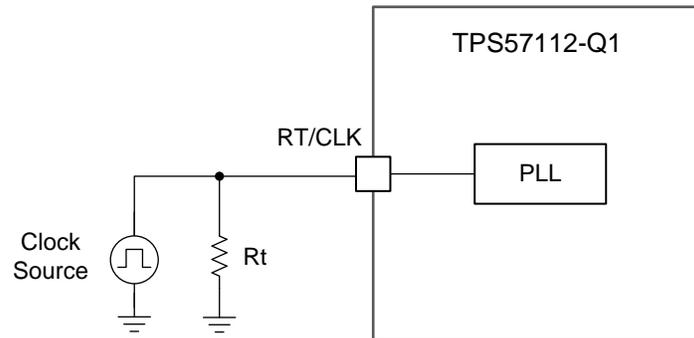


Figure 1. Synchronizing to a High-Impedance External Clock Source

The regulated output voltage at no load is given by [Equation 1](#):

$$V_{out} = V_{in} \times t_{ON} \times f_{SW}$$

where

- V_{in} = input voltage
- V_{out} = output voltage
- t_{ON} = ON time

and

- f_{SW} = switching frequency (1)

For given input and output voltages, as switching frequency is increased, t_{ON} will reduce. If t_{ON} falls below the minimum value allowed by the internal circuit design, the output voltage may not track the internal 0.8 V reference and would therefore not be regulated. To maintain the regulation at higher switching frequencies, t_{ON} must be kept above a minimum value. If the switching frequency is less than or equal to the data sheet maximum value of 2 MHz, t_{ON} will always be above designed minimum value and the output would be regulated.

All trademarks are the property of their respective owners.

2 2.35-MHz Operation

Bench test and chip level simulations were done to check whether TPS57112-Q1 can remain in regulation while switching at a frequency higher than 2.0 MHz.

The test conditions for the bench test and chip level simulation were as follows:

- Supply Input Voltage: 5.33 V
- Regulated Output Voltage: 1.35 V
- Operating Switching Frequency in bench setup: 2.35 MHz
- RT resistor value used in bench measurement: 72 kΩ

Under these test conditions, the on time at no load for TPS57112-Q1 to maintain regulation was verified by bench measurements to be as in [Equation 2](#):

$$(1.35 \text{ V} / 5.33 \text{ V}) \times (1 / 2.35 \text{ MHz}) = 107.8 \text{ ns} \quad (2)$$

3 2.5-MHz Operation Simulation Results

A full chip breaking-point simulation is performed at 2.5-MHz clock frequency with the input and output voltages specified above to determine the minimum controllable t_{ON} allowed by internal circuit design. The 2.5-MHz clock frequency is chosen to have some margin for oscillator tolerances and to be sure that it works for 2.35-MHz clock frequency.

Simulation results:

- Transient turn on behavior appears normal
- Output tracks the bandgap when t_{ON} is above 99 ns

[Table 1](#) lists the simulation results across process corners and across temperature with 10 mA load current.

Table 1. Breaking Point Simulation Data with 10 mA Load @ 2.5MHz

Process Corner / Temperature	Actual V_{out} (V)	t_{ON} (ns)	Calculated V_{out} (V)
Nominal / 27°C	1.328	99.8	1.327
Weak / 150°C	1.323	100.1	1.322
STRONG / 150°C	1.303	98.6	1.297
STRONG / -40°C	1.331	98.9	1.329

[Table 2](#) lists the simulation results at STRONG / 150°C with no load current.

Table 2. Breaking Point Simulation Data with No Load @ 2.5MHz (Worst Case)

Process Corner / Temperature	Actual V_{out} (V)	t_{ON} (ns)	Calculated V_{out} (V)
STRONG / 150°C	1.343	100.9	1.341

Based on the simulation results, the minimum controllable on-time is found to be 105 ns at no load (with around 5% tolerance).

4 Conclusion

The switching ON time for an input voltage of 5.33 V and a regulated output voltage of 1.35 V and a switching frequency of 2.35 MHz is calculated to be 107.8 ns during no load conditions. This is higher than the minimum controllable ON time of 105 ns allowed by internal circuit design based on simulations. The TPS57112-Q1 is expected to be capable of maintaining regulation without entering pulse-skipping mode up to 2.35-MHz switching frequency under this operating condition. This result has been verified by bench measurements to be accurate under extreme temperature corners on typical devices.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com