

Enable Functionality and Adjusting Undervoltage Lockout for TPS57112-Q1

MSA-ASP

ABSTRACT

This document describes the TPS57112-Q1 device Enable pin functionality and provides possible risks associated with driving the Enable (EN) pin voltage higher than VIN pin voltage. This application note is also applicable for TPS57114-Q1 and TPS54388-Q1 devices as they belong to the same family as TPS57112-Q1.

1 Introduction

The TPS57112-Q1 device is a full-featured 6-Vin, 2-A, synchronous step-down current-mode converter with two integrated metal–oxide–semiconductor field-effect transistors (MOSFETs). When the EN pin is left floating, the device turns off when the input voltage falls below 2.6 V. If an application requires a higher undervoltage lockout (UVLO), use the EN pin as shown in [Figure 1](#) to adjust the input voltage UVLO by using two external resistors. The *TPS57112-Q1* datasheet, [SLVSAL8](#) (*Enable Functionality and Adjusting Undervoltage Lockout* section) provides the detailed design procedure to calculate the values of R1 and R2.

When the enable undervoltage lockout is set using this method, it ensures that the EN pin voltage is less than the VIN voltage. This is the recommended method of driving the EN pin, if higher than 2.6 V undervoltage lockout is desired.

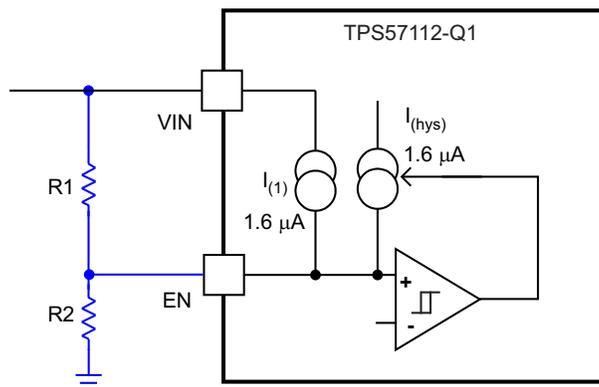


Figure 1. Adjustable Undervoltage Lockout Using External Voltage Divider to VIN Pin

Some applications, like driving EN pin using CAN inhibit signal or driving EN pin through some external logic, may require using digital control for the EN pin. In such cases, there is a possibility that the EN pin voltage is higher than the VIN voltage. This application note explains the risk of driving the EN pin voltage higher than the VIN voltage and provides recommendations to address this issue.

2 Interaction Between EN Pin and VIN Pin

Internally, the EN pin is connected via a 10-kΩ resistor and a p-channel metal-oxide-semiconductor (PMOS) to the VIN supply, as shown in Figure 2. When the EN pin voltage is greater than a diode drop above VIN (0.5 V, typical), the body diode of the PMOS becomes forward biased causing the EN pin to provide the supply for the TPS57112-Q1 device. Due to this incorrect drive, when the EN pin voltage is larger than VIN by around 1.3 V, typical, the device will shut down. When the $V_{EN} - V_{VIN}$ voltage is between 1.1 V and 1.3 V, the device may enter into hiccup mode due to the UVLO comparator hysteresis as shown in Figure 3.

Therefore, it is always advisable to have the EN voltage to be below the VIN voltage under all conditions to avoid incorrect biasing of the device.


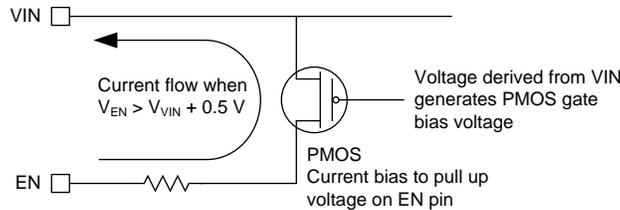


Figure 2. Internal Drive Structure of EN and VIN Pins

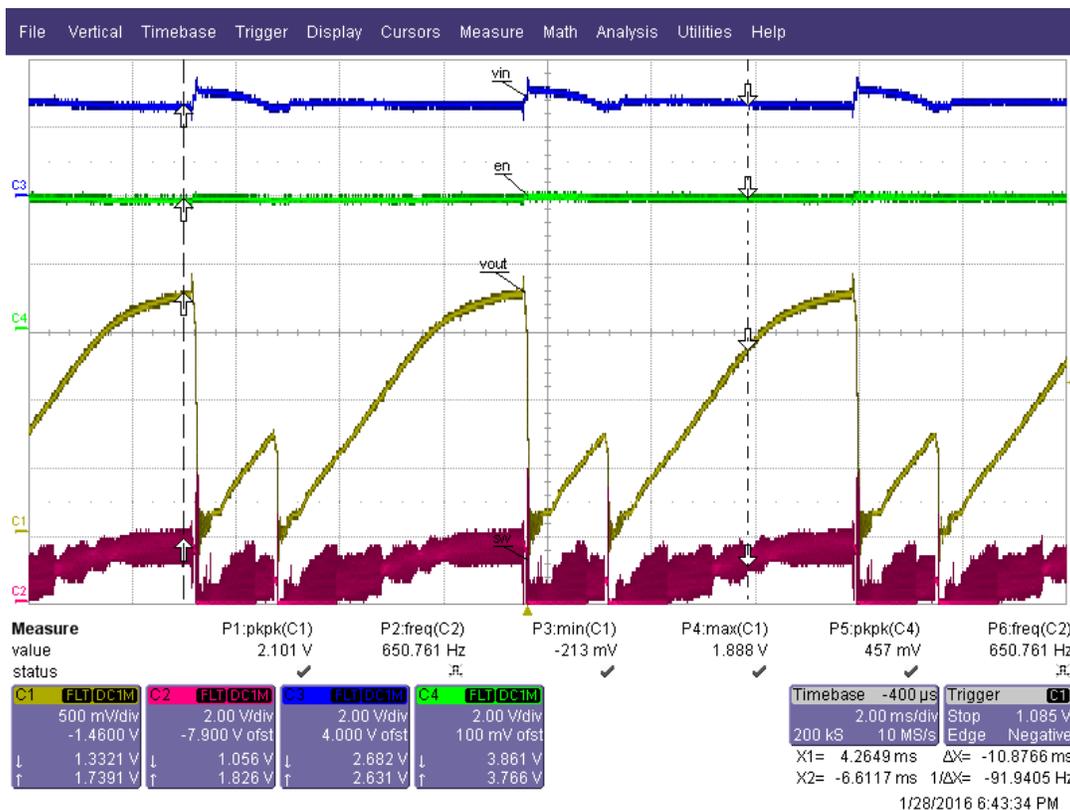

- C1 (Yellow trace): Output voltage
- C2 (Red trace): SW pin voltage
- C3 (Blue trace): Input voltage
- C4 (Green trace): EN pin voltage

Figure 3. Vout Oscillation Observed on TPS57112-Q1 EVM With $V_{VIN} = 3\text{ V}$, $V_{EN} = 4.1\text{ V}$, $V_{out} = 1.8\text{ V}$

3 Impact of Product Change Notification #PCN20140408000A on This Behavior

For device material which incorporates the product change notification PCN20140408000A, circuitry is added to clamp the EN voltage to around 2.8 V internally as shown in Figure 4. With this change, it was observed that the device does not shut down when $V_{EN} > V_{VIN}$ by 1.3 V. Also, it does not show any unstable behavior.

This was tested using the TPS57112-Q1 EVM with $V_{VIN} = 3\text{ V}$, $V_{EN} = 4.1\text{ V}$ to 4.5 V , $V_{out} = 1.8\text{ V}$. Even with material that includes this PCN, it is not recommended to drive the EN pin with a voltage higher than the VIN pin.

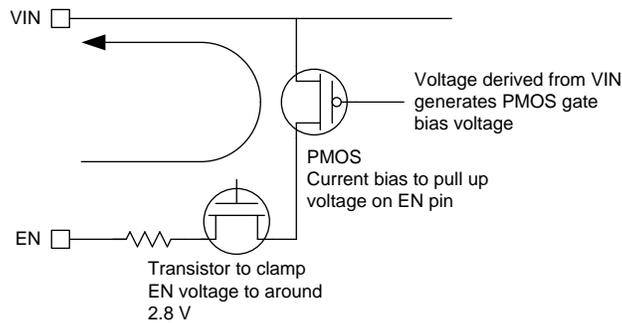


Figure 4. Internal Drive Structure of EN and VIN Pins With PCN20140408000A

4 Conclusion

When it is necessary to use the undervoltage lockout voltage higher than the default UVLO voltage, TI recommends the use of a resistor divider to VIN as shown in Figure 1. If this method cannot be used, customers should make sure that EN pin voltage is less than the VIN voltage.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com