

Using LMZ31710 for Higher Output Voltages

SVA - Simple Switcher

ABSTRACT

The LMZ31710 power module has been designed and characterized for operation at output voltages from 0.6 V to 5.5 V. However, several applications require higher voltages than the standard point-of-load voltages that the LMZ31710 is designed for. Following the guidance in this application note, the LMZ31710 can be used for output voltages up to 9.5 V. All data included in this application note has been taken at $V_{IN} = PV_{IN} = 12$ V.

Typical Application

Figure 1 shows a typical schematic for operating LMZ31710 at higher output voltages. The schematic is similar to the standard applications shown in the datasheet; with the exception of the feedback resistor divider requires two external resistors (R_{UPPER} & R_{SET}) and SENSE+ is now left open. Refer to Table 1 for resistor values and switching frequency ranges for several output voltages. Table 2 shows several switching frequencies and the corresponding R_{RT} resistor.

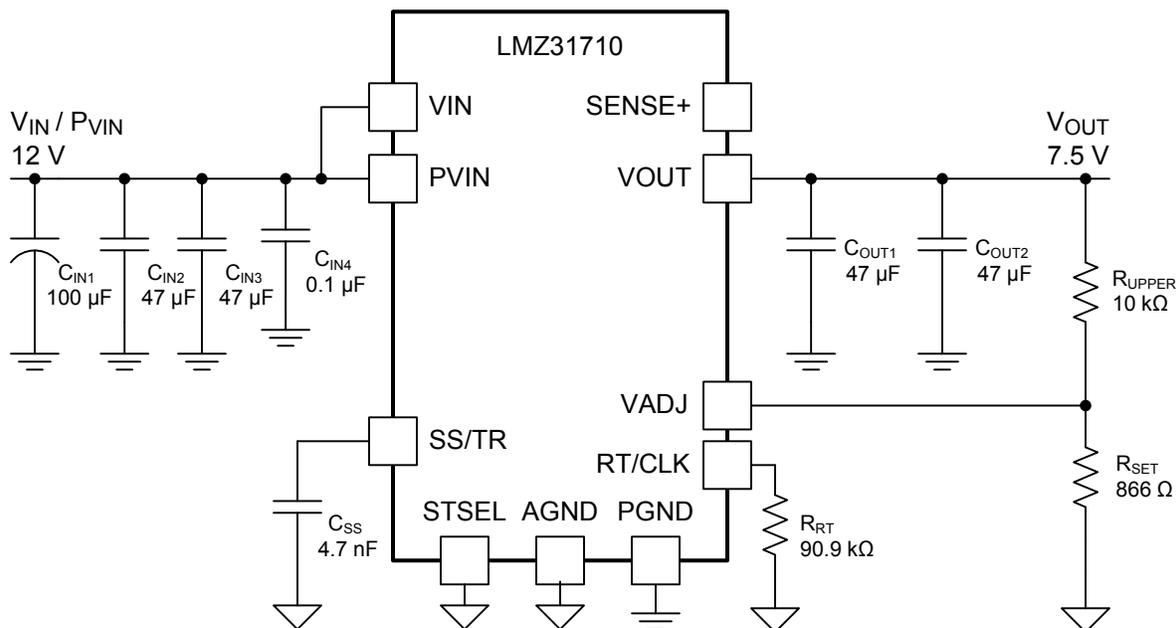


Figure 1. Typical High V_{OUT} Schematic

Operating Input Voltage

All data and recommended operating conditions in this application note apply to a 12-V input voltage. Both the V_{IN} and PV_{IN} were connected together for all tests. Operation at higher input voltage is possible; however it will affect power dissipation, efficiency, ripple voltage and thermal performance. Additional testing may be required to ensure a safe design.

Setting the Output Voltage

To set the output voltage for a high V_{OUT} application, two external feedback resistors (R_{UPPER} & R_{SET}) are required and the SENSE+ pin should be left open. Table 1 lists several output voltages, the required R_{UPPER} & R_{SET} resistors, and the allowable switching frequency range for that voltage. For output voltages not listed in the table, the R_{SET} value can be calculated using Equation 1, while R_{UPPER} remains 10 k Ω .

The output voltage range tested for this application note is 5.5 V to 9.5 V; from an input voltage of 12 V. Operation at output voltages greater than 9.5 V must be tested. In any case, the maximum output voltage should not exceed 80% of the input voltage and the power dissipation must be less than 4.5 W.

Table 1. Voltage Setting Resistors and Frequency Range

V_{OUT}	R_{UPPER}	R_{SET}	Switching Frequency Range
6.0 V	10 k Ω	1.1 k Ω	600 kHz - 1.2 MHz
6.5 V	10 k Ω	1.02 k Ω	600 kHz - 1.2 MHz
7.0 V	10 k Ω	931 Ω	600 kHz - 1.2 MHz
7.5 V	10 k Ω	866 Ω	600 kHz - 1.2 MHz
8.0 V	10 k Ω	806 Ω	600 kHz - 1.2 MHz
8.5 V	10 k Ω	759 Ω	600 kHz - 1.1 MHz
9.0 V	10 k Ω	715 Ω	600 kHz - 1.0 MHz
9.5 V	10 k Ω	673 Ω	600 kHz - 750 kHz

$$R_{SET} = \frac{10}{\left(\left(\frac{V_{OUT}}{0.6}\right) - 1\right)} \text{ (k}\Omega\text{)} \quad (1)$$

Switching Frequency

When operating the LMZ31710 at increased output voltages, the minimum allowable switching frequency is 600 kHz. The switching frequency can either be set using a frequency setting resistor (R_{RT}), or by applying an external clock. The switching frequency range for several output voltages is listed in Table 1. Operating near the lower end of the frequency range will improve efficiency, while increasing the frequency will reduce output voltage ripple. The switching frequency range applies to $V_{IN} = PV_{IN} = 12$ V.

Table 2. Switching Frequency Setting Resistor

Switching Frequency	600 kHz	750 kHz	900 kHz	1.0 MHz	1.2 MHz
R_{RT}	124 k Ω	90.9 k Ω	69.8 k Ω	63.4 k Ω	48.7 k Ω

Input and Output Capacitance

When operating the LMZ31710 at higher output voltages, the amount of required input and output capacitance is different from what is required in the datasheet.

The higher output voltage also means the input current will increase. To ensure a solid input voltage, additional input capacitors may be required. The minimum input capacitance is two 47 μ F ceramic capacitors, plus an additional 100 μ F, non-ceramic bulk capacitor is recommended.

To ensure stability over the higher output voltage range, the allowable output capacitance range is 94 μ F to 300 μ F. The minimum required capacitance must include at least two 47 μ F, 16 V ceramic capacitors. Additional output capacitance can be either ceramic, low-ESR polymer type, or a combination of the two.

Power Dissipation

A key concern when adjusting the output voltage higher than the range of the LMZ31710 is power dissipation. Keeping the power dissipation of the device within the range of the device’s datasheet will ensure safe thermal performance. The maximum power dissipation shown in the datasheet is 4.5 W. When increasing the output voltage, the power dissipation must be ≤ 4.5 W to ensure a thermally efficient design. [Figure 2](#) shows the power dissipation for several output voltages at multiple switching frequencies. Power dissipation can also be calculated based on efficiency. [Figure 3](#) shows the efficiency for the same output voltages and switching frequencies.

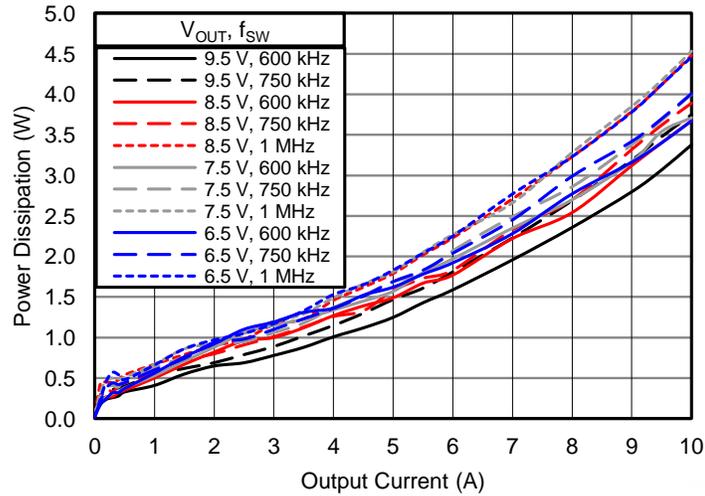


Figure 2. Power Dissipation

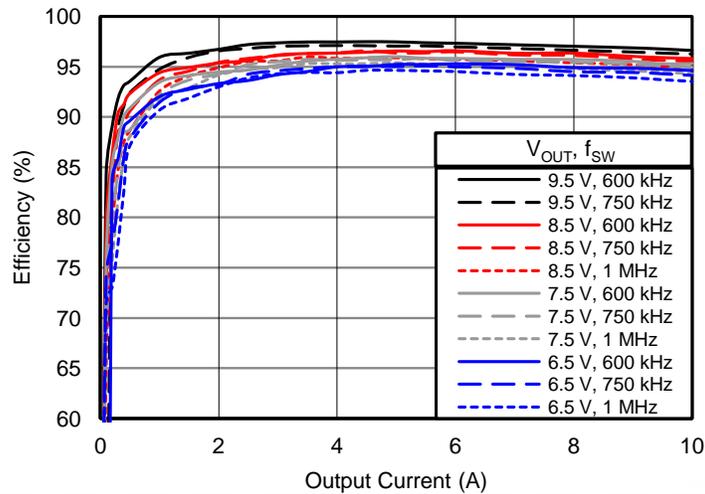


Figure 3. Efficiency

Thermal Performance

The thermal performance of the device is shown in the Safe Operating Area graph, [Figure 2](#). The Safe Operating Area graph shows the operating conditions at which the LMZ31710 internal components are at or below their thermal limits. This graph applies to 12 V input voltage, increasing the input voltage will result in even more de-rating. The graphs are taken at natural convection, or 0 LFM. Increasing the airflow will improve the thermal de-rating.

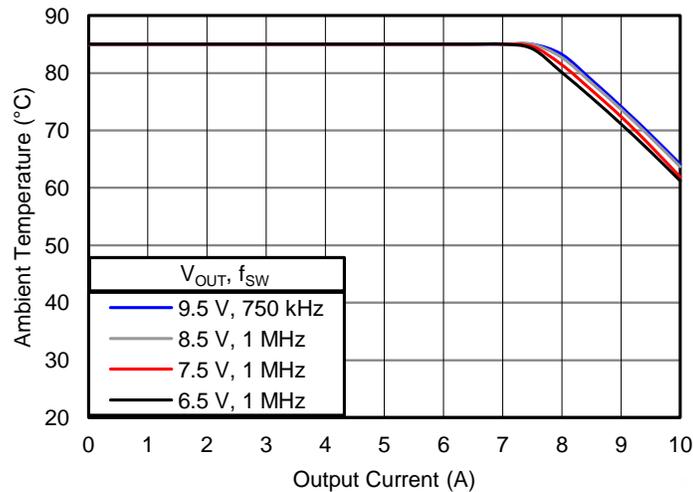


Figure 4. Safe Operating Area

Conclusion

Operating the LMZ31710 at output voltages beyond what is characterized in the datasheet is possible by following the guidance of this application note. Restrictions and operating conditions outline in this document must be followed to ensure a safe design. Final application testing must be performed on any design to ensure proper operation and behavior. Refer to the [LMZ31710](#) datasheet for electrical characteristics and other device specifications. The high voltage operation described in the document also applies to [LMZ31707](#) (7-A device) and [LMZ31704](#) (4-A device).

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com