

# TI-RSLK **MAX**

Texas Instruments Robotics System Learning Kit



# Module 5

Quiz: Building the robot



# Quiz: Building the robot

Battery	Voltage (V)	Storage (mAh)	Type
Alkaline	5*1.5=7.5	2000	Primary
Lithium	5*1.5=7.5	3000	Primary
NiCad	6*1.2=7.2	1200	Secondary
NiMH	6*1.2=7.2	1800	Secondary
Li-ion	2*3.6=7.2	1900	Secondary

Table 1. Storage capacities of AA-sizes batteries used to power a robot at about 7V.

## Q1 Batteries

Assume your robot requires 1/2 amp to operate. How long will each battery type listed in Table 1 last?

## Q2 Energy

Calculate the total energy in Joules, stored in the batteries listed in Table 1. Each robot will have multiple batteries so the voltage is above 7 V.

Part a) What is the total energy in five Alkaline batteries?

Part b) What is the total energy in five Lithium batteries?

Part c) What is the total energy in six NiCad batteries?

Part d) What is the total energy in six NiMH batteries?

Part e) What is the total energy in two Li-ion batteries?

## Q3 Batteries

In what way is the Li-ion battery superior to the other batteries listed in Table 1? I.e., assuming cost is not a factor, why is Li-ion the best choice for use in a robot?

## Q4 Definitions

Part a) What is the definition of **efficiency** for a regulator?

Part b) What is the definition of **power budget**?

Part c) What is the definition of **dropout voltage**?


Part d) What is the definition of a **secondary battery**?

## Q5 Power Budget

A battery can hold 2.2 A-hr. The embedded system runs at 100 mA. How long will the battery last?

## Q6 Power Budget

A battery can hold 500 mA-hr. The embedded system runs with 1 mA in active mode and 1 μA in sleep mode. If the system runs needs to run for 1 year on a single battery, what percentage of the time should the system be in sleep mode?

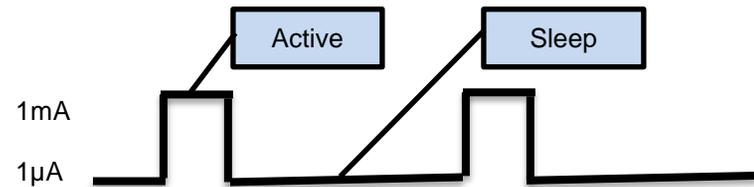

## Q7 Power

The  $V_{cc}$  pin on the MSP432 is used to power the microcontroller. Assume a simple resistive model for the integrated circuits in the MSP432. I.e., assume the resistance from  $V_{cc}$  to ground is fixed at 50 Ω. For example, at 3.3 V, it operates at 66 mA. What would be the power savings if you could run at 1.2V?

**[ti.com/rslk](https://ti.com/rslk)**

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2019, Texas Instruments Incorporated