

SB-102


SB-102 ISDN Terminals and Terminal Adapters



Literature Number: SNOA163

ISDN Terminals and Terminal Adapters

National Semiconductor
System Brief 102
May 1990

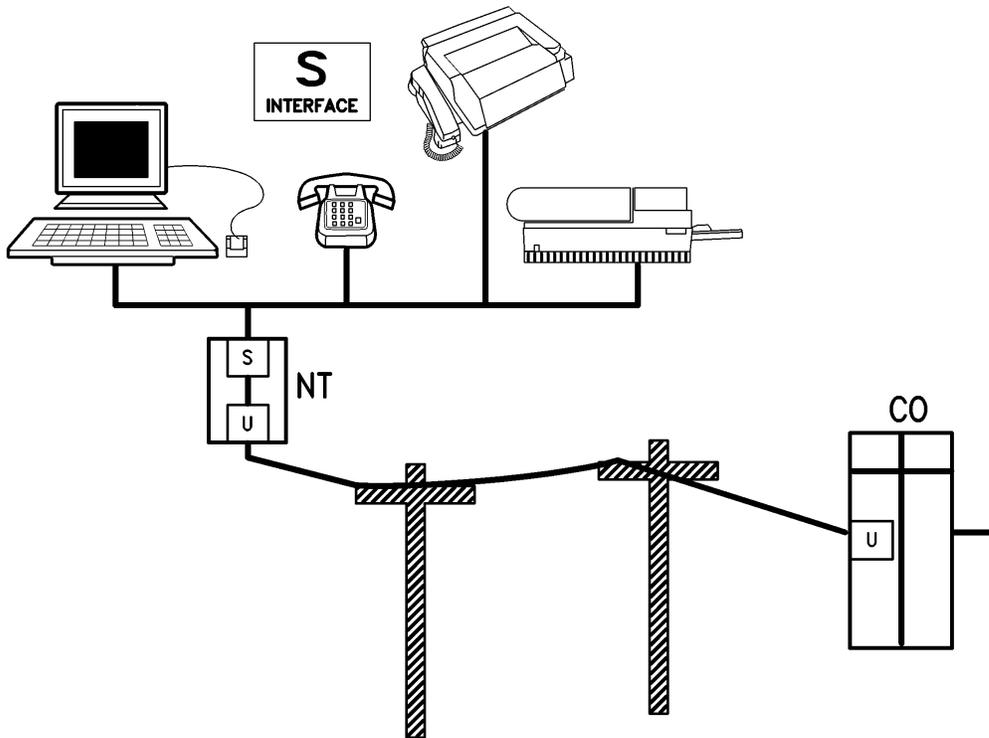

TL/F/10852-1

SYSTEM DESCRIPTION

The implementation of ISDN will not only bring benefits, such as improved efficiency and bandwidth, to the operating companies, but also bring the end user new services and features that previously have not been possible.

End users of ISDN have to either adapt the non-ISDN equipment they already own to interwork with the ISDN network, or purchase new, ISDN compatible equipment. A variety of office equipment, referred to as Terminal Equipment, may be equipped for ISDN, including phones, computers, and fax machines. Terminal Adapters (TA) perform the rate adaptation protocols necessary to interface non-ISDN equipment to the network, and are available as either stand-alone boxes or as PC plug in cards. All ISDN terminal equipment uses the CCITT standard S Interface four wire transceiver. This allows for either point to point or multipoint connectivity.

A basic rate ISDN connection is comprised of three separate channels, two capable of transmitting either voice or data at 64 Kbytes, and a third for signalling and data at 16 Kbytes. Accordingly, equipment will vary in implementation and use of these channels. Low end equipment will not require all three channels be active, while high end equipment may use all three for packetized data. As designs be-

come increasingly complex, advanced silicon solutions will be required to meet the size and power constraints placed upon the equipment.

KEY DESIGN CHALLENGES

High Speed Data Transfer

Sophisticated signal processing is required to achieve the high speed data transfer and still meet the requirements for low bit error rate and electromagnetic interference.

High Integration


Keeping chip count to a minimum increases the reliability of the equipment. The telephone handset and PC plug in card are also space sensitive applications where lower chip count is a necessity while maintaining a high degree of functionality.

Flexibility

ISDN terminal equipment manufacturers will only be able to offer a broad product line with a base chipset that is flexible enough to handle both low end and high end applications. System architecture should allow the designer to apply the same chipset to all products without compromise.

MICROWIRE™ is a trademark of National Semiconductor Corporation.

Block Diagram of ISDN PCTA

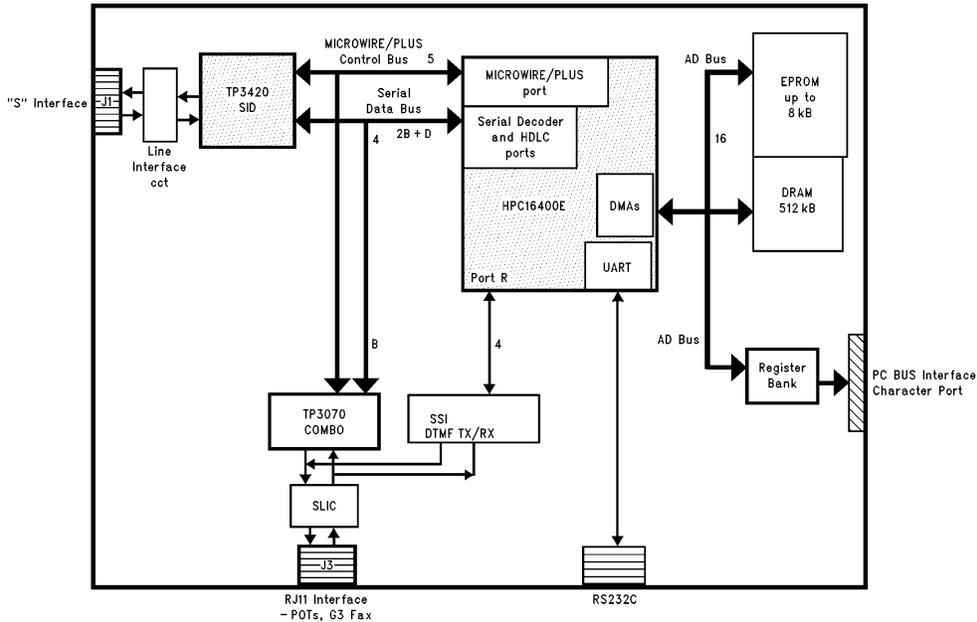

TL/F/10852-2

KEY COMPONENTS

- TP3420/21 International standard ISDN four wire transceiver. Offers a long loop length (1.5 km/5 kft) with low error rate and two phase lock loops on chip to minimize EMI and reduce external components. Supports both the North American and European digital system interface formats.
- TP3076 Second generation combined PCM CODEC and Filter optimized for digital phone applications. The device is A-law and μ -law selectable and employ a conventional serial PCM interface capable of being clocked up to 4.096 MHz. It also features programmable gains in both Tx and Rx directions as well as four programmable latches.
- TP3451 A microprocessor peripheral device designed as both a full-duplex HDLC framing and formatting controller, and a serial GCI (General Circuit Interface) frame controller. It may be used in conjunction with the HPC16400E for high end applications requiring three HDLC channels.

- TP3460 A microprocessor peripheral ISDN USART which implements V.110 and V.120 rate adaptation protocols for serial interface terminals. Data rates up to 19.2 Kbps and 64 Kbps are supported in asynchronous and synchronous modes respectively.
- HPC16400E A highly integrated 16-bit microcontroller with two HDLC controllers and four DMA channels on chip. Includes a high performance UART that can be used for rate adaptation, three independent timers, multi-input wakeup for keypad scanning and a MICROWIRE™ interface for easy interfacing to other devices. +5V CMOS with low power down modes.
- LM3678A An easy to use, highly integrated switching regulator with on chip oscillator, current limit and output transistor. Used in this application to provide an efficient stepdown DC/DC converter to convert the high voltage fed down the line to the +5V needed for the terminal.

Typical Bill of Material

Function	Description	NSC Part	Other Mfg	Qty
CPU	Micro-Controller	HPC16400E		1
Transceiver	SID	TP3420		1
Audio Interface	COMBO	TP3076		1
	DTMF TX/RX		SSI 20c89	1
DC/DC Conv	Switching Regulator	LM3678A		1
Memory	DRAM		TC514258P	4
	EPROM	NSC27C256		1
Memory Control and PC Interface Logic	DRAM Control	ASIC		1

ISDN PC Terminal Adapter Alternatives						
	Low End Modem Replace TA	Middle PCTA (Data)	Middle PCTA (Voice + D)	High End PCTA (Voice + D)	ISDN Phone with Low sp Data	ISDN Phone with High sp Data
	D – data	D + B2 data	D + B2 data B1 – analog	D + B1 + B2 data, opt for B1 analog	ISDN Phone with D data	ISDN Phone with B data
“S” interface: TP3420 + prot	Y	Y	Y	Y	Y	Y
HPC16400E	Y (single ch)	Y	Y	Y	Y (single ch)	Y
TP3451	N (Y for GCI)	N (Y for GCI)	N (Y for GCI)	Y for B1 Data (Y for GCI)	N (Y for GCI)	N (Y for GCI)
TP3076	N	N	Y	Y	Y	Y
SLIC opt DTMF TX/RX	N	N	Y	Y	N	N
Handset opt DTMF TX Sidetone cct	N	N	Y (opt)	Y (opt)	Y	Y
Software: EXEC Layer 1, Q.921 (LAPD)	Y	Y	Y	Y	Y	Y
Q.931 (voice basic and suppl serv)	N	N	Y	Y	Y	Y
Q.931 (data)	Y	Y	Y	Y	Y	Y
LAPB (X.25 on B)	N	Y	Y	Y	Y	Y
X.25 PLP	Y	Y	Y	Y	Y	Y
V.120	N	Y	Y	Y	N	Y
“R” = PC Interface	Y	Y	Y	Y	N	N
PC interface soft.	Y	Y	Y	Y	N	N
Memory for above: RAM ROM	96–128 Kbytes 2 Kbytes	160–192 Kbytes 2 Kbytes	160–192 Kbytes 2 Kbytes	192–224 Kbytes 2 Kbytes	8 Kbytes 96–128 Kbytes	16 Kbytes 128–160 Kbytes
shared RAM	4 Bytes	8 Kbytes	8 Kbytes	8 Kbytes	—	—
“R” = Asynch port	N	Y (opt)	Y	Y	Y	Y
X.28, X.29, X.3	N	Y	Y	Y	Y	Y
Add RAM	—	64 Kbytes	64 Kbytes	64 Kbytes	ROM 64 Kbytes	ROM 64 Kbytes
DMI (mode 2)	N	Y (opt)	Y (opt)	Y (opt)	N	Y (opt)
Add RAM	—	64 Kbytes	64 Kbytes	64 Kbytes	—	64 Kbytes
T-link	N	Y (opt)	Y (opt)	Y (opt)	N	Y (opt)
Add RAM	—	64 Kbytes	64 Kbytes	64 Kbytes	—	64 Kbytes
Typical soln: Total RAM Total ROM	128 Kbytes 2 Kbytes	192 + 8 + 64 Kbytes 2 Kbytes	256 + 8 + 64 Kbytes 2 Kbytes	288 + 8 + 64 Kbytes 2 Kbytes	8 Kbytes 192 Kbytes	16 Kbytes 224 + 64 Kbytes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: (+49) 0-180-530 85 86
 Email: onjwge@tevm2.nsc.com
 Deutsch Tel: (+49) 0-180-530 85 85
 English Tel: (+49) 0-180-532 78 32
 Français Tel: (+49) 0-180-532 93 58
 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
 19th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2309
 Fax: 81-043-299-2408

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated