

DLP4500-C350REF Reference Design Test Data

Reference Design



Literature Number:
August 2013

Preface	4
1 LED Current Settings	5
A Appendix A: Equipment List for LED Performance Measurements	9
A.1 Description of Equipment and Measurement	9
B Power Supply Requirements	10
B.1 External Power Supply Requirements	10

List of Figures

1-1.	Typical Red LED Current and Illuminance based on PWM values.....	5
1-2.	Typical Green LED Current and Illuminance based on PWM values	6
1-3.	Typical Blue LED Current and Illuminance based on PWM values	6

List of Tables


Read This First

DLP

About Test Results

The DLP® LightCrafter4500™ is a third party implementation of the DLP4500-C350REF reference design, which incorporates the DLP 0.45" WXGA chipset. The EVM and reference design enable faster development cycles for applications requiring high resolution, brightness and pattern rates from a flexible light steering solution.

The LED performance data contained below was measured from one DLP LightCrafter4500 EVM to provide an example from a typical unit. Please note, performance will vary between EVMs due to variations in manufacturing. The performance data is not guaranteed.

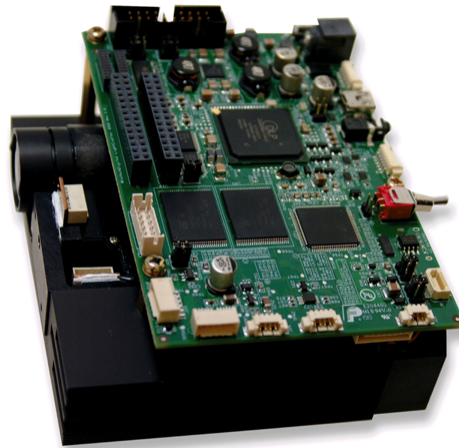

DLP LightCrafter4500 Evaluation Module

Related Documentation From Texas Instruments

DLPC350 Data Sheet: *DLP Digital Controller for the DLP4500 DMD*, TI literature number [DLPS029](#)

DLP4500 Data Sheet: *DLP 0.45 WXGA DMD*, TI literature number [DLPS028](#)

DLPC350 and DLP45000 Chip Set Manual: *DLP 0.45 WXGA Chip Set Data Manual*. TI literature number [DLPU009](#)

User's Guide: *DLPC350 Programmer's Guide*, TI literature number [DLPU010](#)

Application Note: *Using DLP® LightCrafter4500™ Triggers to Synchronize Camera*, TI literature number [DLPA036](#)

If You Need Assistance

Refer to the [DLP and MEMS TI E2E Community support forums](#): [DLP LightCrafter4500 Development Platform Forum](#)

LED Current Settings

This chapter provides the Red, Green and Blue LED performance levels with respect to the LED driver current levels. References are made to the DLP LightCrafter 4500 Graphical User Interface (GUI) that is available for download from TI's website. Refer to the [DLP LightCrafter 4500](#) to download a copy.

On the top right of the GUI window, the LED Driver Controls the individual currents of the Red, Green, and Blue LEDs. A setting of 255 corresponds to the maximum LED current. A setting of 0 corresponds to minimum LED current. The LED current is computed as follows:

$$\text{Red LED Current (A)} = 0.0175 * (\text{LED Current Value}) + 0.4495 \quad (1)$$

$$\text{Green LED Current (A)} = 0.0181 * (\text{LED Current Value}) + 0.3587 \quad (2)$$

$$\text{Blue LED Current (A)} = 0.0160 * (\text{LED Current Value}) + 0.1529 \quad (3)$$

The performance of the Red, Green, and Blue LEDs are shown in [Figure 1-1](#), [Figure 1-2](#), and [Figure 1-3](#), respectively.

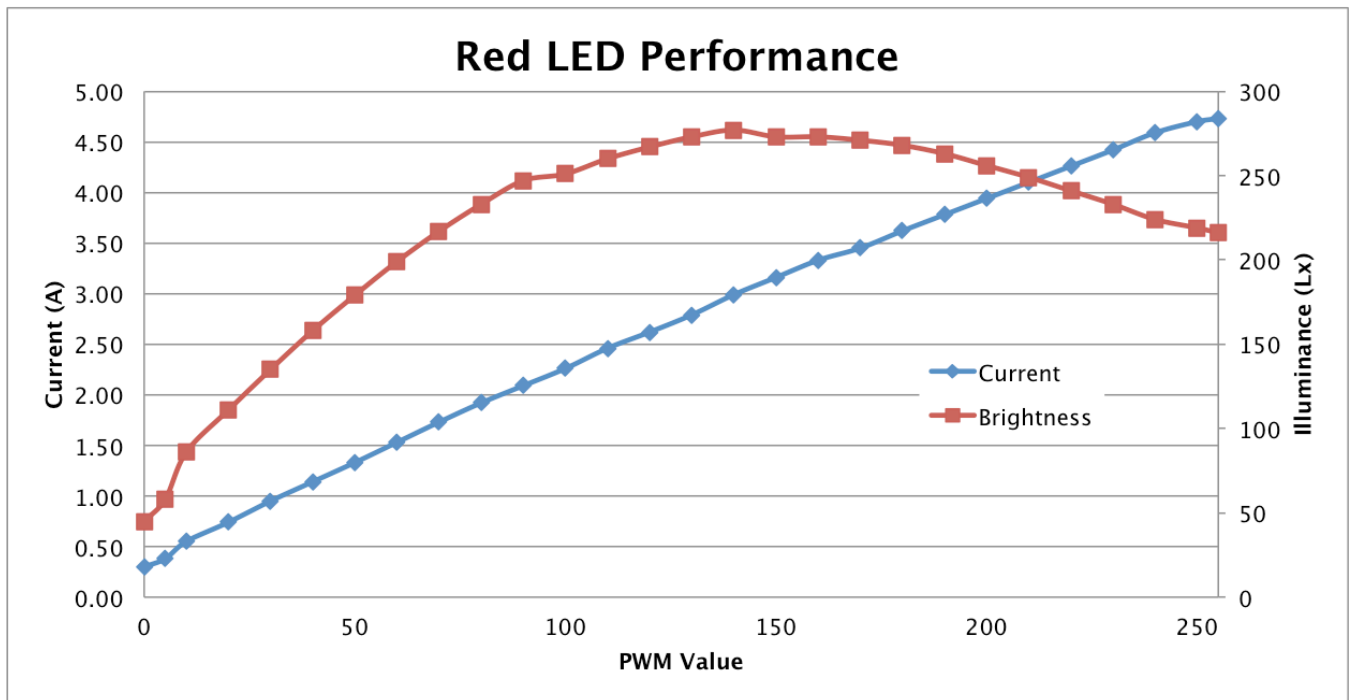


Figure 1-1. Typical Red LED Current and Illuminance based on PWM values

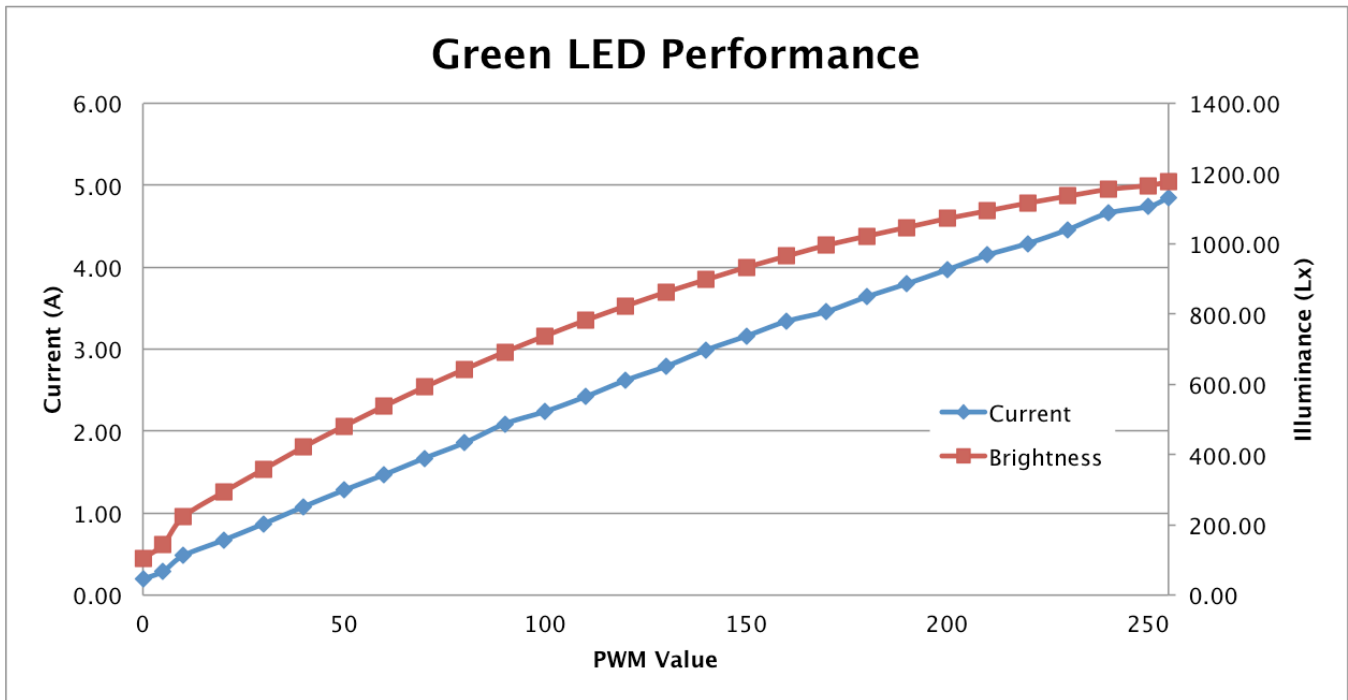


Figure 1-2. Typical Green LED Current and Illuminance based on PWM values

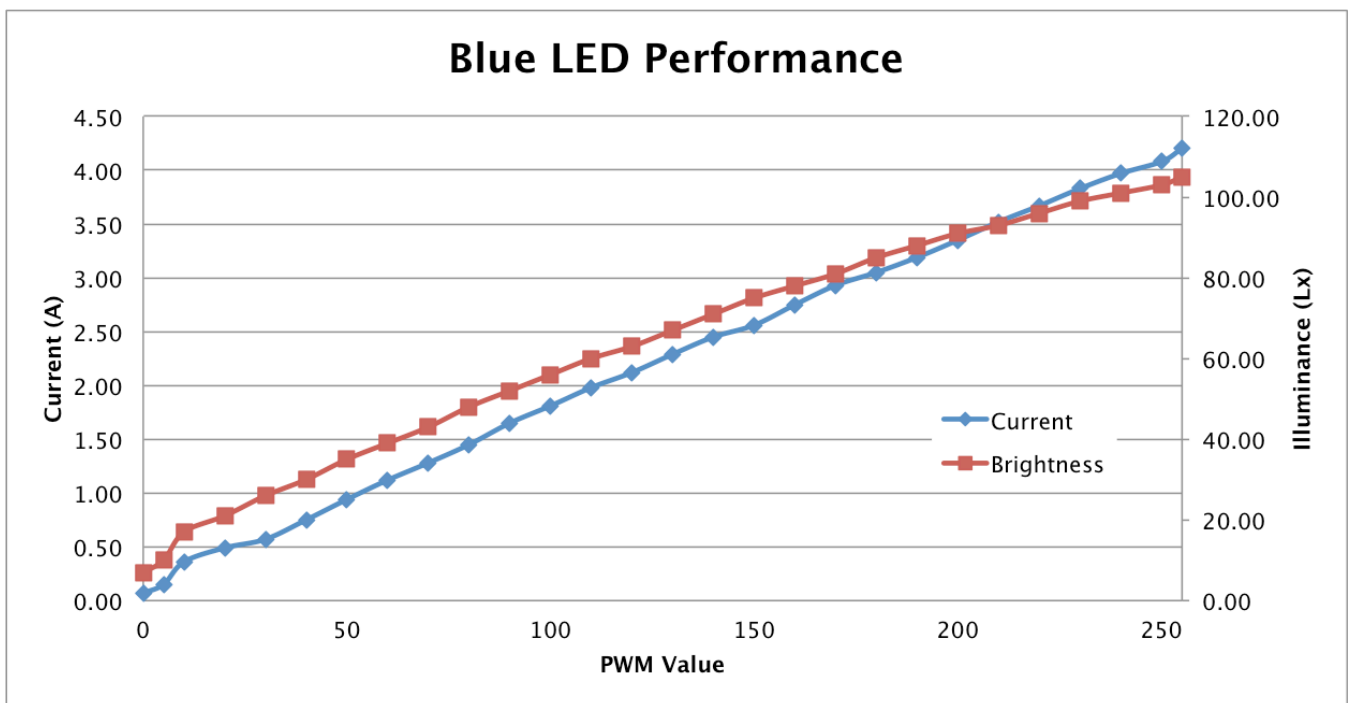


Figure 1-3. Typical Blue LED Current and Illuminance based on PWM values

CAUTION

The DLP LightCrafter4500 is an actively cooled system that has a thermal limit resulting in total Red, Green, and Blue LED currents under 4.3A for continuous and simultaneous LED operation. Care must be exercised by the user not to overheat the system by turning all LEDs at maximum power during prolonged simultaneous LED use. Exceeding more than 4.3A for continuous or simultaneous LED operation can damage the LightCrafter4500 LEDs.

Typical variations in LED manufacturing can lead to changes in the brightness and current consumption. Thus for typical white balance point, the following percentages of colors is recommended:

- Red/Green ~ 87.5%
- Blue/Green ~ 97.6%

at the default LED Current values of:

- Red = 104
- Green = 135
- Blue = 130

The LED selection box determines the control of the LED enables signals. Two options are allowed:

- Automatic: LED enables are controlled by the DLPC350 sequencer. In Video Mode, the LED enables are color sequentially set. In Pattern Sequence, the LED enables are controlled by the downloaded pattern sequence settings.
- Manual: LED enables are controlled by the check boxes. Checking a color, continuously enables the LED of that color at the given LED current setting.

Appendix A: Equipment List for LED Performance Measurements

A.1 Description of Equipment and Measurement

Fluke 29 Digital Multi-Meter - measured total current from DLP LightCrafter 4500

Tektronix 7254 Digital Phosphor Oscilloscope and TCP202 Current Probe - measured individual LED current levels

UDT Instruments Optometer 5471 - measured brightness at the center of a solid color projection for each LED

Power Supply Requirements

B.1 External Power Supply Requirements

The DLP LightCrafter4500 does not include a power supply. The external power supply requirements are:

- Nominal Voltage: 12 V DC
- Minimum Current: 0 A
- Maximum Current: 7 A
- DC Connector size:
 - Inner diameter: 2.5 mm
 - Outer diameter: 5.5 mm
 - Shaft: 9.5 mm female, center positive
- Efficiency Level: V

NOTE: External Power Supply Regulatory Compliance Certifications: Recommend selection and use of an external power supply which meets TI's required minimum electrical ratings in addition to complying with applicable regional product regulatory/safety certification requirements such as (by example) UL, CSA, VDE, CCC, PSE, etc.

IMPORTANT NOTICE FOR TI REFERENCE DESIGNS

Texas Instruments Incorporated ("TI") reference designs are solely intended to assist designers ("Buyers") who are developing systems that incorporate TI semiconductor products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products.

TI reference designs have been created using standard laboratory conditions and engineering practices. **TI has not conducted any testing other than that specifically described in the published documentation for a particular reference design.** TI may make corrections, enhancements, improvements and other changes to its reference designs.

Buyers are authorized to use TI reference designs with the TI component(s) identified in each particular reference design and to modify the reference design in the development of their end products. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI REFERENCE DESIGNS ARE PROVIDED "AS IS". TI MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE REFERENCE DESIGNS OR USE OF THE REFERENCE DESIGNS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. TI DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO TI REFERENCE DESIGNS OR USE THEREOF. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY BUYERS AGAINST ANY THIRD PARTY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON A COMBINATION OF COMPONENTS PROVIDED IN A TI REFERENCE DESIGN. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES, HOWEVER CAUSED, ON ANY THEORY OF LIABILITY AND WHETHER OR NOT TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, ARISING IN ANY WAY OUT OF TI REFERENCE DESIGNS OR BUYER'S USE OF TI REFERENCE DESIGNS.

TI reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques for TI components are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

Reproduction of significant portions of TI information in TI data books, data sheets or reference designs is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous failures, monitor failures and their consequences, lessen the likelihood of dangerous failures and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in Buyer's safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed an agreement specifically governing such use.

Only those TI components that TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components that have **not** been so designated is solely at Buyer's risk, and Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.