

**Test Data
For PMP10595
01/19/2015**



Overview

The PMP10595 reference design is a miniature 1.8V, 2A output power supply using SIMPLE SWITCHER® LMZ20502 nano module. The solution size is about 5x6mm, 30mm². The input range of the LMZ20502 is 2.7V to 5.5V. On the reference board the LMZ20502 is set in AUTO mode, and it will operate in PFM at light load to achieve higher efficiency.

Power Specification

Vin range: 2.7V – 5.5V
Output voltage: 1.8V
Output current: 2A max
Switching Frequency: 3 MHz in PWM mode

Reference Board

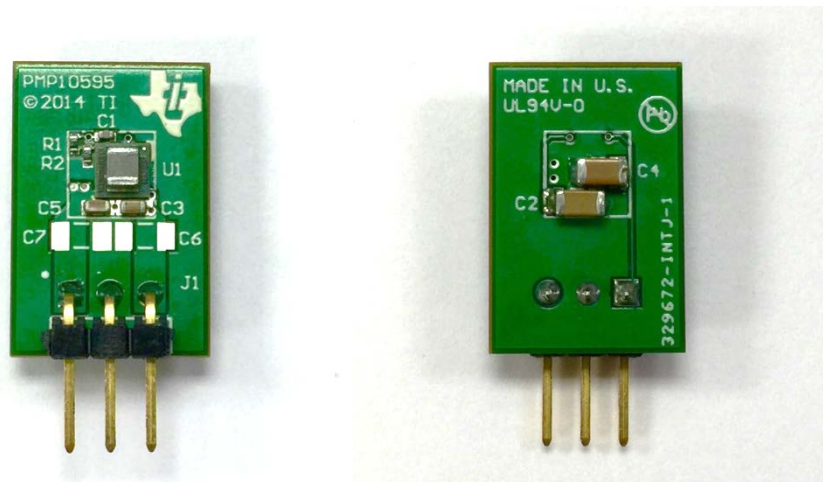


Figure 1 Board photos

The board size is 6.35x19 mm, and the component area is about 5x6 mm.

Efficiency

The efficiency measurement was taken at 3V, 4V and 5V inputs. The peak efficiency is 91%

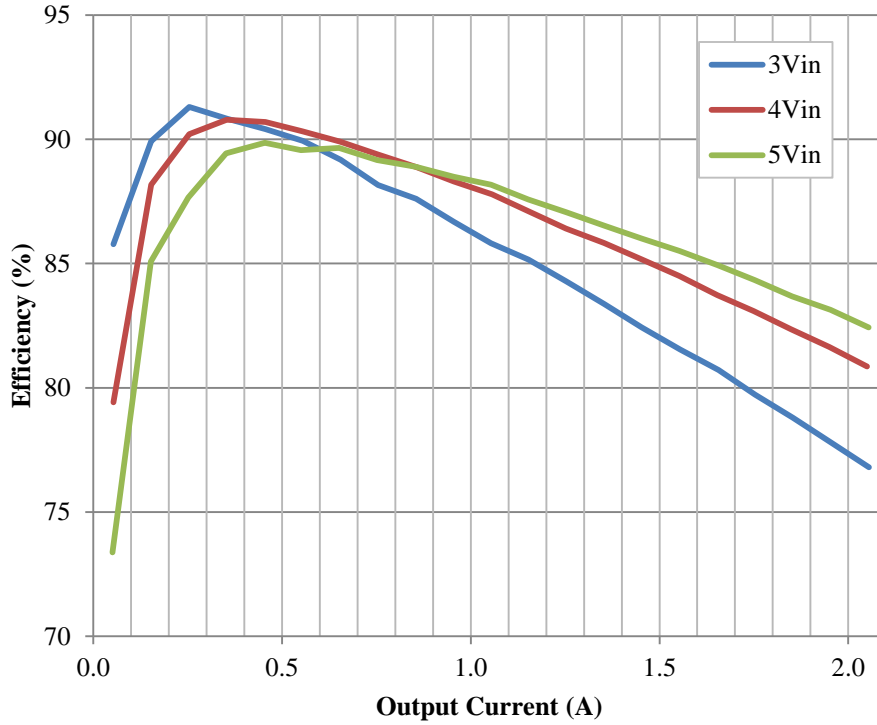


Figure 2 Power efficiency in AUTO mode

Thermal

The thermal image was taken at 23°C room temperature, no air flow. The board was operating at 5V input, 2A output. The thermal performance can be further improved by increasing the board size and using thicker copper layers.

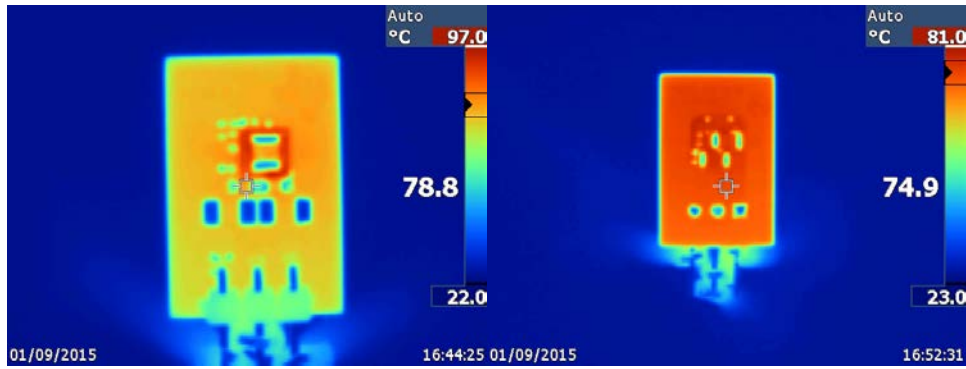


Figure 3 Board thermal images

Regulation

The overall variation on the 1.8V output is within 1%

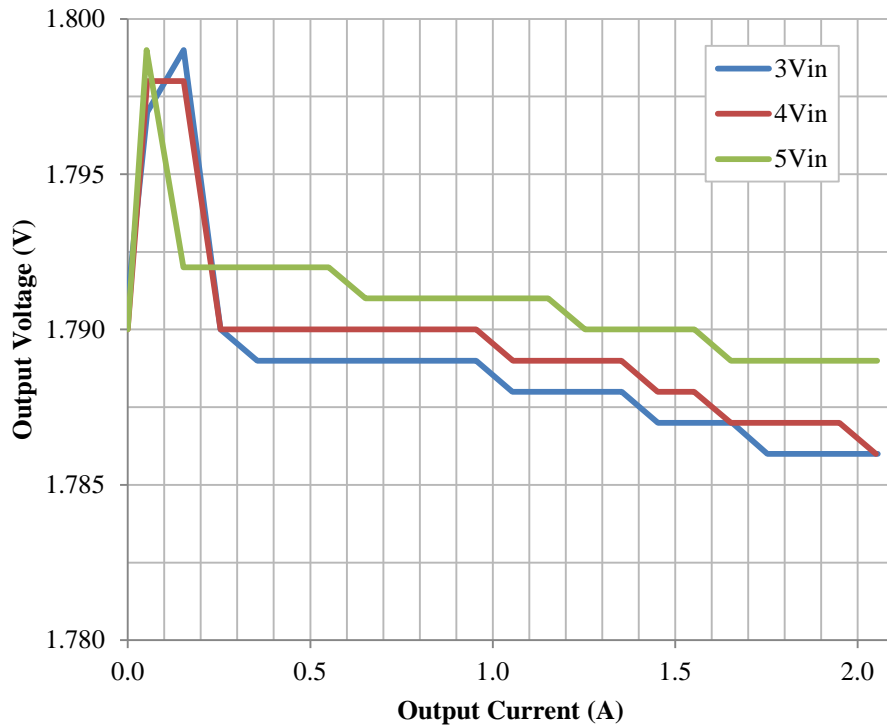


Figure 4 Regulation in AUTO mode

Start Up

Ch1 (yellow) is the input voltage, and Ch2 (green) is the output voltage.

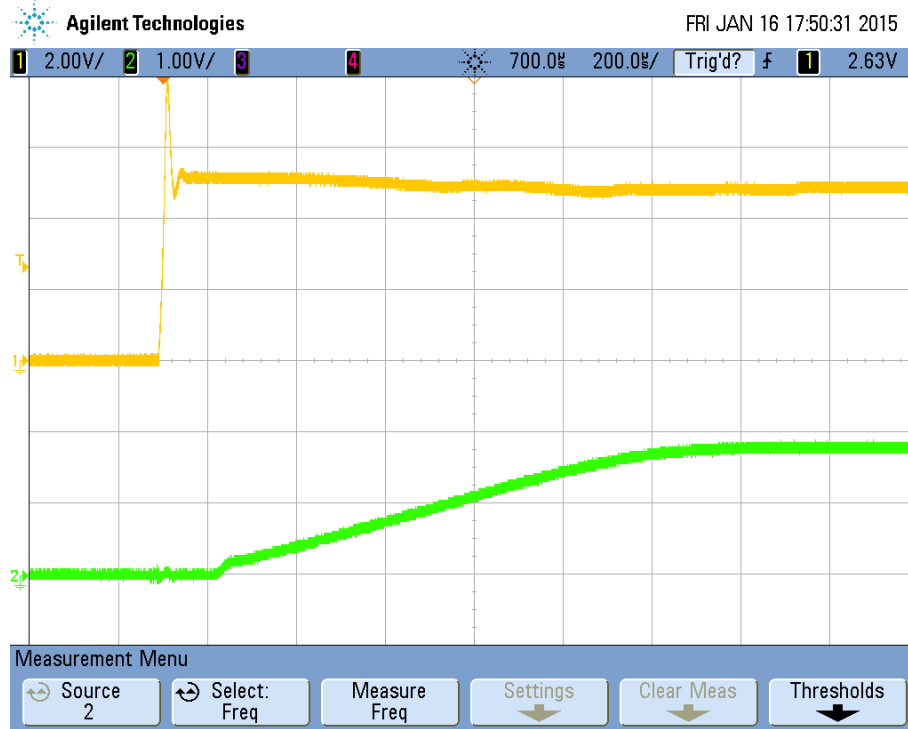


Figure 5 Start up into no load at 5Vin

Switching Waveforms

Since the integrated inductor of the LMZ20502 power module can still be probed, the switching waveforms were measured under full load and no load conditions. The switching waveforms show its operation in the PWM and PFM. Ch1 (yellow) is the switch node voltage.

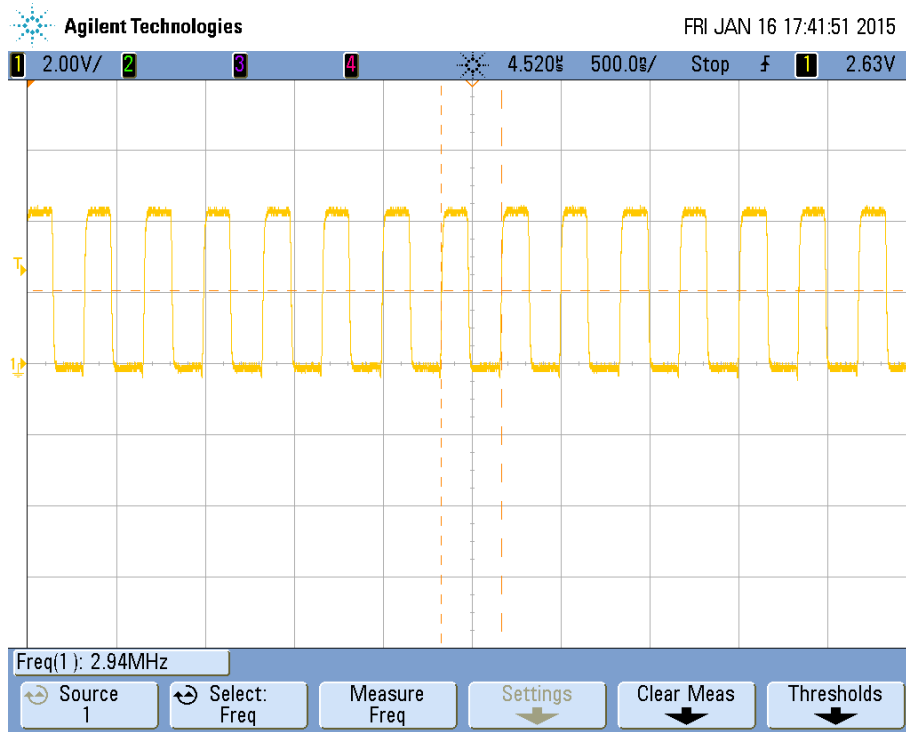


Figure 6 Switching waveform at full load, 5Vin, PWM

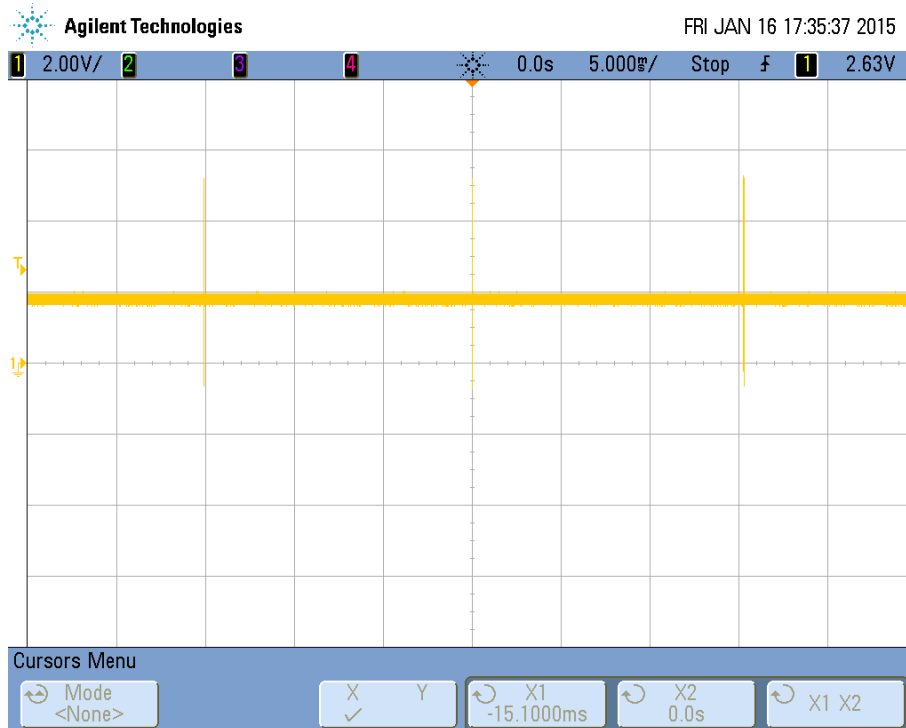


Figure 7 Switching waveform at no load, 5Vin, PFM

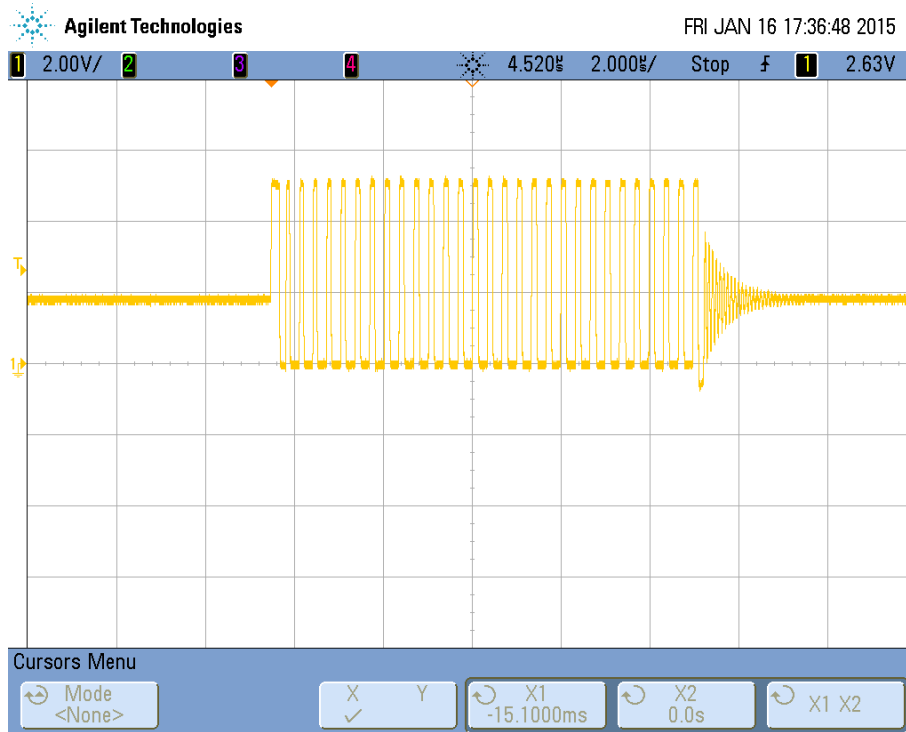


Figure 8 Zoom-in switching waveform at no load, 5V_{in}, PFM

Load Transients

The load transient response was tested by adding load step from 1A to 2A on the output at 5V input. Ch1 (yellow) is the output voltage in AC mode, and Ch4 (magenta) is the output current.

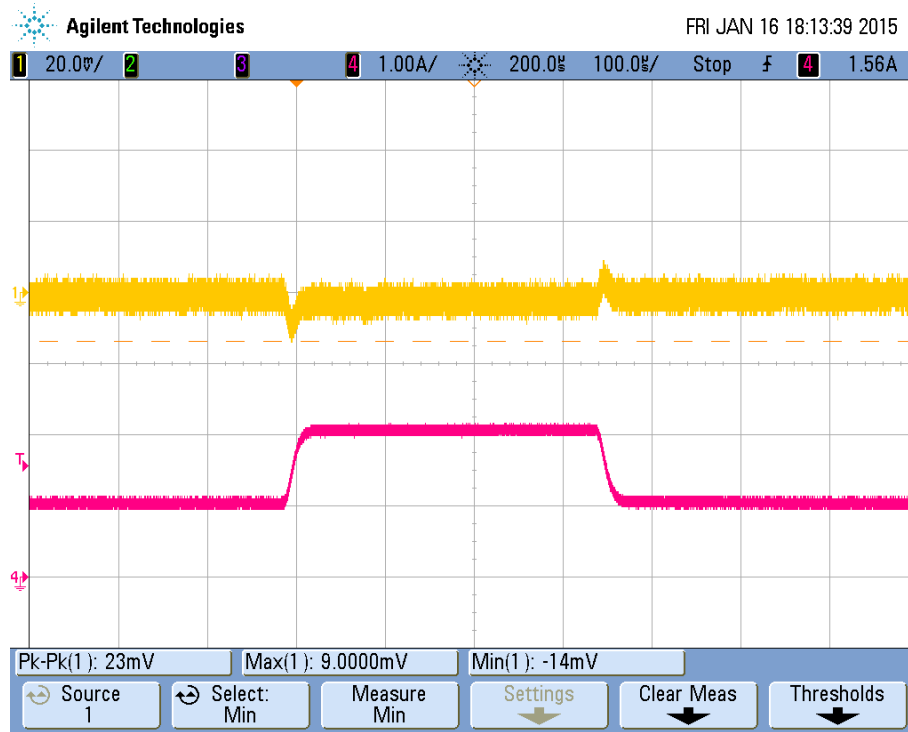


Figure 9 Output load transient at 5V_{in}

Output Voltage Ripples

The output ripples were measured directly at the output capacitors. Ch1 (yellow) is the output voltage ripple in AC mode.

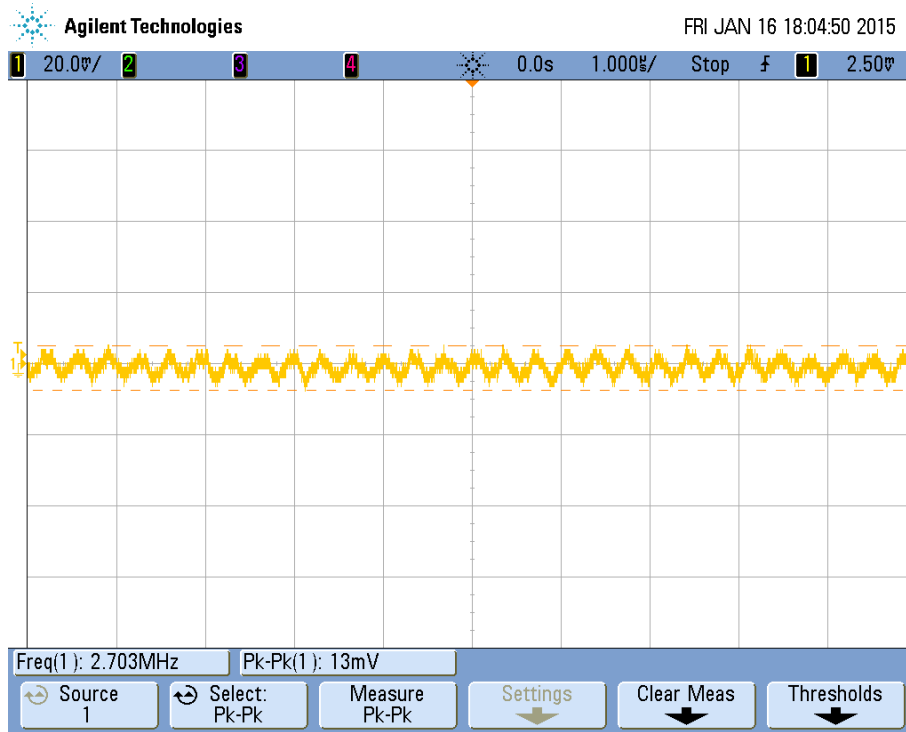


Figure 10 Output ripple at full load, 5Vin

Appendix: Efficiency and Regulation Test Data

Vin(V)	Iin(A)	Vout(V)	Iout(A)	Efficiency(%)
3.001	0.000	1.791	0.000	0.000
3.001	0.037	1.797	0.053	85.774
3.001	0.102	1.799	0.153	89.920
3.000	0.166	1.790	0.254	91.297
3.001	0.233	1.789	0.355	90.827
3.001	0.300	1.789	0.455	90.414
3.000	0.368	1.789	0.555	89.936
3.000	0.438	1.789	0.655	89.178
3.000	0.510	1.789	0.754	88.164
3.000	0.582	1.789	0.855	87.606
3.000	0.657	1.789	0.955	86.682
3.000	0.732	1.788	1.054	85.817
3.000	0.807	1.788	1.153	85.153
3.000	0.886	1.788	1.253	84.288
3.000	0.968	1.788	1.354	83.366
3.000	1.050	1.787	1.453	82.429
3.000	1.136	1.787	1.555	81.537
3.000	1.222	1.787	1.656	80.722
3.000	1.309	1.786	1.753	79.726
3.000	1.400	1.786	1.853	78.797
3.000	1.496	1.786	1.955	77.799
3.000	1.593	1.786	2.055	76.799

Vin(V)	Iin(A)	Vout(V)	Iout(A)	Efficiency(%)
4.000	0.000	1.790	0.000	0.000
4.000	0.030	1.798	0.053	79.412
4.000	0.078	1.798	0.153	88.171
4.000	0.126	1.790	0.254	90.210
4.000	0.174	1.790	0.353	90.786
4.000	0.225	1.790	0.456	90.693
4.000	0.274	1.790	0.553	90.317
4.000	0.325	1.790	0.653	89.913
4.000	0.378	1.790	0.755	89.382
4.000	0.431	1.790	0.856	88.877
4.000	0.484	1.790	0.955	88.298

4.000	0.538	1.789	1.056	87.787
4.000	0.592	1.789	1.153	87.108
4.000	0.648	1.789	1.252	86.413
4.000	0.705	1.789	1.353	85.834
4.000	0.762	1.788	1.452	85.176
4.000	0.821	1.788	1.552	84.500
4.000	0.882	1.787	1.653	83.728
4.000	0.941	1.787	1.750	83.083
4.000	1.003	1.787	1.849	82.357
4.000	1.067	1.787	1.950	81.646
4.000	1.132	1.786	2.050	80.859

Vin(V)	Iin(A)	Vout(V)	Iout(A)	Efficiency(%)
5.002	0.000	1.790	0.000	0.000
5.002	0.025	1.799	0.051	73.370
5.002	0.064	1.792	0.152	85.086
5.002	0.103	1.792	0.252	87.651
5.002	0.141	1.792	0.352	89.437
5.002	0.181	1.792	0.454	89.861
5.002	0.220	1.792	0.550	89.564
5.002	0.260	1.791	0.651	89.652
5.002	0.302	1.791	0.752	89.159
5.002	0.344	1.791	0.854	88.890
5.002	0.386	1.791	0.954	88.494
5.002	0.428	1.791	1.054	88.176
5.002	0.471	1.791	1.152	87.576
5.002	0.515	1.790	1.253	87.067
5.002	0.560	1.790	1.354	86.525
5.003	0.604	1.790	1.452	86.011
5.002	0.650	1.790	1.553	85.500
5.002	0.696	1.789	1.653	84.944
5.002	0.743	1.789	1.752	84.336
5.003	0.791	1.789	1.851	83.678
5.003	0.840	1.789	1.953	83.139
5.003	0.891	1.789	2.054	82.433

IMPORTANT NOTICE FOR TI REFERENCE DESIGNS

Texas Instruments Incorporated ("TI") reference designs are solely intended to assist designers ("Buyers") who are developing systems that incorporate TI semiconductor products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products.

TI reference designs have been created using standard laboratory conditions and engineering practices. **TI has not conducted any testing other than that specifically described in the published documentation for a particular reference design.** TI may make corrections, enhancements, improvements and other changes to its reference designs.

Buyers are authorized to use TI reference designs with the TI component(s) identified in each particular reference design and to modify the reference design in the development of their end products. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI REFERENCE DESIGNS ARE PROVIDED "AS IS". TI MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE REFERENCE DESIGNS OR USE OF THE REFERENCE DESIGNS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. TI DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO TI REFERENCE DESIGNS OR USE THEREOF. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY BUYERS AGAINST ANY THIRD PARTY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON A COMBINATION OF COMPONENTS PROVIDED IN A TI REFERENCE DESIGN. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES, HOWEVER CAUSED, ON ANY THEORY OF LIABILITY AND WHETHER OR NOT TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, ARISING IN ANY WAY OUT OF TI REFERENCE DESIGNS OR BUYER'S USE OF TI REFERENCE DESIGNS.

TI reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques for TI components are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

Reproduction of significant portions of TI information in TI data books, data sheets or reference designs is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous failures, monitor failures and their consequences, lessen the likelihood of dangerous failures and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in Buyer's safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed an agreement specifically governing such use.

Only those TI components that TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components that have **not** been so designated is solely at Buyer's risk, and Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.