

**Test Data
For PMP20305
June 22, 2016**



Table of Contents

1. Design Specifications	3
2. Circuit Description.....	3
3. PMP20305 Board Photos	4
4. Thermal Data.....	6
5. Efficiency	8
5.1 Efficiency Graph	8
5.2 Efficiency Data.....	9
6 Waveforms.....	10
6.1 Load Transient Response	10
6.2 Startup	13
6.3 Output Voltage Ripple and Switch Node Voltages	15
6.4 Line Transient.....	18

1. Design Specifications

Vin Minimum	6VDC
Vin Nominal	13.5VDC
Vin Maximum	16VDC (24V Peak)
Vout	26.9VDC
Iout	0.4A Max.
Nominal Switching Frequency	≈ 2MHz

2. Circuit Description


PMP20305 is an LED driver circuit using the LM5022-Q1 boost controller IC and two types of constant-current methods to drive 4 strings of LEDs. Two of the LED strings utilize the TL431 voltage reference as a driver to perform a constant current source, while the other two strings utilize the TL4242 linear LED driver IC, which also features a PWM-controlled brightness adjust scheme. The input voltage range of the circuit is 6Vin to 16Vin (24Vin Peak). The output of the LM5022-Q1 boost converter is set to 26.9Vout and is capable of supplying a total of 0.4A of current to the loads.

The design is built on a 4-layer FR-4 PCB, with 2 oz. Copper on all four layers.


All electrical tests were performed with the LED driver circuitry disabled/disconnected (see notes on schematic sheet for details). Thermal results were taken with all LEDs enabled at their full current.

3. PMP20305 Board Photos

Board Dimensions: 4.4" x 7"

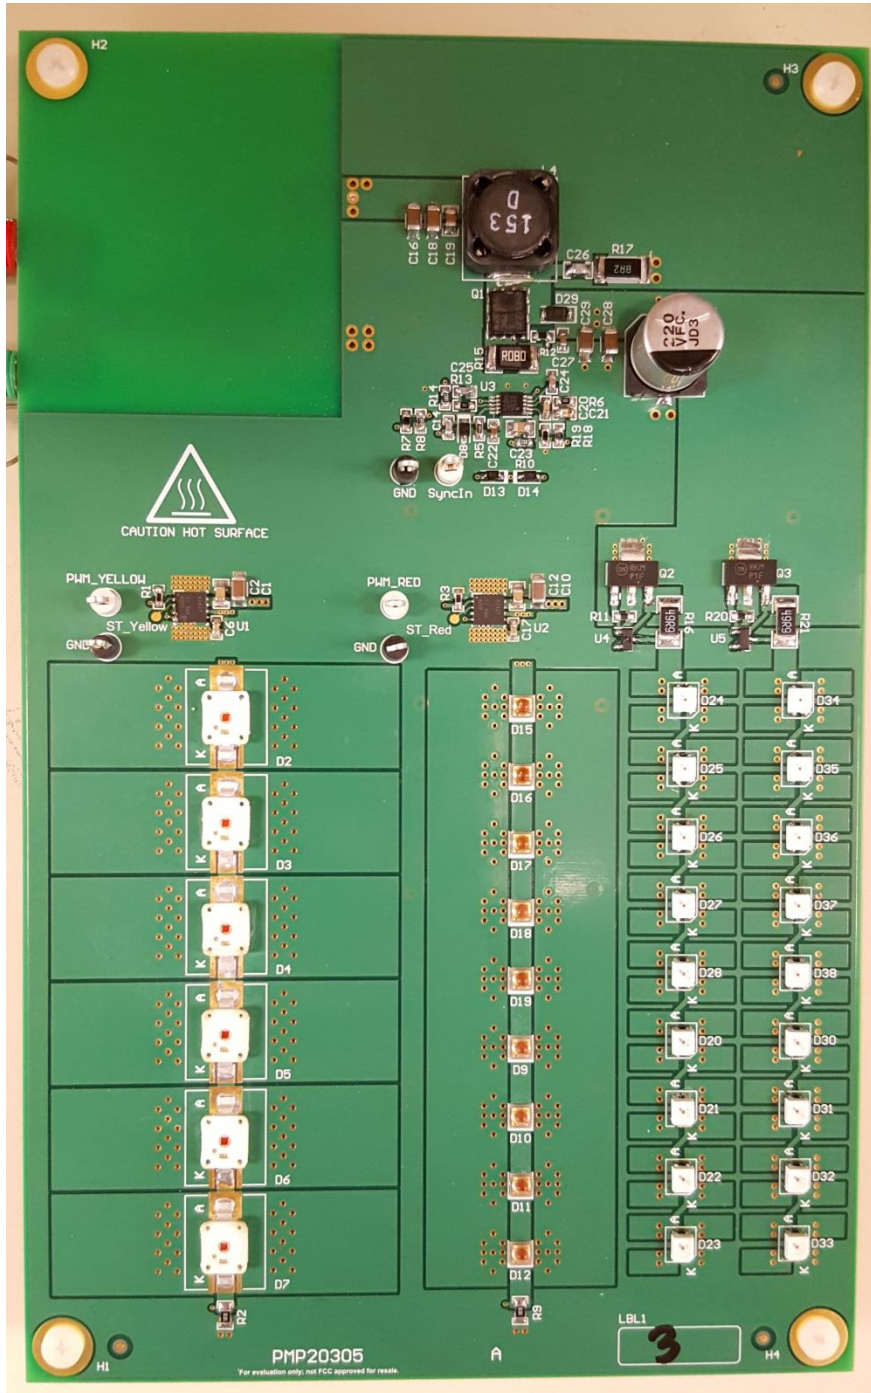


Board Photo (Top View)

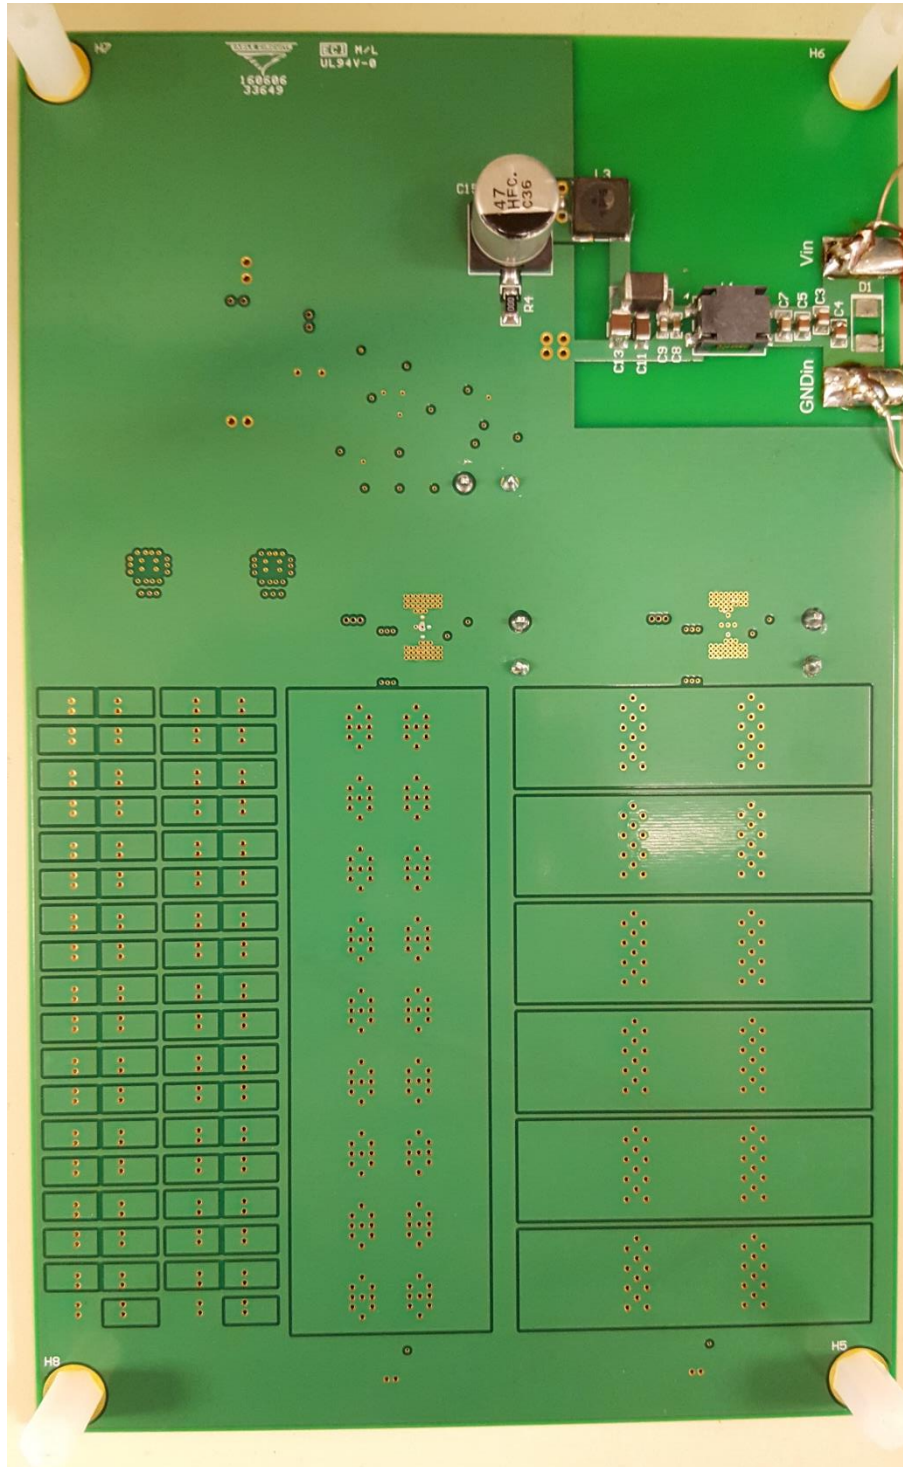


Board Photo (Bottom View)

4. Thermal Data

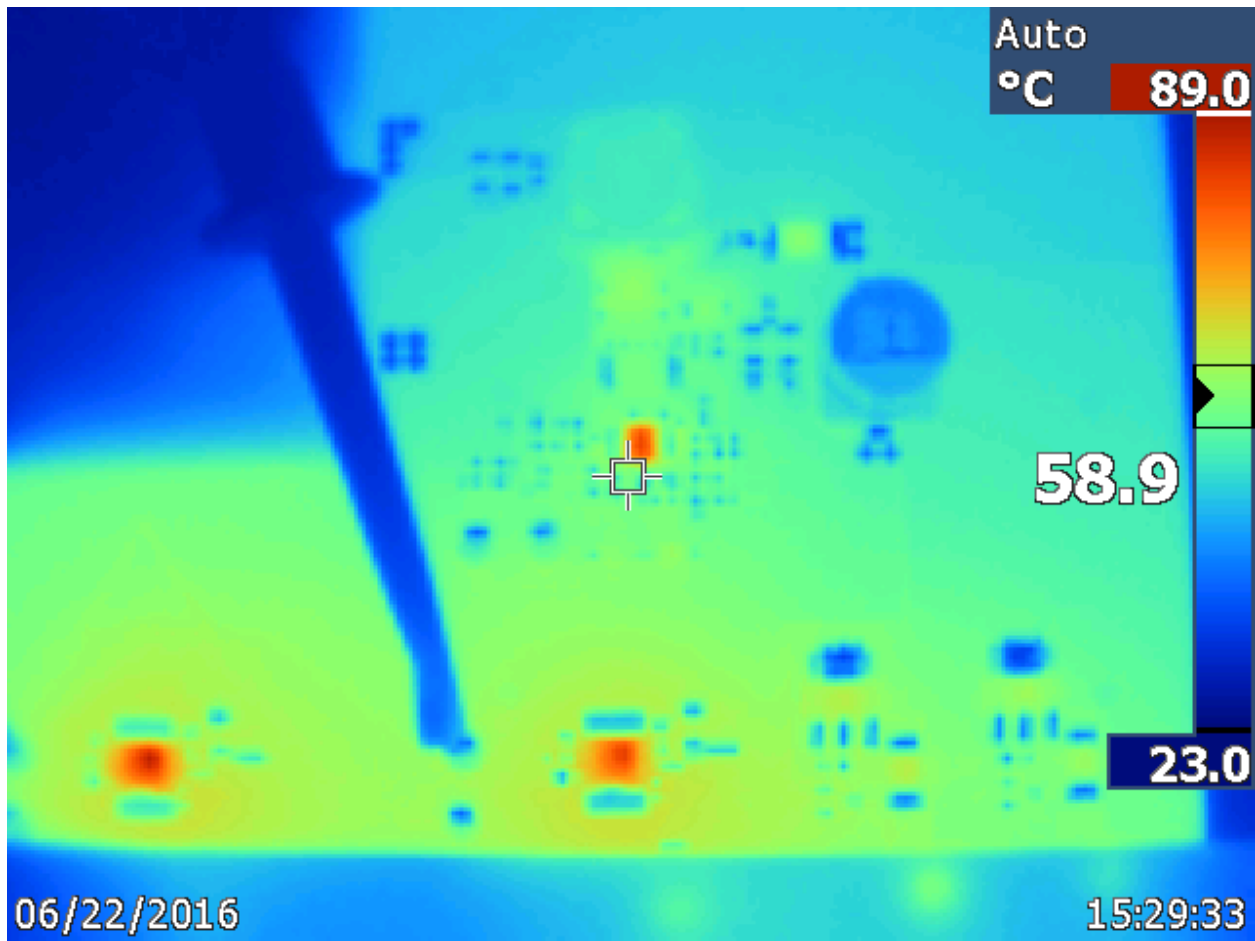


IR thermal image taken at steady state with 13.5Vin and 0.4A Load (All LED strings enabled at full current; no airflow; ambient at room temp.; View of Boost Converter and LED Drivers Only)

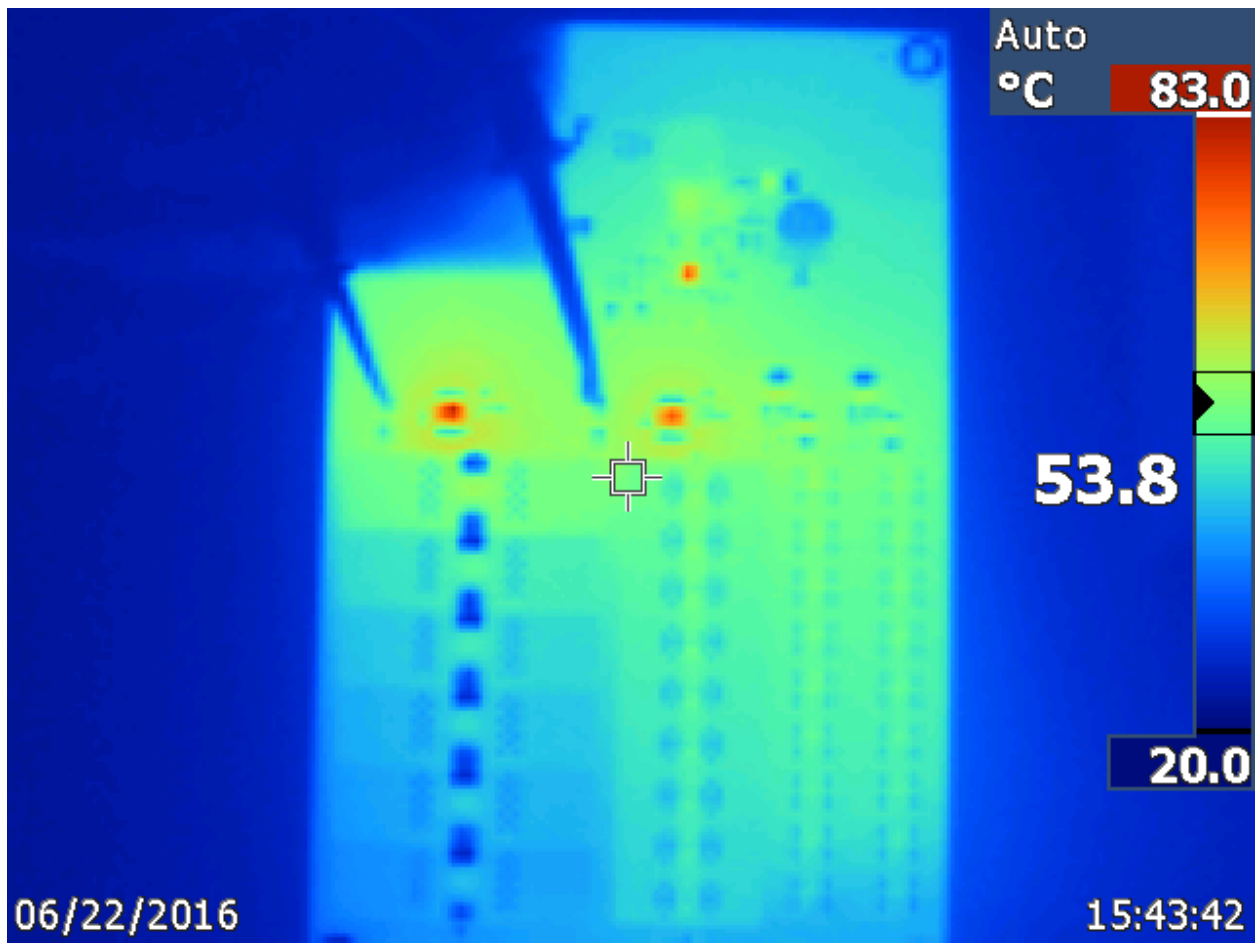

IR thermal image taken at steady state with 13.5Vin and 0.4A Load (All LED strings enabled at full current; no airflow; ambient at room temp.; Full Board View)

5. Efficiency

5.1 Efficiency Graph

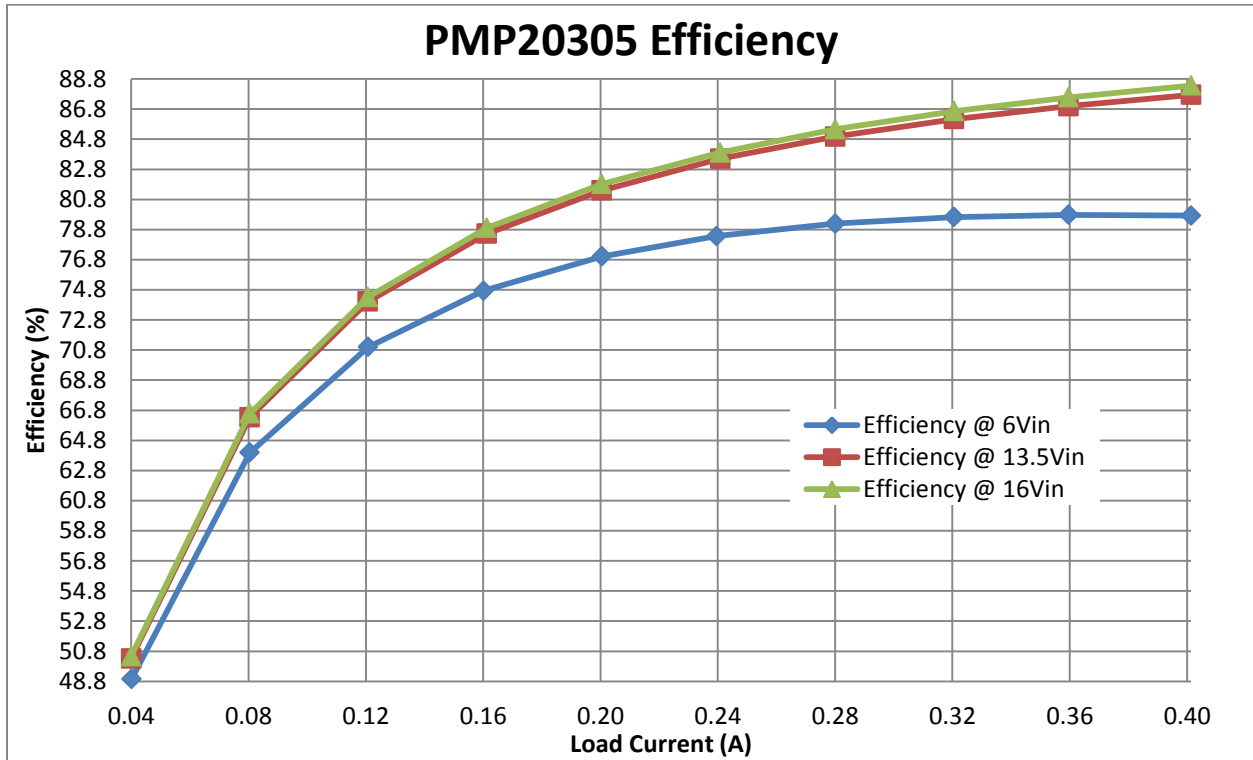

5.2 Efficiency Data


Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Ploss (W)	Efficiency (%)
6	0.3650	27.0670	0.0396	2.1900	1.0719	1.1181	48.9
6	0.5632	27.0660	0.0799	3.3792	2.1626	1.2166	64.0
6	0.7643	27.0660	0.1203	4.5858	3.2560	1.3298	71.0
6	0.9634	27.0660	0.1596	5.7804	4.3197	1.4607	74.7
6	1.1714	27.0650	0.2000	7.0284	5.4130	1.6154	77.0
6	1.3763	27.0660	0.2391	8.2578	6.4715	1.7863	78.4
6	1.5926	27.0660	0.2796	9.5556	7.5677	1.9879	79.2
6	1.8133	27.0660	0.3201	10.8798	8.6638	2.2160	79.6
6	2.0305	27.0660	0.3591	12.1830	9.7194	2.4636	79.8
6	2.2684	27.0660	0.4009	13.6104	10.8508	2.7596	79.7

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Ploss (W)	Efficiency (%)
13.5	0.1574	27.0680	0.0395	2.1249	1.0692	1.0557	50.3
13.5	0.2415	27.0680	0.0799	3.2603	2.1627	1.0975	66.3
13.5	0.3256	27.0680	0.1202	4.3956	3.2536	1.1420	74.0
13.5	0.4103	27.0680	0.1607	5.5391	4.3498	1.1892	78.5
13.5	0.4924	27.0680	0.1999	6.6474	5.4109	1.2365	81.4
13.5	0.5772	27.0680	0.2404	7.7922	6.5071	1.2851	83.5
13.5	0.6597	27.0670	0.2796	8.9060	7.5679	1.3380	85.0
13.5	0.7451	27.0670	0.3201	10.0589	8.6641	1.3947	86.1
13.5	0.8276	27.0660	0.3591	11.1726	9.7194	1.4532	87.0
13.5	0.9160	27.0660	0.4009	12.3660	10.8508	1.5152	87.7


Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Ploss (W)	Efficiency (%)
16	0.1324	27.0660	0.0395	2.1184	1.0691	1.0493	50.5
16	0.2030	27.0660	0.0799	3.2480	2.1626	1.0854	66.6
16	0.2736	27.0660	0.1202	4.3776	3.2533	1.1243	74.3
16	0.3445	27.0660	0.1607	5.5120	4.3495	1.1625	78.9
16	0.4133	27.0660	0.1999	6.6128	5.4105	1.2023	81.8
16	0.4844	27.0660	0.2403	7.7504	6.5040	1.2464	83.9
16	0.5534	27.0660	0.2796	8.8544	7.5677	1.2867	85.5
16	0.6248	27.0660	0.3201	9.9968	8.6638	1.3330	86.7
16	0.6936	27.0660	0.3591	11.0976	9.7194	1.3782	87.6
16	0.7675	27.0660	0.4009	12.2800	10.8508	1.4292	88.4

6 Waveforms


6.1 Load Transient Response

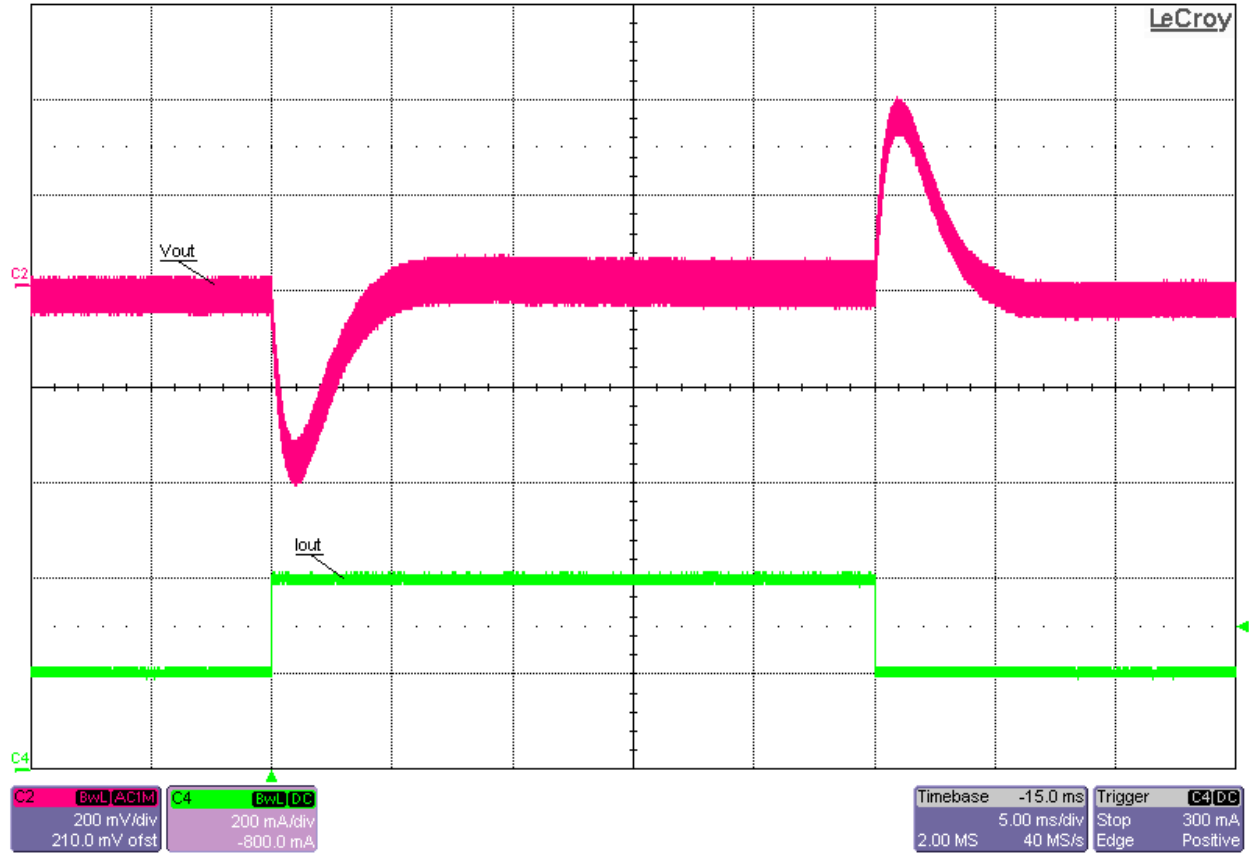

Load Transient Response at 6Vin and 0.2A-to-0.4A (50%-to-100%) Load Step

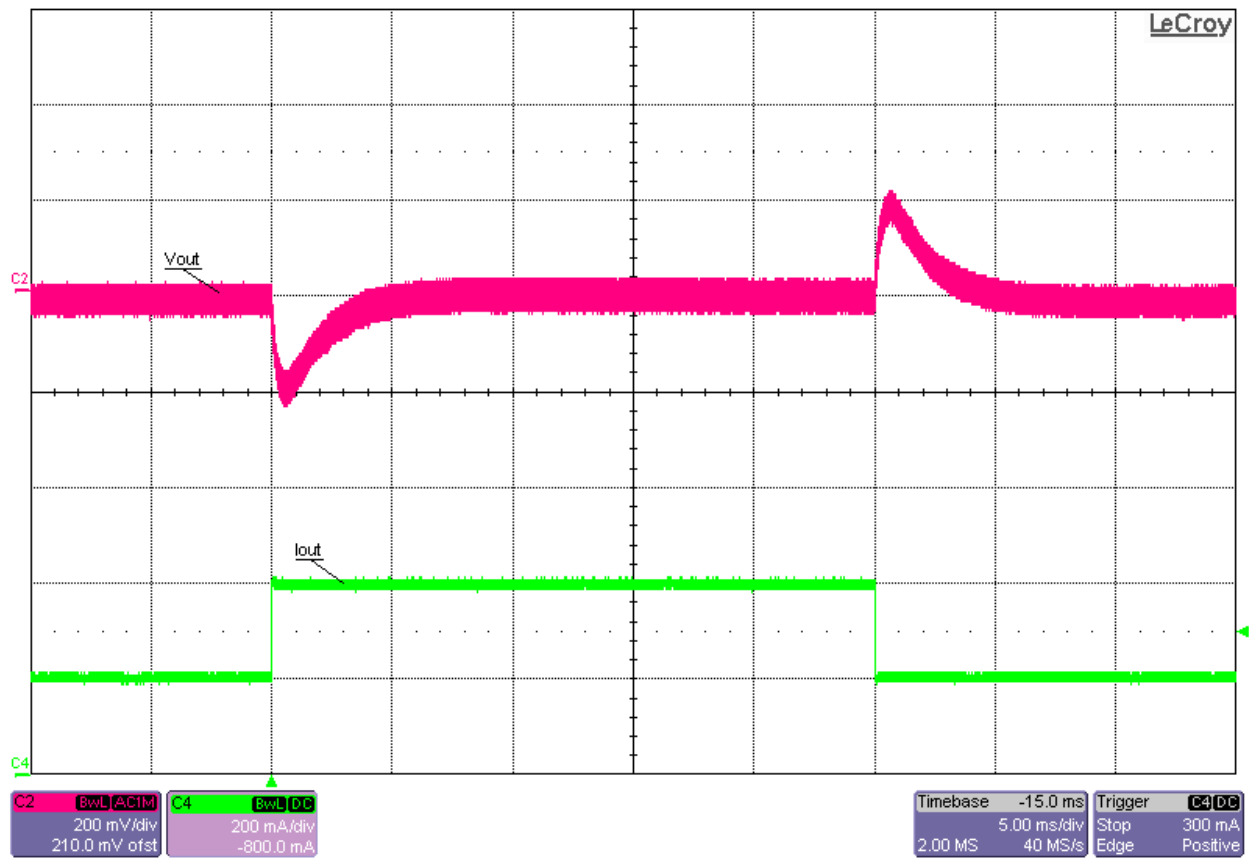


Load Transient Response at 13.5Vin and 0.2A-to-0.4A (50%-to-100%) Load Step

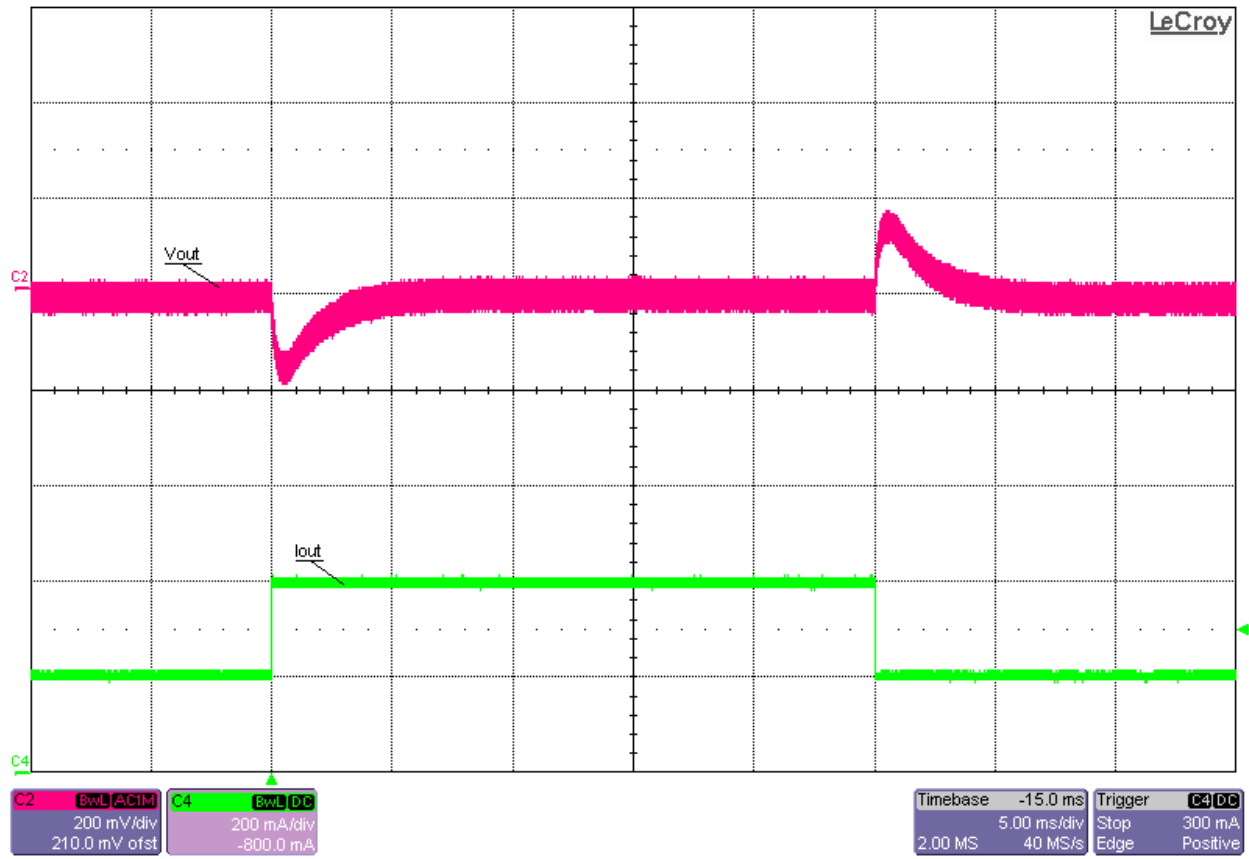


Load Transient Response at 16Vin and 0.2A-to-0.4A (50%-to-100%) Load Step

6.2 Startup

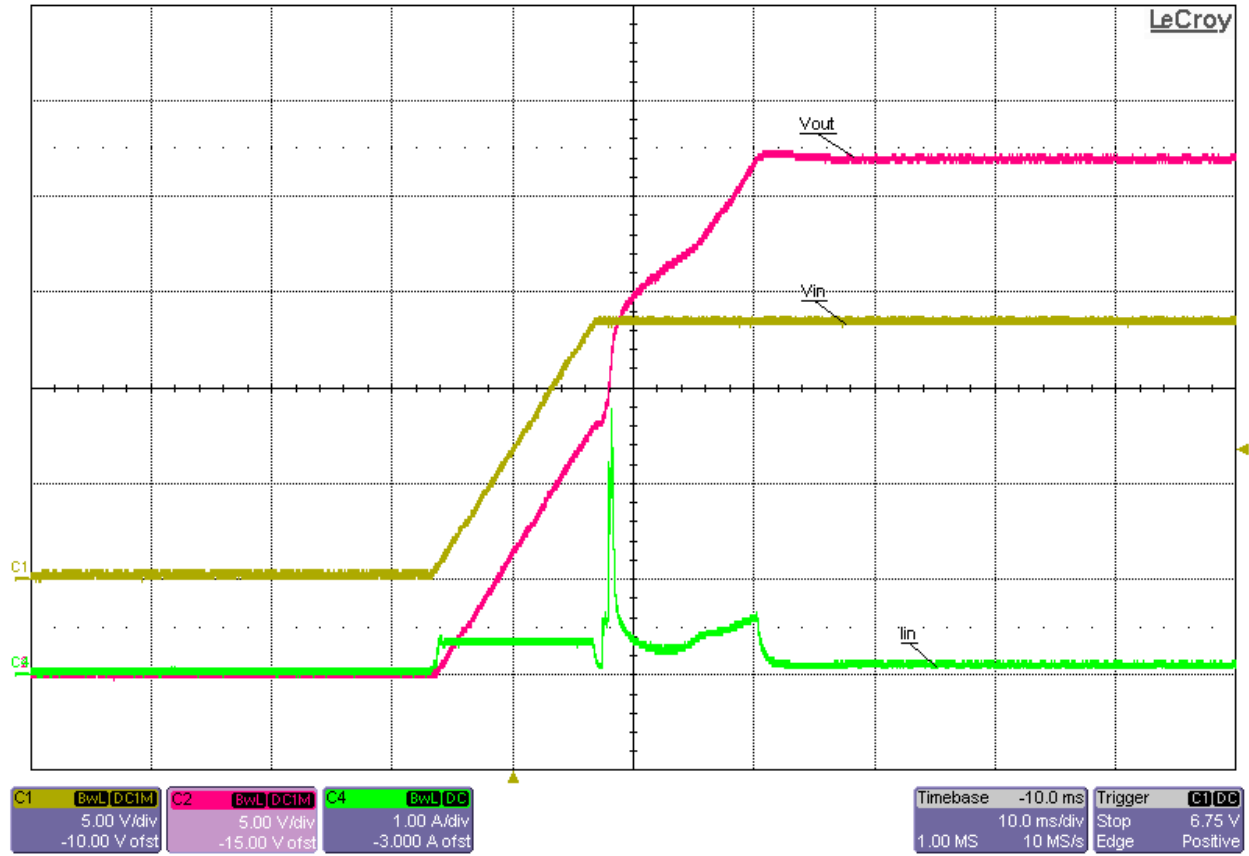


Startup into No Load at 13.5Vin

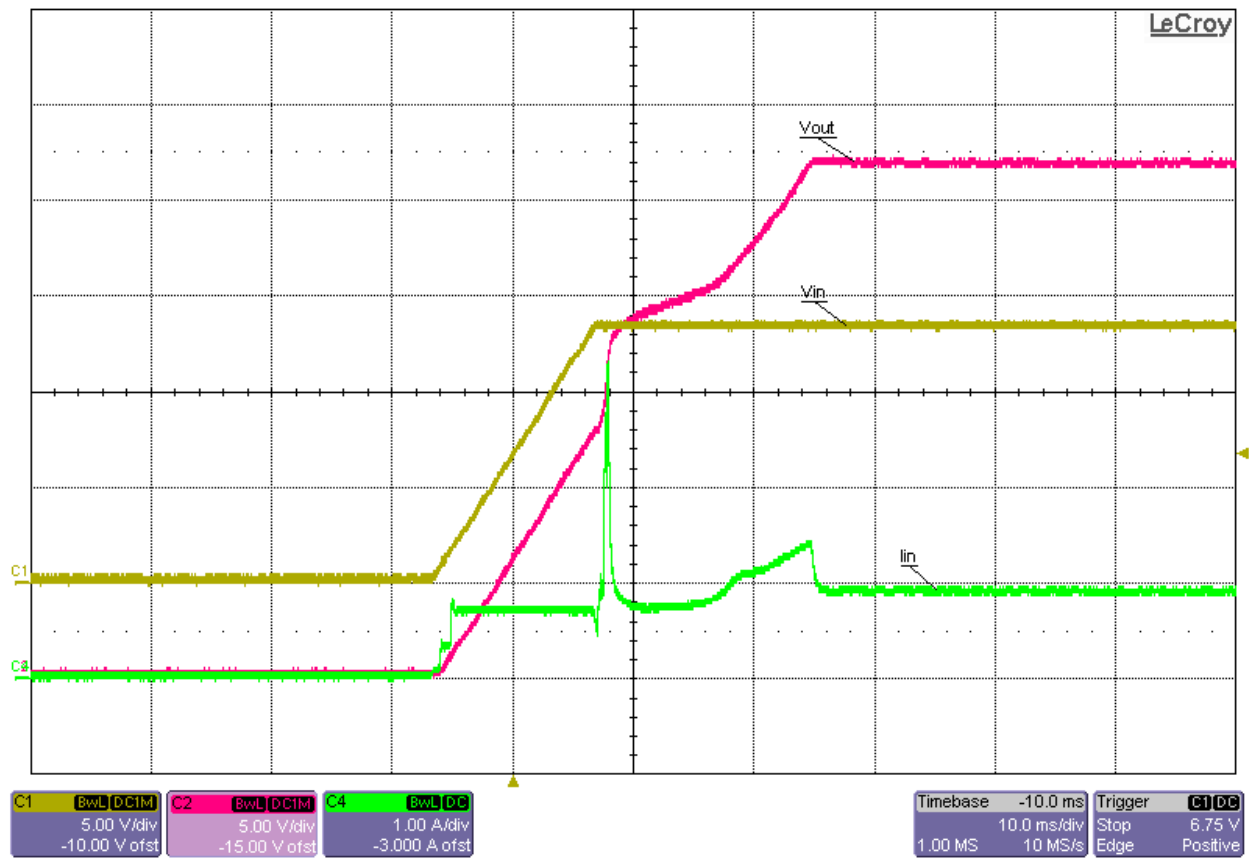


Startup into 0.4A Constant-Current Load at 13.5Vin


6.3 Output Voltage Ripple and Switch Node Voltages

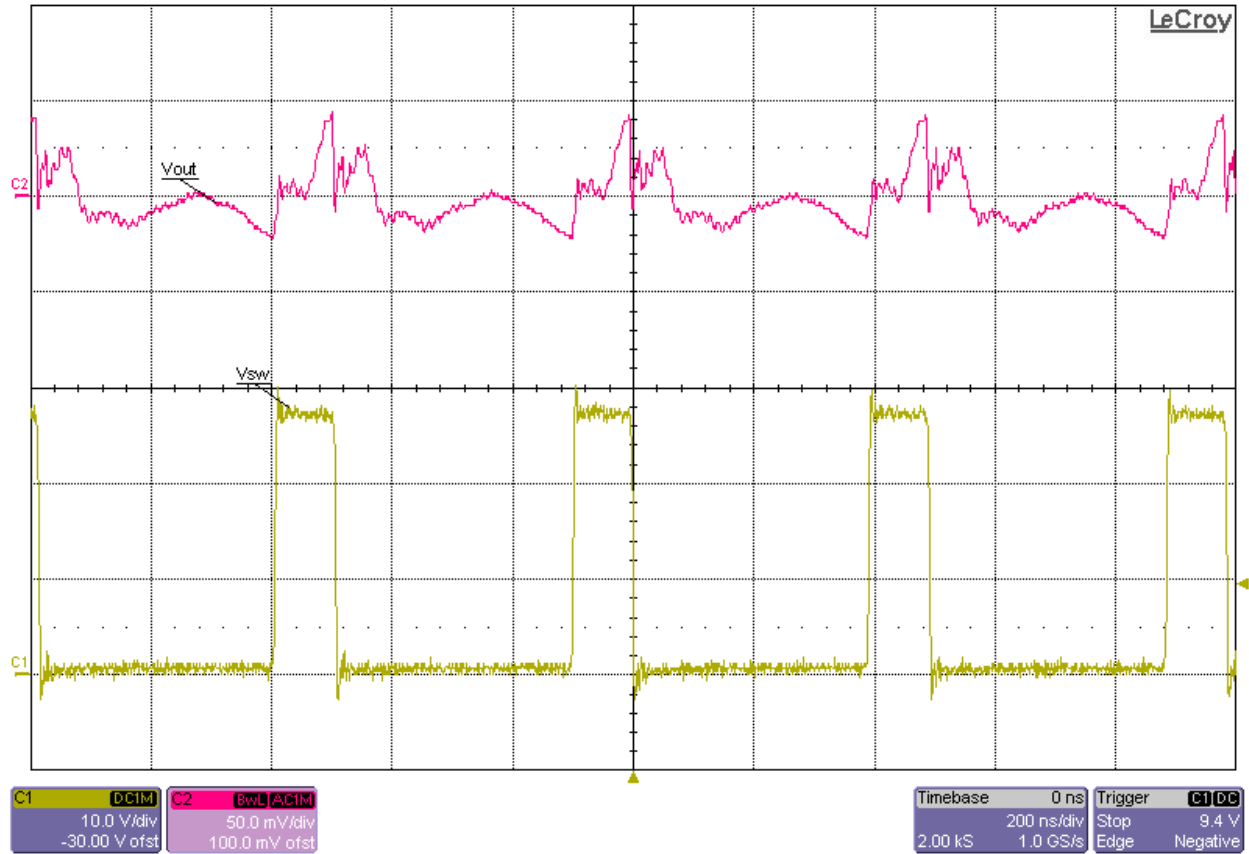

Switch Node Voltage and Output Voltage Ripple at 6Vin and 0.4A Load (Vripple ≈ 60mVp-p)

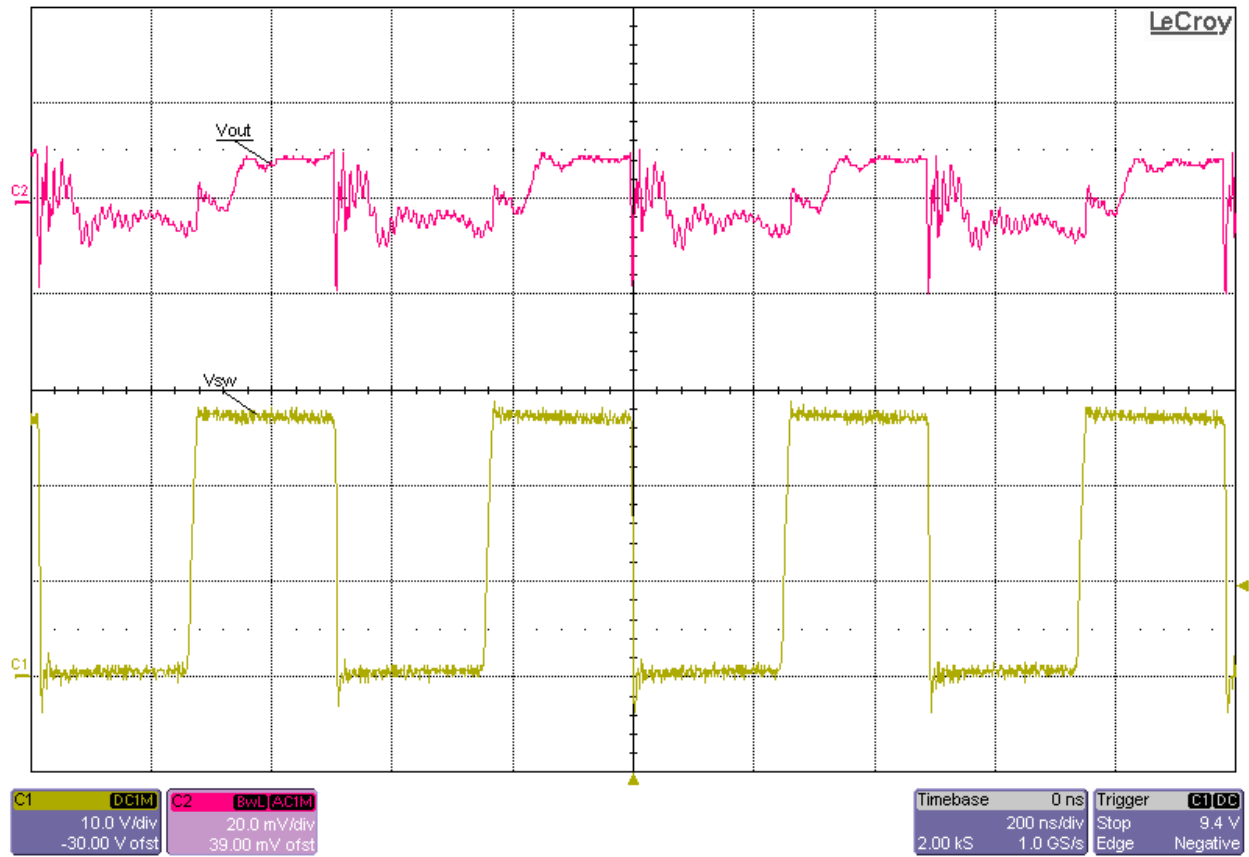


Switch Node Voltage and Output Voltage Ripple at 13.5Vin and 0.4A Load (Vripple ≈ 30mVp-p)

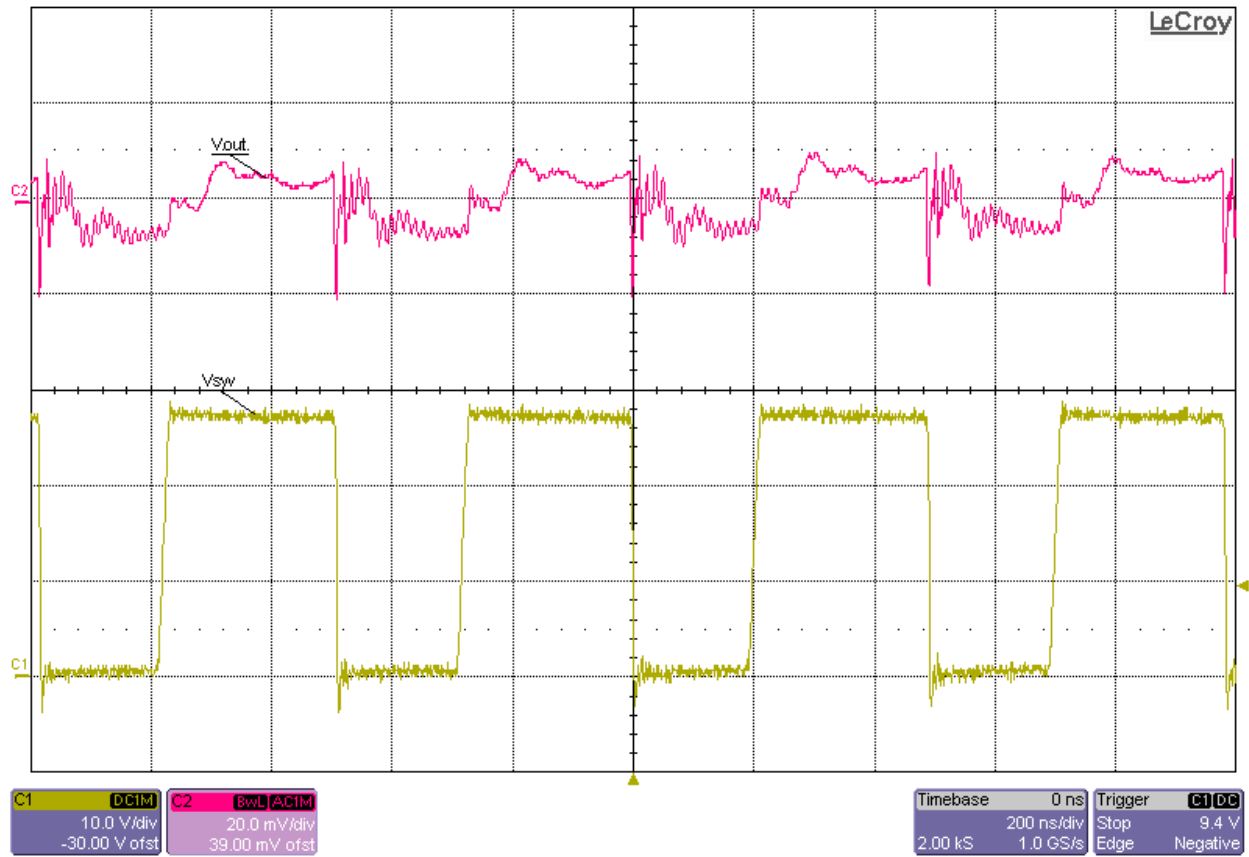


Switch Node Voltage and Output Voltage Ripple at 16Vin and 0.4A Load ($V_{ripple} \approx 30mV_{p-p}$)


6.4 Line Transient

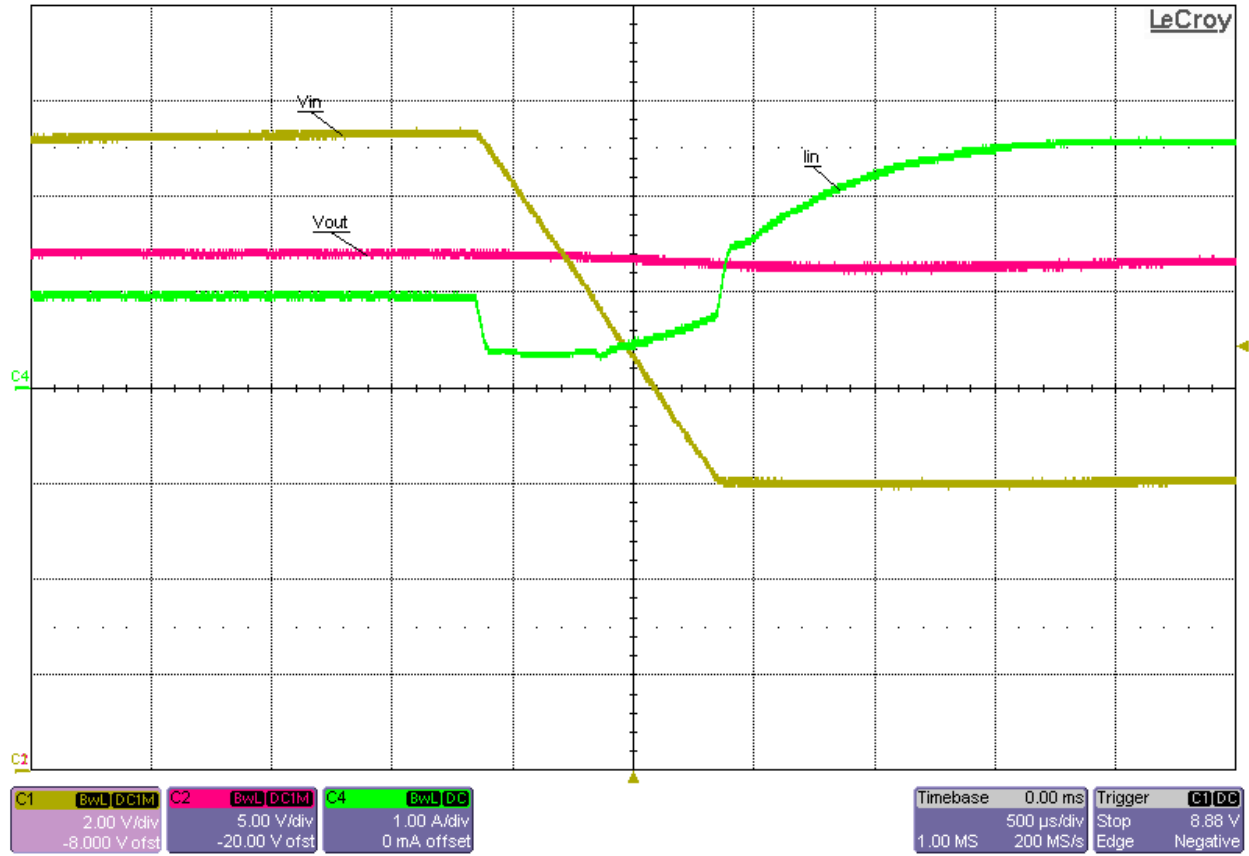


Line Transient from 13.5Vin to 6Vin (0.4A Constant-Current Load on the output)

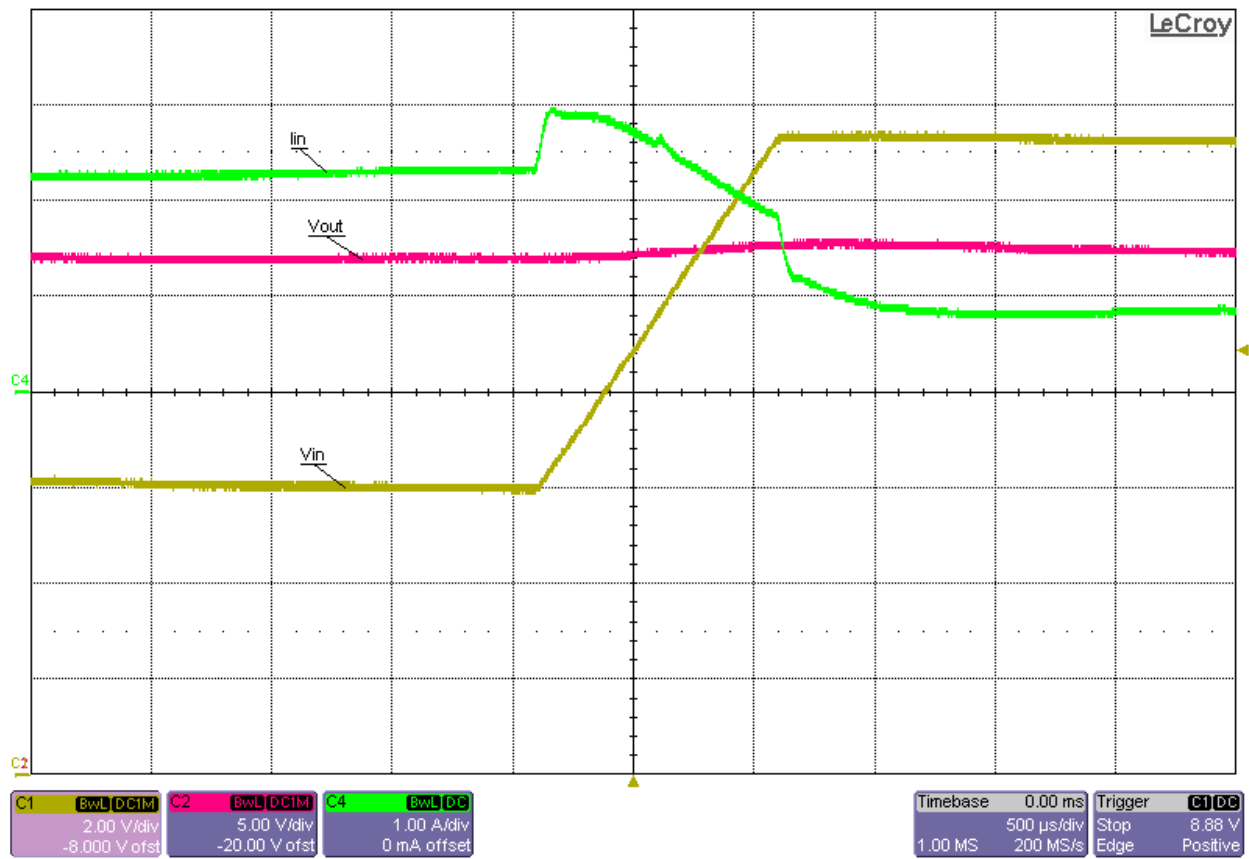

Line Transient from 6V_{in} to 13.5V_{in} (0.4A Constant-Current Load on the output)

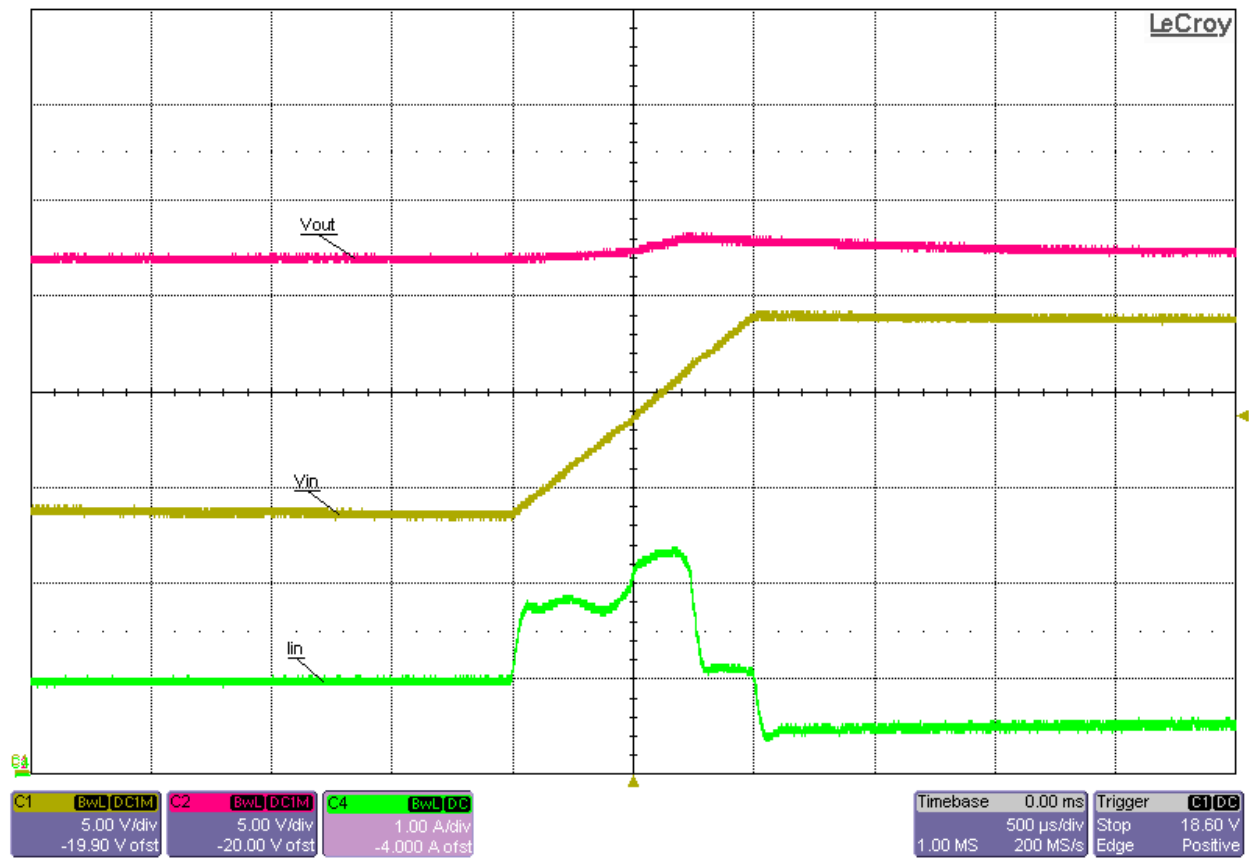

Line Transient from 13.5Vin to 24Vin (0.4A Constant-Current Load on the output)

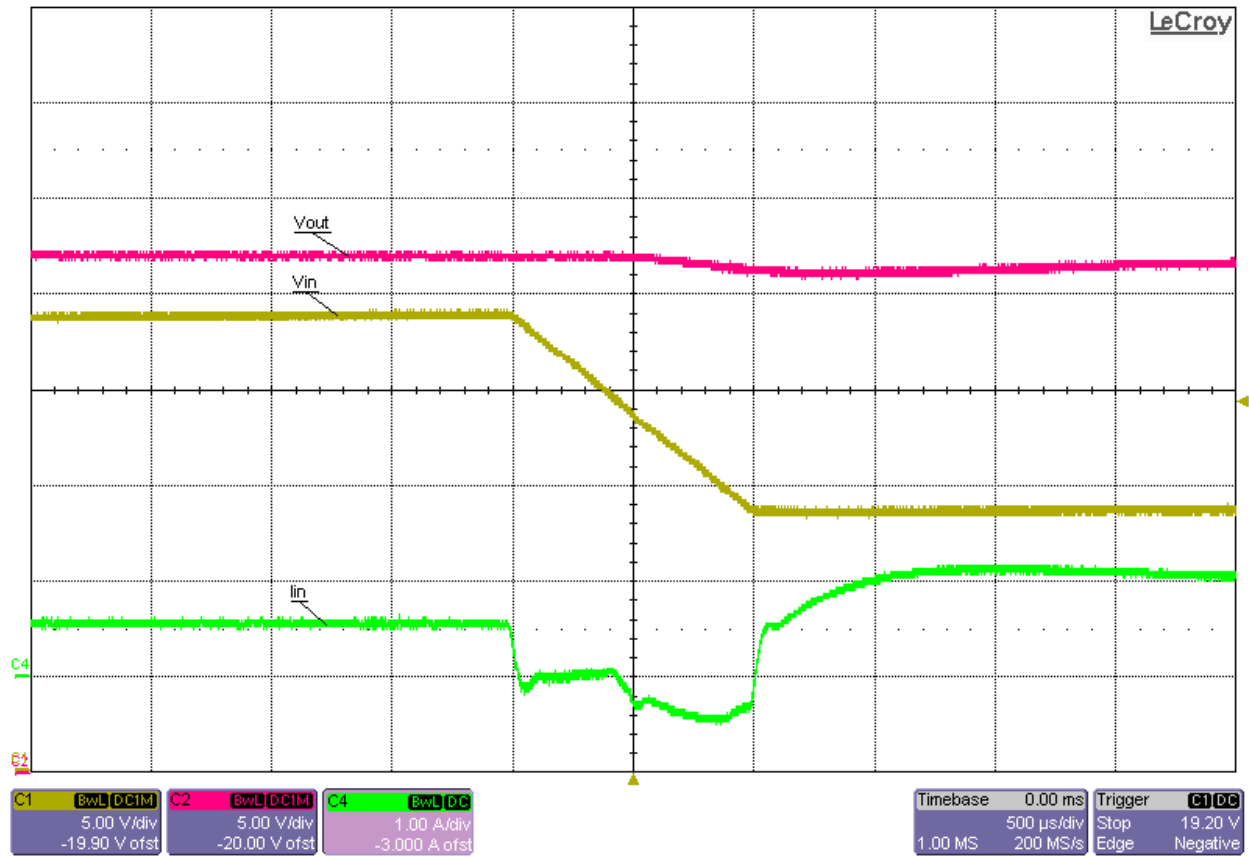

Line Transient from 24Vin to 13.5Vin (0.4A Constant-Current Load on the output)

IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2017, Texas Instruments Incorporated