

# Humidity Sensors



## Humidity Overview

Humidity Sensors can be found in many products, ranging from smart home assistants to wireless base stations. The function of these sensors allow careful monitoring of environmental conditions ranging from in-home use—alerting the user of any alarming conditions that may impact air quality—to monitoring expensive wireless equipment during events in weather that can impact communication and equipment performance. Aside from the applications listed above, humidity sensors are also found in:


- Refrigeration monitoring in cold-chain transports (ensuring shipped perishables arrive fresh)
- Clothing manufacturing processes
- Smart thermostats
- Inkjet printers
- HVAC systems
- Surveillance cameras

Traditional methods in recording humidity include the use of large mechanical Hygrometers, which largely rely on measurements of temperature, pressure, thermal conductivity, or mass change during moisture absorption. While these traditional devices provide highly detailed data after calibration, advances in technology have paved the path towards the use of a significantly smaller alternative of incorporating a humidity-sensing device in an integrated circuit. As Moore's Law has predicted the scaling of transistors in semiconductor technologies, it has also enabled the microminiaturization of sensing elements, which are now fairly commonplace in ICs.

Largely due to their chemical and physical properties over a wide range of characteristics, polymer thin film technologies are the primary sensing components in most humidity-sensing integrated circuits. This thin material reports and encapsulates humidity information in the form of capacitive, resistive, or thermal change.

The primary type of humidity information reported by these sensing ICs is Relative Humidity (RH). Relative Humidity can be described as the ratio of the amount of water vapor present in the air versus the amount of vapor the atmosphere can hold at a given temperature. The equation for relative humidity is shown in [Equation 1](#). The different Saturated Vapor densities (SVD) of water for a given temperature is shown in [Figure 1](#).

$$\text{Relative Humidity (\%)} = \frac{\text{actual vapor density}}{\text{saturation vapor density}} \times 100 \quad (1)$$

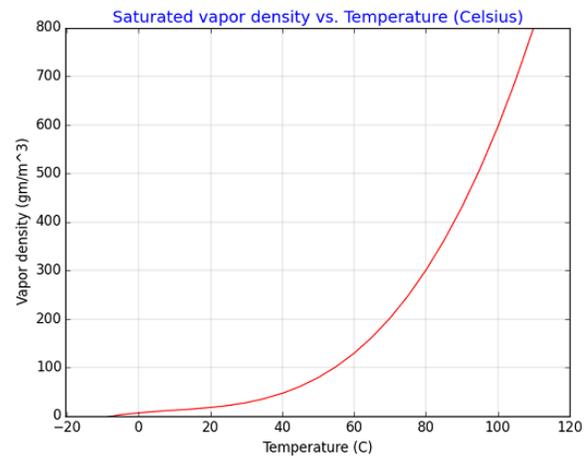


**Figure 1. Saturated Vapor Density vs Temperature Graph** <sup>(1)</sup>

Due to the limited moisture content the air can hold at a given temperature, it is apparent that RH will gradually increase to 100% if the air is cooled while maintaining constant moisture content. The point where the environment becomes completely saturated is often described as dew point, as any temperature below this saturation point will result in condensation.

## Humidity Sensing


One primary method in capturing Relative Humidity information is through capacitive sensing. These sensors consist of two conductive electrodes that sandwich a thin film polymer dielectric. As humidity increases, the polymer begins to absorb water molecules from the surrounding (air) environment, which alters the dielectric constant of the capacitor sensor. Depending on the technology and integration, this capacitance can be as low as <1 pF (low RH) to >800 pF (high RH). Response times can additionally range from a few seconds to minutes.

<sup>(1)</sup> The empirical fit equation of saturated vapor density vs temperature used to graph [Figure 1](#) was obtained from <http://hyperphysics.phy-astr.gsu.edu>

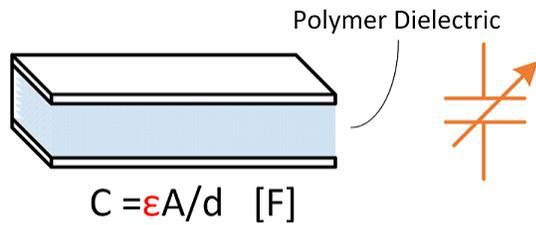

**Figure 2. Capacitor With Polymer Dielectric**

To measure the developed potential across the capacitor, an integrated signal-conditioning circuit amplifies the voltage produced across the sampling capacitor and multiplexes this value to an analog-to-digital converter (ADC). The ADC translates this voltage into a digital code, which is then passed through a digital block for linearization. If the sensor is digital, it typically incorporates an I2C or SPI interface that enables communication to a host controller. [Figure 3](#) shows the block diagram of the humidity and temperature sensor.

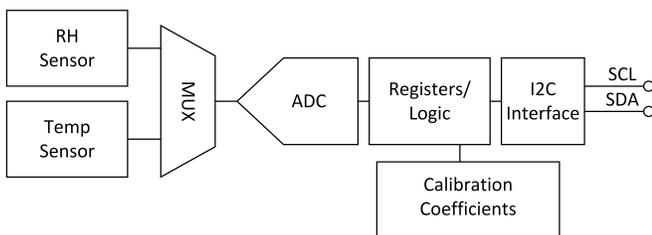

**Figure 3. Relative Humidity and Temperature Sensor Block Diagram**

## Texas Instruments Humidity Sensors

Texas Instruments provides a wide variety of environmental sensing solutions to capture humidity and temperature information. Two of TI's latest humidity sensor solutions are the HDC2010 and HDC2080 devices. Both devices include integrated humidity and temperature sensors that provide high accuracy measurements ( $\pm 2\%$  RH typical) with very low power consumption (550  $\mu$ A typical at 1.8 V). The HDC2010 features an ultra-compact 1.5-mm  $\times$  1.55-mm WLCSP (Wafer Level Chip Scale Package), while the HDC2080 features a 3-mm  $\times$  3-mm WSON package. The programmable sampling intervals, low inherent power consumption, and support for 1.8-V supply voltage, make the HDC20X0 devices well suited for battery-operated systems or applications with strict power-budget requirements.

As with all humidity sensors, the HDC devices must follow special guidelines regarding handling and storage that are not common with standard semiconductor devices. To ensure optimal performance and device longevity, the collateral in [Table 1](#) is recommended for review.

**Table 1. Recommended Collateral**

COLLATERAL	DESCRIPTION
Application Report	<a href="#">Humidity Sensor: Storage and Handling Guidelines</a>
Application Report	<a href="#">Optimizing Placement and Routing for Humidity Sensors</a>

**Table 2. External References**

Website Name	DESCRIPTION
Georgia State University Hyperphysics website	<a href="http://hyperphysics.phy-astr.gsu.edu">http://hyperphysics.phy-astr.gsu.edu</a>

## IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2018, Texas Instruments Incorporated