

DP83TG721x-Q1 1000BASE-T1 Automotive Ethernet PHY With Advanced TSN and AVB

1 Features

- IEEE802.3bp 1000BASE-T1 compliant
- OA TC10 compliant, <20µA sleep current
 - Local and remote wakeup and wake forwarding
- Advanced TSN
 - IEEE 1588v2/802.1AS time synchronization
 - Hardware time-stamping with integrated phase correction
 - Highly accurate 1pps signal (±15ns)
- Audio clocking
 - AVB IEEE 1722 media clock generation capability
 - Phase synchronized wall clock output: 1KHz to 50MHz
 - I2S and TDM8 SCLK/FSYNC/MCLK clock generation
- Open Alliance TC12 Interoperability and EMC compliant
 - OA EMC compliant
 - SAE J2962-3 EMC Compliant
- Integrated LPF on MDI pins
- MAC interfaces: RGMII and SGMII
- Supported I/O voltages: 3.3V, 2.5V, and 1.8V
- Pin compatible with TI's 100BASE-T1 PHYs and 1000BASE-T1 PHYs
 - Single board design for 100BASE-T1 and 1000BASE-T1 with required BOM change
- Diagnostic toolkit
 - Temperature, voltage, ESD monitor
 - Data throughput calculator: inbuilt MAC packet generator, counter and error checker
 - Signal quality indicator
 - TDR based open and short cable fault detection
 - Loopback modes
- AEC-Q100 qualified
 - IEC61000-4-2 ESD: ±8kV contact discharge

2 Applications

- [Telematics control unit \(TCU, TBOX\)](#)
- [AVB](#)
- [ADAS: LIDAR, RADAR, front camera](#)
- [Zonal, gateway, and body control](#)

3 Description

The DP83TG721-Q1 is an IEEE 802.3bp and Open Alliance compliant automotive 1000Base-T1 Ethernet physical layer transceiver. The DP83TG721-Q1 provides all physical layer functions needed to transmit and receive data over unshielded/shielded single twisted-pair cables. The device provides xMII flexibility with support for RGMII and SGMII MAC interfaces.

DP83TG721-Q1 supports OA TC10 low-power sleep feature (with wake forwarding) to reduce system power consumption when communication is not required. This device offers the Diagnostic Tool Kit, with an extensive list of real-time monitoring tools, debug tools and test modes.

DP83TG721-Q1 integrates IEEE 1588v2/802.1AS hardware time stamping and fractional PLL enabling highly accurate time synchronization. The fractional PLL enables frequency/phase synchronization of the Wall Clock eliminating need for external VCXO and generating wide range of time synchronized frequencies needed for Audio, Video and other ADAS applications.

DP83TG721-Q1 also integrates IEEE 1722 CRF decode to generate Media Clock (wall clock synchronized) for AVB and other Audio standards. The DP83TG721-Q1 is also capable of generating FSYNC/SCLK (wall clock synchronized) for I2S/TDM8 interface needed for audio applications.


The DP83TG721-Q1 is compatible to TI's 100BASE-T1 PHYs and 1000BASE-T1 PHYs enabling design scalability with single board for both speeds.

Device Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
DP83TG721R-Q1	VQFN (36)	6.00mm × 6.00mm
DP83TG721S-Q1	VQFN (36)	6.00mm × 6.00mm

- (1) For all available packages, see the orderable addendum at the end of the datasheet.
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.



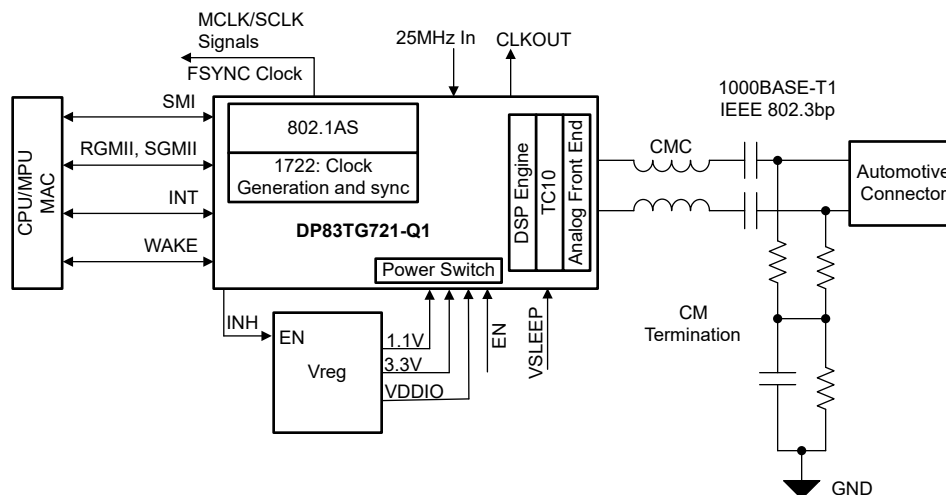

Simplified Schematic

4 Device Comparison Table

PART NUMBER	RGMII SUPPORT	SGMII SUPPORT	OPERATING TEMPERATURE
DP83TG721R-Q1	Yes	No	–40°C to 125°C
DP83TG721S-Q1	Yes	Yes	–40°C to 125°C

5 Application Information

The DP83TG721-Q1 is a single-port 1Gbps Automotive Ethernet PHY. The DP83TG721-Q1 supports IEEE 802.3bp and allows for connections to an Ethernet MAC through RGMII or SGMII. When using the device for Ethernet applications, it is necessary to meet certain requirements for normal operation. The following subsections are intended to assist in appropriate component selection and required connections.

5.1 Time Synchronization

The DP83TG721-Q1 integrates IEEE 1588v2/802.1AS timestamping and other additional hardware engine to offer sub-15 nanosecond synchronization accuracy.

The DP83TG721-Q1 also can provide a wide range of high quality time synchronized clock (from 1KHz to 50MHz) and generate synchronous patterns on GPIOs. This enables the DP83TG721-Q1 to achieve system-level synchronization for ADAS sensor data synchronization, Corner Radar Chirp synchronization, 1pps signal for GPS, LIDAR, V2x, and so forth.

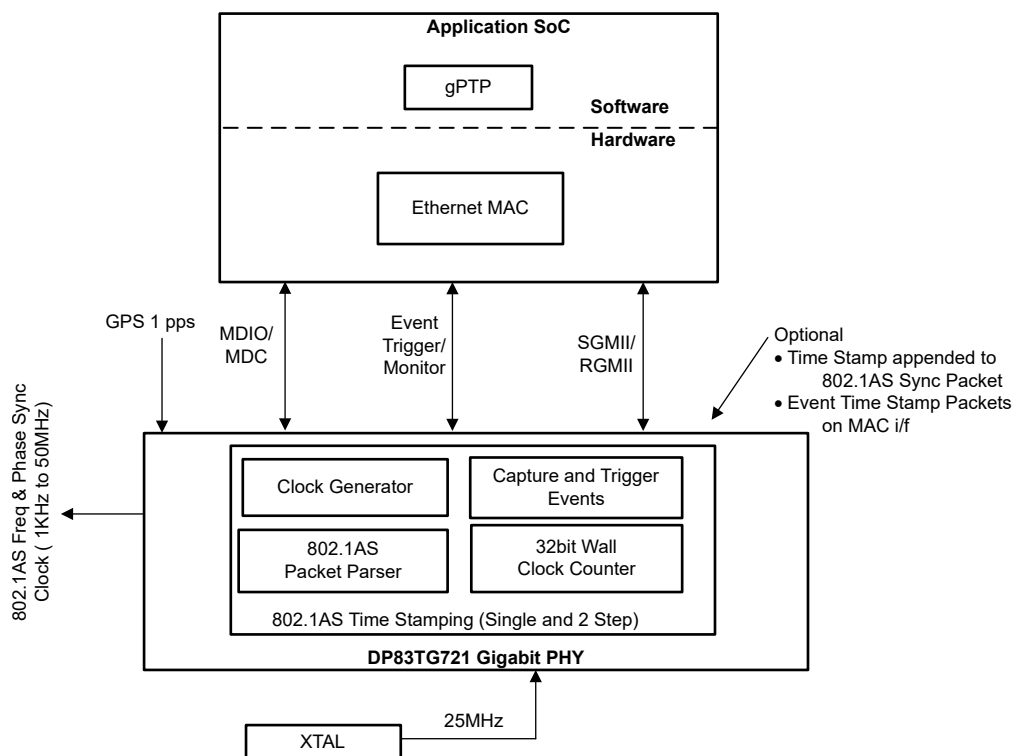


Figure 5-1. DP83TG721-Q1 802.1AS Time Synchronization Architecture

5.2 Integrated Audio Over Ethernet

DP83TG721-Q1 offers audio clocking solutions for AVB (audio video bridging) and other audio transports protocols (IES676, IEEE 1733 RTP, Dante®) by:

- Generating IEEE 1722 media clock with embedded CRF packet decode
- Synchronized clocks (FSYNC, BCLK, MCLK) for audio interface I2S and TDMx

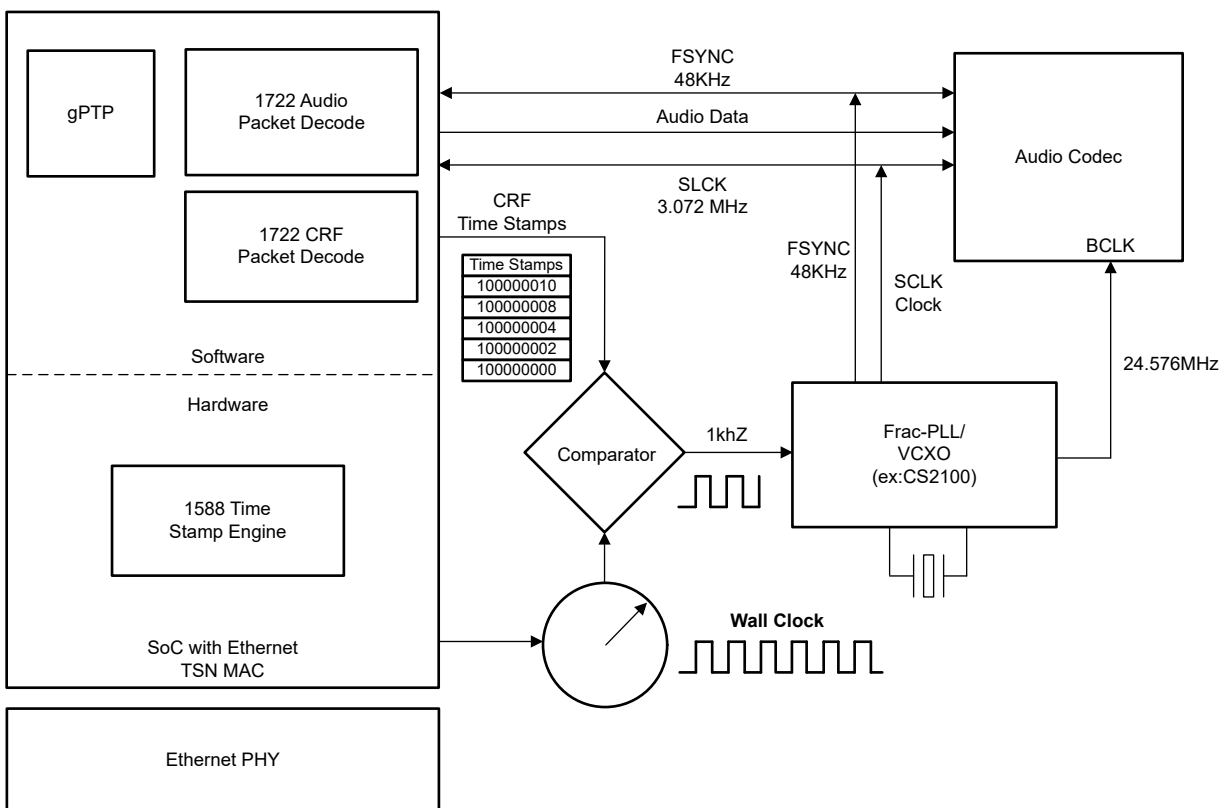


Figure 5-2. Typical Audio Over Ethernet Architecture

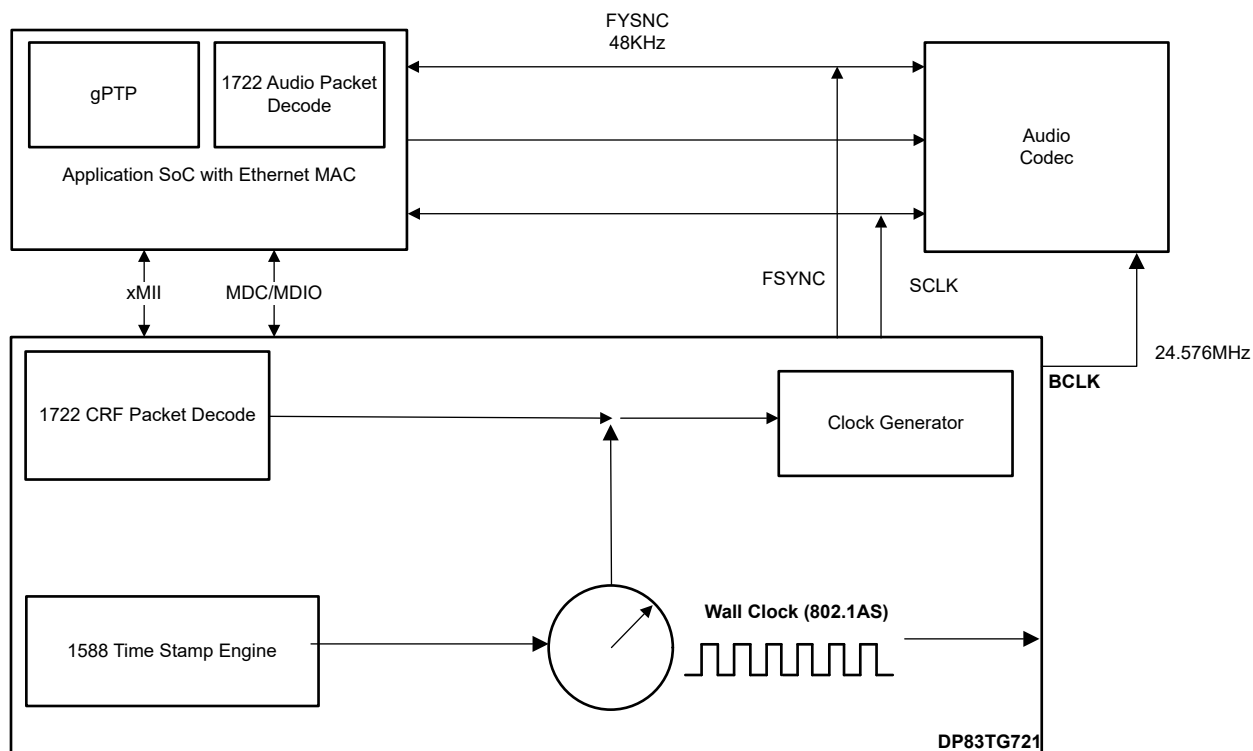


Figure 5-3. Audio Over Ethernet Architecture with DP83TG721-Q1

5.3 TC10 Sleep/Wake-Up

DP83TG721-Q1 supports Open Alliance TC10 Sleep/Wake-up feature. It supports local/remote wake-up, wake-forwarding, sleep negotiation as outlined in the TC10 specification.

The block diagram of a general system implementation of TC10 is as shown below

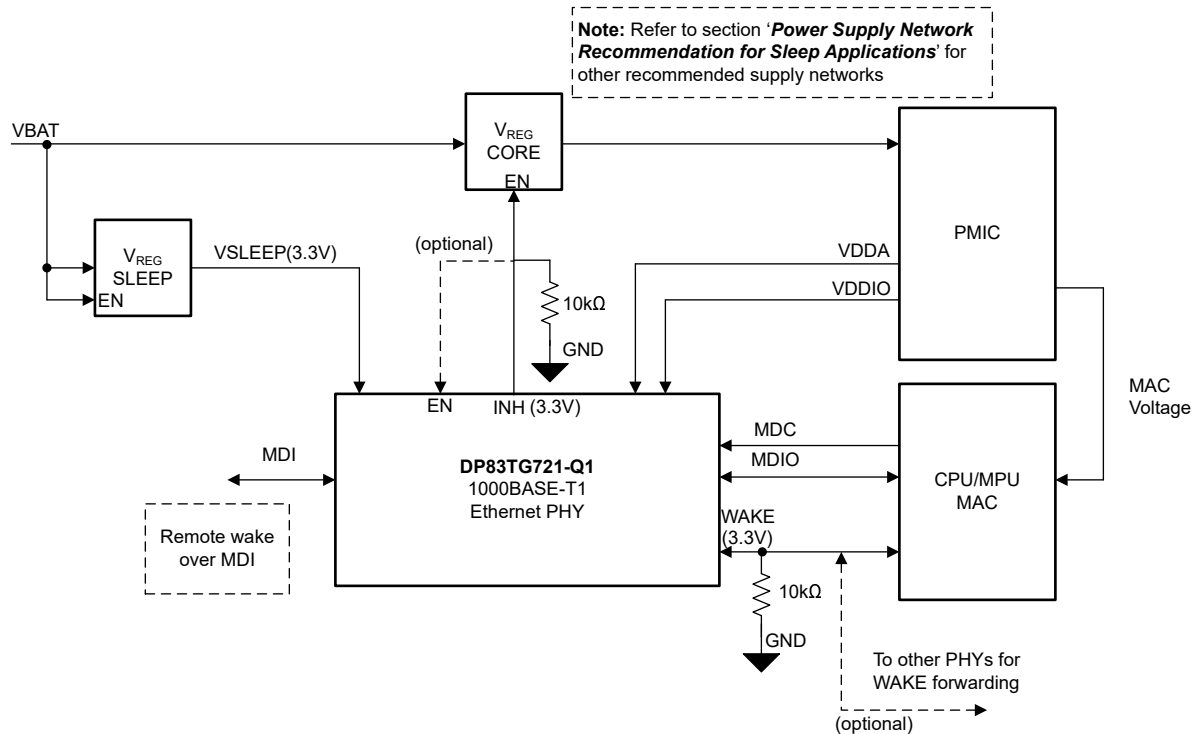


Figure 5-4. TC10 System Implementation Diagram

5.4 DP83TG721 EVM-MC and Software Support

The DP83TG721EVM-MC supports 1000Mbps speed and a DP83867 is provided for copper (1000BASE-T) media conversion using the RGMII MAC Interface.

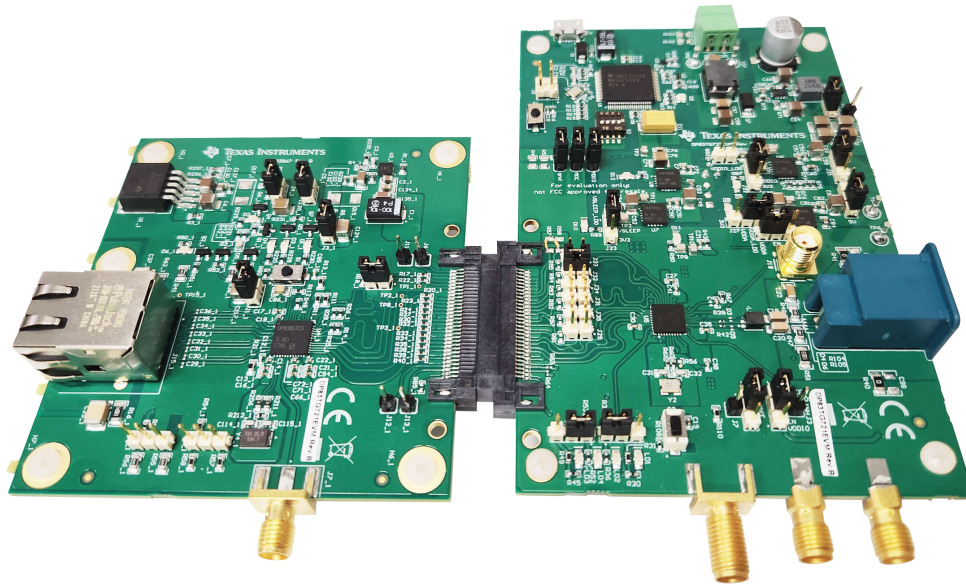


Figure 5-5. DP83TG721EVM-MC

The DP83TG721EVM-MC offers:

- Media converter: 1000BASE-T to 1000BASE-T1
- IEEE802.3bp compliant
- RGMII back-to-back configuration
- On-board MSP430F5529
 - USB2MDIO/DIEP support
- Status LEDs
 - Link
 - Link and activity
 - Power-on

5.5 Comparison of Device Features

The DP83TG721-Q1 enables very high time synchronization accuracy for automotive applications. Compared to the DP83TG720x series, the DP83TG721-Q1 offers advanced diagnostic tools, hardware time stamping, TC-10 low-power sleep, and has integrated Audio Video Bridging (AVB). [Comparison Between DP83TG720x and DP83TG721x](#) provides an overview of feature differences between the two.

Table 5-1. Comparison Between DP83TG720x and DP83TG721x

FEATURE	DP83TG720x-Q1	DP83TG721x-Q1
INTERFACES		
PMA/PMD	1000Base-T1	1000Base-T1
MAC Interface Support	RGMII only (for DP83TG720R-Q1) RGMII, SGMII (for DP83TG720S-Q1)	RGMII only (for DP83TG721R-Q1) RGMII, SGMII (for DP83TG721S-Q1)
FEATURES SUPPORTED		
Sleep/Wake functionality	Custom Sleep/Wake Implementation	OA TC10 Compliant Implementation
Internal Power Shutdown	No	Supported with EN pin

Table 5-1. Comparison Between DP83TG720x and DP83TG721x (continued)

FEATURE	DP83TG720x-Q1	DP83TG721x-Q1
Diagnostics	Signal Quality Indicator (SQI) Time Domain Reflectometry (TDR) Built-In Self Test (BIST) Compliance Test Modes	Signal Quality Indicator (SQI) Time Domain Reflectometry (TDR) Built-In Self Test (BIST) Compliance Test Modes
802.1AS Support	No	PTP Wall Clock Transmit and Receive Packet Parsing and Timestamping Event Triggering and Timestamping
AVB Clock Generation	No	IEEE1722 CRF packet decode Media, Bit and codec Clock Generation
POWER SUPPLY		
VDDA3P3V	3.3V ± 10%	3.3V ± 10%
VDDIO	1.8V ± 10% 2.5V ± 10% 3.3V ± 10%	1.8V ± 10% 2.5V ± 10% 3.3V ± 5%
VSLEEP	3.3V ± 10%	3.3V ± 10%
VDD	0.95V - 1.1V	1.05V - 1.21V

6 Device and Documentation Support

Note

TI is transitioning to use more inclusive terminology. Some language may be different than what you would expect to see for certain technology areas.

6.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

6.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

6.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

Dante® is a registered trademark of Audinate Pty Ltd.

All trademarks are the property of their respective owners.

6.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

6.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

7 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision A (June 2024) to Revision B (September 2026)	Page
• Deleted MII and RMII from MAC interfaces.....	1
• Deleted CQI throughout document.....	1
• Deleted new DIEP debug interface experience.....	6

Changes from Revision * (May 2024) to Revision A (June 2024)	Page
• First Public Release.....	9

8 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
DP83TG721RRHARQ1	Active	Production	VQFN (RHA) 36	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	721R
DP83TG721RRHARQ1.A	Active	Production	VQFN (RHA) 36	2500 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	721R
DP83TG721SRHARQ1	Active	Production	VQFN (RHA) 36	3000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	721S
DP83TG721SRHARQ1.A	Active	Production	VQFN (RHA) 36	3000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	721S

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION

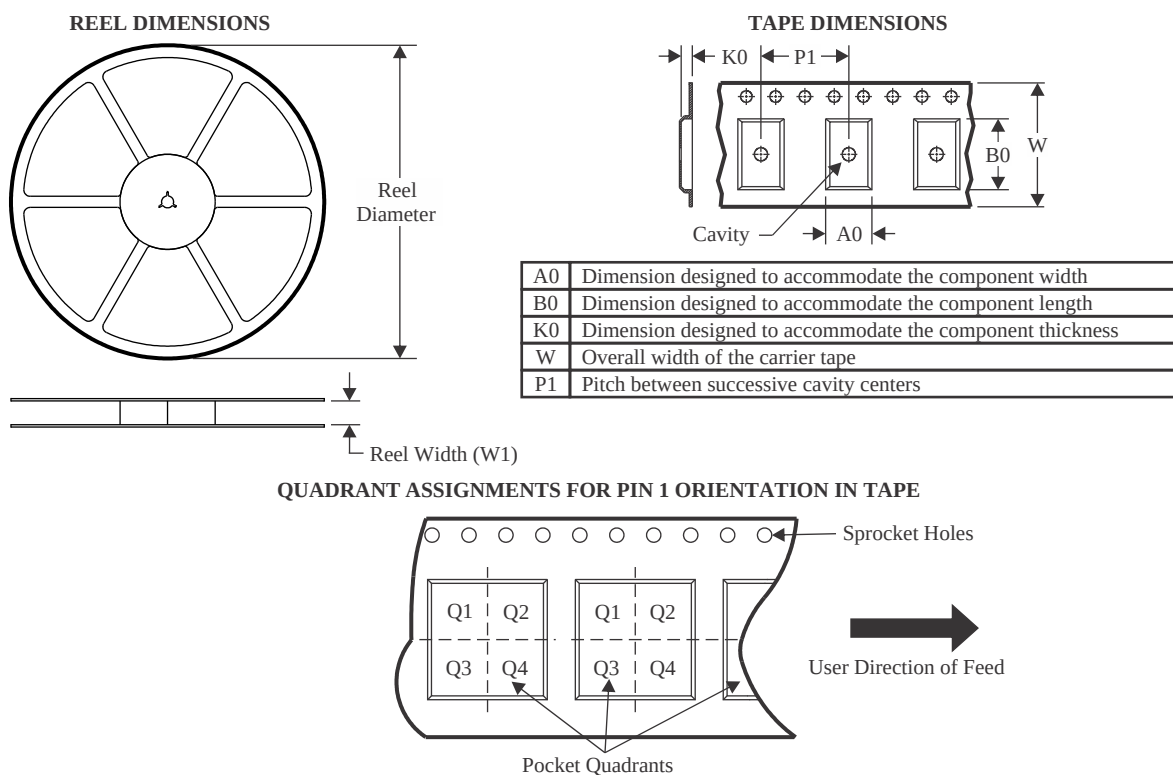

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DP83TG721RRHARQ1	VQFN	RHA	36	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
DP83TG721RRHARQ1	VQFN	RHA	36	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
DP83TG721SRHARQ1	VQFN	RHA	36	3000	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
DP83TG721SRHARQ1	VQFN	RHA	36	3000	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS

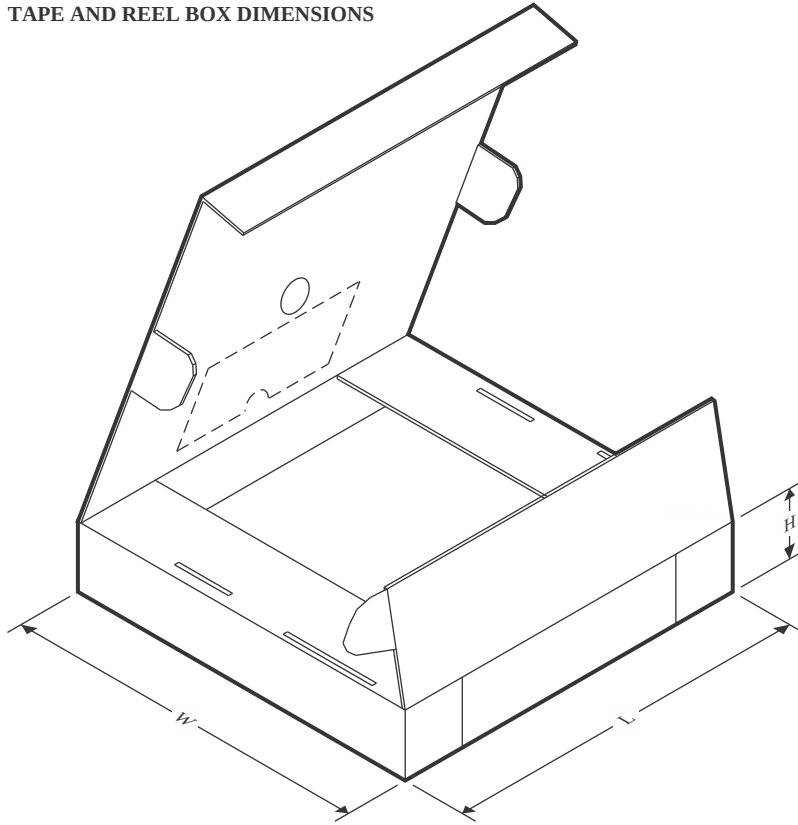

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DP83TG721RRHARQ1	VQFN	RHA	36	2500	367.0	367.0	38.0
DP83TG721RRHARQ1	VQFN	RHA	36	2500	367.0	367.0	35.0
DP83TG721SRHARQ1	VQFN	RHA	36	3000	367.0	367.0	38.0
DP83TG721SRHARQ1	VQFN	RHA	36	3000	367.0	367.0	35.0

GENERIC PACKAGE VIEW


RHA 36



VQFN - 1 mm max height

6 x 6, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

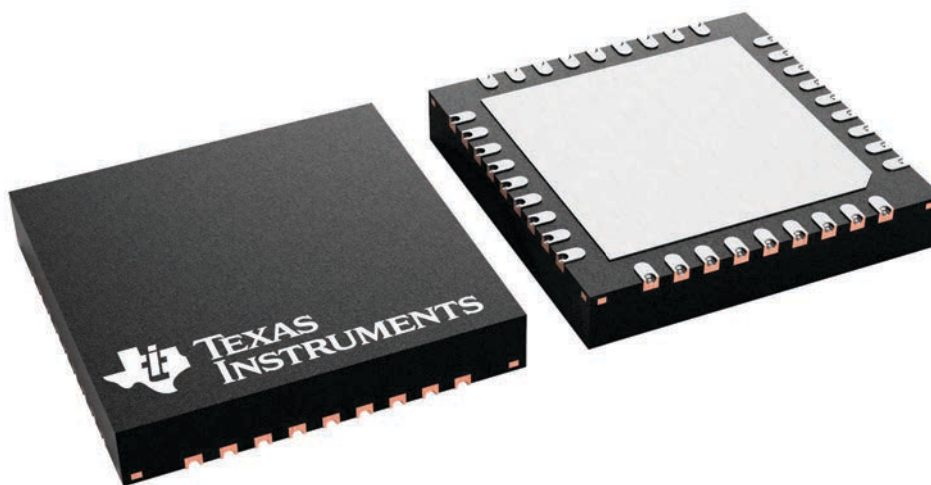

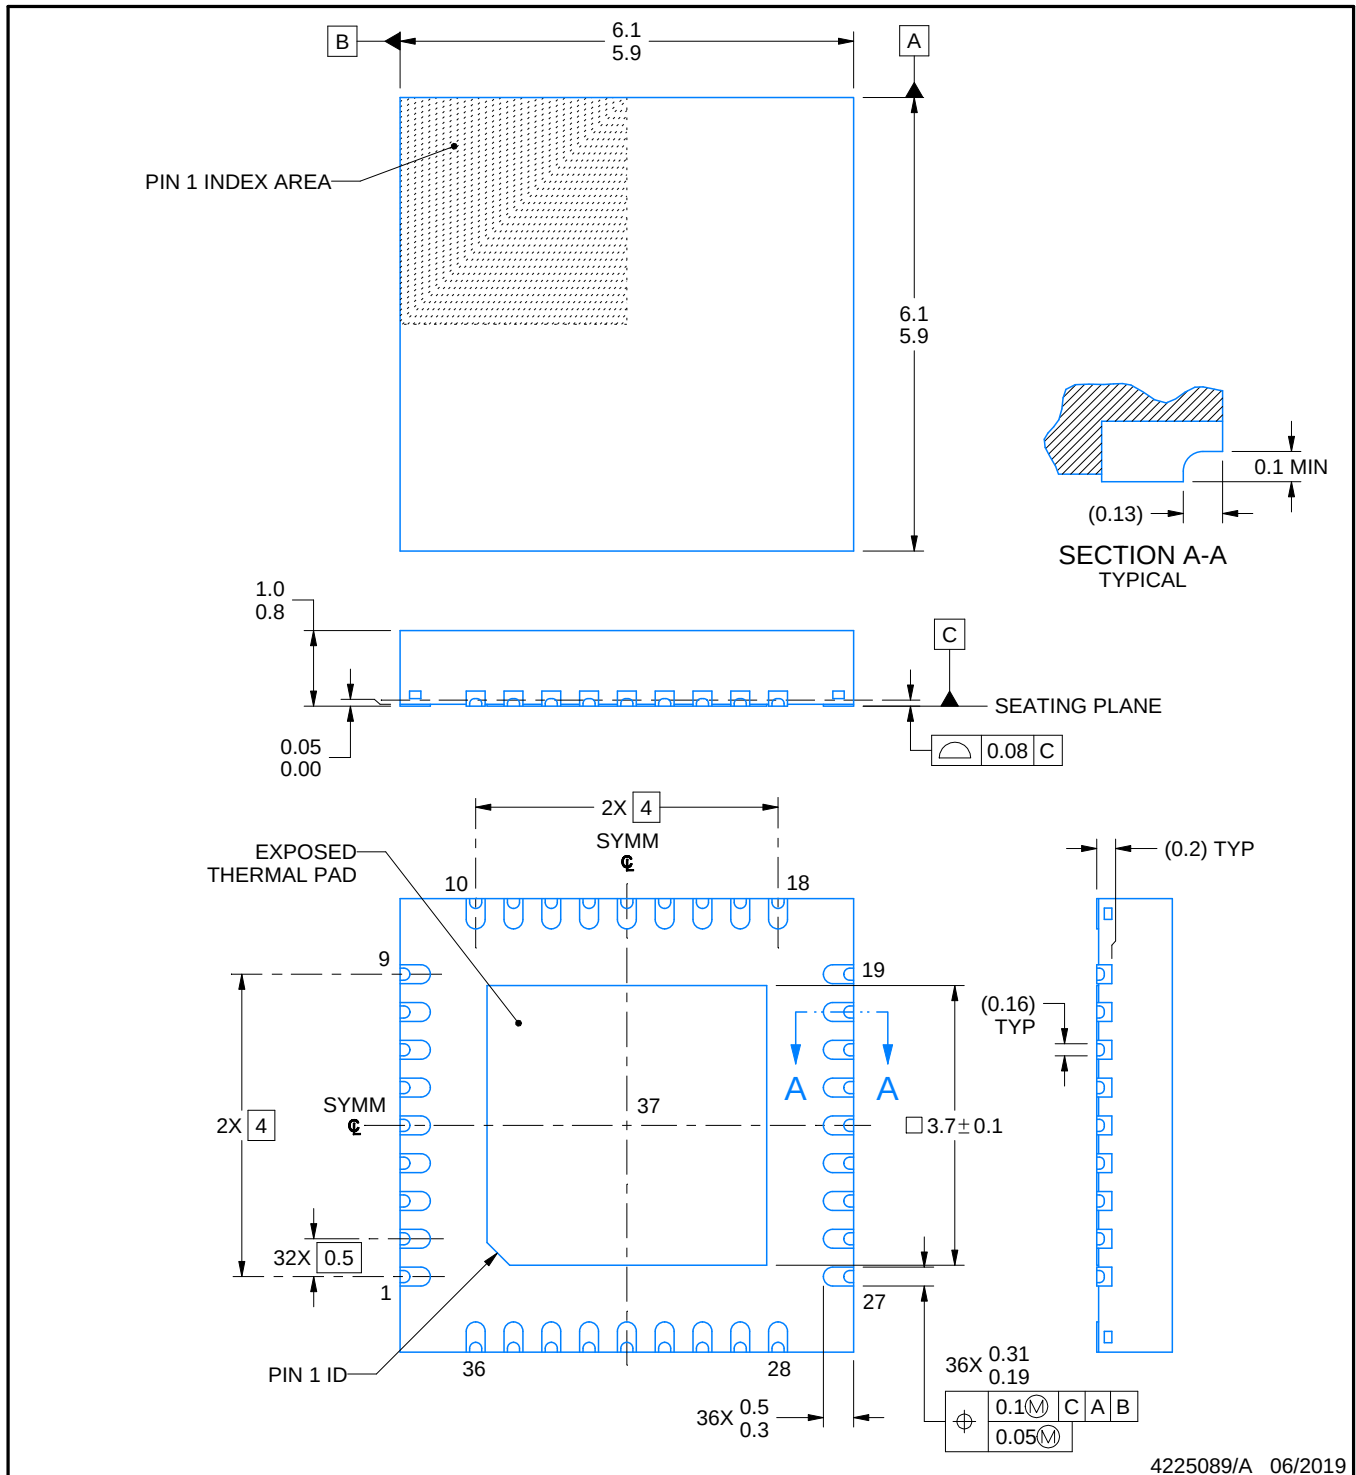

4225089/A 06/2019

NOTES:



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT

RHA0036A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

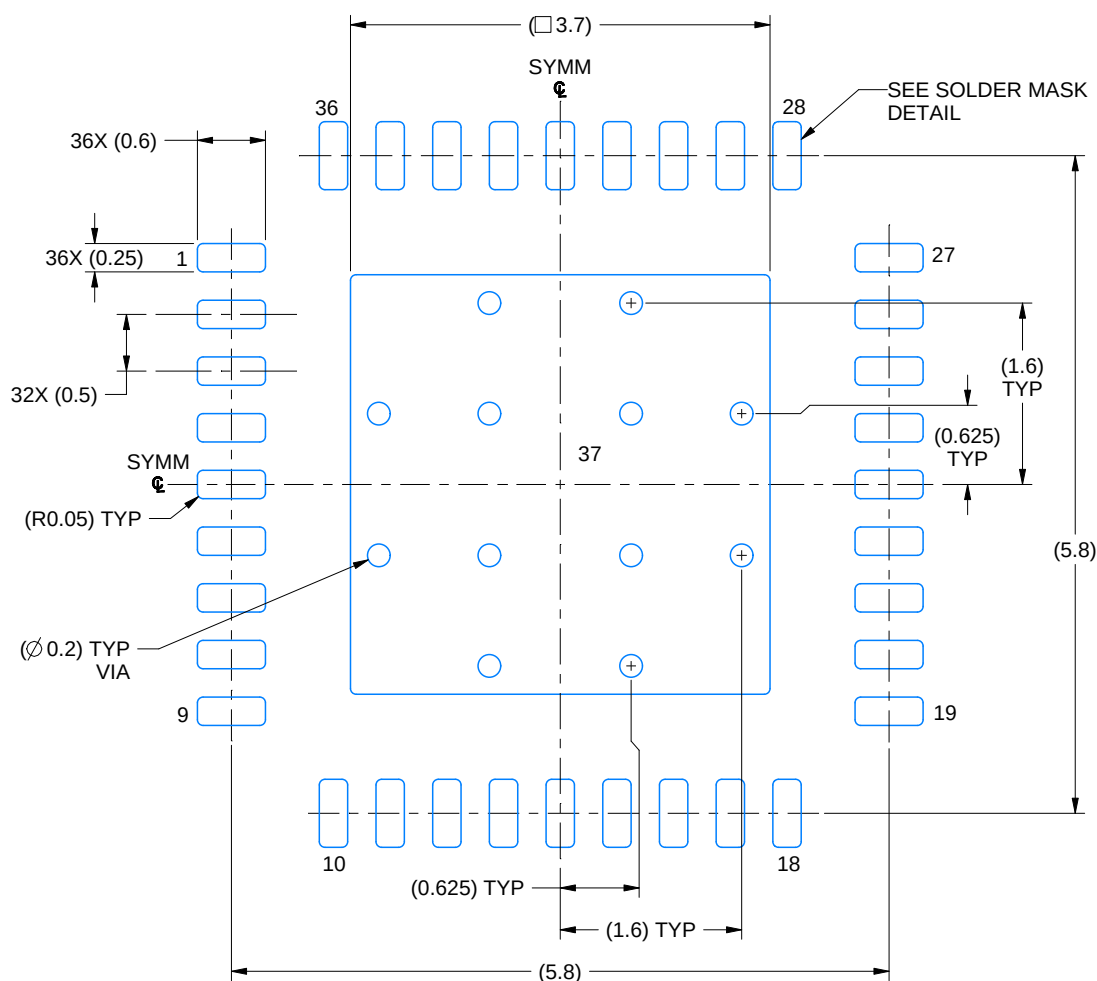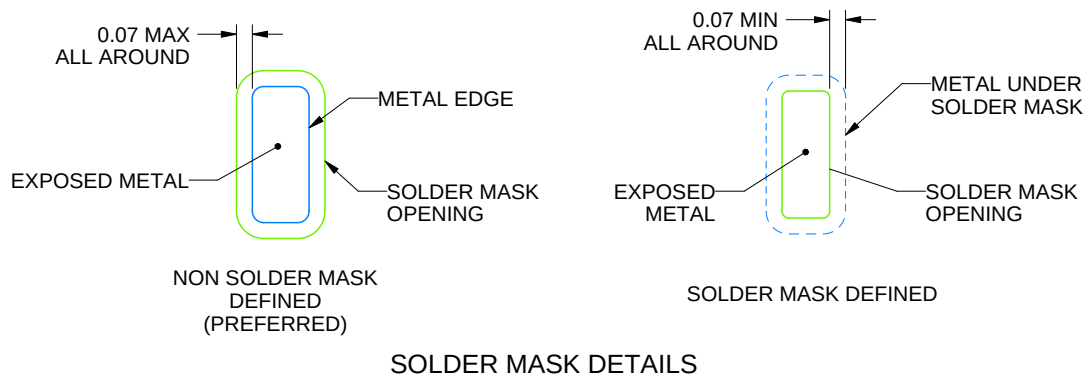

4225089/A 06/2019

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RHA0036A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

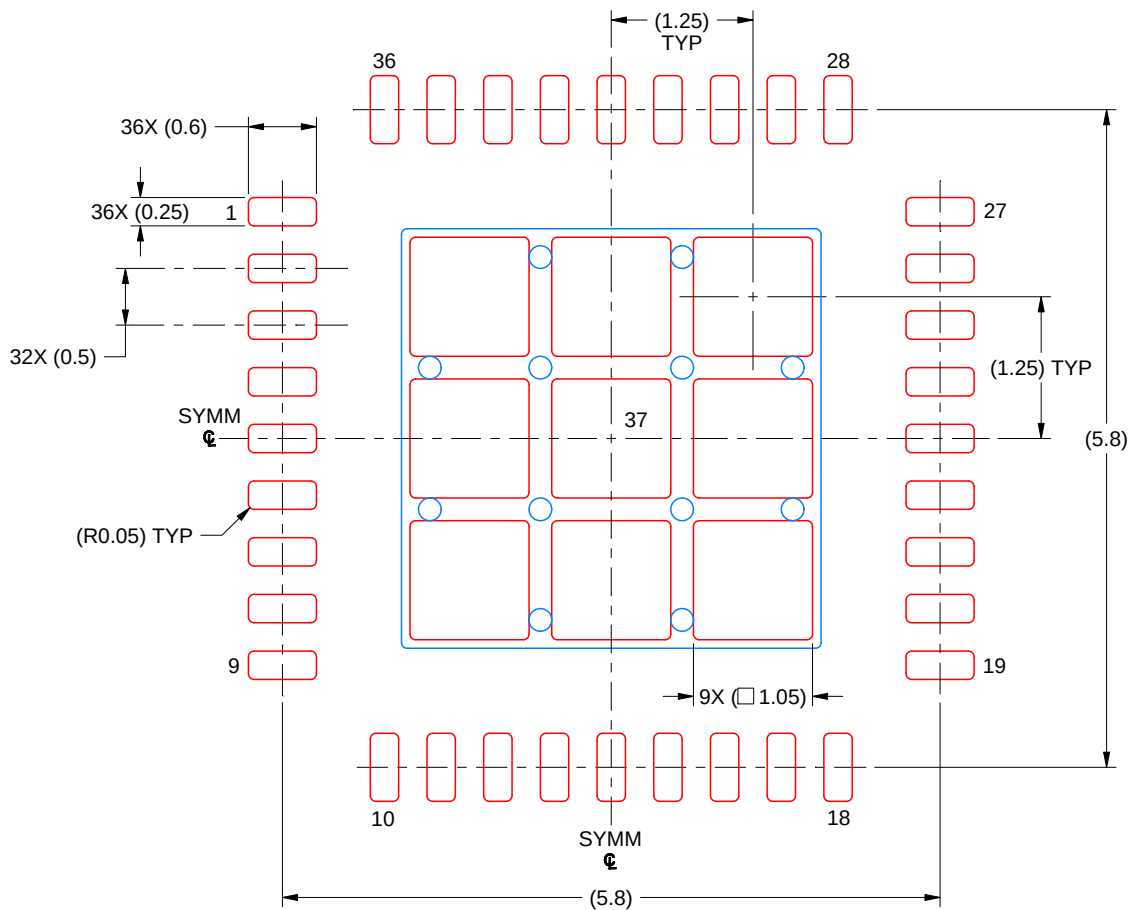

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 15X

EXPOSED PAD 37
72% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4225089/A 06/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025