


LM749x0-Q1 Automotive Ideal Diode With Circuit Breaker, Undervoltage, and Overvoltage Protection With Fault Output

1 Features

- AEC-Q100 qualified for automotive applications
 - Device temperature grade 1:
 - 40°C to +125°C ambient operating temperature range
- Functional Safety-Capable
 - [Documentation available to aid functional safety system design](#)
- 3V to 65V input range
- 74V Absolute Maximum Rating for LM74910H-Q1
- Reverse input protection down to –65V
- Drives external back-to-back N-Channel MOSFETs in common drain configuration
- Ideal diode operation with 10.5mV A to C forward voltage drop regulation
- Low reverse detection threshold (–10.5mV) with fast turn off response (0.5µs)
- 20mA peak gate (DGATE) turn on current
- 2.6A peak DGATE turnoff current
- Adjustable overcurrent and short circuit protection
- Analog current monitor output with 2% accuracy for LM74910H-Q1
- Adjustable overvoltage and undervoltage protection
- SLEEP mode OCP Retry in LM74910H-Q1
- Low 2.5µA shutdown current (EN=Low)
- SLEEP mode with 6µA current (EN=High, $\overline{\text{SLEEP}}$ =Low)
- Meets automotive ISO7637 transient requirements with a suitable TVS diode
- Available in space saving 24-pin VQFN package

2 Applications

- [Automotive battery protection](#)
 - [ADAS domain controller](#)
 - [Infotainment and cluster](#)
 - [Automotive audio: external amplifier](#)
- [Active ORing for redundant power](#)

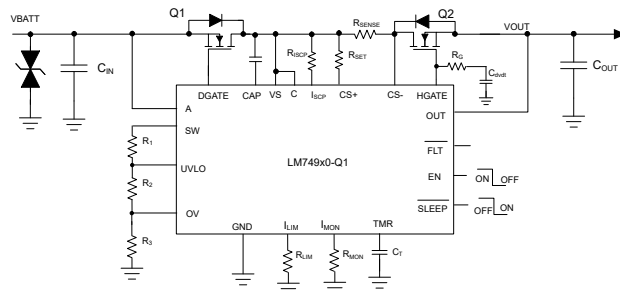

Typical Application Diagram


3 Description

The LM749x0-Q1 ideal diode controller drives and controls external back to back N-Channel MOSFETs to emulate an ideal diode rectifier with power path ON/OFF control with overcurrent and overvoltage protection. The wide input supply of 3V to 65V allows protection and control of 12V and 24V automotive battery powered ECUs. The device can withstand and protect the loads from negative supply voltages down to –65V. An integrated ideal diode controller (DGATE) drives the first MOSFET to replace a Schottky diode for reverse input protection and output voltage holdup. With a second MOSFET in the power path the device allows load disconnect (ON/OFF control) in case of overcurrent and overvoltage events using HGATE control. The device has integrated current sense amplifier which provides accurate current monitoring with adjustable overcurrent and short circuit thresholds. The device features an adjustable overvoltage cut-off protection feature. The device features a SLEEP mode which enables ultra-low quiescent current consumption (6µA) and at the same time providing refresh current to the always ON loads when vehicle is in the parking state. The LM749x0-Q1 has a maximum voltage rating of 65V.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	BODY SIZE (NOM)
LM74900-Q1	RGE (VQFN 24)	4.00mm × 4.00mm
LM74910-Q1		
LM74910H-Q1		

(1) For all available packages, see the orderable addendum at the end of the data sheet.

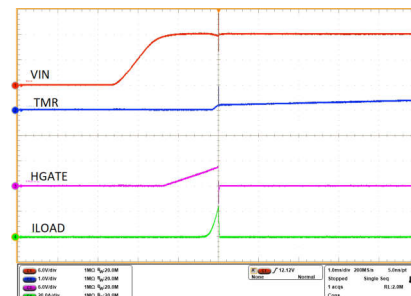

Device Start-Up With Overcurrent Protection



Table of Contents

1 Features	1	9 Applications and Implementation	26
2 Applications	1	9.1 Application Information.....	26
3 Description	1	9.2 Typical 12V Reverse Battery Protection Application.....	26
4 Device Comparison Table	3	9.3 Addressing Automotive Input Reverse Battery Protection Topologies With LM749x0-Q1.....	38
5 Pin Configuration and Functions	3	9.4 Power Supply Recommendations.....	38
6 Specifications	5	9.5 Layout.....	39
6.1 Absolute Maximum Ratings.....	5	10 Device and Documentation Support	41
6.2 ESD Ratings.....	6	10.1 Third-Party Products Disclaimer.....	41
6.3 Recommended Operating Conditions.....	6	10.2 Receiving Notification of Documentation Updates.....	41
6.4 Thermal Information.....	6	10.3 Support Resources.....	41
6.5 Electrical Characteristics.....	6	10.4 Trademarks.....	41
6.6 Switching Characteristics.....	9	10.5 Electrostatic Discharge Caution.....	41
6.7 Typical Characteristics.....	11	10.6 Glossary.....	41
7 Parameter Measurement Information	15	11 Revision History	41
8 Detailed Description	16	12 Mechanical, Packaging, and Orderable Information	42
8.1 Overview.....	16		
8.2 Functional Block Diagram.....	17		
8.3 Feature Description.....	17		
8.4 Device Functional Modes.....	24		

4 Device Comparison Table

Parameter	LM74900-Q1	LM74910-Q1	LM74910H-Q1
Charge pump strength	2.7mA	4.2mA	4.2mA
Input absolute maximum voltage	70V	70V	74V
Current monitor output accuracy	±12.5% (V _{SENSE} = 20mV)	±12.5% (V _{SENSE} = 20mV)	±2% (V _{SENSE} = 30mV)
SLEEP mode overcurrent response	Latch-Off	Latch-Off	Auto-Retry

5 Pin Configuration and Functions

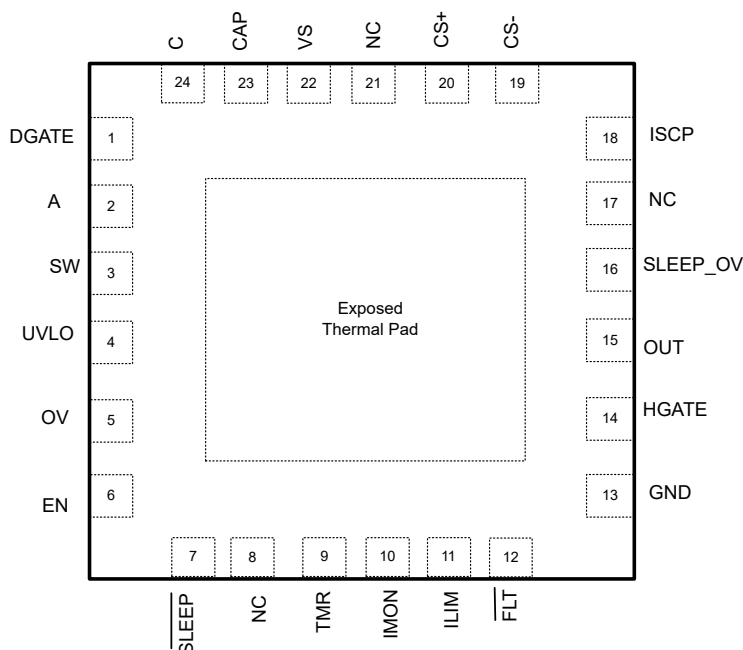


Figure 5-1. RGE Package, 24-Pin VQFN (Transparent Top View)

Table 5-1. Pin Functions

PIN		TYPE ⁽¹⁾	DESCRIPTION
NAME	NO.		
DGATE	1	O	Diode controller gate drive output. Connect to the GATE of the external MOSFET.
A	2	I	Anode of the ideal diode. Connect to the source of the external MOSFET.
SW	3	I	Voltage sensing disconnect switch terminal. VSNS and SW are internally connected through a switch. Use SW as the top connection of the battery sensing or OV resistor ladder network. When EN is pulled low, the switch is OFF disconnecting the resistor ladder from the battery line thereby cutting off the leakage current. If the internal disconnect switch between VSNS and SW is not used then short them together and connect to VS pin.
UVLO	4	I	Adjustable undervoltage threshold input. Connect a resistor ladder across SW to UVLO terminal to GND. When the voltage at UVLO goes below the undervoltage cut-off threshold then the HGATE is pulled low turning OFF the HSFET. HGATE turns ON when the sense voltage goes above the UVLO falling threshold.
OV	5	I	Adjustable overvoltage threshold input. Connect a resistor ladder across SW to OV terminal. When the voltage at OVP exceeds the overvoltage cut-off threshold then the HGATE is pulled low turning OFF the HSFET. HGATE turns ON when the sense voltage goes below the OVP falling threshold.

Table 5-1. Pin Functions (continued)

PIN		TYPE ⁽¹⁾	DESCRIPTION
NAME	NO.		
EN	6	I	EN input. Connect to VS pin for always ON operation. Can be driven externally from a microcontroller I/O. Pulling it low below $V_{(ENF)}$ makes the device enter into low Iq shutdown mode.
SLEEP	7	I	Active low SLEEP mode input. Can be driven from the microcontroller. When pulled low device enters into low power state with charge pump and gate drive turned off. Internal bypass switch provides output voltage with limited current capacity.
NC	8	—	No connect.
TMR	9	I	Fault timer input. A capacitor across TMR pin to GND sets the times for fault warning, fault turn off (FLT), and retry periods. Leave it open for fastest setting. Connect TMR to GND to disable overcurrent protection.
IMON	10	O	Analog current monitor output. This pin sources a scaled down ratio of current through the external current sense resistor R_{SNS} . A resistor from this pin to GND converts current to proportional voltage. If unused, leave it floating.
ILIM	11	I	Overcurrent detection setting. A resistor across ILIM to GND sets the overcurrent comparator threshold. Connect ILIM to GND if overcurrent protection feature is not desired.
FLT	12	O	Open drain fault output. FLT pin is pulled low in case of UVLO, OV, OCP, or SCP event.
GND	13	G	Connect to the system ground plane.
HGATE	14	O	GATE driver output for the HSFET. Connect to the GATE of the external FET.
OUT	15	I	Connect to the output rail (external MOSFET source).
SLEEP_OV	16	I	SLEEP mode overvoltage protection pin. Connect this pin to VS for overvoltage cut-off functionality. Connect to OUT for overvoltage clamp functionality.
NC	17	—	No connect.
ISCP	18	I	Short circuit detection threshold setting. Leave ISCP floating if short circuit protection is not desired. When ISCP is connected to CS+, device sets an internal fix threshold of 20mV.
CS–	19	I	Current sense negative input.
CS+	20	I	Current sense positive input. Connect a 50 to 100mΩ resistor across CS+ to the external current sense resistor.
NC	21	—	No connect.
VS	22	P	Input power supply to the IC. Connect VS to middle point of the common drain back to back MOSFET configuration. Connect a 100nF capacitor across VS and GND pins.
CAP	23	O	Charge pump output. Connect a 100nF capacitor across CAP and VS pins.
C	24	I	Cathode of the ideal diode. Connect to the drain of the external MOSFET.
RTN	Thermal Pad	—	Leave exposed pad floating. Do not connect to GND plane.

(1) I = input, O = output, I/O = input and output, P = power, G = ground

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Input Pins	A to GND (LM74900-Q1, LM74910-Q1)	–65	70	V
	A to GND (LM74910H-Q1)	–65	74	V
	VS, CS+, CS-, ISCP, OUT, SLEEP_OV to GND (LM74900-Q1, LM74910-Q1)	–1	70	
	VS, CS+, CS-, ISCP, OUT, SLEEP_OV to GND (LM74910H-Q1)	–1	74	
	SW, C, EN, $\overline{\text{SLEEP}}$, FLT, UVLO, OV to GND, $V_{(A)} > 0\text{ V}$ (LM74900-Q1, LM74910-Q1)	–0.3	70	
	SW, C, EN, $\overline{\text{SLEEP}}$, FLT, UVLO, OV to GND, $V_{(A)} > 0\text{ V}$ (LM74910H-Q1)	–0.3	74	
	SW, C, EN, $\overline{\text{SLEEP}}$, FLT, UVLO, OV to GND, $V_{(A)} \leq 0\text{ V}$ (LM74900-Q1, LM74910-Q1)	$V_{(A)}$	$(70 + V_{(A)})$	
	SW, C, EN, $\overline{\text{SLEEP}}$, FLT, UVLO, OV to GND, $V_{(A)} \leq 0\text{ V}$ (LM74910H-Q1)	$V_{(A)}$	$(74 + V_{(A)})$	
	RTN to GND	–65	0.3	
	$I_{\text{SW}}, I_{\text{FLT}}$	–1	10	mA
	TMR, ILIM	–0.3	5.5	V
	$I_{\text{EN}}, I_{\text{UVLO}}, I_{\text{OV}} V_{(A)} > 0\text{ V}$	–1		mA
	$I_{\text{EN}}, I_{\text{UVLO}}, I_{\text{OV}} V_{(A)} \leq 0\text{ V}$	Internally limited		
Input Pins	ISCP, CS+ to CS-	–0.3	0.3	V
Output Pins	OUT to VS	–65	5	V
	CAP to VS	–0.3	15	
	CAP to A (LM74900-Q1, LM74910-Q1)	–0.3	85	
	CAP to A (LM74910H-Q1)	–0.3	88	
	DGATE to A	–0.3	15	
	FLT to GND (LM74900-Q1, LM74910-Q1)	–0.3	70	
	FLT to GND (LM74910H-Q1)	–0.3	74	
	IMON	–1	5.5	
	HGATE to OUT	–0.3	15	
Output to Input Pins	C to A (LM74900-Q1, LM74910-Q1)	–5	85	
	C to A (LM74910H-Q1)	–5	88	
Operating junction temperature, T_j ⁽²⁾		–40	150	°C
Storage temperature, T_{stg}		–40	150	

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) High junction temperatures degrade operating lifetimes. Operating lifetime is de-rated for junction temperatures greater than 125°C.

6.2 ESD Ratings

				VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾		±2000	V
		Charged device model (CDM), per AEC Q100-011	Corner pins	±750	
			Other pins	±500	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	NOM	MAX	UNIT
Input Pins	A to GND	–60		65	V
	VS, SW, CS+, CS–, ISCP to GND	0		65	V
	EN, UVLO, OV, SLEEP to GND	0		65	V
Output pins	FLT to GND	0		65	V
Output pins	IMON to GND	0		5	V
External Capacitance	CAP to A, VS to GND, A to GND	0.1			μF
External MOSFET max VGS rating	DGATE to A and HGATE to OUT	15			V
T _j	Operating Junction temperature ⁽²⁾	–40		150	°C

(1) Recommended Operating Conditions are conditions under which the device is intended to be functional. For specifications and test conditions, see Electrical Characteristics.

(2) High junction temperatures degrade operating lifetimes. Operating lifetime is de-rated for junction temperatures greater than 125°C.

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		LM749x0-Q1	UNIT
		RGE (VQFN)	
		24 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	44	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	38.3	°C/W
R _{θJB}	Junction-to-board thermal resistance	21.3	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	0.8	°C/W
Ψ _{JB}	Junction-to-board characterization parameter	21.3	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	5.1	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

T_J = –40°C to +125°C; typical values at T_J = 25°C, V_(A) = V_(OUT) = V_(VS) = 12 V, C_(CAP) = 0.1 μF, V_(EN), V_(SLEEP) = 2 V, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE						
V _(VS)	Operating input voltage		3		65	V
V _(VS_PORR)	VS POR threshold, rising		2.4	2.6	2.9	V

6.5 Electrical Characteristics (continued)

$T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$; typical values at $T_J = 25^{\circ}\text{C}$, $V_{(A)} = V_{(OUT)} = V_{(VS)} = 12\text{ V}$, $C_{(CAP)} = 0.1\text{ }\mu\text{F}$, $V_{(EN)}$, $V_{(SLEEP)} = 2\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _(VS_PORF)	VS POR threshold, falling		2.2	2.4	2.7	V
I _(SHDN)	SHDN current, I _(GND)	V _(EN) = 0 V		2.5	5	μA
I _(SLEEP)	SLEEP mode current, I _(GND)	V _(EN) = 2 V, V _(SLEEP) = 0 V		5.5	10	μA
I _(Q)	Total System Quiescent current, I _(GND)	V _(EN) = 2V (LM74900-Q1, LM74910-Q1)		630	750	μA
		V _(EN) = 2V (LM74910H-Q1)		675	810	μA
		V _(A) = V _(VS) = 24 V, V _(EN) = 2 V (LM74900-Q1, LM74910-Q1)		635	750	μA
		V _(A) = V _(VS) = 24 V, V _(EN) = 2 V (LM74910H-Q1)		675	810	μA
I _(REV)	I _(A) leakage current during Reverse Polarity,	0 V ≤ V _(A) ≤ − 65 V	−100	−35		μA
	I _(OUT) leakage current during Reverse Polarity		−1	−0.3		μA
ENABLE						
V _(ENF)	Enable rising threshold voltage		0.6	0.8	1.05	V
V _(ENF)	Enable threshold voltage for low Iq shutdown, falling		0.41	0.7	0.98	V
I _(EN)		0 V ≤ V _(EN) ≤ 65 V		55	200	nA
UNDER VOLTAGE LOCKOUT COMPARATOR (SW, UVLO)						
V _(UVLOR)	UVLO threshold voltage, rising		0.585	0.6	0.63	V
V _(UVLOF)	UVLO threshold voltage, falling		0.533	0.55	0.573	V
I _(UVLO)		0 V ≤ V _(UVLO) ≤ 5 V		50	200	nA
OVER VOLTAGE PROTECTION AND BATTERY SENSING (SW, OV) INPUT						
R _(SW)	Battery sensing disconnect switch resistance	3 V ≤ V _(A) ≤ 65 V	10	22.5	46	Ω
V _(OVR)	Overvoltage threshold input, rising		0.585	0.6	0.63	V
V _(OVF)	Overvoltage threshold input, falling		0.533	0.55	0.573	V
I _(OV)	OV Input leakage current	0 V ≤ V _(OV) ≤ 5 V		50	200	nA
CURRENT SENSE AMPLIFIER						
V _(OFFSET)	Input referred offset (V _{SNS} to V _{IMON} scaling)	R _{SET} = 50Ω, R _{IMON} = 5kΩ, 10kΩ (corresponds to V _{SNS} = 6mV to 30mV) Gain of 45 and 90 respectively. (LM74900-Q1, LM74910-Q1)	−2.1		2.1	mV
V _(GE_SET)	V _{SNS} to V _{IMON} scaling	R _{SET} = 50Ω, R _{IMON} = 5kΩ, (corresponds to V _{SNS} = 6mV to 30mV)	82	90	97	
V _(SNS_TH)	OCP comparator threshold, rising (ILIM)		1.08	1.22	1.32	
V _(SNS_TH)	OCP comparator threshold, falling (ILIM)		1.02	1.15	1.25	V
I _{SCP}	SCP Input Bias current	V _{ISCP} = 12V (LM74900-Q1, LM74910-Q1)	9.5	10.5	12	μA
		V _{ISCP} = 12V (LM74910H-Q1)	9.3	10.5	12	μA

6.5 Electrical Characteristics (continued)

$T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$; typical values at $T_J = 25^{\circ}\text{C}$, $V_{(A)} = V_{(OUT)} = V_{(VS)} = 12\text{ V}$, $C_{(CAP)} = 0.1\text{ }\mu\text{F}$, $V_{(EN)}$, $V_{(SLEEP)} = 2\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _(SNS_SCP)	SCP threshold	R _(ISCP) = 0Ω (I _{SCP} connected to VS) (LM74900-Q1, LM74910-Q1)	17.86	20	22.77	mV
		R _(ISCP) = 0Ω (I _{SCP} connected to VS) (LM74910H-Q1)	17.86	20	23	mV
		R _(ISCP) = 1kΩ (external)		31		mV
I _{MON_ACC}	Current monitor output accuracy	V _{SENSE} = 20mV (LM74900-Q1, LM74910-Q1)	-12.5		12.5	%
		V _{SENSE} = 10mV (LM74910H-Q1)	-6		6	%
		V _{SENSE} = 20mV (LM74910H-Q1)	-3		3	%
		V _{SENSE} = 30mV (LM74910H-Q1)	-2		2	%
FAULT						
R(FLT)	FLT_I Pull-down resistance	(LM74900-Q1, LM74910-Q1)	11	25	60	Ω
		(LM74910H-Q1)	9.46	25	60	Ω
I_FLT	FLT Input leakage current	0 V ≤ V _(FLT) ≤ 20 V	-100		400	nA
DELAY TIMER (TMR)						
I _(TMR_SRC_CB)	TMR source current		65	85	97	μA
I _(TMR_SRC_FLT)	TMR source current		1.94	2.7	3.4	μA
I _(TMR_SNK)	TMR sink current	(LM74900-Q1, LM74910-Q1)	2	2.7	3.15	μA
		(LM74910H-Q1)	2	2.7	3.66	μA
V _(TMR_OC)	Voltage at TMR pin for IWRN shut off		1.1	1.2	1.4	V
V _(TMR_FLT)	Voltage at TMR pin for IFLT triggering		1.04	1.1	1.2	V
V _(TMR_LOW)	Voltage at TMR pin for AR counter falling threshold		0.1	0.2	0.3	V
N _(A_R_Count)	Number of autoretry cycles			32		
CHARGE PUMP (CAP)						
I _(CAP)	Charge Pump source current (Charge pump on)	V _(CAP) – V _(A) = 7 V, 6 V ≤ V _(S) ≤ 65 V	1.3	2.7		mA
		V _(CAP) – V _(A) = 7 V, VS= 65 V, LM74910-Q1 Only	2.5	4.2		mA
VCAP – VS	Charge Pump Turn ON voltage		11	12.2	13.2	V
	Charge Pump Turnoff voltage		11.9	13.2	14.1	V
V _(CAP_UVLO)	Charge Pump UVLO voltage threshold, rising		5.4	6.6	7.9	V
	Charge Pump UVLO voltage threshold, falling		4.4	5.5	6.6	V
IDEAL DIODE (A, C, DGATE)						
V _(A_PORR)	V _(A) POR threshold, rising		2.2	2.45	2.7	V
V _(A_PORF)	V _(A) POR threshold, falling		2	2.25	2.45	V
V _(AC_REG)	Regulated Forward V _(A) –V _(C) Threshold		3.6	10.5	13.4	mV
V _(AC_REV)	V _(A) –V _(C) Threshold for Fast Reverse Current Blocking		–16	–10.5	–5	mV
V _(AC_FWD)	V _(A) –V _(C) Threshold for Reverse to Forward transition		150	177	200	mV
V _(DGATE) – V _(A)	Gate Drive Voltage	3 V < V _(S) < 5 V	7			V
		5 V < V _(S) < 65 V	9.2	11.5	14	V

6.5 Electrical Characteristics (continued)

$T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$; typical values at $T_J = 25^{\circ}\text{C}$, $V_{(A)} = V_{(OUT)} = V_{(VS)} = 12\text{ V}$, $C_{(CAP)} = 0.1\text{ }\mu\text{F}$, $V_{(EN)}$, $V_{(SLEEP)} = 2\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{(DGATE)}$	Peak Gate Source current	$V_{(A)} - V_{(C)} = 100\text{ mV}$, $V_{(DGATE)} - V_{(A)} = 1\text{ V}$		18.5		mA
	Peak Gate Sink current	$V_{(A)} - V_{(C)} = -12\text{ mV}$, $V_{(DGATE)} - V_{(A)} = 11\text{ V}$		2670		mA
	Regulation sink current	$V_{(A)} - V_{(C)} = 0\text{ V}$, $V_{(DGATE)} - V_{(A)} = 11\text{ V}$	5	13.5		μA
$I_{(C)}$	Cathode leakage Current	$V_{(A)} = -14\text{ V}$, $V_{(C)} = 12\text{ V}$	4	9	32	μA
HIGH SIDE CONTROLLER (HGATE, OUT)						
$V_{(HGATE)} - V_{(OUT)}$	Gate Drive Voltage	$3\text{ V} < V_{(S)} < 5\text{ V}$	7			V
		$5\text{ V} < V_{(S)} < 65\text{ V}$	10	11.1	14.5	V
$I_{(HGATE)}$	Source Current		39	55	75	μA
	Sink Current	$V_{(OV)} > V_{(OVR)}$	128	180		mA
SLEEP MODE						
$V_{(SLEEP)}$	SLEEP high threshold voltage			0.85	1.05	V
$V_{(SLEEPF)}$	SLEEP threshold voltage for low I_q shutdown, falling		0.41	0.7		V
$I_{(SLEEP)}$	SLEEP input leakage current			100	160	nA
Overvoltage threshold	SLEEP mode overvoltage rising threshold	$\overline{\text{SLEEP}} = \text{Low}$, $\text{EN} = \text{High}$	19.3	21.3	23	V
Overvoltage threshold	SLEEP mode overvoltage threshold	$\overline{\text{SLEEP}} = \text{Low}$, $\text{EN} = \text{High}$	18.4	21	22.2	V
Overcurrent threshold	SLEEP mode overcurrent threshold (device Latch-off)		150	250	310	mA
$T_{(TSD)}$	SLEEP mode TSD Threshold, rising	$\overline{\text{SLEEP}} = \text{Low}$, $\text{EN} = \text{High}$		155		$^{\circ}\text{C}$
$T_{(TSDhyst)}$	TSD Hysteresis	$\overline{\text{SLEEP}} = \text{Low}$, $\text{EN} = \text{High}$		10		$^{\circ}\text{C}$

6.6 Switching Characteristics

$T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$; typical values at $T_J = 25^{\circ}\text{C}$, $V_{(A)} = V_{(OUT)} = V_{(VS)} = 12\text{ V}$, $C_{(CAP)} = 0.1\text{ }\mu\text{F}$, $V_{(EN)}$, $V_{(SLEEP)} = 2\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{\text{DGATE_OFF(dly)}}$	DGATE Turnoff Delay during reverse voltage detection	$V_{(A)} - V_{(C)} = +30\text{ mV}$ to -100 mV to $V_{(DGATE-A)} < 1\text{ V}$, $C_{(DGATE-A)} = 10\text{ nF}$		0.5	0.95	μs
$t_{\text{DGATE_ON(dly)}}$	DGATE Turnon Delay during forward voltage detection	$V_{(A)} - V_{(C)} = -20\text{ mV}$ to $+700\text{ mV}$ to $V_{(DGATE-A)} > 5\text{ V}$, $C_{(DGATE-A)} = 10\text{ nF}$, LM74900-Q1 only		2	3.8	μs
$t_{\text{DGATE_ON(dly)}}$	DGATE Turnon Delay during forward voltage detection	$V_{(A)} - V_{(C)} = -20\text{ mV}$ to $+700\text{ mV}$ to $V_{(DGATE-A)} > 5\text{ V}$, $C_{(DGATE-A)} = 10\text{ nF}$, LM74910-Q1 only		0.75	1.6	μs
$t_{\text{EN(dly_DGATE)}}$	DGATE Turnon Delay during EN	$\text{EN} \uparrow$ to $V_{(DGATE-A)} > 5\text{ V}$, $C_{(DGATE-A)} = 10\text{ nF}$		180	270	μs
$t_{\text{UVLO_OFF(deg_HGATE)}}$	HGATE Turnoff Deglitch during UVLO	UVLO \downarrow to HGATE \downarrow		5	7	μs
$t_{\text{UVLO_ON(deg_HGATE)}}$	HGATE Turnon Deglitch during UVLO	UVLO \uparrow to HGATE \uparrow		8.5		μs
$t_{\text{OVP_OFF(deg_HGATE)}}$	HGATE Turnoff Deglitch during OV	OV \uparrow to HGATE \downarrow		4	7	μs
$t_{\text{OVP_ON(deg_HGATE)}}$	HGATE Turnon Deglitch during OV	OV \downarrow to HGATE \uparrow		9		μs

6.6 Switching Characteristics (continued)

$T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$; typical values at $T_J = 25^{\circ}\text{C}$, $V_{(A)} = V_{(OUT)} = V_{(VS)} = 12\text{ V}$, $C_{(CAP)} = 0.1\text{ }\mu\text{F}$, $V_{(EN)}$, $V_{(SLEEP)} = 2\text{ V}$, over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{SCP_DLY}	Short circuit protection turn off delay	$(V_{ISCP} - V_{CS-}) = 0\text{ mV to }100\text{ mV}$ $HGATE\downarrow$, $C_{GS} = 4.7\text{ nF}$		3	5.5	μs
$t_{OCP_TMR_DLY}$	Over current protection turn off delay	$(V_{CS+} - V_{CS-})\uparrow$ $HGATE\downarrow$, $C_{TMR} = 50\text{ pF}$		35		μs
	Over current protection turn off delay	$(V_{CS+} - V_{CS-})\uparrow$ $HGATE\downarrow$, $C_{TMR} = 10\text{ nF}$		190		μs
$t_{AUTO_RETRY_DLY}$	Over current / Short circuit protection auto retry delay	$(V_{CS+} - V_{CS-})\downarrow$ $HGATE\uparrow$, $C_{TMR} = 50\text{ pF}$		1.5		ms
	Over current / Short circuit protection auto retry delay	$(V_{CS+} - V_{CS-})\downarrow$ $HGATE\uparrow$, $C_{TMR} = 10\text{ nF}$		230		ms
t_{FLT_ASSERT}	Fault assert delay	$(V_{CS+} - V_{CS-})\uparrow$ $\overline{FLT}\downarrow$, $C_{TMR} = 50\text{ pF}$		35		μs
	Fault assert delay	$OV\uparrow$ to $\overline{FLT}\downarrow$		3		μs
$t_{FLT_DE-ASSERT}$	Fault de-assert delay			4		μs
$t_{SLEEP_OCP_LATCH}$	SLEEP OCP Latch delay			3.5	7.5	μs
t_{SLEEP_MODE}	Sleep Mode Entry Delay	$\overline{SLEEP} = \text{Low}$, $EN = \text{High}$		95		μs
$t_{OVCLAMP}$	OV clamp response delay			3.5		μs

6.7 Typical Characteristics

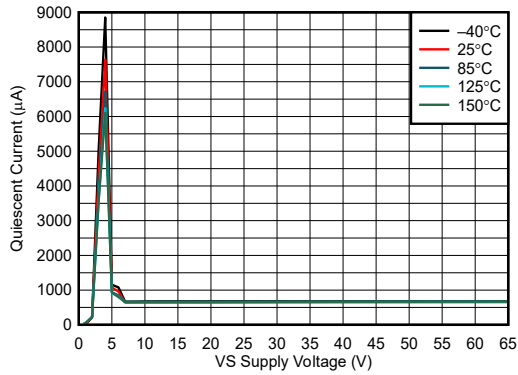


Figure 6-1. Operating Quiescent Current vs Supply Voltage

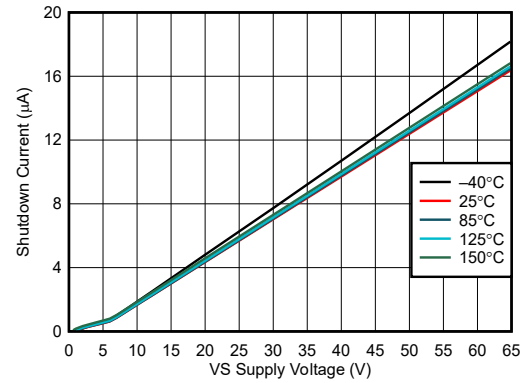


Figure 6-2. Shutdown Current vs Supply Voltage

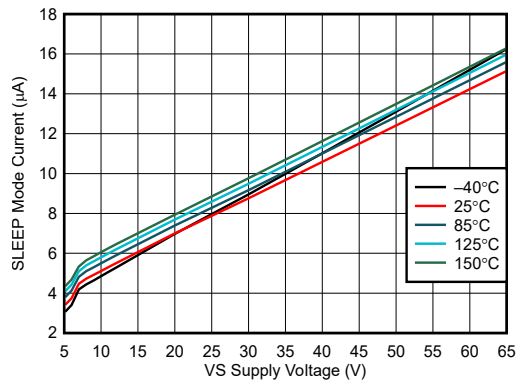


Figure 6-3. SLEEP Mode Current vs Supply Voltage

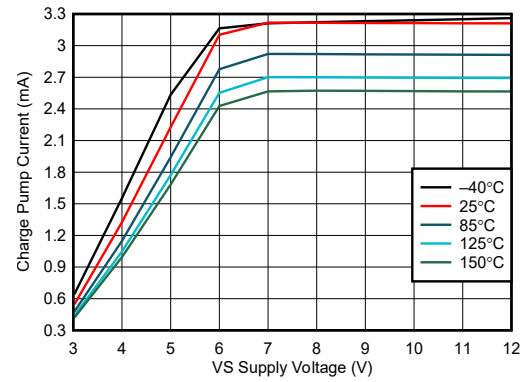


Figure 6-4. Charge Pump Current vs Supply Voltage at CAP – VS ≥ 6 V (LM74900-Q1)

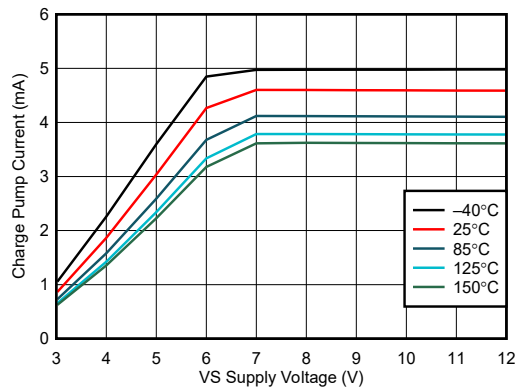


Figure 6-5. Charge Pump Current vs Supply Voltage at CAP – VS ≥ 6 V (LM74910-Q1)

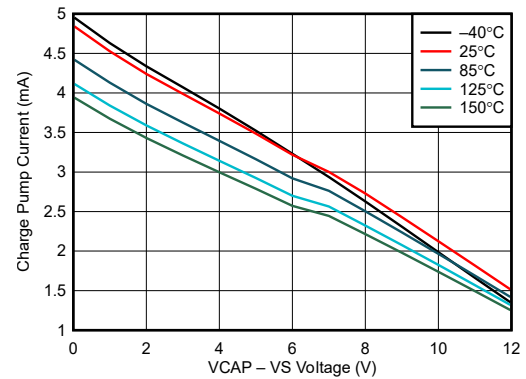


Figure 6-6. Charge Pump V-I Characteristics at VS ≥ 12 V (LM74900-Q1)

6.7 Typical Characteristics (continued)

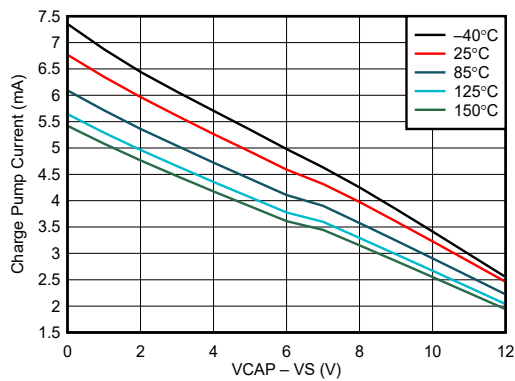


Figure 6-7. Charge Pump V-I Characteristics at $V_S \geq 12$ V (LM74910-Q1)

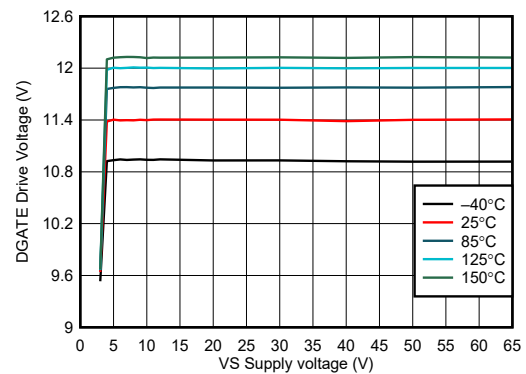


Figure 6-8. DGATE Drive Voltage vs Supply Voltage

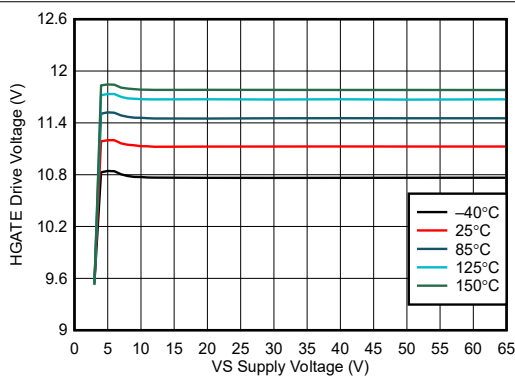


Figure 6-9. HGATE Drive Voltage vs Supply Voltage

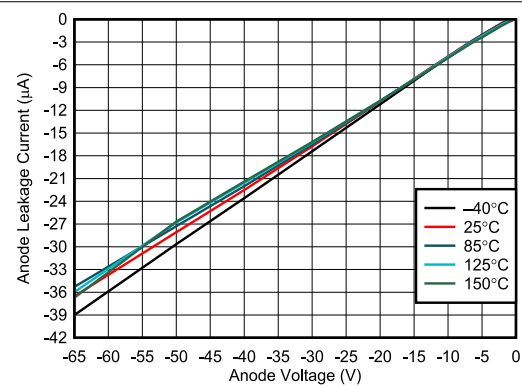


Figure 6-10. ANODE Leakage Current vs Reverse ANODE Voltage

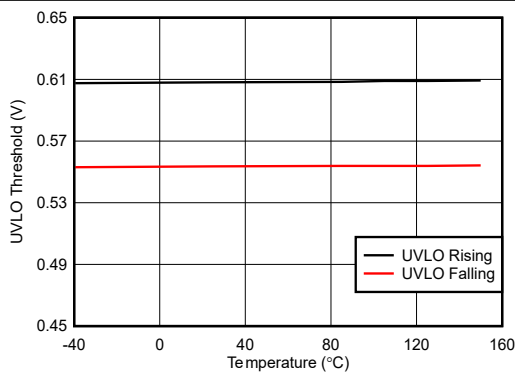


Figure 6-11. UVLO Thresholds vs Temperature

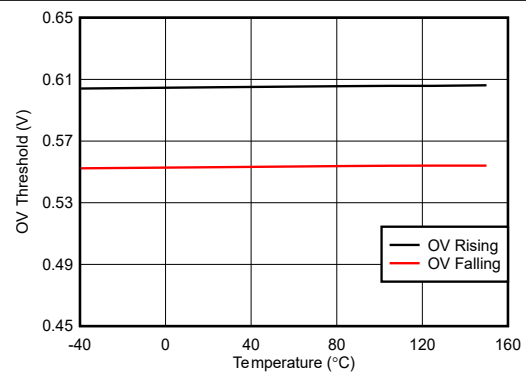


Figure 6-12. OVP Thresholds vs Temperature

6.7 Typical Characteristics (continued)

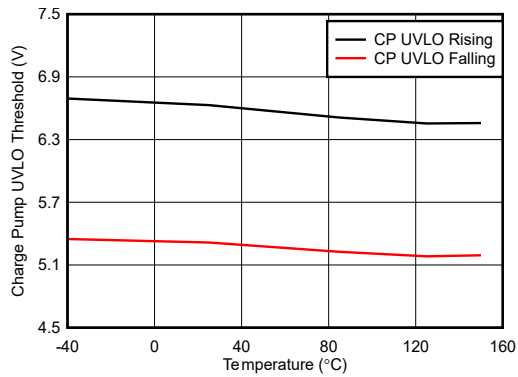


Figure 6-13. Charge Pump UVLO Threshold vs Temperature

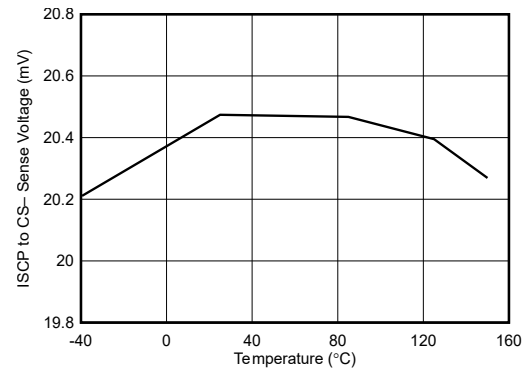


Figure 6-14. ISCP to CS- Threshold vs Temperature

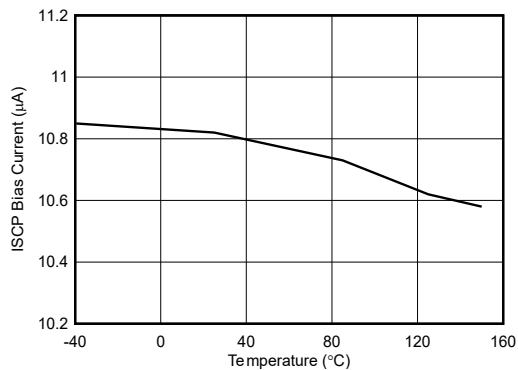


Figure 6-15. ISCP Bias Current vs Temperature

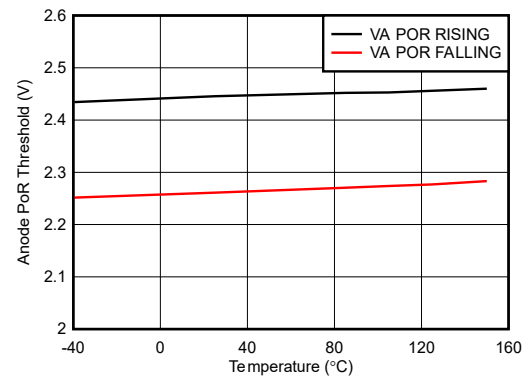


Figure 6-16. VA POR Threshold vs Temperature

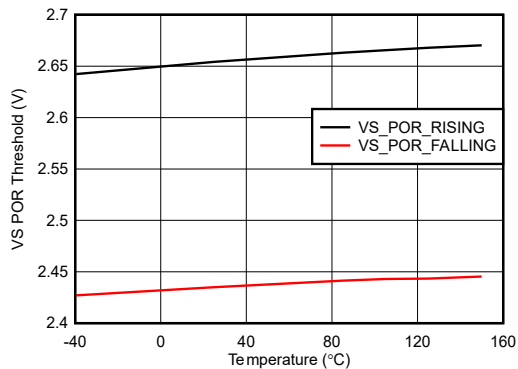


Figure 6-17. VS POR Threshold vs Temperature

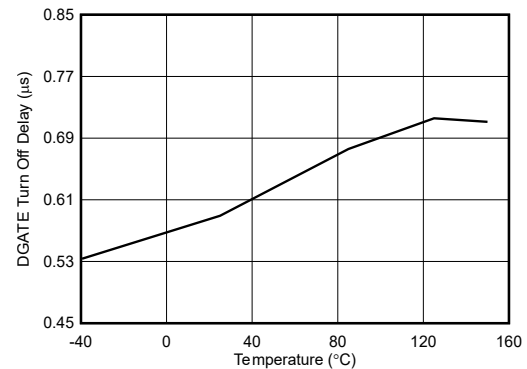


Figure 6-18. DGATE Turn OFF Delay

6.7 Typical Characteristics (continued)

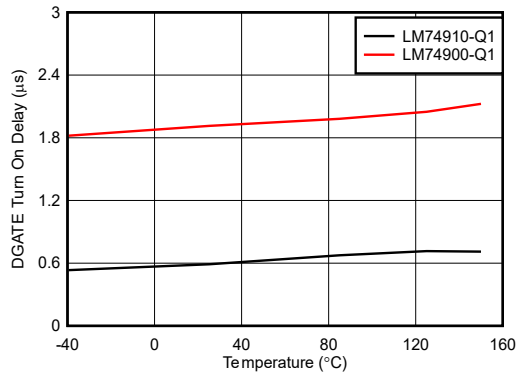


Figure 6-19. DGATE Turn On Delay During Forward Conduction

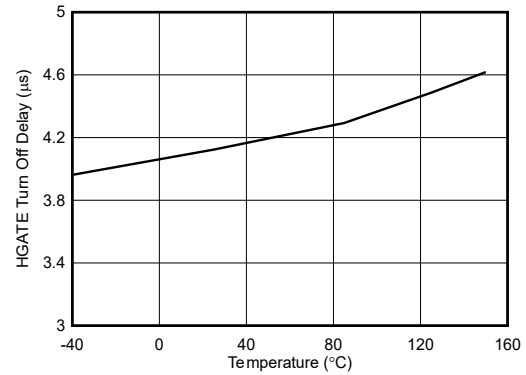


Figure 6-20. HGATE Turn Off Delay During OV

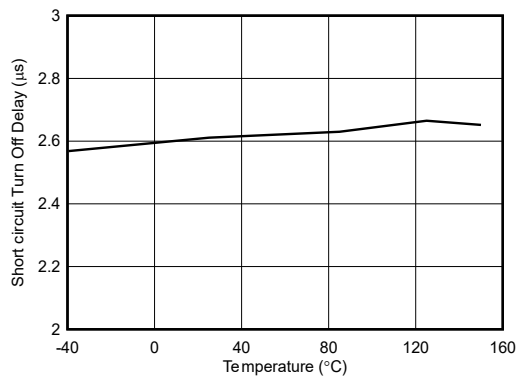
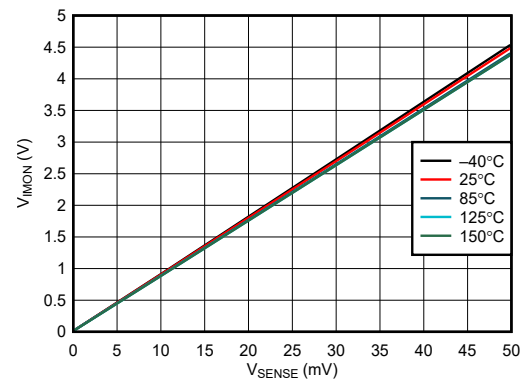
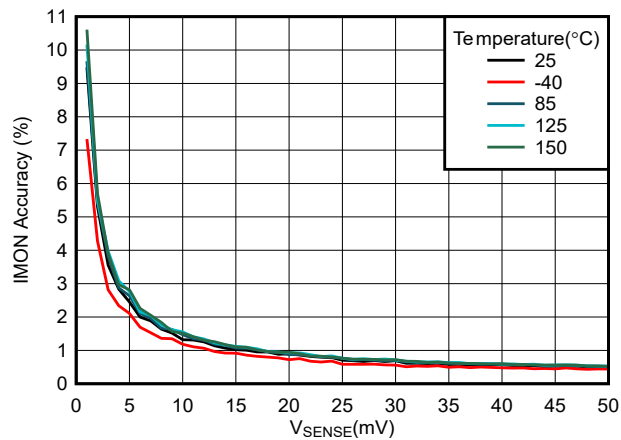


Figure 6-21. HGATE Turn Off Delay During SCP

Figure 6-22. Current Monitor Output vs Sense Voltage ($R_{IMON} = 5k\Omega$, $R_{SET} = 50\Omega$)Figure 6-23. LM74910H-Q1, IMON Accuracy (%) vs V_{SENSE} (mV)

7 Parameter Measurement Information

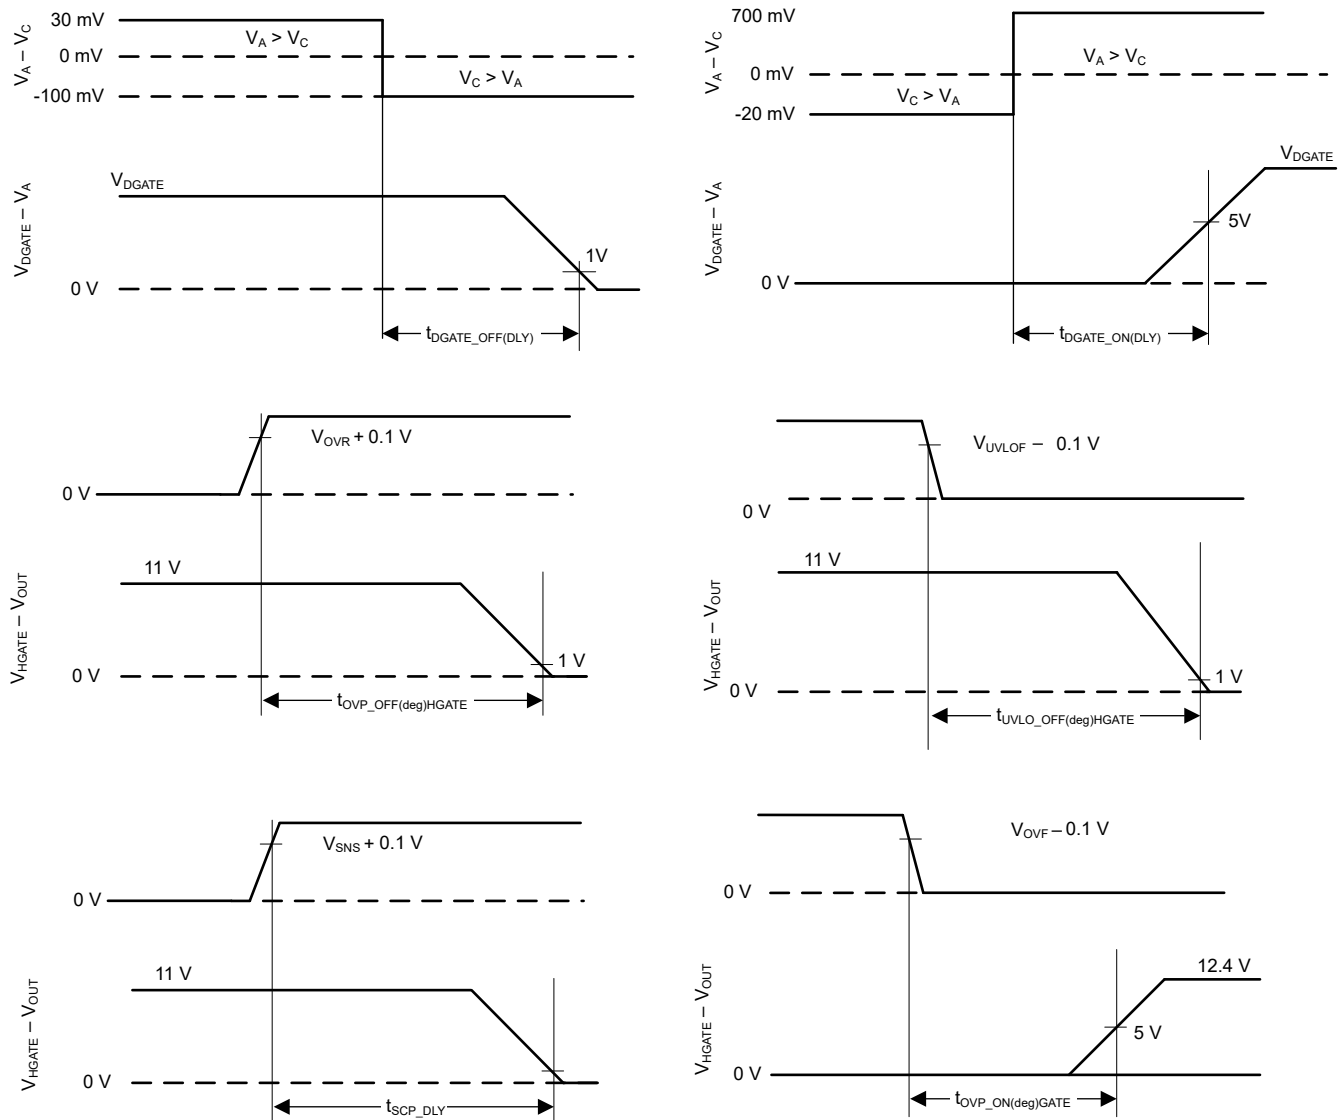


Figure 7-1. Timing Waveforms

8 Detailed Description

8.1 Overview

The LM749x0-Q1 family of ideal diode controllers drive back-to-back external N-Channel MOSFETs to realize low-loss power path protection with circuit breaker, undervoltage, and overvoltage protection functionality.


The wide input supply of 3V to 65V allows protection and control of 12V and 24V automotive battery powered ECUs. The device can withstand and protect the loads from negative supply voltages down to -65V. An integrated ideal diode controller (DGATE) drives the first MOSFET to replace a Schottky diode for reverse input protection and output voltage holdup. With a second MOSFET in the power path the device allows load disconnect (ON/OFF control) and overvoltage protection using HGATE control. The device features an adjustable overvoltage cut-off protection feature. With common drain configuration of the power MOSFETs, the mid-point can be utilized for OR-ing designs using another ideal diode. The LM749x0-Q1 has a maximum voltage rating of 65V.

The device has accurate current sensing output (IMON) with typical accuracy of ($\pm 10\%$) enabling systems for energy management. It has integrated two level overcurrent protection with circuit breaker functionality (TMR) and fault ($\overline{\text{FLT}}$) output with complete adjustability of thresholds and response time. Auto-retry and latch-off fault behavior can be configured.

The device offers adjustable overvoltage and undervoltage protection, providing robust load disconnect in case of voltage transient events.

LM749x0-Q1 features two different low power modes based on status of EN and $\overline{\text{SLEEP}}$ pin. In SLEEP mode ($\overline{\text{SLEEP}}$ = Low, EN = High) the device consumes only 6 μ A current by turning off both the external MOSFET gate drives and internal charge pump but at the same time providing internal bypass path to power up always ON loads with limited current capacity. With the enable pin low, device enters into ultra-low-power mode by completely cutting off loads with typical current consumption of 2.87 μ A. The high voltage rating of LM749x0-Q1 helps to simplify the system designs for automotive ISO7637 protection. The LM749x0-Q1 is also suitable for ORing and priority power MUX applications.

8.2 Functional Block Diagram

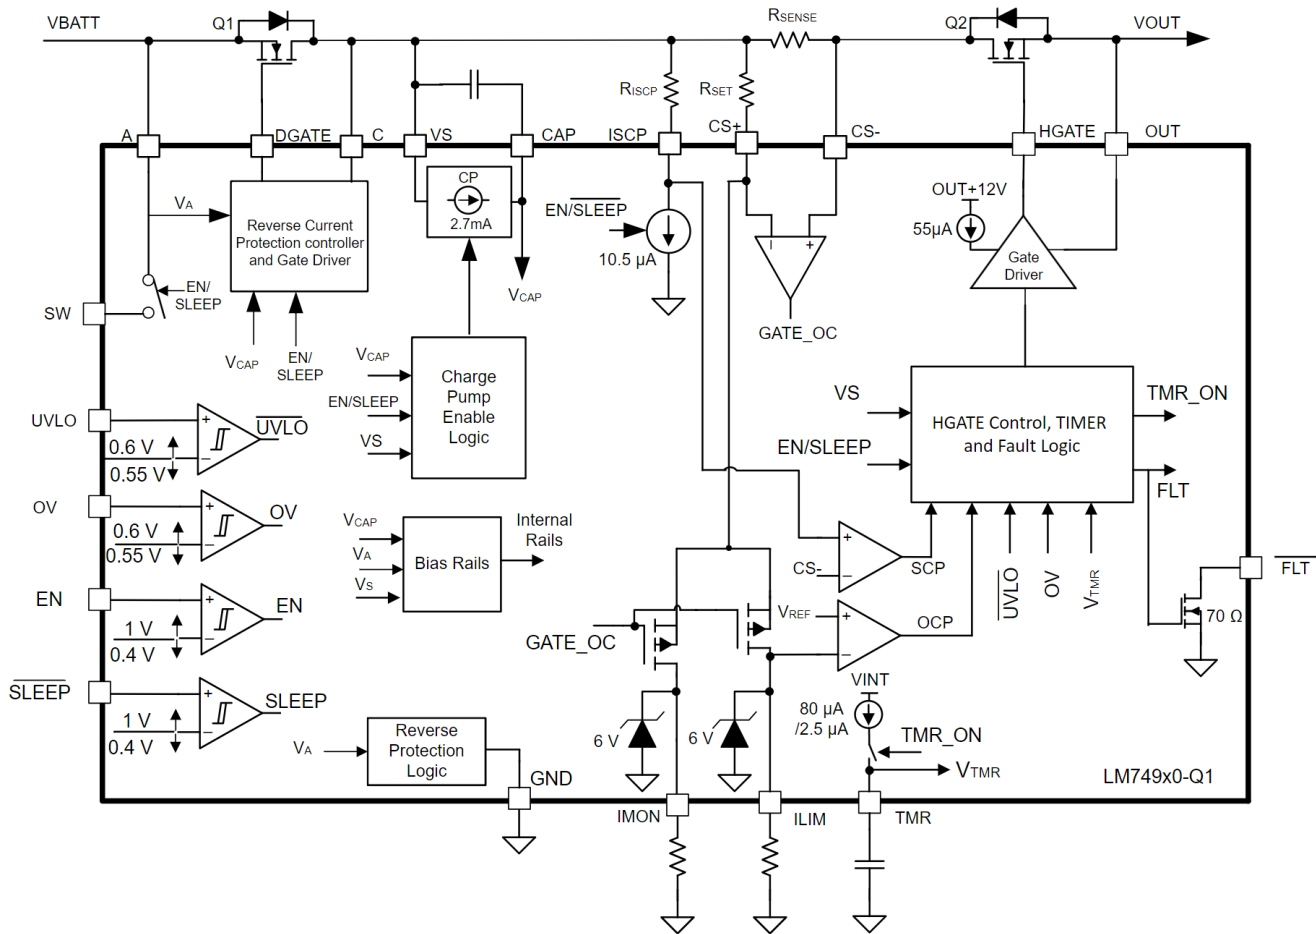

8.3 Feature Description

8.3.1 Charge Pump

The charge pump supplies the voltage necessary to drive the external N-channel MOSFET. An external charge pump capacitor is placed between CAP and VS pins to provide energy to turn on the external MOSFET. In order for the charge pump to supply current to the external capacitor, the EN and SLEEP pin voltage must be above the specified input high threshold. When enabled the charge pump sources a charging current of 2.7mA typical. If EN and SLEEP pin is pulled low, then the charge pump remains disabled. To ensure that the external MOSFET can be driven above its specified threshold voltage, the CAP to VS voltage must be above the undervoltage lockout threshold, typically 6.6V, before the internal gate driver is enabled. Use Equation 1 to calculate the initial gate driver enable delay.

$$T_{(DRV_EN)} = 175 \mu s + \frac{C_{(CAP)} \times V_{(CAP_UVLOR)}}{2.7 \text{ mA}} \quad (1)$$

where

- $C_{(CAP)}$ is the charge pump capacitance connected across VS and CAP pins
- $V_{(CAP_UVLOR)} = 6.6V$ (typical)

To remove any chatter on the gate drive approximately 1V of hysteresis is added to the VCAP undervoltage lockout. The charge pump remains enabled until the CAP to VS voltage reaches 13.2V, typically, at which point the charge pump is disabled decreasing the current draw on the VS pin. The charge pump remains disabled

until the CAP to VS voltage is below to 12.2V typically at which point the charge pump is enabled. The voltage between CAP and VS continue to charge and discharge between 12.2V and 13.2V as shown in Figure 8-1. By enabling and disabling the charge pump, the operating quiescent current of the LM749x0-Q1 is reduced. When the charge pump is disabled it sinks 15µA.

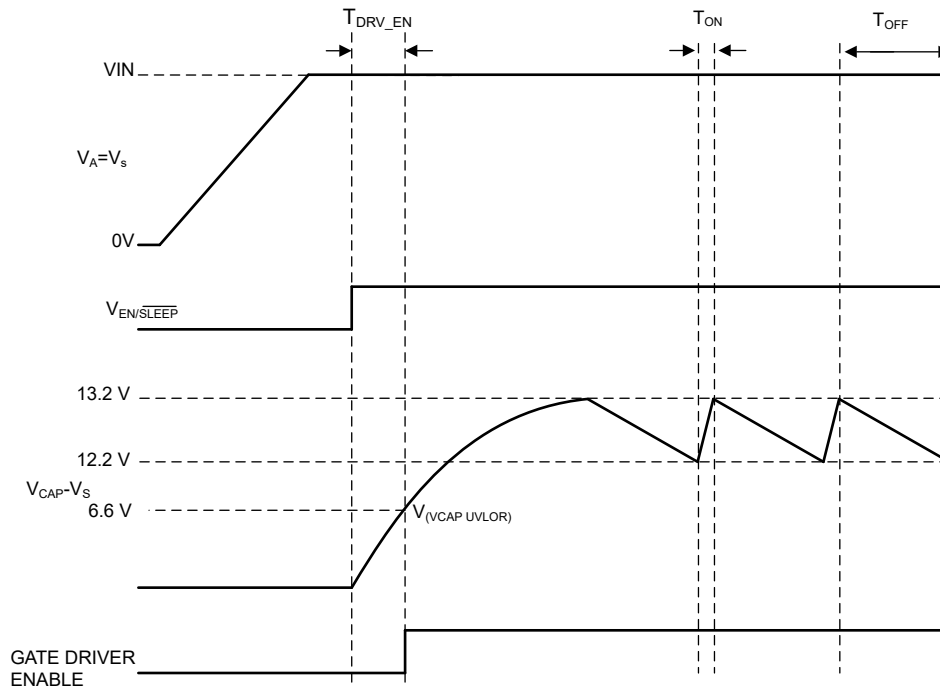


Figure 8-1. Charge Pump Operation

8.3.2 Dual Gate Control (DGATE, HGATE)

The LM749x0-Q1 features two separate gate control and driver outputs, DGATE and HGATE, to drive back-to-back N-channel MOSFETs.

8.3.2.1 Reverse Battery Protection (A, C, DGATE)

A, C, DGATE comprises of Ideal Diode stage. Connect the Source of the external MOSFET to A, Drain to C and Gate to DGATE. The LM749x0-Q1 has integrated reverse input protection down to -65V.

Before the DGATE driver is enabled, following conditions must be achieved:

- The EN and $\overline{\text{SLEEP}}$ pin voltage must be greater than the specified input high voltage.
- The CAP to VS voltage must be greater than the undervoltage lockout voltage.
- Voltage at A pin must be greater than VA POR Rising threshold.
- Voltage at VS pin must be greater than Vs POR Rising threshold.

If the above conditions are not achieved, then the DGATE pin is internally connected to the A pin, assuring that the external MOSFET is disabled.

In LM749x0-Q1 the voltage drop across the MOSFET is continuously monitored between the A and C pins, and the DGATE to A voltage is adjusted as needed to regulate the forward voltage drop at 10.5mV (typ). This closed loop regulation scheme enables graceful turn off of the MOSFET during a reverse current event and ensures zero DC reverse current flow. This scheme ensures robust performance during slow input voltage ramp down tests. Along with the linear regulation amplifier scheme, the LM749x0-Q1 also integrates a fast reverse voltage comparator. When the voltage drop across A and C reaches $V_{(AC_REV)}$ threshold then the DGATE goes low within 0.5µs (typ). This fast reverse voltage comparator scheme ensures robust performance during fast input voltage ramp down tests such as input micro-shorts. The external MOSFET is turned ON back when the voltage across A and C hits $V_{(AC_FWD)}$ threshold within 2.8µs (typ).

8.3.2.2 Load Disconnect Switch Control (HGATE, OUT)

HGATE and OUT comprises of Load disconnect switch control stage. Connect the Source of the external MOSFET to OUT and Gate to HGATE.

Before the HGATE driver is enabled, following conditions must be achieved:

- The EN and $\overline{\text{SLEEP}}$ pin voltage must be greater than the specified input high voltage.
- The CAP to VS voltage must be greater than the undervoltage lockout voltage.
- Voltage at VS pin must be greater than Vs POR Rising threshold.

If the above conditions are not achieved, then the HGATE pin is internally connected to the OUT pin, assuring that the external MOSFET is disabled.

For Inrush Current limiting, connect C_{dVdT} capacitor and R_1 as shown in Figure 8-2.

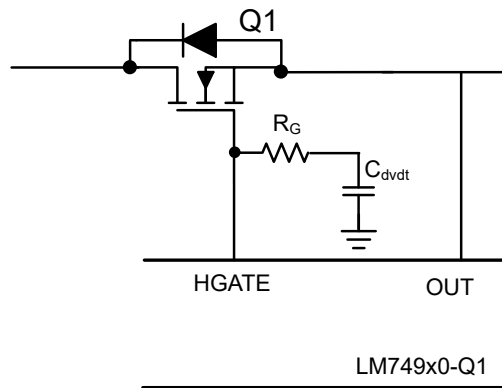


Figure 8-2. Inrush Current Limiting

The C_{dVdT} capacitor is required for slowing down the HGATE voltage ramp during power up for inrush current limiting. Use Equation 2 to calculate C_{dVdT} capacitance value .

$$C_{(dVdT)} = C_{OUT} \times \frac{I_{(HGATE_DRV)}}{I_{INRUSH}} \quad (2)$$

where I_{HATE_DRV} is 55 μA (typ), I_{INRUSH} is the inrush current and C_{OUT} is the output load capacitance. An extra resistor, R_1 , in series with the C_{dVdT} capacitor improves the turn off time.

8.3.3 Overcurrent Protection (CS+, CS-, ILIM, IMON, TMR)

The LM749x0-Q1 has two level overcurrent protection. The device senses the voltage across the external current sense resistor through CS+ and CS-.

8.3.3.1 Pulse Overload Protection, Circuit Breaker

The LM749x0-Q1 provides programmable overcurrent threshold setting by means of resistor (R_{LIM}) connected from I_{LIM} pin to GND.

$$R_{(ILIM)} = \frac{12 \times R_{SET}}{R_{SENSE} \times I_{LIM}} \quad (3)$$

where

- R_{SET} is the resistor connected across CS+ and VS
- R_{SNS} is the current sense resistor
- I_{LIM} is the overcurrent level

The C_{TMR} programs the circuit breaker and auto-retry time. Once the voltage across CS+ and CS– exceeds the set point, the C_{TMR} starts charging with 85 μ A pull up current. Once the C_{TMR} charges to V_{TMR_FLT} , \overline{FLT} asserts low providing warning on impending FET turn OFF. Once C_{TMR} charges to V_{TMR_OC} , HGATE is pulled to OUT turning OFF the HFET. After this event, the auto-retry behavior starts. The C_{TMR} capacitor starts discharging with 2.7 μ A pull down current. Once the voltage reaches V_{TMR_Low} level, the capacitor starts charging with 2.7 μ A pull up. After 32 charging/discharging cycles of C_{TMR} , the FET turns ON and \overline{FLT} de-asserts after de-assertion delay.

$$T_{(OC)} = 1.2 \times \frac{C_{TMR}}{82.3 \mu A} \quad (4)$$

where

- T_{OC} is the delay to turn OFF the FET
- C_{TMR} is the capacitance across TMR to GND

The auto-retry time can be computed as

$$T_{RETRY} = 22.7 \times 10^6 \times C_{TMR} \quad (5)$$

If the overcurrent pulse duration is below T_{OC} then the FET remains ON and C_{TMR} gets discharged using internal pull down switch.

When not used, ILIM is connected to ground while TMR can be left floating.




Figure 8-3. LM749x0 Auto Retry TIMER Functionality

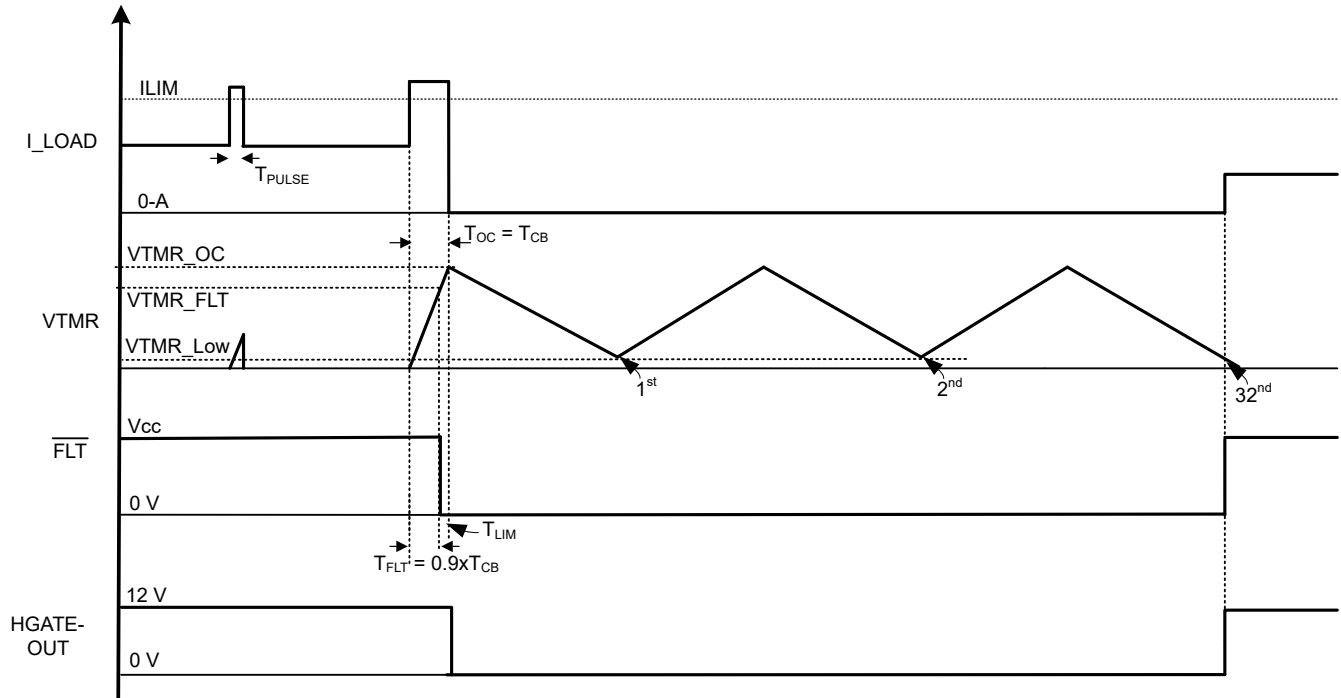


Figure 8-4. Overcurrent Protection With Auto Retry Timing Diagram

If the overcurrent pulse duration is below T_{OC} then the HFET remains ON and C_{TMR} gets discharged using internal pull down switch.

8.3.3.2 Overcurrent Protection With Latch-Off

With about a 100kΩ resistor across C_{TMR} as shown in figure, overcurrent latch-off functionality can be achieved. With this resistor, during the charging cycle the voltage across C_{TMR} gets clamped to a level below V_{TMR_OC} resulting in a latch-off behavior.

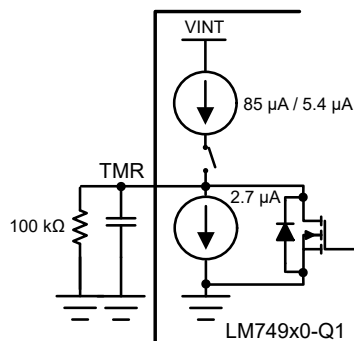


Figure 8-5. LM749x0 Overcurrent Protection With Latch

Toggle EN (below ENF) or power cycle V_s below V_{SPORF} to reset the latch. At low edge, the timer counter is reset and C_{TMR} is discharged.

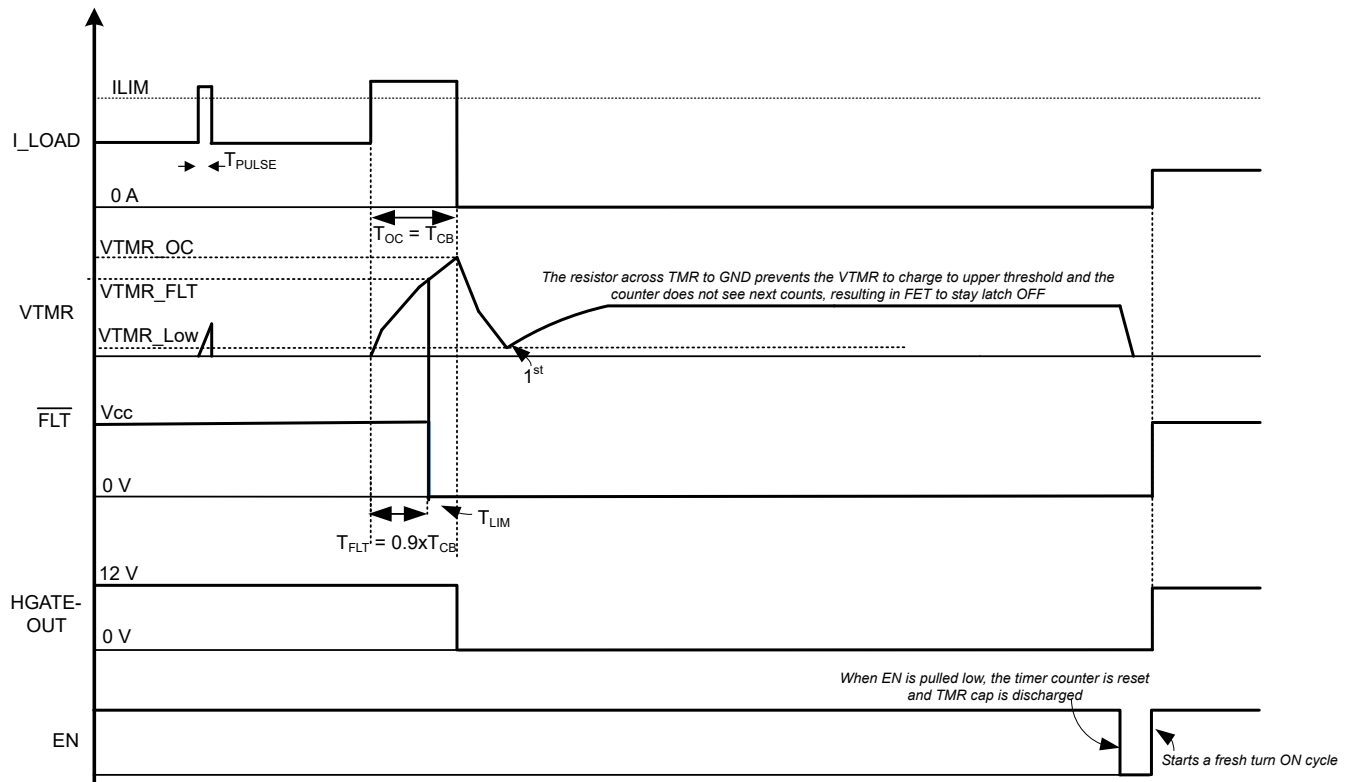


Figure 8-6. Overcurrent Protection With Latch Timing Diagram

8.3.3.3 Short Circuit Protection (ISCP)

The LM749x0-Q1 offers fast response to any short circuit events with the short circuit protection feature. Once the voltage across CS+ and CS– exceeds the ISCP set point of 20mV typical (default threshold), HGATE is pulled to OUT within 5μs protecting the HFET. FLT asserts low at the same time. Subsequent to this event, the charge/discharge cycles of C_{TMR} starts similar to the behavior post FET OFF event in circuit breaker operation.

Short circuit protection threshold can be increased using an external series resistor (R_{ISCP}) from ISCP pin to common drain point. The shift in the short circuit protection threshold can be calculated using [Equation 6](#).

$$V_{SNS_SCP} = (10.5 \mu A \times R_{ISCP}) + 20 \text{ mV} \quad (6)$$

An additional deglitch filter consisting of R_{SCP} and C_{SCP} can be added from ISCP pin to CS– pin as shown in [Figure 8-7](#) to avoid any false short circuit trigger in case of fast automotive transients such as Input Micro cuts (LV124, E-10), AC superimpose (LV124, E-06), ISO7637-2 Pulse 2A.



8.3.3.4 Analog Current Monitor Output (IMON)

$$V_{\text{IMON}} = \frac{0.9 \times V_{\text{SENSE}} \times R_{\text{IMON}}}{R_{\text{SET}}} \quad (7)$$


8.3.4 Undervoltage Protection, Overvoltage Protection, and Battery Voltage Sensing (UVLO, OV, SW)

Connect a resistor ladder as shown in [Figure 8-9](#) for overvoltage threshold programming.

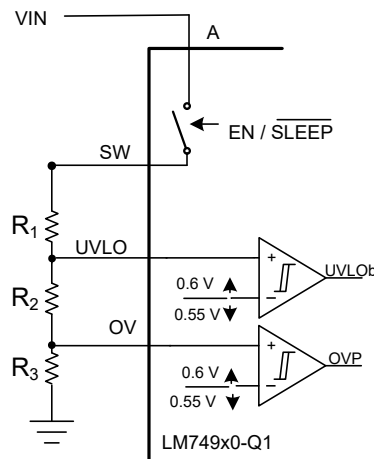


Figure 8-9. Programming Overvoltage Threshold and Battery Sensing

A disconnect switch is integrated between A and SW pins. This switch is turned OFF when EN or $\overline{\text{SLEEP}}$ pin is pulled low. This helps to reduce the leakage current through the resistor divider network during system shutdown state (IGN_OFF state).

When undervoltage functionality is not required then it is recommended to connect UVLO pin to EN or VS. It is recommended to connect OV pin to ground when overvoltage protection feature is not used.

8.4 Device Functional Modes

8.4.1 Ultra Low IQ Shutdown (EN)

The enable pin allows for the gate driver to be either enabled or disabled by an external signal. If the EN pin voltage is greater than the rising threshold, the gate driver and charge pump operates as described in [Charge Pump](#). If EN pin voltage is less than the input low threshold, $V_{(ENF)}$, the charge pump and both the gate drivers (DGATE and HGATE) are disabled placing the LM749x0-Q1 in shutdown mode with ultra-low-current consumption of 3 μ A. The EN pin can withstand a maximum voltage of 65V. For always ON operation, connect EN pin to VS.


8.4.2 Low IQ SLEEP Mode ($\overline{\text{SLEEP}}$)

The LM749x0-Q1 supports low IQ SLEEP mode operation. This mode can be enabled by pulling $\overline{\text{SLEEP}}$ pin low (EN = High). In SLEEP mode, device turns off internal charge pump, SW switch and disables DGATE and HGATE drive thus achieving low current consumption of 6 μ A typical. However at the same time device power up always on loads connected on OUT pin through an internal low power MOSFET with typical on resistance of 7 Ω . In this mode device can support peak load current of 100mA. As load is increased, voltage drop across internal MOSFET increases. Device offers overcurrent protection during sleep mode with typical overcurrent threshold of 250mA. For LM74900-Q1 and LM74910H-Q1, in case of overcurrent event during sleep mode, device protects internal FET by disconnecting the internal MOSFET switch and latching off the device.


For LM74910H-Q1, an overcurrent event in SLEEP mode triggers a transition into normal mode of operation for 64 timer cycles during which the device draws quiescent current $I_{(Q)}$. When the device enters normal mode for 64 timer cycles, the charge pump, DGATE and HGATE are enabled allowing the load current to flow through the external FETs. After the end of 64 timer cycles, the device goes back to SLEEP mode from normal mode. This auto-retry feature allows the LM74910H-Q1 device to startup into SLEEP mode and pass transient load current which are greater than SLEEP overcurrent threshold without latching off the device.

As an additional layer of protection, device also features thermal shutdown with latch off feature in SLEEP mode in case of any overheating of the device in SLEEP mode. To put the device out of the latch mode user has to toggle the $\overline{\text{SLEEP}}$ or EN pin.

If SLEEP mode feature is not required then $\overline{\text{SLEEP}}$ pin should be tied to EN. When not used SLEEP_OV pin can be left floating.

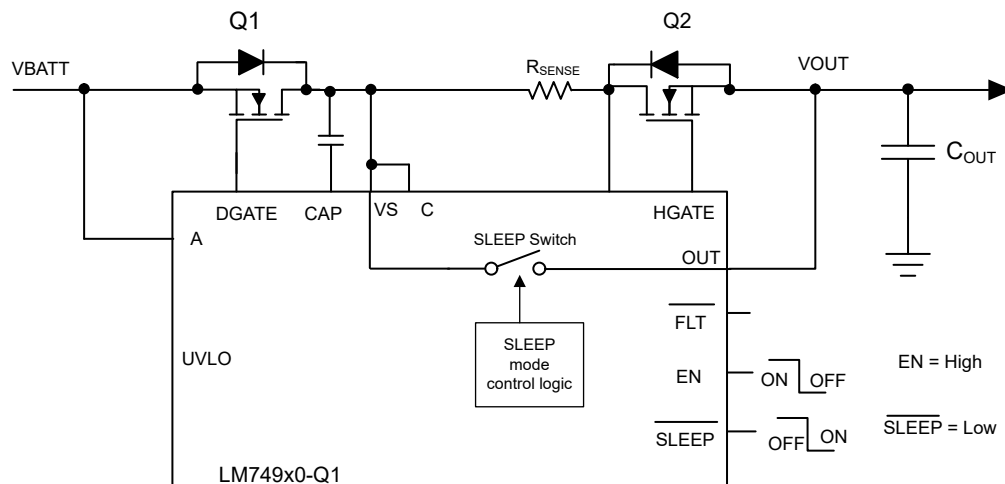

A higher overvoltage threshold for SLEEP mode can be achieved by adding an external Zener diode between SLEEP_OV pin to OUT/C as shown in [Figure 8-11](#). This feature is useful while configuring overvoltage threshold for 24V or 48V powered systems.

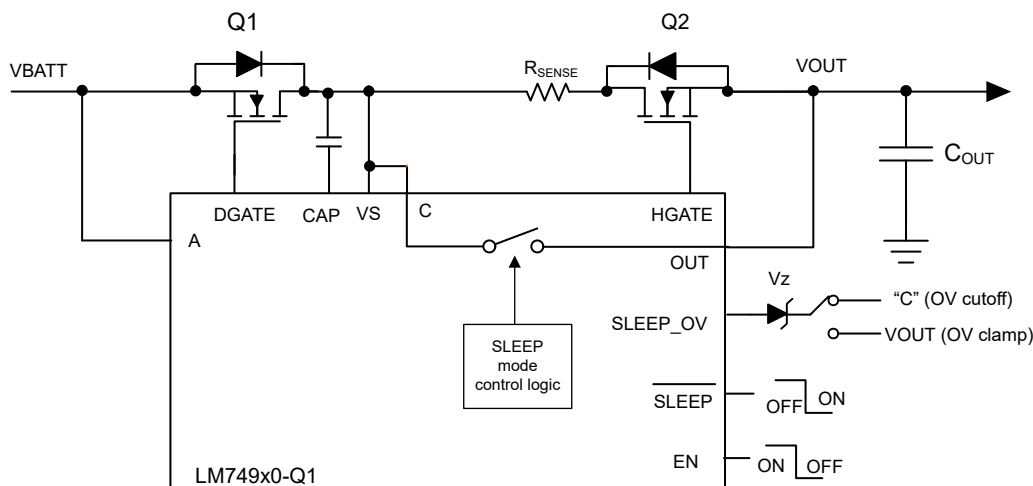

Copyright © 2025 Texas Instruments Incorporated

9 Applications and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The LM749x0-Q1 controls two N-channel power MOSFETs with DGATE used to control diode MOSFET to emulate an ideal diode and HGATE controlling second MOSFET for power path cut-off when disabled or during an overcurrent, overvoltage, undervoltage events. HGATE controlled MOSFET can be used to clamp the output during overvoltage or load dump conditions. LM749x0-Q1 can be placed into low quiescent current mode using EN or SLEEP, where both DGATE and HGATE are turned OFF.

The device has a separate supply input pin (VS). The charge pump is derived from this supply input. With the separate supply input provision and separate GATE control architecture, the LM749x0-Q1 device drives back to back connected MOSFET in common drain topology thus enabling various system architectures such as power supply ORing and Power supply priority MUX applications. With these various topologies, the system designers can design the front-end power system to meet various system design requirements.

9.2 Typical 12V Reverse Battery Protection Application

A typical application circuit of LM749x0-Q1 configured in common-drain topology to provide reverse battery protection with overvoltage protection is shown in Figure 9-1.

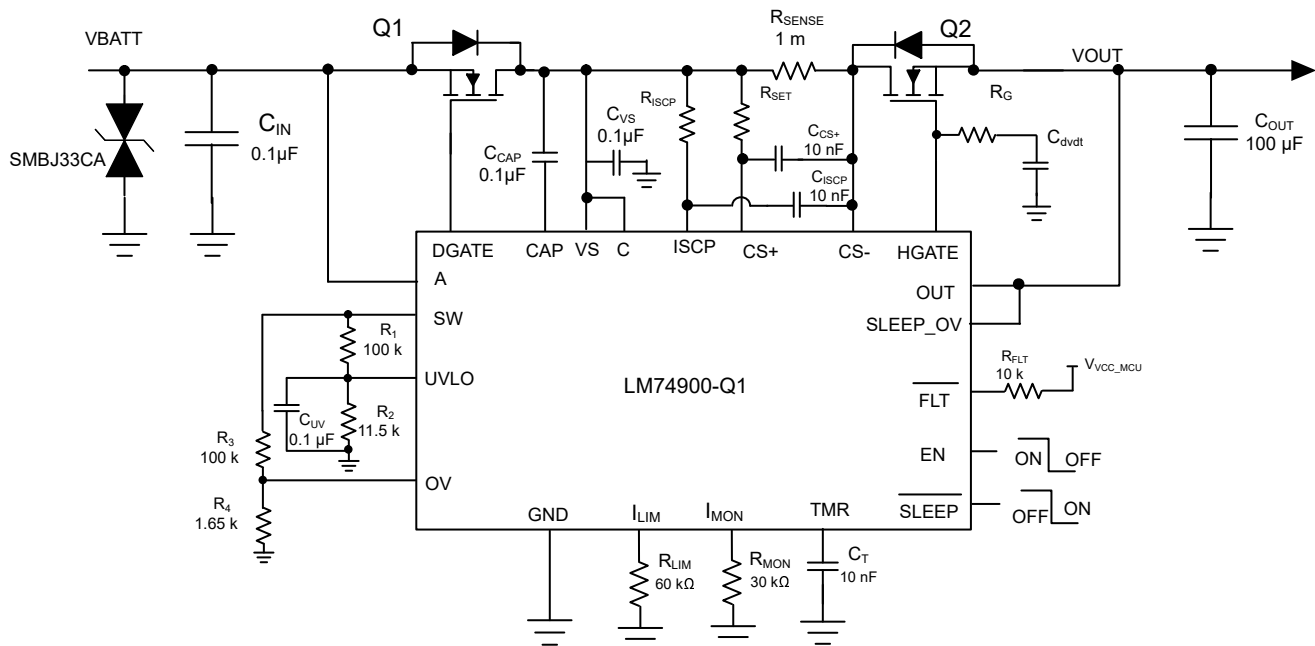


Figure 9-1. Typical Application Circuit – 12V Reverse Battery Protection, Overcurrent Protection, and Overvoltage Protection

9.2.1 Design Requirements for 12V Battery Protection

The system design requirements are listed in Table 9-1.

Table 9-1. Design Parameters – 12V Reverse Battery Protection, Overcurrent Protection, and Overvoltage Protection

DESIGN PARAMETER	EXAMPLE VALUE
Operating input voltage range	12V battery, 12V nominal with 3.2V cold crank and 35V load dump
Output power	50W
Output current range	4A nominal, 5A maximum
Input capacitance	0.1μF minimum
Output capacitance	0.1μF minimum, (optional 100μF for E-10 functional class A performance)
Short circuit current limit	20A
Overcurrent limit	10A
Overvoltage cut-off	37.0V, output cut-off > 37.0V
Automotive Transient Immunity Compliance	ISO 7637-2, ISO 16750-2 and LV124

9.2.2 Automotive Reverse Battery Protection

The LM749x0-Q1 feature two separate gate control and driver outputs, DGATE and HGATE, to drive back to back N-channel MOSFETs. This enables LM749x0-Q1 to provide comprehensive immunity with robust system protection during various automotive transient tests as per ISO 7637-2 and ISO 16750-2 standard as well as other automotive OEM standards. For more information, see the [Automotive EMC-compliant reverse-battery protection with ideal-diode controllers](#) article.

The LM749x0-Q1 gate drive output DGATE controls MOSFET Q1 to provide reverse battery protection and true reverse current blocking functionality. HGATE controls MOSFET Q2 to turn off the power path during input overvoltage condition. Resistor network R1, R2 and R3, R4 connected from SW pin to ground can be configured for undervoltage and overvoltage protection. Bi-directional TVS D1 clamps the automotive transient input voltages on the 12V battery, both positive and negative transients, to voltage levels safe for MOSFET Q1 and LM749x0-Q1.

Fast reverse current blocking response and quick reverse recovery enables LM749x0-Q1 to turn ON/OFF MOSFET Q1 during AC super imposed input specified by ISO 16750-2 and LV124 E-06 and provide active rectification of the AC input superimposed on DC battery voltage. Fast reverse current blocking response of LM749x0-Q1 helps to turn off MOSFET Q1 during negative transients inputs such as –150V 2ms Pulse 1 specified in ISO 7637-2 and input micro short conditions such as LV124 E-10 test.

9.2.2.1 Input Transient Protection: ISO 7637-2 Pulse 1

ISO 7637-2 Pulse 1 specifies negative transient immunity of electronic modules connected in parallel with an inductive load when the battery is disconnected. A typical pulse 1 specified in ISO 7637-2 starts with battery disconnection where supply voltage collapses to 0V followed by –150V 2ms applied with a source impedance of 10Ω at a slew rate of 1μs on the supply input. LM749x0-Q1 blocks reverse current and prevents the output voltage from swinging negative, protecting the rest of the electronic circuits from damage due to negative transient voltage. MOSFET Q1 is quickly turned off within 0.5μs by fast reverse comparator of LM749x0-Q1. A single bi-directional TVS is required at the input to clamp the negative transient pulse within the operating maximum voltage across cathode to anode of 85V and does not violate the MOSFET Q1 drain-source breakdown voltage rating.

ISO 7637-2 Pulse 1 performance of LM749x0-Q1 is shown in [Figure 9-2](#).

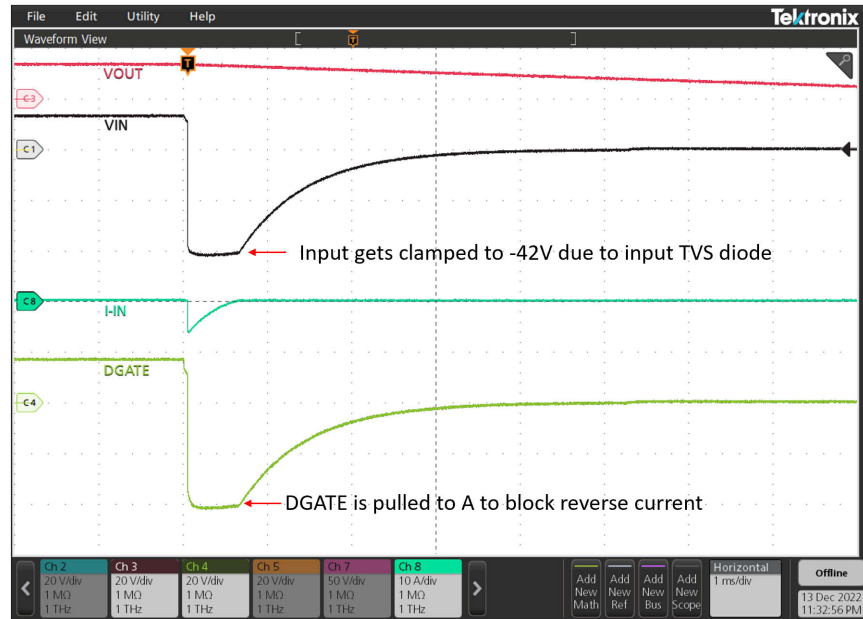


Figure 9-2. ISO 7637-2 Pulse 1

9.2.2.2 AC Super Imposed Input Rectification: ISO 16750-2 and LV124 E-06

Alternators are used to power the automotive electrical system and charge the battery during normal runtime of the vehicle. Rectified alternator output contains residual AC ripple voltage superimposed on the DC battery voltage due to various reasons which includes engine speed variation, regulator duty cycle with field switching ON/OFF and electrical load variations. On a 12V battery supply, alternator output voltage is regulated by a voltage regulator between 14.5V to 12.5V by controlling the field current of alternator's rotor. All electronic modules are tested for proper operation with superimposed AC ripple on the DC battery voltage. AC super imposed test specified in ISO 16750-2 and LV124 E-06 requires AC ripple of 2V peak-peak on a 13.5V DC battery voltage, swept from 15Hz to 30kHz. LM74900-Q1 rectifies the AC superimposed voltage by turning the MOSFET Q1 OFF quickly to cut-off reverse current and turning the MOSFET Q1 ON quickly during forward conduction. Active rectification of 2V peak-peak 30kHz AC input by LM749x0-Q1 is shown in [Figure 10-3](#). LM74910-Q1 has higher DGATE strength and is capable of achieving active rectification at AC superimpose frequency of 200kHz as shown in [Figure 9-4](#). Fast turn off and quick turn ON of the MOSFET reduces power dissipation in the MOSFET Q1 and active rectification reduces power dissipation in the output hold-up capacitor's ESR by half.

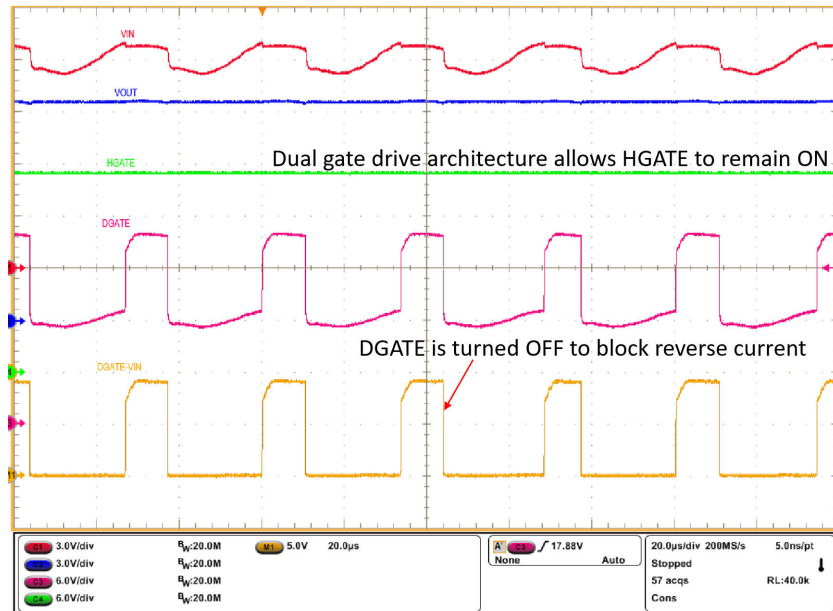


Figure 9-3. AC Super Imposed Test – 2V Peak-Peak 30kHz

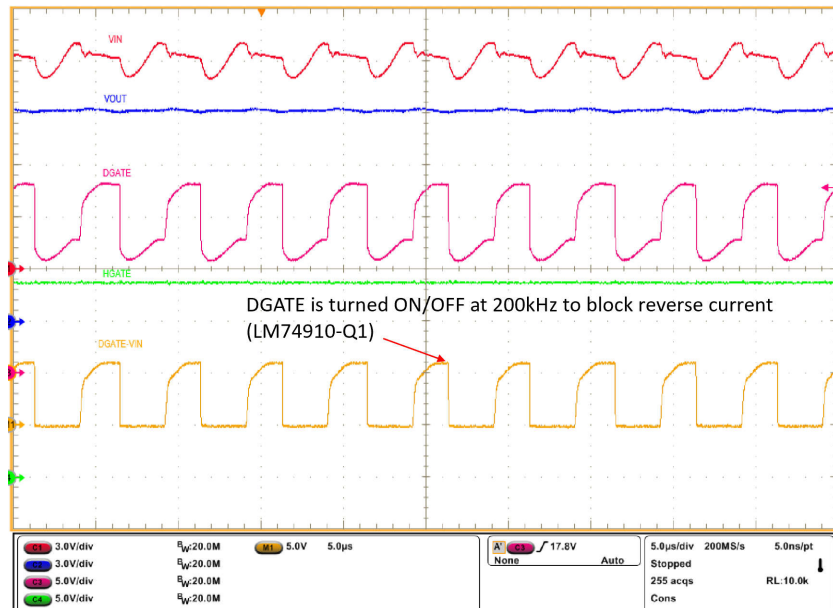


Figure 9-4. AC Super Imposed Test – 2V Peak-Peak 200kHz (LM74910-Q1)

9.2.2.3 Input Micro-Short Protection: LV124 E-10

E-10 test specified in LV124 standard checks for immunity of electronic modules to short interruptions in power supply input due to contact issues or relay bounce. During this test (case 2), micro-short is applied on the input for a duration as low as 10μs to several ms. For a functional pass status A, electronic modules are required to run uninterrupted during the E-10 test (case 2) with 100μs duration. Dual-Gate drive architecture of LM749x0-Q1, DGATE and HGATE, enables to achieve a functional pass status A with optimum hold up capacitance on the output when compared to a single gate drive controller. When input micro-short is applied for 100μs, LM749x0-Q1 quickly turns off MOSFET Q1 by shorting DGATE to ANODE (source of MOSFET) within 0.5μs to prevent the output from discharging and the HGATE remains ON keeping MOSFET Q2 ON, enabling fast recovery after the input short is removed.

Performance of LM749x0-Q1 during E10 input power supply interruption test case 2 is shown in Figure 10-4. After the input short is removed, input voltage recovers and VAC voltage crosses forward turn on threshold (V_{AC_FWD}), MOSFET Q1 is turned back ON quickly. Note that dual-gate drive topology allows MOSFET Q2 to remain ON during the test and helps in restoring the input power faster. Output voltage remains unperturbed during the entire duration, achieving functional status A.

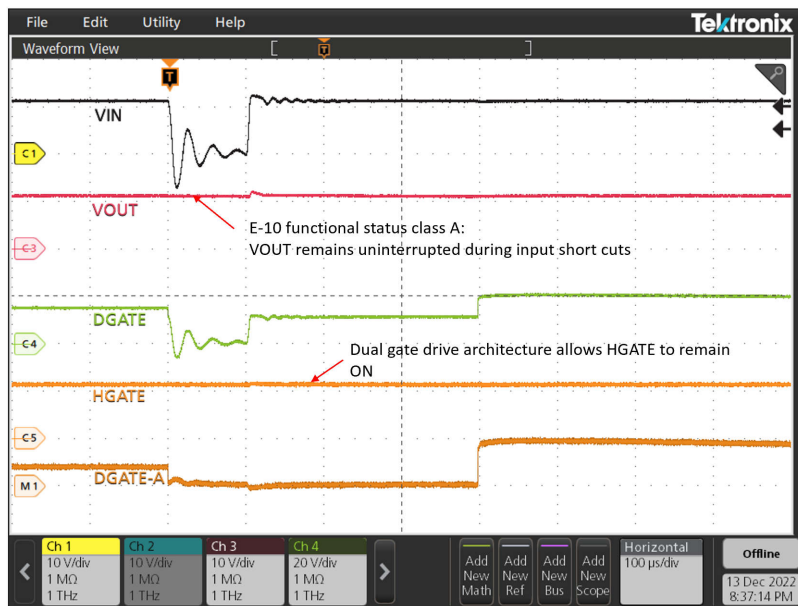


Figure 9-5. Input Micro-Short – LV124 E10 TC 2 100μs

9.2.3 Detailed Design Procedure

9.2.3.1 Design Considerations

Table 9-1 summarizes the design parameters that must be known for designing an automotive reverse battery protection circuit with overvoltage cut-off. During power up, inrush current through MOSFET Q2 needs to be limited so that the MOSFET operates well within its SOA. Maximum load current, maximum ambient temperature and thermal properties of the PCB determine the $R_{DS(on)}$ of the MOSFET Q2 and maximum operating voltage determines the voltage rating of the MOSFET Q2. Selection of MOSFET Q1 is determined mainly by the maximum operating load current, maximum ambient temperature, maximum frequency of AC super imposed voltage ripple and ISO 7637-2 pulse 1 requirements. overvoltage threshold is decided based on the rating of downstream DC/DC converter or other components after the reverse battery protection circuit. A single bi-directional TVS or two back-back uni-directional TVS are required to clamp input transients to a safe operating level for the MOSFETs Q1, Q2 and LM749x0-Q1.

9.2.3.2 Charge Pump Capacitance VCAP

Minimum required capacitance for charge pump VCAP is based on input capacitance of the MOSFET Q1, $C_{ISS(MOSFET_Q1)}$ and input capacitance of Q2 $C_{ISS(MOSFET)}$.

Charge Pump VCAP: Minimum 0.1μF is required; recommended value of VCAP (μF) $\geq 10 \times (C_{ISS(MOSFET_Q1)} + C_{ISS(MOSFET_Q2)})$ (μF)

9.2.3.3 Input and Output Capacitance

A minimum input capacitance C_{IN} of 0.1μF and output capacitance C_{OUT} of 0.1μF is recommended.

9.2.3.4 Hold-Up Capacitance

Usually bulk capacitors are placed on the output due to various reasons such as uninterrupted operation during power interruption or micro-short at the input, hold-up requirements for doing a memory dump before turning of the module and filtering requirements as well. This design considers minimum bulk capacitors requirements for meeting functional status "A" during LV124 E10 test case 2 100μs input interruption. To achieve functional pass status A, acceptable voltage droop in the output of LM74900-Q1 is based on the UVLO settings of downstream DC-DC converters. For this design, drop from 12V to 6.5V in output voltage for 100μs is considered (assuming downstream converter with 5V output) and the minimum hold-up capacitance required is calculated by

$$C_{HOLD_UP_MIN} = \frac{I_{LOAD} \times 100 \mu s}{\Delta V_{OUT}} \quad (8)$$

Minimum hold-up capacitance required for 5.5V drop in 100μs is 100μF. Note that the typical application circuit shows the hold-up capacitor as optional because not all designs require hold-up capacitance.

9.2.3.5 Selection of Current Sense Resistor, R_{SNS}

The LM749x0-Q1 has an integrated short circuit detection comparator with default sense threshold of 20mV. For this application, short circuit limit is set to 20A. The sense resistor value based on short circuit comparator can be calculated by [Equation 9](#).

$$R_{SENSE} = \frac{V_{SENSE}}{I_{SCP}} \quad (9)$$

Select a 1mΩ resistor with 1% tolerance to set short circuit protection limit of 20A.

9.2.3.6 Selection of Scaling Resistor (R_{SET}) and Short-Circuit Protection Setting Resistor (R_{SCP})

R_{SET} is the resistor connected between VS and CS+ pins. This resistor scales the overcurrent protection threshold voltage and coordinates with R_{ILIM} and R_{IMON} to determine the overcurrent protection threshold and current monitoring output. The recommended range of RSET is 50Ω to 100Ω. RSET is selected as 50Ω, 1% for this design example.

The LM749x0-Q1 default short circuit threshold of 20mV can be shifted to higher value as given by [Equation 10](#).

$$V_{SNS_SCP} = (10.5 \mu A \times R_{ISCP}) + 20 \text{ mV} \quad (10)$$

For this application, ISCP pin is shorted directly to common drain point. User has a flexibility to populate suitable value of RSCP resistor to adjust short circuit protection current limit and also gives flexibility in terms of selecting different current sense resistor value.

An additional de-glitch filter (optional) consisting of R_{SCP} and C_{SCP} can be added from ISCP pin to CS– pin as shown in [Figure 9-1](#) to avoid any false short circuit trigger in case of fast automotive transients such as Input Micro cuts (LV124, E-10), AC superimpose (LV124, E-06), ISO7637-2 Pulse 2 A.

9.2.3.7 Overcurrent Limit (ILIM), Circuit Breaker Timer (TMR), and Current Monitoring Output (IMON) Selection

Programming the Overcurrent Protection Threshold – R_{ILIM} Selection

The R_{ILIM} sets the overcurrent protection (circuit breaker detection) threshold, whose value can be calculated using [Equation 11](#).

$$R_{(ILIM)} = \frac{12 \times R_{SET}}{R_{SENSE} \times I_{LIM}} \quad (11)$$

To set 10A as overcurrent protection threshold, R_{ILIM} value is calculated to be 60kΩ. Choose the closest available standard value: 60kΩ, 1%.

Programming the Circuit Breaker Time – C_{TMR} Selection

For the design example under discussion, overcurrent transients are allowed for 1ms duration. This blanking interval, T_{OC} (or circuit breaker interval, T_{CB}) can be set by selecting appropriate capacitor C_{TMR} from TMR pin to ground. The value of C_{TMR} to set 1ms for T_{OC} can be calculated using [Equation 12](#).

$$T_{(OC)} = 1.2 \times \frac{C_{TMR}}{82.3 \mu A} \quad (12)$$

Choose closest available standard value: 68nF, 10%.

Programming Current Monitoring Output – R_{IMON} Selection

Voltage at IMON pin V_{IMON} is proportional to the output load current. This can be connected to an ADC of the downstream system for monitoring the operating condition and health of the system. The R_{IMON} must be selected based on the maximum load current and the input voltage range of the ADC used. R_{IMON} is set using [Equation 13](#).

$$V_{IMON} = \frac{0.9 \times V_{SENSE} \times R_{IMON}}{R_{SET}} \quad (13)$$

For this application example, V_{IMON} is selected to be 2.7V at full load current of 5A. R_{IMON} value of 30.1kΩ, 1% is selected.

9.2.3.8 Overvoltage Protection and Battery Monitor

Resistors R_1 , R_2 and R_3 , R_4 connected from SW pin to ground is used to program the undervoltage and overvoltage threshold. The resistor values required for setting the undervoltage threshold (V_{UVLO} to 5.5V) and overvoltage threshold (V_{OV} to 37.0V) are calculated by solving

$$V_{UVLOF} = \frac{R_2 \times V_{UVSET}}{(R_1 + R_2)} \quad (14)$$

$$V_{OVR} = \frac{R_4 \times V_{OVSET}}{(R_3 + R_4)} \quad (15)$$

For minimizing the input current drawn from the battery through resistors R_1 , R_2 , and R_3 ; it is recommended to use higher value of resistance. Using high value resistors will add error in the calculations because the current through the resistors at higher value will become comparable to the leakage current into the OV pin. Maximum leakage current into the OV pin is $1\mu A$ and choosing total ladder resistor $< 120k\Omega$ ensures current through resistors is 100 times greater than leakage through OV pin.

Based on the device electrical characteristics, V_{UVLOF} is 0.55V. Select $R_1 = 100k\Omega$. Solving Equation 14 gives $R_2 = 11.5k\Omega$. Solving Equation 15 with R_3 selected as $100k\Omega$ and $V_{OVR} = 0.6V$ gives $R_4 = 1.65k\Omega$ as standard 1% resistor values closest to the calculated resistor values.

An optional capacitor C_{UV} can be placed in parallel with R_2 on UVLO resistor ladder in order to filter out any fast undervoltage transients on battery lines to avoid false UVLO trigger.

For this application example separate resistor ladder is selected to program overvoltage and undervoltage threshold. However common resistor ladder from SW pin to ground can also be used as shown in Figure 8-9.

9.2.4 MOSFET Selection: Blocking MOSFET Q1

For selecting the blocking MOSFET Q1, important electrical parameters are the maximum continuous drain current I_D , the maximum drain-to-source voltage $V_{DS(MAX)}$, the maximum drain-to-source voltage $V_{GS(MAX)}$, the maximum source current through body diode and the drain-to-source ON resistance $R_{DS(ON)}$.

The maximum continuous drain current, I_D , rating must exceed the maximum continuous load current.

The maximum drain-to-source voltage, $V_{DS(MAX)}$, must be high enough to withstand the highest differential voltage seen in the application. This would include all the automotive transient events and any anticipated fault conditions. It is recommended to use MOSFETs with V_{DS} voltage rating of 60V along with a single bidirectional TVS or a V_{DS} rating 40V maximum rating along with two unidirectional TVS connected back-back at the input.

The maximum V_{GS} LM74900-Q1 can drive is 14V, so a MOSFET with 15V minimum V_{GS} rating should be selected. If a MOSFET with $< 15V$ V_{GS} rating is selected, a zener diode can be used to clamp V_{GS} to safe level, but this would result in increased IQ current.

To reduce the MOSFET conduction losses, lowest possible $R_{DS(ON)}$ is preferred, but selecting a MOSFET based on low $R_{DS(ON)}$ may not be beneficial always. Higher $R_{DS(ON)}$ will provide increased voltage information to LM74900-Q1's reverse comparator at a lower reverse current. Reverse current detection is better with increased $R_{DS(ON)}$. Choosing a MOSFET with $< 50mV$ forward voltage drop at maximum current is a good starting point.

For active rectification of AC super imposed ripple on the battery supply voltage, gate-source charge Q_{GS} of Q1 must be selected to meet the required AC ripple frequency. Maximum gate-source charge Q_{GS} (at 4.5V V_{GS}) for active rectification every cycle is

$$Q_{GS_MAX} = \frac{1.3mA}{F_{AC_RIPPLE}} \quad (16)$$

Where 1.3mA is minimum charge pump current at 7V $V_{DGATE}-V_A$, F_{AC_RIPPLE} is frequency of the AC ripple superimposed on the battery and Q_{GS_MAX} is the Q_{GS} value specified in manufacturer datasheet at 6V V_{GS} . For active rectification at $F_{AC_RIPPLE} = 30KHz$, $Q_{GS_MAX} = 43nC$.

Based on the design requirements, BUK7Y4R8-60E MOSFET is selected and its ratings are:

- 60V $V_{DS(MAX)}$ and $\pm 20V$ $V_{GS(MAX)}$
- $R_{DS(ON)}$ 5.0m Ω typical at 5V V_{GS} and 2.9m Ω rated at 10V V_{GS}
- MOSFET Q_{GS} 17.4nC

Thermal resistance of the MOSFET should be considered against the expected maximum power dissipation in the MOSFET to ensure that the junction temperature (T_J) is well controlled.

9.2.5 MOSFET Selection: Hot-Swap MOSFET Q2

The V_{DS} rating of the MOSFET Q2 should be sufficient to handle the maximum system voltage along with the input transient voltage. For this 12V design, transient overvoltage events are during suppressed load dump 35V 400ms and ISO 7637-2 pulse 2A 50V for 50 μ s. Further, ISO 7637-2 Pulse 3B is a very fast repetitive pulse of 100V 100ns that is usually absorbed by the input and output ceramic capacitors and the maximum voltage on the 12V battery can be limited to < 40V the minimum recommended input capacitance of 0.1 μ F. The 50V ISO 7637-2 Pulse 2 A can also be absorbed by input and output capacitors and its amplitude could be reduced to 40V peak by placing sufficient amount of capacitance at input and output. However for this 12V design, maximum system voltage is 50V and a 60V V_{DS} rated MOSFET is selected.

The V_{GS} rating of the MOSFET Q2 should be higher than that maximum HGATE-OUT voltage 15V.

Inrush current through the MOSFET during input hot-plug into the 12V battery is determined by output capacitance. External capacitor on HGATE, $C_{D\text{VDT}}$ is used to limit the inrush current during input hot-plug or start-up. The value of inrush current determined by Equation 2 need to be selected to ensure that the MOSFET Q2 is operating well within its safe operating area (SOA). To limit inrush current to 0.5A, $C_{D\text{VDT}}$ value of 10.0nF is chosen.

Duration of inrush current is calculated by Equation 17.

$$T_{\text{INRUSH}} = \frac{V_{\text{IN}} \times C_{\text{OUT}}}{I_{\text{INRUSH}}} \quad (17)$$

Calculated inrush current duration is 2.5ms with 0.5A inrush current.

MOSFET BUK7Y4R8-60E having 60V V_{DS} and ± 20 V V_{GS} rating is selected for Q2. Power dissipation during inrush is well within the MOSFET's safe operating area (SOA).

9.2.6 TVS Selection

A 600W SMBJ TVS such as SMBJ33CA is recommended for input transient clamping and protection. For detailed explanation on TVS selection for 12V battery systems, refer to [TVS Selection for 12-V Battery Systems](#).

9.2.7 Application Curves

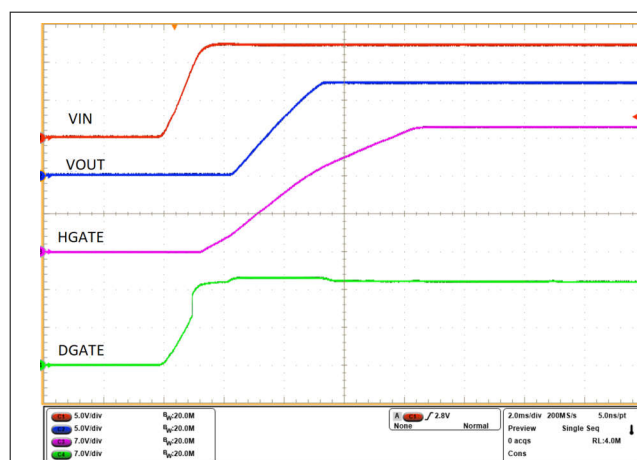


Figure 9-6. Start-Up 12V With EN Pulled to VS

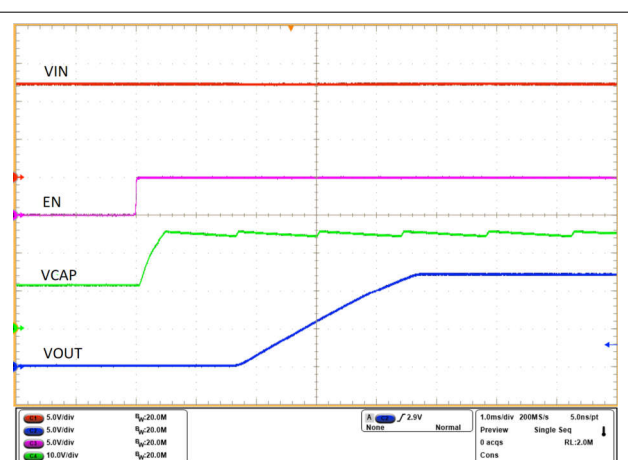


Figure 9-7. Start-Up 12V With EN Going Low to High

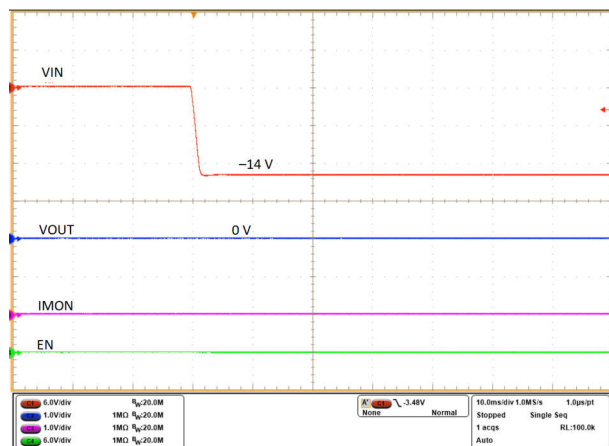


Figure 9-8. Reverse Input Voltage -14V

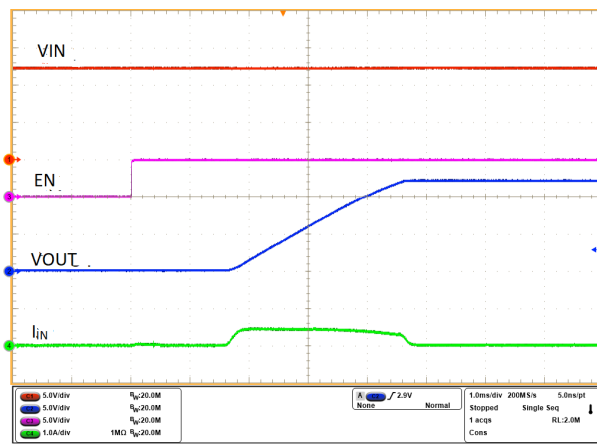


Figure 9-9. Inrush Current With No Load at Output

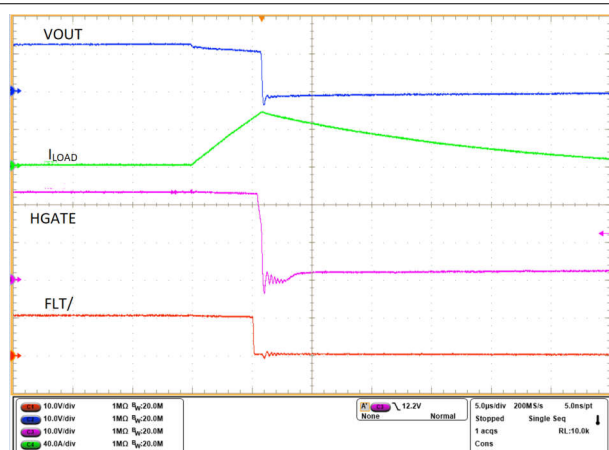


Figure 9-10. Output Short Circuit Protection (On-The-Fly)

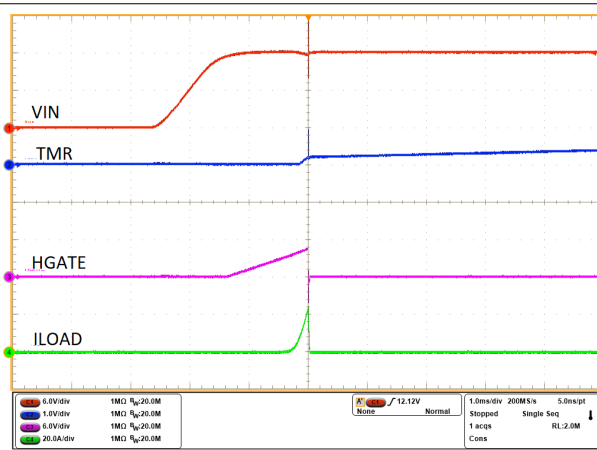


Figure 9-11. Device Start-Up With Output Short Circuit (TIMER Duration 1ms)

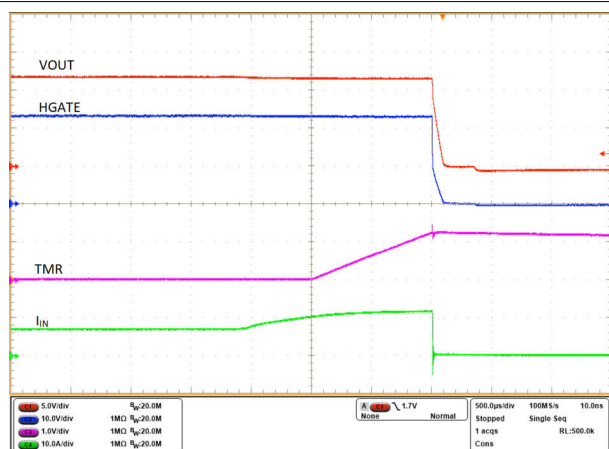


Figure 9-12. Output Overcurrent Protection (TIMER Duration 1ms)

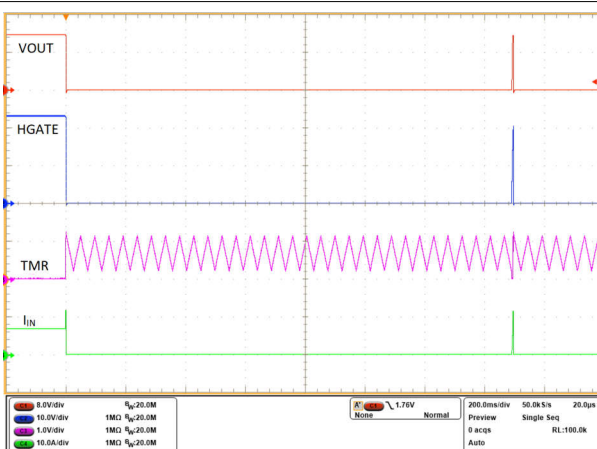


Figure 9-13. Output Overcurrent Protection (TIMER Duration 1ms): Auto Retry

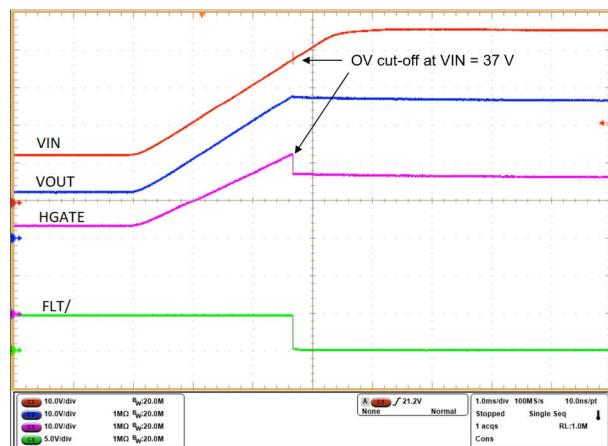


Figure 9-14. Overvoltage Protection

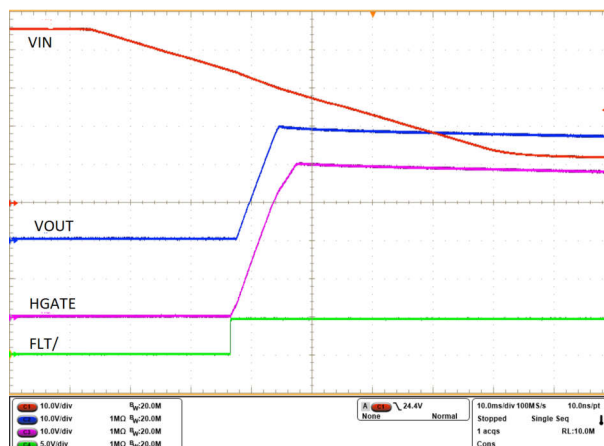


Figure 9-15. Overvoltage Recovery

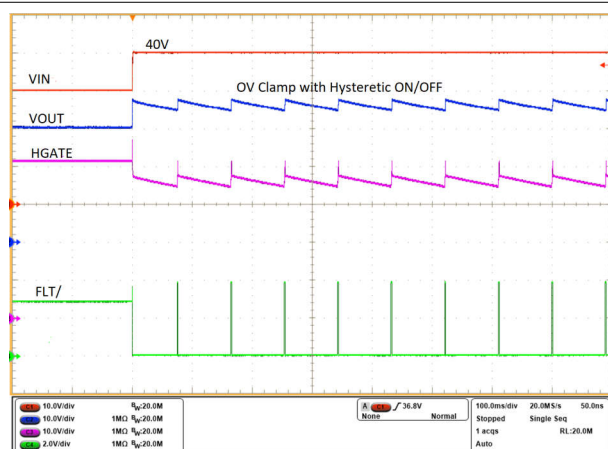


Figure 9-16. Overvoltage Clamp Response (OV Resistor Ladder Referred to VOUT)

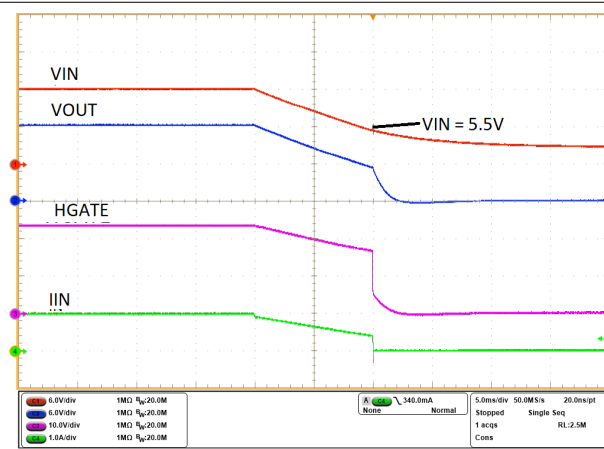


Figure 9-17. Undervoltage Lockout (UVLO) Protection ($V_{IN_UVLO} = 5.5V$)

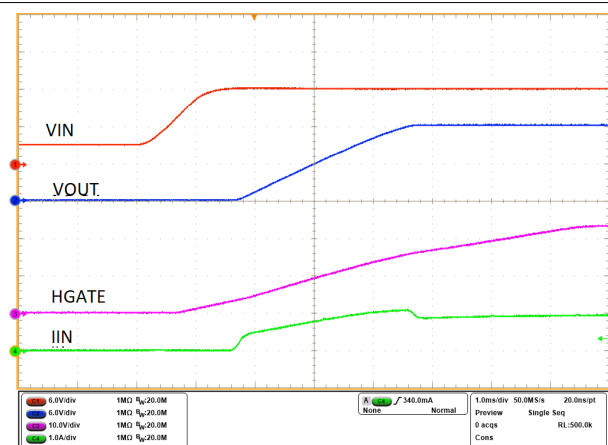


Figure 9-18. Undervoltage Lockout (UVLO) Recovery






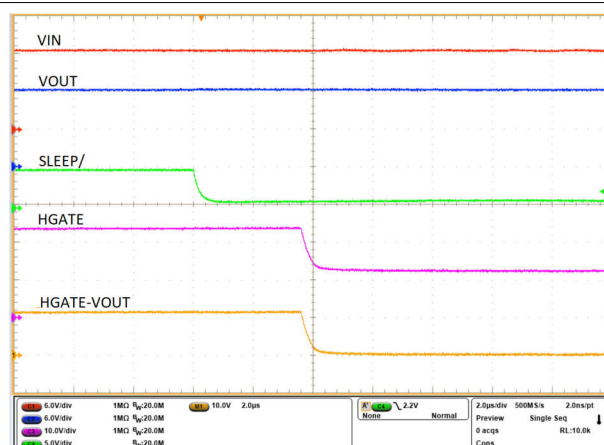


Figure 9-19. SLEEP Mode Entry ($\overline{\text{SLEEP}}$ = Low, EN = High)



Some applications may require additional Transient Voltage Suppressor (TVS) to prevent transients from exceeding the *Absolute Maximum Ratings* of the device. These transients can occur during EMC testing such as automotive ISO7637 pulses.

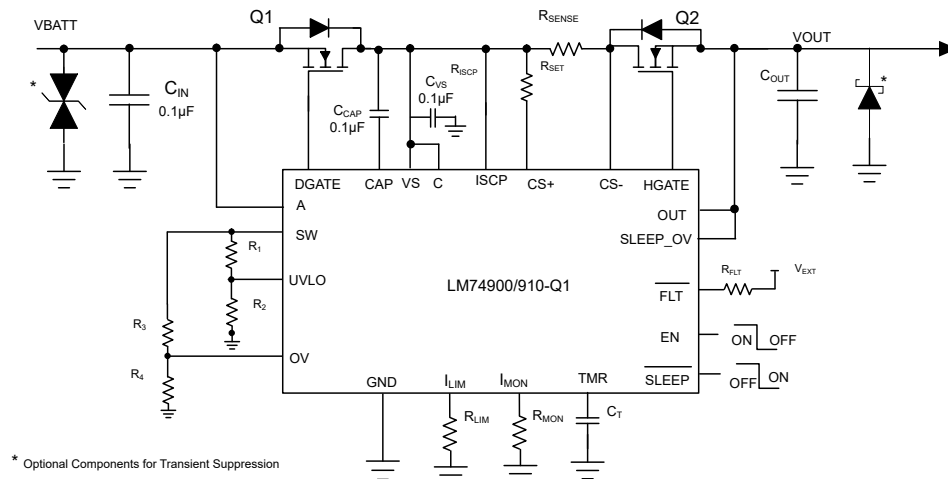


Figure 9-27. Typical Application Diagram

9.4.2 TVS Selection for 12V Battery Systems

In selecting the TVS, important specifications are breakdown voltage and clamping voltage. The breakdown voltage of the TVS for positive transients must be higher than 24V jump start voltage and 35V suppressed load dump voltage and less than the maximum ratings of LM749x0-Q1 (65V). The breakdown voltage of TVS for negative transients must be beyond than maximum reverse battery voltage -16V , so that the TVS- is not damaged due to long time exposure to reverse connected battery.

Clamping voltage is the voltage the TVS diode clamps in high current pulse situations and this voltage is much higher than the breakdown voltage. In the case of an ISO 7637-2 pulse 1, the input voltage goes up to -150V with a generator impedance of 10Ω . This action translates to 15A flowing through the TVS-, and the voltage across the TVS is close to its clamping voltage.

The next criterion is that the absolute maximum rating of cathode to anode voltage of the LM749x0-Q1 (85V) and the maximum VDS rating MOSFET are not exceeded. In the design example, 60V rated MOSFET is chosen and maximum limit on the cathode to anode voltage is 60V.

During ISO 7637-2 pulse 1, the anode of LM749x0-Q1 is pulled down by the ISO pulse, clamped by TVS- and the MOSFET Q1 is turned off quickly to prevent reverse current from discharging the bulk output capacitors. When the MOSFET turns off, the cathode to anode voltage seen is equal to (TVS Clamping voltage + Output capacitor voltage). If the maximum voltage on output capacitor is 16V (maximum battery voltage), then the clamping voltage of the TVS- must not exceed, $(60V - 16)V = -44V$.

The SMBJ33CA TVS diode can be used for 12V battery protection application. The breakdown voltage of 36.7V meets the jump start, load dump requirements on the positive side and 16V reverse battery connection on the negative side. During ISO 7637-2 pulse 1 test, the SMBJ33CA clamps at -44V with 12A of peak surge current as shown in and it meets the clamping voltage $\leq 44V$. SMBJ series of TVS' are rated up to 600W peak pulse power levels and are sufficient for ISO 7637-2 pulses.

9.5 Layout

9.5.1 Layout Guidelines

- For the ideal diode stage, connect A, DGATE, and C pins of LM749x0-Q1 close to the MOSFET SOURCE, GATE and, DRAIN pins.
- For the load disconnect stage, connect HGATE and OUT pins of LM749x0-Q1 close to the MOSFET GATE and SOURCE pins.

- The high current path of for this solution is through the MOSFET, therefore it is important to use thick and short traces for source and drain of the MOSFET to minimize resistive losses.
- Follow kelvin connection for connecting CS+ and CS- pin to external current sense resistor.
- The DGATE pin of the LM749x0-Q1 must be connected to the MOSFET GATE with short trace.
- Place transient suppression components close to LM749x0-Q1.
- Place the decoupling capacitor, C_{VS} close to VS pin and chip GND.
- The charge pump capacitor across CAP and VS pins must be kept away from the MOSFET to lower the thermal effects on the capacitance value.

9.5.2 Layout Example

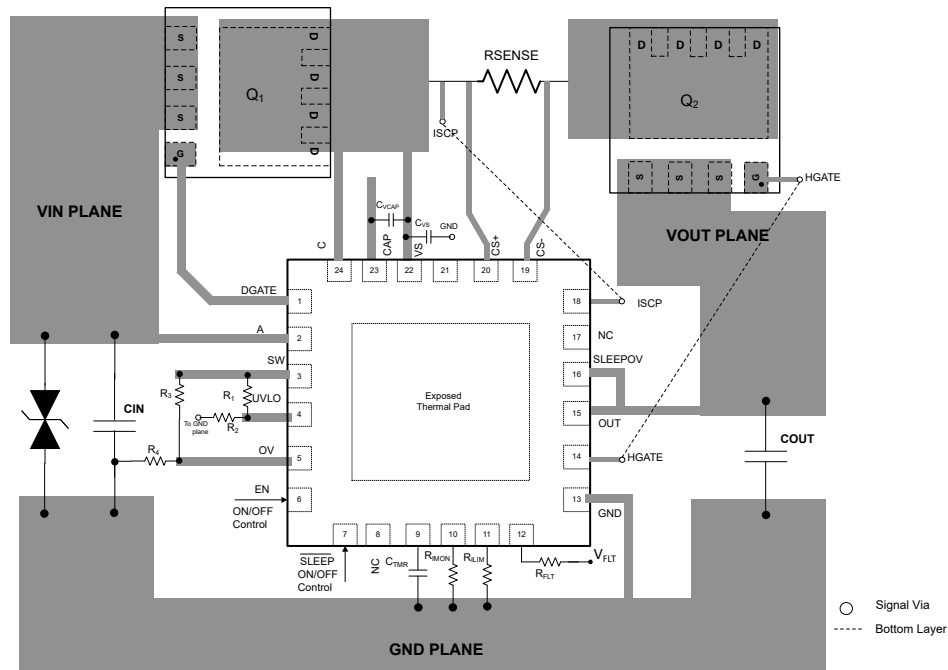


Figure 9-28. Layout Example

10 Device and Documentation Support

10.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

10.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision B (July 2023) to Revision C (August 2025)	Page
• Added Features of LM74910H-Q1.....	1
• Added LM74910H-Q1 in package information table.....	1
• Added resistor value to CS+ description in Pin Functions.....	3
• Added LM74910H-Q1 specifications to the Absolute Maximum Ratings table.....	5
• Added LM74910H-Q1 specifications to the Electrical Characteristics table.....	6
• Added Imon Accuracy plot for LM74910H-Q1.....	11
• Added Device Functional Modes section.....	24
• Added LM74910H-Q1 sleep mode operation.....	24
• Added LM74910H-Q1 sleep mode operation waveforms.....	34
<hr/>	
Changes from Revision A (June 2023) to Revision B (July 2023)	Page
• Removed preview notes for LM74900-Q1 in the Package Information table.....	1
• Added minor editorial changes throughout the document.....	1
• Updated Functional Block Diagram	17

-
- Changed " $V_{AC(REV)}$ " to " $V_{(AC_REV)}$ " 18
-

Changes from Revision * (December 2022) to Revision A (June 2023)	Page
---	------

- | | |
|---|---|
| • Changed status from <i>Advanced Information</i> to <i>Production Data</i> | 1 |
|---|---|
-

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LM74900QRGERQ1	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	LM 74900Q
LM74900QRGERQ1.A	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	LM 74900Q
LM74910HQRGERQ1	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	LM 7910HQ
LM74910QRGERQ1	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	LM 74910Q
LM74910QRGERQ1.A	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	LM 74910Q

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LM74900QRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
LM74910HQRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
LM74910QRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LM74900QRGERQ1	VQFN	RGE	24	3000	367.0	367.0	35.0
LM74910HQRGERQ1	VQFN	RGE	24	3000	367.0	367.0	35.0
LM74910QRGERQ1	VQFN	RGE	24	3000	367.0	367.0	35.0

RGE 24

GENERIC PACKAGE VIEW



VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD



Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4204104/H

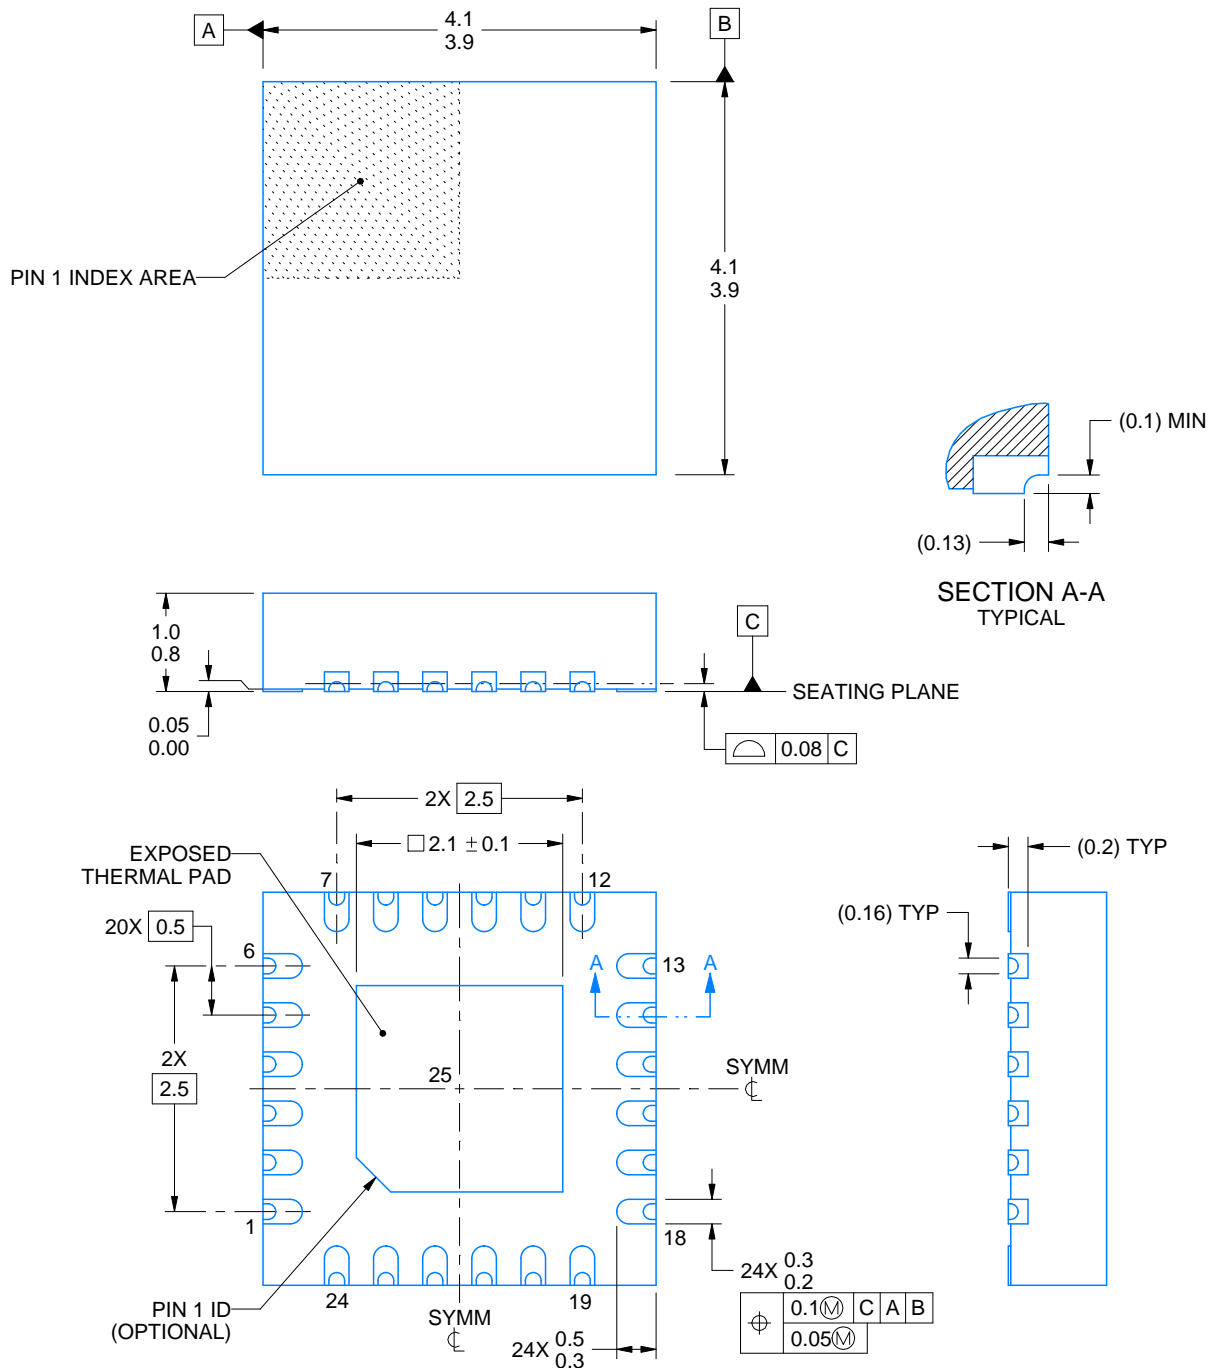

4228214/A 11/2021

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


RGE0024T

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

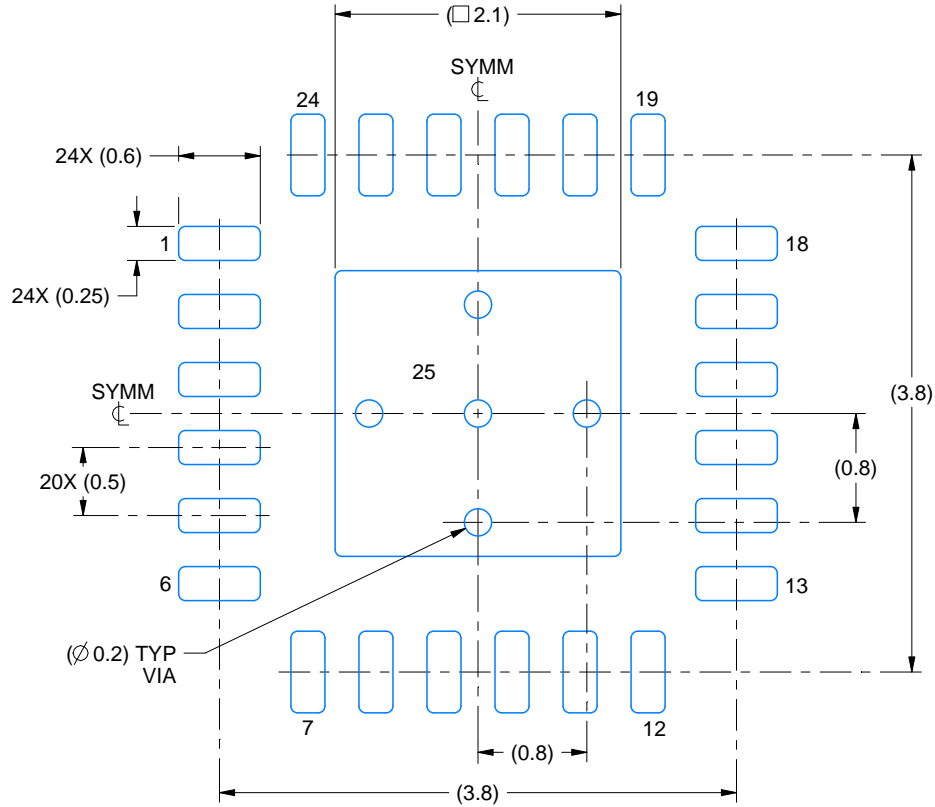

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:18X

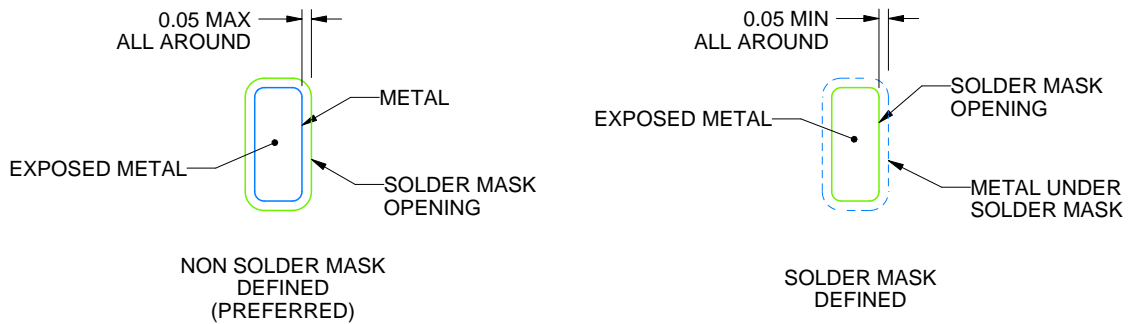

SOLDER MASK DETAILS

4228214/A 11/2021

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RGE0024T

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

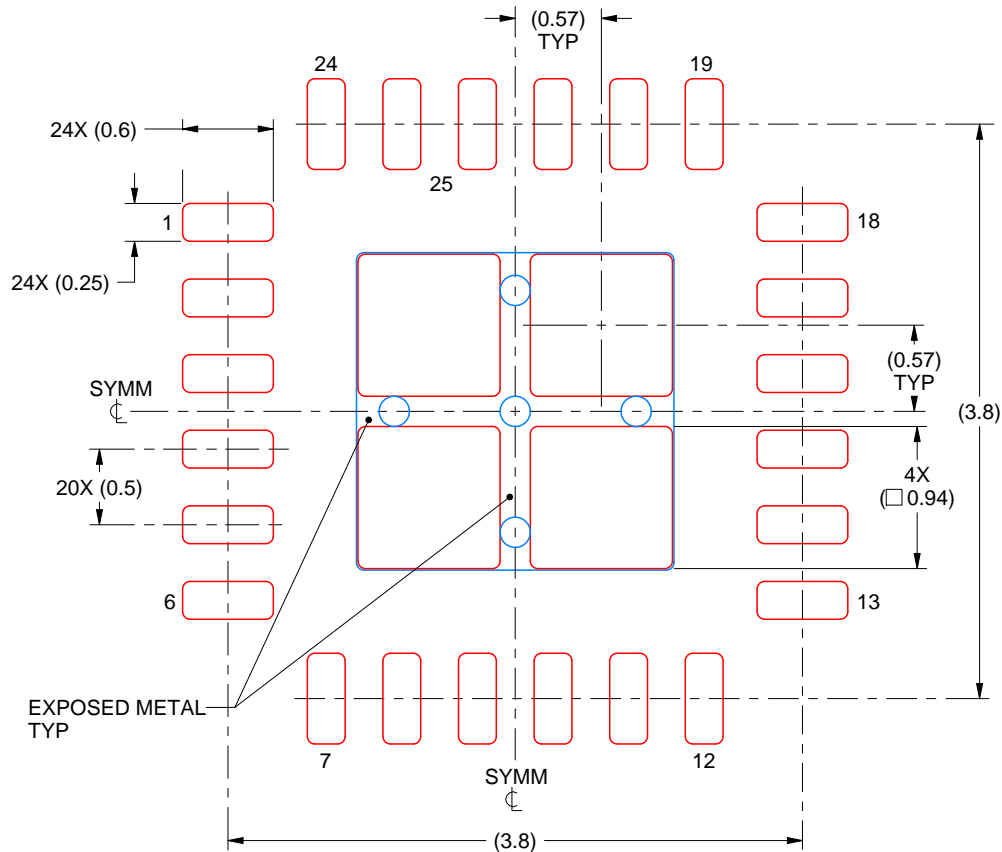

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL

THERMAL PAD 25:
77% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:20X

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025