

## Memory Stick™ INTERCONNECT EXTENDER CHIPSET WITH LVDS

### SN65LVDT14 – ONE DRIVER PLUS FOUR RECEIVERS

### SN65LVDT41 – FOUR DRIVERS PLUS ONE RECEIVER

#### FEATURES

- Controlled Baseline
  - One Assembly/Test Site, One Fabrication Site
- Enhanced Diminishing Manufacturing Sources (DMS) Support
- Enhanced Product-Change Notification
- Qualification Pedigree <sup>(1)</sup>
- Integrated 110- $\Omega$  Nominal Receiver Line Termination Resistor
- Operate From a Single 3.3-V Supply
- Greater Than 125-Mbps Data Rate
- Flow-Through Pinout
- LVTTL-Compatible Logic I/Os
- ESD Protection on Bus Pins Exceeds 12 kV
- Meet or Exceed Requirements of ANSI/TIA/EIA-644A Standard for LVDS
- 20-Pin Thin Shrink Small-Outline Package (PW) With 26-Mil Terminal Pitch

(1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

#### APPLICATIONS

- Memory Stick™ Interface Extensions With Long Interconnects Between Host and Memory Stick
- Serial Peripheral Interface™ (SPI™) Interface Extension to Allow Long Interconnects Between Master and Slave
- MultiMediaCard™ (MMC) Interface in SPI Mode
- General-Purpose Asymmetric Bidirectional Communication

#### DESCRIPTION




The SN65LVDT14 combines one LVDS line driver with four terminated LVDS line receivers in one package. It is designed to be used at the Memory Stick™ end of an LVDS-based Memory Stick interface extension.

The SN65LVDT41 combines four LVDS line drivers with a single terminated LVDS line receiver in one package. It is designed to be used at the host end of an LVDS-based Memory Stick interface extension.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Serial Peripheral Interface, SPI are trademarks of Motorola.  
MultiMediaCard is a trademark of MultiMediaCard Association.  
Memory Stick is a trademark of Sony.

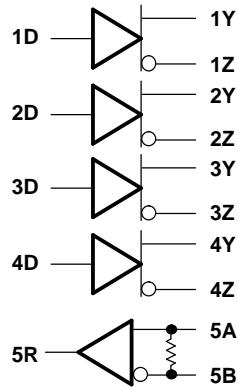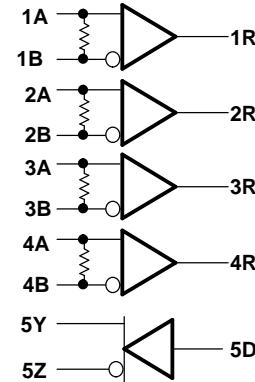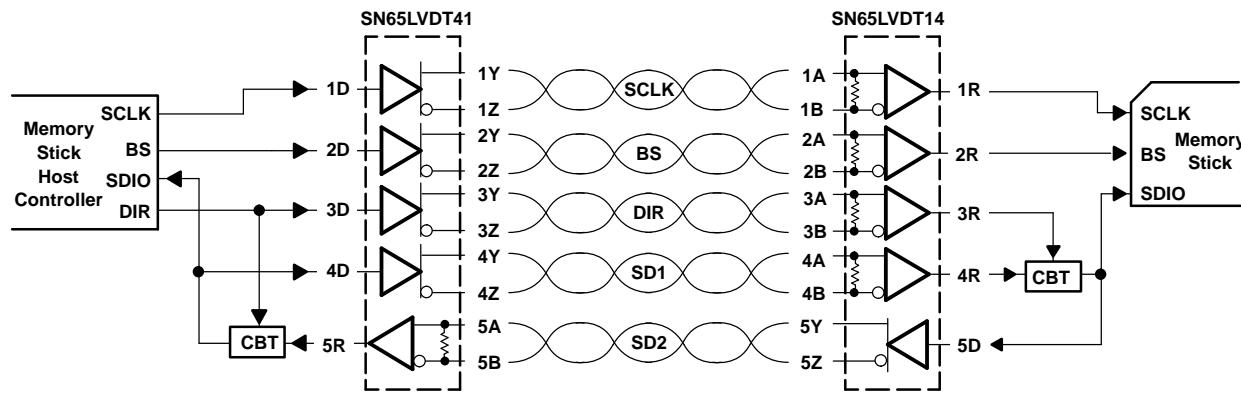**SN65LVDT41 LOGIC DIAGRAM  
(POSITIVE LOGIC)**

**SN65LVDT14 LOGIC DIAGRAM  
(POSITIVE LOGIC)**

**TYPICAL MEMORY STICK INTERFACE EXTENSION**

**Absolute Maximum Ratings<sup>(1)</sup>**

over operating free-air temperature range (unless otherwise noted)

		SN65LVDT14, SN65LVDT41	UNIT	
		MIN	MAX	
V <sub>CC</sub>	Supply voltage range <sup>(2)</sup>	–0.5	4	V
Input voltage range	D or R	–0.5	6	V
	A, B, Y, or Z	–0.5	4	
Electrostatic discharge	Human-Body Model <sup>(3)</sup>	A, B, Y, Z, and GND		±12
	All pins			±8
	Charged-Device Model <sup>(4)</sup>	All pins		±500
Continuous total power dissipation		See Dissipation Rating Table		
Storage temperature range		–65	150	°C
Lead temperature 1.6 mm (1/16 in) from case for 10 s		260		

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values, except differential I/O bus voltages, are with respect to network ground terminal.

(3) Tested in accordance with JEDEC Standard 22, Test Method A114-A

(4) Tested in accordance with JEDEC Standard 22, Test Method C101

## Package Dissipation Ratings

PACKAGE	T <sub>A</sub> < 25°C POWER RATING	OPERATING FACTOR ABOVE T <sub>A</sub> = 25°C	T <sub>A</sub> = 85°C POWER RATING	T <sub>A</sub> = 125°C POWER RATING
PW	774 mW	6.2 mW/°C	402 mW	154 mW

## Recommended Operating Conditions

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage range	3	3.3	3.6	V
V <sub>IH</sub>	High-level input voltage	2			V
V <sub>IL</sub>	Low-level input voltage			0.8	V
V <sub>ID</sub>	Magnitude of differential input voltage	0.1	0.6		V
V <sub>IC</sub>	Common-mode input voltage (see Figure 1)	$\frac{ V_{ID} }{2}$	$2.4 - \frac{ V_{ID} }{2}$		V
T <sub>A</sub>	Operating free-air temperature	-40	125		°C

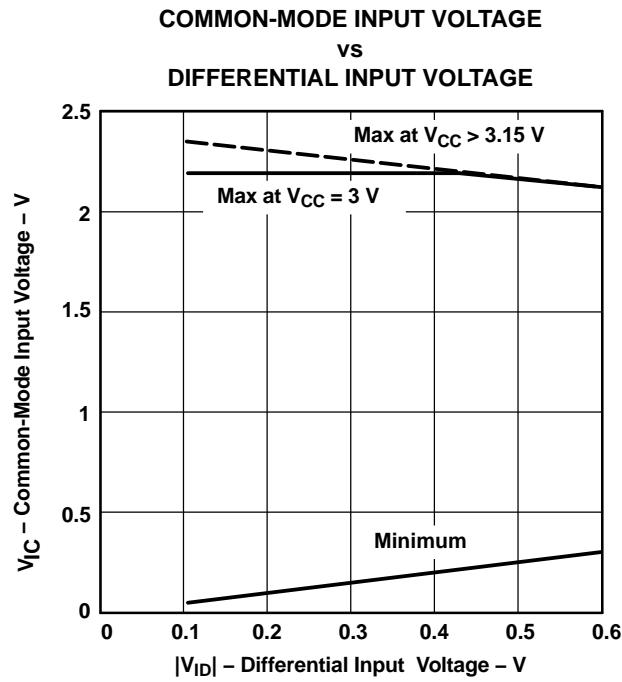


Figure 1. V<sub>IC</sub> vs V<sub>ID</sub> and V<sub>CC</sub>

## Receiver Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
$V_{I\text{TH}+}$	Positive-going differential input voltage threshold See <a href="#">Figure 2</a> and <a href="#">Table 1</a>		100		mV
$V_{I\text{TH}-}$	Negative-going differential input voltage threshold See <a href="#">Figure 2</a> and <a href="#">Table 1</a>	-100			mV
$V_{O\text{H}}$	High-level output voltage $I_{O\text{H}} = -8 \text{ mA}$	2.4			V
$V_{O\text{L}}$	Low-level output voltage $I_{O\text{L}} = 8 \text{ mA}$		0.4		V
$I_I$	Input current (A or B inputs) $V_I = 0 \text{ V}$ and $V_I = 2.4 \text{ V}$ , Other input open		±40		µA
$I_{I\text{(OFF)}}$	Power-off input current (A or B inputs) $V_{CC} = 0 \text{ V}$ , $V_I = 2.4 \text{ V}$		±40		µA
$C_i$	Input capacitance, A or B input to GND $V_I = A \sin 2\pi ft + CV$	5			pF
$Z_t$	Termination impedance $V_{ID} = 0.4 \sin 2.5E09 t \text{ V}$	88	132		Ω

(1) All typical values are at 25°C and with a 3.3-V supply.

## Driver Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
$ V_{O\text{Dl} }$	Differential output voltage magnitude $R_L = 100 \Omega$ , See <a href="#">Figure 3</a> and <a href="#">Figure 5</a>	247	340	454	mV
$\Delta V_{O\text{Dl} }$	Change in differential output voltage magnitude between logic states $R_L = 100 \Omega$ , See <a href="#">Figure 3</a> and <a href="#">Figure 5</a>	-50	50	50	mV
$V_{OC\text{(SS)}}$	Steady-state common-mode output voltage See <a href="#">Figure 6</a>	1.125	1.375	1.375	V
$\Delta V_{OC\text{(SS)}}$	Change in steady-state common-mode output voltage between logic states See <a href="#">Figure 6</a>	-50	50	50	mV
$V_{OC\text{(PP)}}$	Peak-to-peak common-mode output voltage See <a href="#">Figure 6</a>	50			mV
$I_{IH}$	High-level input current $V_{IH} = 2 \text{ V}$		20		µA
$I_{IL}$	Low-level input current $V_{IL} = 0.8 \text{ V}$		10		µA
$I_{os}$	Short-circuit output current $V_{OY} \text{ or } V_{OZ} = 0 \text{ V}$		±24		mA
			±12		
$I_{O\text{(OFF)}}$	Power-off output current $V_{CC} = 1.5 \text{ V}$ , $V_O = 2.4 \text{ V}$		±1		µA

(1) All typical values are at 25°C and with a 3.3-V supply.

(2) This parameter is GBD over industrial temperature range.

## Device Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
$I_{CC}$	Supply current SN65LVDT14 SN65LVDT41 Driver $R_L = 100 \Omega$ , Driver $V_I = 0.8 \text{ V}$ or $2 \text{ V}$ , Receiver $V_I = \pm 0.4 \text{ V}$	25	35	mA

## Receiver Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT
$t_{PLH}$	$C_L = 10 \text{ pF}$ , See <a href="#">Figure 4</a>	1	2.6	4.8	ns
$t_{PHL}$		1	2.6	4.8	ns
$t_r$		0.15		1.4	ns
$t_f$		0.15		1.4	ns
$t_{sk(p)}$		150	750		ps
$t_{sk(o)}$		100	550		ps
$t_{sk(pp)}$				1	ns

(1)  $t_{sk(o)}$  is the magnitude of the time difference between the  $t_{PLH}$  or  $t_{PHL}$  of all the receivers of a single device with all of their inputs connected together.

(2)  $t_{sk(pp)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

## Driver Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT
$t_{PLH}$	$R_L = 100 \Omega$ , $C_L = 10 \text{ pF}$ , See <a href="#">Figure 7</a>	0.9	1.7	3.9	ns
$t_{PHL}$		0.9	1.6	3.9	ns
$t_r$		0.26		1.2	ns
$t_f$		0.26		1.2	ns
$t_{sk(p)}$		150	750		ps
$t_{sk(o)}$		80	400		ps
$t_{sk(pp)}$				1.5	ns

(1)  $t_{sk(p)}$  is the magnitude of the time difference between the high-to-low and low-to-high propagation delay times at an output.

(2)  $t_{sk(pp)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

## PARAMETER MEASUREMENT INFORMATION

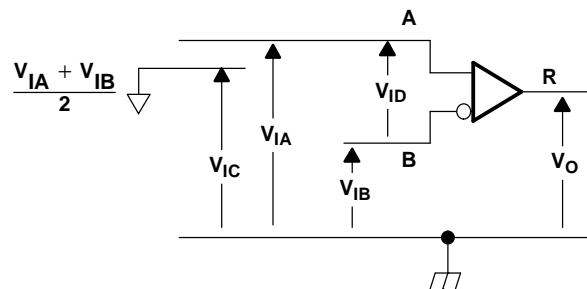


Figure 2. Receiver Voltage Definitions

Table 1. Receiver Minimum and Maximum Input Threshold Test Voltages

APPLIED VOLTAGE		RESULTING DIFFERENTIAL INPUT VOLTAGE	RESULTING COMMON-MODE INPUT VOLTAGE
V <sub>IA</sub>	V <sub>IB</sub>	V <sub>ID</sub>	V <sub>IC</sub>
1.25 V	1.15 V	100 mV	1.2 V
1.15 V	1.25 V	-100 mV	1.2 V
2.4 V	2.3 V	100 mV	2.35 V
2.3 V	2.4 V	-100 mV	2.35 V
0.1 V	0 V	100 mV	0.05 V
0 V	0.1 V	-100 mV	0.05 V
1.5 V	0.9 V	600 mV	1.2 V
0.9 V	1.5 V	-600 mV	1.2 V
2.4 V	1.8 V	600 mV	2.1 V
1.8 V	2.4 V	-600 mV	2.1 V
0.6 V	0 V	600 mV	0.3 V
0 V	0.6 V	-600 mV	0.3 V


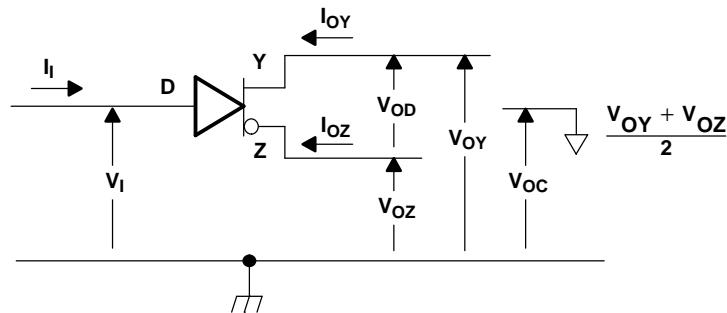


Figure 3. Driver Voltage and Current Definitions


## PARAMETER MEASUREMENT INFORMATION

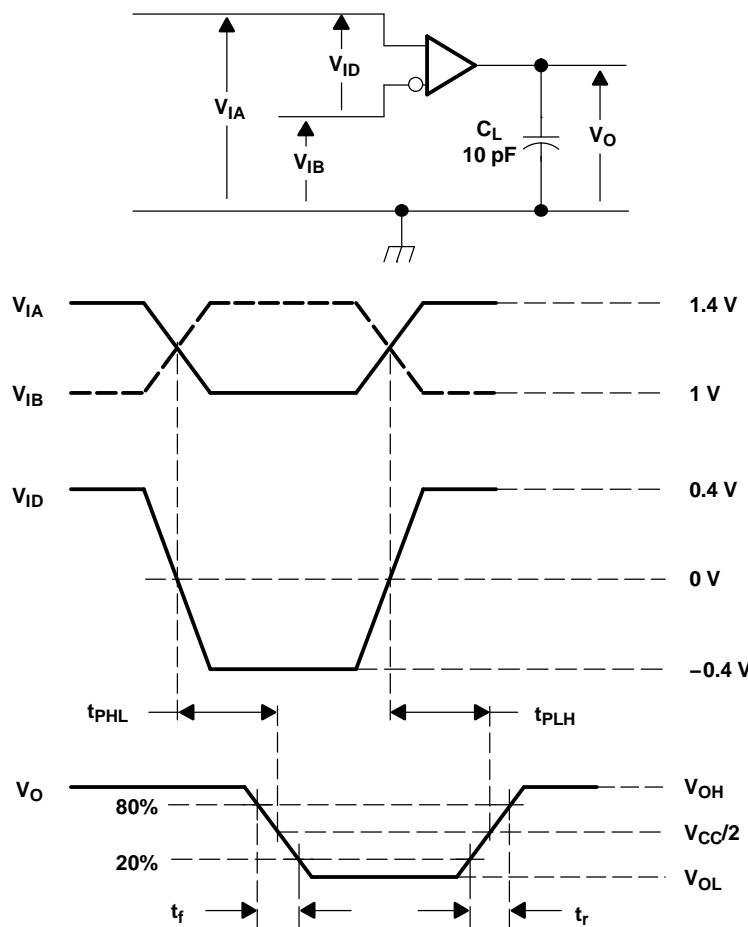


A. All input pulses are supplied by a generator having the following characteristics:  $t_r$  or  $t_f \leq 1 \text{ ns}$ , pulse repetition rate (PRR) = 1 Mpps, pulse width =  $0.5 \pm 0.05 \mu\text{s}$ .  $C_L$  includes instrumentation and fixture capacitance within 0.06 mm of the D.U.T.

Figure 4. Receiver Timing Test Circuit and Waveforms

## PARAMETER MEASUREMENT INFORMATION

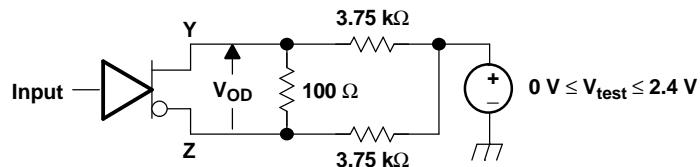


**Figure 5. Driver VDO Test Circuit**

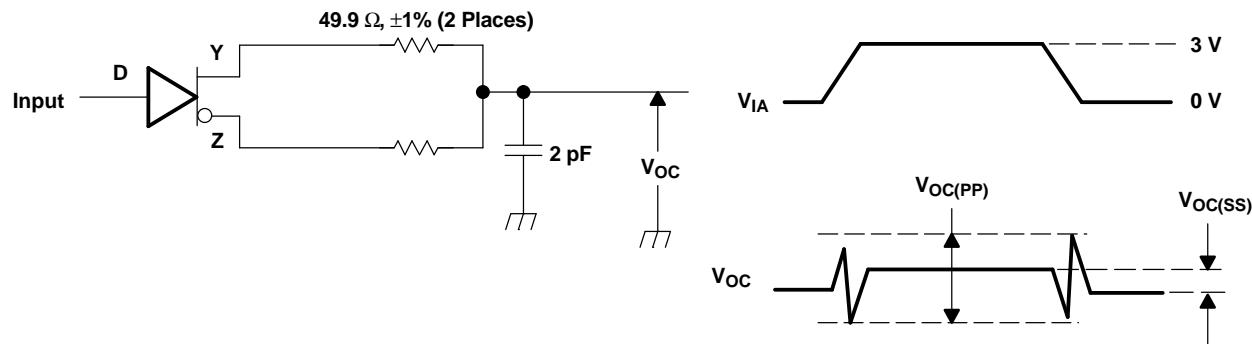


A. All input pulses are supplied by a generator having the following characteristics:  $t_r$  or  $t_f \leq 1$  ns, pulse repetition rate (PRR) = 0.5 Mpps, pulse width =  $500 \pm 10$   $\mu$ s.  $C_L$  includes instrumentation and fixture capacitance within 0,06 mm of the D.U.T. The measurement of  $V_{OC(PP)}$  is made on test equipment with a -3-dB bandwidth of at least 1 GHz.

**Figure 6. Test Circuit and Definitions for Driver Common-Mode Output Voltage**

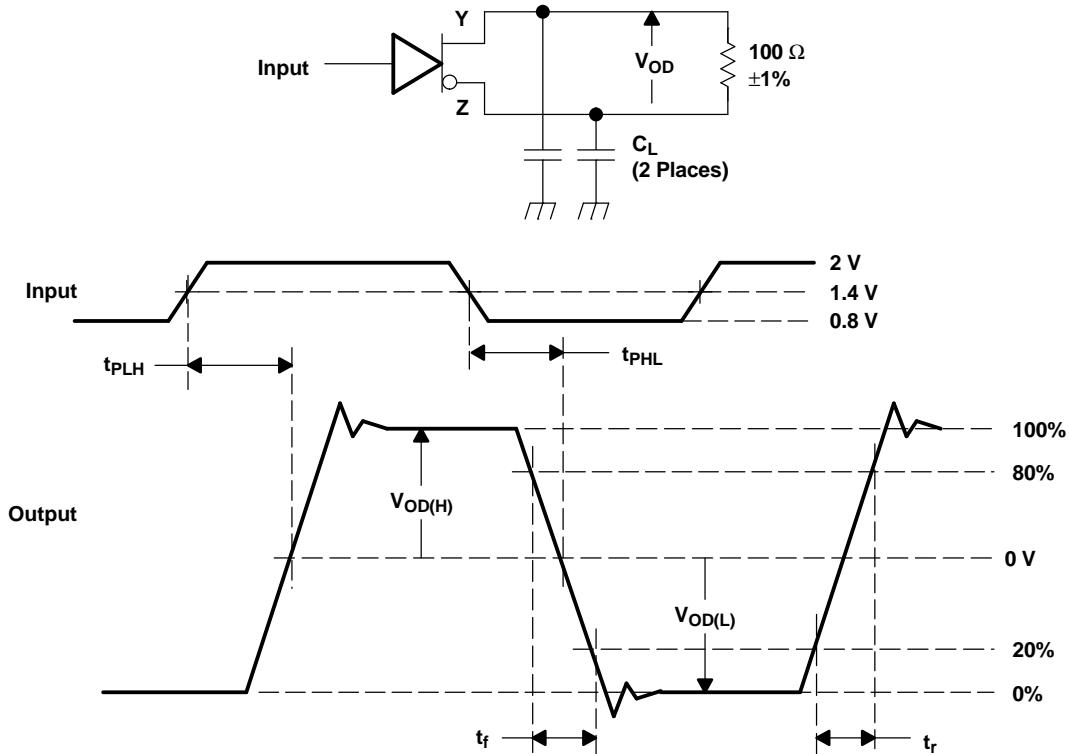

A. All input pulses are supplied by a generator having the following characteristics:  $t_r$  or  $t_f \leq 1$  ns, pulse repetition rate (PRR) = 1 Mpps, pulse width =  $0.5 \pm 0.05$   $\mu$ s.  $C_L$  includes instrumentation and fixture capacitance within 0,06 mm of the D.U.T.

**Figure 7. Test Circuit, Timing, and Voltage Definitions for Differential Output Signal**

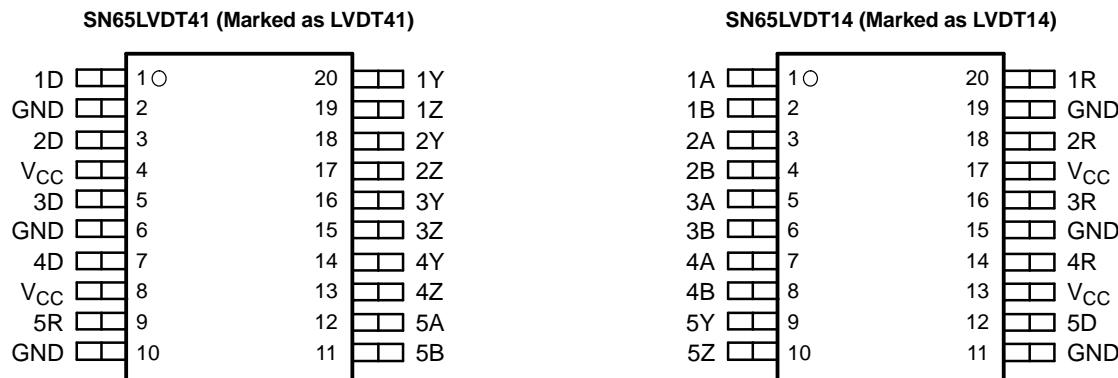

## FUNCTION TABLES

### RECEIVER<sup>(1)</sup>



INPUTS	OUTPUT R
$V_{ID} = V_A - V_B$	
$V_{ID} \geq 100 \text{ mV}$	H
$-100 \text{ mV} < V_{ID} < 100 \text{ mV}$	?
$V_{ID} \leq -100 \text{ mV}$	L
Open	H

(1) H = high level, L = low level,  
 ? = indeterminate

### DRIVER<sup>(1)</sup>

INPUT D	OUTPUTS	
	Y	Z
H	H	L
L	L	H
Open	L	H

(1) H = high level, L = low level

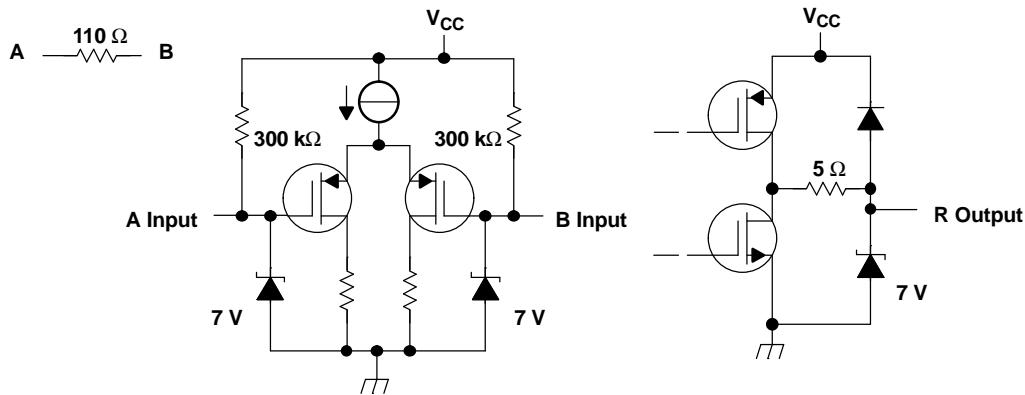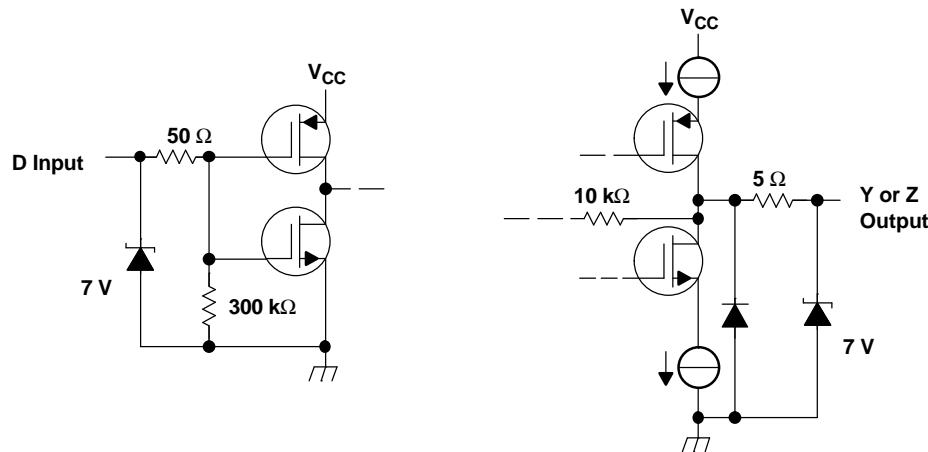**RECEIVER EQUIVALENT INPUT AND OUTPUT SCHEMATIC DIAGRAMS****DRIVER EQUIVALENT INPUT AND OUTPUT SCHEMATIC DIAGRAMS**

**TYPICAL CHARACTERISTICS**  
Receiver

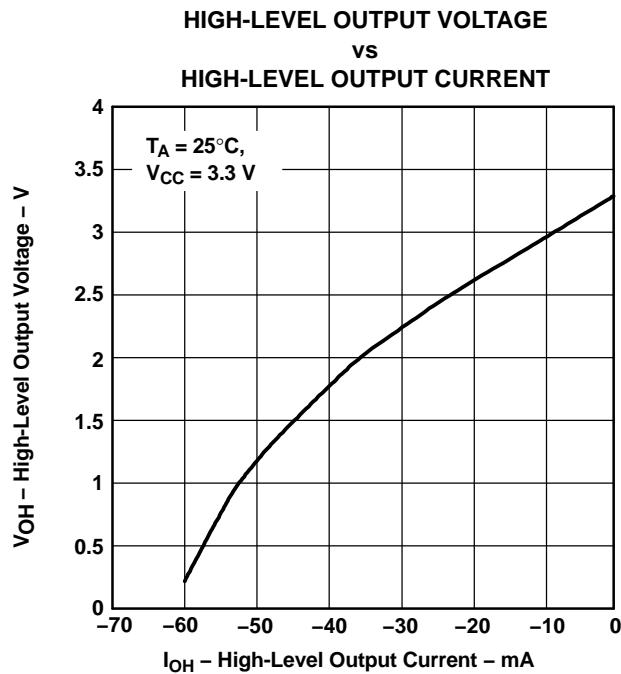


Figure 8.

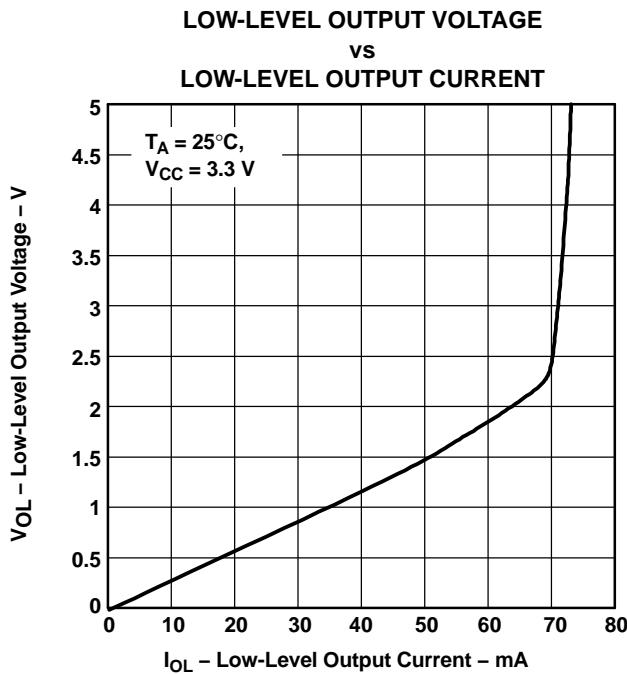


Figure 9.

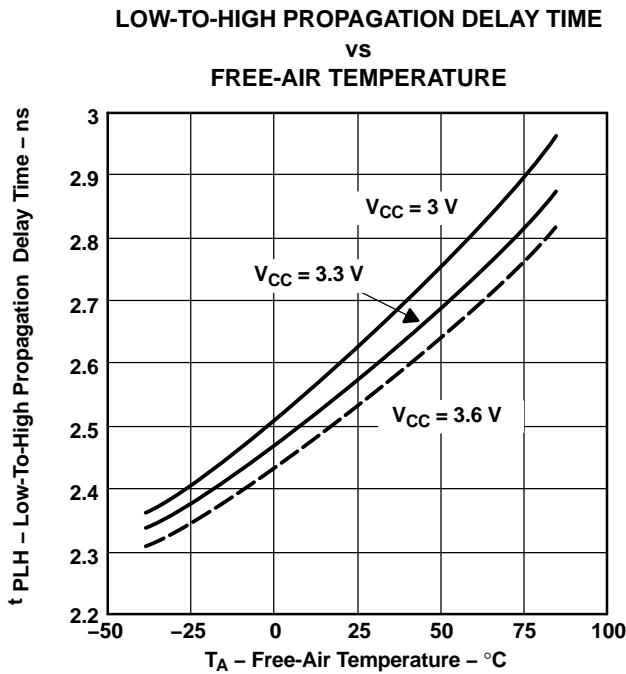


Figure 10.

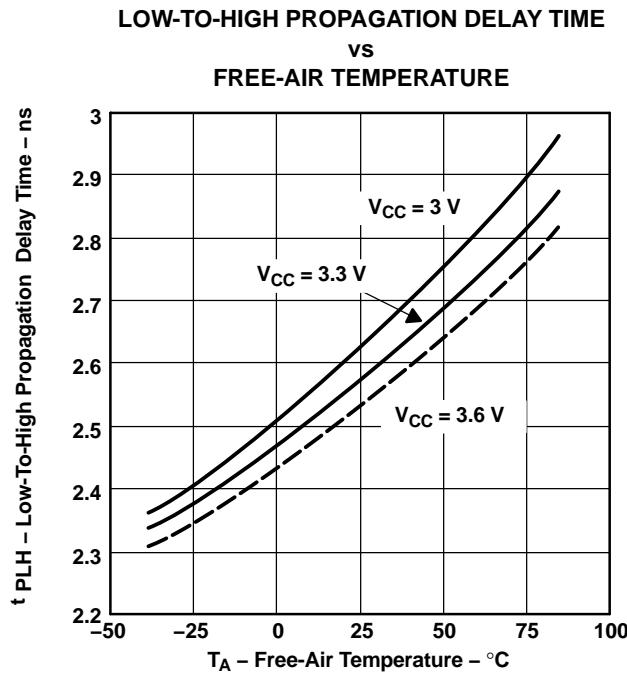


Figure 11.

TYPICAL CHARACTERISTICS  
Driver

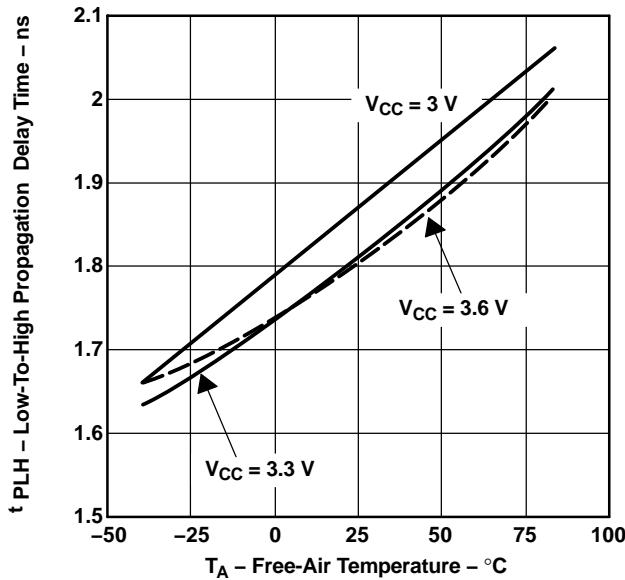
 LOW-TO-HIGH PROPAGATION DELAY TIME  
vs  
FREE-AIR TEMPERATURE


Figure 12.

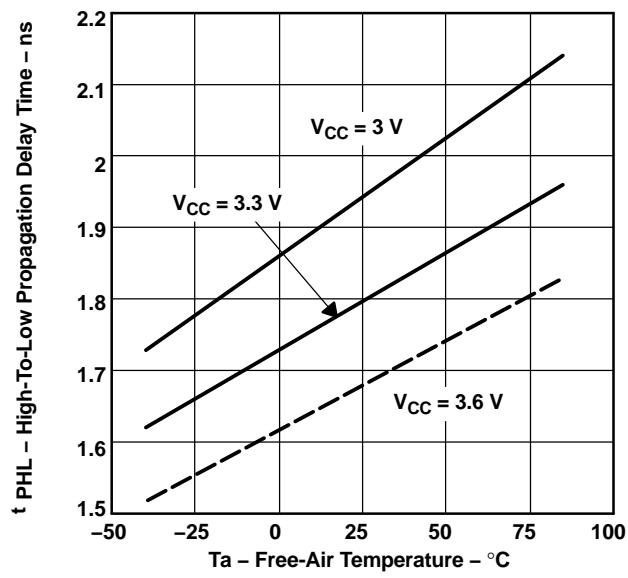
 HIGH-TO-LOW PROPAGATION DELAY TIME  
vs  
FREE-AIR TEMPERATURE


Figure 13.

## APPLICATION INFORMATION

### Extending the Memory Stick Interface Using LVDS Signaling Over Differential Transmission Cables

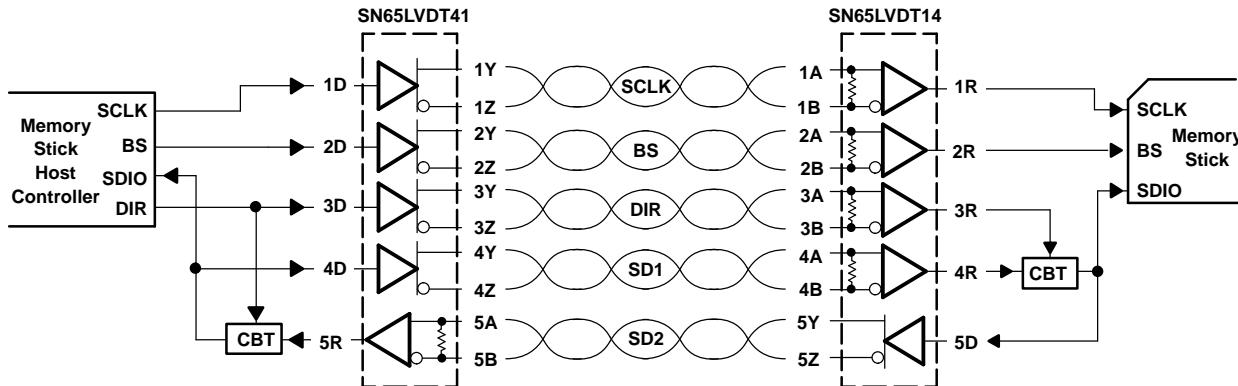


Figure 14. System-Level Block Diagram

The Memory Stick signaling interface operates in a master-slave architecture, with three active signal lines. The host (master) supplies a clock (SCLK) and bus-state (BS) signal to control the operation of the system. The SCLK and BS signals are unidirectional (simplex) from the host to the Memory Stick. The serial data input/output (SDIO) signal is a bidirectional (half-duplex) signal used to communicate both control and data information between the host and the Memory Stick. The direction of data control is managed by the host through a combination of BS line states and control information delivered to the Memory Stick.

The basic Memory Stick interface is capable of operating only over short distances due to the single-ended nature of the digital I/O signals. Such a configuration is entirely suitable for compact and portable devices where there is little if any separation between the host and the Memory Stick. In applications where a greater distance is needed between the host controller and the Memory Stick, it is necessary to utilize a different signaling method, such as low-voltage differential signaling, or LVDS.

LVDS, as specified by the TIA/EIA-644-A standard, provides several benefits when compared to alternative long-distance signaling technologies: low radiated emissions, high noise immunity, low power consumption, and inexpensive interconnect cables.

This device pair provides the necessary LVDS drivers and receivers specifically targeted at implementing a Memory Stick interconnect extension. It utilizes simplex links for the SCLK and BS signals and two simplex links for the SDIO data. The half-duplex SDIO data is split into two simplex streams under control of the host processor by means of the direction (DIR) signal. The DIR signal also is carried from the host to the Memory Stick on a simplex LVDS link.


The switching of the SDIO signal-flow direction in the single-ended interfaces is managed by electronic switch devices, identified by the CBT symbol in [Figure 7](#). A suggested CBT device for this application is the TI SN74CBTLV1G125. These devices are available in space-saving SOT-23 or SC-70 packages.

## MECHANICAL DATA

PW (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

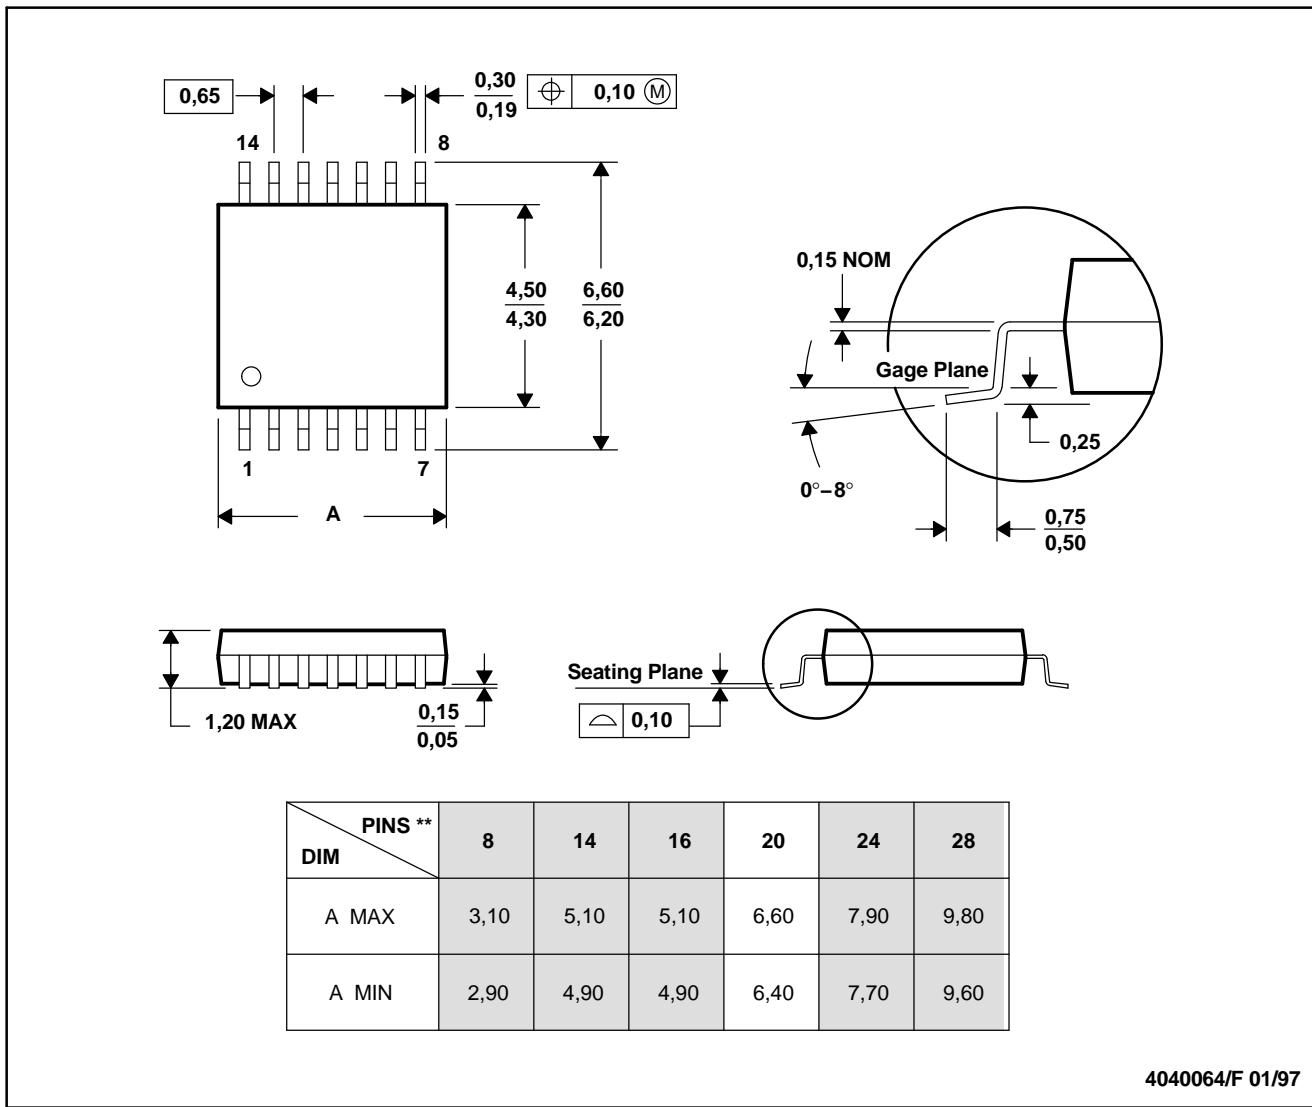

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-153

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">SN65LVDT14QPWREP</a>	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVDT14EP
<a href="#">SN65LVDT41QPWREP</a>	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVDT41EP
<a href="#">V62/05615-01XE</a>	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVDT14EP
<a href="#">V62/05615-02XE</a>	Active	Production	TSSOP (PW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVDT41EP

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



**OTHER QUALIFIED VERSIONS OF SN65LVDT14-EP, SN65LVDT41-EP :**

---


- Catalog : [SN65LVDT14](#), [SN65LVDT41](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

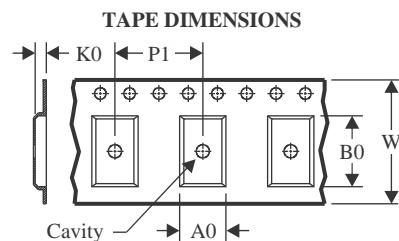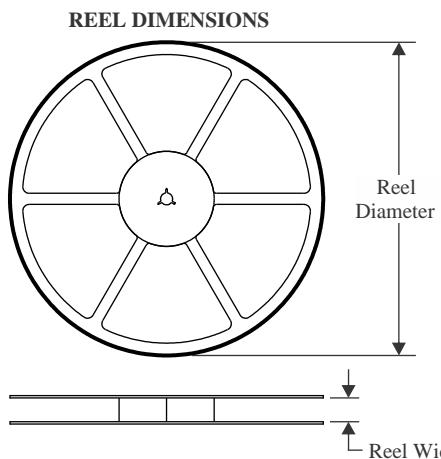
**TAPE AND REEL INFORMATION**


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

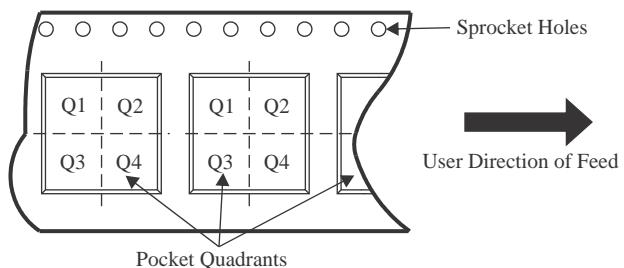**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN65LVDT14QPWREP	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN65LVDT41QPWREP	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1

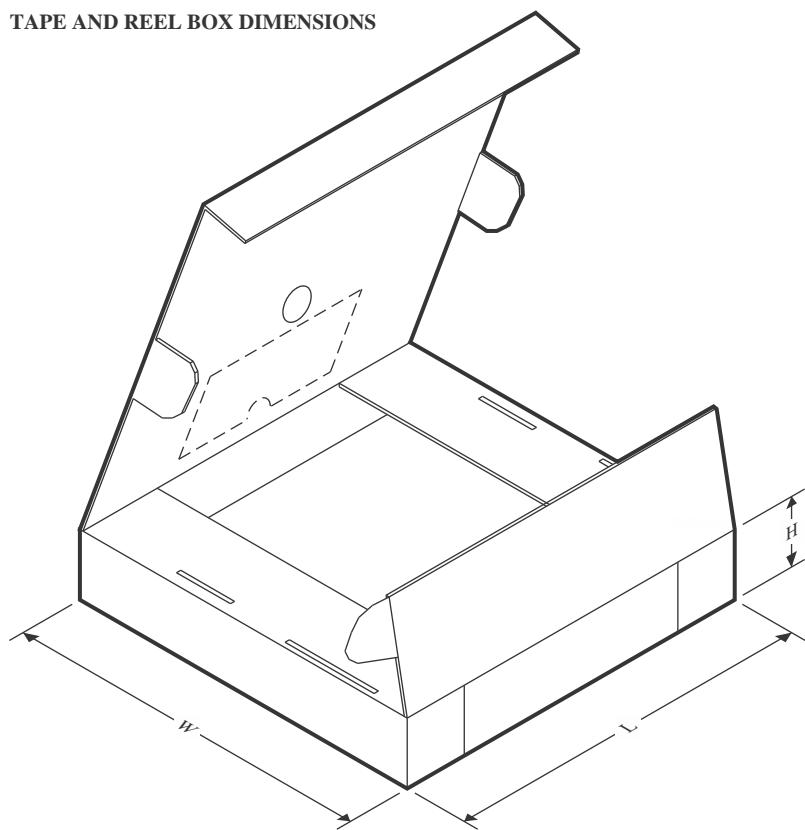**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN65LVDT14QPWREP	TSSOP	PW	20	2000	353.0	353.0	32.0
SN65LVDT41QPWREP	TSSOP	PW	20	2000	353.0	353.0	32.0


## PACKAGE OUTLINE

**PW0020A**



## **TSSOP - 1.2 mm max height**

## SMALL OUTLINE PACKAGE

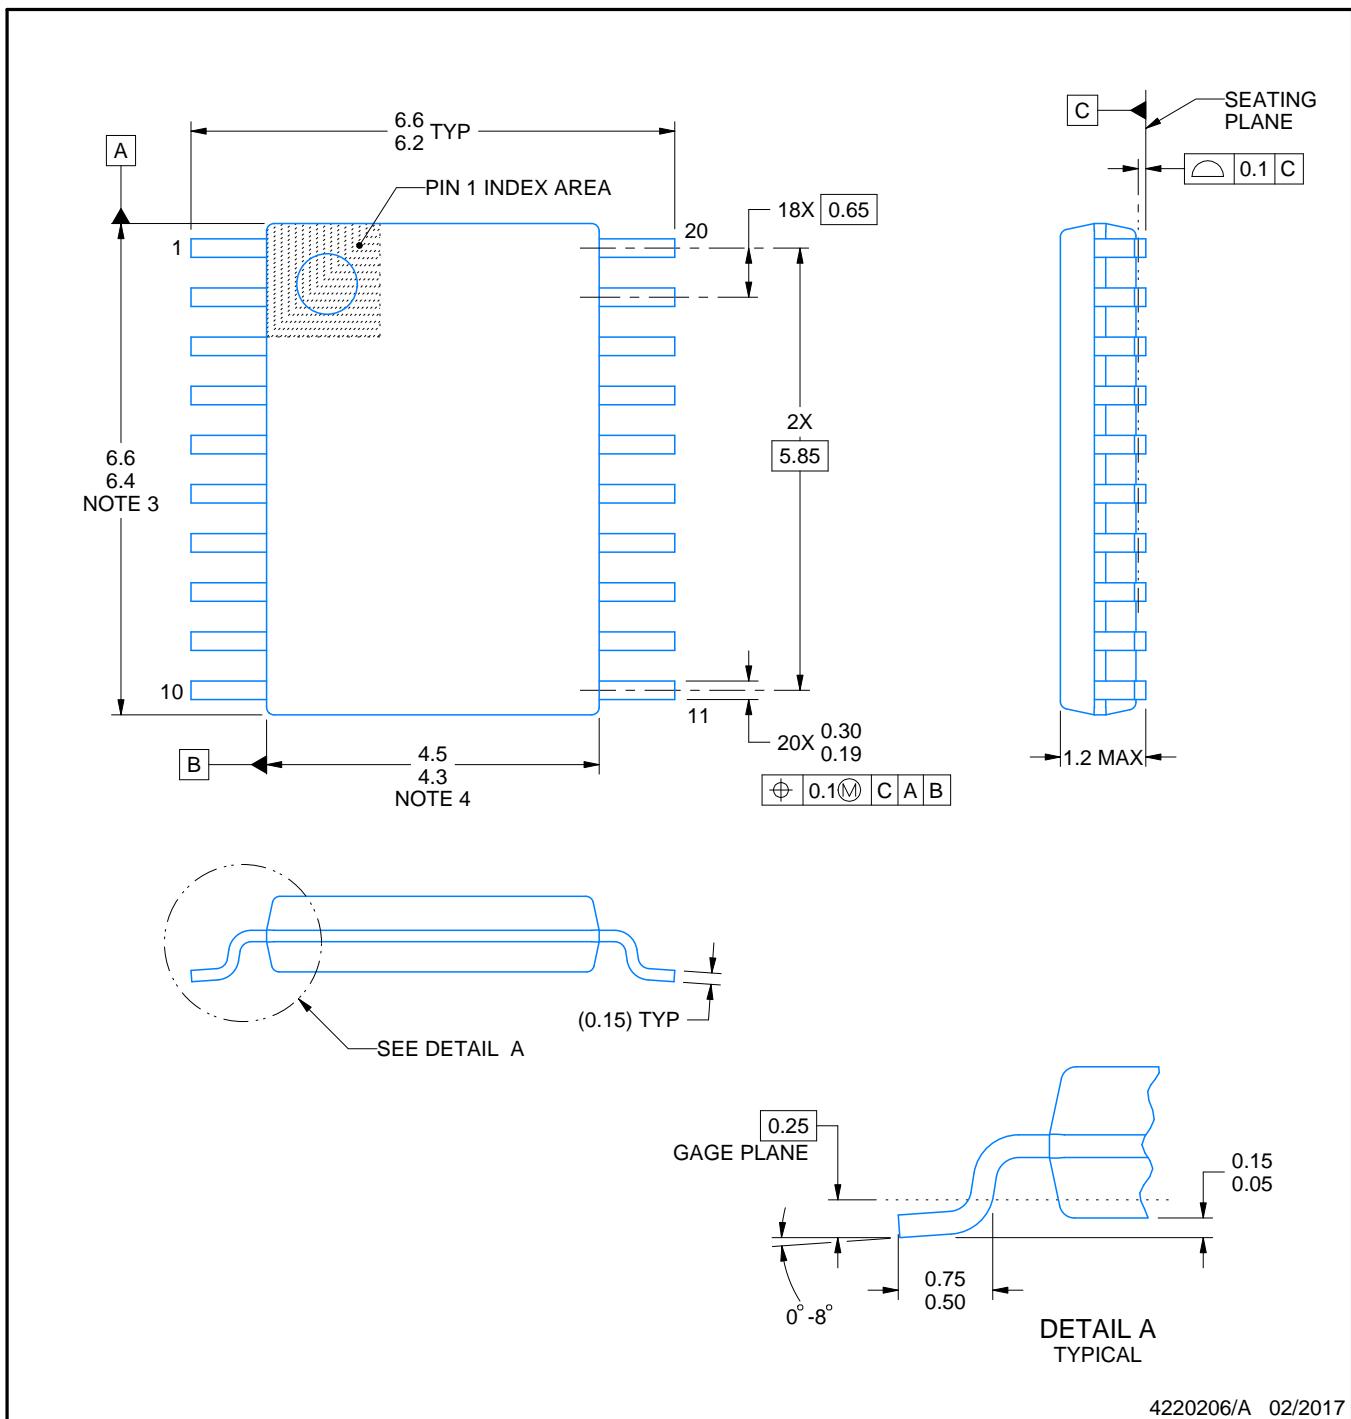

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

## EXAMPLE BOARD LAYOUT



**PW0020A**

## **TSSOP - 1.2 mm max height**

## SMALL OUTLINE PACKAGE

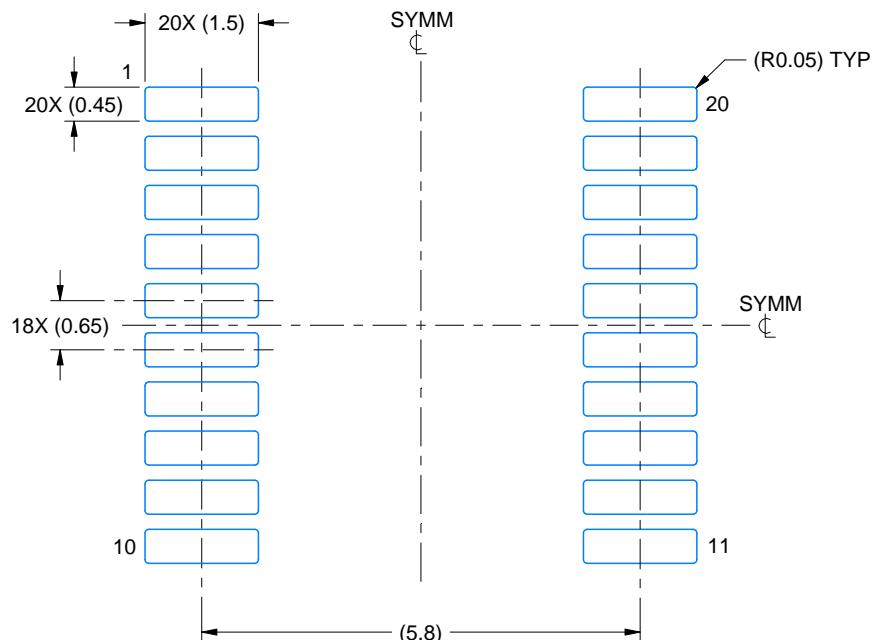

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

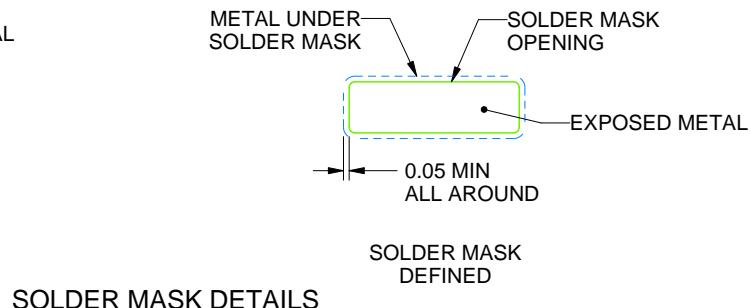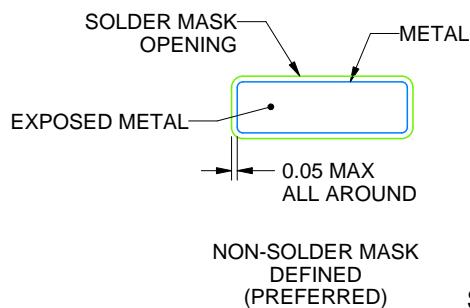

4220206/A 02/2017

#### NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

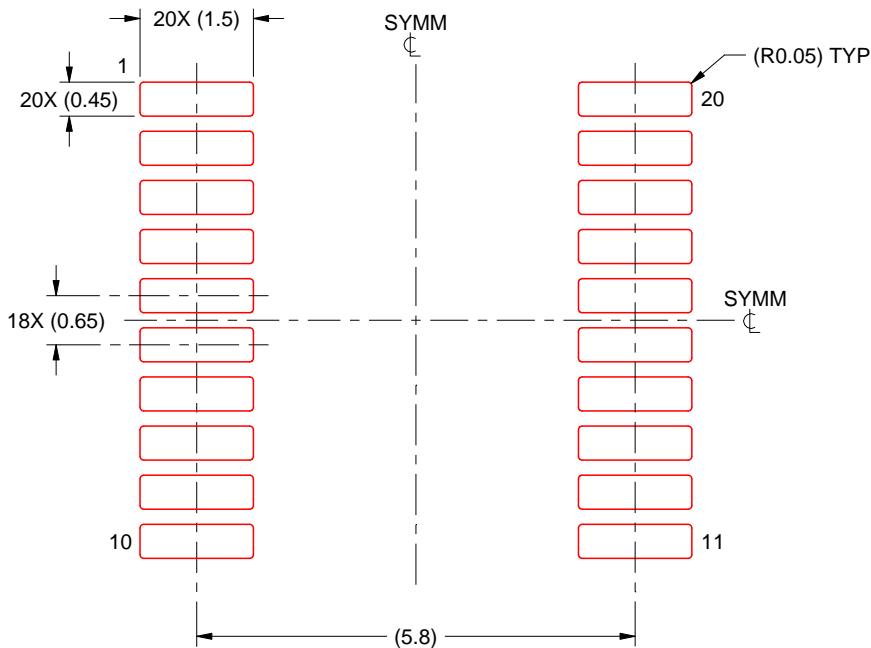

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025