

## FEATURES

- Member of the Texas Instruments Widebus™ Family
- EPIC™ (Enhanced-Performance Implanted CMOS) Submicron Process
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Package Options Include Plastic 300-mil Shrink Small-Outline (DL) and Thin Shrink Small-Outline (DGG) Packages

## DESCRIPTION

This 20-bit bus-interface D-type latch is designed for 1.65-V to 3.6-V  $V_{CC}$  operation.

The SN74ALVCH16841 features 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. This device is particularly suitable for implementing buffer registers, unidirectional bus drivers, and working registers.

The SN74ALVCH16841 can be used as two 10-bit latches or one 20-bit latch. The 20 latches are transparent D-type latches. The device has noninverting data (D) inputs and provides true data at its outputs. While the latch-enable (1LE or 2LE) input is high, the Q outputs of the corresponding 10-bit latch follow the D inputs. When LE is taken low, the Q outputs are latched at the levels set up at the D inputs.

A buffered output-enable ( $1\overline{OE}$  or  $2\overline{OE}$ ) input can be used to place the outputs of the corresponding 10-bit latch in either a normal logic state (high or low logic levels) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly.

$\overline{OE}$  does not affect the internal operation of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

The SN74ALVCH16841 is characterized for operation from -40°C to 85°C.

**DGG OR DL PACKAGE  
(TOP VIEW)**

|                  |    |    |          |
|------------------|----|----|----------|
| $1\overline{OE}$ | 1  | 56 | 1LE      |
| 1Q1              | 2  | 55 | 1D1      |
| 1Q2              | 3  | 54 | 1D2      |
| GND              | 4  | 53 | GND      |
| 1Q3              | 5  | 52 | 1D3      |
| 1Q4              | 6  | 51 | 1D4      |
| $V_{CC}$         | 7  | 50 | $V_{CC}$ |
| 1Q5              | 8  | 49 | 1D5      |
| 1Q6              | 9  | 48 | 1D6      |
| 1Q7              | 10 | 47 | 1D7      |
| GND              | 11 | 46 | GND      |
| 1Q8              | 12 | 45 | 1D8      |
| 1Q9              | 13 | 44 | 1D9      |
| 1Q10             | 14 | 43 | 1D10     |
| 2Q1              | 15 | 42 | 2D1      |
| 2Q2              | 16 | 41 | 2D2      |
| 2Q3              | 17 | 40 | 2D3      |
| GND              | 18 | 39 | GND      |
| 2Q4              | 19 | 38 | 2D4      |
| 2Q5              | 20 | 37 | 2D5      |
| 2Q6              | 21 | 36 | 2D6      |
| $V_{CC}$         | 22 | 35 | $V_{CC}$ |
| 2Q7              | 23 | 34 | 2D7      |
| 2Q8              | 24 | 33 | 2D8      |
| GND              | 25 | 32 | GND      |
| 2Q9              | 26 | 31 | 2D9      |
| 2Q10             | 27 | 30 | 2D10     |
| $2\overline{OE}$ | 28 | 29 | 2LE      |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus, EPIC are trademarks of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1995–2004, Texas Instruments Incorporated

# SN74ALVCH16841

## 20-BIT BUS-INTERFACE D-TYPE LATCH


### WITH 3-STATE OUTPUTS

SCES043E—JULY 1995—REVISED SEPTEMBER 2004

**FUNCTION TABLE**  
(each 10-bit latch)


| INPUTS          |    |   | OUTPUT<br>Q |
|-----------------|----|---|-------------|
| $\overline{OE}$ | LE | D |             |
| L               | H  | H | H           |
| L               | H  | L | L           |
| L               | L  | X | $Q_0$       |
| H               | X  | X | Z           |

**LOGIC SYMBOL<sup>(1)</sup>**

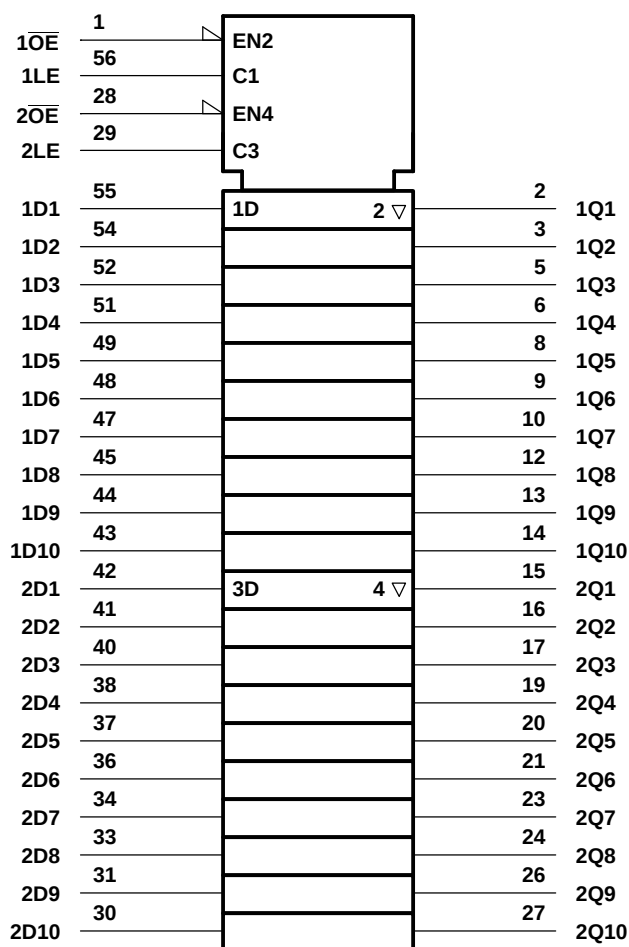

<sup>(1)</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

**LOGIC DIAGRAM (POSITIVE LOGIC)**

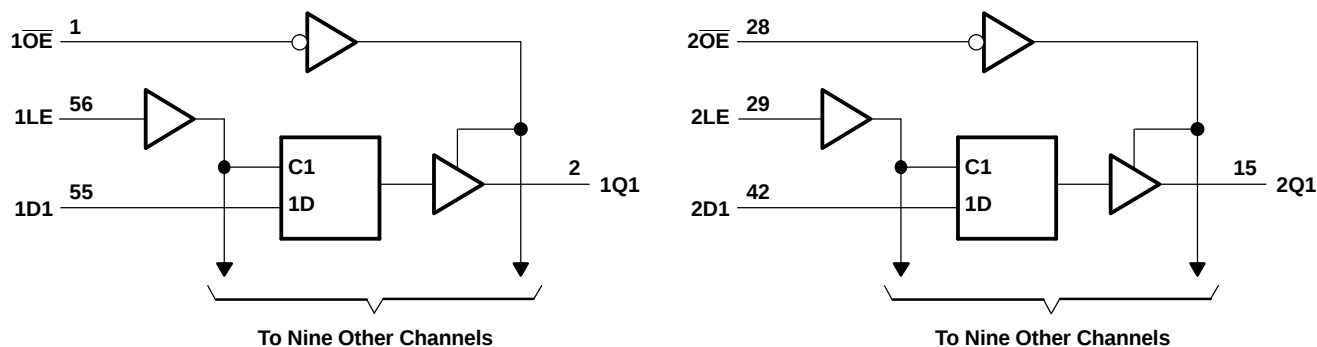

**ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>**

over operating free-air temperature range (unless otherwise noted)

|                                                        |                                          |                    | MIN  | MAX                   | UNIT |
|--------------------------------------------------------|------------------------------------------|--------------------|------|-----------------------|------|
| V <sub>CC</sub>                                        | Supply voltage range                     |                    | -0.5 | 4.6                   | V    |
| V <sub>I</sub>                                         | Input voltage range <sup>(2)</sup>       |                    | -0.5 | 4.6                   | V    |
| V <sub>O</sub>                                         | Output voltage range <sup>(2)(3)</sup>   |                    | -0.5 | V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>                                        | Input clamp current                      | V <sub>I</sub> < 0 | -50  |                       | mA   |
| I <sub>OK</sub>                                        | Output clamp current                     | V <sub>O</sub> < 0 | -50  |                       | mA   |
| I <sub>O</sub>                                         | Continuous output current                |                    | ±50  |                       | mA   |
| Continuous current through each V <sub>CC</sub> or GND |                                          |                    | ±100 |                       | mA   |
| θ <sub>JA</sub>                                        | Package thermal impedance <sup>(4)</sup> | DGG package        | 81   |                       | °C/W |
|                                                        |                                          | DL package         | 74   |                       |      |
| T <sub>stg</sub>                                       | Storage temperature range                |                    | -65  | 150                   | °C   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) This value is limited to 4.6 V maximum.
- (4) The package thermal impedance is calculated in accordance with JESD 51.

**SN74ALVCH16841**  
**20-BIT BUS-INTERFACE D-TYPE LATCH**  
**WITH 3-STATE OUTPUTS**

SCES043E–JULY 1995–REVISED SEPTEMBER 2004

**RECOMMENDED OPERATING CONDITIONS<sup>(1)</sup>**

|                 |                                    |                                    | MIN                    | MAX             | UNIT |
|-----------------|------------------------------------|------------------------------------|------------------------|-----------------|------|
| V <sub>CC</sub> | Supply voltage                     |                                    | 1.65                   | 3.6             | V    |
| V <sub>IH</sub> | High-level input voltage           | V <sub>CC</sub> = 1.65 V to 1.95 V | 0.65 × V <sub>CC</sub> |                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V   | 1.7                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V to 3.6 V   | 2                      |                 |      |
| V <sub>IL</sub> | Low-level input voltage            | V <sub>CC</sub> = 1.65 V to 1.95 V | 0.35 × V <sub>CC</sub> |                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V   | 0.7                    |                 |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V to 3.6 V   | 0.8                    |                 |      |
| V <sub>I</sub>  | Input voltage                      |                                    | 0                      | V <sub>CC</sub> | V    |
| V <sub>O</sub>  | Output voltage                     |                                    | 0                      | V <sub>CC</sub> | V    |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 1.65 V           |                        | -4              | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V            |                        | -12             |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V            |                        | -12             |      |
|                 |                                    | V <sub>CC</sub> = 3 V              |                        | -24             |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 1.65 V           |                        | 4               | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V            |                        | 12              |      |
|                 |                                    | V <sub>CC</sub> = 2.7 V            |                        | 12              |      |
|                 |                                    | V <sub>CC</sub> = 3 V              |                        | 24              |      |
| Δt/Δv           | Input transition rise or fall rate |                                    |                        | 10              | ns/V |
| T <sub>A</sub>  | Operating free-air temperature     |                                    | -40                    | 85              | °C   |

(1) All unused control inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

## ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER            |                          | TEST CONDITIONS                                                              | V <sub>CC</sub> | MIN                   | TYP <sup>(1)</sup> | MAX | UNIT |
|----------------------|--------------------------|------------------------------------------------------------------------------|-----------------|-----------------------|--------------------|-----|------|
| V <sub>OH</sub>      |                          | I <sub>OH</sub> = -100 μA                                                    | 1.65 V to 3.6 V | V <sub>CC</sub> - 0.2 |                    |     | V    |
|                      |                          | I <sub>OH</sub> = -4 mA                                                      | 1.65 V          | 1.2                   |                    |     |      |
|                      |                          | I <sub>OH</sub> = -6 mA                                                      | 2.3 V           | 2                     |                    |     |      |
|                      | I <sub>OH</sub> = -12 mA | 2.3 V                                                                        | 1.7             |                       |                    |     |      |
|                      |                          | 2.7 V                                                                        | 2.2             |                       |                    |     |      |
|                      |                          | 3 V                                                                          | 2.4             |                       |                    |     |      |
|                      |                          | I <sub>OH</sub> = -24 mA                                                     | 3 V             | 2                     |                    |     |      |
| V <sub>OL</sub>      |                          | I <sub>OL</sub> = 100 μA                                                     | 1.65 V to 3.6 V | 0.2                   |                    | V   |      |
|                      |                          | I <sub>OL</sub> = 4 mA                                                       | 1.65 V          | 0.45                  |                    |     |      |
|                      |                          | I <sub>OL</sub> = 6 mA                                                       | 2.3 V           | 0.4                   |                    |     |      |
|                      | I <sub>OL</sub> = 12 mA  | 2.3 V                                                                        | 0.7             |                       |                    |     |      |
|                      |                          | 2.7 V                                                                        | 0.4             |                       |                    |     |      |
|                      |                          | I <sub>OL</sub> = 24 mA                                                      | 3 V             | 0.55                  |                    |     |      |
| I <sub>I</sub>       |                          | V <sub>I</sub> = V <sub>CC</sub> or GND                                      | 3.6 V           | ±5                    |                    | μA  |      |
| I <sub>I(hold)</sub> |                          | V <sub>I</sub> = 0.58 V                                                      | 1.65 V          | 25                    |                    | μA  |      |
|                      |                          | V <sub>I</sub> = 1.07 V                                                      | 1.65 V          | -25                   |                    |     |      |
|                      |                          | V <sub>I</sub> = 0.7 V                                                       | 2.3 V           | 45                    |                    |     |      |
|                      |                          | V <sub>I</sub> = 1.7 V                                                       | 2.3 V           | -45                   |                    |     |      |
|                      |                          | V <sub>I</sub> = 0.8 V                                                       | 3 V             | 75                    |                    |     |      |
|                      |                          | V <sub>I</sub> = 2 V                                                         | 3 V             | -75                   |                    |     |      |
|                      |                          | V <sub>I</sub> = 0 to 3.6 V <sup>(2)</sup>                                   | 3.6 V           | ±500                  |                    |     |      |
| I <sub>OZ</sub>      |                          | V <sub>O</sub> = V <sub>CC</sub> or GND                                      | 3.6 V           | ±10                   |                    | μA  |      |
| I <sub>CC</sub>      |                          | V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0                  | 3.6 V           | 40                    |                    | μA  |      |
| ΔI <sub>CC</sub>     |                          | One input at V <sub>CC</sub> - 0.6 V, Other inputs at V <sub>CC</sub> or GND | 3 V to 3.6 V    | 750                   |                    | μA  |      |
| C <sub>i</sub>       | Control inputs           | V <sub>I</sub> = V <sub>CC</sub> or GND                                      | 3.3 V           | 4.5                   |                    | pF  |      |
|                      | Data inputs              |                                                                              |                 | 6.5                   |                    |     |      |
| C <sub>O</sub>       | Outputs                  | V <sub>O</sub> = V <sub>CC</sub> or GND                                      | 3.3 V           | 7                     |                    | pF  |      |

(1) All typical values are at  $V_{CC} = 3.3\ V$ ,  $T_A = 25^\circ C$ .

(2) This is the bus-hold maximum dynamic current. It is the minimum overdrive current required to switch the input from one state to another.

## TIMING REQUIREMENTS

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1 through Figure 3)

|          |                                      | $V_{CC} = 1.8\ V$ |     | $V_{CC} = 2.5\ V \pm 0.2\ V$ |     | $V_{CC} = 2.7\ V$ |     | $V_{CC} = 3.3\ V \pm 0.3\ V$ |     | UNIT |
|----------|--------------------------------------|-------------------|-----|------------------------------|-----|-------------------|-----|------------------------------|-----|------|
|          |                                      | MIN               | MAX | MIN                          | MAX | MIN               | MAX | MIN                          | MAX |      |
| $t_w$    | Pulse duration, LE high or low       | (1)               |     | 3.3                          |     | 3.3               |     | 3.3                          |     | ns   |
| $t_{su}$ | Setup time, data before $LE\uparrow$ | (1)               |     | 0.9                          |     | 0.7               |     | 1.1                          |     | ns   |
| $t_h$    | Hold time, data after $LE\uparrow$   | (1)               |     | 1.2                          |     | 1.5               |     | 1.1                          |     | ns   |

(1) This information was not available at the time of publication.

# SN74ALVCH16841

## 20-BIT BUS-INTERFACE D-TYPE LATCH

### WITH 3-STATE OUTPUTS

SCES043E–JULY 1995–REVISED SEPTEMBER 2004

## SWITCHING CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1 through Figure 3)

| PARAMETER        | FROM<br>(INPUT) | TO<br>(OUTPUT) | V <sub>CC</sub> = 1.8 V | V <sub>CC</sub> = 2.5 V<br>± 0.2 V |     | V <sub>CC</sub> = 2.7 V |     | V <sub>CC</sub> = 3.3 V<br>± 0.3 V |     | UNIT |
|------------------|-----------------|----------------|-------------------------|------------------------------------|-----|-------------------------|-----|------------------------------------|-----|------|
|                  |                 |                | TYP                     | MIN                                | MAX | MIN                     | MAX | MIN                                | MAX |      |
| t <sub>pd</sub>  | D               | Q              | (1)                     | 1                                  | 5   | 4.7                     |     | 1.2                                | 3.9 | ns   |
|                  | LE              |                | (1)                     | 1                                  | 5.6 | 5.1                     |     | 1                                  | 4.3 |      |
| t <sub>en</sub>  | $\overline{OE}$ | Q              | (1)                     | 1                                  | 6.2 | 6                       |     | 1                                  | 4.9 | ns   |
| t <sub>dis</sub> | $\overline{OE}$ | Q              | (1)                     | 1.1                                | 5.3 | 4.3                     |     | 1.3                                | 4.1 | ns   |

(1) This information was not available at the time of publication.

## OPERATING CHARACTERISTICS


T<sub>A</sub> = 25°C

| PARAMETER       |                               |                  | TEST CONDITIONS                    | V <sub>CC</sub> = 1.8 V | V <sub>CC</sub> = 2.5 V | V <sub>CC</sub> = 3.3 V | UNIT |
|-----------------|-------------------------------|------------------|------------------------------------|-------------------------|-------------------------|-------------------------|------|
|                 |                               |                  |                                    | TYP                     | TYP                     | TYP                     |      |
| C <sub>pd</sub> | Power dissipation capacitance | Outputs enabled  | C <sub>L</sub> = 50 pF, f = 10 MHz | (1)                     | 12                      | 20                      | pF   |
|                 |                               | Outputs disabled |                                    | (1)                     | 1                       | 3                       |      |

(1) This information was not available at the time of publication.



# PARAMETER MEASUREMENT INFORMATION

$V_{CC} = 1.8 \text{ V}$

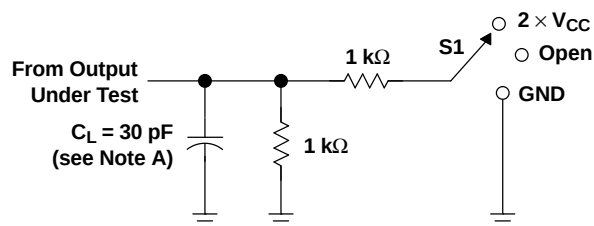


LOAD CIRCUIT


| TEST              | S1                |
|-------------------|-------------------|
| $t_{pd}$          | Open              |
| $t_{PLZ}/t_{PZL}$ | 2 $\times V_{CC}$ |
| $t_{PHZ}/t_{PZH}$ | GND               |






VOLTAGE WAVEFORMS  
SETUP AND HOLD TIMES

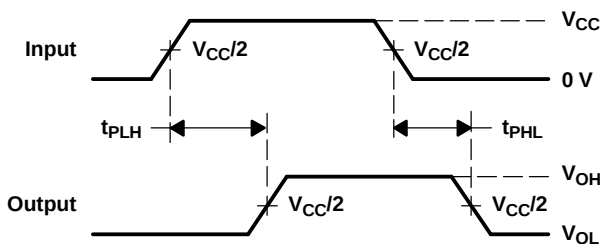

VOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES



VOLTAGE WAVEFORMS  
PULSE DURATION

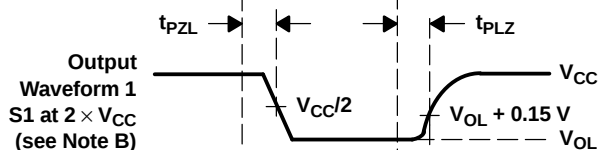

VOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES

- NOTES:
- $C_L$  includes probe and jig capacitance.
  - Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r \leq 2 \text{ ns}$ ,  $t_f \leq 2 \text{ ns}$ .
  - The outputs are measured one at a time, with one transition per measurement.
  - $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms

# SN74ALVCH16841


## 20-BIT BUS-INTERFACE D-TYPE LATCH

### WITH 3-STATE OUTPUTS

SCES043E—JULY 1995—REVISED SEPTEMBER 2004


#### PARAMETER MEASUREMENT INFORMATION

$$V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$$

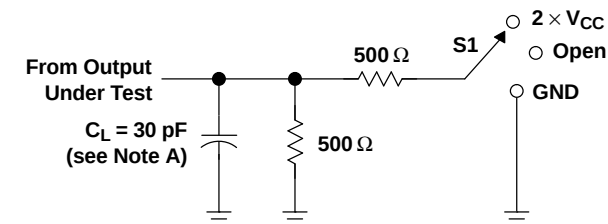


LOAD CIRCUIT


| TEST              | S1                |
|-------------------|-------------------|
| $t_{pd}$          | Open              |
| $t_{PLZ}/t_{PZL}$ | 2 $\times V_{CC}$ |
| $t_{PHZ}/t_{PZH}$ | GND               |




VOLTAGE WAVEFORMS  
SETUP AND HOLD TIMES

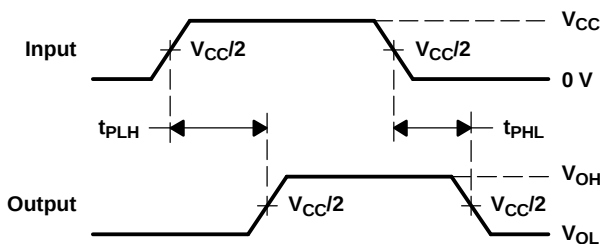

VOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES



VOLTAGE WAVEFORMS  
PULSE DURATION

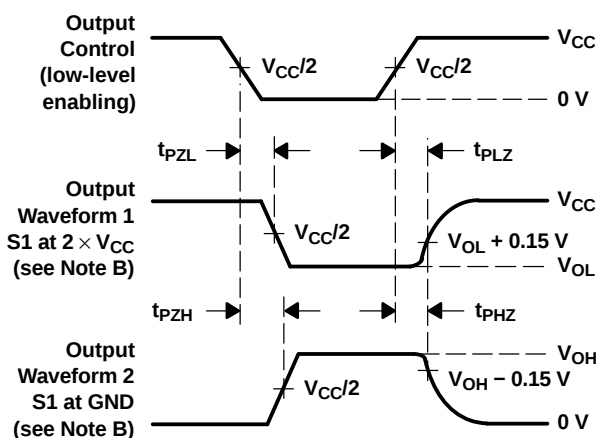


VOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES

- NOTES:
- $C_L$  includes probe and jig capacitance.
  - Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r \leq 2 \text{ ns}$ ,  $t_f \leq 2 \text{ ns}$ .
  - The outputs are measured one at a time, with one transition per measurement.
  - $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .


Figure 2. Load Circuit and Voltage Waveforms

# PARAMETER MEASUREMENT INFORMATION


$V_{CC} = 2.7\text{ V}$  AND  $3.3\text{ V} \pm 0.3\text{ V}$

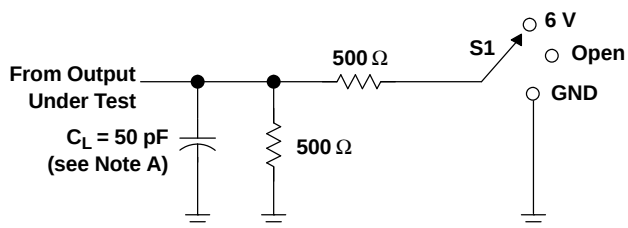

LOAD CIRCUIT

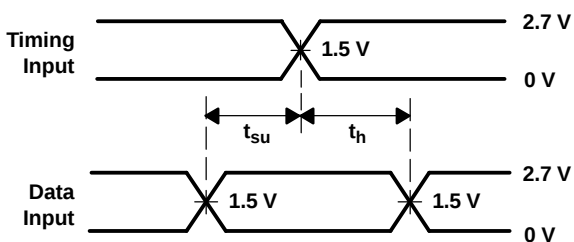


VOLTAGE WAVEFORMS  
SETUP AND HOLD TIMES

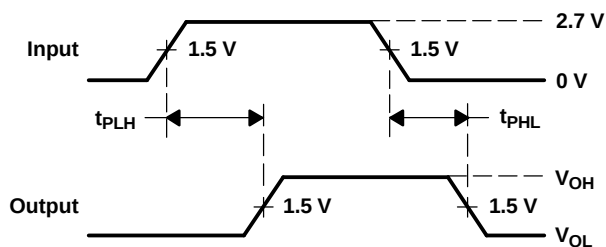


VOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES

| TEST              | S1   |
|-------------------|------|
| $t_{pd}$          | Open |
| $t_{PLZ}/t_{PZL}$ | 6 V  |
| $t_{PHZ}/t_{PZH}$ | GND  |

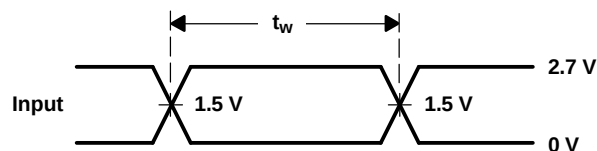

VOLTAGE WAVEFORMS  
PULSE DURATION

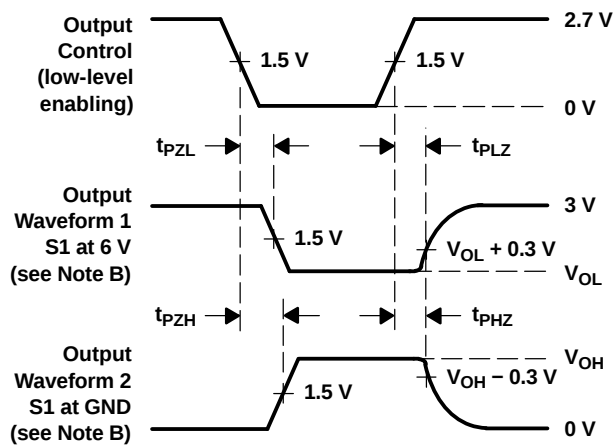

VOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES

- NOTES: A.  $C_L$  includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10\text{ MHz}$ ,  $Z_O = 50\text{ }\Omega$ ,  $t_r \leq 2.5\text{ ns}$ ,  $t_f \leq 2.5\text{ ns}$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 3. Load Circuit and Voltage Waveforms

## PACKAGING INFORMATION

| Orderable part number              | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| 74ALVCH16841DGGRG4                 | Active        | Production           | TSSOP (DGG)   56 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| 74ALVCH16841DGGRG4.B               | Active        | Production           | TSSOP (DGG)   56 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| <a href="#">SN74ALVCH16841DGGR</a> | Active        | Production           | TSSOP (DGG)   56 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| SN74ALVCH16841DGGR.B               | Active        | Production           | TSSOP (DGG)   56 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| <a href="#">SN74ALVCH16841DL</a>   | Active        | Production           | SSOP (DL)   56   | 20   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| SN74ALVCH16841DL.B                 | Active        | Production           | SSOP (DL)   56   | 20   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| <a href="#">SN74ALVCH16841DLR</a>  | Active        | Production           | SSOP (DL)   56   | 1000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |
| SN74ALVCH16841DLR.B                | Active        | Production           | SSOP (DL)   56   | 1000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | ALVCH16841          |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| 74ALVCH16841DGGRG4 | TSSOP        | DGG             | 56   | 2000 | 330.0              | 24.4               | 8.9     | 14.7    | 1.4     | 12.0    | 24.0   | Q1            |
| SN74ALVCH16841DGGR | TSSOP        | DGG             | 56   | 2000 | 330.0              | 24.4               | 8.9     | 14.7    | 1.4     | 12.0    | 24.0   | Q1            |
| SN74ALVCH16841DLR  | SSOP         | DL              | 56   | 1000 | 330.0              | 32.4               | 11.35   | 18.67   | 3.1     | 16.0    | 32.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| 74ALVCH16841DGGRG4 | TSSOP        | DGG             | 56   | 2000 | 356.0       | 356.0      | 45.0        |
| SN74ALVCH16841DGGR | TSSOP        | DGG             | 56   | 2000 | 356.0       | 356.0      | 45.0        |
| SN74ALVCH16841DLR  | SSOP         | DL              | 56   | 1000 | 356.0       | 356.0      | 53.0        |

## TUBE



\*All dimensions are nominal

| Device             | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|--------------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| SN74ALVCH16841DL   | DL           | SSOP         | 56   | 20  | 473.7  | 14.24  | 5110   | 7.87   |
| SN74ALVCH16841DL.B | DL           | SSOP         | 56   | 20  | 473.7  | 14.24  | 5110   | 7.87   |

DL (R-PDSO-G56)

PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - D. Falls within JEDEC MO-118




# EXAMPLE BOARD LAYOUT



DGG0056A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

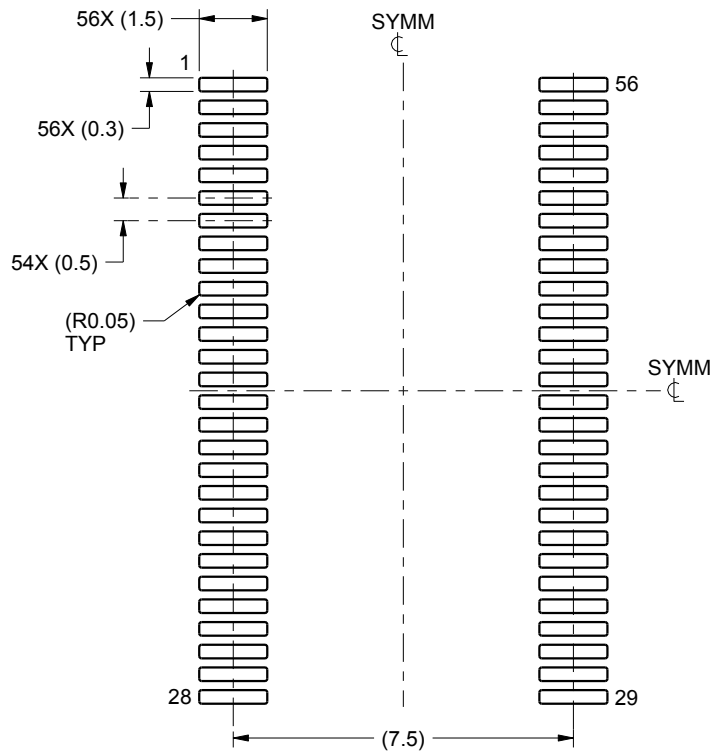

LAND PATTERN EXAMPLE  
SCALE:6X

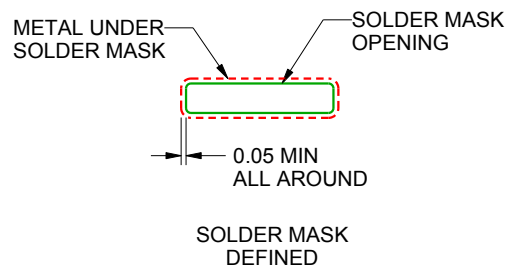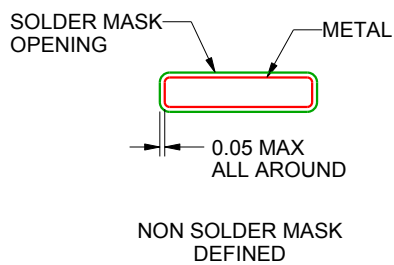

SOLDER MASK DETAILS

4222167/A 07/2015

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DGG0056A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:6X

4222167/A 07/2015

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025