

- **Separate Supply Voltage Pins for Isolation of Frequency Control Inputs and Oscillators from Output Circuitry**
- **Highly Stable Operation over Specified Temperature and/or Supply Voltage Ranges**

| DEVICE TYPE | SIMILAR TO | NUMBER VCO's | COMP'L Z OUT | ENABLE | RANGE INPUT | R <sub>ext</sub> |
|-------------|------------|--------------|--------------|--------|-------------|------------------|
| 'LS624      | 'LS324     | single       | yes          | yes    | yes         | no               |
| 'LS625      | 'LS325     | dual         | yes          | no     | no          | no               |
| 'LS626      | 'LS326     | dual         | yes          | yes    | no          | no               |
| 'LS627      | 'LS327     | dual         | no           | no     | no          | no               |
| 'LS628      | 'LS324     | single       | yes          | yes    | yes         | yes              |
| 'LS629      | 'LS124     | dual         | no           | yes    | yes         | no               |

### description

These voltage-controlled oscillators (VCOs) are improved versions of the original VCO family: SN54LS124, SN54LS324 thru SN54LS327, SN74LS124, and SN74LS324 thru SN74LS327. These new devices feature improved voltage-to-frequency linearity, range, and compensation. With the exception of the 'LS624 and 'LS628, all of these devices feature two independent VCOs in a single monolithic chip. The 'LS624, 'LS625, 'LS626, and 'LS628 have complementary Z outputs. The output frequency for each VCO is established by a single external component (either a capacitor or crystal) in combination with voltage-sensitive inputs used for frequency control and frequency range. Each device has a voltage-sensitive input for frequency control; however, the 'LS624, 'LS628, and 'LS629 devices also have one for frequency range. (See Figures 1 thru 6).

The 'LS628 offers more precise temperature compensation than its 'LS624 counterpart. The 'LS624 features a 600 ohm internal timing resistor. The 'LS628 requires a timing resistor to be connected externally across R<sub>ext</sub> pins. Temperature compensation will be improved due to the temperature coefficient of the external resistor.

Figure 3 and Figure 6 contain the necessary information to choose the proper capacitor value to obtain the desired operating frequency.

A single 5-volt supply can be used; however, one set of supply voltage and ground pins (V<sub>CC</sub> and GND) is provided for the enable, synchronization-gating, and output sections, and a separate set (OSC V<sub>CC</sub> and OSC GND) is provided for the oscillator and associated frequency-control circuits so that effective isolation can be accomplished in the system. For operation of frequencies greater than 10 MHz, it is recommended that two independent supplies be used. Disabling either VCO of the 'LS625 and 'LS626 and 'LS627 can be achieved by removing the appropriate OSC V<sub>CC</sub>. An enable input is provided on the 'LS624, 'LS626, 'LS628, and 'LS629. When the enable input is low, the output is enabled; when the enable input is high, the internal oscillator is disabled, Y is high, and Z is low. Caution! Crosstalk may occur in the dual devices ('LS625, 'LS626, 'LS627 and 'LS629) when both VCOs are operated simultaneously. To minimize crosstalk, either of the following are recommended: (A) If frequencies are widely separated, use a 10-μh inductor between V<sub>CC</sub> pins. (B) If frequencies are closely spaced, use two separate V<sub>CC</sub> supplies or place two series diodes between the V<sub>CC</sub> pins.


The pulse-synchronization-gating section ensures that the first output pulse is neither clipped nor extended. The duty cycle of the square-wave output is fixed at approximately 50 percent.

The SN54LS624 thru SN54LS629 are characterized for operation over the full military temperature range of –55°C to 125°C. The SN74LS624 thru SN74LS629 are characterized for operation from 0°C to 70°C.


# SN54LS624 THRU SN54LS629, SN74LS624 THRU SN74LS629 VOLTAGE-CONTROLLED OSCILLATORS

SDLS186 – JANUARY 1980 – REVISED MARCH 1988


**SN54LS624 . . . J OR W PACKAGE  
SN74LS624 . . . D OR N PACKAGE  
(TOP VIEW)**

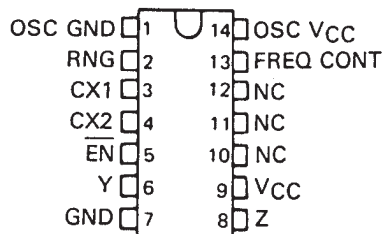

**SN54LS625 . . . J OR W PACKAGE  
SN74LS625 . . . D OR N PACKAGE  
(TOP VIEW)**

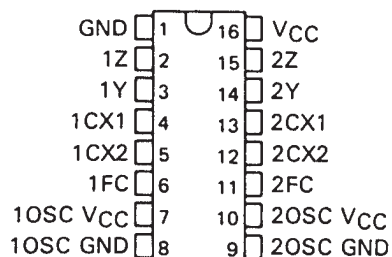


**SN54LS626 . . . J OR W PACKAGE  
SN74LS626 . . . D OR N PACKAGE  
(TOP VIEW)**




NC – No internal connection


**SN54LS624 . . . FK PACKAGE  
(TOP VIEW)**

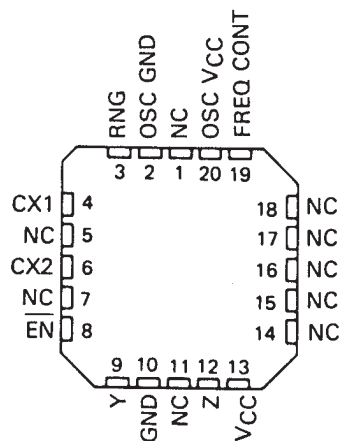

**SN54LS625 . . . FK PACKAGE  
(TOP VIEW)**

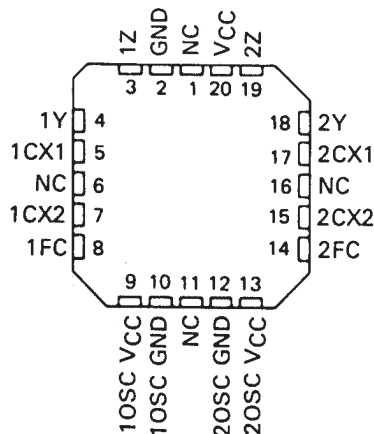


**SN54LS626 . . . FK PACKAGE  
(TOP VIEW)**

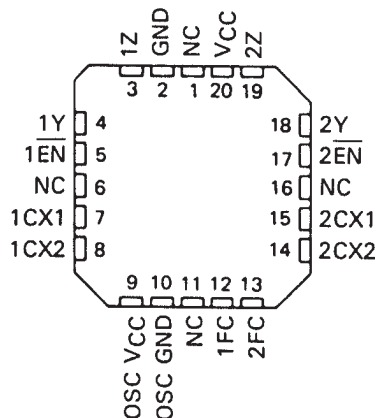


# SN54LS624 THRU SN54LS629, SN74LS624 THRU SN74LS629 VOLTAGE-CONTROLLED OSCILLATORS

SDLS186 – JANUARY 1980 – REVISED MARCH 1988


**SN54LS627 . . . J OR W PACKAGE  
SN74LS627 . . . D OR N PACKAGE  
(TOP VIEW)**

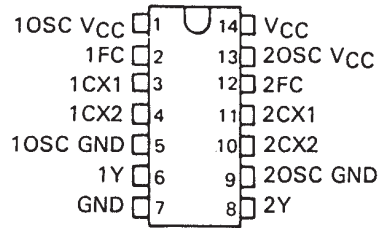

**SN54LS628 . . . J OR W PACKAGE  
SN74LS628 . . . D OR N PACKAGE  
(TOP VIEW)**




**SN54LS629 . . . J OR W PACKAGE  
SN74LS629 . . . D OR N PACKAGE  
(TOP VIEW)**




NC-No internal connection


**SN54LS627 . . . FK PACKAGE  
(TOP VIEW)**

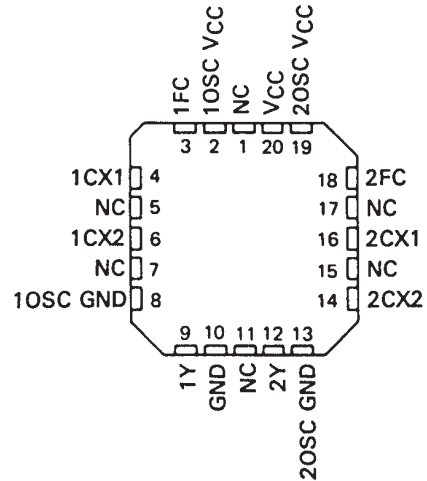

**SN54LS628 . . . FK PACKAGE  
(TOP VIEW)**

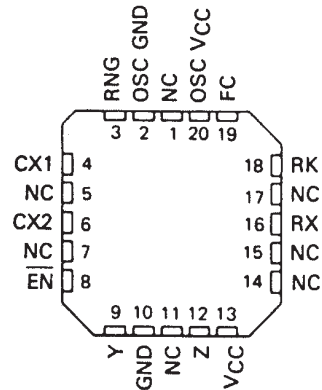


**SN54LS629 . . . FK PACKAGE  
(TOP VIEW)**

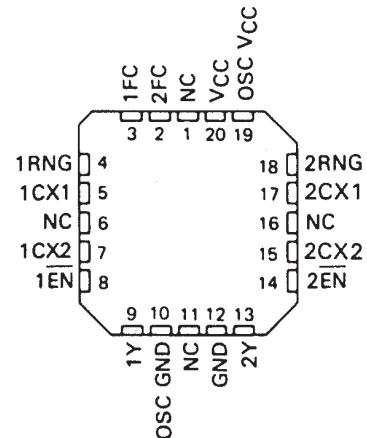


## SDLS186 – JANUARY 1980 – REVISED MARCH 1988

The logic diagram shows a 4-bit counter implemented using a 74LS629 decoder and a 74LS624/628/629 decoder. The 74LS629 decoder has inputs Cx, FC, RC, and EN, and outputs G, FC, RC, and EN. The 74LS624/628/629 decoder has inputs G, FC, RC, and EN, and outputs Z, Y, and three other outputs. The circuit includes several logic gates (AND, OR, NOT) and a flip-flop (T, R) to generate the output signals.


'LS624

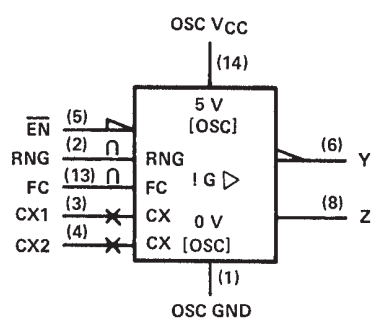


'LS625

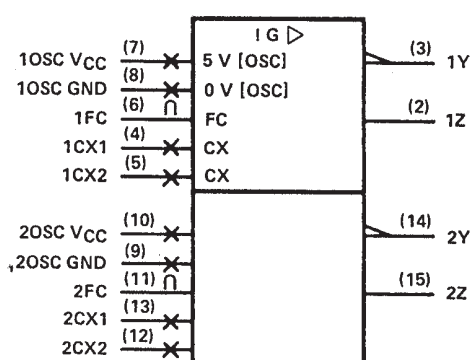


'LS626

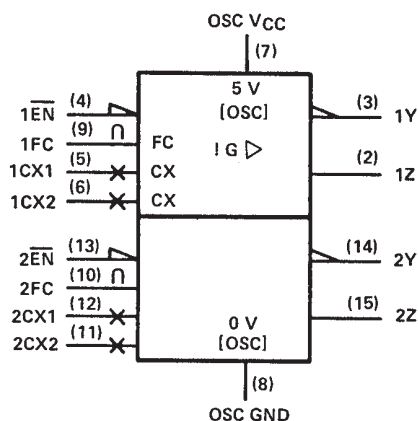


'LS627.

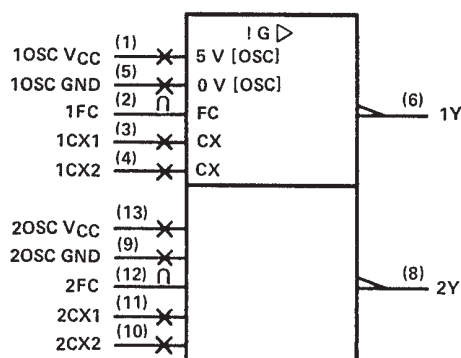


'LS628

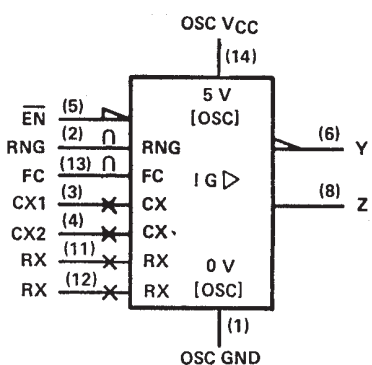

'LS629

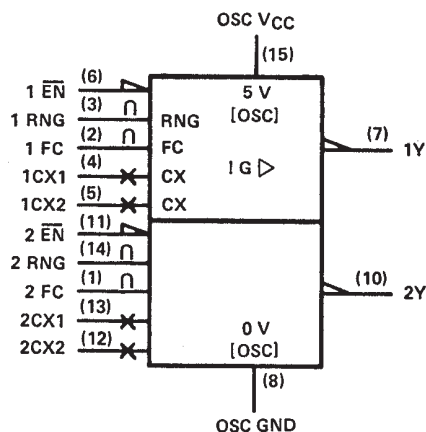

schematics of inputs and outputs

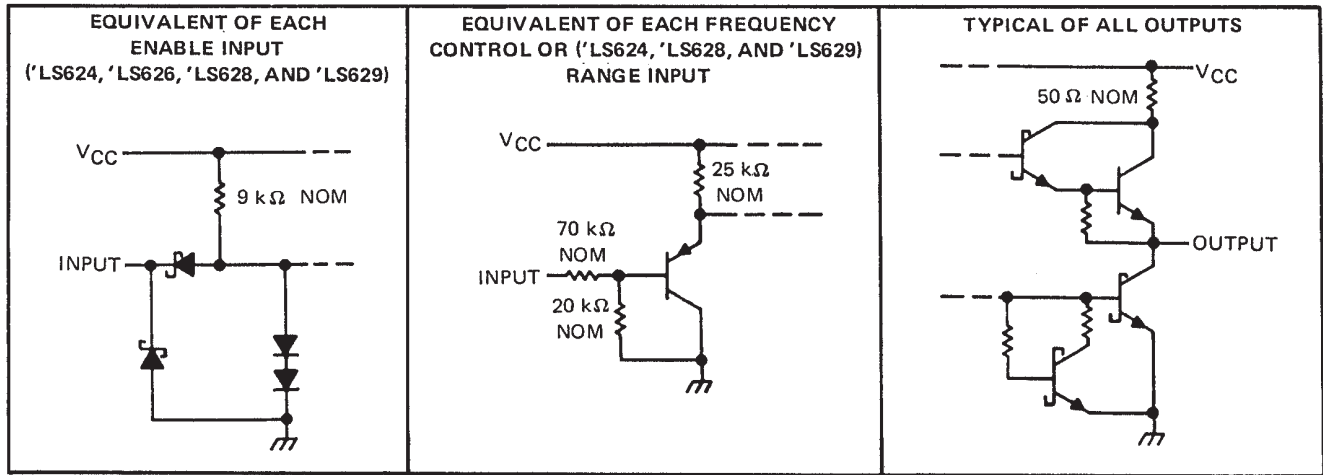

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

|                                                        |                |
|--------------------------------------------------------|----------------|
| Supply voltage, $V_{CC}$ (see Notes 1 and 2)           | 7 V            |
| Input voltage: Enable input <sup>†</sup>               | 7 V            |
| Frequency control or range input <sup>‡</sup>          | $V_{CC}$       |
| Operating free-air temperature range: SN54LS' Circuits | –55°C to 125°C |
| SN74LS' Circuits                                       | 0°C to 70°C    |
| Storage temperature range                              | –65°C to 150°C |

<sup>†</sup> The enable input is provided only on the ‘LS624, ‘LS626, ‘LS628, and ‘LS629.

<sup>‡</sup> The range input is provided only on ‘LS624, ‘LS628, and ‘LS629.

NOTE: 1. Voltage values are with respect to the appropriate ground terminal.  
2. Throughout the data sheet, the symbol  $V_{CC}$  is used for the voltage applied to both the  $V_{CC}$  and OSC  $V_{CC}$  terminals, unless otherwise noted.

# SN54LS624 THRU SN54LS629, SN74LS624 THRU SN74LS629 VOLTAGE-CONTROLLED OSCILLATORS

SDLS186 – JANUARY 1980 – REVISED MARCH 1988

## recommended operating conditions

|                                                                                  | SN54LS' |     |      | SN74LS' |     |      | UNIT |
|----------------------------------------------------------------------------------|---------|-----|------|---------|-----|------|------|
|                                                                                  | MIN     | NOM | MAX  | MIN     | NOM | MAX  |      |
| Supply voltage, $V_{CC}$                                                         | 4.5     | 5   | 5.5  | 4.75    | 5   | 5.25 | V    |
| Input voltage at frequency control or range input, $V_{I(freq)}$ or $V_{I(rng)}$ | 0       |     | 5    | 0       |     | 5    | V    |
| High-level output current, $I_{OH}$                                              |         |     | -1.2 |         |     | -1.2 | mA   |
| Low-level output current, $I_{OL}$                                               |         |     | 12   |         |     | 24   | mA   |
| Output frequency, $f_o$                                                          | 1       |     |      | 1       |     |      | Hz   |
|                                                                                  |         | 20  |      |         | 20  |      | MHz  |
| Operating free-air temperature, $T_A$                                            | -55     |     | 125  | 0       |     | 70   | °C   |

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER |                                                           |                        | TEST CONDITIONS†                                                                              |                          |  | SN54LS' |      |      | SN74LS' |      |      | UNIT          |
|-----------|-----------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------------------|--------------------------|--|---------|------|------|---------|------|------|---------------|
|           |                                                           |                        |                                                                                               |                          |  | MIN     | TYP‡ | MAX  | MIN     | TYP‡ | MAX  |               |
| $V_{IH}$  | High-level input voltage at enable#                       |                        |                                                                                               |                          |  | 2       |      |      | 2       |      |      | V             |
| $V_{IL}$  | Low-level input voltage at enable#                        |                        |                                                                                               |                          |  |         |      | 0.7  |         |      | 0.8  | V             |
| $V_{IK}$  | Input clamp voltage at enable#                            |                        | $V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$                                                   |                          |  |         |      | -1.5 |         |      | -1.5 | V             |
| $V_{OH}$  | High-level output voltage                                 |                        | $V_{CC} = \text{MIN}, \overline{EN}$ at $V_{IL}$ max, $I_{OH} = -1.2 \text{ mA}$ , See Note 3 |                          |  | 2.5     | 3.4  |      | 2.7     | 3.4  |      | V             |
| $V_{OL}$  | Low-level output voltage                                  |                        | $V_{CC} = \text{MIN}, \overline{EN}$ at $V_{IL}$ max, See Note 3                              | $I_{OL} = 12 \text{ mA}$ |  | 0.25    | 0.4  |      | 0.25    | 0.4  |      | V             |
|           |                                                           |                        |                                                                                               | $I_{OL} = 24 \text{ mA}$ |  |         |      |      | 0.35    | 0.5  |      |               |
| $I_I$     | Input current                                             | Freq control or range¶ | $V_{CC} = \text{MAX}$                                                                         | $V_I = 5 \text{ V}$      |  | 50      | 250  |      | 50      | 250  |      | $\mu\text{A}$ |
|           |                                                           |                        |                                                                                               | $V_I = 1 \text{ V}$      |  | 10      | 50   |      | 10      | 50   |      |               |
| $I_I$     | Input current at maximum input voltage                    | Enable#                | $V_{CC} = \text{MAX}, V_I = 7 \text{ V}$                                                      |                          |  |         | 0.2  |      |         | 0.2  |      | mA            |
| $I_{IH}$  | High-level input current                                  | Enable#                | $V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$                                                    |                          |  |         | 40   |      |         | 40   |      | $\mu\text{A}$ |
| $I_{IL}$  | Low-level input current                                   | Enable#                | $V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$                                                    |                          |  |         | -0.8 |      |         | -0.8 |      | mA            |
| $I_{OS}$  | Short-circuit output current§                             |                        | $V_{CC} = \text{MAX}$                                                                         |                          |  | -40     | -225 |      | -40     | -225 |      | mA            |
| $I_{CC}$  | Supply current, total into $V_{CC}$ and OSC $V_{CC}$ pins |                        | $V_{CC} = \text{MAX},$<br>Enable# = 4.5 V<br>See Note 4                                       | 'LS624                   |  | 20      | 35   |      | 20      | 35   |      | mA            |
|           |                                                           |                        |                                                                                               | 'LS625                   |  | 35      | 55   |      | 35      | 55   |      |               |
|           |                                                           |                        |                                                                                               | 'LS626                   |  | 35      | 55   |      | 35      | 55   |      |               |
|           |                                                           |                        |                                                                                               | 'LS627                   |  | 35      | 55   |      | 35      | 55   |      |               |
|           |                                                           |                        |                                                                                               | 'LS628                   |  | 20      | 35   |      | 20      | 35   |      |               |
|           |                                                           |                        |                                                                                               | 'LS629                   |  | 35      | 55   |      | 35      | 55   |      |               |

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡All typical values are at  $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$ .

§Not more than one output should be shorted at a time and duration of the short-circuit should not exceed one second.

¶The range input is provided only on the 'LS624, 'LS628, and 'LS629.

#The enable input is provided only on the 'LS624, 'LS626, 'LS628, and 'LS629.

NOTES: 3.  $V_{OH}$  for Y outputs and  $V_{OL}$  for Z outputs are measured while enable inputs are at  $V_{IL}$  MAX, with individual 1-k $\Omega$  resistors connected from CX1 to  $V_{CC}$  and from CX2 to ground. The resistor connections are reversed for testing  $V_{OH}$  for Z outputs and  $V_{OL}$  for Y inputs.

4. For 'LS624, 'LS626, 'LS628, and 'LS629,  $I_{CC}$  is measured with the outputs disabled and open. For 'LS625 and 'LS627,  $I_{CC}$  is measured with one OSC  $V_{CC} = \text{MAX}$ , and with the other OSC  $V_{CC}$  and outputs open.

switching characteristics,  $V_{CC} = 5\text{ V}$  (unless otherwise noted),  $R_L = 667\ \Omega$ ,  $C_L = 45\text{ pF}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER      |                  | TEST CONDITIONS          |                                                         | 'LS624, 'LS628, 'LS629 |     |     | 'LS625, 'LS626, 'LS627 |     |     | UNIT |
|----------------|------------------|--------------------------|---------------------------------------------------------|------------------------|-----|-----|------------------------|-----|-----|------|
|                |                  |                          |                                                         | MIN                    | TYP | MAX | MIN                    | TYP | MAX |      |
| f <sub>O</sub> | Output frequency | C <sub>ext</sub> = 50 pF | V <sub>I</sub> {freq} = 5 V, V <sub>I</sub> {rng} = 0 V | 15                     | 20  | 25  |                        |     |     | MHz  |
|                |                  |                          | V <sub>I</sub> {freq} = 1 V, V <sub>I</sub> {rng} = 5 V | 1.1                    | 1.6 | 2.1 |                        |     |     |      |
|                |                  |                          | V <sub>I</sub> {freq} = 5 V                             |                        |     |     | 7                      | 9.5 | 12  |      |
|                |                  |                          | V <sub>I</sub> {freq} = 0 V                             |                        |     |     | 0.9                    | 1.2 | 1.5 |      |

## TYPICAL CHARACTERISTICS

'LS624, 'LS628, 'LS629

OUTPUT FREQUENCY

vs

FREQUENCY-CONTROL INPUT VOLTAGE†

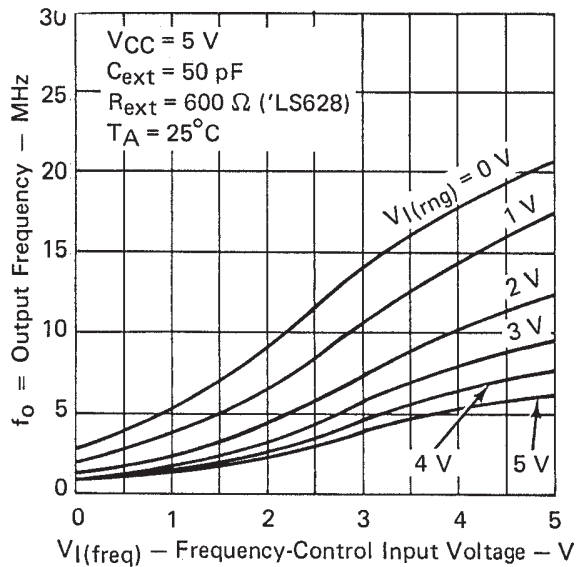


FIGURE 1

'LS624, 'LS628, 'LS629

OUTPUT FREQUENCY

vs

FREQUENCY-CONTROL INPUT VOLTAGE†

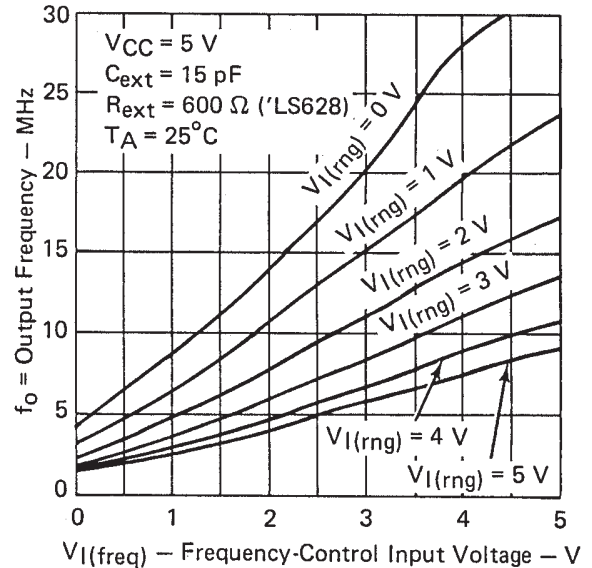


FIGURE 2

† Due to the effects of stray capacitance the output frequency may be unstable when the frequency control voltage is less than 1 volt.

# SN54LS624 THRU SN54LS629, SN74LS624 THRU SN74LS629 VOLTAGE-CONTROLLED OSCILLATORS

SDLS186 – JANUARY 1980 – REVISED MARCH 1988

## TYPICAL CHARACTERISTICS

'LS624, 'LS628, 'LS629

OUTPUT FREQUENCY

vs

EXTERNAL CAPACITANCE

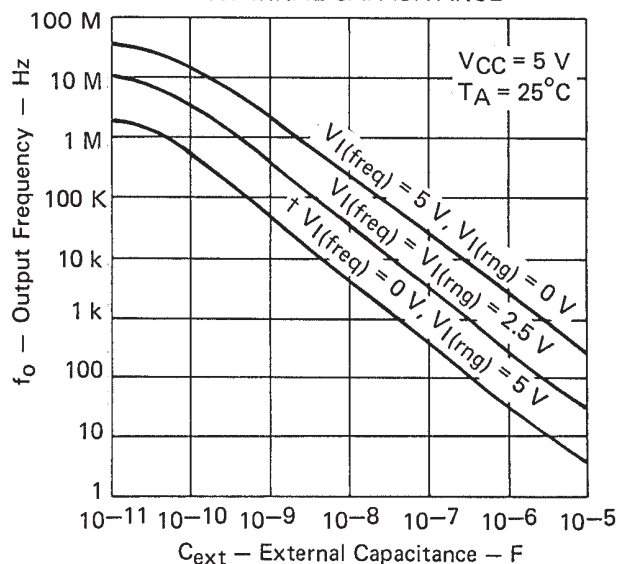


FIGURE 3

'LS625, 'LS626, 'LS627

OUTPUT FREQUENCY

vs

FREQUENCY-CONTROL INPUT VOLTAGE†

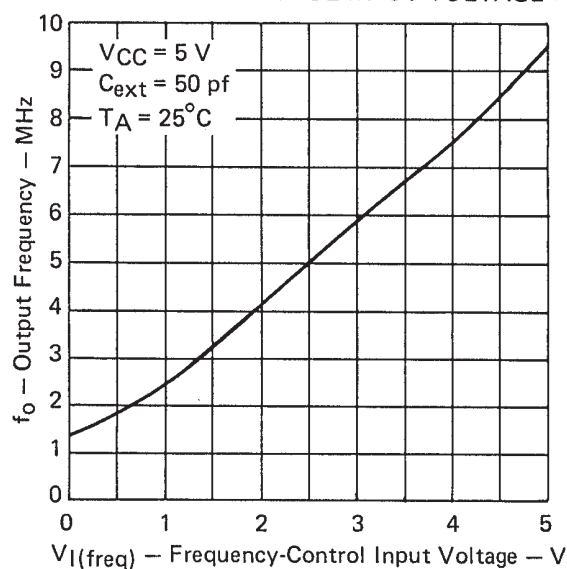


FIGURE 4

'LS625, 'LS626, 'LS627

OUTPUT FREQUENCY

vs

FREQUENCY-CONTROL INPUT VOLTAGE

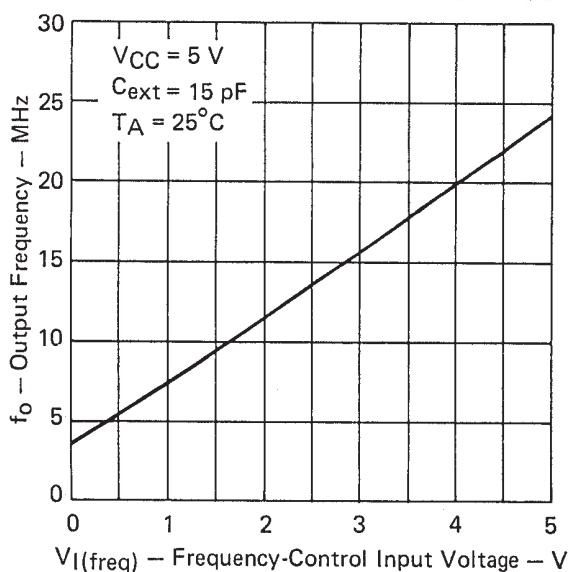


FIGURE 5

'LS625, 'LS626, 'LS627

OUTPUT FREQUENCY

vs

EXTERNAL CAPACITANCE

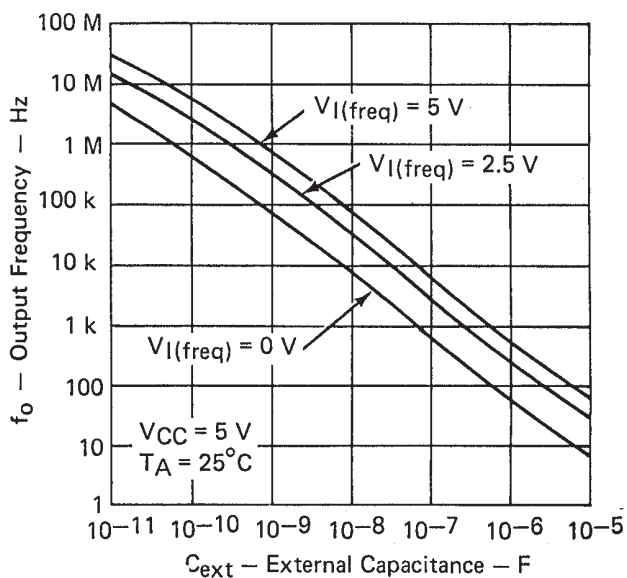


FIGURE 6

† Due to the effects of stray capacitance the output frequency may be unstable when the frequency control voltage is less than 1 volt.

## TYPICAL CHARACTERISTICS

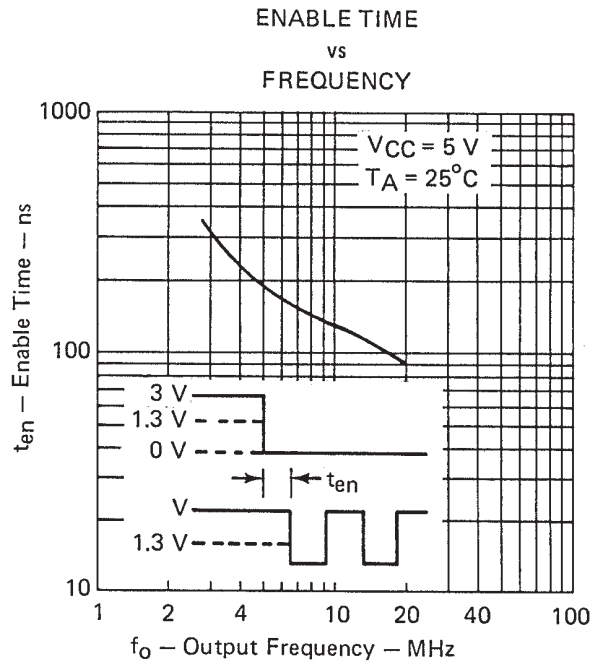


FIGURE 7

## TYPICAL APPLICATIONS DATA

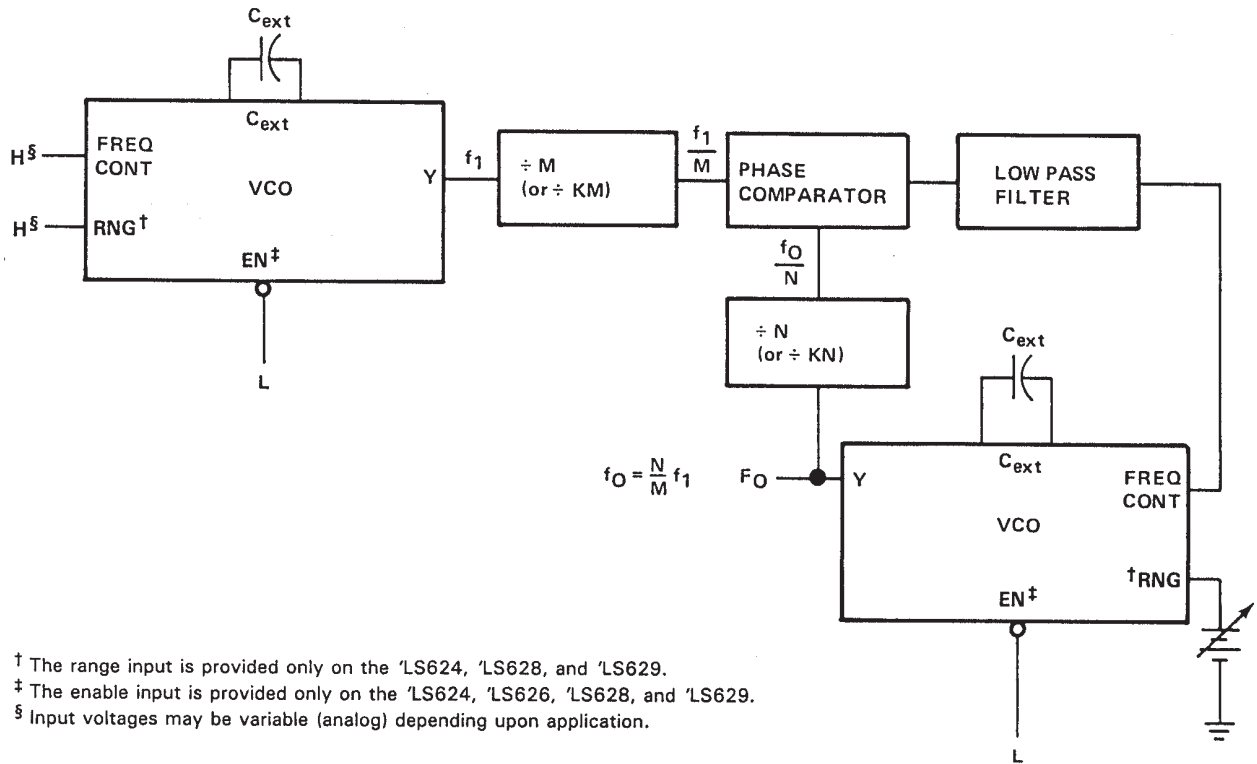


FIGURE A—PHASE-LOCKED LOOP.

**PACKAGING INFORMATION**

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                     |
|---------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|-----------------------------------------|
| <a href="#">5962-9204601M2A</a> | Active        | Production           | LCCC (FK)   20 | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-<br>9204601M2A<br>SNJ54LS<br>628FK |
| <a href="#">5962-9204601MCA</a> | Active        | Production           | CDIP (J)   14  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9204601MC<br>A<br>SNJ54LS628J      |
| <a href="#">81021012A</a>       | Active        | Production           | LCCC (FK)   20 | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 81021012A<br>SNJ54LS<br>629FK           |
| <a href="#">8102101EA</a>       | Active        | Production           | CDIP (J)   16  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8102101EA<br>SNJ54LS629J                |
| <a href="#">8102101FA</a>       | Active        | Production           | CFP (W)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8102101FA<br>SNJ54LS629W                |
| <a href="#">SN54LS628J</a>      | Active        | Production           | CDIP (J)   14  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | SN54LS628J                              |
| SN54LS628J.A                    | Active        | Production           | CDIP (J)   14  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | SN54LS628J                              |
| <a href="#">SN54LS629J</a>      | Active        | Production           | CDIP (J)   16  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | SN54LS629J                              |
| SN54LS629J.A                    | Active        | Production           | CDIP (J)   16  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | SN54LS629J                              |
| <a href="#">SN74LS624D</a>      | Active        | Production           | SOIC (D)   14  | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS624                                   |
| SN74LS624D.A                    | Active        | Production           | SOIC (D)   14  | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS624                                   |
| <a href="#">SN74LS624DR</a>     | Active        | Production           | SOIC (D)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS624                                   |
| SN74LS624DR.A                   | Active        | Production           | SOIC (D)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS624                                   |
| <a href="#">SN74LS624N</a>      | Active        | Production           | PDIP (N)   14  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN74LS624N                              |
| SN74LS624N.A                    | Active        | Production           | PDIP (N)   14  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN74LS624N                              |
| <a href="#">SN74LS624NSR</a>    | Active        | Production           | SOP (NS)   14  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 74LS624                                 |
| SN74LS624NSR.A                  | Active        | Production           | SOP (NS)   14  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 74LS624                                 |
| SN74LS624NSRG4                  | Active        | Production           | SOP (NS)   14  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | 74LS624                                 |
| <a href="#">SN74LS628D</a>      | Active        | Production           | SOIC (D)   14  | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS628                                   |
| SN74LS628D.A                    | Active        | Production           | SOIC (D)   14  | 50   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS628                                   |
| <a href="#">SN74LS628DR</a>     | Active        | Production           | SOIC (D)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS628                                   |
| SN74LS628DR.A                   | Active        | Production           | SOIC (D)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS628                                   |

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                     |
|------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|-----------------------------------------|
| <a href="#">SN74LS628N</a>   | Active        | Production           | PDIP (N)   14  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN74LS628N                              |
| SN74LS628N.A                 | Active        | Production           | PDIP (N)   14  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN74LS628N                              |
| <a href="#">SN74LS629D</a>   | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS629                                   |
| SN74LS629D.A                 | Active        | Production           | SOIC (D)   16  | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | 0 to 70      | LS629                                   |
| <a href="#">SN74LS629N</a>   | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN74LS629N                              |
| SN74LS629N.A                 | Active        | Production           | PDIP (N)   16  | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | 0 to 70      | SN74LS629N                              |
| <a href="#">SNJ54LS628FK</a> | Active        | Production           | LCCC (FK)   20 | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-<br>9204601M2A<br>SNJ54LS<br>628FK |
| SNJ54LS628FK.A               | Active        | Production           | LCCC (FK)   20 | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-<br>9204601M2A<br>SNJ54LS<br>628FK |
| <a href="#">SNJ54LS628J</a>  | Active        | Production           | CDIP (J)   14  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9204601MC<br>A<br>SNJ54LS628J      |
| SNJ54LS628J.A                | Active        | Production           | CDIP (J)   14  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-9204601MC<br>A<br>SNJ54LS628J      |
| <a href="#">SNJ54LS629FK</a> | Active        | Production           | LCCC (FK)   20 | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 81021012A<br>SNJ54LS<br>629FK           |
| SNJ54LS629FK.A               | Active        | Production           | LCCC (FK)   20 | 55   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 81021012A<br>SNJ54LS<br>629FK           |
| <a href="#">SNJ54LS629J</a>  | Active        | Production           | CDIP (J)   16  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8102101EA<br>SNJ54LS629J                |
| SNJ54LS629J.A                | Active        | Production           | CDIP (J)   16  | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8102101EA<br>SNJ54LS629J                |
| <a href="#">SNJ54LS629W</a>  | Active        | Production           | CFP (W)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8102101FA<br>SNJ54LS629W                |
| SNJ54LS629W.A                | Active        | Production           | CFP (W)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 8102101FA<br>SNJ54LS629W                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN54LS628, SN54LS629, SN74LS628, SN74LS629 :**


● Catalog : [SN74LS628](#), [SN74LS629](#)

● Military : [SN54LS628](#), [SN54LS629](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications


## TAPE AND REEL INFORMATION

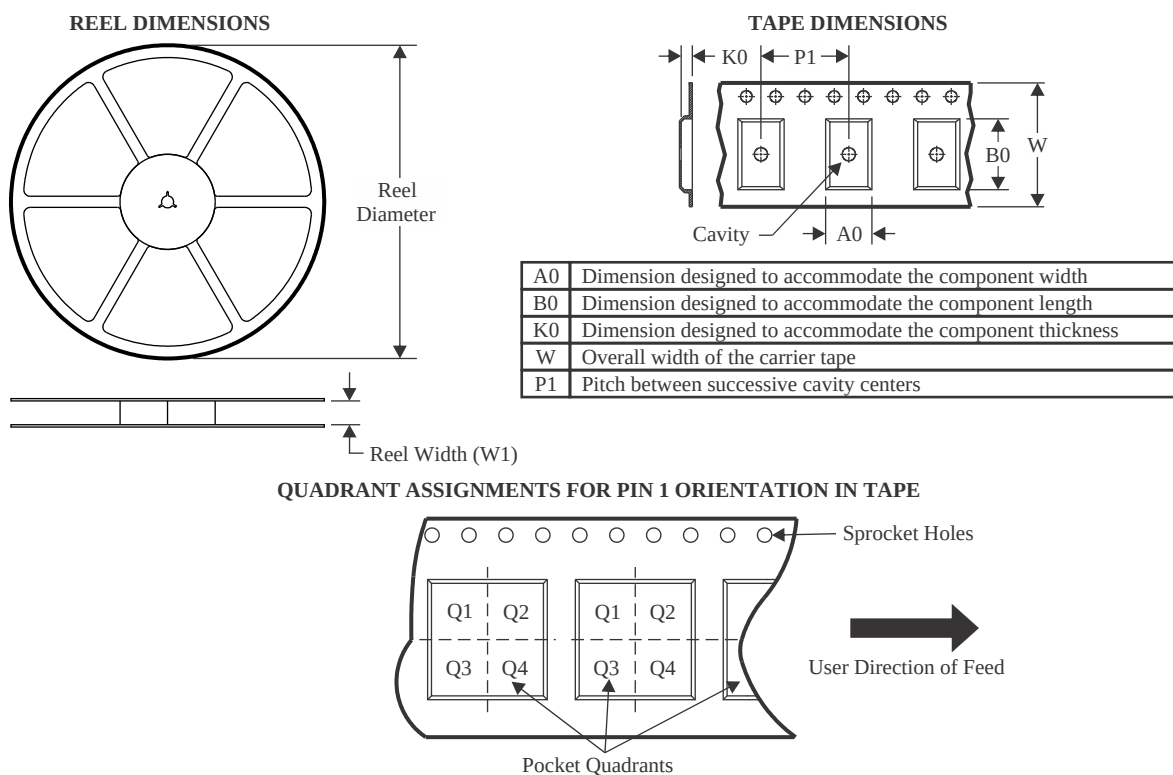

\*All dimensions are nominal


| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LS624DR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74LS624NSR | SOP          | NS              | 14   | 2000 | 330.0              | 16.4               | 8.1     | 10.4    | 2.5     | 12.0    | 16.0   | Q1            |
| SN74LS628DR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

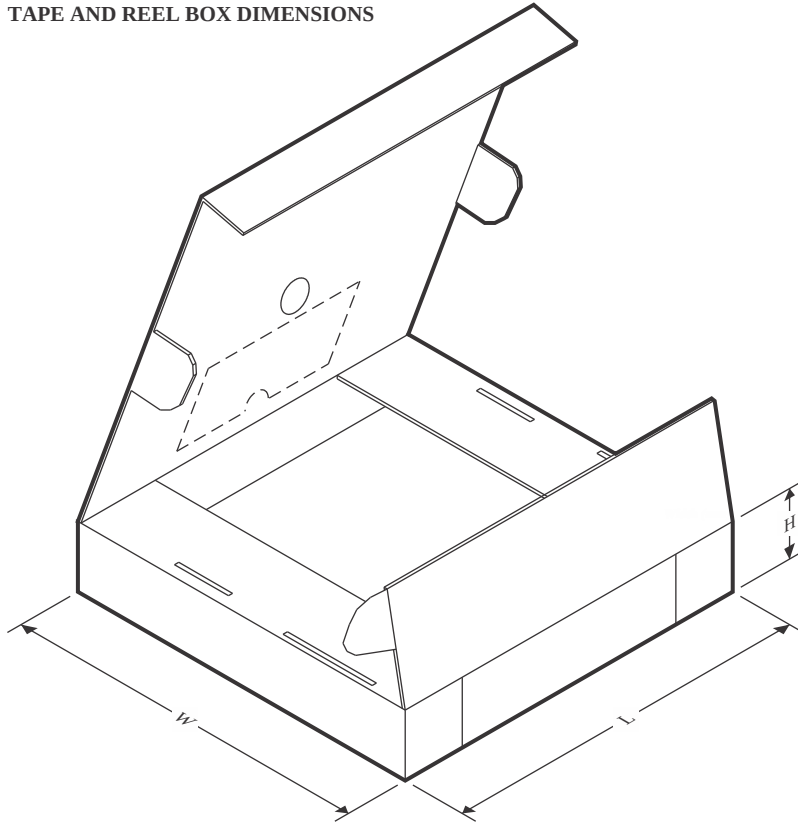

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LS624DR  | SOIC         | D               | 14   | 2500 | 353.0       | 353.0      | 32.0        |
| SN74LS624NSR | SOP          | NS              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LS628DR  | SOIC         | D               | 14   | 2500 | 353.0       | 353.0      | 32.0        |

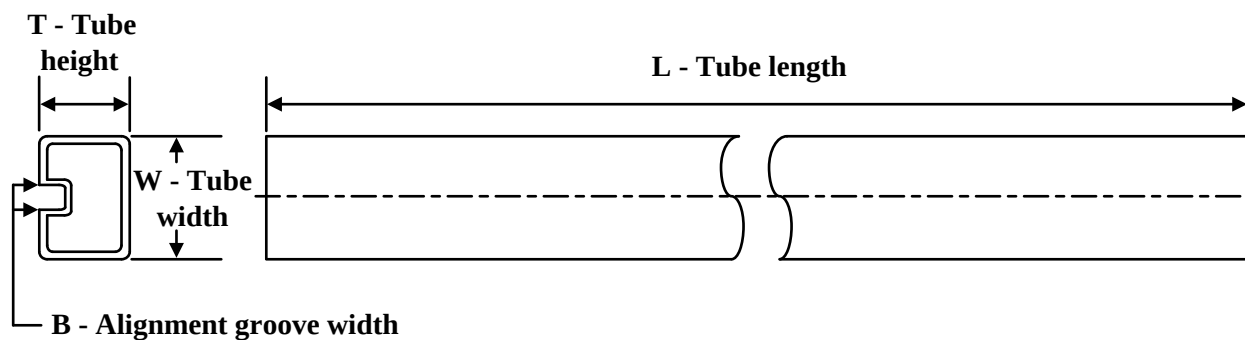
**TUBE**


\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 5962-9204601M2A | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| 81021012A       | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| 8102101FA       | W            | CFP          | 16   | 25  | 506.98 | 26.16  | 6220   | NA     |
| SN74LS624D      | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LS624D.A    | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LS624N      | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS624N      | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS624N.A    | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS624N.A    | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS628D      | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LS628D.A    | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74LS628N      | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS628N      | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS628N.A    | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS628N.A    | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS629D      | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN74LS629D.A    | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| SN74LS629N      | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS629N      | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS629N.A    | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74LS629N.A    | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SNJ54LS628FK    | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| SNJ54LS628FK.A  | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| SNJ54LS629FK    | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| SNJ54LS629FK.A  | FK           | LCCC         | 20   | 55  | 506.98 | 12.06  | 2030   | NA     |
| SNJ54LS629W     | W            | CFP          | 16   | 25  | 506.98 | 26.16  | 6220   | NA     |
| SNJ54LS629W.A   | W            | CFP          | 16   | 25  | 506.98 | 26.16  | 6220   | NA     |

W (R-GDFP-F16)

CERAMIC DUAL FLATPACK

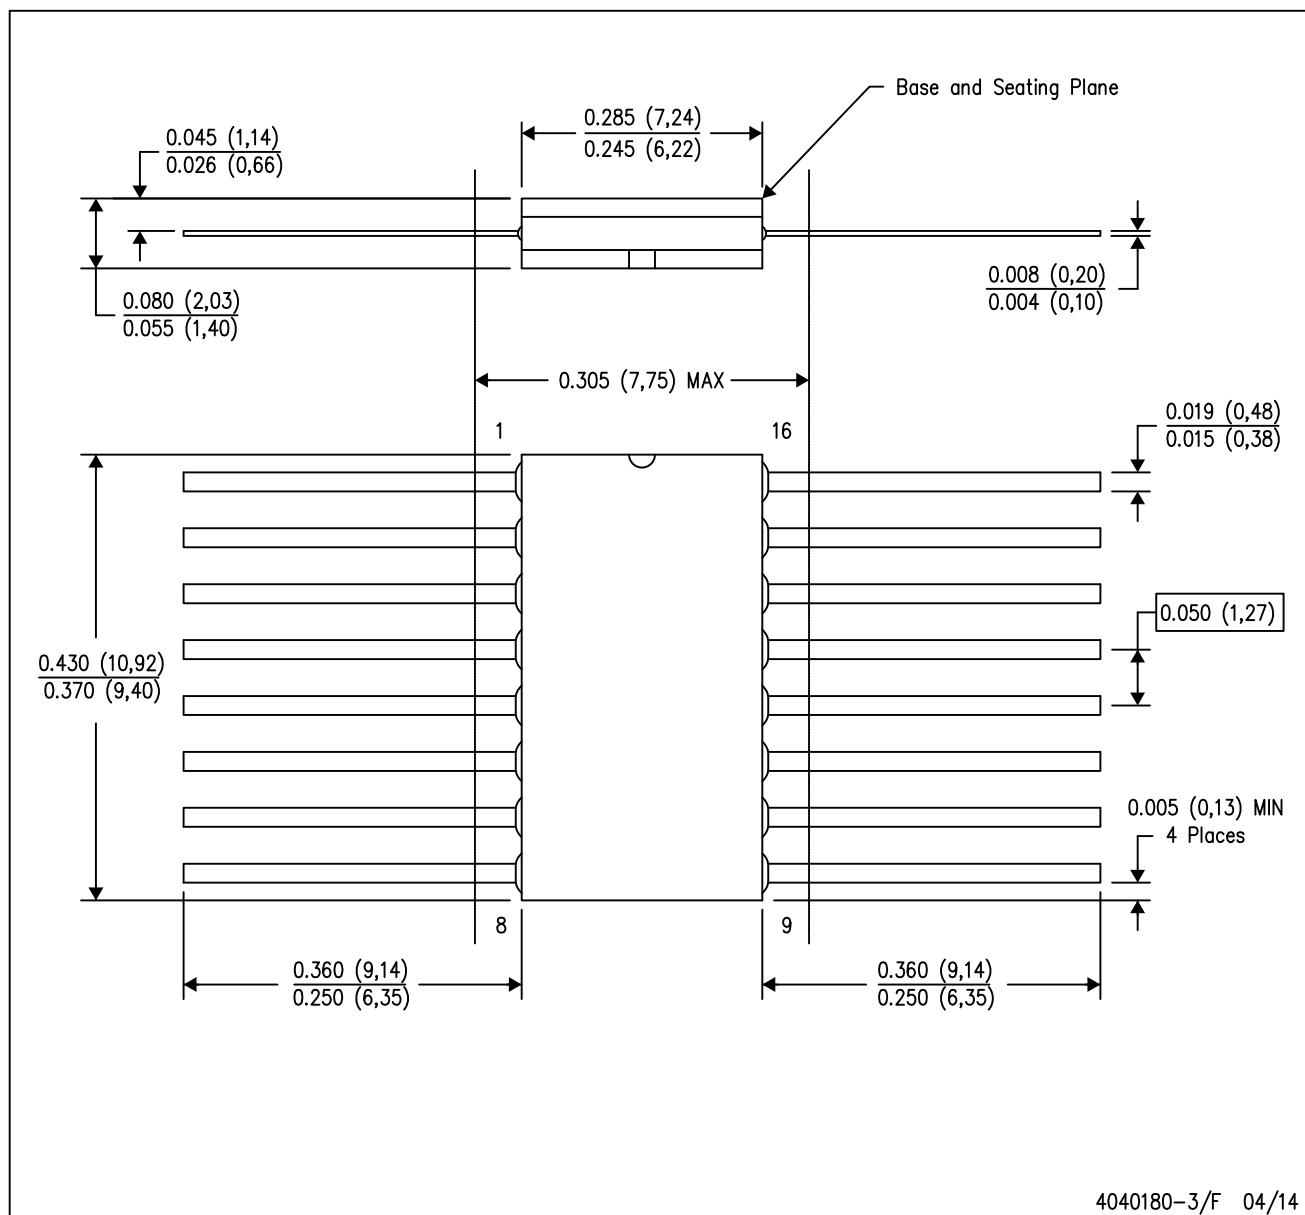

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification only.
  - Falls within MIL STD 1835 GDFP2-F16

## GENERIC PACKAGE VIEW


**FK 20**

**LCCC - 2.03 mm max height**

8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

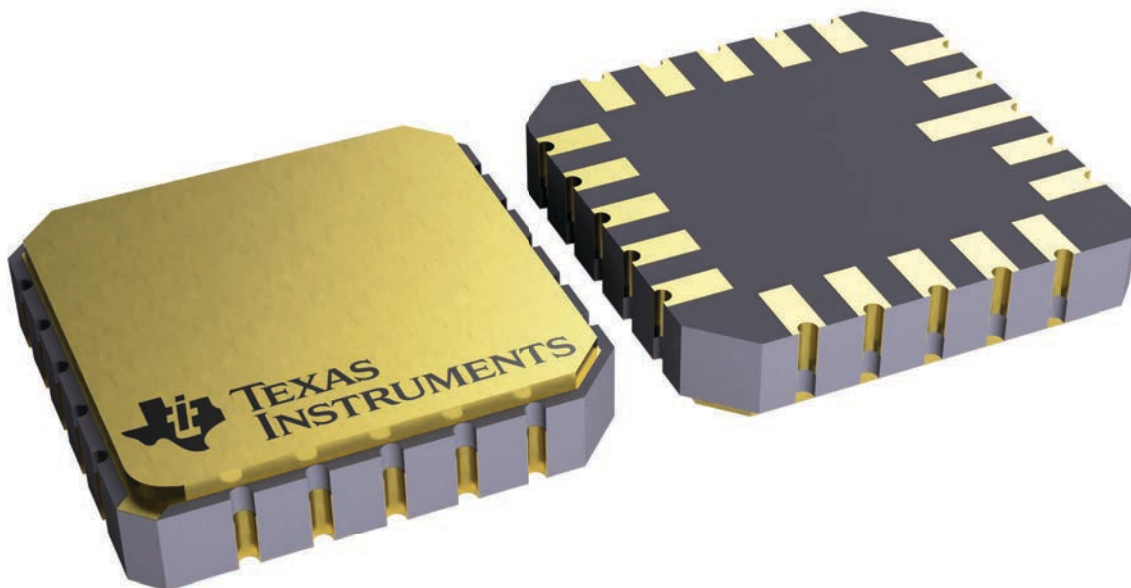


4229370VA\


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

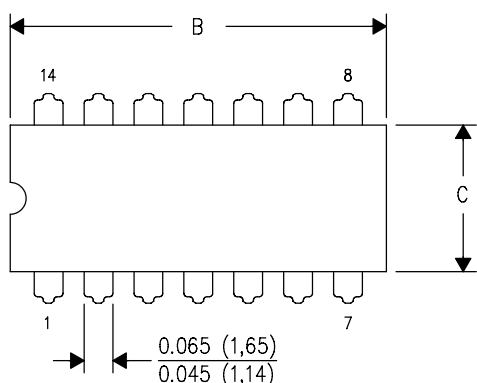

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

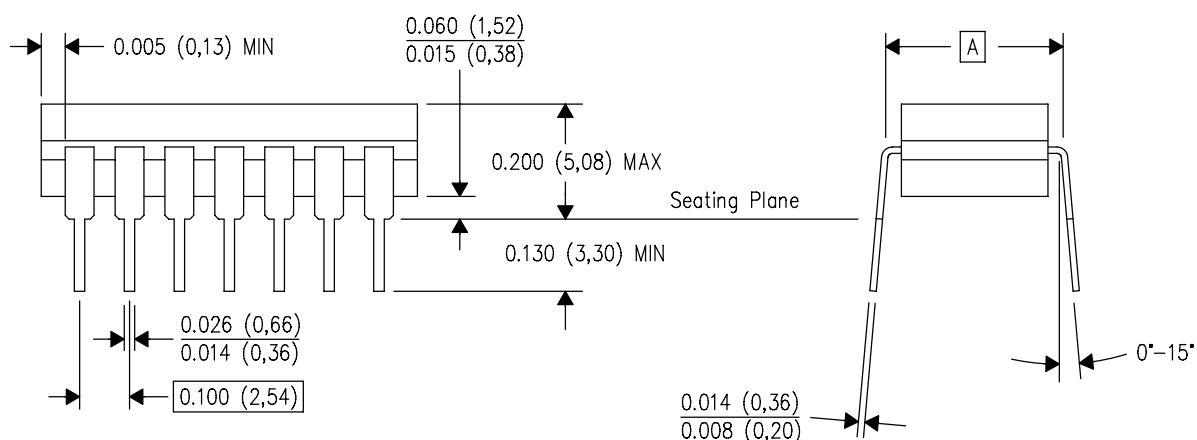

4040083/F 03/03


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

**J 14**

## GENERIC PACKAGE VIEW


**CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE

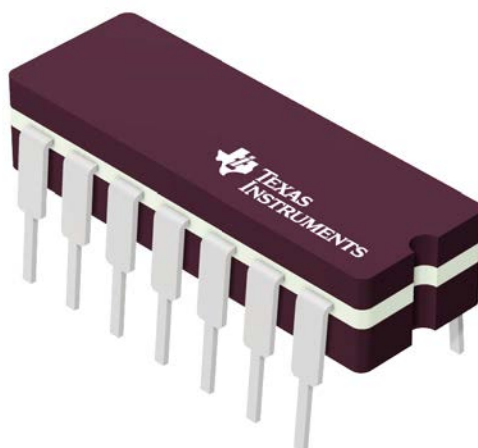


Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4040083-5/G

**J0014A****PACKAGE OUTLINE****CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE

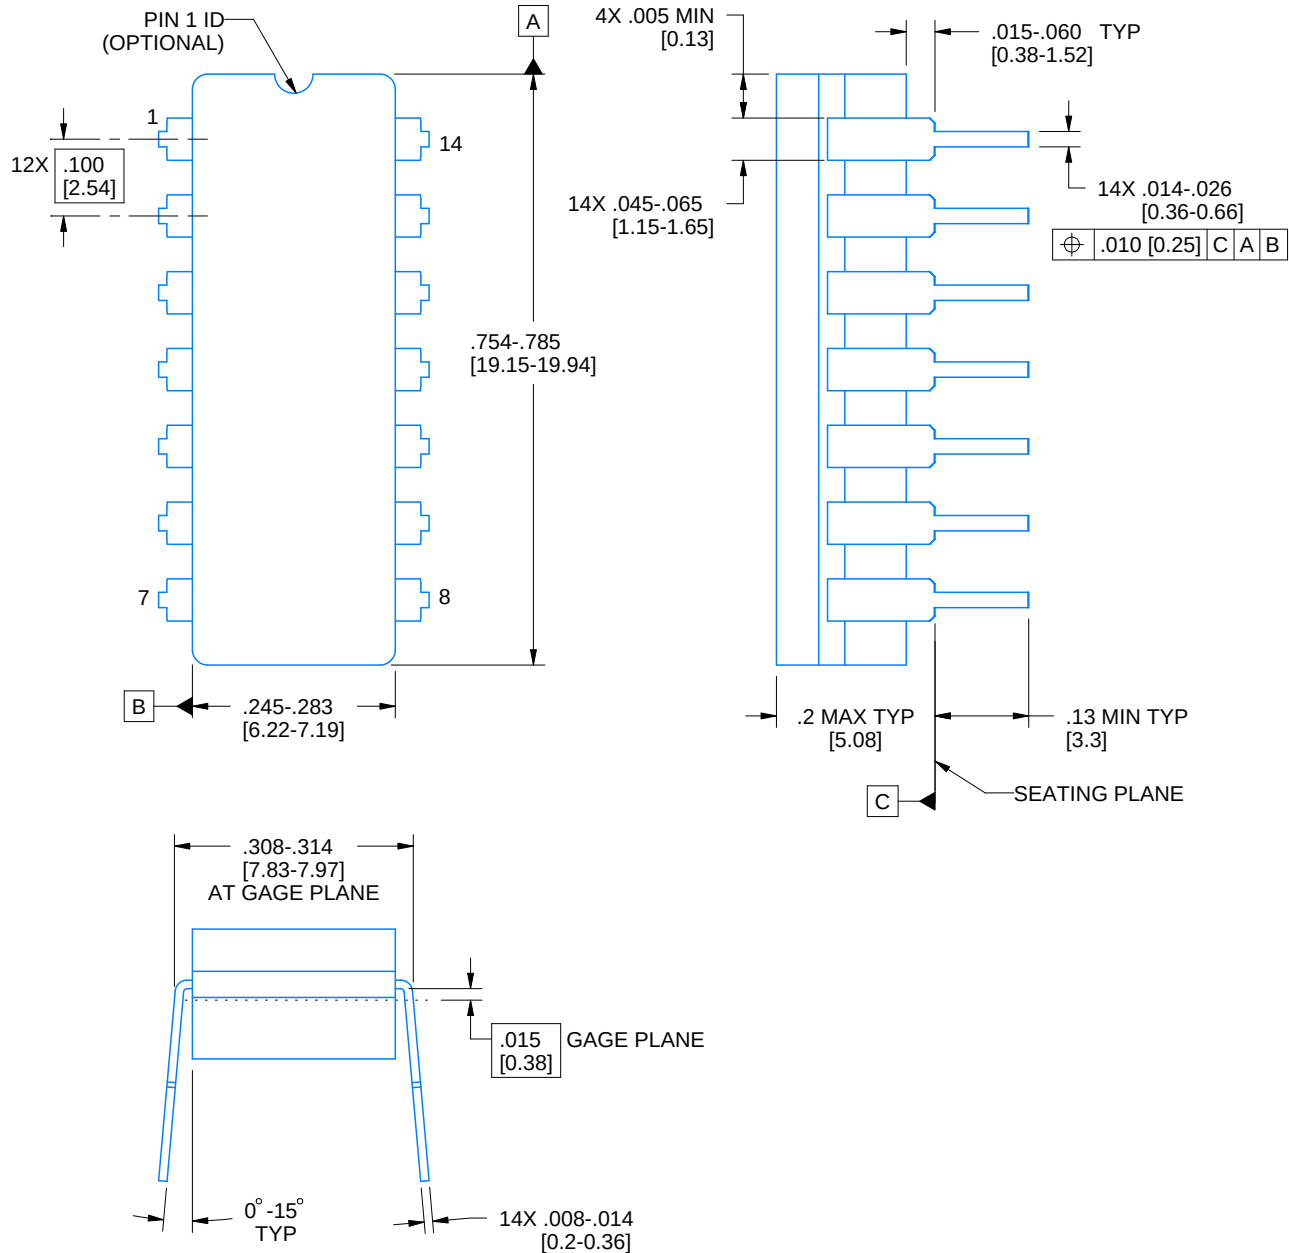

4214771/A 05/2017

**NOTES:**

1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This package is hermetically sealed with a ceramic lid using glass frit.
4. Index point is provided on cap for terminal identification only and on press ceramic glass frit seal only.
5. Falls within MIL-STD-1835 and GDIP1-T14.




**TEXAS  
INSTRUMENTS**  
www.ti.com

# EXAMPLE BOARD LAYOUT



J0014A

CDIP - 5.08 mm max height

CERAMIC DUAL IN LINE PACKAGE

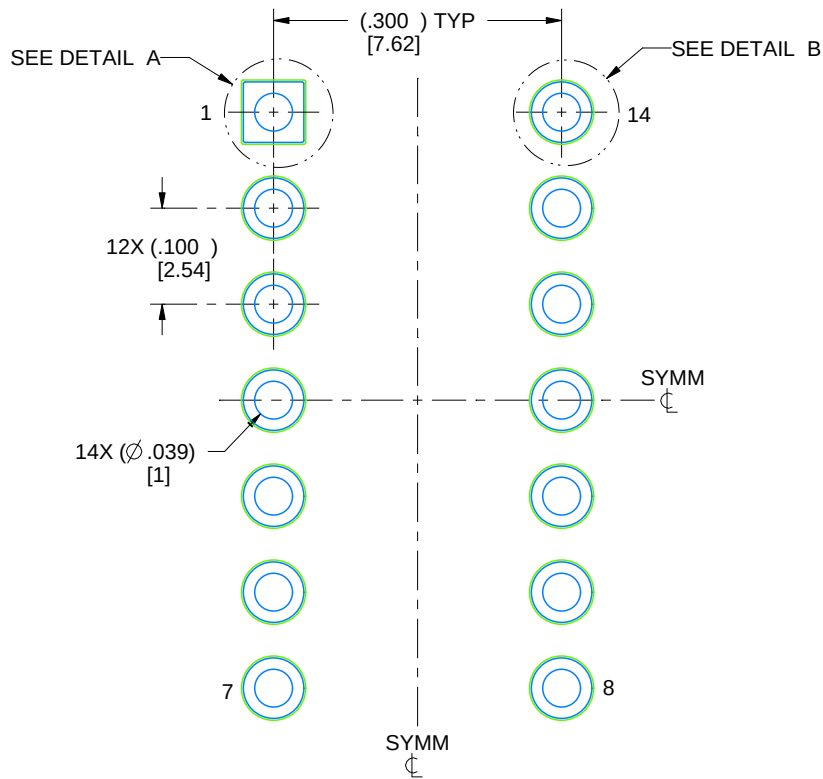

LAND PATTERN EXAMPLE  
NON-SOLDER MASK DEFINED  
SCALE: 5X

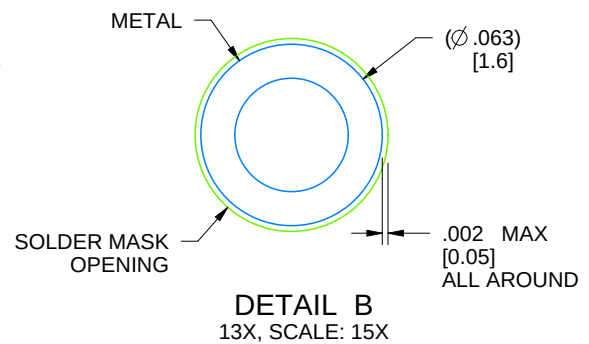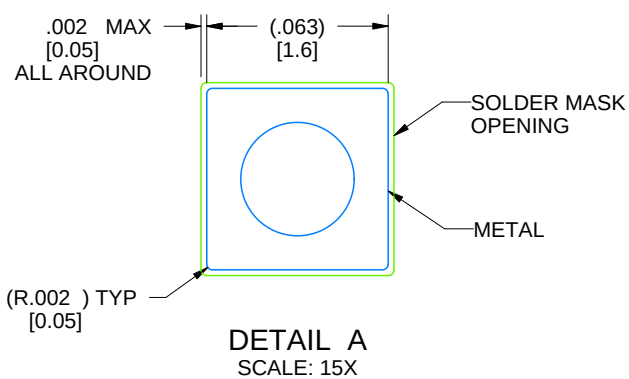


4214771/A 05/2017


## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

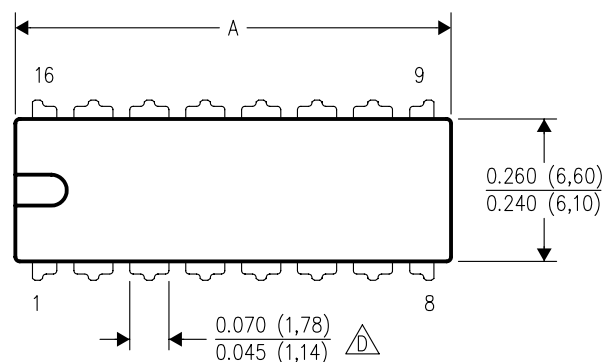


| PINS **             | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| DIM                 |                  |                  |                  |                  |
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

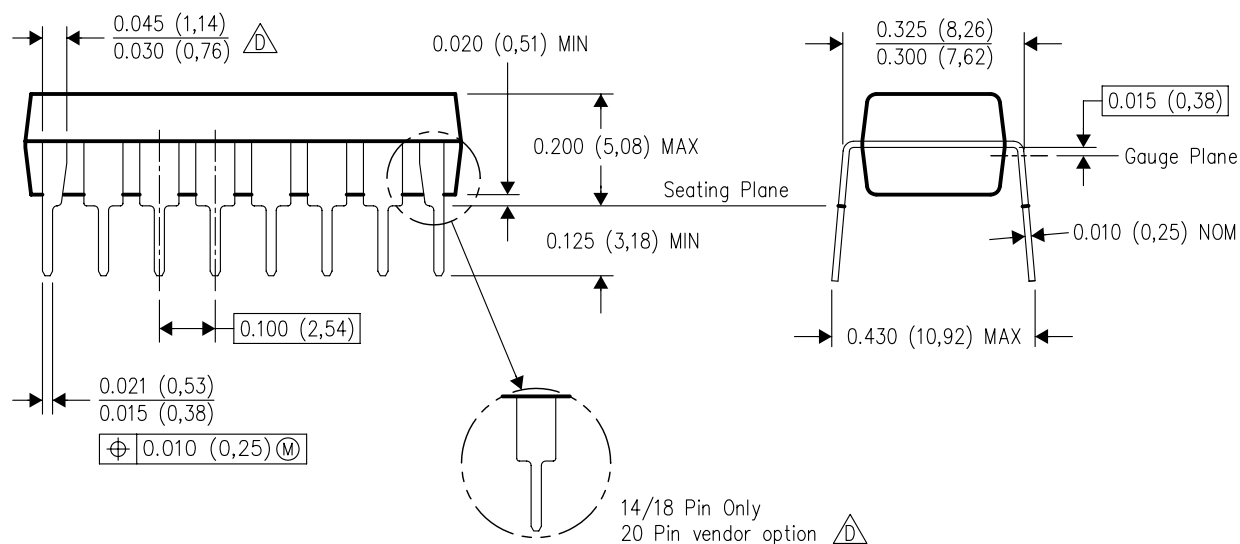


4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - D. The 20 pin end lead shoulder width is a vendor option, either half or full width.

**D0014A****PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

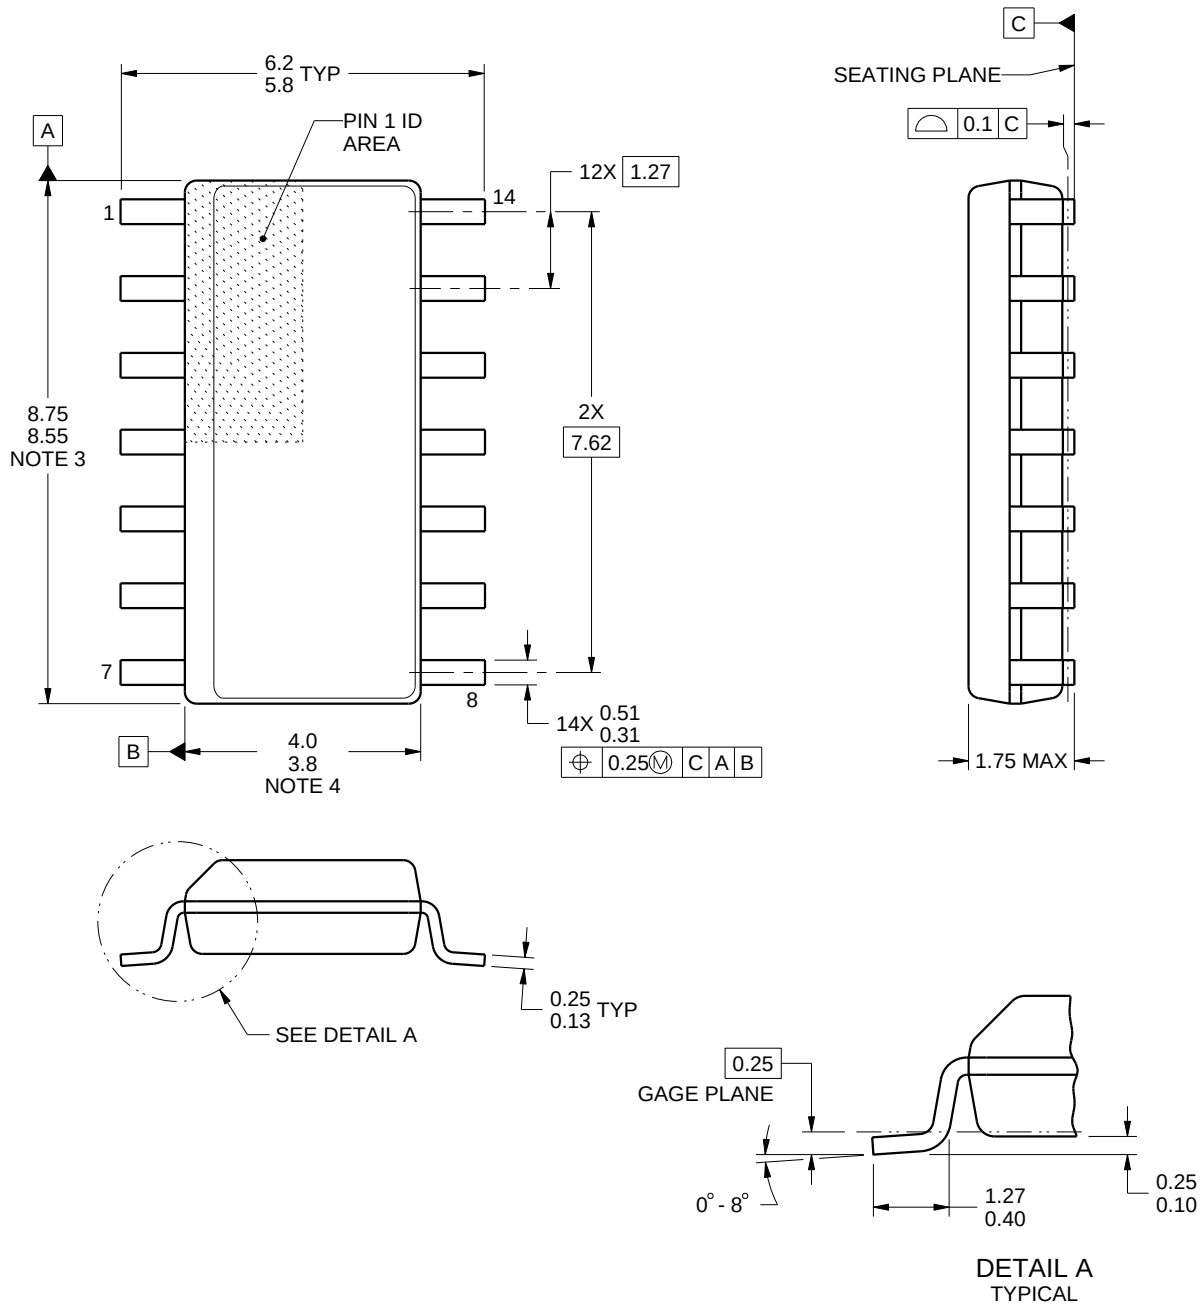

4220718/A 09/2016

**NOTES:**


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

# EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

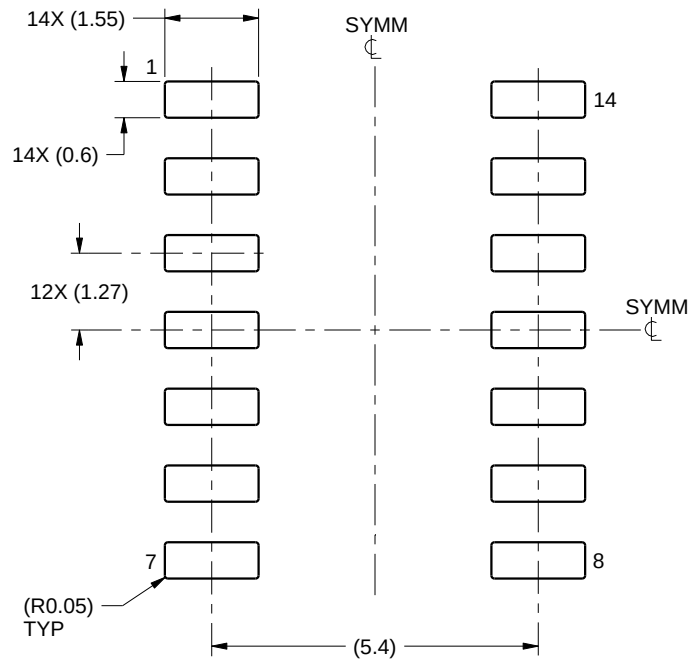

LAND PATTERN EXAMPLE  
SCALE:8X

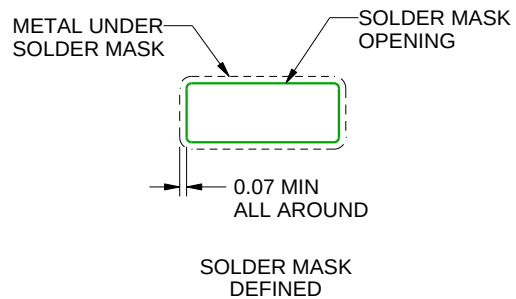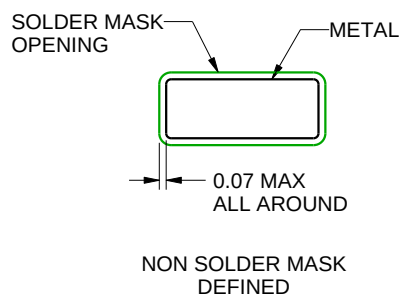

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

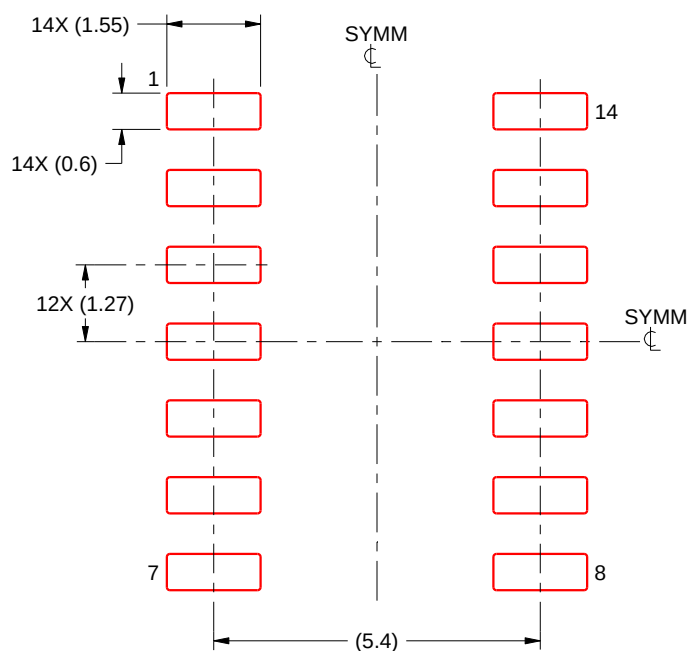

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:8X


4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE

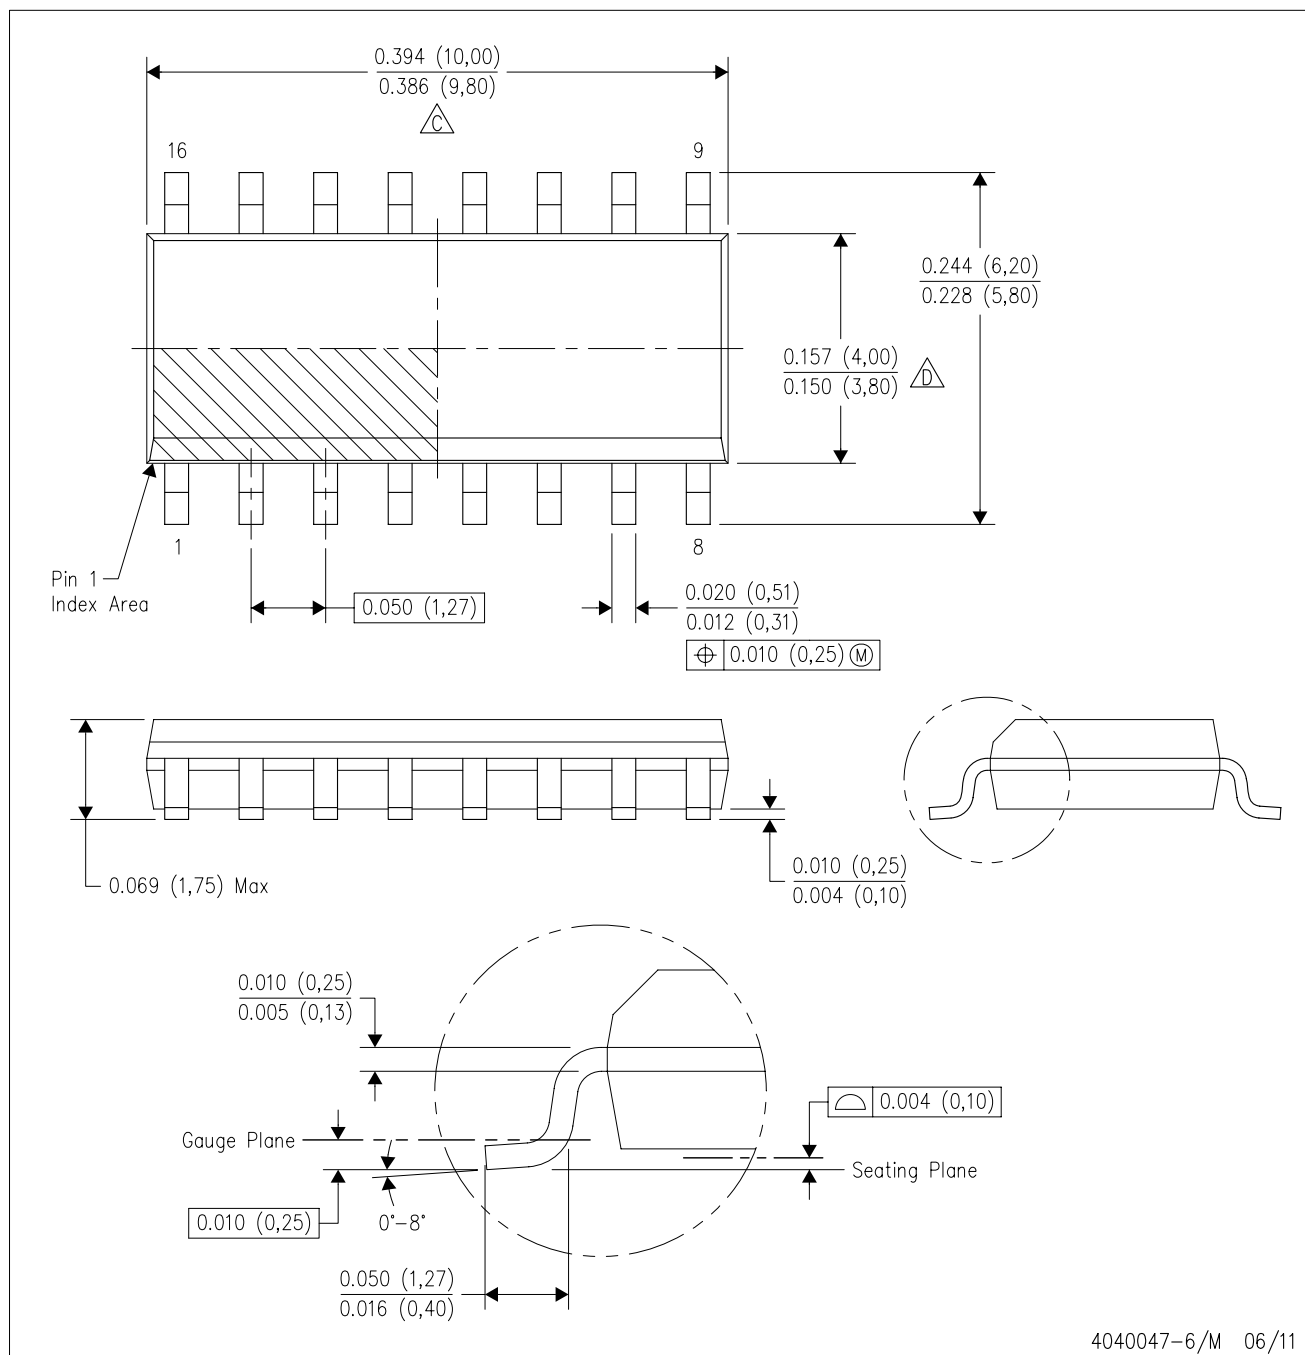

NOTES:


- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN

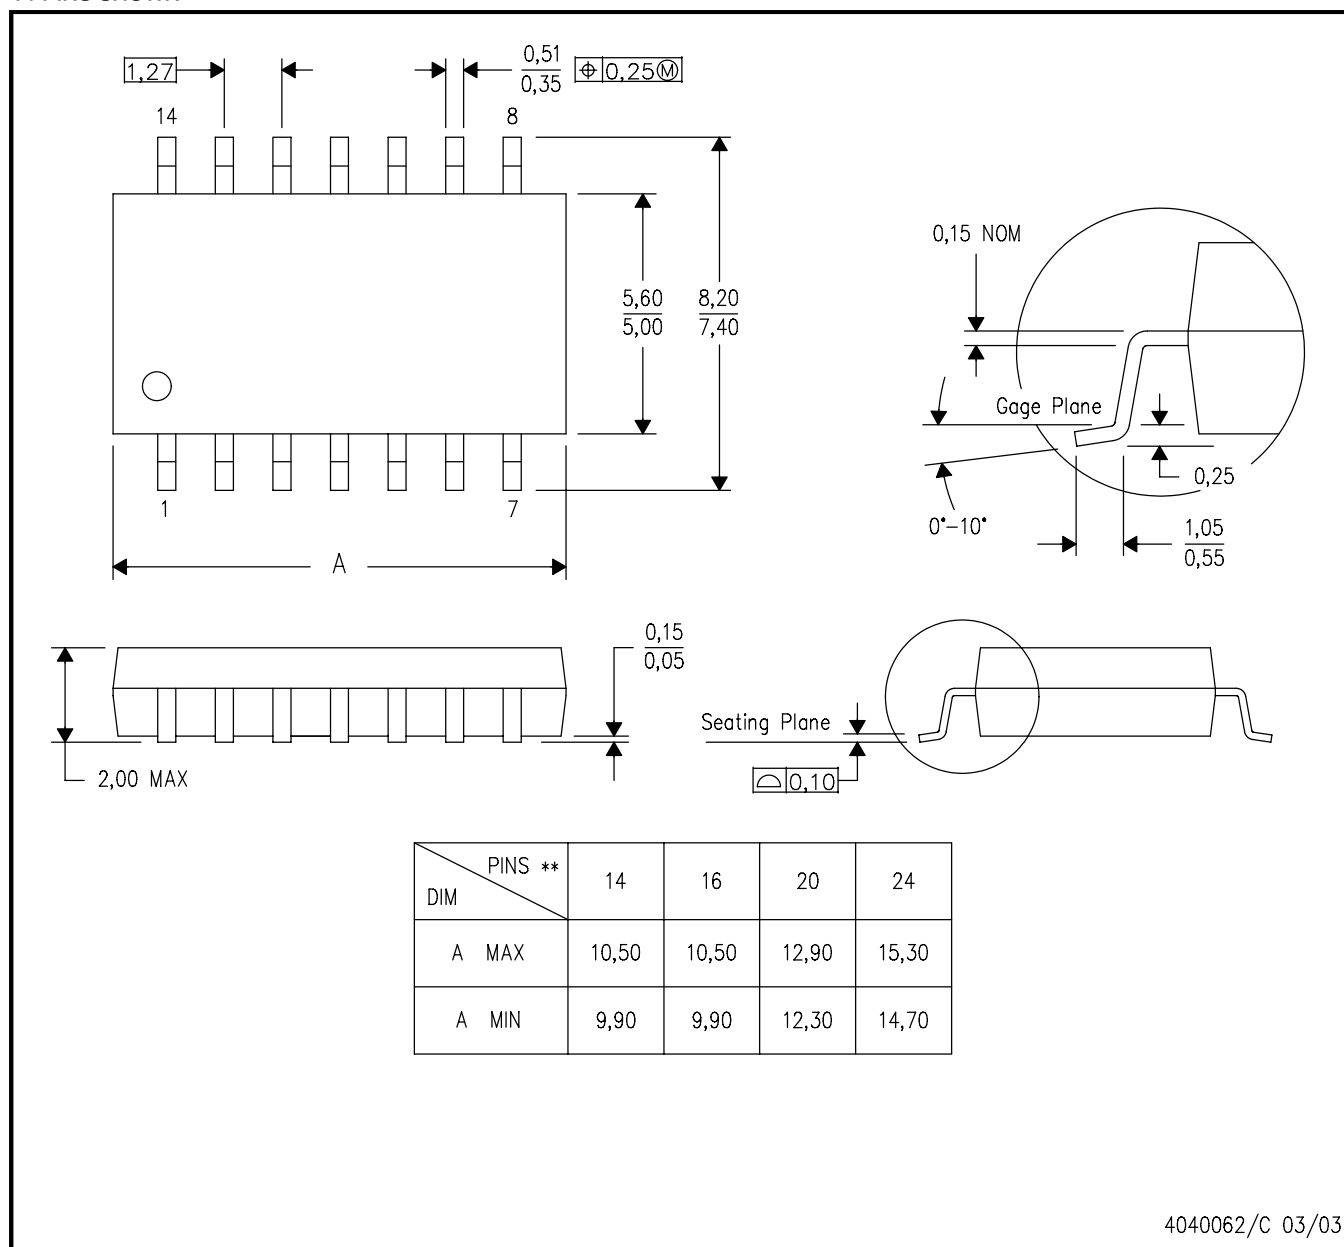

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025