

# SN74LV157A Quadruple 2-Line to 1-Line Data Selectors/Multiplexers

## 1 Features

- Operates 2 V to 5.5 V  $V_{CC}$
- Inputs accept voltages to 5.5 V
- Max  $t_{pd}$  of 7.5 ns at 5 V
- Typical  $V_{OLP}$  (Output Ground Bounce) < 0.8 V at  $V_{CC}$ ,  $T_A = 25^\circ\text{C}$
- Typical  $V_{OHV}$  (Output  $V_{OH}$  Undershoot) > 2 V at  $V_{CC}$ ,  $T_A = 25^\circ\text{C}$
- Latch-up performance exceeds 100 mA per JESD 78, Class II

## 2 Applications

- Servers
- LED Displays
- Network Switches
- Telecom Infrastructure
- Motor Drivers
- I/O Expanders

## 3 Description


The 'LV157A devices are quadruple 2-line to 1-line data selectors/multiplexers designed for

2 V to 5.5 V  $V_{CC}$  operation.

### Package Information<sup>(1)</sup>

| PART NUMBER | PACKAGE         | BODY SIZE (NOM)  |
|-------------|-----------------|------------------|
| SN74LV157A  | DB (SSOP, 16)   | 6.2 mm × 5.3 mm  |
|             | DGV (TVSOP, 16) | 3.6 mm × 4.4 mm  |
|             | DW (SOIC, 16)   | 10.3 mm × 7.5 mm |
|             | NS (SOP, 16)    | 10.3 mm × 5.3 mm |
|             | PW (TSSOP, 16)  | 5 mm × 4.4 mm    |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.

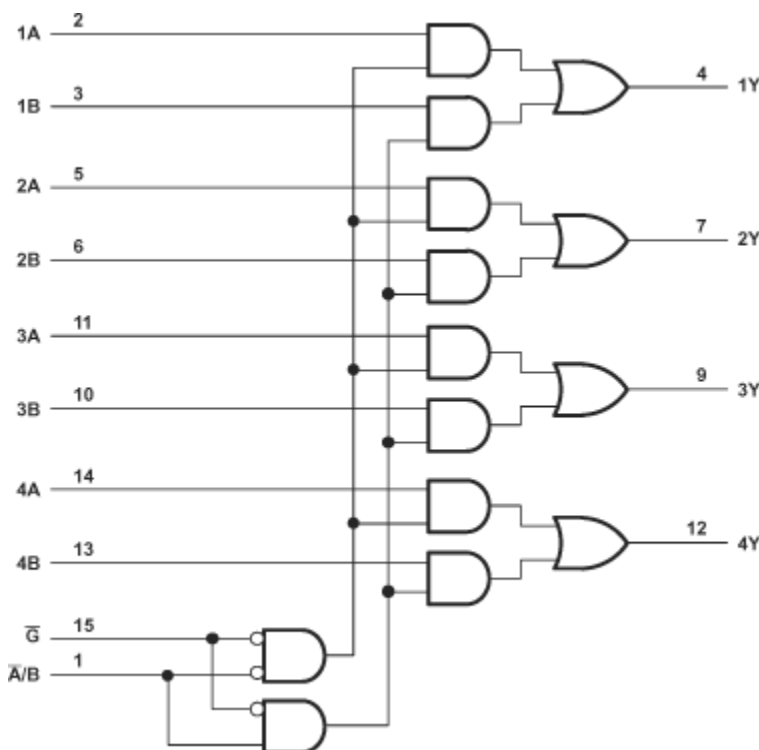

Logic Diagram (Positive Logic)



## Table of Contents

|                                                                               |          |                                                        |           |
|-------------------------------------------------------------------------------|----------|--------------------------------------------------------|-----------|
| <b>1 Features</b> .....                                                       | <b>1</b> | <b>7 Parameter Measurement Information</b> .....       | <b>8</b>  |
| <b>2 Applications</b> .....                                                   | <b>1</b> | <b>8 Detailed Description</b> .....                    | <b>9</b>  |
| <b>3 Description</b> .....                                                    | <b>1</b> | 8.1 Overview.....                                      | 9         |
| <b>4 Revision History</b> .....                                               | <b>2</b> | 8.2 Functional Block Diagram.....                      | 9         |
| <b>5 Pin Configuration and Functions</b> .....                                | <b>3</b> | 8.3 Device Functional Modes.....                       | 9         |
| <b>6 Specifications</b> .....                                                 | <b>4</b> | <b>9 Application and Implementation</b> .....          | <b>10</b> |
| 6.1 Absolute Maximum Ratings.....                                             | 4        | 9.1 Power Supply Recommendations.....                  | 10        |
| 6.2 ESD Ratings.....                                                          | 4        | 9.2 Layout.....                                        | 10        |
| 6.3 Recommended Operating Conditions .....                                    | 5        | <b>10 Device and Documentation Support</b> .....       | <b>11</b> |
| 6.4 Thermal Information.....                                                  | 5        | 10.1 Documentation Support.....                        | 11        |
| 6.5 Electrical Characteristics.....                                           | 5        | 10.2 Receiving Notification of Documentation Updates.. | 11        |
| 6.6 Switching Characteristics, $V_{CC} = 2.5\text{ V} \pm 0.2\text{ V}$ ..... | 6        | 10.3 Support Resources.....                            | 11        |
| 6.7 Switching Characteristics, $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ ..... | 6        | 10.4 Electrostatic Discharge Caution.....              | 11        |
| 6.8 Switching Characteristics, $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ .....   | 6        | 10.5 Glossary.....                                     | 11        |
| 6.9 Noise Characteristics.....                                                | 7        | <b>11 Mechanical, Packaging, and Orderable</b>         |           |
| 6.10 Operating Characteristics.....                                           | 7        | <b>Information</b> .....                               | <b>12</b> |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| <b>Changes from Revision F (April 1998) to Revision G (March 2023)</b>                                                                                                                                                                                                                                                                                                                                                                                                              | <b>Page</b> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| <ul style="list-style-type: none"> <li>Added <i>Applications</i>, <i>Package Information</i> table, <i>Pin Functions</i> table, <i>ESD Ratings</i> table, <i>Thermal Information</i> table, <i>Device Functional Modes</i>, <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section.....</li> </ul> | <b>1</b>    |

## 5 Pin Configuration and Functions

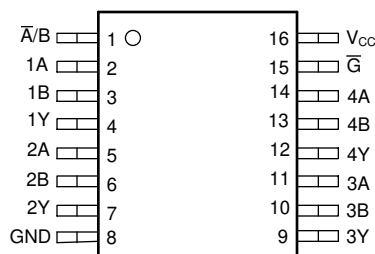


**Figure 5-1. D, DB, DGV, NS, or PW Package (Top View)**

**Table 5-1. Pin Functions**

| PIN |                 | I/O <sup>(1)</sup> | DESCRIPTION               |
|-----|-----------------|--------------------|---------------------------|
| NO. | NAME            |                    |                           |
| 1   | A/B             | I                  | Address select            |
| 2   | 1A              | I                  | Channel 1, data input A   |
| 3   | 1B              | I                  | Channel 1, data input B   |
| 4   | 1Y              | I                  | Channel 1, data output    |
| 5   | 2A              | O                  | Channel 2, data input A   |
| 6   | 2B              | O                  | Channel 2, data input B   |
| 7   | 2Y              | I                  | Channel 2, data output    |
| 8   | GND             | —                  | Ground                    |
| 9   | 3Y              | I                  | Channel 3, data output    |
| 10  | 3B              | I                  | Channel 3, data input B   |
| 11  | 3A              | I                  | Channel 3, data input A   |
| 12  | 4Y              | I                  | Channel 4, data output    |
| 13  | 4B              | I                  | Channel 4, data input B   |
| 14  | 4A              | I                  | Channel 4, data input A   |
| 15  | G               | I                  | Output strobe, active low |
| 16  | V <sub>CC</sub> | —                  | Positive supply           |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

|                  |                                                                    |                                       | MIN  | MAX                   | UNIT |
|------------------|--------------------------------------------------------------------|---------------------------------------|------|-----------------------|------|
| V <sub>CC</sub>  | Supply voltage                                                     |                                       | −0.5 | 7                     | V    |
| V <sub>I</sub>   | Input voltage <sup>1</sup>                                         |                                       | −0.5 | 7                     | V    |
| V <sub>O</sub>   | Output voltage range applied in high or low state <sup>1 (1)</sup> |                                       | −0.5 | V <sub>CC</sub> + 0.5 | V    |
| V <sub>O</sub>   | Output voltage range applied in power-off state <sup>1</sup>       |                                       | −0.5 | 7                     | V    |
| I <sub>IK</sub>  | Input clamp current                                                | V <sub>I</sub> < 0                    |      | −20                   | mA   |
| I <sub>OK</sub>  | Output clamp current                                               | V <sub>O</sub> < 0                    |      | −50                   | mA   |
| I <sub>O</sub>   | Continuous output current                                          | V <sub>O</sub> = 0 to V <sub>CC</sub> |      | ±25                   | mA   |
|                  | Continuous current through V <sub>CC</sub> or GND                  |                                       |      | ±50                   | mA   |
| T <sub>stg</sub> | Storage temperature                                                |                                       | −65  | 150                   | °C   |

(1) This value is limited to 5.5 V maximum.

Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

|             |                         | VALUE                                      | UNIT  |
|-------------|-------------------------|--------------------------------------------|-------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-Body Model (A114-A) <sup>(1)</sup>   | ±2000 |
|             |                         | Machine Model (A115-A)                     | ±200  |
|             |                         | Charged-Device Model (C101) <sup>(2)</sup> | ±1000 |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

## 6.3 Recommended Operating Conditions

|                 |                                    |                                  | MIN                 | MAX                 | UNIT |
|-----------------|------------------------------------|----------------------------------|---------------------|---------------------|------|
| V <sub>CC</sub> | Supply voltage                     |                                  | 2                   | 5.5                 | V    |
| V <sub>IH</sub> | High-level input voltage           | V <sub>CC</sub> = 2 V            | 1.5                 |                     | V    |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V | $V_{CC} \times 0.7$ |                     |      |
|                 |                                    | V <sub>CC</sub> = 3 V to 3.6 V   | $V_{CC} \times 0.7$ |                     |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V to 5.5 V | $V_{CC} \times 0.7$ |                     |      |
| V <sub>IL</sub> | Low-level input voltage            | V <sub>CC</sub> = 2 V            |                     | 0.5                 | V    |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V |                     | $V_{CC} \times 0.3$ |      |
|                 |                                    | V <sub>CC</sub> = 3 V to 3.6 V   |                     | $V_{CC} \times 0.3$ |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V to 5.5 V |                     | $V_{CC} \times 0.3$ |      |
| V <sub>I</sub>  | Input voltage                      |                                  | 0                   | 5.5                 | V    |
| V <sub>O</sub>  | Output voltage                     |                                  | 0                   | V <sub>CC</sub>     | V    |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 2 V            |                     | –50                 | μA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V |                     | –2                  |      |
|                 |                                    | V <sub>CC</sub> = 3 V to 3.6 V   |                     | 6                   |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V to 5.5 V |                     | –12                 |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 2 V            |                     | 50                  | μA   |
|                 |                                    | V <sub>CC</sub> = 2.3 V to 2.7 V |                     | 2                   |      |
|                 |                                    | V <sub>CC</sub> = 3 V to 3.6 V   |                     | 6                   |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V to 5.5 V |                     | 12                  |      |
| Δt/Δv           | Input transition rise or fall rate | V <sub>CC</sub> = 2.3 V to 2.7 V | 0                   | 200                 | ns/V |
|                 |                                    | V <sub>CC</sub> = 3 V to 3.6 V   | 0                   | 100                 |      |
|                 |                                    | V <sub>CC</sub> = 4.5 V to 5.5 V | 0                   | 20                  |      |
| T <sub>A</sub>  | Operating free-air temperature     |                                  | –40                 | 85                  | °C   |

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                        | SN74LV157A |         |         |         |         | UNIT |
|-------------------------------|----------------------------------------|------------|---------|---------|---------|---------|------|
|                               |                                        | D          | DB      | DGV     | NS      | PW      |      |
|                               |                                        | 16 PINS    | 16 PINS | 16 PINS | 16 PINS | 16 PINS |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance | 73         | 82      | 120     | 64      | 108     | °C/W |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report ([SPRA953](#)).

## 6.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER       | TEST CONDITIONS          | V <sub>CC</sub> | MIN                  | TYP | MAX | UNIT |
|-----------------|--------------------------|-----------------|----------------------|-----|-----|------|
| V <sub>OH</sub> | I <sub>OH</sub> = –50 μA | 2 V to 5.5 V    | V <sub>CC</sub> –0.1 |     |     | V    |
|                 | I <sub>OH</sub> = –2 mA  | 2.3 V           | 2                    |     |     |      |
|                 | I <sub>OH</sub> = –6 mA  | 3 V             | 2.48                 |     |     |      |
|                 | I <sub>OH</sub> = –12 mA | 4.5 V           | 3.8                  |     |     |      |

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER        | TEST CONDITIONS                                             | V <sub>CC</sub> | MIN | TYP | MAX  | UNIT |
|------------------|-------------------------------------------------------------|-----------------|-----|-----|------|------|
| V <sub>OL</sub>  | I <sub>OL</sub> = 50 µA                                     | 2 V to 5.5 V    |     |     | 0.1  | V    |
|                  | I <sub>OL</sub> = 2 mA                                      | 2.3 V           |     |     | 0.4  |      |
|                  | I <sub>OL</sub> = 6 mA                                      | 3 V             |     |     | 0.44 |      |
|                  | I <sub>OL</sub> = 12 mA                                     | 4.5 V           |     |     | 0.55 |      |
| I <sub>I</sub>   | V <sub>I</sub> = 5.5 V or GND                               | 0 to 5.5 V      |     |     | ± 1  | µA   |
| I <sub>CC</sub>  | V <sub>I</sub> = V <sub>CC</sub> or GND, I <sub>O</sub> = 0 | 5.5 V           |     |     | 20   | µA   |
| I <sub>off</sub> | V <sub>I</sub> or V <sub>O</sub> = 0 to 5.5 V               | 0               |     |     | 5    | µA   |
| C <sub>i</sub>   | V <sub>I</sub> = V <sub>CC</sub> or GND                     | 3.3 V           |     | 1.7 |      | pF   |

## 6.6 Switching Characteristics, V<sub>CC</sub> = 2.5 V ± 0.2 V

over recommended operating free-air temperature range, V<sub>CC</sub> = 2.5 V ± 0.2 V (unless otherwise noted) (see [Load Circuit and Voltage Waveforms](#))

| PARAMETER       | FROM (INPUT)     | TO (OUTPUT) | LOAD CAPACITANCE       | TA = 25°C |                  |                   | SN74LV157A |      | UNIT |
|-----------------|------------------|-------------|------------------------|-----------|------------------|-------------------|------------|------|------|
|                 |                  |             |                        | MIN       | TYP              | MAX               | MIN        | MAX  |      |
| t <sub>pd</sub> | A or B           | Y           | C <sup>L</sup> = 15 pF |           | 7.4 <sup>1</sup> | 15.9 <sup>1</sup> | 1          | 19.5 | ns   |
|                 | $\overline{A}/B$ | Y           |                        |           | 7.9 <sup>1</sup> | 19.4 <sup>1</sup> | 1          | 23.5 |      |
|                 | $\overline{G}$   | Y           |                        |           | 7.8 <sup>1</sup> | 19.8 <sup>1</sup> | 1          | 24   |      |
| t <sub>pd</sub> | A or B           | Y           | C <sub>L</sub> = 50 pF |           | 9.4              | 18.8              | 1          | 22   | ns   |
|                 | $\overline{A}$   | Y           |                        |           | 10.8             | 22.3              | 1          | 26   |      |
|                 | $\overline{G}$   | Y           |                        |           | 9.6              | 22.7              | 1          | 26.5 |      |

- On products compliant to MIL-PRF-38535, this parameter is not production tested.

## 6.7 Switching Characteristics, V<sub>CC</sub> = 3.3 V ± 0.3 V

over recommended operating free-air temperature range, V<sub>CC</sub> = 3.3 V ± 0.3 V (unless otherwise noted) (see [Load Circuit and Voltage Waveforms](#))

| PARAMETER       | FROM (INPUT)     | TO (OUTPUT) | LOAD CAPACITANCE       | TA = 25°C |                  |                   | SN74LV157A |      | UNIT |
|-----------------|------------------|-------------|------------------------|-----------|------------------|-------------------|------------|------|------|
|                 |                  |             |                        | MIN       | TYP              | MAX               | MIN        | MAX  |      |
| t <sub>pd</sub> | A or B           | Y           | C <sup>L</sup> = 15 pF |           | 5.2 <sup>1</sup> | 9.7 <sup>1</sup>  | 1          | 11.5 | ns   |
|                 | $\overline{A}/B$ | Y           |                        |           | 5.8 <sup>1</sup> | 13.2 <sup>1</sup> | 1          | 15.5 |      |
|                 | $\overline{G}$   | Y           |                        |           | 5.5 <sup>1</sup> | 13.6 <sup>1</sup> | 1          | 16   |      |
| t <sub>pd</sub> | A or B           | Y           | C <sub>L</sub> = 50 pF |           | 6.7              | 13.2              | 1          | 15   | ns   |
|                 | $\overline{A}$   | Y           |                        |           | 7.6              | 16.7              | 1          | 19   |      |
|                 | $\overline{G}$   | Y           |                        |           | 7                | 17.1              | 1          | 19.5 |      |

- On products compliant to MIL-PRF-38535, this parameter is not production tested.

## 6.8 Switching Characteristics, V<sub>CC</sub> = 5 V ± 0.5 V

over recommended operating free-air temperature range, V<sub>CC</sub> = 5 V ± 0.5 V (unless otherwise noted) (see [Load Circuit and Voltage Waveforms](#))

| PARAMETER       | FROM (INPUT)     | TO (OUTPUT) | LOAD CAPACITANCE       | TA = 25°C |                  |                  | SN74LV157A |     | UNIT |
|-----------------|------------------|-------------|------------------------|-----------|------------------|------------------|------------|-----|------|
|                 |                  |             |                        | MIN       | TYP              | MAX              | MIN        | MAX |      |
| t <sub>pd</sub> | A or B           | Y           | C <sup>L</sup> = 15 pF |           | 3.6 <sup>1</sup> | 6.4 <sup>1</sup> | 1          | 7.5 | ns   |
|                 | $\overline{A}/B$ | Y           |                        |           | 4.1 <sup>1</sup> | 8.1 <sup>1</sup> | 1          | 9.5 |      |
|                 | $\overline{G}$   | Y           |                        |           | 3.8 <sup>1</sup> | 8.6 <sup>1</sup> | 1          | 10  |      |

over recommended operating free-air temperature range,  $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$  (unless otherwise noted) (see [Load Circuit and Voltage Waveforms](#))

| PARAMETER       | FROM<br>(INPUT) | TO<br>(OUTPUT) | LOAD CAPACITANCE       | TA = 25°C |     |      | SN74LV157A |      | UNIT |
|-----------------|-----------------|----------------|------------------------|-----------|-----|------|------------|------|------|
|                 |                 |                |                        | MIN       | TYP | MAX  | MIN        | MAX  |      |
| t <sub>pd</sub> | A or B          | Y              | C <sub>L</sub> = 50 pF |           | 4.8 | 8.4  | 1          | 9.5  | ns   |
|                 | $\bar{A}$       | Y              |                        |           | 5.4 | 10.1 | 1          | 11.5 |      |
|                 | $\bar{G}$       | Y              |                        |           | 5   | 10.6 | 1          | 12   |      |

1. On products compliant to MIL-PRF-38535, this parameter is not production tested.

## 6.9 Noise Characteristics

$V_{CC} = 3.3\text{ V}$ ,  $C_L = 50\text{ pF}$ ,  $T_A = 25^\circ\text{C}$ <sup>(1)</sup>

| PARAMETER          |                                               | MIN  | TYP   | MAX  | UNIT |
|--------------------|-----------------------------------------------|------|-------|------|------|
| V <sub>OL(P)</sub> | Quiet output, maximum dynamic V <sub>OL</sub> |      | 0.3   | 0.8  | V    |
| V <sub>OL(V)</sub> | Quiet output, minimum dynamic V <sub>OL</sub> |      | – 0.1 | –0.8 | V    |
| V <sub>OH(V)</sub> | Quiet output, minimum dynamic V <sub>OH</sub> |      | 3.2   |      | V    |
| V <sub>IH(D)</sub> | High-level dynamic input voltage              | 2.31 |       |      | V    |
| V <sub>IL(D)</sub> | Low-level dynamic input voltage               |      |       | 0.99 | V    |


(1) Characteristics are for surface-mount packages only.

## 6.10 Operating Characteristics

T<sub>A</sub> = 25°C





| PARAMETER       |                               | TEST CONDITIONS                      | V <sub>CC</sub> | TYP          | UNIT |
|-----------------|-------------------------------|--------------------------------------|-----------------|--------------|------|
| C <sub>pd</sub> | Power dissipation capacitance | C <sub>L</sub> = 50 pF<br>f = 10 MHz | 3.3 V<br>5 V    | 12.1<br>13.1 | pF   |

## 7 Parameter Measurement Information

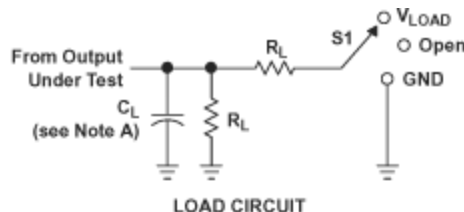

| TEST              | S1         |
|-------------------|------------|
| $t_{PLH}/t_{PHL}$ | Open       |
| $t_{PLZ}/t_{PZL}$ | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$ | GND        |

| $V_{CC}$          | INPUTS |               | $V_M$ | $V_{LOAD}$ | $C_L$ | $R_L$        | $V_{\Delta}$ |
|-------------------|--------|---------------|-------|------------|-------|--------------|--------------|
|                   | $V_I$  | $t_r/t_f$     |       |            |       |              |              |
| 2.7 V             | 2.7 V  | $\leq 2.5$ ns | 1.5 V | 6 V        | 50 pF | 500 $\Omega$ | 0.3 V        |
| 3.3 V $\pm$ 0.3 V | 2.7 V  | $\leq 2.5$ ns | 1.5 V | 6 V        | 50 pF | 500 $\Omega$ | 0.3 V        |

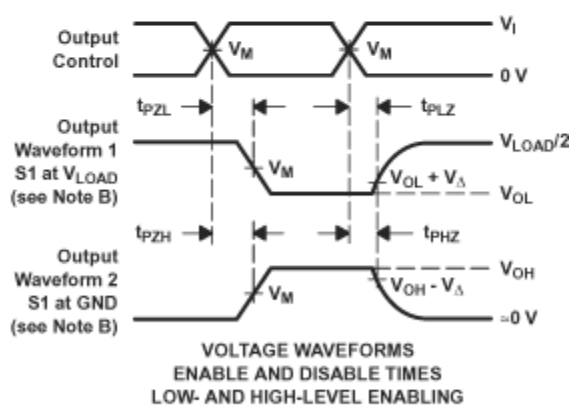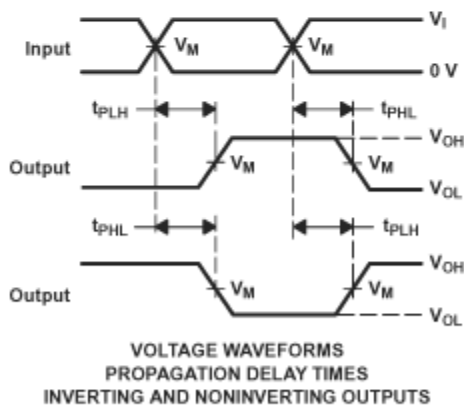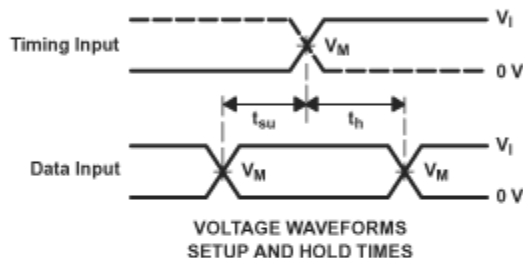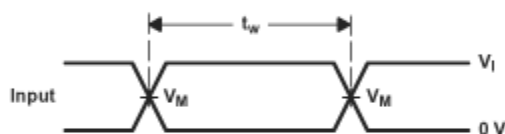

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.  
 C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ .  
 D. The outputs are measured one at a time, with one transition per measurement.  
 E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dL}$ .  
 F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{dH}$ .  
 G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .  
 H. All parameters and waveforms are not applicable to all devices.

## 8 Detailed Description

### 8.1 Overview

The 'LV157A devices contain inverters and drivers to supply full data selection to the four output gates. A separate strobe ( $\overline{G}$ ) input is provided. A 4-bit word is selected from one of two sources and is routed to the four outputs. The 'LV157A devices present true data.

### 8.2 Functional Block Diagram

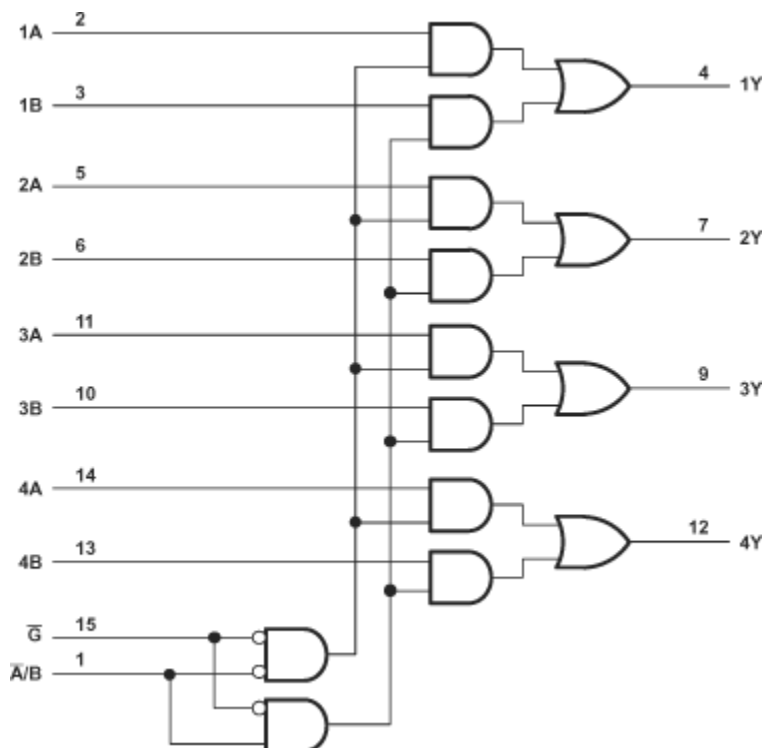


Figure 8-1. Logic Diagram (Positive Logic)

### 8.3 Device Functional Modes

Table 8-1. Function Table

| INPUTS <sup>(1)</sup> |                         | DATA |   | OUTPUT Y |
|-----------------------|-------------------------|------|---|----------|
| $\overline{G}$        | SELECT $\overline{A/B}$ | A    | B |          |
| H                     | X                       | X    | X | L        |
| L                     | L                       | L    | X | L        |
| L                     | L                       | H    | X | H        |
| L                     | H                       | X    | L | L        |
| L                     | H                       | X    | H | H        |

(1) H = High Voltage Level, L = Low Voltage Level, X = Do not Care, Z = High Impedance

## 9 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 9.1 Power Supply Recommendations

The power supply can be any voltage between the min and max supply voltage rating located in [Section 6.3](#).

Each  $V_{CC}$  terminal should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, a 0.1  $\mu\text{F}$  capacitor is recommended. If there are multiple  $V_{CC}$  terminals then 0.01  $\mu\text{F}$  or 0.022  $\mu\text{F}$  capacitors are recommended for each power terminal. It is ok to parallel multiple bypass capacitors to reject different frequencies of noise. 0.1  $\mu\text{F}$  and 1.0  $\mu\text{F}$  capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power terminal as possible for the best results.

### 9.2 Layout

#### 9.2.1 Layout Guidelines

When using multiple bit logic devices, inputs should not float. In many cases, functions or parts of functions of digital logic devices are unused. Some examples are when only two inputs of a triple-input AND gate are used, or when only 3 of the 4-buffer gates are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or  $V_{CC}$ , whichever makes more sense for the logic function or is more convenient.

##### 9.2.1.1 Layout Example

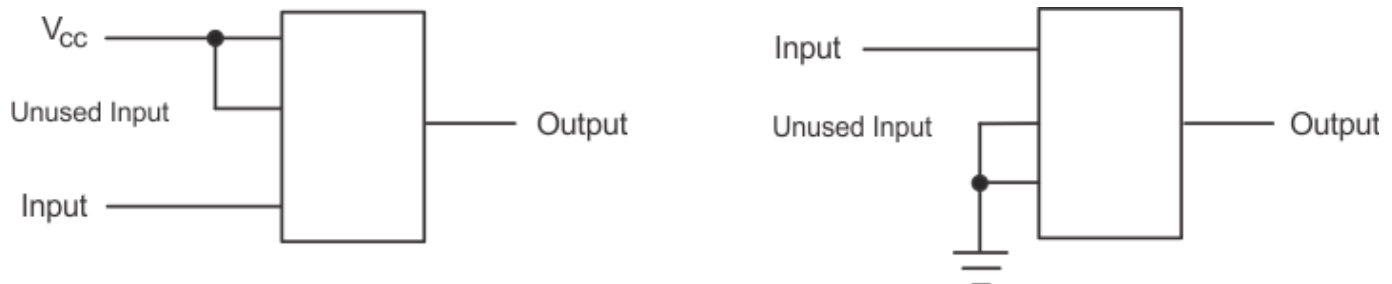


Figure 9-1. Layout Diagram

## 10 Device and Documentation Support

### 10.1 Documentation Support

#### 10.1.1 Related Documentation

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 10-1. Related Links**

| PARTS      | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| SN74LV157A | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 10.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

#### Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 10.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">SN74LV157AD</a>     | Obsolete      | Production           | SOIC (D)   16    | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | LV157A              |
| <a href="#">SN74LV157ADBR</a>   | Last Time Buy | Production           | SSOP (DB)   16   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| SN74LV157ADBR.A                 | Last Time Buy | Production           | SSOP (DB)   16   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| <a href="#">SN74LV157ADGVR</a>  | Active        | Production           | TVSOP (DGV)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| SN74LV157ADGVR.A                | Active        | Production           | TVSOP (DGV)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| <a href="#">SN74LV157ADR</a>    | Active        | Production           | SOIC (D)   16    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| SN74LV157ADR.A                  | Active        | Production           | SOIC (D)   16    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| <a href="#">SN74LV157ANSR</a>   | Active        | Production           | SOP (NS)   16    | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 74LV157A            |
| SN74LV157ANSR.A                 | Active        | Production           | SOP (NS)   16    | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | 74LV157A            |
| <a href="#">SN74LV157APW</a>    | Obsolete      | Production           | TSSOP (PW)   16  | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | LV157A              |
| <a href="#">SN74LV157APWR</a>   | Active        | Production           | TSSOP (PW)   16  | 2000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| SN74LV157APWR.A                 | Active        | Production           | TSSOP (PW)   16  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |
| <a href="#">SN74LV157APWRG4</a> | Active        | Production           | TSSOP (PW)   16  | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | LV157A              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

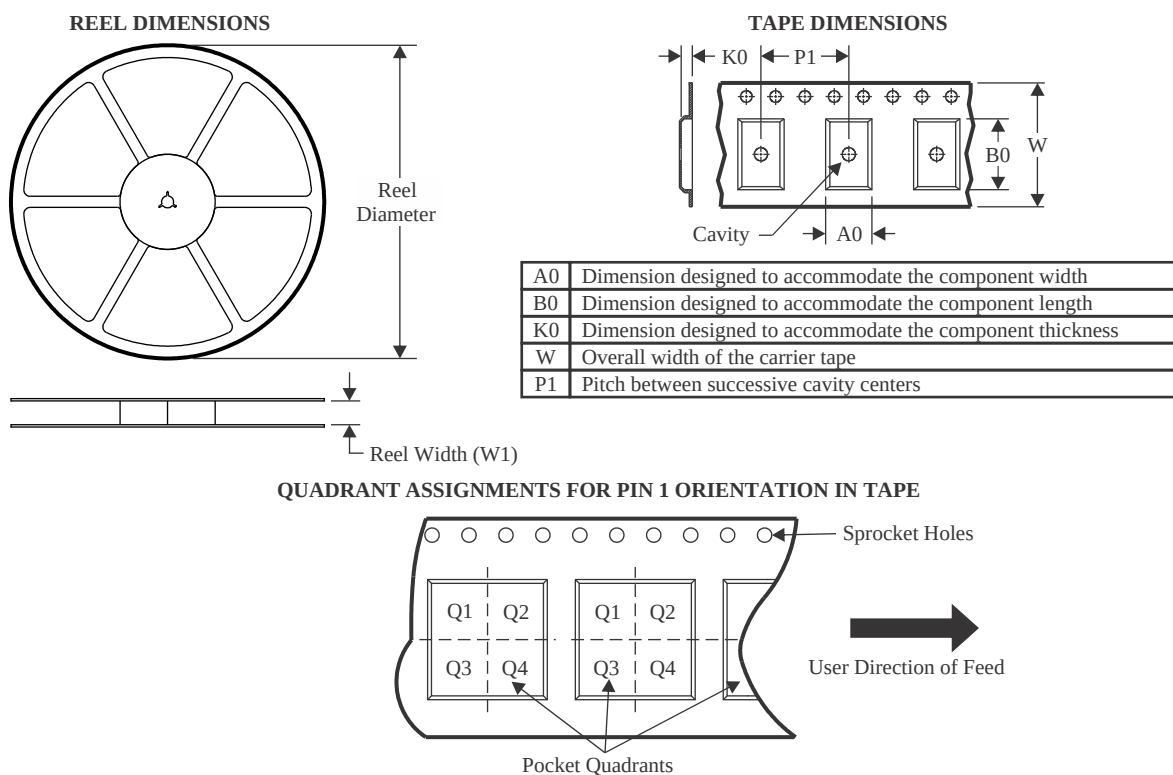

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LV157ADBR   | SSOP         | DB              | 16   | 2000 | 330.0              | 16.4               | 8.35    | 6.6     | 2.4     | 12.0    | 16.0   | Q1            |
| SN74LV157ADGVR  | TVSOP        | DGV             | 16   | 2000 | 330.0              | 12.4               | 6.8     | 4.0     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74LV157ADR    | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |
| SN74LV157ADR    | SOIC         | D               | 16   | 2500 | 330.0              | 12.4               | 3.75    | 3.75    | 1.15    | 8.0     | 12.0   | Q1            |
| SN74LV157ANSR   | SOP          | NS              | 16   | 2000 | 330.0              | 16.4               | 8.1     | 10.4    | 2.5     | 12.0    | 16.0   | Q1            |
| SN74LV157APWR   | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| SN74LV157APWRG4 | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

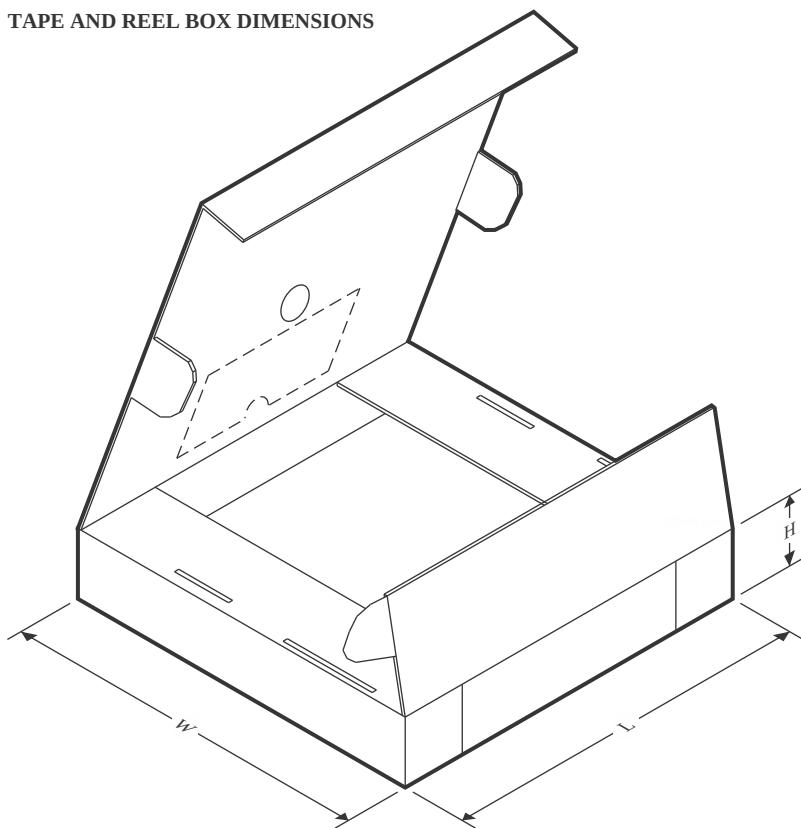


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LV157ADBR   | SSOP         | DB              | 16   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LV157ADGVR  | TVSOP        | DGV             | 16   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LV157ADR    | SOIC         | D               | 16   | 2500 | 340.5       | 336.1      | 32.0        |
| SN74LV157ADR    | SOIC         | D               | 16   | 2500 | 340.5       | 336.1      | 32.0        |
| SN74LV157ANSR   | SOP          | NS              | 16   | 2000 | 353.0       | 353.0      | 32.0        |
| SN74LV157APWR   | TSSOP        | PW              | 16   | 2000 | 356.0       | 356.0      | 35.0        |
| SN74LV157APWRG4 | TSSOP        | PW              | 16   | 2000 | 356.0       | 356.0      | 35.0        |



## DGV (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

24 PINS SHOWN

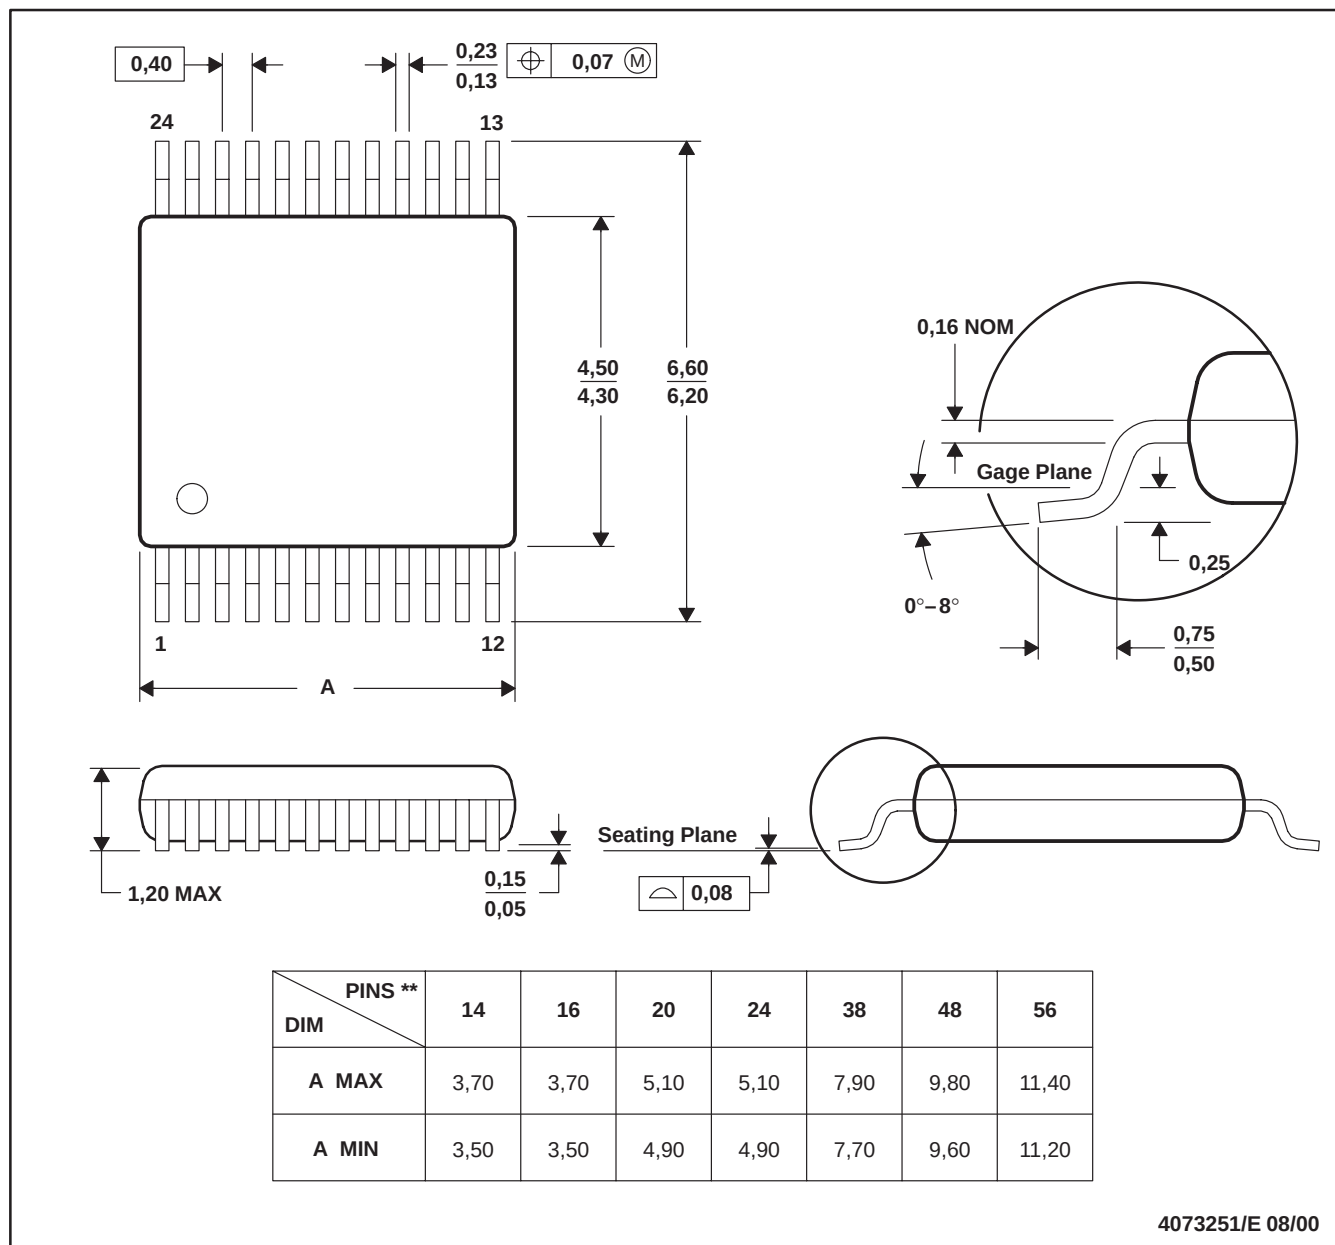

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.  
 D. Falls within JEDEC: 24/48 Pins – MO-153  
 14/16/20/56 Pins – MO-194

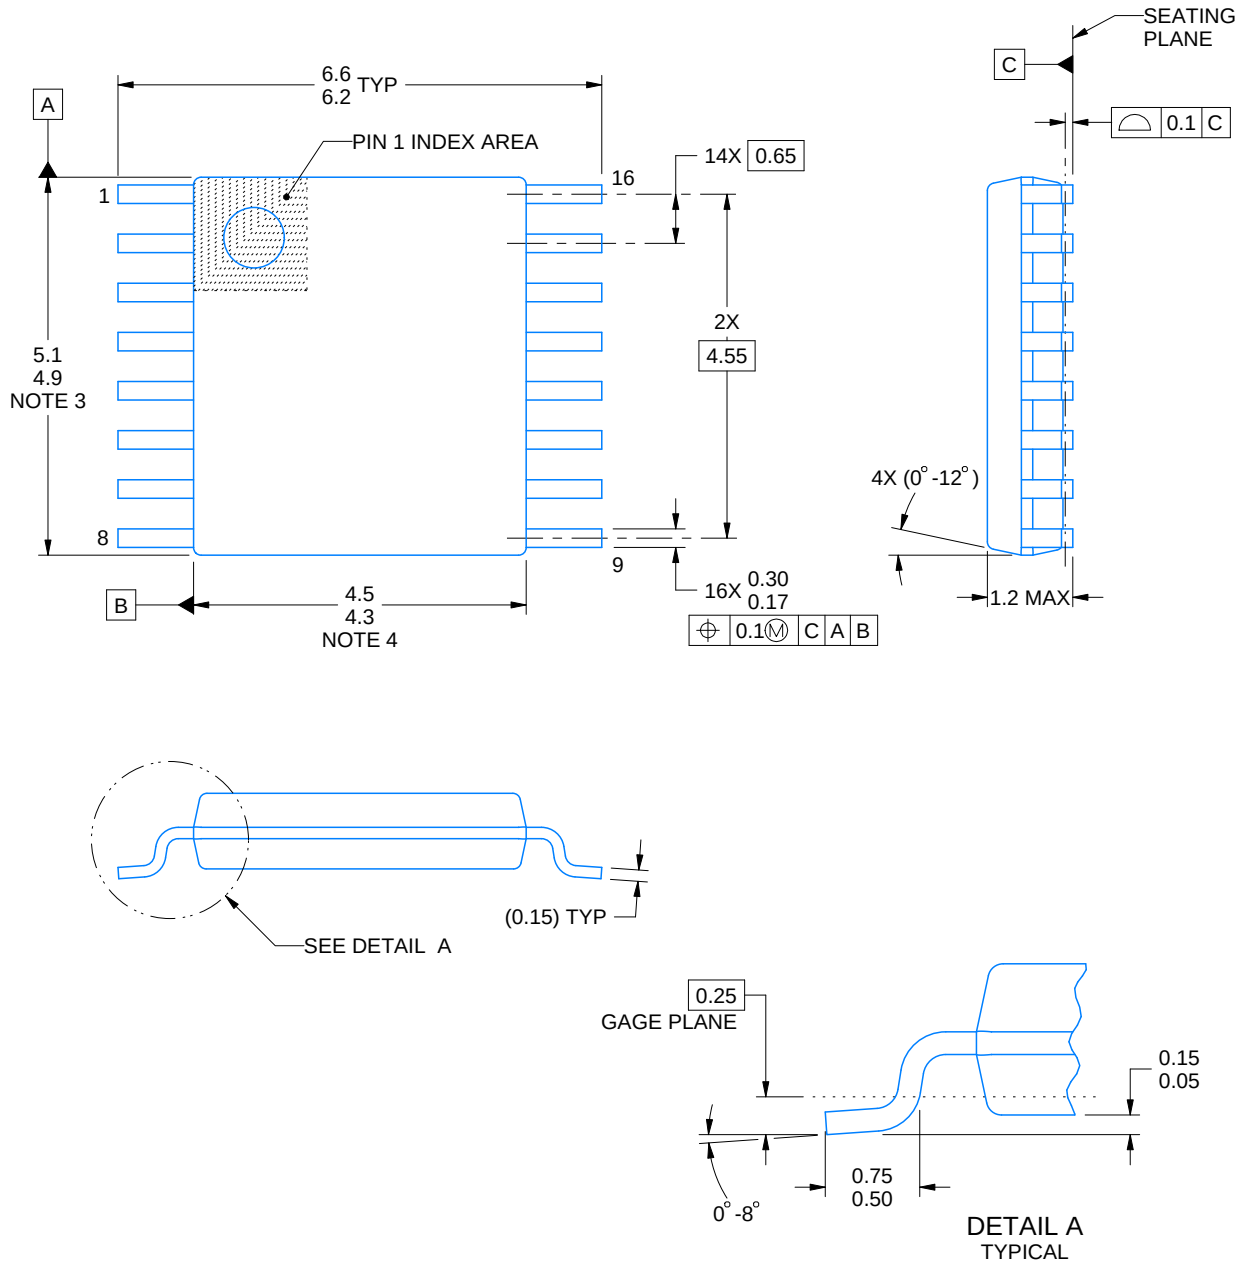

4220204/B 12/2023

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT


PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

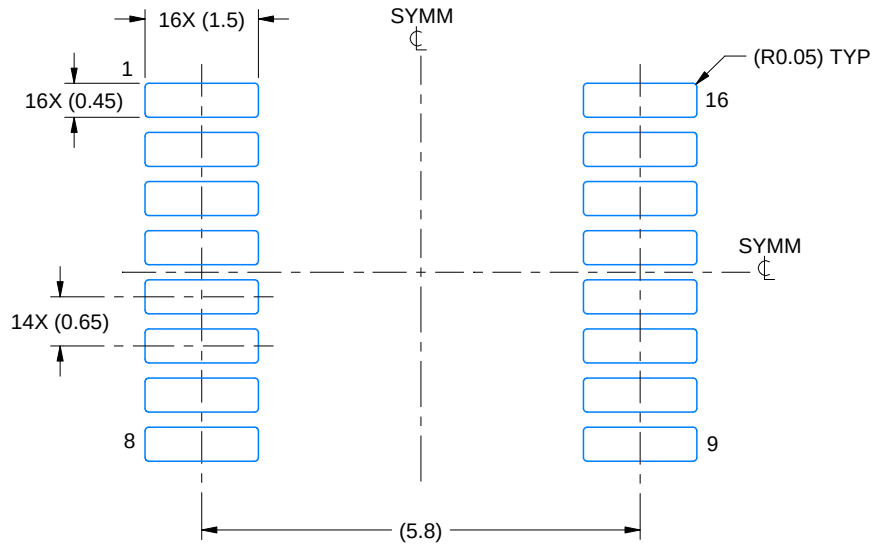

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

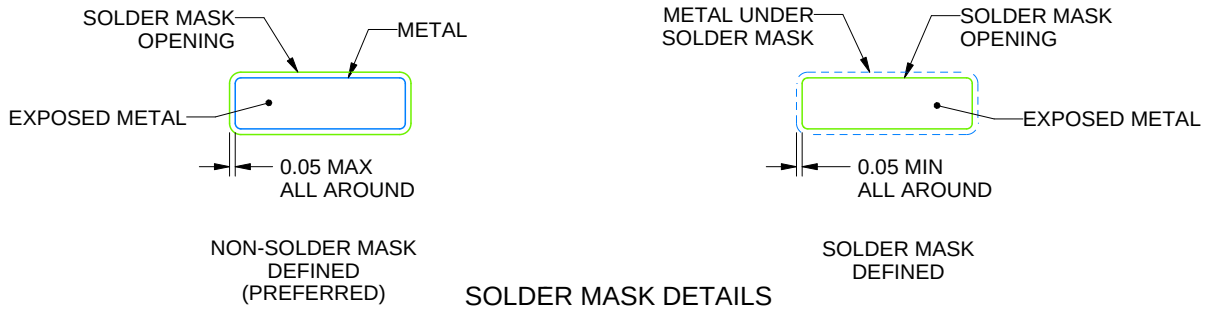

4220204/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

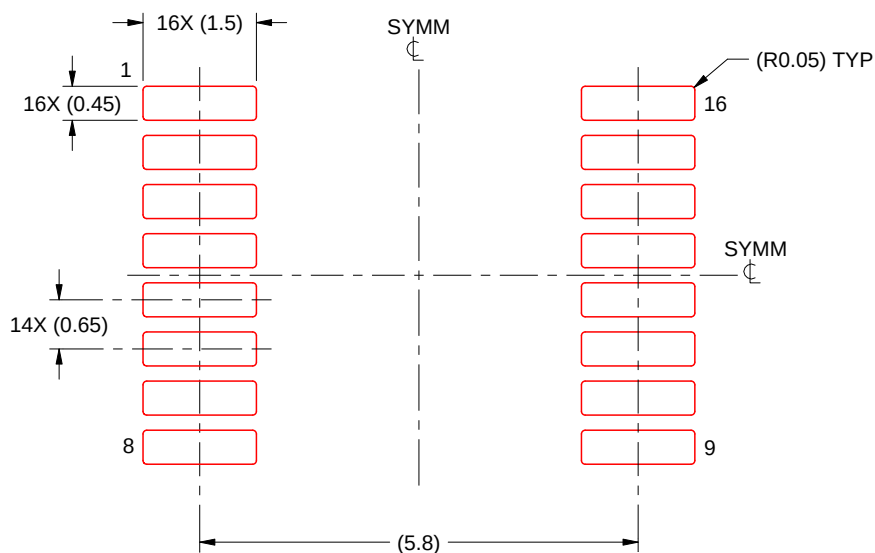


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.




# PACKAGE OUTLINE

NS0016A

SOP - 2.00 mm max height

SOP

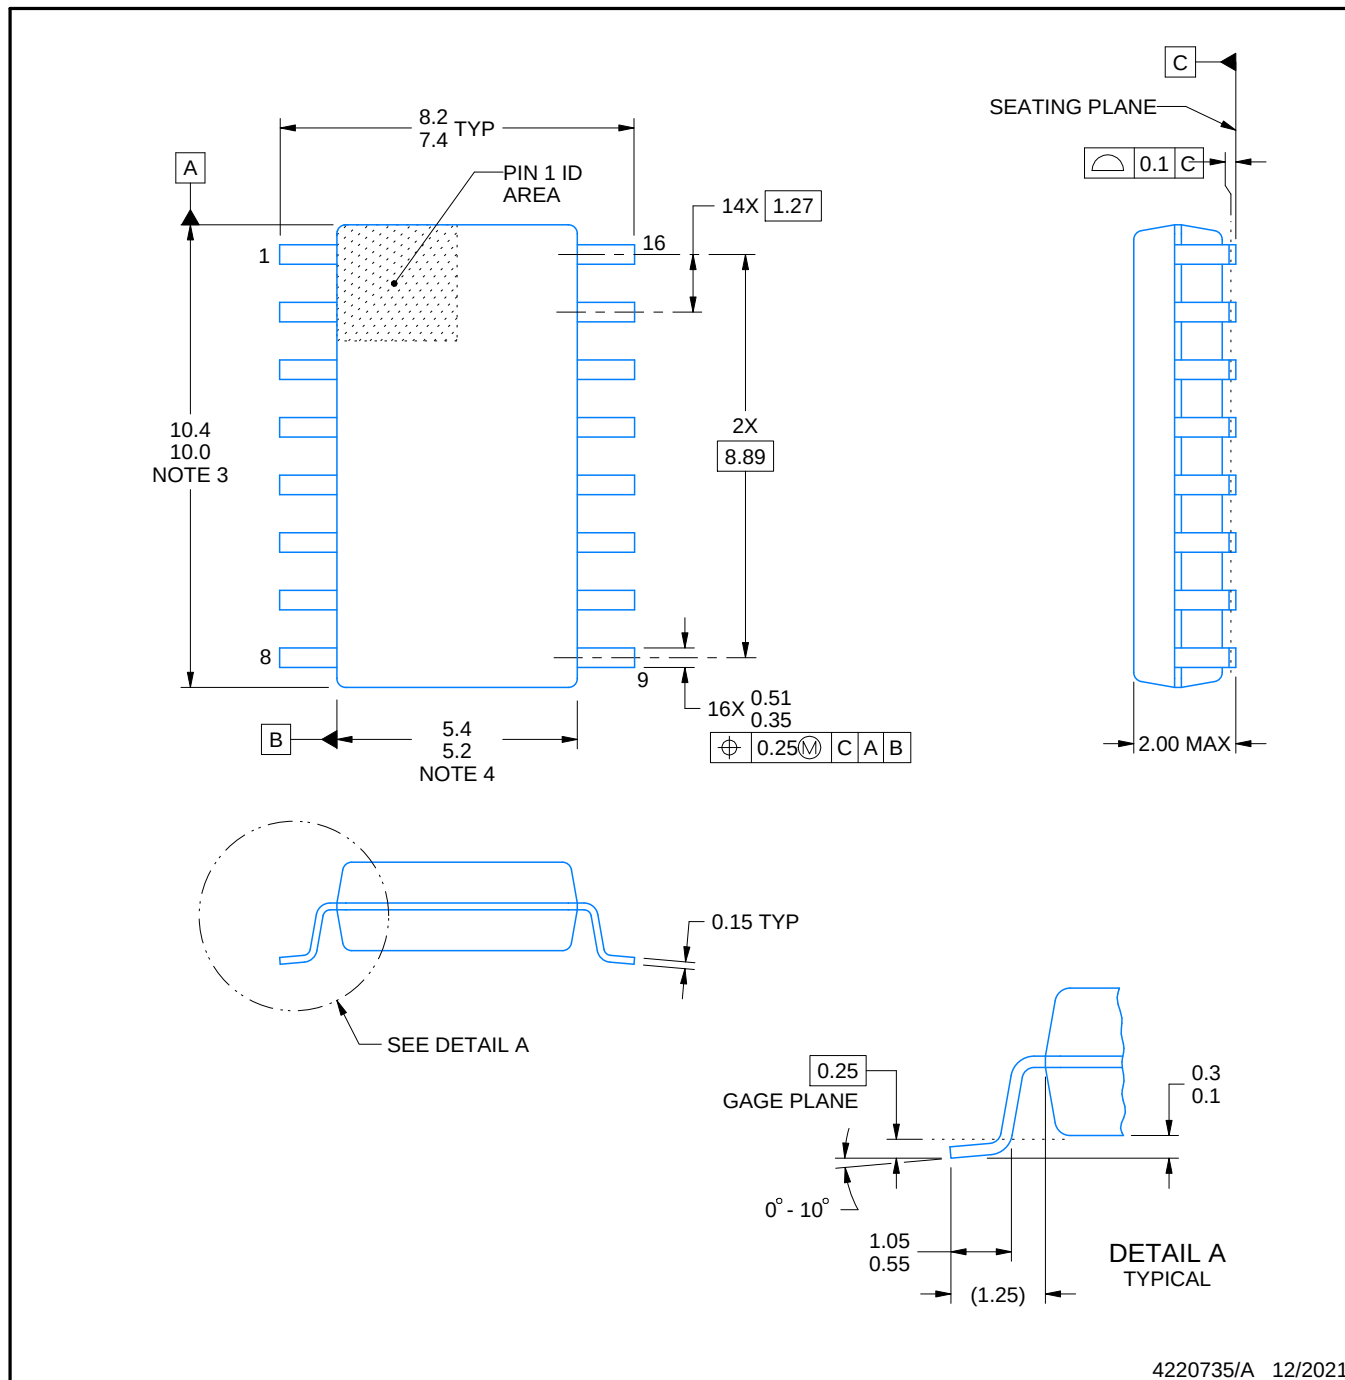

4220735/A 12/2021

## NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.

# EXAMPLE BOARD LAYOUT

NS0016A

SOP - 2.00 mm max height

SOP

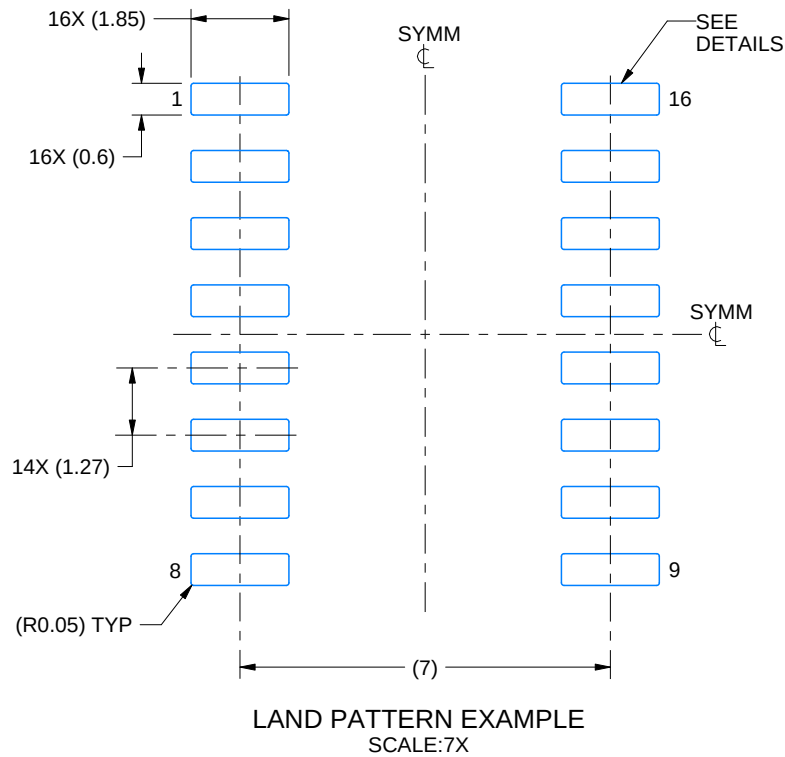


4220735/A 12/2021

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

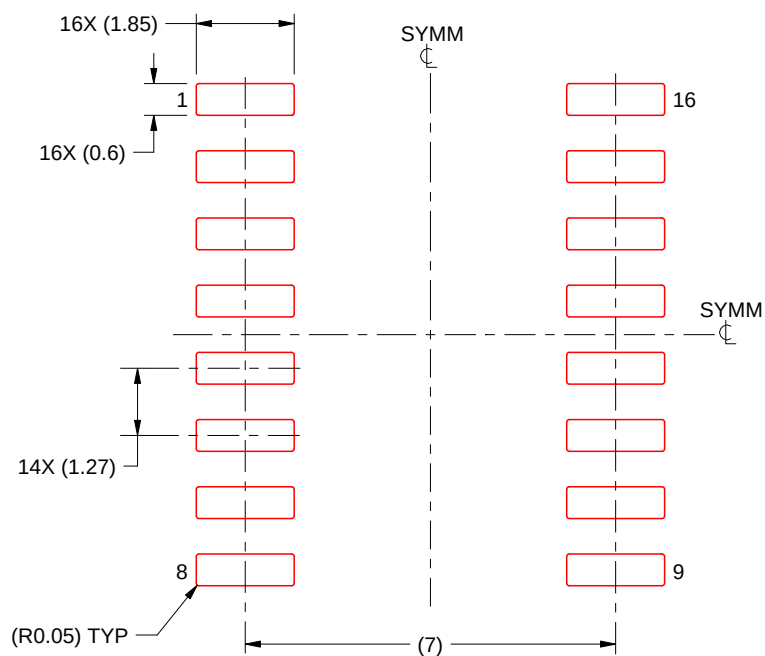

SOLDER PASTE EXAMPLE  
 BASED ON 0.125 mm THICK STENCIL  
 SCALE:7X


4220735/A 12/2021

NOTES: (continued)


7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE

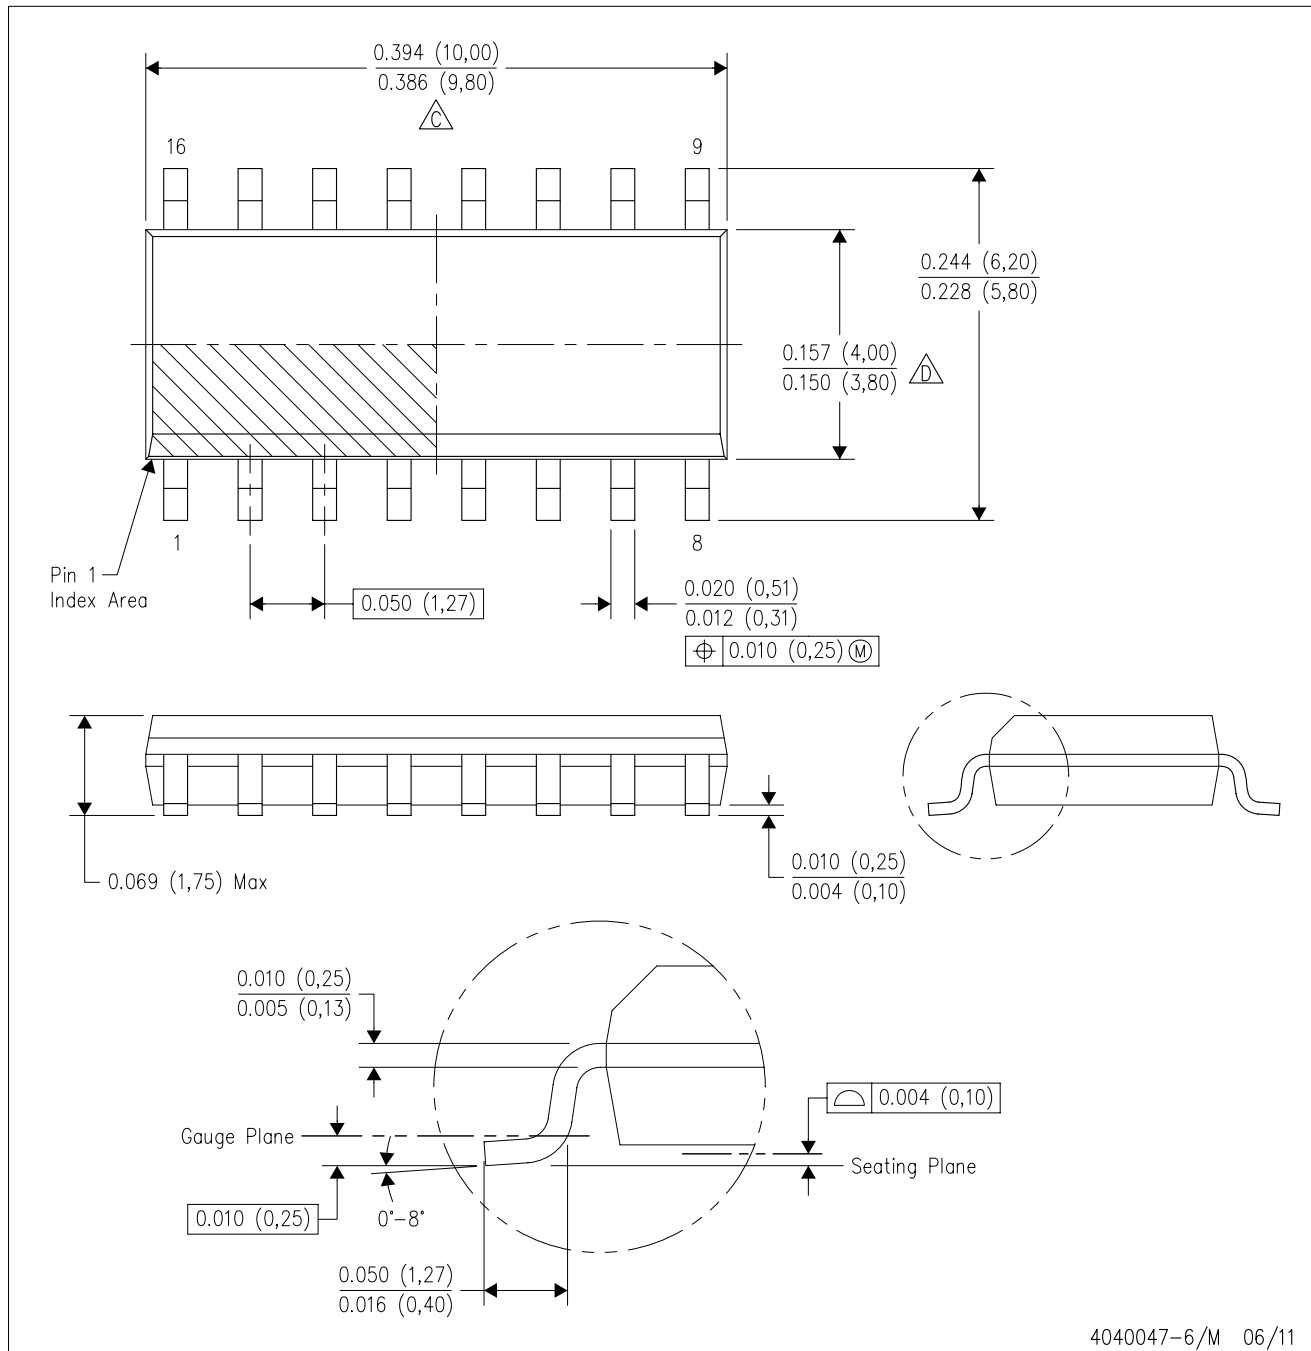

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AC.

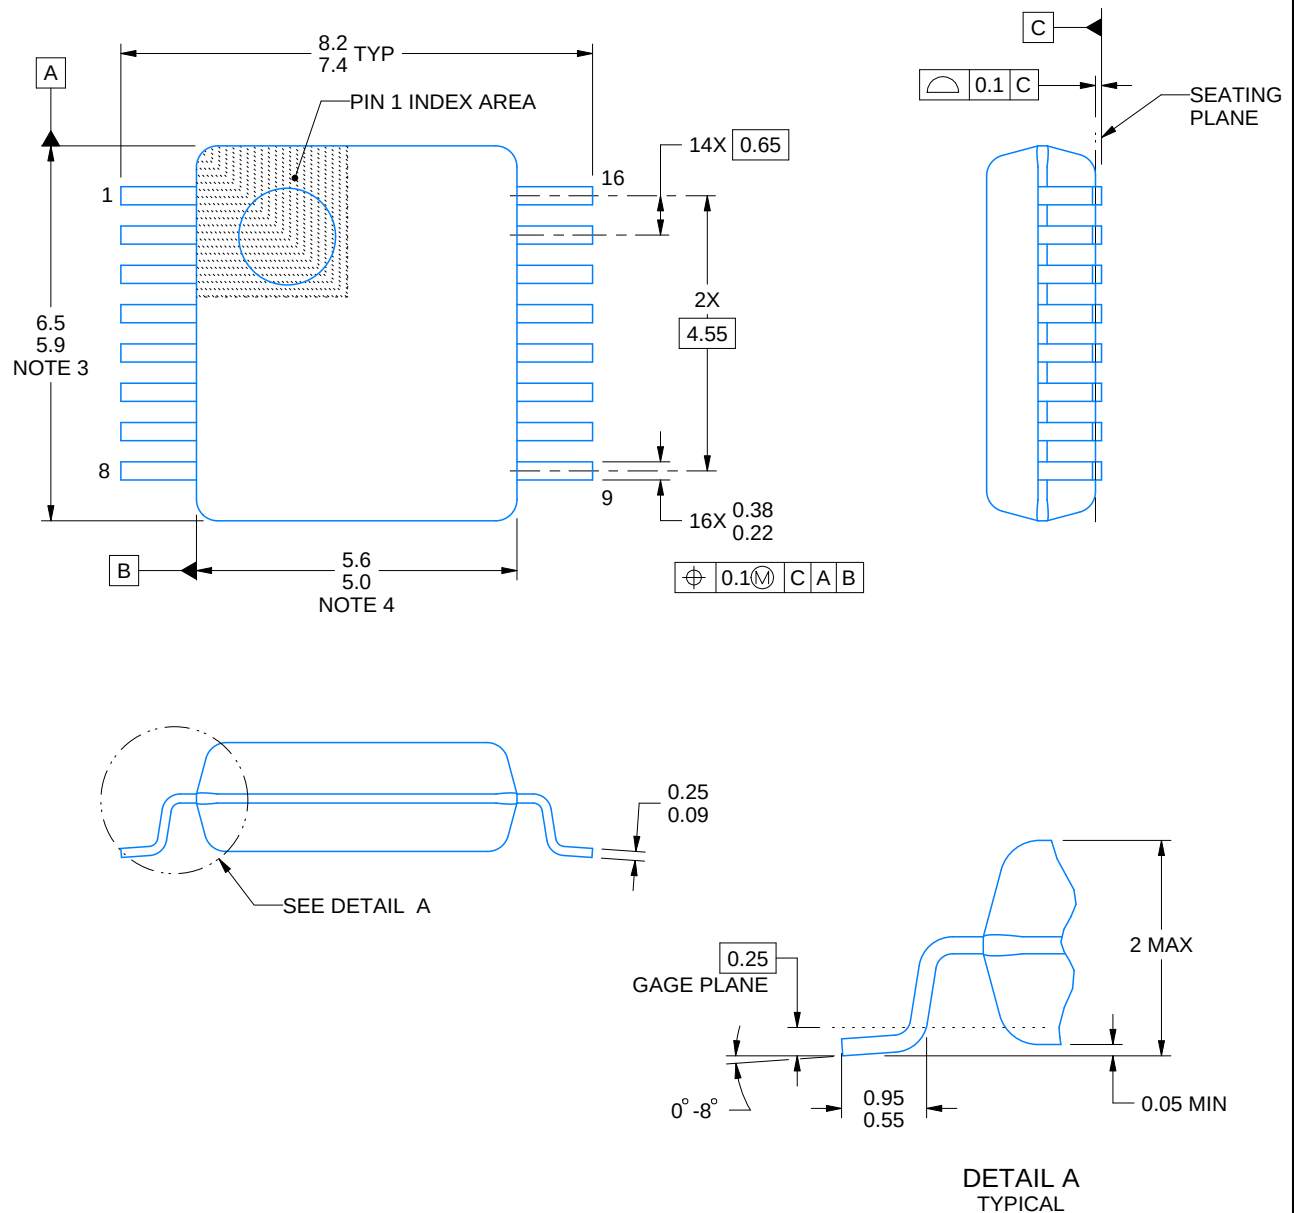

4220763/A 05/2022

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-150.

# EXAMPLE BOARD LAYOUT



DB0016A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

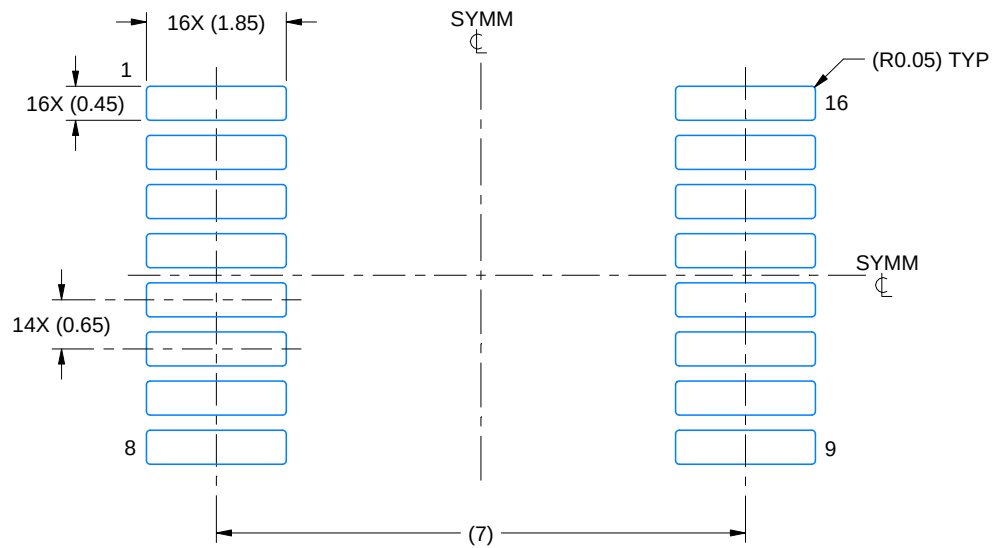

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

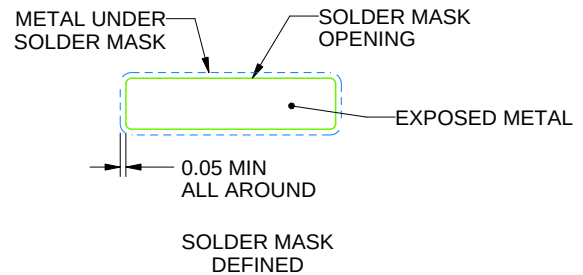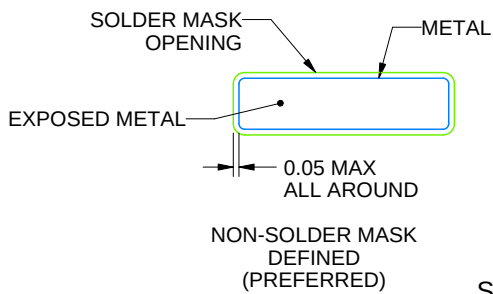

SOLDER MASK DETAILS

4220763/A 05/2022

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.


6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DB0016A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

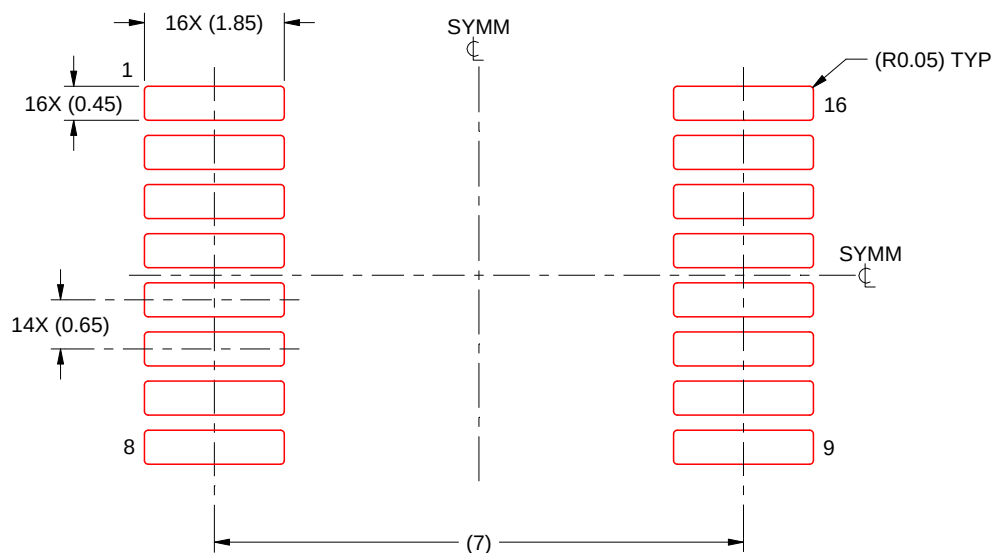

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220763/A 05/2022

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025