

## TUSB8043 Four-Port USB 3.1 Gen1 Hub

### 1 Features

- Four Port USB 3.1 Gen1 Hub
- USB 2.0 Hub Features
  - Multi Transaction Translator (MTT) Hub: Four Transaction Translators
  - Two Asynchronous Endpoint Buffers Per Transaction Translator
- Supports Battery Charging:
  - Supports D+/D- Divider Charging Port (ACP1, ACP2, and ACP3) when the Upstream Port is Unconnected or not Configured
  - Supports Automatic Mode for Transition Between DCP or ACP Modes When the Upstream Port is Unconnected
  - Supports Galaxy Charging
  - CDP Mode (Upstream Port Connected)
  - DCP Mode (Upstream Port Unconnected)
  - DCP Mode Complies with Chinese Telecommunications Industry Standard YD/T 1591-2009
- Supports Operation as a USB 3.1 Gen1 or USB 2.0 Compound Device
- Per Port or Ganged Power Switching and Over-Current Notification Inputs
- Supports Four External Downstream Ports plus internal USB 2.0-Only Port for USB HID to I<sup>2</sup>C Functionality
- Internal Downstream Port for I<sup>2</sup>C Control Through USB HID Supports High-Speed, Full-Speed Operation. Its Speed Matches That of the Upstream Port.
- Supports Vendor Requests to Read and Write I<sup>2</sup>C and EEPROM Read at 100 k and 400 k (Default)
- I<sup>2</sup>C Master Supports Clock Stretching
- OTP ROM, Serial EEPROM or I<sup>2</sup>C/SMBus Slave Interface for Custom Configurations:
  - VID and PID
  - Port Customizations
  - Manufacturer and Product Strings (not by OTP ROM)
  - Serial Number (not by OTP ROM)
- Application Feature Selection Using Pin Selection or EEPROM or I<sup>2</sup>C/SMBus Slave Interface
- Provides 128-Bit Universally Unique Identifier (UUID)
- Supports On-Board and In-System EEPROM Programming Via the USB 2.0 Upstream Port

- Single Clock Input, 24-MHz Crystal or Oscillator
- Downstream Ports Configurable to USB2.0 Only
- 64-Pin QFN Package (RGC)

### 2 Applications

Computer Systems, Docking Stations, Monitors, Set-Top Boxes

### 3 Description


The TUSB8043 is a four-port USB 3.1 Gen1 hub. It provides simultaneous SuperSpeed USB and high-speed/full-speed connections on the upstream port and provides SuperSpeed USB, high-speed, full-speed, or low-speed connections on the downstream ports. When the upstream port is connected to an electrical environment that only supports high-speed or full-speed/low-speed connections, SuperSpeed USB connectivity is disabled on the downstream ports.

#### Device Information<sup>(1)</sup>

| PART NUMBER | PACKAGE   | BODY SIZE (NOM)   |
|-------------|-----------|-------------------|
| TUSB8043    | VQFN (64) | 9.00 mm × 9.00 mm |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

#### Diagram

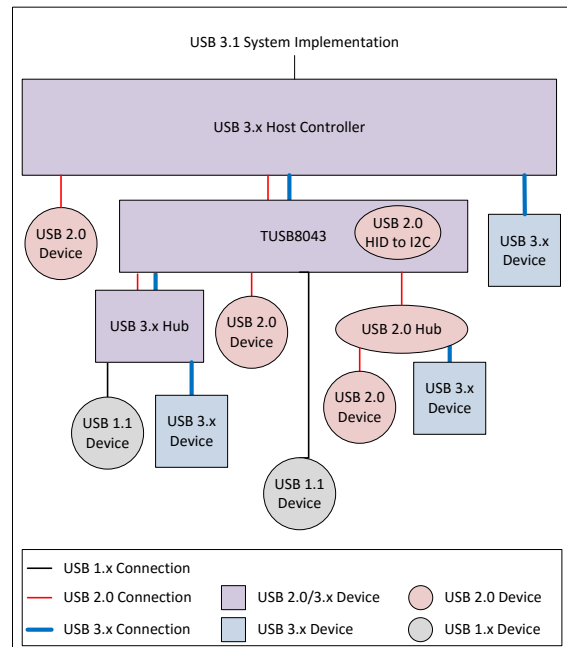

## Table of Contents

|                                                 |           |                                                                  |           |
|-------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                         | <b>1</b>  | 8.5 Register Maps .....                                          | <b>23</b> |
| <b>2 Applications</b> .....                     | <b>1</b>  | <b>9 Applications and Implementation</b> .....                   | <b>38</b> |
| <b>3 Description</b> .....                      | <b>1</b>  | 9.1 Application Information .....                                | <b>38</b> |
| <b>4 Revision History</b> .....                 | <b>2</b>  | 9.2 Typical Application .....                                    | <b>38</b> |
| <b>5 Description (Continued)</b> .....          | <b>3</b>  | <b>10 Power Supply Recommendations</b> .....                     | <b>47</b> |
| <b>6 Pin Configuration and Functions</b> .....  | <b>4</b>  | 10.1 TUSB8043 Power Supply .....                                 | <b>47</b> |
| <b>7 Specifications</b> .....                   | <b>9</b>  | 10.2 Downstream Port Power .....                                 | <b>47</b> |
| 7.1 Absolute Maximum Ratings .....              | <b>9</b>  | 10.3 Ground .....                                                | <b>47</b> |
| 7.2 ESD Ratings .....                           | <b>9</b>  | <b>11 Layout</b> .....                                           | <b>48</b> |
| 7.3 Recommended Operating Conditions .....      | <b>9</b>  | 11.1 Layout Guidelines .....                                     | <b>48</b> |
| 7.4 Thermal Information .....                   | <b>9</b>  | 11.2 Layout Examples .....                                       | <b>49</b> |
| 7.5 Electrical Characteristics, 3.3-V I/O ..... | <b>10</b> | <b>12 Device and Documentation Support</b> .....                 | <b>51</b> |
| 7.6 Timing Requirements, Power-Up .....         | <b>10</b> | 12.1 Receiving Notification of Documentation Updates .....       | <b>51</b> |
| 7.7 Hub Input Supply Current .....              | <b>11</b> | 12.2 Community Resources .....                                   | <b>51</b> |
| <b>8 Detailed Description</b> .....             | <b>12</b> | 12.3 Trademarks .....                                            | <b>51</b> |
| 8.1 Overview .....                              | <b>12</b> | 12.4 Electrostatic Discharge Caution .....                       | <b>51</b> |
| 8.2 Functional Block Diagram .....              | <b>12</b> | 12.5 Glossary .....                                              | <b>51</b> |
| 8.3 Feature Description .....                   | <b>13</b> | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>51</b> |
| 8.4 Device Functional Modes .....               | <b>20</b> |                                                                  |           |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Original (June 2017) to Revision A                                                                                                                                                                                       | Page     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| <ul style="list-style-type: none"> <li>Changed pin 40 From: FULLPWRMGMTz / FULLAUTOz / SMBA1 / SS_UP / CLKOUT_ENZ To: FULLPWRMGMTz / FULLAUTOz / SMBA1 / SS_UP in the <i>Pin Configuration and Functions</i> section .....</li> </ul> | <b>4</b> |

## 5 Description (Continued)

When the upstream port is connected to an electrical environment that only supports full-speed/low-speed connections, SuperSpeed USB and high-speed connectivity are disabled on the downstream ports.

The TUSB8043 supports per port or ganged power switching and over-current protection, and supports battery charging applications.

An individually port power controlled hub switches power on or off to each downstream port as requested by the USB host. Also when an individually port power controlled hub senses an over-current event, only power to the affected downstream port will be switched off.

A ganged hub switches on power to all its downstream ports when power is required to be on for any port. The power to the downstream ports is not switched off unless all ports are in a state that allows power to be removed. Also when a ganged hub senses an over-current event, power to all downstream ports will be switched off.


The TUSB8043 downstream ports provide support for battery charging applications by providing Battery Charging Downstream Port (CDP) handshaking support. It also supports a Dedicated Charging Port (DCP) mode when the upstream port is not connected. The DCP mode supports USB devices which support with the USB Battery Charging, Galaxy Charging, and Chinese Telecommunications Industry Standard YD/T 1591-2009. In addition when upstream port is unconnected, the TUSB8043 supports the divider charging port modes (ACPx modes) and an automatic transition through all modes, starting with ACP3 and ending in DCP.

The TUSB8043 provides pin strap configuration for some features including battery charging support, and also provides customization through OTP ROM, I<sup>2</sup>C EEPROM, or via an I<sup>2</sup>C/SMBus slave interface for PID, VID, and custom port and phy configurations. Custom string support is also available when using an I<sup>2</sup>C EEPROM or the I<sup>2</sup>C/SMBus slave interface.

The TUSB8043 supports programming of an attached EEPROM through its internal USB HID to I<sup>2</sup>C interface.

The device is available in a 64-pin RGC package and is offered in a commercial version for operation over the temperature range of 0°C to 70°C.

## 6 Pin Configuration and Functions

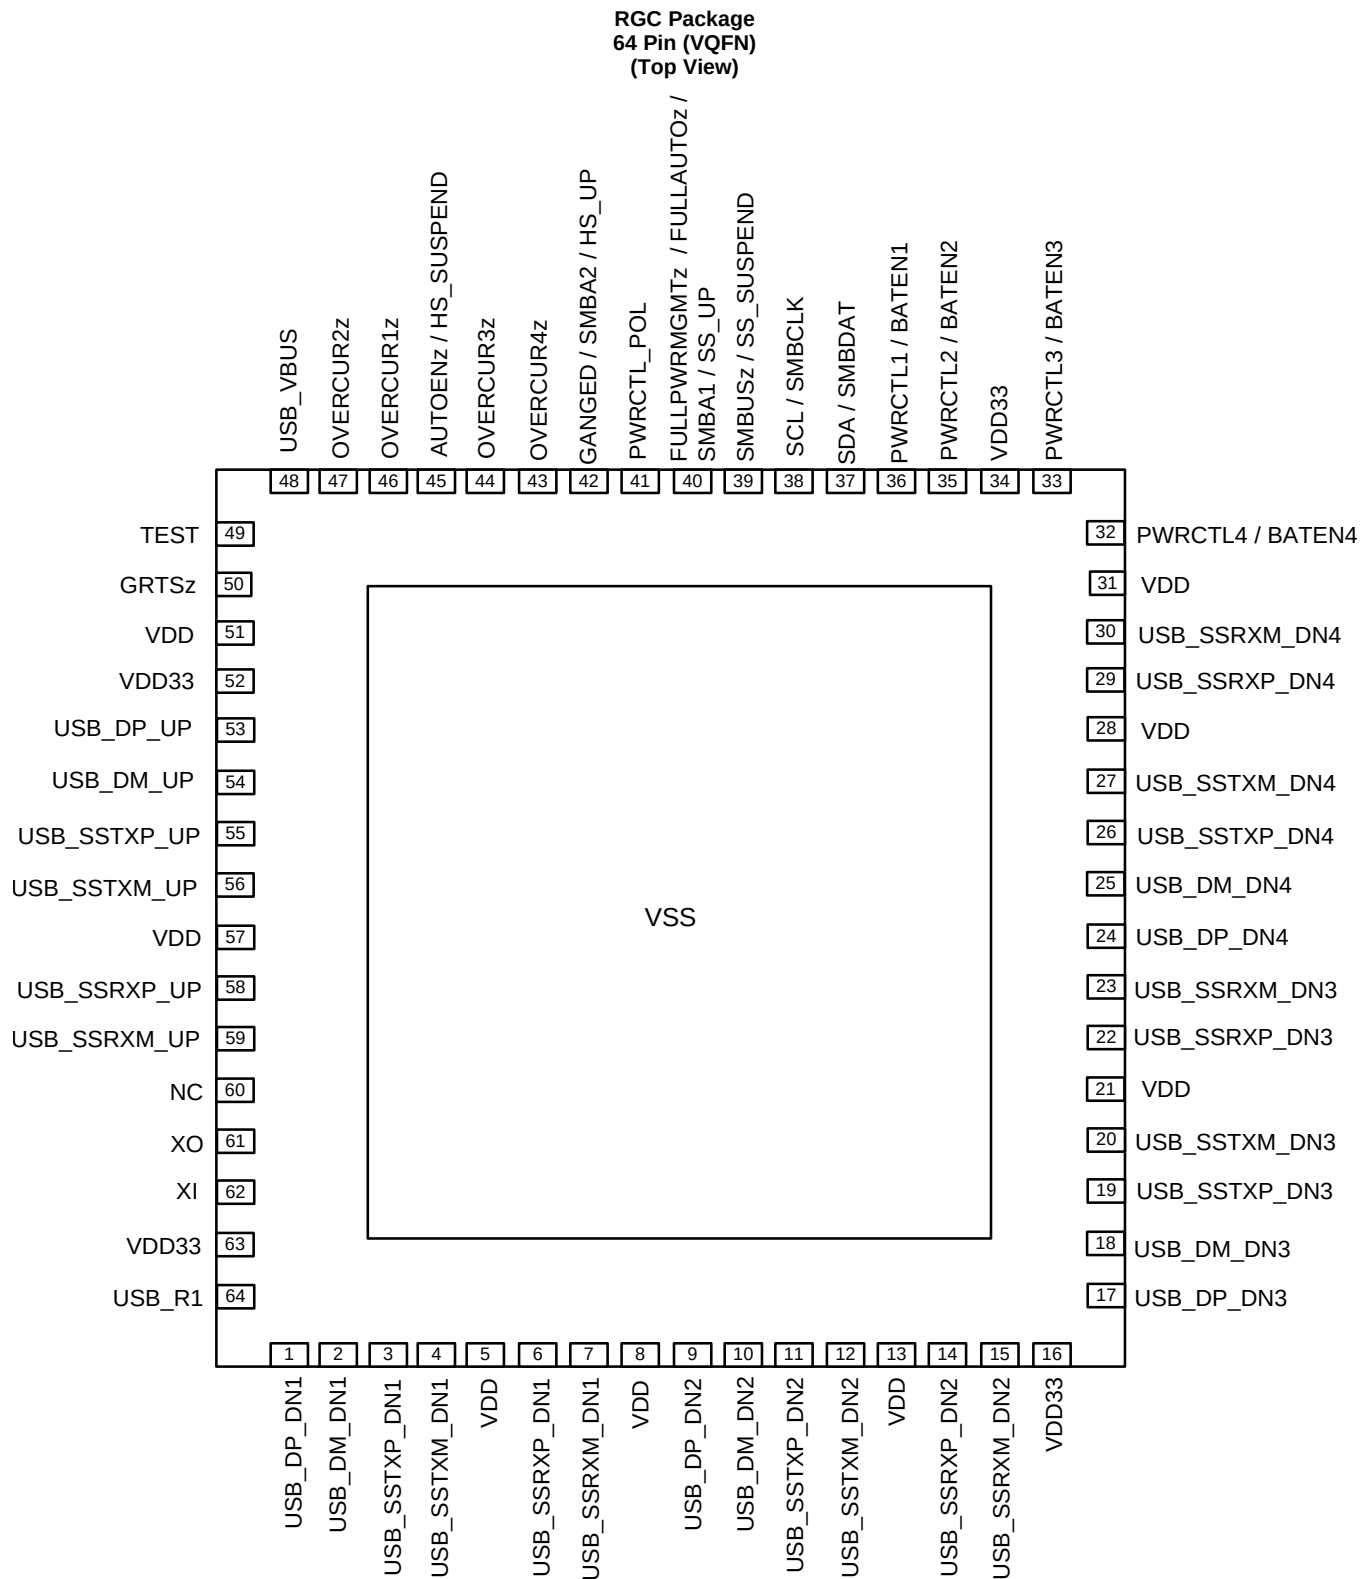

### Pin Functions

| PIN                     |     | I/O     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------|-----|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                    | NO. |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Clock and Reset Signals |     |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| GRSTz                   | 50  | I<br>PU | Global power reset. This reset brings all of the TUSB8043 internal registers to their default states. When GRSTz is asserted, the device is completely nonfunctional.                                                                                                                                                                                                                                                                                                                                                                         |
| XI                      | 62  | I       | Crystal input. This pin is the crystal input for the internal oscillator. The input may alternately be driven by the output of an external oscillator. When using a crystal a 1-MΩ feedback resistor is required between XI and XO.                                                                                                                                                                                                                                                                                                           |
| XO                      | 61  | O       | Crystal output. This pin is the crystal output for the internal oscillator. If XI is driven by an external oscillator this pin may be left unconnected. When using a crystal a 1-MΩ feedback resistor is required between XI and XO.                                                                                                                                                                                                                                                                                                          |
| USB Upstream Signals    |     |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| USB_SSTXP_UP            | 55  | O       | USB SuperSpeed transmitter differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| USB_SSTXM_UP            | 56  | O       | USB SuperSpeed transmitter differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| USB_SSRXP_UP            | 58  | I       | USB SuperSpeed receiver differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| USB_SSRXM_UP            | 59  | I       | USB SuperSpeed receiver differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| USB_DP_UP               | 53  | I/O     | USB High-speed differential transceiver (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| USB_DM_UP               | 54  | I/O     | USB High-speed differential transceiver (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| USB_R1                  | 64  | I       | Precision resistor reference. A 9.53-kΩ ±1% resistor should be connected between USB_R1 and GND.                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| USB_VBUS                | 48  | I       | USB upstream port power monitor. The VBUS detection requires a voltage divider. The signal USB_VBUS must be connected to VBUS through a 90.9-kΩ ±1% resistor, and to ground through a 10-kΩ ±1% resistor from the signal to ground.                                                                                                                                                                                                                                                                                                           |
| USB Downstream Signals  |     |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| USB_SSTXP_DN1           | 3   | O       | USB SuperSpeed transmitter differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| USB_SSTXM_DN1           | 4   | O       | USB SuperSpeed transmitter differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| USB_SSRXP_DN1           | 6   | I       | USB SuperSpeed receiver differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| USB_SSRXM_DN1           | 7   | I       | USB SuperSpeed receiver differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| USB_DP_DN1              | 1   | I/O     | USB High-speed differential transceiver (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| USB_DM_DN1              | 2   | I/O     | USB High-speed differential transceiver (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| PWRCTL1/BATEN1          | 36  | I/O, PD | USB Port 1 Power On Control for Downstream Power/Battery Charging Enable. The pin is used for control of the downstream power switch for Port 1. This pin be left unconnected if power management is not implemented.<br><br>In addition, the value of the pin is sampled at the de-assertion of reset to determine the value of the battery charging support for Port 1 as indicated in the Battery Charging Support register:<br><br>0 = Battery charging not supported<br>1 = Battery charging supported                                   |
| OVERCUR1z               | 46  | I, PU   | USB Port 1 Over-Current Detection. This pin is typically connected to the over current output of the downstream port power switch for Port 1.<br><br>0 = An over current event has occurred<br>1 = An over current event has not occurred<br><br>When GANGED power management is enabled, this pin or one of the other OVERCURz pins must be connected to the over current output of the power switch or circuit which detects the over current conditions. For the case when another OVERCURz pin is used, this pin can be left unconnected. |
| USB_SSTXP_DN2           | 11  | O       | USB SuperSpeed transmitter differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| USB_SSTXM_DN2           | 12  | O       | USB SuperSpeed transmitter differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| USB_SSRXP_DN2           | 14  | I       | USB SuperSpeed receiver differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| USB_SSRXM_DN2           | 15  | I       | USB SuperSpeed receiver differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| USB_DP_DN2              | 9   | I/O     | USB High-speed differential transceiver (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| USB_DM_DN2              | 10  | I/O     | USB High-speed differential transceiver (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

### Pin Functions (continued)

| PIN            |     | I/O     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------|-----|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME           | NO. |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| PWRCTL2/BATEN2 | 35  | I/O, PD | <p>USB Port 2 Power On Control for Downstream Power/Battery Charging Enable. The pin is used for control of the downstream power switch for Port 2. This pin be left unconnected if power management is not implemented.</p> <p>In addition, the value of the pin is sampled at the de-assertion of reset to determine the value of the battery charging support for Port 2 as indicated in the Battery Charging Support register:</p> <p>0 = Battery charging not supported<br/>1 = Battery charging supported</p>                                   |
| OVERCUR2z      | 47  | I, PU   | <p>USB Port 2 Over-Current Detection. This pin is typically connected to the over current output of the downstream port power switch for Port 2.</p> <p>0 = An over current event has occurred<br/>1 = An over current event has not occurred</p> <p>When GANGED power management is enabled, this pin or one of the other OVERCURz pins must be connected to the over current output of the power switch or circuit which detects the over current conditions. For the case when another OVERCURz pin is used, this pin can be left unconnected.</p> |
| USB_SSTXP_DN3  | 19  | O       | USB SuperSpeed transmitter differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| USB_SSTXM_DN3  | 20  | O       | USB SuperSpeed transmitter differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| USB_SSRXP_DN3  | 22  | I       | USB SuperSpeed receiver differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| USB_SSRXM_DN3  | 23  | I       | USB SuperSpeed receiver differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| USB_DP_DN3     | 17  | I/O     | USB High-speed differential transceiver (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| USB_DM_DN3     | 18  | I/O     | USB High-speed differential transceiver (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| PWRCTL3/BATEN3 | 33  | I/O, PD | <p>USB Port 3 Power On Control for Downstream Power/Battery Charging Enable. The pin is used for control of the downstream power switch for Port 3. This pin be left unconnected if power management is not implemented.</p> <p>In addition, the value of the pin is sampled at the de-assertion of reset to determine the value of the battery charging support for Port 3 as indicated in the Battery Charging Support register:</p> <p>0 = Battery charging not supported<br/>1 = Battery charging supported</p>                                   |
| OVERCUR3z      | 44  | I, PU   | <p>USB Port 3 Over-Current Detection. This pin is typically connected to the over current output of the downstream port power switch for Port 3.</p> <p>0 = An over current event has occurred<br/>1 = An over current event has not occurred</p> <p>When GANGED power management is enabled, this pin or one of the other OVERCURz pins must be connected to the over current output of the power switch or circuit which detects the over current conditions. For the case when another OVERCURz pin is used, this pin can be left unconnected.</p> |
| USB_SSTXP_DN4  | 26  | O       | USB SuperSpeed transmitter differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| USB_SSTXM_DN4  | 27  | O       | USB SuperSpeed transmitter differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| USB_SSRXP_DN4  | 29  | I       | USB SuperSpeed receiver differential pair (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| USB_SSRXM_DN4  | 30  | I       | USB SuperSpeed receiver differential pair (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| USB_DP_DN4     | 24  | I/O     | USB High-speed differential transceiver (positive)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| USB_DM_DN4     | 25  | I/O     | USB High-speed differential transceiver (negative)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| PWRCTL4/BATEN4 | 32  | I/O, PD | <p>USB Port 4 Power On Control for Downstream Power/Battery Charging Enable. The pin is used for control of the downstream power switch for Port 4. This pin be left unconnected if power management is not implemented.</p> <p>In addition, the value of the pin is sampled at the de-assertion of reset to determine the value of the battery charging support for Port 4 as indicated in the Battery Charging Support register:</p> <p>0 = Battery charging not supported<br/>1 = Battery charging supported</p>                                   |

### Pin Functions (continued)

| PIN                                                |     | I/O     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------|-----|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                               | NO. |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| OVERCUR4z                                          | 43  | I, PU   | <p>USB Port 4 Over-Current Detection. This pin is typically connected to the over current output of the downstream port power switch for Port 4.</p> <p>0 = An over current event has occurred<br/>1 = An over current event has not occurred</p> <p>When GANGED power management is enabled, this pin or one of the other OVERCURz pins must be connected to the over current output of the power switch or circuit which detects the over current conditions. For the case when another OVERCURz pin is used, this pin can be left unconnected.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>I<sup>2</sup>C/SMBUS I<sup>2</sup>C Signals</b> |     |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SCL/SMBCLK                                         | 38  | I/O, PD | <p>I<sup>2</sup>C clock/SMBus clock. Function of pin depends on the setting of the SMBUSz input.</p> <p>When SMBUSz = 1, this pin acts as the serial clock interface for an I<sup>2</sup>C EEPROM.<br/>When SMBUSz = 0, this pin acts as the serial clock interface for an SMBus host.<br/>Can be left unconnected if external interface not implemented.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SDA/SMBDAT                                         | 37  | I/O, PD | <p>I<sup>2</sup>C data/SMBus data. Function of pin depends on the setting of the SMBUSz input.</p> <p>When SMBUSz = 1, this pin acts as the serial data interface for an I<sup>2</sup>C EEPROM.<br/>When SMBUSz = 0, this pin acts as the serial data interface for an SMBus host.<br/>Can be left unconnected if external interface not implemented.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| SMBUSz/SS_SUSPEND                                  | 39  | I/O, PU | <p>I<sup>2</sup>C/SMBus mode select/SuperSpeed USB Suspend Status. The value of the pin is sampled at the de-assertion of reset set I<sup>2</sup>C or SMBus mode as follows:</p> <p>1 = I<sup>2</sup>C Mode Selected<br/>0 = SMBus Mode Selected</p> <p>Can be left unconnected if external interface not implemented.</p> <p>After reset, this signal indicates the SuperSpeed USB Suspend status of the upstream port if enabled through the stsOutputEn bit in the Additional Feature Configuration register. When enabled, a value of 1 indicates the connection is suspended.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Test and Miscellaneous Signals</b>              |     |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| FULLPWRMGMTz /<br>FULLAUTOz /<br>SMBAl/SS_UP       | 40  | I/O, PD | <p>Full power management enable/SMBus address bit 1/SuperSpeed USB Connection Status Upstream port.</p> <p>The value of the pin is sampled at the de-assertion of reset to set the power switch control follows:</p> <p>0 = Power switching and over current inputs supported<br/>1 = Power switching and over current inputs not supported</p> <p>Full power management is the ability to control power to the downstream ports of the TUSB8043 using PWRCTL[4:1]/BATEN[4:1].</p> <p>If BATENx = 1 on any port, full power management must be enabled so the value of the terminal is sampled at the de-assertion to initialize the value of the FULLAUTOz bit.</p> <p>When AUTOENz = 0 and FULLAUTOz = 0: all ACP modes are supported.<br/>When AUTOENz = 0 and FULLAUTOz = 1: only highest current ACP mode is used in auto mode.</p> <p>When SMBus mode is enabled, this pin sets the value of the SMBus slave address bit 1.<br/>Can be left unconnected if full power management and SMBus are not implemented.</p> <p>After reset, this signal indicates the SuperSpeed USB connection status of the upstream port if enabled through the stsOutputEn bit in the Additional Feature Configuration register. When enabled a value of 1 indicates the upstream port is connected to a SuperSpeed USB capable port.</p> <p>Note: Power switching must be supported for battery charging applications.</p> |
| PWRCTL_POL                                         | 41  | I/O, PU | <p>Power Control Polarity.</p> <p>The value of the pin is sampled at the de-assertion of reset to set the polarity of PWRCTL[4:1].</p> <p>0 = PWRCTL polarity is active low<br/>1 = PWRCTL polarity is active high</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

### Pin Functions (continued)

| PIN                             |                                       | I/O     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|---------------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                            | NO.                                   |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| GANGED/SMBA2/<br>HS_UP          | 42                                    | I/O, PD | <p>Ganged operation enable/SMBus Address bit 2/HS Connection Status Upstream Port.</p> <p>The value of the pin is sampled at the de-assertion of reset to set the power switch and over current detection mode as follows:</p> <ul style="list-style-type: none"> <li>0 = Individual power control supported when power switching is enabled</li> <li>1 = Power control gangs supported when power switching is enabled</li> </ul> <p>When SMBus mode is enabled using SMBUSz, this pin sets the value of the SMBus slave address bit 2.</p> <p>After reset, this signal indicates the High-speed USB connection status of the upstream port if enabled through the stsOutputEn bit in Additional Feature Configuration register. When enabled, a value of 1 indicates the upstream port is connected to a High-speed USB capable port.</p> <p>Note: Individual power control must be enabled for battery charging applications.</p> |
| AUTOENz/<br>HS_SUSPEND          | 45                                    | I/O, PU | <p>Automatic Charge Mode Enable/HS Suspend Status.</p> <p>The value of the pin is sampled at the de-assertion of reset to determine if automatic mode is enabled as follows:</p> <ul style="list-style-type: none"> <li>0 = Automatic Mode is enabled on ports that are enabled for battery charging when the hub is unconnected. Please note that CDP is not supported on Port 1 when operating in Automatic mode.</li> <li>1 = Automatic Mode is disabled</li> </ul> <p>This value is also used to set the autoEnz bit in the Battery Charging Support Register.</p> <p>After reset, this signal indicates the High-speed USB Suspend status of the upstream port if enabled through the stsOutputEn bit in Additional Feature Configuration register. When enabled, a value of 1 indicates the connection is suspended.</p>                                                                                                       |
| TEST                            | 49                                    | I, PD   | This pin is reserved for factory test. It is suggested to have this pin pulled down to ground on PCB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Power and Ground Signals</b> |                                       |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| VDD                             | 5, 8,<br>13, 21,<br>28, 31,<br>51, 57 | PWR     | 1.1-V power rail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| VDD33                           | 16, 34,<br>52, 63                     | PWR     | 3.3-V power rail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| VSS (Thermal Pad)               |                                       | PWR     | Ground. Thermal pad must be connected to ground.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| NC                              | 60                                    | —       | No connect, leave floating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



## 7 Specifications

### 7.1 Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

|                                       |                                                                                         | MIN  | MAX  | UNIT |
|---------------------------------------|-----------------------------------------------------------------------------------------|------|------|------|
| Supply Voltage Range                  | V <sub>DD</sub> Steady-state supply voltage                                             | −0.3 | 1.4  | V    |
|                                       | V <sub>DD33</sub> Steady-state supply voltage                                           | −0.3 | 3.8  | V    |
| Voltage Range                         | USB_SSRXP_UP, USB_SSRXN_UP, USB_SSRXP_DN[4:1], USB_SSRXN_DP[4:1] and USB_VBUS terminals | −0.3 | 1.4  | V    |
|                                       | XI terminals                                                                            | −0.3 | 2.45 | V    |
|                                       | All other terminals                                                                     | −0.3 | 3.8  | V    |
| Storage temperature, T <sub>stg</sub> |                                                                                         | −65  | 150  | °C   |

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|                    |                         |                                                                                | VALUE | UNIT |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                |                                |          | MIN  | NOM | MAX   | UNIT |
|--------------------------------|--------------------------------|----------|------|-----|-------|------|
| V <sub>DD</sub> <sup>(1)</sup> | 1.1V supply voltage            |          | 0.99 | 1.1 | 1.26  | V    |
| V <sub>DD33</sub>              | 3.3V supply voltage            |          | 3    | 3.3 | 3.6   | V    |
| USB_VBUS                       | Voltage at USB_VBUS PAD        |          | 0    |     | 1.155 | V    |
| T <sub>A</sub>                 | Operating free-air temperature | TUSB8043 | 0    |     | 70    | °C   |
| T <sub>J</sub>                 | Operating junction temperature |          | −40  |     | 105   | °C   |

- (1) A 1.05-V, 1.1-V, or 1.2-V supply may be used as long as minimum and maximum supply conditions are met.

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TUSB8043 | UNIT |
|-------------------------------|----------------------------------------------|----------|------|
|                               |                                              | RGC      |      |
|                               |                                              | 64 PINS  |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 26       | °C/W |
| R <sub>θJCTop</sub>           | Junction-to-case (top) thermal resistance    | 11.5     | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 5.3      | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.2      | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 5.2      | °C/W |
| R <sub>θJCbott</sub>          | Junction-to-case (bottom) thermal resistance | 1.0      | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics, 3.3-V I/O

over operating free-air temperature range (unless otherwise noted)


| PARAMETER        | OPERATION                                                                               | TEST CONDITIONS | MIN                         | TYP | MAX          | UNIT |
|------------------|-----------------------------------------------------------------------------------------|-----------------|-----------------------------|-----|--------------|------|
| V <sub>IH</sub>  | High-level input voltage <sup>(1)</sup>                                                 | VDD33           | 2                           |     | VDD33        | V    |
| V <sub>IL</sub>  | Low-level input voltage <sup>(1)</sup>                                                  | VDD33           | 0                           |     | 0.8          | V    |
| V <sub>I</sub>   | Input voltage                                                                           |                 | 0                           |     | VDD33        | V    |
| V <sub>O</sub>   | Output voltage <sup>(2)</sup>                                                           |                 | 0                           |     | VDD33        | V    |
| t <sub>t</sub>   | Input transition time (t <sub>rise</sub> and t <sub>fall</sub> )                        |                 | 0                           |     | 25           | ns   |
| V <sub>hys</sub> | Input hysteresis <sup>(3)</sup>                                                         |                 |                             |     | 0.13 x VDD33 | V    |
| V <sub>OH</sub>  | High-level output voltage                                                               | VDD33           | I <sub>OH</sub> = -4 mA     | 2.4 |              | V    |
| V <sub>OL</sub>  | Low-level output voltage                                                                | VDD33           | I <sub>OL</sub> = 4 mA      |     | 0.4          | V    |
| I <sub>OZ</sub>  | High-impedance, output current <sup>(2)</sup>                                           | VDD33           | V <sub>I</sub> = 0 to VDD33 |     | ±20          | μA   |
| I <sub>OZP</sub> | High-impedance, output current with internal pullup or pulldown resistor <sup>(4)</sup> | VDD33           | V <sub>I</sub> = 0 to VDD33 |     | ±250         | μA   |
| I <sub>I</sub>   | Input current <sup>(5)</sup>                                                            | VDD33           | V <sub>I</sub> = 0 to VDD33 |     | ±15          | μA   |
| R <sub>PD</sub>  | Internal pull-down resistor                                                             |                 | 13.5                        | 19  | 27.5         | KΩ   |
| R <sub>PU</sub>  | Internal pull-up resistor                                                               |                 | 14.5                        | 19  | 25           | KΩ   |

- (1) Applies to external inputs and bidirectional buffers.
- (2) Applies to external outputs and bidirectional buffers.
- (3) Applies to GRSTz.
- (4) Applies to pins with internal pullups/pulldowns.
- (5) Applies to external input buffers.

## 7.6 Timing Requirements, Power-Up

| PARAMETER               | DESCRIPTION                                                               | MIN                | TYP | MAX | UNIT |
|-------------------------|---------------------------------------------------------------------------|--------------------|-----|-----|------|
| t <sub>d1</sub>         | VDD33 stable before VDD stable <sup>(1)</sup>                             | See <sup>(2)</sup> |     |     | ms   |
| t <sub>d2</sub>         | VDD and VDD33 stable before de-assertion of GRSTz                         | 3                  |     |     | ms   |
| t <sub>su_io</sub>      | Setup for MISC inputs <sup>(3)</sup> sampled at the de-assertion of GRSTz | 0.1                |     |     | μs   |
| t <sub>hd_io</sub>      | Hold for MISC inputs <sup>(3)</sup> sampled at the de-assertion of GRSTz  | 0.1                |     |     | μs   |
| t <sub>VDD33_RAMP</sub> | VDD33 supply ramp requirements                                            | 0.2                |     | 100 | ms   |
| t <sub>VDD_RAMP</sub>   | VDD supply ramp requirements                                              | 0.2                |     | 100 | ms   |

- (1) An active reset is required if the VDD33 supply is stable before the VDD11 supply. This active Reset shall meet the 3ms power-up delay counting from both power supplies being stable to the de-assertion of GRSTz.
- (2) There is no power-on relationship between VDD33 and VDD unless GRSTz is only connected to a capacitor to GND. Then VDD must be stable minimum of 10 μs before the VDD33.
- (3) MISC pins sampled at de-assertion of GRSTz: BATEN[4:1], AUTOENz, FULLPWRMGMTz, GANGED, SMBUSz, and PWRCTL\_POL.

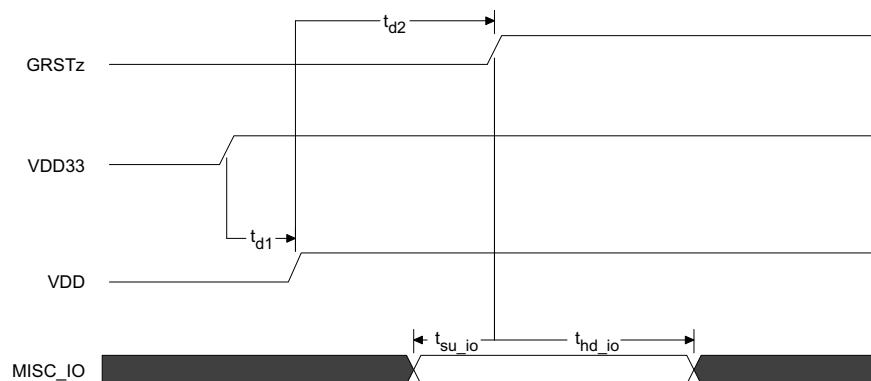

**Figure 1. Power-Up Timing Requirements**

## 7.7 Hub Input Supply Current

Typical values measured at  $T_A = 25^{\circ}\text{C}$


| PARAMETER                                      | VDD33 | VDD   | UNIT |
|------------------------------------------------|-------|-------|------|
|                                                | 3.3 V | 1.1 V |      |
| LOW POWER MODES                                |       |       |      |
| Power On (after Reset)                         | 3     | 30    | mA   |
| Upstream Disconnect                            | 3     | 24    | mA   |
| Suspend                                        | 3     | 30    | mA   |
| ACTIVE MODES (US state / DS State)             |       |       |      |
| 3.0 host / 1 SS Device and Hub in U1 / U2      | 45    | 240   | mA   |
| 3.0 host / 1 SS Device and Hub in U0           | 45    | 356   | mA   |
| 3.0 host / 2 SS Devices and Hub in U1 / U2     | 45    | 301   | mA   |
| 3.0 host / 2 SS Devices and Hub in U0          | 45    | 457   | mA   |
| 3.0 host / 3 SS Devices and Hub in U1 / U2     | 45    | 372   | mA   |
| 3.0 host / 3 SS Devices and Hub in U0          | 45    | 563   | mA   |
| 3.0 host / 4 SS Devices and Hub in U1 / U2     | 45    | 440   | mA   |
| 3.0 host / 4 SS Devices and Hub in U0          | 45    | 672   | mA   |
| 3.0 host / 1 SS Device in U0 and 1 HS Device   | 84    | 372   | mA   |
| 3.0 host / 2 SS Devices in U0 and 2 HS Devices | 95    | 512   | mA   |
| 2.0 host / HS Device                           | 45    | 55    | mA   |
| 2.0 host / 4 HS Devices                        | 76    | 74    | mA   |

## 8 Detailed Description

### 8.1 Overview

The TUSB8043 is a four-port USB 3.1 Gen1 compliant hub. It provides simultaneous SuperSpeed USB and high-speed/full-speed connections on the upstream port and provides SuperSpeed USB, high-speed, full-speed, or low-speed connections on the downstream ports. When the upstream port is connected to an electrical environment that only supports high-speed or full-speed/low-speed connections, SuperSpeed USB connectivity is disabled on the downstream ports. When the upstream port is connected to an electrical environment that only supports full-speed/low-speed connections, SuperSpeed USB and high-speed connectivity are disabled on the downstream ports.

### 8.2 Functional Block Diagram

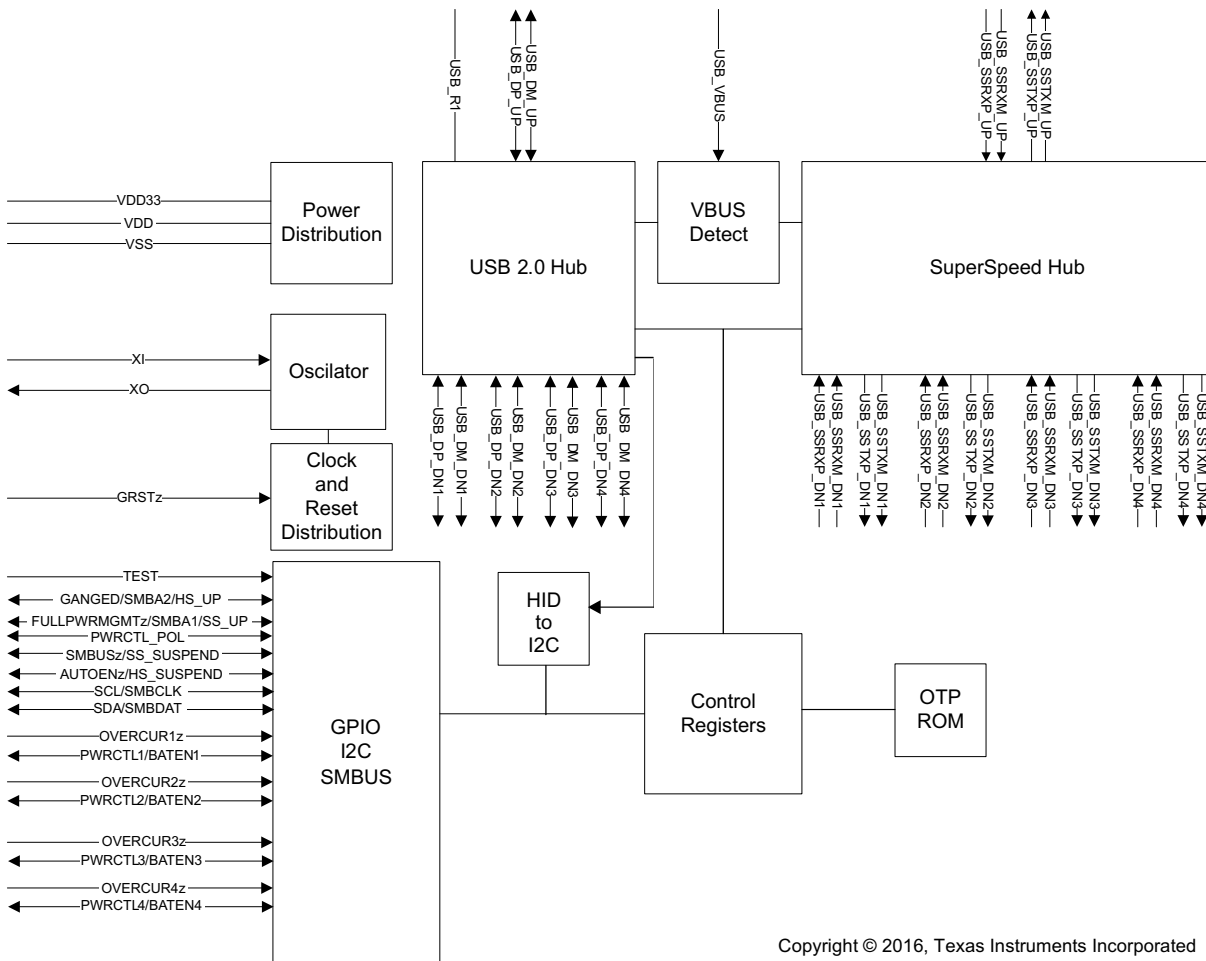

Copyright © 2016, Texas Instruments Incorporated

## 8.3 Feature Description

### 8.3.1 Battery Charging Features

The TUSB8043 provides support for USB Battery Charging (BC1.2) and custom charging. Battery charging support may be enabled on a per port basis through the REG\_6h(batEn[3:0]).

USB Battery charging support includes both Charging Downstream Port (CDP) and Dedicated Charging Port (DCP) modes. The DCP mode is compliant with the Chinese Telecommunications Industry Standard YD/T 1591-2009. CDP is enabled when the upstream port has detected valid VBUS, configured, and host sets port power. When the upstream port is not connected and battery charging support is enabled, the TUSB8043 will enable DCP mode.

In addition to USB Battery charging (BC1.2), the TUSB8043 supports custom charging indications: Divider Charging (ACP3, ACP2, ACP1 modes), and Galaxy compatible charging. These custom charging modes are only supported when upstream port is unconnected and AUTOMODE is enabled. When in AUTOMODE and upstream port is disconnected, the port will automatically transition from ACP mode to the DCP mode depending on the portable device connected. The divider mode places a fixed DC voltage on the ports DP and DM signals which allows some devices to identify the capabilities of the charger. The default divider mode indicates support for up to 10W (ACP3). The divider mode can be configured to report a lower-current setting (up to 5 W) through REG\_0Ah (HiCurAcModeEn).

When the upstream port is not connected and battery charging support is enabled for a port, the TUSB8043 drives the port power enable active. If AUTOMODE is disabled, then DCP mode is used. If AUTOMODE is enabled and FullAutoEn bit is cleared (Reg\_25h Bit 0), then TUSB8043 will start with highest enabled divider current mode (ACP<sub>x</sub>). The TUSB8043 will remain in highest current mode as long as a pull-up is not detected on DP pin. If an pull-up is detected on DP pin, then TUSB8043 will drive the port power enable inactive and switch to Galaxy mode, if enabled, or to DCP mode if Galaxy mode is disabled. The TUSB8043 will again drive the port power enable active. The TUSB8043 will remain in Galaxy mode as long as no pull-up is detected on DP pin. If an pull-up is detected on DP pin, then TUSB8043 will drive the port power enable inactive and transition to DCP mode. The TUSB8043 will again drive the port power enable active. In DCP mode, the TUSB8043 will look for a pull-up detected on DP pin or RxVdat. If a pull-up or RxVdat is detected on DP, the TUSB8043 will remain in DCP mode. If no pull-up or RxVdat is detected on DP pin after 2 seconds, the TUSB8043 will drive the port power enable inactive and transition back to ACP<sub>x</sub> mode. This sequence will repeat until upstream port is connected.

When Automatic mode is enabled and full automatic mode (FullAutoEn Reg\_25h bit 0) is enabled, TUSB8043 will perform same sequence described in previous paragraph with the addition of attempting all supported ACP<sub>x</sub> modes before sequencing to Galaxy Mode (if enabled) or DCP mode.

The supported battery charging modes when TUSB8043 configured for SMBus or external EEPROM is detailed in [Battery Charging Modes with SMBus/EEPROM Table](#).

The supported battery charging modes when TUSB8043 configured for I2C but without an external EEPROM is determined by the sampled state of the pins. These modes are detailed in [Battery Charging Modes without EEPROM Table](#).

**Feature Description (continued)**
**Table 1. TUSB8043 Battery Charging Modes with SMBus or I2C EEPROM**

| batEn[n] Reg_06h Bits 3:0 | Upstream VBUS | HiCurAcpMode En Reg_0Ah Bit 4 | autoModeEnz Reg_0Ah Bit 1 | FullAutoEn Reg_25h Bit 0 | Galaxy_Enz Reg_25h Bit 1 | Battery Charging Mode Port x<br>(x = n + 1)                                                                        |
|---------------------------|---------------|-------------------------------|---------------------------|--------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------|
| 0                         | Don't Care    | Don't Care                    | Don't Care                | Don't Care               | Don't Care               | No Charging support                                                                                                |
| 1                         | > 4V          | Don't Care                    | Don't Care                | Don't Care               | Don't Care               | CDP                                                                                                                |
| 1                         | < 4V          | Don't Care                    | 1                         | Don't Care               | Don't Care               | DCP                                                                                                                |
| 1                         | < 4V          | 0                             | 0                         | 1                        | 1                        | AUTOMODE enabled. Sequences through all ACPx modes and DCP with the exception of ACP3<br>Alternate ACP2, ACP1, DCP |
| 1                         | < 4V          | 1                             | 0                         | 1                        | 1                        | AUTOMODE enabled. Sequences through all ACPx modes and DCP.<br>Alternate ACP3, ACP2, ACP1, DCP                     |
| 1                         | < 4 V         | 0                             | 0                         | 0                        | 1                        | AUTOMODE enabled. Sequences between ACP2 and DCP.<br>Alternate ACP2, DCP                                           |
| 1                         | < 4V          | 1                             | 0                         | 0                        | 1                        | AUTOMODE enabled. Sequences between ACP3 and DCP.<br>Alternate ACP3, DCP                                           |
| 1                         | < 4V          | 0                             | 0                         | 1                        | 0                        | AUTOMODE enabled with Galaxy compatible charging support.<br>Alternate ACP2, ACP1, Galaxy, DCP.                    |
| 1                         | < 4V          | 1                             | 0                         | 1                        | 0                        | AUTOMODE enabled with Galaxy compatible charging support.<br>Alternate ACP3, ACP2, ACP1, Galaxy, DCP               |
| 1                         | < 4V          | 0                             | 0                         | 0                        | 0                        | AUTOMODE enabled with Galaxy compatible charging support.<br>Alternate ACP2, Galaxy, DCP                           |
| 1                         | < 4V          | 1                             | 0                         | 0                        | 0                        | AUTOMODE enabled with Galaxy compatible charging support.<br>Alternate ACP3, Galaxy, DCP                           |

**Table 2. TUSB8043 Battery Charging Modes without EEPROM**

| BATEN[3:0] pins | Upstream VBUS | AUTOENz pin | FULLAUTOz pin | Battery Charging Mode Port x<br>(x = n + 1)                                                                                             |
|-----------------|---------------|-------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 0               | Don't Care    | Don't Care  | Don't Care    | No Charging support                                                                                                                     |
| 1               | > 4V          | Don't Care  | Don't Care    | CDP                                                                                                                                     |
| 1               | < 4V          | 1           | 0             | DCP                                                                                                                                     |
| 1               | < 4V          | 0           | 0             | AUTOMODE enabled with Galaxy compatible charging support. Sequences through all ACPx modes.<br>Alternate ACP3, ACP2, ACP1, Galaxy, DCP. |
| 1               | < 4V          | 0           | 1             | AUTOMODE enabled with Galaxy compatible charging support.<br>Alternate ACP3, Galaxy, DCP                                                |
| 1               | < 4V          | 1           | 1             | AUTOMODE enabled. Sequences through all ACPx modes.<br>Alternate ACP3, ACP2, ACP1, DCP.                                                 |

### 8.3.2 USB Power Management

The TUSB8043 can be configured for power switched applications using either per-port (Full power managed) or ganged power-enable controls and over-current status inputs. When battery charge is enabled, the TUSB8043 will always function in full power managed.

Power switch support is enabled by REG\_5h (fullPwrMgmtz) and the per-port or ganged mode is configured by REG\_5h(ganged).

The TUSB8043 supports both active high and active low power-enable controls. The PWRCTL[4:1] polarity is configured by REG\_Ah(pwrctlPol).

### 8.3.3 I<sup>2</sup>C Programming Support Using Internal Hid to I<sup>2</sup>C Interface

The TUSB8043 I<sup>2</sup>C programming mode is supported using class-specific requests through the HID interface. The HID's embedded port will be numbered 1 greater than the highest numbered exposed port. The internal HID to I<sup>2</sup>C function of the TUSB8043 does not have an interrupt OUT endpoint. The TUSB8043 supports [GET REPORT \(Input\)](#) through the HID interrupt and control endpoints. The [GET REPORT \(Feature\)](#) and [SET REPORT \(Output\)](#) occurs through the control endpoint.

**Table 3. HID Requests I<sup>2</sup>C Programming Support**

| COMMAND            | bmRequestType | bRequest   | wValue                           | wIndex     | wLength       | DATA   |
|--------------------|---------------|------------|----------------------------------|------------|---------------|--------|
| Setup field Offset | Offset = 0    | Offset = 1 | Offset = 2                       | Offset = 4 | Offset = 6    | N/A    |
| GET REPORT         | A1H           | 01H        | 0100H – input<br>0300H - feature | 0000H      | Report Length | Report |
| SET REPORT         | 21H           | 09H        | 0200H – output                   | 0000H      | Report Length | Report |

Other HID class specific requests are optional and not supported (SET IDLE, SET PROTOCOL, GET IDLE, GET PROTOCOL) . Also report IDs are not required since all requests are not interleaved.

### 8.3.3.1 SET REPORT (Output)

Report length includes overhead bytes (1 byte of opcode, 1 byte of device address and 2 bytes of data length) and must match the number of bytes sent in the data stage or the request will be stalled.

- 1-byte opcode
  - 0x01 read I2C
  - 0x02 write I2C with stop
  - 0x03 write I2C without stop (use to set sub-address prior to read)
- 1-byte I2C slave (7-bit) address
- 2-byte I2C transaction data length
- "length" bytes of Data for a write, but none for a read.

Set Report status stage reports only the status of the receipt and validity of the request, not the status of the I<sup>2</sup>C transaction. As long as the fields construct a valid request, the status stage will be Acked by a null packet. Otherwise, it will be STALLED. For example, if the report\_length is longer than the amount of data sent before the status stage or the wLength is greater than the number of bytes of data sent in the data stage, the status stage will be STALLED. If the number of bytes sent in the data stage is greater than wLength or report\_length, the data stage will be STALLED.

Software shall ensure properly formatted commands and data responses. The sum of the start address and wLength shall be less than the total size of the address range of the target device in a properly formatted command. Hardware shall wrap any data addresses above FFFFh and shall discard any data transmitted greater than wLength and return STALL. A STALL will also be returned if opcode is 00h.

The I<sup>2</sup>C master that performs the I<sup>2</sup>C reads and writes initiated through USB HID interface supports clock stretching. It operates at 400 kHz by default, but can be configured for 100 kHz through eFuse or register.

If the TUSB8043 is suspended (L2) by the USB host, the USB HID interface must enter suspend, but the I<sup>2</sup>C master shall remain active while attempting to complete an active I<sup>2</sup>C write request. An active I<sup>2</sup>C read request may be aborted if the TUSB8043 enters USB suspend state. Per the USB specification, the USB host should not suspend the HID interface while an I<sup>2</sup>C read or write is still in progress. The USB HID interface shall refuse requests to enter USB 2.0 sleep mode (L1) while an I<sup>2</sup>C read or write is in progress.

### 8.3.3.2 GET REPORT (Feature)

This HID Report will always return a 2-byte constant (0x82FF) which can be used to identify compatible HID devices even if the customer changes the VID/PID.

### 8.3.3.3 GET REPORT (Input)

A report length of one reports the status byte only. To receive a report with data, the report length must be the length of the data, plus one byte for status and two bytes for the length field.

- 1-byte Status
  - 0 Success
  - 1 Fail — timeout (35 ms)
  - 2 Fail — Address nak
  - 3 Fail — data nak
- 2-byte length
- "length" bytes of Data for a read, but not for a write or a feature report.

A Get Report (input) request is required for both read and write. The interrupt endpoint will NAK until the I<sup>2</sup>C transaction is complete, so that it can report length, data for a read, and final status.



### 8.3.4 One Time Programmable (OTP) Configuration

The TUSB8043 allows device configuration through one time programmable non-volatile memory (OTP). The programming of the OTP is supported using vendor-defined USB device requests. For details using the OTP features please contact your TI representative.


[Table 4](#) provides a list features which may be configured using the OTP.

**Table 4. OTP Configurable Features**

| CONFIGURATION REGISTER OFFSET | BIT FIELD | DESCRIPTION                                                                                                                            |
|-------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------|
| REG_01h                       | [7:0]     | Vendor ID LSB                                                                                                                          |
| REG_02h                       | [7:0]     | Vendor ID MSB                                                                                                                          |
| REG_03h                       | [7:0]     | Product ID LSB                                                                                                                         |
| REG_04h                       | [7:0]     | Product ID MSB                                                                                                                         |
| REG_07h                       | [0]       | Port removable configuration for downstream ports 1. OTP configuration is inverse of rmb1[3:0], i.e. 1 = not removable, 0 = removable. |
| REG_07h                       | [1]       | Port removable configuration for downstream ports 2. OTP configuration is inverse of rmb1[3:0], i.e. 1 = not removable, 0 = removable. |
| REG_07h                       | [2]       | Port removable configuration for downstream ports 3. OTP configuration is inverse of rmb1[3:0], i.e. 1 = not removable, 0 = removable. |
| REG_07h                       | [3]       | Port removable configuration for downstream ports 4. OTP configuration is inverse of rmb1[3:0], i.e. 1 = not removable, 0 = removable. |
| REG_08h                       | [3:0]     | Port used Configured register.                                                                                                         |
| REG_0Ah                       | [3]       | Enable Device Attach Detection..                                                                                                       |
| REG_0Ah                       | [4]       | High-current divider mode enable.                                                                                                      |
| REG_0Bh                       | [0]       | USB 2.0 port polarity configuration for downstream ports 1.                                                                            |
| REG_0Bh                       | [1]       | USB 2.0 port polarity configuration for downstream ports 2.                                                                            |
| REG_0Bh                       | [2]       | USB 2.0 port polarity configuration for downstream ports 3.                                                                            |
| REG_0Bh                       | [3]       | USB 2.0 port polarity configuration for downstream ports 4.                                                                            |
| REG_25h                       | [4:0]     | Device Configuration Register 3                                                                                                        |
| REG_26h                       | [3:0]     | USB2.0 Only Port Register                                                                                                              |
| REG_F0h                       | [3:1]     | USB power switch power-on delay.                                                                                                       |

### 8.3.5 Clock Generation

The TUSB8043 accepts a crystal input to drive an internal oscillator or an external clock source. If a clock is provided to XI instead of a crystal, XO is left open. Otherwise, if a crystal is used, the connection needs to follow the guidelines below. Since XI and XO are coupled to other leads and supplies on the PCB, it is important to keep them as short as possible and away from any switching leads. It is also recommended to minimize the capacitance between XI and XO. This can be accomplished by shielding C1 and C2 with the clean ground lines.

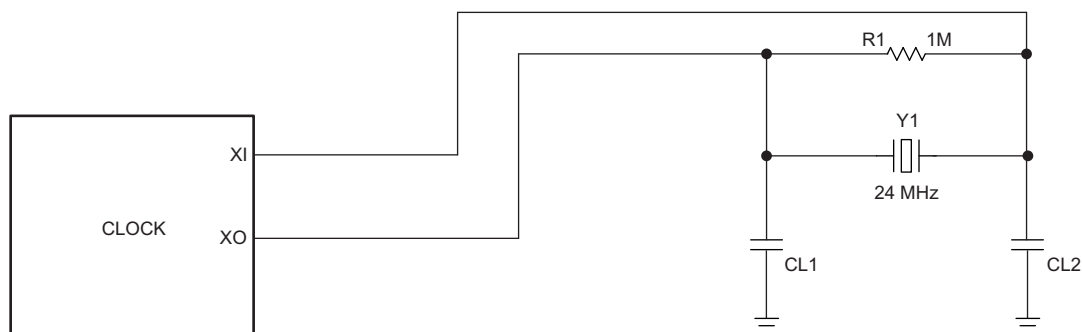

Copyright © 2016, Texas Instruments Incorporated

**Figure 2. TUSB8043 Clock**

### 8.3.6 Crystal Requirements

The crystal must be fundamental mode with load capacitance of 12 pF - 24 pF and frequency stability rating of  $\pm 100$  PPM or better. To ensure proper startup oscillation condition, a maximum crystal equivalent series resistance (ESR) of 50  $\Omega$  is recommended. A parallel load capacitor should be used if a crystal source is used. The exact load capacitance value used depends on the crystal vendor. Refer to application note *Selection and Specification for Crystals for Texas Instruments USB2.0 devices* ([SLLA122](#)) for details on how to determine the load capacitance value.

### 8.3.7 Input Clock Requirements

When using an external clock source such as an oscillator, the reference clock should have a  $\pm 100$  PPM or better frequency stability and have less than 50-ps absolute peak to peak jitter or less than 25-ps peak to peak jitter after applying the USB 3.1 jitter transfer function. XI should be tied to the 1.8-V clock source and XO should be left floating.

### 8.3.8 Power-Up and Reset

The TUSB8043 does not have specific power sequencing requirements with respect to the core power (VDD) or I/O and analog power (VDD33) as long as GRSTz is held in an asserted state while supplies ramp. The core power (VDD) or I/O power (VDD33) may be powered up for an indefinite period of time while the other is not powered up if all of these constraints are met:

- All maximum ratings and recommended operating conditions are observed.
- All warnings about exposure to maximum rated and recommended conditions are observed, particularly junction temperature. These apply to power transitions as well as normal operation.
- Bus contention while VDD33 is powered up must be limited to 100 hours over the projected life-time of the device.
- Bus contention while VDD33 is powered down may violate the absolute maximum ratings.

A supply bus is powered up when the voltage is within the recommended operating range. It is powered down when it is below that range, either stable or in transition.

A minimum reset duration of 3 ms is required. This is defined as the time when the power supplies are in the recommended operating range to the de-assertion of GRSTz. This can be generated using programmable-delay supervisory device or using an RC circuit. When a RC circuit is used, the external capacitor size chosen must be large enough to meet the 3ms minimum duration requirement. The R of the RC circuit is the internal  $R_{PU}$ .

## 8.4 Device Functional Modes

### 8.4.1 External Configuration Interface

The TUSB8043 supports a serial interface for configuration register access. The device may be configured by an attached I<sup>2</sup>C EEPROM or accessed as a slave by an external SMBus master. The external interface is enabled when both the SCL/SMBCLK and SDA/SMBDAT pins are pulled up to 3.3 V at the de-assertion of reset. The mode, I<sup>2</sup>C master or SMBus slave, is determined by the state of SMBUSz/SS\_SUSPEND pin at reset. With the integrated USB HID to I<sup>2</sup>C master, the I<sup>2</sup>C interface can also be used to program an external EEPROM or perform updates of an external MCU's firmware.

### 8.4.2 I<sup>2</sup>C EEPROM Operation

The TUSB8043 supports a single-master, fast mode (400KHz) connection to a dedicated I<sup>2</sup>C EEPROM when the I<sup>2</sup>C interface mode is enabled. In I<sup>2</sup>C mode, the TUSB8043 reads the contents of the EEPROM at bus address 1010000b using 7-bit addressing starting at address 0. The TUSB8043 will read the entire EEPROM contents using a single burst read transaction. The burst read transaction will end when the address reaches FFh.

If the value of the EEPROM contents at address byte 00h equals 55h, the TUSB8043 loads the configuration registers according to the EEPROM map. If the first byte is not 55h, the TUSB8043 exits the I<sup>2</sup>C mode and continues execution with the default values in the configuration registers. The hub will not connect on the upstream port until the configuration is completed.

---

#### NOTE

The bytes located above offset Ah are optional. The requirement for data in those addresses is dependent on the options configured in the Device Configuration, and Device Configuration 2 registers.

The minimum size I<sup>2</sup>C EEPROM required is 2Kbit.

---

For details on I<sup>2</sup>C operation refer to the UM10204 I<sup>2</sup>C-bus Specification and User Manual.

### 8.4.3 Port Configuration

The TUSB8043 port configurations can be selected by registers or efuse. The Port Used Configuration register (USED[3:0]) define how many ports can possibly be reported by the hub. The device removable configuration register (RMBL[3:0]) define if the ports that are reported as used have permanently connected devices or not. The USB 2.0 Only Port register (USB2\_ONLY[3:0]) define whether or a used port is reported as part of the USB 2.0 hub or both the USB2.0 and USB3.1 hubs. The USB2\_ONLY field will enable the USB2.0 port even if the corresponding USED bit is low. The internal HID port will always be the highest number USB2.0 port. The table below shows examples of the possible combinations.

## Device Functional Modes (continued)

**Table 5. TUSB8043 Downstream Port Configuration Examples**

| USED[3:0] | RMBL[3:0] | USB2_ONLY [3:0] | Reported Port Configuration                                                                                                                                   | Physical to Logical Port mapping                                                                                                                                                                                                                           |
|-----------|-----------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1111      | 1111      | 0000            | 4 Port USB3.1 Hub<br>5 Port USB2.0 Hub<br>Port 5 is permanently attached HID                                                                                  | Physical1 => Logical Port1 for USB3.1 and USB2.0.<br>Physical2 => Logical Port2 for USB3.1 and USB2.0.<br>Physical3 => Logical Port3 for USB3.1 and USB2.0.<br>Physical4 => Logical Port4 for USB3.1 and USB2.0.<br>Physical5 => Logical Port5 for USB2.0. |
| 1110      | 1111      | 0000            | 3 Port USB3.1 Hub<br>4 Port USB2.0 Hub<br>Port 4 is permanently attached HID                                                                                  | Physical1 Not used.<br>Physical2 => Logical Port1 for USB3.1 and USB2.0.<br>Physical3 => Logical Port2 for USB3.1 and USB2.0.<br>Physical4 => Logical Port3 for USB3.1 and USB2.0.<br>Physical5 => Logical Port4 for USB 2.0.                              |
| 1100      | 0111      | 0000            | 2 Port USB 3.1 Hub<br>3 Port USB2.0 hub with permanently attached device on Port 2<br>Port 3 is a permanently attached HID                                    | Physical1 Not used.<br>Physical2 Not used.<br>Physical3 => Logical Port1 for USB3.1 and USB2.0.<br>Physical4 => Logical Port2 for USB3.1 and USB2.0.<br>Physical5 => Logical Port3 for USB2.0.                                                             |
| 0011      | 1111      | 0010            | 1 Port USB 3.1 Hub<br>3 Port USB 2.0 Hub<br>Port 3 is a permanently attached HID                                                                              | Physical1 => Logical Port1 for USB3.1 and USB2.0.<br>Physical2 => Logical Port2 for USB2.0.<br>Physical3 Not Used.<br>Physical4 Not used.<br>Physical5 => Logical Port3 for USB2.0.                                                                        |
| 1000      | 1111      | 0010            | 1 Port USB 3.1 Hub<br>3 Port USB 2.0 Hub<br>Port 3 is a permanently attached HID                                                                              | Physical1 Not used.<br>Physical2 => Logical Port2 for USB2.0.<br>Physical3 Not used<br>Physical4 => Logical Port1 for USB3.1 and USB2.0.<br>Physical5 => Logical Port3 for USB2.0.                                                                         |
| 1111      | 1111      | 1110            | 1 Port USB 3.1 Hub<br>5 Port USB 2.0 Hub<br>Port 5 is a permanently attached HID                                                                              | Physical1 => Logical Port1 for USB3.1 and USB2.0.<br>Physical2 => Logical Port2 for USB2.0.<br>Physical3 => Logical Port3 for USB2.0.<br>Physical4 => Logical Port4 for USB2.0.<br>Physical5 => Logical Port5 for USB2.0.                                  |
| 1010      | N/A       | 0x0x            | Invalid combination when USB2_ONLY = 0000, 0001, 0100, or 0101. If invalid combination is used, then physical port 4 will not operate at USB3.1 Gen 1 speeds. |                                                                                                                                                                                                                                                            |
| 1011      | N/A       | 0x01            | Invalid combination when USB2_ONLY = 0001 or 0101. If invalid combination is used, then physical port 4 will not operate at USB3.1 Gen 1 speeds.              |                                                                                                                                                                                                                                                            |
| 1110      | N/A       | 010x            | Invalid combination when USB2_ONLY = 0100 or 0101. If invalid combination is used, then physical port 4 will not operate at USB3.1 Gen 1 speeds.              |                                                                                                                                                                                                                                                            |
| 1111      | N/A       | 0101            | Invalid combination when USB2_ONLY = 0101. If invalid combination is used, then physical port 4 will not operate at USB3.1 Gen 1 speeds.                      |                                                                                                                                                                                                                                                            |

## **TUSB8043**

SLLSEW4A – JUNE 2017 – REVISED AUGUST 2017

[www.ti.com](http://www.ti.com)

### **8.4.4 SMBus Slave Operation**

When the SMBus interface mode is enabled, the TUSB8043 supports read block and write block protocols as a slave-only SMBus device.

The TUSB8043 slave address is 1000 1xyz, where:

- x is the state of GANGED/SMBA2/HS\_UP pin at reset,
- y is the state of FULLPWRMGMTz/SMBA1/SS\_UP pin at reset, and
- z is the read/write bit; 1 = read access, 0 = write access.

If the TUSB8043 is addressed by a host using an unsupported protocol it will not respond. The TUSB8043 waits indefinitely for configuration by the SMBus host and will not connect on the upstream port until the SMBus host indicates configuration is complete by clearing the CFG\_ACTIVE bit.

For details on SMBus requirements, refer to the System Management Bus Specification.

## 8.5 Register Maps

### 8.5.1 Configuration Registers

The internal configuration registers are accessed on byte boundaries. The configuration register values are loaded with defaults but can be over-written when the TUSB8043 is in I<sup>2</sup>C or SMBus mode.

**Table 6. TUSB8043 Register Map**

| BYTE ADDRESS | CONTENTS                                   | EEPROM CONFIGURABLE |
|--------------|--------------------------------------------|---------------------|
| 00h          | ROM Signature Register                     | Yes                 |
| 01h          | Vendor ID LSB                              | Yes                 |
| 02h          | Vendor ID MSB                              | Yes                 |
| 03h          | Product ID LSB                             | Yes                 |
| 04h          | Product ID MSB                             | Yes                 |
| 05h          | Device Configuration Register              | Yes                 |
| 06h          | Battery Charging Support Register          | Yes                 |
| 07h          | Device Removable Configuration Register    | Yes                 |
| 08h          | Port Used Configuration Register           | Yes                 |
| 09h          | Reserved. Must default to 00h.             | Yes                 |
| 0Ah          | Device Configuration Register 2            | Yes                 |
| 0Bh          | USB 2.0 Port Polarity Control Register     | Yes                 |
| 0Ch-0Fh      | Reserved                                   | No                  |
| 10h-1Fh      | UUID Byte [15:0]                           | No                  |
| 20h-21h      | LangID Byte [1:0]                          | Yes                 |
| 22h          | Serial Number Length                       | Yes                 |
| 23h          | Manufacturer String Length                 | Yes                 |
| 24h          | Product String Length                      | Yes                 |
| 25h          | Device Configuration Register 3            | Yes                 |
| 26h          | USB 2.0 Only Port Register                 | Yes                 |
| 27h-2Eh      | Reserved                                   | Yes                 |
| 2Fh          | Reserved                                   | No                  |
| 30h-4Fh      | Serial Number String Byte [31:0]           | Yes                 |
| 50h-8Fh      | Manufacturer String Byte [63:0]            | Yes                 |
| 90h-CFh      | Product String Byte [63:0]                 | Yes                 |
| D0h-D4h      | Reserved                                   | Yes <sup>(1)</sup>  |
| D5h-D7h      | Reserved                                   | No                  |
| D8h-DCh      | Reserved                                   | Yes <sup>(1)</sup>  |
| DDh-EFh      | Reserved                                   | No                  |
| F0h          | Additional Features Configuration Register | Yes                 |
| F1h-F7h      | Reserved                                   | No                  |
| F8h          | SMBus Device Status and Command Register   | No                  |
| F9h - FFh    | Reserved                                   | No                  |

## TUSB8043

SLLSEW4A – JUNE 2017 – REVISED AUGUST 2017

[www.ti.com](http://www.ti.com)

### 8.5.2 ROM Signature Register

**Figure 3. Register Offset 0h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 7. Bit Descriptions – ROM Signature Register**

| Bit | Field        | Type | Description                                                                                                                                                                                                                                                                                           |
|-----|--------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | romSignature | RW   | ROM Signature Register. This register is used by the TUSB8043 in I <sup>2</sup> C mode to validate the attached EEPROM has been programmed. The first byte of the EEPROM is compared to the mask 55h and if not a match, the TUSB8043 aborts the EEPROM load and executes with the register defaults. |

### 8.5.3 Vendor ID LSB Register

**Figure 4. Register Offset 1h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 1 |

**Table 8. Bit Descriptions – Vendor ID LSB Register**

| Bit | Field       | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----|-------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | vendorIdLsb | RO/RW | Vendor ID LSB. Least significant byte of the unique vendor ID assigned by the USB-IF; the default value of this register is 51h representing the LSB of the TI Vendor ID 0451h. The value may be over-written to indicate a customer Vendor ID. Value used for this field will be the non-zero value written by EEPROM/SMBus to both PID and VID. If a zero value is written by EEPROM/SMBus to both PID and VID, then value used for this field will be the non-zero value from OTP. If a zero value is written by OTP, then value used for this field will be 51h. |

### 8.5.4 Vendor ID MSB Register

**Figure 5. Register Offset 2h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |

**Table 9. Bit Descriptions – Vendor ID MSB Register**

| Bit | Field       | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|-------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | vendorIdMsb | RO/RW | Vendor ID MSB. Most significant byte of the unique vendor ID assigned by the USB-IF; the default value of this register is 04h representing the MSB of the TI Vendor ID 0451h. The value may be over-written to indicate a customer Vendor ID. Value used for this field will be the non-zero value written by EEPROM/SMBus to both PID and VID. If a zero value is written by EEPROM/SMBus to both PID and VID, then value used for this field will be the non-zero value from OTP. If a zero value is written by OTP, then value used for this field will be 04h. |



## 8.5.5 Product ID LSB Register

**Figure 6. Register Offset 3h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 10. Bit Descriptions – Product ID LSB Register**

| Bit | Field        | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|--------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | productIdLsb | RO/RW | Product ID LSB. Least significant byte of the product ID assigned by Texas Instruments and reported in the SuperSpeed Device descriptor. the default value of this register is 40h representing the LSB of the SuperSpeed product ID assigned by Texas Instruments. The value reported in the USB 2.0 Device descriptor is the value of this register bit wise XORed with 00000010b. The value may be over-written to indicate a customer product ID.<br>Value used for this field will be the non-zero value written by EEPROM/SMBus to both PID and VID. If a zero value is written by EEPROM/SMBus to both PID and VID, then value used for this field will be the non-zero value from OTP. If a zero value is written by OTP, then value used for this field will be 40h . |

## 8.5.6 Product ID MSB Register

**Figure 7. Register Offset 4h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

**Table 11. Bit Descriptions – Product ID MSB Register**

| Bit | Field        | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|--------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | productIdMsb | RO/RW | Product ID MSB. Most significant byte of the product ID assigned by Texas Instruments; the default value of this register is 83h representing the MSB of the product ID assigned by Texas Instruments. The value may be over-written to indicate a customer product ID.<br>Value used for this field will be the non-zero value written by EEPROM/SMBus to both PID and VID. If a zero value is written by EEPROM/SMBus to both PID and VID, then value used for this field will be the non-zero value from OTP. If a zero value is written by OTP, then value used for this field will be 83h. |

## 8.5.7 Device Configuration Register

**Figure 8. Register Offset 5h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 1 | X | X | 0 | 0 |

**Table 12. Bit Descriptions – Device Configuration Register**

| Bit | Field         | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----|---------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | customStrings | RW   | Custom strings enable. This bit controls the ability to write to the Manufacturer String Length, Manufacturer String, Product String Length, Product String, and Language ID registers<br>0 = The Manufacturer String Length, Manufacturer String, Product String Length, Product String, and Language ID registers are read only<br>1 = The Manufacturer String Length, Manufacturer String, Product String Length, Product String, and Language ID registers may be loaded by EEPROM or written by SMBus<br>The default value of this bit is 0.                                                                                                                          |
| 6   | customSernum  | RW   | Custom serial number enable. This bit controls the ability to write to the serial number registers.<br>0 = The Serial Number String Length and Serial Number String registers are read only<br>1 = Serial Number String Length and Serial Number String registers may be loaded by EEPROM or written by SMBus<br>The default value of this bit is 0.                                                                                                                                                                                                                                                                                                                       |
| 5   | u1u2Disable   | RW   | U1 U2 Disable. This bit controls the U1/U2 support.<br>0 = U1/U2 support is enabled<br>1 = U1/U2 support is disabled, the TUSB8043 will not initiate or accept any U1 or U2 requests on any port, upstream or downstream, unless it receives or sends a Force_LinkPM_Accept LMP. After receiving or sending an FLPMA LMP, it will continue to enable U1 and U2 according to USB 3.1 protocol until it gets a power-on reset or is disconnected on its upstream port.<br>When the TUSB8043 is in I <sup>2</sup> C mode, the TUSB8043 loads this bit from the contents of the EEPROM.<br>When the TUSB8043 is in SMBUS mode, the value may be over-written by an SMBus host. |
| 4   | RSVD          | RO   | Reserved. This bit is reserved and returns 1 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3   | ganged        | RW   | Ganged. This bit is loaded at the de-assertion of reset with the value of the GANGED/SMBA2/HS_UP pin.<br>0 = When fullPwrMgmtz = 0, each port is individually power switched and enabled by the PWRCTL[4:1]/BATEN[4:1] pins<br>1 = When fullPwrMgmtz = 0, the power switch control for all ports is ganged and enabled by the PWRCTL[4:1]/BATEN1 pin<br>When the TUSB8043 is in I <sup>2</sup> C mode, the TUSB8043 loads this bit from the contents of the EEPROM.<br>When the TUSB8043 is in SMBUS mode, the value may be over-written by an SMBus host.                                                                                                                 |
| 2   | fullPwrMgmtz  | RW   | Full Power Management. This bit is loaded at the de-assertion of reset with the value of the FULLPWRMGMTz/SMBA1/SS_UP pin.<br>0 = Port power switching status reporting is enabled<br>1 = Port power switching status reporting is disabled<br>When the TUSB8043 is in I <sup>2</sup> C mode, the TUSB8043 loads this bit from the contents of the EEPROM.<br>When the TUSB8043 is in SMBUS mode, the value may be over-written by an SMBus host.                                                                                                                                                                                                                          |
| 1   | u1u2TimerOvr  | RW   | U1 U2 Timer Override. When this field is set, the TUSB8043 will override the downstream ports U1/U2 timeout values set by USB3.1 Host software. If software sets value in the range of 1h - FFh, the TUSB8043 will use the value of FFh. If software sets value to 0, then TUSB8043 will use value of 0.                                                                                                                                                                                                                                                                                                                                                                   |
| 0   | RSVD          | RO   | Reserved. This field is reserved and returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## 8.5.8 Battery Charging Support Register

**Figure 9. Register Offset 6h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | X | X | X | X |

**Table 13. Bit Descriptions – Battery Charging Support Register**

| Bit | Field      | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----|------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | RSVD       | RO   | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 3:0 | batEn[3:0] | RW   | Battery Charger Support. The bits in this field indicate whether the downstream port implements the charging port features.<br>0 = The port is not enabled for battery charging support features<br>1 = The port is enabled for battery charging support features<br>Each bit corresponds directly to a downstream port, i.e. batEn0 corresponds to downstream port 1, and batEn1 corresponds to downstream port 2.<br>The default value for these bits are loaded at the de-assertion of reset with the value of PWRCTL/BATEN[3:0].<br>When in I2C/SMBus mode the bits in this field may be over-written by EEPROM contents or by an SMBus host. |

## 8.5.9 Device Removable Configuration Register

**Figure 10. Register Offset 7h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | X | X | X | X |

**Table 14. Bit Descriptions – Device Removable Configuration Register**

| Bit | Field      | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | customRmbl | RW    | Custom Removable. This bit controls the ability to write to the port removable bits, port used bits, and USB2_ONLY bits.<br>0 = rmb[3:0], used[3:0], and USB2_ONLY[3:0] are read only and the values are loaded from the OTP ROM<br>1 = rmb[3:0], used[3:0], and USB2_ONLY[3:0] are read/write and can be loaded by EEPROM or written by SMBus<br>This bit may be written simultaneously with rmb[3:0].                                                                                                                                                                          |
| 6:4 | RSVD       | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 3:0 | rmb[3:0]   | RO/RW | Removable. The bits in this field indicate whether a device attached to downstream ports 4 through 1 are removable or permanently attached.<br>0 = The device attached to the port is not removable<br>1 = The device attached to the port is removable<br>Each bit corresponds directly to a downstream port n + 1, i.e. rmb0 corresponds to downstream port 1, rmb1 corresponds to downstream port 2, etc.<br>This field is read only unless the customRmbl bit is set to 1. Otherwise the value of this field reflects the inverted values of the OTP ROM non_rmb[3:0] field. |

## 8.5.10 Port Used Configuration Register

**Figure 11. Register Offset 8h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |

**Table 15. Bit Descriptions – Port Used Configuration Register**

| Bit | Field     | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|-----------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | RSVD      | RO    | Reserved. Read only.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 3:0 | used[3:0] | RO/RW | Used. The bits in this field indicate whether a port is enabled.<br>0 = The port is not used or disabled<br>1 = The port is used or enabled<br>Each bit corresponds directly to a downstream port, i.e. used0 corresponds to downstream port 1, used1 corresponds to downstream port 2, etc. All combinations are supported with the exception of both ports 1 and 3 marked as disabled. This field is read only unless the customRmbl bit is set to 1. When the corresponding USB2_ONLY bit is set, the USB2 port will be used and enabled regardless of the bit programmed into this field. |

### 8.5.11 Device Configuration Register 2

**Figure 12. Register Offset Ah**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | X | 1 | 0 | 0 | 0 | 0 |

**Table 16. Bit Descriptions – Device Configuration Register 2**

| Bit | Field            | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----|------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | Reserved         | RO    | Reserved. Read-only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 6   | customBCfeatures | RW    | Custom Battery Charging Feature Enable. This bit controls the ability to write to the battery charging feature configuration controls.<br>0 = The HiCurAcpModeEn is read only and the values are loaded from the OTP ROM.<br>1 = The HiCurAcpModeEn bit is read/write and can be loaded by EEPROM or written by SMBus.<br>This bit may be written simultaneously with HiCurAcpModeEn.                                                                                                                                                                                                                                     |
| 5   | pwrctlPol        | RW    | Power enable polarity. This bit is loaded at the de-assertion of reset with the value of the PWRCTL_POL pin.<br>0 = PWRCTL polarity is active low<br>1 = PWRCTL polarity is active high<br>When the TUSB8043 is in I <sup>2</sup> C mode, the TUSB8043 loads this bit from the contents of the EEPROM.<br>When the TUSB8043 is in SMBUS mode, the value may be over-written by an SMBus host.                                                                                                                                                                                                                             |
| 4   | HiCurAcpModeEn   | RO/RW | High-current ACP mode enable. This bit enables the high-current tablet charging mode when the automatic battery charging mode is enabled for downstream ports.<br>0 = High current divider mode disabled . High current is ACP2 (default)<br>1 = High current divider mode enabled. High current mode is ACP3<br>This bit is read only unless the customBCfeatures bit is set to 1. If customBCfeatures is 0, the value of this bit reflects the value of the OTP ROM HiCurAcpModeEn bit.                                                                                                                                 |
| 3:2 | Reserved         | RW    | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 1   | autoModeEnz      | RW    | Automatic Mode Enable. This bit is loaded at the de-assertion of reset with the value of the AUTOENZ/HS_SUSPEND pin.<br>The automatic mode only applies to downstream ports with battery charging enabled when the upstream port is not connected. Under these conditions:<br>0 = Automatic mode battery charging features are enabled.<br>1 = Automatic mode is disabled; only Battery Charging DCP and CDP mode is supported.<br>NOTE: When the upstream port is connected, Battery Charging CDP mode will be supported on all ports that are enabled for battery charging support regardless of the value of this bit. |
| 0   | RSVD             | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## 8.5.12 USB 2.0 Port Polarity Control Register

**Figure 13. Register Offset Bh**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 17. Bit Descriptions – USB 2.0 Port Polarity Control Register**

| Bit | Field          | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|----------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | customPolarity | RW    | Custom USB 2.0 Polarity. This bit controls the ability to write the p[4:0]_usb2pol bits.<br>0 = The p[4:0]_usb2pol bits are read only and the values are loaded from the OTP ROM.<br>1 = The p[4:0]_usb2pol bits are read/write and can be loaded by EEPROM or written by SMBus.<br>This bit may be written simultaneously with the p[4:0]_usb2pol bits                                                                       |
| 6:5 | RSVD           | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                     |
| 4   | p4_usb2pol     | RO/RW | Downstream Port 4 DM/DP Polarity. This controls the polarity of the port.<br>0 = USB 2.0 port polarity is as documented by the pin out<br>1 = USB 2.0 port polarity is swapped from that documented in the pin out, i.e. DM becomes DP, and DP becomes DM.<br>This bit is read only unless the customPolarity bit is set to 1. If customPolarity is 0 the value of this bit reflects the value of the OTP ROM p4_usb2pol bit. |
| 3   | p3_usb2pol     | RO/RW | Downstream Port 3 DM/DP Polarity. This controls the polarity of the port.<br>0 = USB 2.0 port polarity is as documented by the pin out<br>1 = USB 2.0 port polarity is swapped from that documented in the pin out, i.e. DM becomes DP, and DP becomes DM.<br>This bit is read only unless the customPolarity bit is set to 1. If customPolarity is 0 the value of this bit reflects the value of the OTP ROM p3_usb2pol bit. |
| 2   | p2_usb2pol     | RO/RW | Downstream Port 2 DM/DP Polarity. This controls the polarity of the port.<br>0 = USB 2.0 port polarity is as documented by the pin out<br>1 = USB 2.0 port polarity is swapped from that documented in the pin out, i.e. DM becomes DP, and DP becomes DM.<br>This bit is read only unless the customPolarity bit is set to 1. If customPolarity is 0 the value of this bit reflects the value of the OTP ROM p2_usb2pol bit. |
| 1   | p1_usb2pol     | RORW  | Downstream Port 1 DM/DP Polarity. This controls the polarity of the port.<br>0 = USB 2.0 port polarity is as documented by the pin out<br>1 = USB 2.0 port polarity is swapped from that documented in the pin out, i.e. DM becomes DP, and DP becomes DM.<br>This bit is read only unless the customPolarity bit is set to 1. If customPolarity is 0 the value of this bit reflects the value of the OTP ROM p1_usb2pol bit. |
| 0   | p0_usb2pol     | RO/RW | Upstream Port DM/DP Polarity. This controls the polarity of the port.<br>0 = USB 2.0 port polarity is as documented by the pin out<br>1 = USB 2.0 port polarity is swapped from that documented in the pin out, i.e. DM becomes DP, and DP becomes DM.<br>This bit is read only unless the customPolarity bit is set to 1. If customPolarity is 0 the value of this bit reflects the value of the OTP ROM p0_usb2pol bit.     |

### 8.5.13 UUID Registers

**Figure 14. Register Offset 10h-1Fh**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | X | X | X | X | X | X | X | X |

**Table 18. Bit Descriptions – UUID Byte N Register**

| Bit | Field       | Type | Description                                                                                                                                                                                                                     |
|-----|-------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | uuidByte[n] | RO   | UUID byte N. The UUID returned in the Container ID descriptor. The value of this register is provided by the device and is meets the UUID requirements of Internet Engineering Task Force (IETF) RFC 4122 A UUID URN Namespace. |

### 8.5.14 Language ID LSB Register

**Figure 15. Register Offset 20h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |

**Table 19. Bit Descriptions – Language ID LSB Register**

| Bit | Field     | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----|-----------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | langIdLsb | RO/RW | Language ID least significant byte. This register contains the value returned in the LSB of the LANGID code in string index 0. The TUSB8043 only supports one language ID. The default value of this register is 09h representing the LSB of the LangID 0409h indicating English United States.<br>When customStrings is 1, this field may be over-written by the contents of an attached EEPROM or by an SMBus host. |

### 8.5.15 Language ID MSB Register

**Figure 16. Register Offset 21h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 20. Bit Descriptions – Language ID MSB Register**

| Bit | Field     | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----|-----------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | langIdMsb | RO/RW | Language ID most significant byte. This register contains the value returned in the MSB of the LANGID code in string index 0. The TUSB8043 only supports one language ID. The default value of this register is 04h representing the MSB of the LangID 0409h indicating English United States.<br>When customStrings is 1, this field may be over-written by the contents of an attached EEPROM or by an SMBus host. |

## 8.5.16 Serial Number String Length Register

**Figure 17. Register Offset 22h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |

**Table 21. Bit Descriptions – Serial Number String Length Register**

| Bit | Field           | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|-----------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:6 | RSVD            | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 5:0 | serNumStringLen | RO/RW | Serial number string length. The string length in bytes for the serial number string. The default value is 18h indicating that a 24 byte serial number string is supported. The maximum string length is 32 bytes. When customSernum is 1, this field may be over-written by the contents of an attached EEPROM or by an SMBus host. When the field is non-zero, a serial number string of serNumbStringLen bytes is returned at string index 1 from the data contained in the Serial Number String registers. |

## 8.5.17 Manufacturer String Length Register

**Figure 18. Register Offset 23h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 22. Bit Descriptions – Manufacturer String Length Register**

| Bit | Field        | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|--------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RSVD         | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 6:0 | mfgStringLen | RO/RW | Manufacturer string length. The string length in bytes for the manufacturer string. The default value is 0, indicating that a manufacturer string is not provided. The maximum string length is 64 bytes. When customStrings is 1, this field may be over-written by the contents of an attached EEPROM or by an SMBus host. When the field is non-zero, a manufacturer string of mfgStringLen bytes is returned at string index 3 from the data contained in the Manufacturer String registers. |

## 8.5.18 Product String Length Register

**Figure 19. Register Offset 24h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 23. Bit Descriptions – Product String Length Register**

| Bit | Field         | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----|---------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RSVD          | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 6:0 | prodStringLen | RO/RW | Product string length. The string length in bytes for the product string. The default value is 0, indicating that a product string is not provided. The maximum string length is 64 bytes. When customStrings is 1, this field may be over-written by the contents of an attached EEPROM or by an SMBus host. When the field is non-zero, a product string of prodStringLen bytes is returned at string index 3 from the data contained in the Product String registers. |



### 8.5.19 Device Configuration Register 3

**Figure 20. Register Offset 25h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 24. Bit Descriptions – Device Configuration Register 3**

| Bit | Field       | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----|-------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:5 | RSVD        | RO   | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                            |
| 4   | USB2.0_only | RW   | USB 2.0 hub reports as 2.0 only. This bit disables the USB 2.0 hub from reporting 5Gbps support in the wSpeedsSupported field of the USB SS BOS SS device capability descriptor. This bit will also disable the USB3.0 hub.<br>This bit is read/write but the read value returned is the Boolean OR of this bit and the corresponding eFuse bit. If either bit is set, this feature is enabled.                                      |
| 3   | Reserved    | RO   | Switch to reserved                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 2   | I2C_100k    | R/W  | I2C 100kHz. This bit controls the clock rate of the I2C master for both USB to I2C requests. The EEPROM reads will occur at 400K unless eFuse is used to set the rate to 100k.<br>This bit is read/write but the read value returned is the Boolean OR of this bit and the corresponding eFuse bit. If either bit is set, this feature is enabled.                                                                                   |
| 1   | Galaxy_Enz  | R/W  | Disable Galaxy compatible modes. When this field is high, Galaxy charging compatible mode will not be included in AUTOMODE charger sequence.<br>This bit is read/write but the read value returned is the Boolean OR of this bit and the corresponding eFuse bit. If either bit is set, this feature is disabled.                                                                                                                    |
| 0   | FullAutoEn  | R/W  | Enable all divider battery charging modes. When automode is enabled and this bit is set, any DS port enabled for battery charging will attempt all divider battery charging modes before DCP, starting with the highest current option.<br>The bit is writable, but the value read back is the Boolean OR of this bit and the corresponding eFuse control.<br>If either bit is set, eFuse or this register, this feature is enabled. |

### 8.5.20 USB 2.0 Only Port Register

**Figure 21. Register Offset 26h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 25. Bit Descriptions – USB 2.0 Only Port Register**

| Bit | Field          | Type  | Description                                                                                                                                                                                                                                                                                                                                                                                        |
|-----|----------------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | RSVD           | RO    | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                          |
| 3:0 | USB2_ONLY[3:0] | RO/RW | USB 2.0 Only Ports. The bits in this field primarily indicate whether a port is enabled only for USB 2.0 operation. This field is read-only unless customRmbl bit is set. Also, these bits will override the corresponding USED bit.<br>A value of 0 indicates the hub port is enabled for both USB 3.1 and USB 2.0.<br>A value of 1 indicates the hub port is enabled only for USB 2.0 operation. |

### 8.5.21 Serial Number String Registers

**Figure 22. Register Offset 30h-4Fh**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | X | X | x | x | x | x | x | x |

**Table 26. Bit Descriptions – Serial Number Registers**

| Bit | Field           | Type  | Description                                                                                                                                                                                                                                                            |
|-----|-----------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | serialNumber[n] | RO/RW | Serial Number byte N. The serial number returned in the Serial Number string descriptor at string index 1. The default value of these registers is assigned by TI. When customSernum is 1, these registers may be over-written by EEPROM contents or by an SMBus host. |

## 8.5.22 Manufacturer String Registers

**Figure 23. Register Offset 50h-8Fh**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 27. Bit Descriptions – Manufacturer String Registers**

| Bit | Field            | Type | Description                                                                                                                                                                                                                                                                                                                                            |
|-----|------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | mfgStringByte[n] | RW   | Manufacturer string byte N. These registers provide the string values returned for string index 3 when mfgStringLen is greater than 0. The number of bytes returned in the string is equal to mfgStringLen. The programmed data should be in UNICODE UTF-16LE encodings as defined by The Unicode Standard, Worldwide Character Encoding, Version 5.0. |

## 8.5.23 Product String Registers

**Figure 24. Register Offset 90h-CFh**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 28. Bit Descriptions – Product String Byte N Register**

| Bit | Field             | Type  | Description                                                                                                                                                                                                                                                                                                                                         |
|-----|-------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:0 | prodStringByte[n] | RO/RW | Product string byte N. These registers provide the string values returned for string index 2 when prodStringLen is greater than 0. The number of bytes returned in the string is equal to prodStringLen. The programmed data should be in UNICODE UTF-16LE encodings as defined by The Unicode Standard, Worldwide Character Encoding, Version 5.0. |

## 8.5.24 Additional Feature Configuration Register

**Figure 25. Register Offset F0h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 29. Bit Descriptions – Additional Feature Configuration Register**

| Bit | Field         | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|---------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:5 | Reserved      | RW   | Reserved. This field defaults to 3'b000 and must not be changed.                                                                                                                                                                                                                                                                                                                                                                                                            |
| 4   | stsOutputEn   | RW   | Status output enable. This field when set enables of the Status output signals, HS_UP, HS_SUSPEND, SS_UP, SS_SUSPEND.<br>0 = STS outputs are disabled.<br>1 = STS outputs are enabled.<br>This bit may be loaded by EEPROM or over-written by a SMBUS host.                                                                                                                                                                                                                 |
| 3:1 | pwronTime     | RW   | Power On Delay Time. When the efuse_pwronTime field is all 0s, this field sets the delay time from the removal disable of PWRCTL to the enable of PWRCTL when transitioning battery charging modes. For example, when disabling the power on a transition from ACP to DCP Mode. The nominal timing is defined as follows:<br><br>$TPWRON\_EN = (pwronTime \times 1) \times 200 \text{ ms} \quad (1)$ This field may be over-written by EEPROM contents or by an SMBus host. |
| 0   | usb3spreadDis | RW   | USB3 Spread Spectrum Disable. This bit allows firmware to disable the spread spectrum function of the USB3 phy PLL.<br>0 = Spread spectrum function is enabled<br>1 = Spread spectrum function is disabled<br>This bit may be loaded by EEPROM or over-written by a SMBUS host.                                                                                                                                                                                             |

## 8.5.25 SMBus Device Status and Command Register

**Figure 26. Register Offset F8h**

| Bit No.     | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---|---|---|---|---|---|---|---|
| Reset State | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**Table 30. Bit Descriptions – SMBus Device Status and Command Register**

| Bit | Field     | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-----------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:2 | RSVD      | RO   | Reserved. Read only, returns 0 when read.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 1   | smbusRst  | RSU  | SMBus interface reset. This bit loads the registers back to their GRSTz values. Note, that since this bit can only be set when in SMBus mode the cfgActive bit is also reset to 1. When software sets this bit it must reconfigure the registers as necessary. This bit is set by writing a 1 and is cleared by hardware on completion of the reset. A write of 0 has no effect.                                                                                                                                                                            |
| 0   | cfgActive | RCU  | Configuration active. This bit indicates that configuration of the TUSB8043 is currently active. The bit is set by hardware when the device enters the I2C or SMBus mode. The TUSB8043 shall not connect on the upstream port while this bit is 1. When in I2C mode, the bit is cleared by hardware when the TUSB8043 exits the I2C mode. When in the SMBus mode, this bit must be cleared by the SMBus host in order to exit the configuration mode and allow the upstream port to connect. The bit is cleared by a writing 1. A write of 0 has no effect. |

## 9 Applications and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.


### 9.1 Application Information

The TUSB8043 is a four-port USB 3.1 Gen1 compliant hub. It provides simultaneous SuperSpeed USB and high-speed/full-speed connections on the upstream port and provides SuperSpeed USB, high-speed, full-speed, or low speed connections on the downstream port. The TUSB8043 can be used in any application that needs additional USB compliant ports. For example, a specific notebook may only have two downstream USB ports. By using the TUSB8043, the notebook can increase the downstream port count to five.

### 9.2 Typical Application

#### 9.2.1 Discrete USB Hub Product

A common application for the TUSB8043 is as a self powered standalone USB hub product. The product is powered by an external 5V DC Power adapter. In this application, using a USB cable TUSB8043 upstream port is plugged into a USB Host controller. The downstream ports of the TUSB8043 are exposed to users for connecting USB hard drives, cameras, flash drives, and so forth.

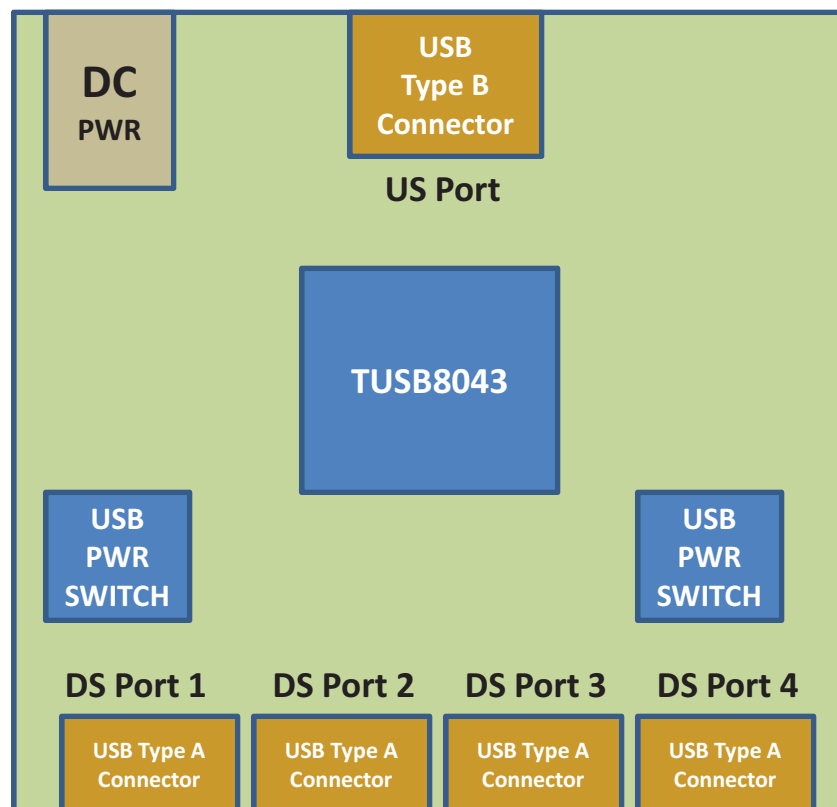

**Figure 27. Discrete USB Hub Product**

## Typical Application (continued)

### 9.2.1.1 Design Requirements


**Table 31. Design Parameters**

| DESIGN PARAMETER                                          | EXAMPLE VALUE                 |
|-----------------------------------------------------------|-------------------------------|
| VDD Supply                                                | 1.1 V                         |
| VDD33 Supply                                              | 3.3 V                         |
| Upstream Port USB Support (SS, HS, FS)                    | SS, HS, FS                    |
| Downstream Port 1 USB Support (SS, HS, FS, LS)            | SS, HS, FS, LS                |
| Downstream Port 2 USB Support (SS, HS, FS, LS)            | SS, HS, FS, LS                |
| Downstream Port 3 USB Support (SS, HS, FS, LS)            | SS, HS, FS, LS                |
| Downstream Port 4 USB Support (SS, HS, FS, LS)            | SS, HS, FS, LS                |
| Number of Removable external exposed Downstream Ports     | 4                             |
| Number of Non-Removable external exposed Downstream Ports | 0                             |
| Full Power Management of Downstream Ports                 | Yes. (FULLPWRMGMTZ = 0)       |
| Individual Control of Downstream Port Power Switch        | Yes. (GANGED = 0)             |
| Power Switch Enable Polarity                              | Active High. (PWRCTL_POL = 1) |
| Battery Charge Support for Downstream Port 1              | Yes                           |
| Battery Charge Support for Downstream Port 2              | Yes                           |
| Battery Charge Support for Downstream Port 3              | Yes                           |
| Battery Charge Support for Downstream Port 4              | Yes                           |
| I2C EEPROM Support                                        | No                            |
| 24MHz Clock Source                                        | Crystal                       |

### 9.2.1.2 Detailed Design Procedure

#### 9.2.1.2.1 Upstream Port Implementation

The upstream of the TUSB8043 is connected to a USB3 Type B connector. This particular example has GANGED pin and FULLPWRMGMTZ pin pulled low which results in individual power support each downstream port. The VBUS signal from the USB3 Type B connector is feed through a voltage divider. The purpose of the voltage divider is to make sure the level meets USB\_VBUS input requirements

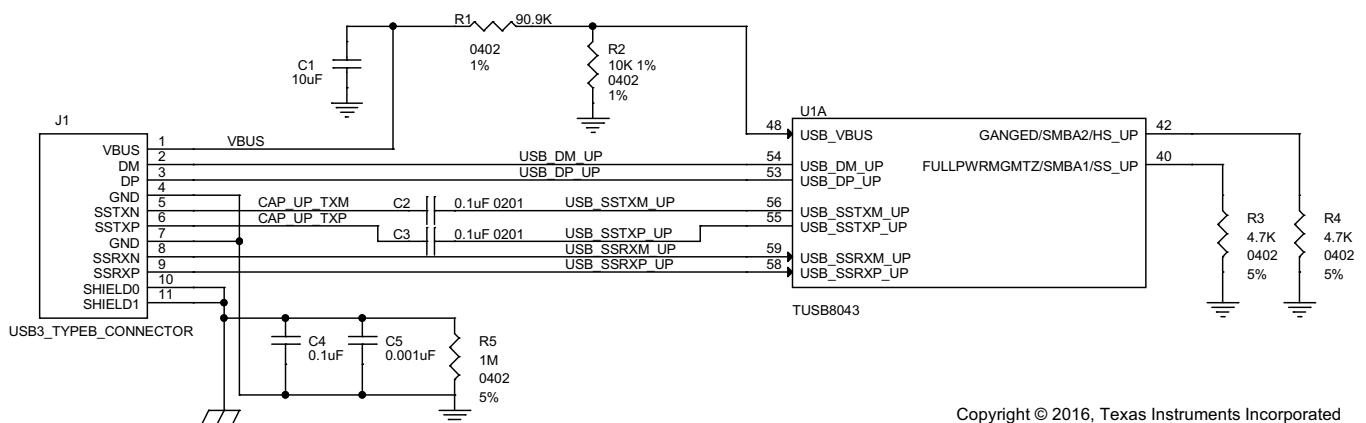
**Figure 28. Upstream Port Implementation**

## TUSB8043

SLLSEW4A – JUNE 2017 – REVISED AUGUST 2017

www.ti.com

### 9.2.1.2.2 Downstream Port 1 Implementation

The downstream port 1 of the TUSB8043 is connected to a USB3 Type A connector. With BATEN1 pin pulled up, Battery Charge support is enabled for Port 1. If Battery Charge support is not needed, then pull-up resistor on BATEN1 should be uninstalled.

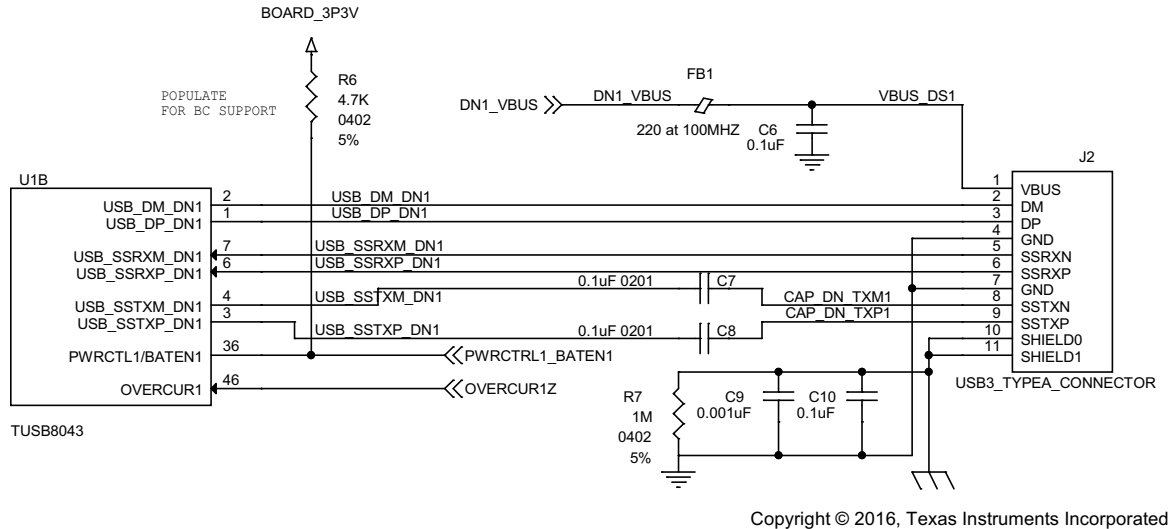


Figure 29. Downstream Port 1 Implementation

### 9.2.1.2.3 Downstream Port 2 Implementation

The downstream port 2 of the TUSB8043 is connected to a USB3 Type A connector. With BATEN2 pin pulled up, Battery Charge support is enabled for Port 2. If Battery Charge support is not needed, then pull-up resistor on BATEN2 should be uninstalled. For ferrite bead used on the VBUS connection, a lower resistance is recommended due to noticeable IR drop during high current charging modes. The isolation between the Type-A connectors shield ground and signal ground pins is not required. Some applications may have better ESD/EMI performance when the grounds are shorted together.


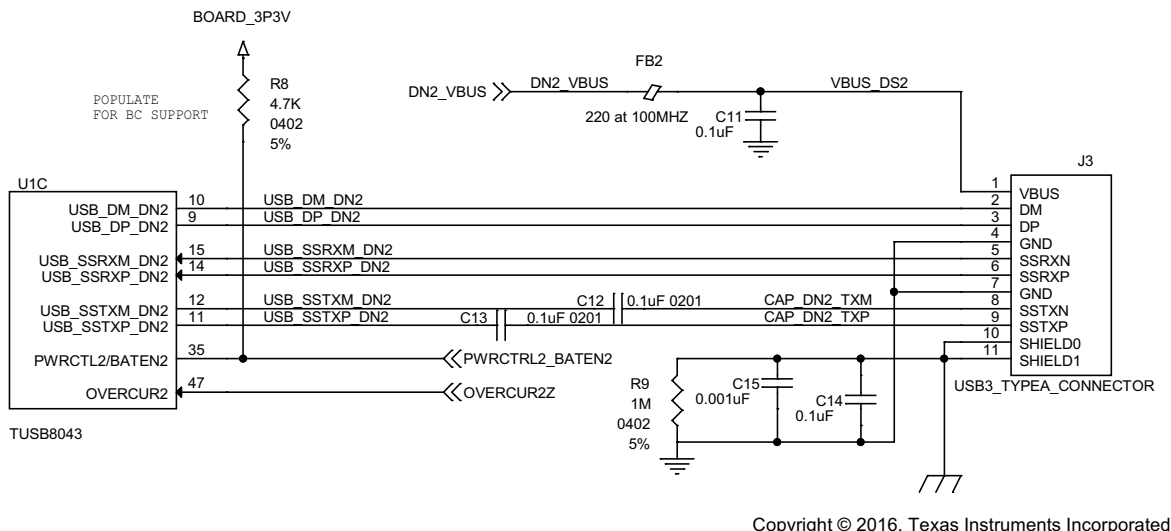


Figure 30. Downstream Port 2 Implementation



### 9.2.1.2.4 Downstream Port 3 Implementation


The downstream port3 of the TUSB8043 is connected to a USB3 Type A connector. With BATEN3 pin pulled up, Battery Charge support is enabled for Port 3. If Battery Charge support is not needed, then pull-up resistor on BATEN3 should be uninstalled. For ferrite bead used on the VBUS connection, a lower resistance is recommended due to noticeable IR drop during high current charging modes. The isolation between the Type-A connectors shield ground and signal ground pins is not required. Some applications may have better ESD/EMI performance when the grounds are shorted together.

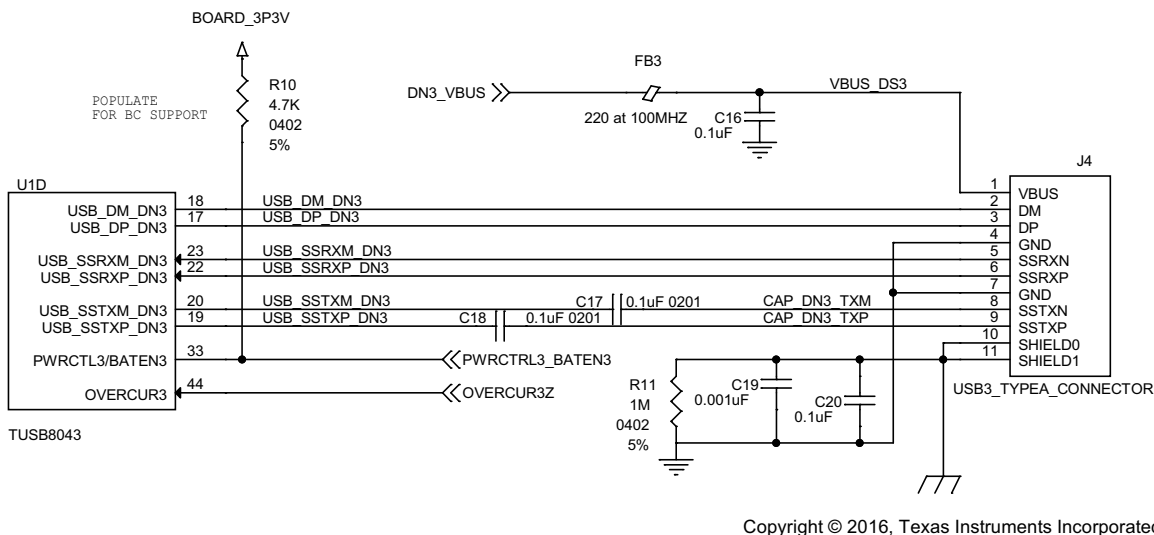

**Figure 31. Downstream Port 3 Implementation**

### 9.2.1.2.5 Downstream Port 4 Implementation


The downstream port 4 of the TUSB8043 is connected to a USB3 Type A connector. With BATEN4 pin pulled up, Battery Charge support is enabled for Port 4. If Battery Charge support is not needed, then pull-up resistor on BATEN4 should be uninstalled. For ferrite bead used on the VBUS connection, a lower resistance is recommended due to noticeable IR drop during high current charging modes. The isolation between the Type-A connectors shield ground and signal ground pins is not required. Some applications may have better ESD/EMI performance when the grounds are shorted together.

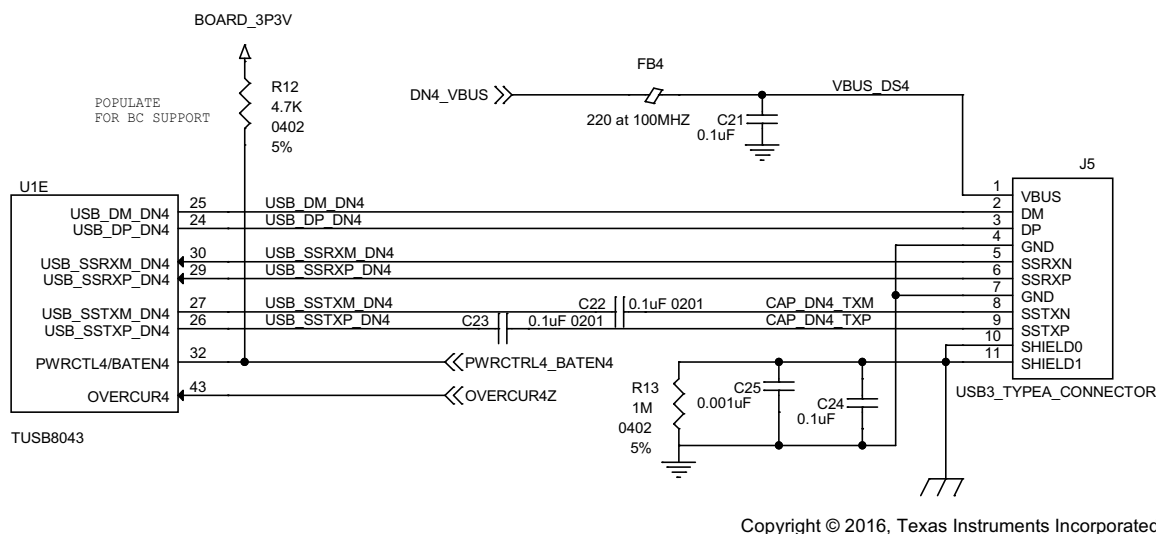

**Figure 32. Downstream Port 4 Implementation**

### 9.2.1.2.6 VBUS Power Switch Implementation


This particular example uses the Texas Instruments [TPS2561](#) Dual Channel Precision Adjustable Current-Limited power switch. For details on this power switch or other power switches available from Texas Instruments, refer to the Texas Instruments website.

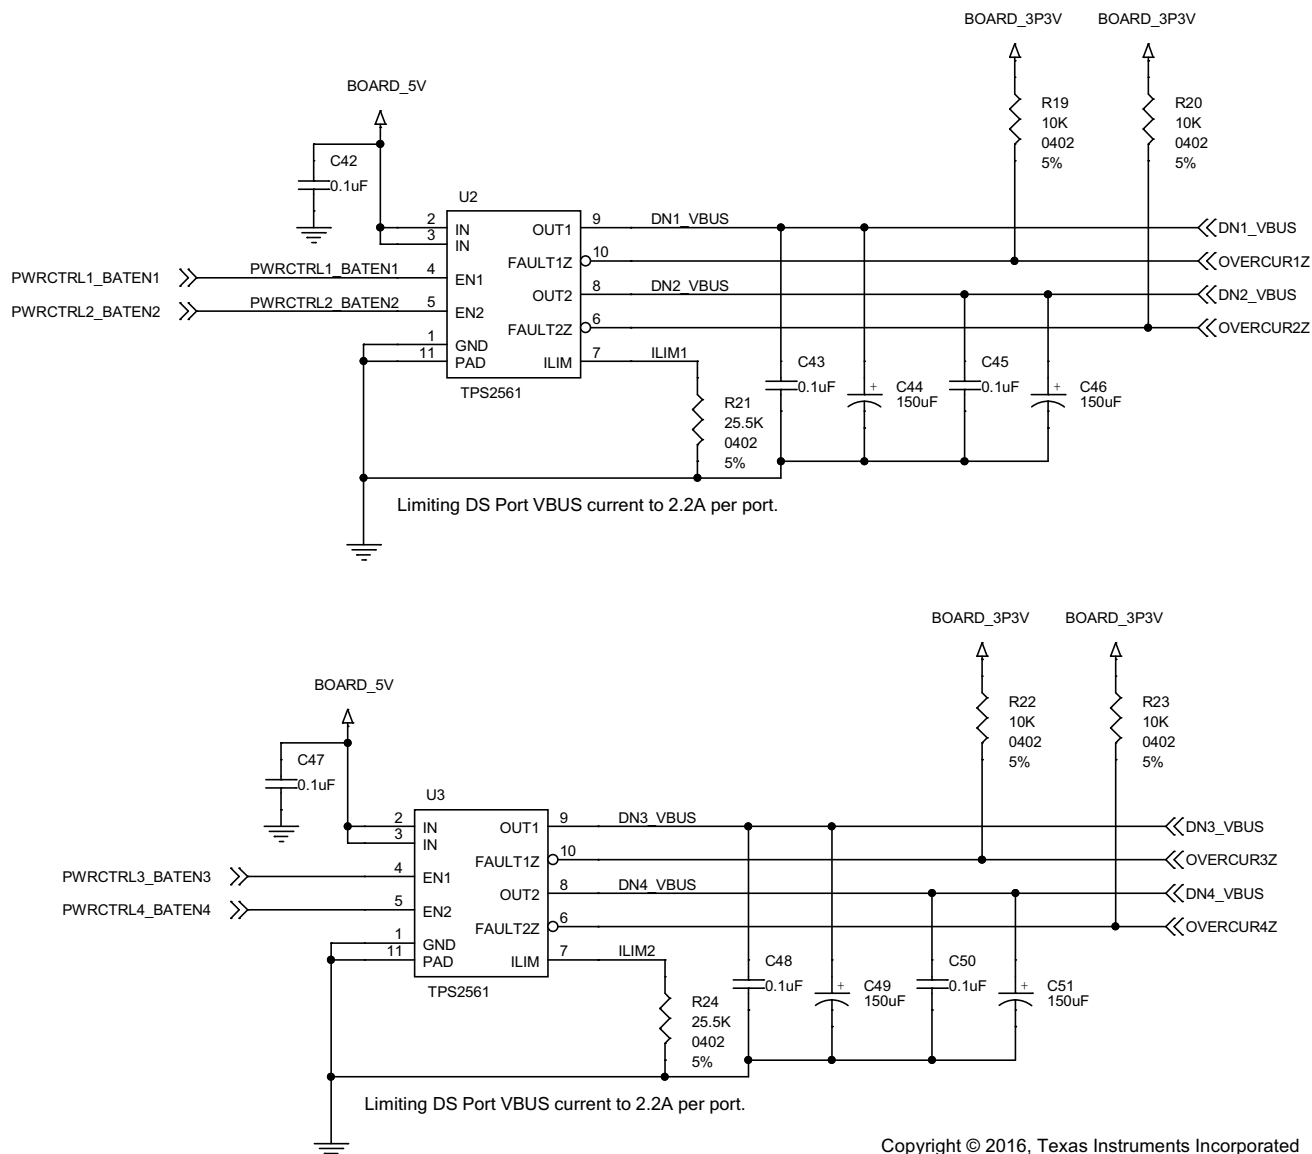

**Figure 33. VBUS Power Switch Implementation**

### 9.2.1.2.7 Clock, Reset, and Misc

The PWRCTL\_POL is left unconnected which results in active high power enable (PWRCTL1, PWRCTL2, PWRCTL3, and PWRCTL4) for a USB VBUS power switch. SMBUSz pin is also left unconnected which will select I2C mode. Both PWRCTL\_POL and SMBUSz pins have internal pull-ups. The 1  $\mu$ F capacitor on the GRSTN pin can only be used if the VDD11 supply is stable before the VDD33 supply. The depending on the supply ramp of the two supplies the capacitor size may have to be adjusted.

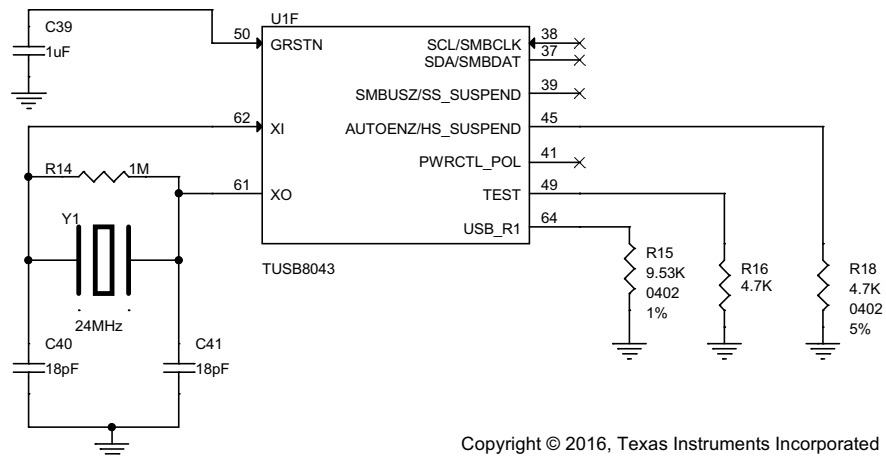


**Figure 34. Clock, Reset, and Misc**

## TUSB8043

SLLSEW4A – JUNE 2017 – REVISED AUGUST 2017

[www.ti.com](http://www.ti.com)

### 9.2.1.2.8 TUSB8043 Power Implementation

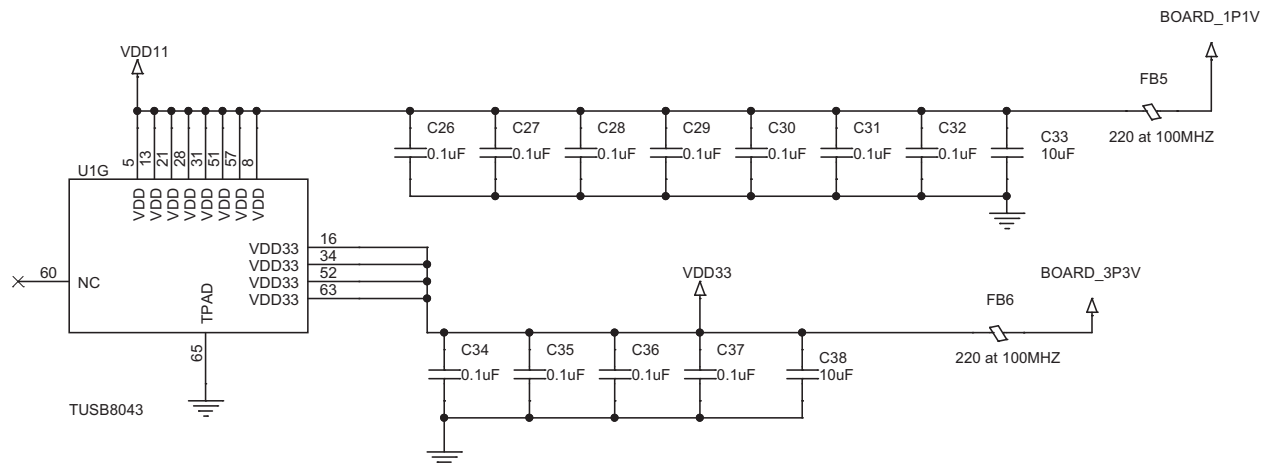

**Figure 35. TUSB8043 Power Implementation**

### 9.2.1.3 Application Curves

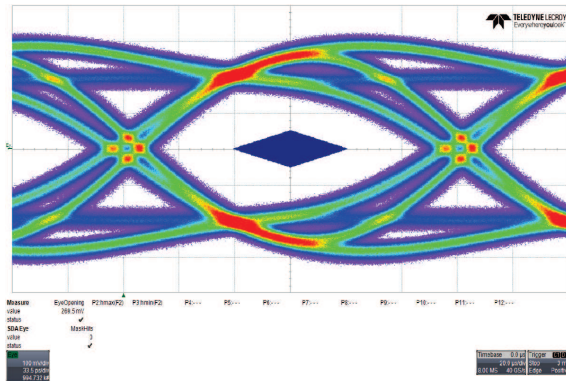


Figure 36. Upstream Port

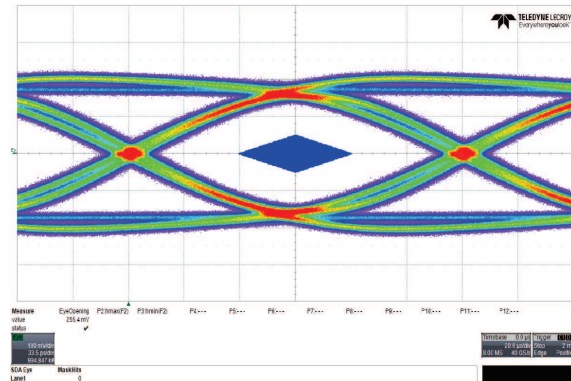


Figure 37. Downstream Port 1

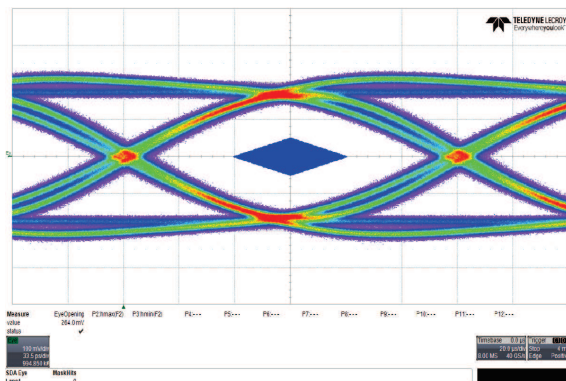


Figure 38. Downstream Port 2

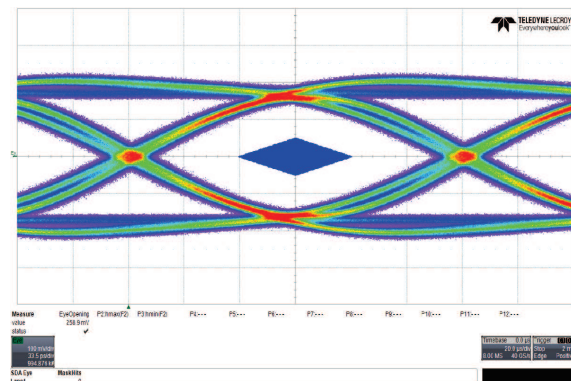


Figure 39. Downstream Port 3

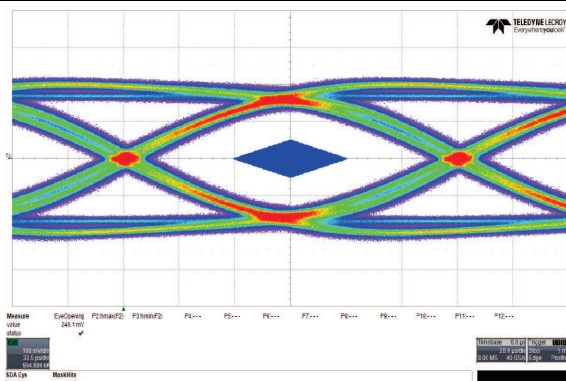


Figure 40. Downstream Port 4



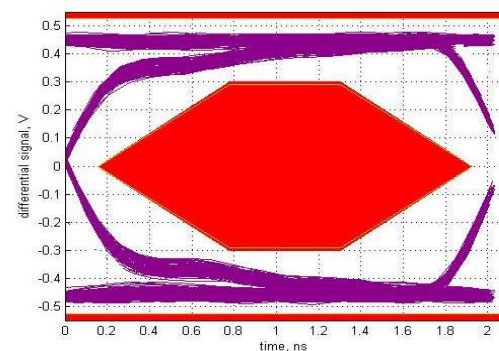



Figure 41. High-Speed Upstream Port

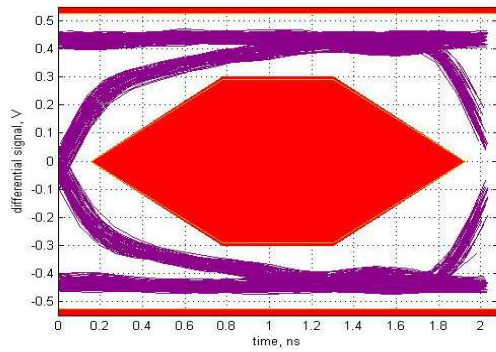


**Figure 42. High-Speed Downstream Port 1**

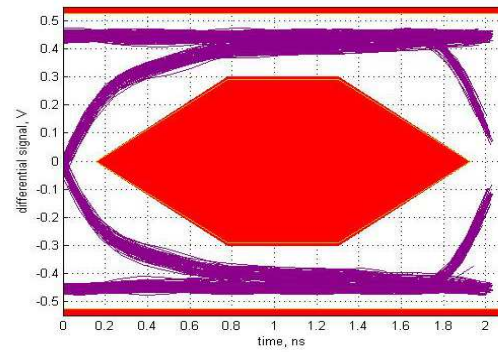

**Figure 43. High-Speed Downstream Port 2**

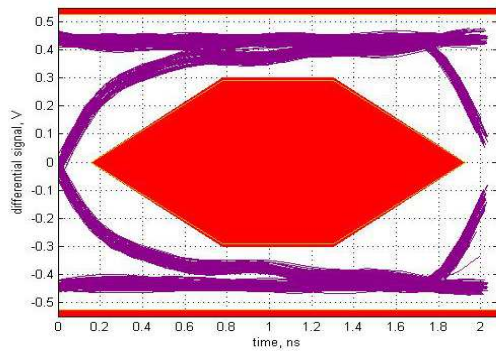

**Figure 44. High-Speed Downstream Port 3**

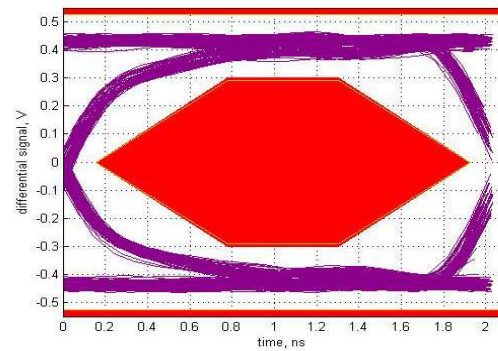

**Figure 45. High-Speed Downstream Port 4**

## 10 Power Supply Recommendations

### 10.1 TUSB8043 Power Supply

$V_{DD}$  should be implemented as a single power plane, as should  $V_{DD33}$ .

- The  $V_{DD}$  pins of the TUSB8043 supply 1.1 V (nominal) power to the core of the TUSB8043. This power rail can be isolated from all other power rails by a ferrite bead to reduce noise.
- The DC resistance of the ferrite bead on the core power rail can affect the voltage provided to the device due to the high current draw on the power rail. The output of the core voltage regulator may need to be adjusted to account for this or a ferrite bead with low DC resistance (less than 0.05  $\Omega$ ) can be selected.
- The  $V_{DD33}$  pins of the TUSB8043 supply 3.3 V power rail to the I/O of the TUSB8043. This power rail can be isolated from all other power rails by a ferrite bead to reduce noise.
- All power rails require a 10  $\mu$ F capacitor or 1  $\mu$ F capacitors for stability and noise immunity. These bulk capacitors can be placed anywhere on the power rail. The smaller decoupling capacitors should be placed as close to the TUSB8043 power pins as possible with an optimal grouping of two of differing values per pin.

### 10.2 Downstream Port Power

- The downstream port power, VBUS, must be supplied by a source capable of supplying 5V and up to 900 mA per port. Downstream port power switches can be controlled by the TUSB8043 signals. It is also possible to leave the downstream port power always enabled.
- A large bulk low-ESR capacitor of 22  $\mu$ F or larger is required on each downstream port's VBUS to limit in-rush current.
- The ferrite beads on the VBUS pins of the downstream USB port connections are recommended for both ESD and EMI reasons. A 0.1 $\mu$ F capacitor on the USB connector side of the ferrite provides a low impedance path to ground for fast rise time ESD current that might have coupled onto the VBUS trace from the cable.

### 10.3 Ground

It is recommended that only one board ground plane be used in the design. This provides the best image plane for signal traces running above the plane. The thermal pad of the TUSB8043 and any of the voltage regulators should be connected to this plane with vias. An earth or chassis ground is implemented only near the USB port connectors on a different plane for EMI and ESD purposes.



## 11 Layout

### 11.1 Layout Guidelines

#### 11.1.1 Placement

1. 9.53K +/-1% resistor connected to pin USB\_R1 should be placed as close as possible to the TUSB8043.
2. A 0.1  $\mu$ F should be placed as close as possible on each VDD and VDD33 power pin.
3. The 100 nF capacitors on the SSTXP and SSTXM nets should be placed close to the USB connector (Type A, Type B, and so forth).
4. The ESD and EMI protection devices (if used) should also be placed as close as possible to the USB connector.
5. If a crystal is used, it must be placed as close as possible to the TUSB8043 XI and XO pins.
6. Place voltage regulators as far away as possible from the TUSB8043, the crystal, and the differential pairs.
7. In general, the large bulk capacitors associated with each power rail should be placed as close as possible to the voltage regulators.

#### 11.1.2 Package Specific

1. The TUSB8043 package has a 0.5-mm pin pitch.
2. The TUSB8043 package has a 6.0-mm x 6.0-mm thermal pad. This thermal pad must be connected to ground through a system of vias.
3. All vias under device, except for those connected to thermal pad, should be solder masked to avoid any potential issues with thermal pad layouts.

#### 11.1.3 Differential Pairs

This section describes the layout recommendations for all the TUSB8043 differential pairs: USB\_DP\_XX, USB\_DM\_XX, USB\_SSTXP\_XX, USB\_SSTXM\_XX, USB\_SSRXP\_XX, and USB\_SSRXM\_XX.

1. Must be designed with a differential impedance of  $90\ \Omega \pm 10\%$ .
2. In order to minimize cross talk, it is recommended to keep high speed signals away from each other. Each pair should be separated by at least 5 times the signal trace width. Separating with ground as depicted in the layout example will also help minimize cross talk.
3. Route all differential pairs on the same layer adjacent to a solid ground plane.
4. Do not route differential pairs over any plane split.
5. Adding test points will cause impedance discontinuity and will therefore negatively impact signal performance. If test points are used, they should be placed in series and symmetrically. They must not be placed in a manner that causes stub on the differential pair.
6. Avoid 90 degree turns in trace. The use of bends in differential traces should be kept to a minimum. When bends are used, the number of left and right bends should be as equal as possible and the angle of the bend should be  $\geq 135$  degrees. This will minimize any length mismatch caused by the bends and therefore minimize the impact bends have on EMI.
7. Minimize the trace lengths of the differential pair traces. The maximum recommended trace length for SS differential pair signals and USB 2.0 differential pair signals is eight inches. Longer trace lengths require very careful routing to assure proper signal integrity.
8. Match the etch lengths of the differential pair traces (i.e. DP and DM or SSRXP and SSRXM or SSTXP and SSTXM). There should be less than 5 mils difference between a SS differential pair signal and its complement. The USB 2.0 differential pairs should not exceed 50 mils relative trace length difference.
9. The etch lengths of the differential pair groups do not need to match (i.e. the length of the SSRX pair to that of the SSTX pair), but all trace lengths should be minimized.
10. Minimize the use of vias in the differential pair paths as much as possible. If this is not practical, make sure that the same via type and placement are used for both signals in a pair. Any vias used should be placed as close as possible to the TUSB8043 device.
11. To ease routing, the polarity of the SS differential pairs can be swapped. This means that SSTXP can be routed to SSTXM or SSRXM can be routed to SSRXP.




## Layout Guidelines (continued)

12. To ease routing of the USB2 DP and DM pair, the polarity of these pins can be swapped. If this is done, the appropriate Px\_usb2pol register, where x = 0, 1, 2, 3, or 4, must be set.
13. Do not place power fuses across the differential pair traces.

## 11.2 Layout Examples


### 11.2.1 Upstream Port

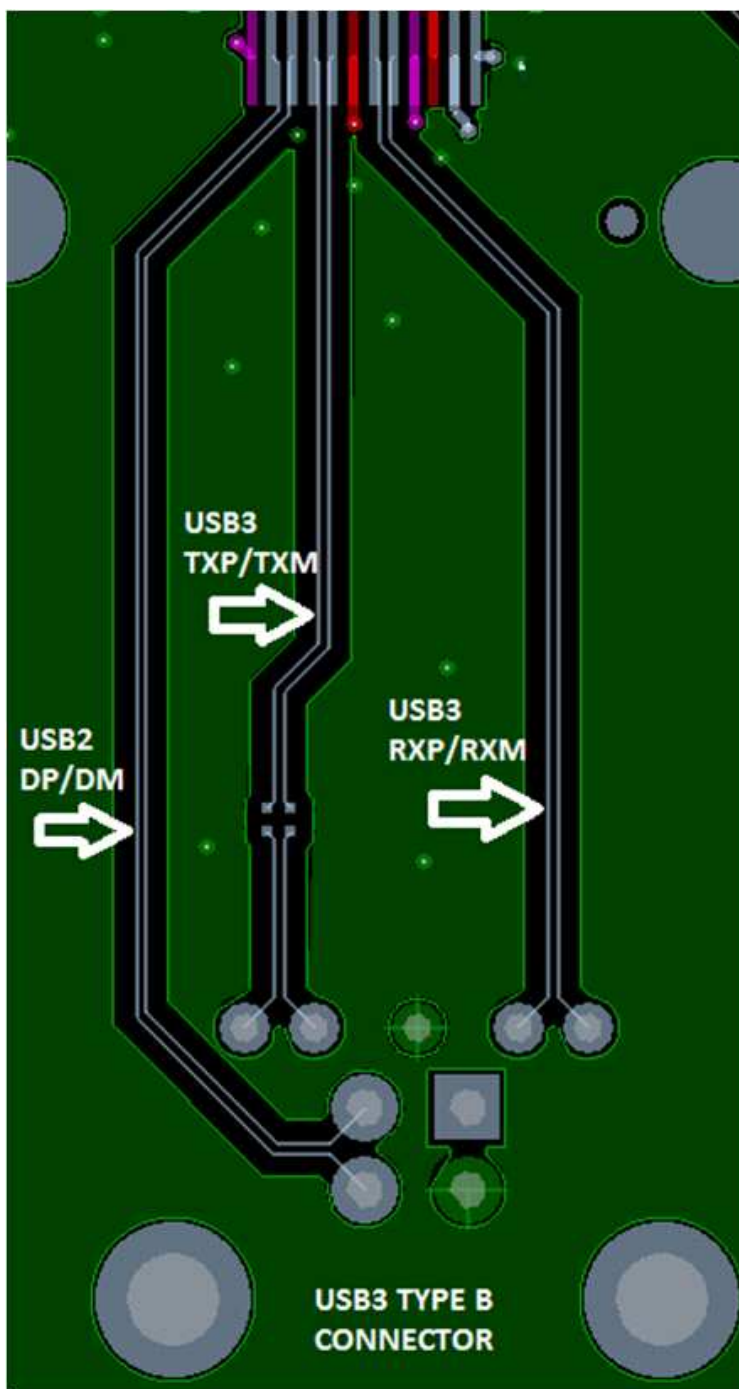

**Figure 46. Example Routing of Upstream Port**

## Layout Examples (continued)

### 11.2.2 Downstream Port

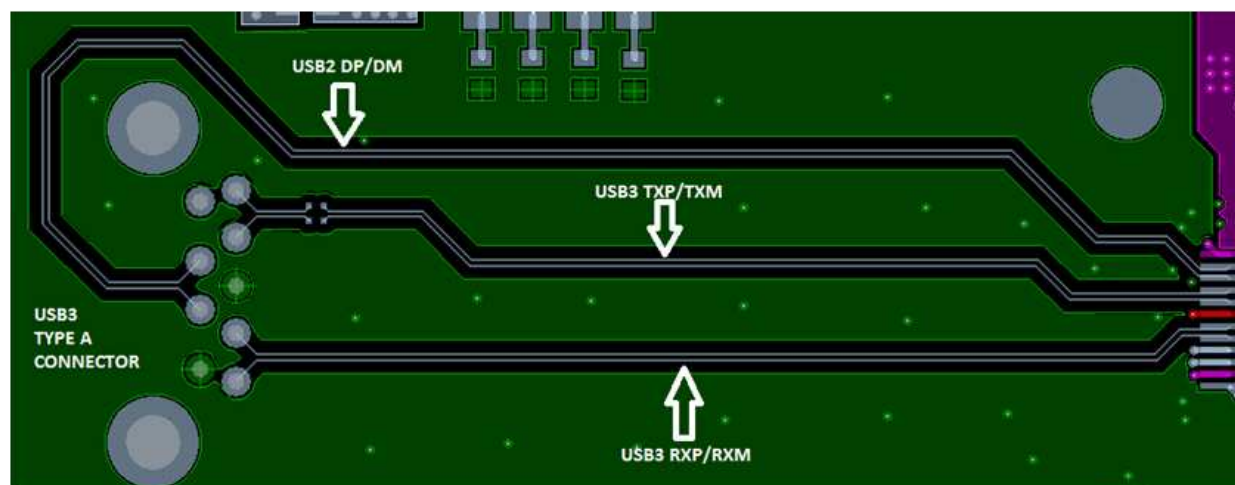

**Figure 47. Example Routing of Downstream Port**

The remaining three downstream ports routing can be similar to the example provided.

## 12 Device and Documentation Support

### 12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.3 Trademarks

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.


### 12.5 Glossary

[SLYZ022](#) — *TI Glossary*.


This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**RGC0064G****PACKAGE OUTLINE****VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

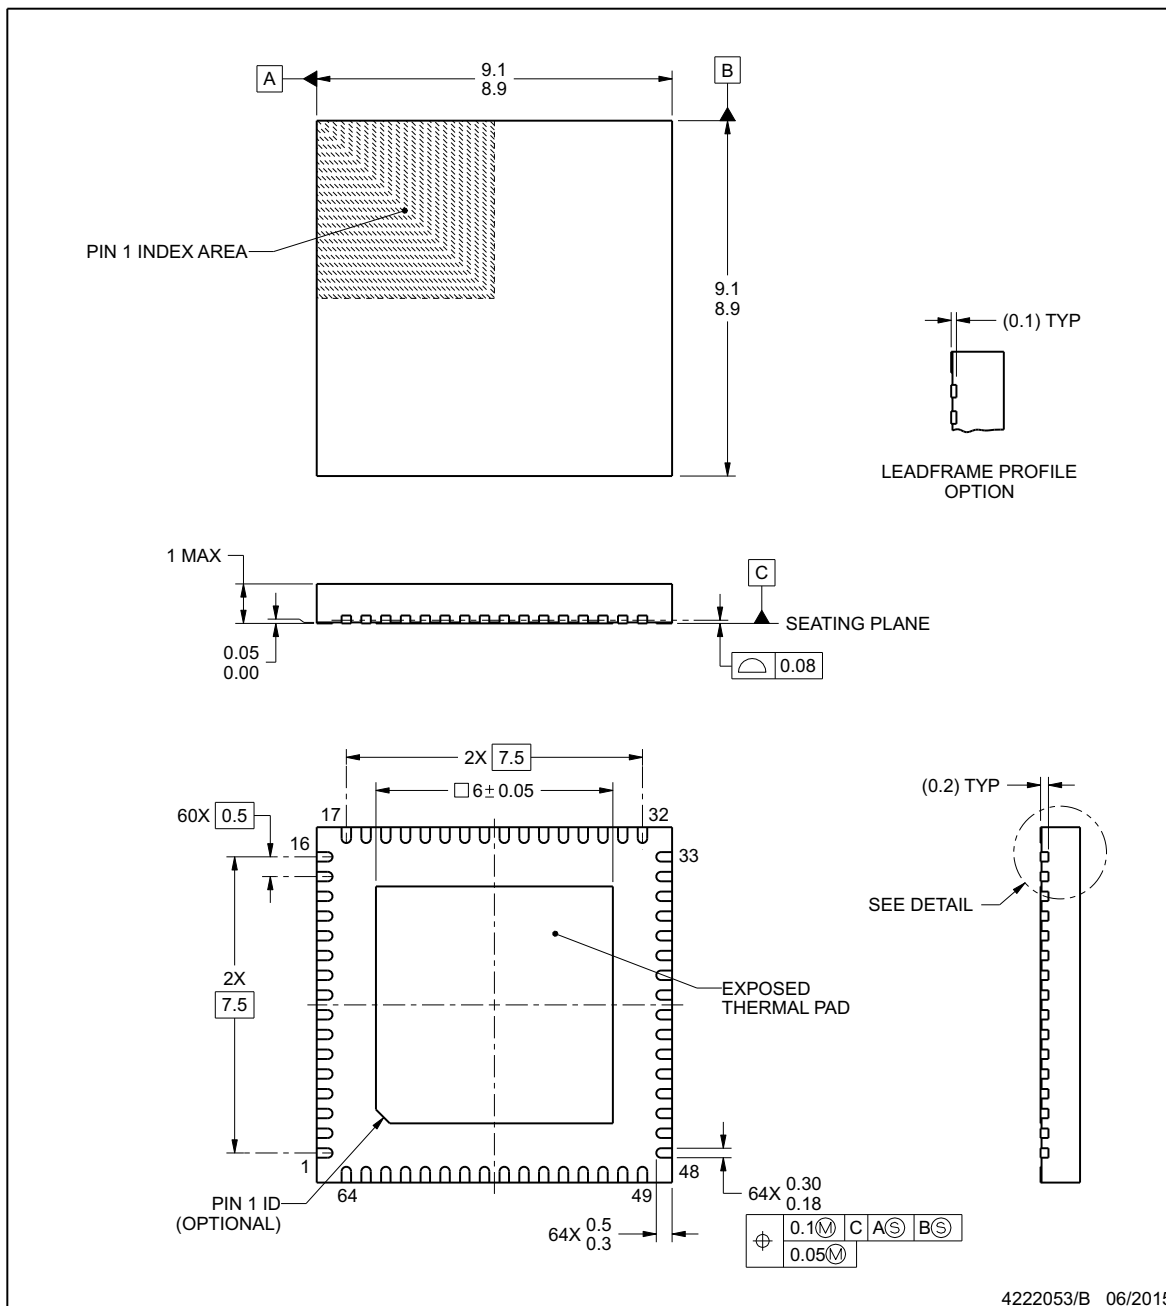**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

## EXAMPLE BOARD LAYOUT

**RGC0064G**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

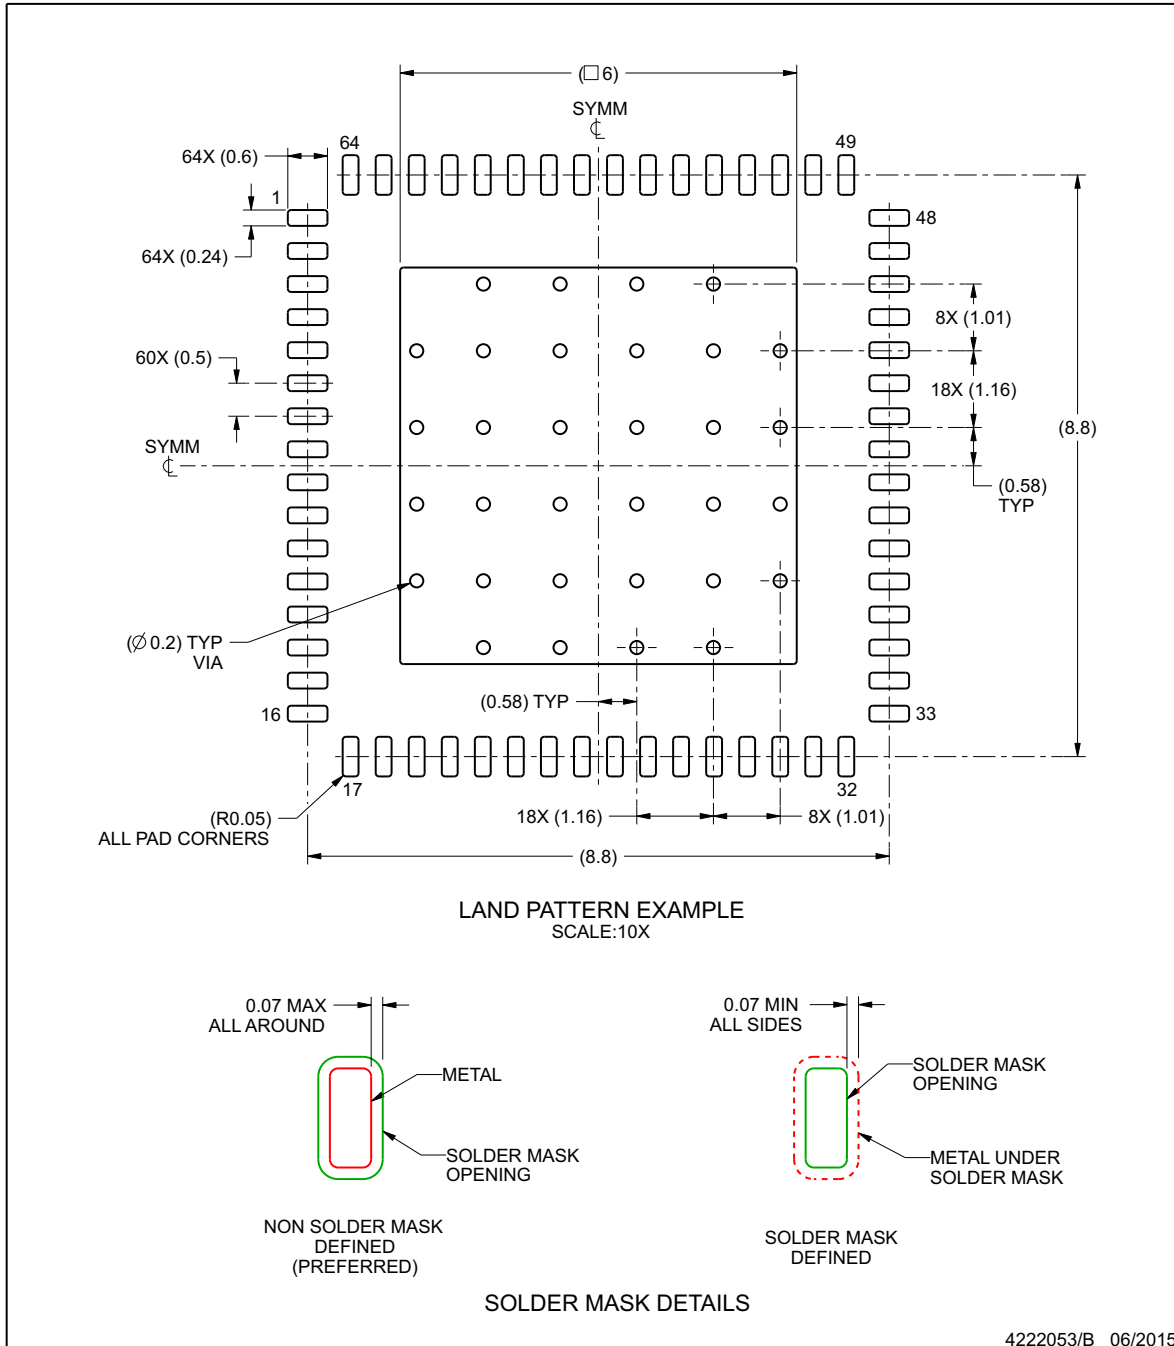


NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).

## EXAMPLE STENCIL DESIGN

**RGC0064G**
**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

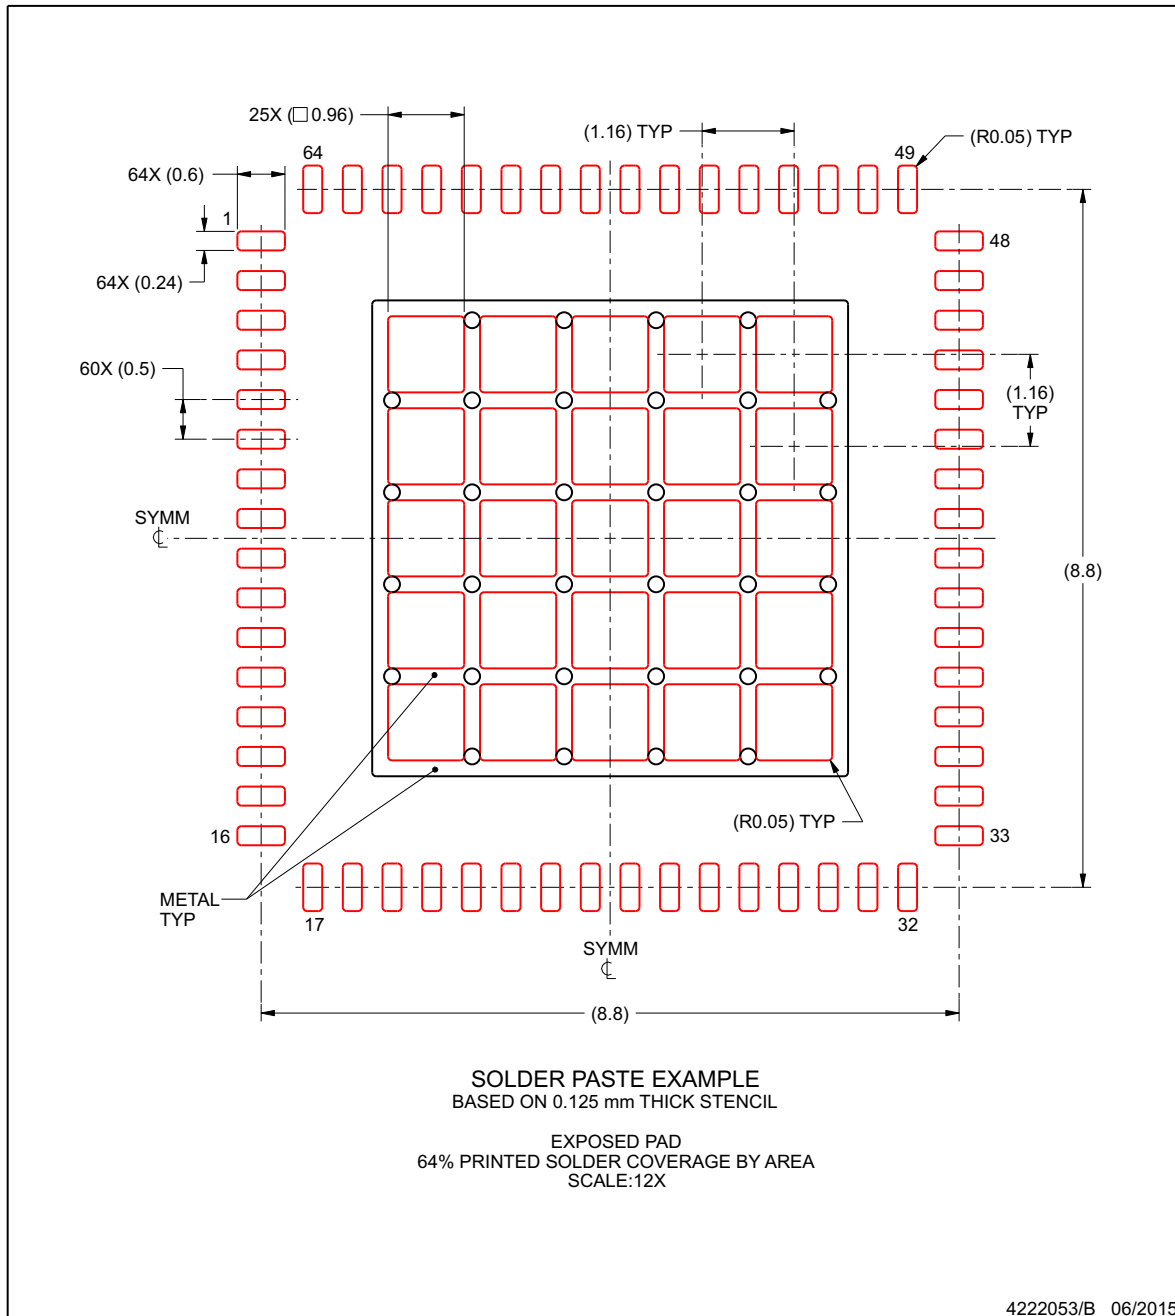

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TUSB8043RGCR</a> | Active        | Production           | VQFN (RGC)   64 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | 0 to 70      | TUSB8043            |
| TUSB8043RGCR.A               | Active        | Production           | VQFN (RGC)   64 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | 0 to 70      | TUSB8043            |
| <a href="#">TUSB8043RGCT</a> | Active        | Production           | VQFN (RGC)   64 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | 0 to 70      | TUSB8043            |
| TUSB8043RGCT.A               | Active        | Production           | VQFN (RGC)   64 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | 0 to 70      | TUSB8043            |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

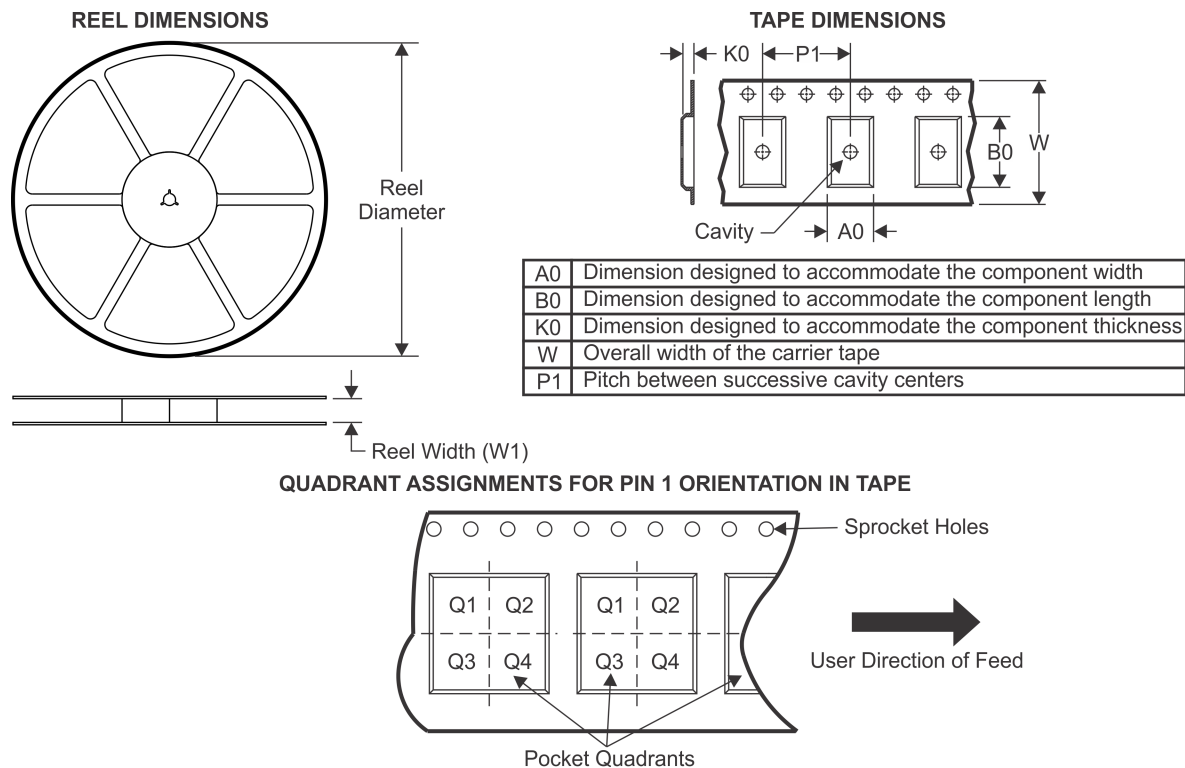
**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TUSB8043RGCR | VQFN         | RGC             | 64   | 2000 | 330.0              | 16.4               | 9.3     | 9.3     | 1.1     | 12.0    | 16.0   | Q2            |
| TUSB8043RGCT | VQFN         | RGC             | 64   | 250  | 180.0              | 16.4               | 9.3     | 9.3     | 1.1     | 12.0    | 16.0   | Q2            |



## TAPE AND REEL BOX DIMENSIONS

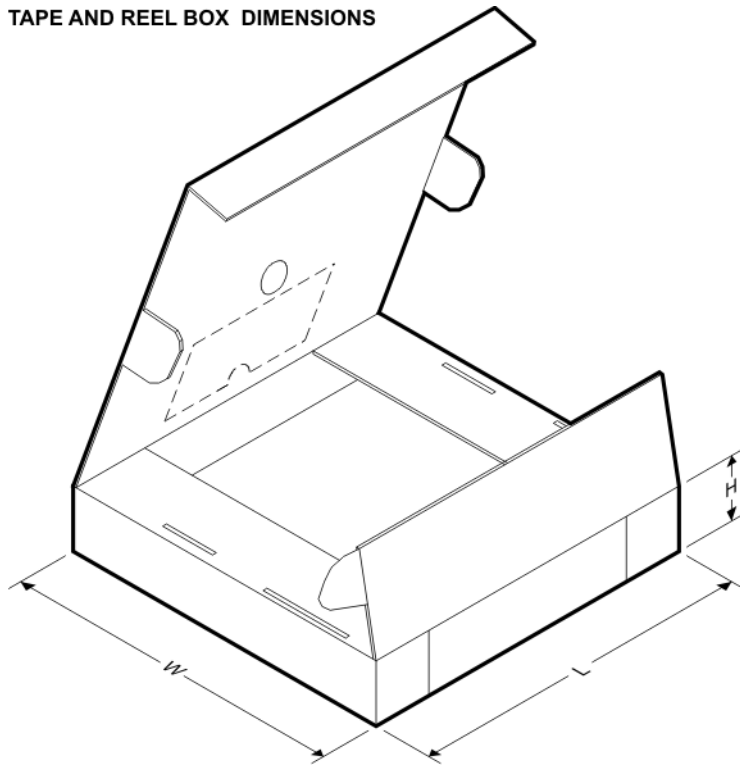

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TUSB8043RGCR | VQFN         | RGC             | 64   | 2000 | 367.0       | 367.0      | 38.0        |
| TUSB8043RGCT | VQFN         | RGC             | 64   | 250  | 210.0       | 185.0      | 35.0        |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025