

### Features

- **Operating Frequency Range**
  - Up to 18MHz (Typ) at  $V_{CC} = 5V$
  - Minimum Center Frequency of 12MHz at  $V_{CC} = 4.5V$
- **Choice of Three Phase Comparators**
  - EXCLUSIVE-OR
  - Edge-Triggered JK Flip-Flop
  - Edge-Triggered RS Flip-Flop
- **Excellent VCO Frequency Linearity**
- **VCO-Inhibit Control for ON/OFF Keying and for Low Standby Power Consumption**
- **Minimal Frequency Drift**
- **Operating Power Supply Voltage Range**
  - VCO Section ..... 3V to 6V
  - Digital Section ..... 2V to 6V
- **Fanout (Over Temperature Range)**
  - Standard Outputs ..... 10 LSTTL Loads
  - Bus Driver Outputs ..... 15 LSTTL Loads
- **Wide Operating Temperature Range ... -55°C to 125°C**
- **Balanced Propagation Delay and Transition Times**
- **Significant Power Reduction Compared to LSTTL Logic ICs**
- **HC Types**
  - 2V to 6V Operation
  - High Noise Immunity:  $N_{IL} = 30\%$ ,  $N_{IH} = 30\%$  of  $V_{CC}$  at  $V_{CC} = 5V$
- **HCT Types**
  - 4.5V to 5.5V Operation
  - Direct LSTTL Input Logic Compatibility,  $V_{IL} = 0.8V$  (Max),  $V_{IH} = 2V$  (Min)
  - CMOS Input Compatibility,  $I_I \leq 1\mu A$  at VOL, VOH

### Applications

- FM Modulation and Demodulation
- Frequency Synthesis and Multiplication
- Frequency Discrimination
- Tone Decoding
- Data Synchronization and Conditioning
- Voltage-to-Frequency Conversion
- Motor-Speed Control

### Description

The 'HC4046A and 'HCT4046A are high-speed silicon-gate CMOS devices that are pin compatible with the CD4046B of the "4000B" series. They are specified in compliance with JEDEC standard number 7.

The 'HC4046A and 'HCT4046A are phase-locked-loop circuits that contain a linear voltage-controlled oscillator (VCO) and three different phase comparators (PC1, PC2 and PC3). A signal input and a comparator input are common to each comparator.

The signal input can be directly coupled to large voltage signals, or indirectly coupled (with a series capacitor) to small voltage signals. A self-bias input circuit keeps small voltage signals within the linear region of the input amplifiers. With a passive low-pass filter, the 4046A forms a second-order loop PLL. The excellent VCO linearity is achieved by the use of linear op-amp techniques.

### Ordering Information


| PART NUMBER     | TEMP. RANGE (°C) | PACKAGE      |
|-----------------|------------------|--------------|
| CD54HC4046AF3A  | -55 to 125       | 16 Ld CERDIP |
| CD54HCT4046AF3A | -55 to 125       | 16 Ld CERDIP |
| CD74HC4046AE    | -55 to 125       | 16 Ld PDIP   |
| CD74HC4046AM    | -55 to 125       | 16 Ld SOIC   |
| CD74HC4046AMT   | -55 to 125       | 16 Ld SOIC   |
| CD74HC4046AM96  | -55 to 125       | 16 Ld SOIC   |
| CD74HC4046ANSR  | -55 to 125       | 16 Ld SOP    |
| CD74HC4046APWR  | -55 to 125       | 16 Ld TSSOP  |
| CD74HC4046APWT  | -55 to 125       | 16 Ld TSSOP  |
| CD74HCT4046AE   | -55 to 125       | 16 Ld PDIP   |
| CD74HCT4046AM   | -55 to 125       | 16 Ld SOIC   |
| CD74HCT4046AMT  | -55 to 125       | 16 Ld SOIC   |
| CD74HCT4046AM96 | -55 to 125       | 16 Ld SOIC   |

NOTE: When ordering, use the entire part number. The suffixes 96 and R denote tape and reel. The suffix T denotes a small-quantity reel of 250.

# CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A

## Pinout

CD54HC4046A, CD54HCT4046A (CERDIP)  
 CD74HC4046A (PDIP, SOIC, SOP, TSSOP)  
 CD74HCT4046A (PDIP, SOIC)

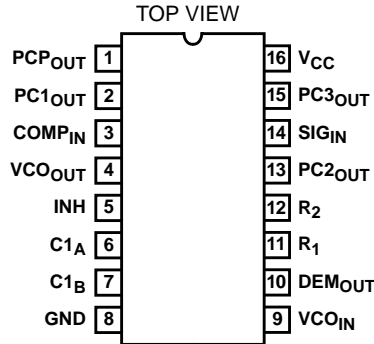

## Functional Diagram



## Pin Descriptions

| PIN NUMBER | SYMBOL             | NAME AND FUNCTION             |
|------------|--------------------|-------------------------------|
| 1          | PCP <sub>OUT</sub> | Phase Comparator Pulse Output |
| 2          | PC1 <sub>OUT</sub> | Phase Comparator 1 Output     |
| 3          | COMP <sub>IN</sub> | Comparator Input              |
| 4          | VCO <sub>OUT</sub> | VCO Output                    |
| 5          | INH                | Inhibit Input                 |
| 6          | C1 <sub>A</sub>    | Capacitor C1 Connection A     |
| 7          | C1 <sub>B</sub>    | Capacitor C1 Connection B     |
| 8          | GND                | Ground (0V)                   |
| 9          | VCO <sub>IN</sub>  | VCO Input                     |
| 10         | DEM <sub>OUT</sub> | Demodulator Output            |
| 11         | R <sub>1</sub>     | Resistor R1 Connection        |
| 12         | R <sub>2</sub>     | Resistor R2 Connection        |
| 13         | PC2 <sub>OUT</sub> | Phase Comparator 2 Output     |
| 14         | SIG <sub>IN</sub>  | Signal Input                  |
| 15         | PC3 <sub>OUT</sub> | Phase Comparator 3 Output     |
| 16         | V <sub>CC</sub>    | Positive Supply Voltage       |



The frequency capture range ( $2f_C$ ) is defined as the frequency range of input signals on which the PLL will lock if it was initially out-of-lock. The frequency lock range ( $2f_L$ ) is defined as the frequency range of input signals on which the loop will stay locked if it was initially in lock. The capture range is smaller or equal to the lock range.

With PC1, the capture range depends on the low-pass filter characteristics and can be made as large as the lock range. This configuration retains lock behavior even with very noisy input signals. Typical of this type of phase comparator is that it can lock to input frequencies close to the harmonics of the VCO center frequency.

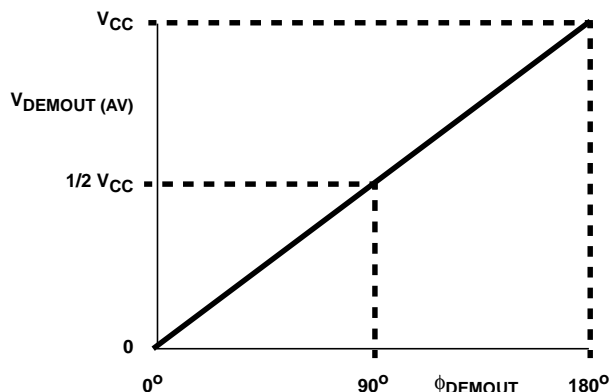


FIGURE 2. PHASE COMPARATOR 1: AVERAGE OUTPUT VOLTAGE vs INPUT PHASE DIFFERENCE:  
 $V_{DEMOUT} = V_{PC1OUT} = (V_{CC}/\pi) (\phi_{SIGIN} - \phi_{COMPIN})$ ;  $\phi_{DEMOUT} = (\phi_{SIGIN} - \phi_{COMPIN})$

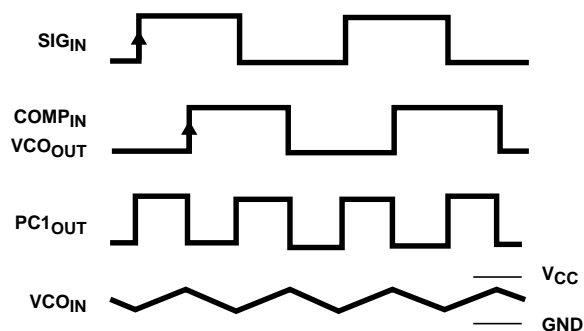


FIGURE 3. TYPICAL WAVEFORMS FOR PLL USING PHASE COMPARATOR 1, LOOP LOCKED AT  $f_0$

**Phase Comparator 2 (PC2)**

This is a positive edge-triggered phase and frequency detector. When the PLL is using this comparator, the loop is controlled by positive signal transitions and the duty factors of  $SIG_{IN}$  and  $COMP_{IN}$  are not important. PC2 comprises two D-type flip-flops, control-gating and a three-state output stage. The circuit functions as an up-down counter (Figure 1) where  $SIG_{IN}$  causes an up-count and  $COMP_{IN}$  a down-count. The transfer function of PC2, assuming ripple ( $f_r = f_i$ ) is suppressed, is:

$V_{DEMOUT} = (V_{CC}/4\pi) (\phi_{SIGIN} - \phi_{COMPIN})$  where  $V_{DEMOUT}$  is the demodulator output at pin 10;  $V_{DEMOUT} = V_{PC2OUT}$  (via low-pass filter).

The average output voltage from PC2, fed to the VCO via the low-pass filter and seen at the demodulator output at pin 10 ( $V_{DEMOUT}$ ), is the resultant of the phase differences of  $SIG_{IN}$  and  $COMP_{IN}$  as shown in Figure 4. Typical waveforms for the PC2 loop locked at  $f_0$  are shown in Figure 5.

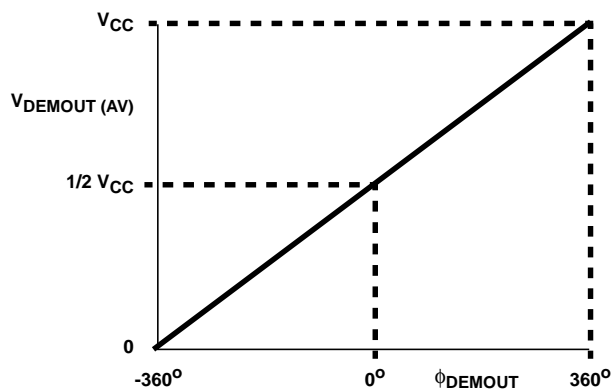


FIGURE 4. PHASE COMPARATOR 2: AVERAGE OUTPUT VOLTAGE vs INPUT PHASE DIFFERENCE:  
 $V_{DEMOUT} = V_{PC2OUT} = (V_{CC}/4\pi) (\phi_{SIGIN} - \phi_{COMPIN})$ ;  $\phi_{DEMOUT} = (\phi_{SIGIN} - \phi_{COMPIN})$

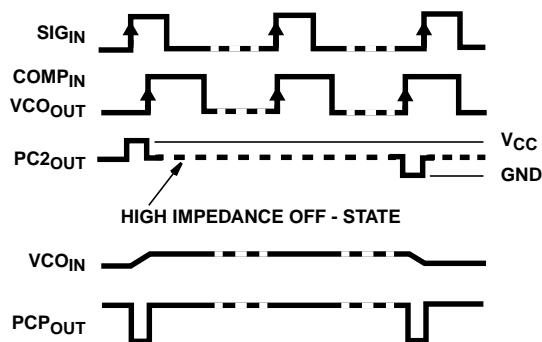


FIGURE 5. TYPICAL WAVEFORMS FOR PLL USING PHASE COMPARATOR 2, LOOP LOCKED AT  $f_0$

When the frequencies of  $SIG_{IN}$  and  $COMP_{IN}$  are equal but the phase of  $SIG_{IN}$  leads that of  $COMP_{IN}$ , the p-type output driver at  $PC2_{OUT}$  is held "ON" for a time corresponding to the phase difference ( $\phi_{DEMOUT}$ ). When the phase of  $SIG_{IN}$  lags that of  $COMP_{IN}$ , the n-type driver is held "ON".

When the frequency of  $SIG_{IN}$  is higher than that of  $COMP_{IN}$ , the p-type output driver is held "ON" for most of the input signal cycle time, and for the remainder of the cycle both n- and p-type drivers are "OFF" (three-state). If the  $SIG_{IN}$  frequency is lower than the  $COMP_{IN}$  frequency, then it is the n-type driver that is held "ON" for most of the cycle. Subsequently, the voltage at the capacitor (C2) of the low-pass filter connected to  $PC2_{OUT}$  varies until the signal and comparator inputs are equal in both phase and

frequency. At this stable point the voltage on C2 remains constant as the PC2 output is in three-state and the VCO input at pin 9 is a high impedance. Also in this condition, the signal at the phase comparator pulse output (PCP<sub>OUT</sub>) is a HIGH level and so can be used for indicating a locked condition.

Thus, for PC2, no phase difference exists between SIG<sub>IN</sub> and COMP<sub>IN</sub> over the full frequency range of the VCO. Moreover, the power dissipation due to the low-pass filter is reduced because both p- and n-type drivers are "OFF" for most of the signal input cycle. It should be noted that the PLL lock range for this type of phase comparator is equal to the capture range and is independent of the low-pass filter. With no signal present at SIG<sub>IN</sub>, the VCO adjusts, via PC2, to its lowest frequency.

**Phase Comparator 3 (PC3)**

This is a positive edge-triggered sequential phase detector using an RS-type flip-flop. When the PLL is using this comparator, the loop is controlled by positive signal transitions and the duty factors of SIG<sub>IN</sub> and COMP<sub>IN</sub> are not important. The transfer characteristic of PC3, assuming ripple (f<sub>r</sub> = f<sub>i</sub>) is suppressed, is:

$$V_{DEMOUT} = (V_{CC}/2\pi) (f_{SIGIN} - f_{COMPIN}) \text{ where } V_{DEMOUT} \text{ is the demodulator output at pin 10; } V_{DEMOUT} = V_{PC3OUT} \text{ (via low-pass filter).}$$

The average output from PC3, fed to the VCO via the low-pass filter and seen at the demodulator at pin 10 (V<sub>DEMOUT</sub>), is the resultant of the phase differences of SIG<sub>IN</sub> and COMP<sub>IN</sub> as shown in Figure 6. Typical waveforms for the PC3 loop locked at f<sub>o</sub> are shown in Figure 7.

The phase-to-output response characteristic of PC3 (Figure 6) differs from that of PC2 in that the phase angle between SIG<sub>IN</sub> and COMP<sub>IN</sub> varies between 0° and 360° and is 180° at the center frequency. Also PC3 gives a greater voltage swing than PC2 for input phase differences but as a consequence the ripple content of the VCO input signal is higher. With no signal present at SIG<sub>IN</sub>, the VCO adjusts, via PC3, to its highest frequency.

The only difference between the HC and HCT versions is the input level specification of the INH input. This input disables the VCO section. The comparator's sections are identical, so that there is no difference in the SIG<sub>IN</sub> (pin 14) or COMP<sub>IN</sub> (pin 3) inputs between the HC and the HCT versions.

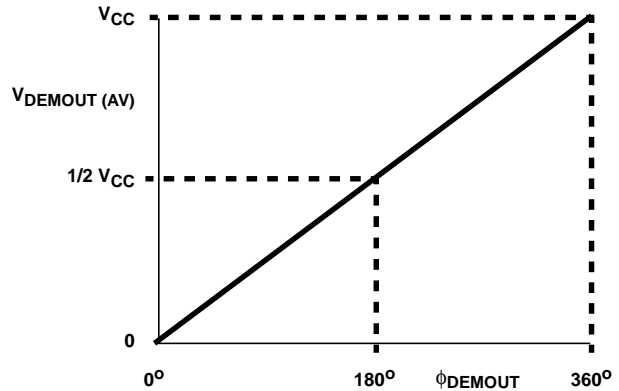


FIGURE 6. PHASE COMPARATOR 3: AVERAGE OUTPUT VOLTAGE vs INPUT PHASE DIFFERENCE:

$$V_{DEMOUT} = V_{PC3OUT} = (V_{CC}/2\pi) (\phi_{SIGIN} - \phi_{COMPIN}); \phi_{DEMOUT} = (\phi_{SIGIN} - \phi_{COMPIN})$$

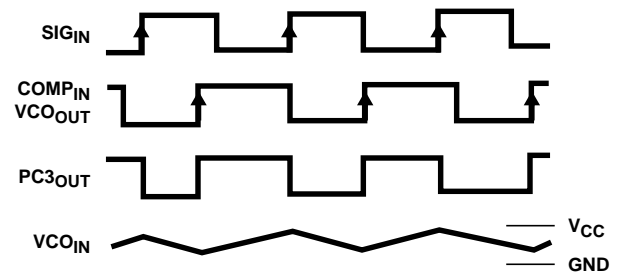


FIGURE 7. TYPICAL WAVEFORMS FOR PLL USING PHASE COMPARATOR 3, LOOP LOCKED AT f<sub>o</sub>

# CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A

## Absolute Maximum Ratings

|  |             |
|--|-------------|
| DC Supply Voltage, $V_{CC}$ .....                      | -0.5V to 7V |
| DC Input Diode Current, $I_{IK}$                       |             |
| For $V_I < -0.5V$ or $V_I > V_{CC} + 0.5V$ .....       | $\pm 20mA$  |
| DC Output Diode Current, $I_{OK}$                      |             |
| For $V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$ .....       | $\pm 20mA$  |
| DC Drain Current, per Output, $I_O$                    |             |
| For $-0.5V < V_O < V_{CC} + 0.5V$ .....                | $\pm 25mA$  |
| DC Output Source or Sink Current per Output Pin, $I_O$ |             |
| For $V_O > -0.5V$ or $V_O < V_{CC} + 0.5V$ .....       | $\pm 25mA$  |
| DC $V_{CC}$ or Ground Current, $I_{CC}$ .....          | $\pm 50mA$  |

## Thermal Information

|  |                |
|--|----------------|
| Package Thermal Impedance, $\theta_{JA}$ (see Note 1): |                |
| E (PDIP) Package .....                                 | 67°C/W         |
| M (SOIC) Package .....                                 | 73°C/W         |
| NS (SOP) Package .....                                 | 64°C/W         |
| PW (TSSOP) Package .....                               | 108°C/W        |
| Maximum Junction Temperature .....                     | 150°C          |
| Maximum Storage Temperature Range .....                | -65°C to 150°C |
| Maximum Lead Temperature (Soldering 10s) .....         | 300°C          |
| (SOIC - Lead Tips Only)                                |                |

## Operating Conditions

|  |                |
|--|----------------|
| Temperature Range, $T_A$ .....               | -55°C to 125°C |
| Supply Voltage Range, $V_{CC}$               |                |
| HC Types .....                               | .2V to 6V      |
| HCT Types .....                              | .4.5V to 5.5V  |
| DC Input or Output Voltage, $V_I, V_O$ ..... | 0V to $V_{CC}$ |
| Input Rise and Fall Time                     |                |
| 2V .....                                     | 1000ns (Max)   |
| 4.5V .....                                   | 500ns (Max)    |
| 6V .....                                     | 400ns (Max)    |

*CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.*

### NOTE:

- The package thermal impedance is calculated in accordance with JESD 51-7.

## DC Electrical Specifications

| PARAMETER   | SYMBOL   | TEST CONDITIONS      |            | $V_{CC}$ (V) | 25°C |     |      | -40°C TO 85°C |      | -55°C TO 125°C |      | UNITS |
|---|----------|----------------------|------------|--------------|------|-----|------|---------------|------|----------------|------|-------|
|   |          | $V_I$ (V)            | $I_O$ (mA) |              | MIN  | TYP | MAX  | MIN           | MAX  | MIN            | MAX  |       |
| <b>HC TYPES</b>   |          |                      |            |              |      |     |      |               |      |                |      |       |
| <b>VCO SECTION</b>                                      |          |                      |            |              |      |     |      |               |      |                |      |       |
| INH High Level Input Voltage                            | $V_{IH}$ | -                    | -          | 3            | 2.1  | -   | -    | 2.1           | -    | 2.1            | -    | V     |
|   |          |                      |            | 4.5          | 3.15 | -   | -    | 3.15          | -    | 3.15           | -    | V     |
|   |          |                      |            | 6            | 4.2  | -   | -    | 4.2           | -    | 4.2            | -    | V     |
| INH Low Level Input Voltage                             | $V_{IL}$ | -                    | -          | 3            | -    | -   | 0.9  | -             | 0.9  | -              | 0.9  | V     |
|   |          |                      |            | 4.5          | -    | -   | 1.35 | -             | 1.35 | -              | 1.35 | V     |
|   |          |                      |            | 6            | -    | -   | 1.8  | -             | 1.8  | -              | 1.8  | V     |
| VCO <sub>OUT</sub> High Level Output Voltage CMOS Loads | $V_{OH}$ | $V_{IH}$ or $V_{IL}$ | -0.02      | 3            | 2.9  | -   | -    | 2.9           | -    | 2.9            | -    | V     |
|   |          |                      | -0.02      | 4.5          | 4.4  | -   | -    | 4.4           | -    | 4.4            | -    | V     |
|   |          |                      | -0.02      | 6            | 5.9  | -   | -    | 5.9           | -    | 5.9            | -    | V     |
| VCO <sub>OUT</sub> High Level Output Voltage TTL Loads  | $V_{OH}$ | $V_{IH}$ or $V_{IL}$ | -          | -            | -    | -   | -    | -             | -    | -              | -    | V     |
|   |          |                      | -4         | 4.5          | 3.98 | -   | -    | 3.84          | -    | 3.7            | -    | V     |
|   |          |                      | -5.2       | 6            | 5.48 | -   | -    | 5.34          | -    | 5.2            | -    | V     |
| VCO <sub>OUT</sub> Low Level Output Voltage CMOS Loads  | $V_{OL}$ | $V_{IH}$ or $V_{IL}$ | 0.02       | 2            | -    | -   | 0.1  | -             | 0.1  | -              | 0.1  | V     |
|   |          |                      | 0.02       | 4.5          | -    | -   | 0.1  | -             | 0.1  | -              | 0.1  | V     |
|   |          |                      | 0.02       | 6            | -    | -   | 0.1  | -             | 0.1  | -              | 0.1  | V     |
| VCO <sub>OUT</sub> Low Level Output Voltage TTL Loads   | $V_{OL}$ | $V_{IH}$ or $V_{IL}$ | -          | -            | -    | -   | -    | -             | -    | -              | -    | V     |
|   |          |                      | 4          | 4.5          | -    | -   | 0.26 | -             | 0.33 | -              | 0.4  | V     |
|   |          |                      | 5.2        | 6            | -    | -   | 0.26 | -             | 0.33 | -              | 0.4  | V     |
| C1A, C1B Low Level Output Voltage (Test Purposes Only)  | $V_{OL}$ | $V_{IL}$ or $V_{IH}$ | 4          | 4.5          | -    | -   | 0.40 | -             | 0.47 | -              | 0.54 | V     |
|   |          |                      | 5.2        | 6            | -    | -   | 0.40 | -             | 0.47 | -              | 0.54 | V     |

**CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A**

**DC Electrical Specifications (Continued)**

| PARAMETER  | SYMBOL          | TEST CONDITIONS  |                     | V <sub>CC</sub> (V) | 25°C |     |          | -40°C TO 85°C |      | -55°C TO 125°C |      | UNITS |
|--|-----------------|--|---------------------|---------------------|------|-----|----------|---------------|------|----------------|------|-------|
|  |                 | V <sub>I</sub> (V)   | I <sub>O</sub> (mA) |                     | MIN  | TYP | MAX      | MIN           | MAX  | MIN            | MAX  |       |
| INH VCO <sub>IN</sub> Input Leakage Current                                  | I <sub>I</sub>  | V <sub>CC</sub> or GND   | -                   | 6                   | -    | -   | ±0.1     | -             | ±1   | -              | ±1   | μA    |
| R1 Range (Note 2)  | -               | -  | -                   | 4.5                 | 3    | -   | 300      | -             | -    | -              | -    | kΩ    |
| R2 Range (Note 2)  | -               | -  | -                   | 4.5                 | 3    | -   | 300      | -             | -    | -              | -    | kΩ    |
| C1 Capacitance Range   | -               | -  | -                   | 3                   | -    | -   | No Limit | -             | -    | -              | -    | pF    |
|  |                 |  |                     | 4.5                 | -    | -   |          | -             | -    | -              | pF   |       |
|  |                 |  |                     | 6                   | -    | -   |          | -             | -    | -              | pF   |       |
| VCO <sub>IN</sub> Operating Voltage Range                                    | -               | Over the range specified for R1 for Linearity See Figure 10, and 34 - 37 (Note 3)  | -                   | 3                   | 1.1  | -   | 1.9      | -             | -    | -              | -    | V     |
|  |                 |  |                     | 4.5                 | 1.1  | -   | 3.2      | -             | -    | -              | -    | V     |
|  |                 |  |                     | 6                   | 1.1  | -   | 4.6      | -             | -    | -              | -    | V     |
| <b>PHASE COMPARATOR SECTION</b>  |                 |  |                     |                     |      |     |          |               |      |                |      |       |
| SIG <sub>IN</sub> , COMP <sub>IN</sub> DC Coupled High-Level Input Voltage   | V <sub>IH</sub> | -  | -                   | 2                   | 1.5  | -   | -        | 1.5           | -    | 1.5            | -    | V     |
|  |                 |  |                     | 4.5                 | 3.15 | -   | -        | 3.15          | -    | 3.15           | -    | V     |
|  |                 |  |                     | 6                   | 4.2  | -   | -        | 4.2           | -    | 4.2            | -    | V     |
| SIG <sub>IN</sub> , COMP <sub>IN</sub> DC Coupled Low-Level Input Voltage    | V <sub>IL</sub> | -  | -                   | 2                   | -    | -   | 0.5      | -             | 0.5  | -              | 0.5  | V     |
|  |                 |  |                     | 4.5                 | -    | -   | 1.35     | -             | 1.35 | -              | 1.35 | V     |
|  |                 |  |                     | 6                   | -    | -   | 1.8      | -             | 1.8  | -              | 1.8  | V     |
| PCP <sub>OUT</sub> , PCn <sub>OUT</sub> High-Level Output Voltage CMOS Loads | V <sub>OH</sub> | V <sub>IL</sub> or V <sub>IH</sub>   | -0.02               | 2                   | 1.9  | -   | -        | 1.9           | -    | 1.9            | -    | V     |
|  |                 |  |                     | 4.5                 | 4.4  | -   | -        | 4.4           | -    | 4.4            | -    | V     |
|  |                 |  |                     | 6                   | 5.9  | -   | -        | 5.9           | -    | 5.9            | -    | V     |
| PCP <sub>OUT</sub> , PCn <sub>OUT</sub> High-Level Output Voltage TTL Loads  | V <sub>OH</sub> | V <sub>IL</sub> or V <sub>IH</sub>   | -4                  | 4.5                 | 3.98 | -   | -        | 3.84          | -    | 3.7            | -    | V     |
|  |                 |  | -5.2                | 6                   | 5.48 | -   | -        | 5.34          | -    | 5.2            | -    | V     |
| PCP <sub>OUT</sub> , PCn <sub>OUT</sub> Low-Level Output Voltage CMOS Loads  | V <sub>OL</sub> | V <sub>IL</sub> or V <sub>IH</sub>   | 0.02                | 2                   | -    | -   | 0.1      | -             | 0.1  | -              | 0.1  | V     |
|  |                 |  |                     | 4.5                 | -    | -   | 0.1      | -             | 0.1  | -              | 0.1  | V     |
|  |                 |  |                     | 6                   | -    | -   | 0.1      | -             | 0.1  | -              | 0.1  | V     |
| PCP <sub>OUT</sub> , PCn <sub>OUT</sub> Low-Level Output Voltage TTL Loads   | V <sub>OL</sub> | V <sub>IL</sub> or V <sub>IH</sub>   | 4                   | 4.5                 | -    | -   | 0.26     | -             | 0.33 | -              | 0.4  | V     |
|  |                 |  | 5.2                 | 6                   | -    | -   | 0.26     | -             | 0.33 | -              | 0.4  | V     |
| SIG <sub>IN</sub> , COMP <sub>IN</sub> Input Leakage Current                 | I <sub>I</sub>  | V <sub>CC</sub> or GND   | -                   | 2                   | -    | -   | ±3       | -             | ±4   | -              | ±5   | μA    |
|  |                 |  |                     | 3                   | -    | -   | ±7       | -             | ±9   | -              | ±11  | μA    |
|  |                 |  |                     | 4.5                 | -    | -   | ±18      | -             | ±23  | -              | ±29  | μA    |
|  |                 |  |                     | 6                   | -    | -   | ±30      | -             | ±38  | -              | ±45  | μA    |
| PC2 <sub>OUT</sub> Three-State Off-State Current                             | I <sub>OZ</sub> | V <sub>IL</sub> or V <sub>IH</sub>   | -                   | 6                   | -    | -   | ±0.5     | -             | ±5   | -              | ±10  | μA    |
| SIG <sub>IN</sub> , COMP <sub>IN</sub> Input Resistance                      | R <sub>I</sub>  | V <sub>I</sub> at Self-Bias Operation Point: ΔV <sub>I</sub> = 0.5V, See Figure 10 | -                   | 3                   | -    | 800 | -        | -             | -    | -              | -    | kΩ    |
|  |                 |  |                     | 4.5                 | -    | 250 | -        | -             | -    | -              | -    | kΩ    |
|  |                 |  |                     | 6                   | -    | 150 | -        | -             | -    | -              | -    | kΩ    |
| <b>DEMODULATOR SECTION</b>   |                 |  |                     |                     |      |     |          |               |      |                |      |       |
| Resistor Range   | R <sub>S</sub>  | at R <sub>S</sub> > 300kΩ Leakage Current Can Influence V <sub>DEMOUT</sub>        | -                   | 3                   | 50   | -   | 300      | -             | -    | -              | -    | kΩ    |
|  |                 |  |                     | 4.5                 | 50   | -   | 300      | -             | -    | -              | -    | kΩ    |
|  |                 |  |                     | 6                   | 50   | -   | 300      | -             | -    | -              | -    | kΩ    |

**CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A**

**DC Electrical Specifications (Continued)**

| PARAMETER  | SYMBOL           | TEST CONDITIONS  |                     | V <sub>CC</sub> (V) | 25°C |     |     | -40°C TO 85°C |     | -55°C TO 125°C |     | UNITS |    |
|--|------------------|--|---------------------|---------------------|------|-----|-----|---------------|-----|----------------|-----|-------|----|
|  |                  | V <sub>I</sub> (V)   | I <sub>O</sub> (mA) |                     | MIN  | TYP | MAX | MIN           | MAX | MIN            | MAX |       |    |
| Offset Voltage V <sub>COIN</sub> to V <sub>DEM</sub> | V <sub>OFF</sub> | V <sub>I</sub> = V <sub>VCOIN</sub> = $\frac{V_{CC}}{2}$   |                     | 3                   | -    | ±30 | -   | -             | -   | -              | -   | mV    |    |
|  |                  | Values Taken Over R <sub>S</sub> Range See Figure 23   |                     | 4.5                 | -    | ±20 | -   | -             | -   | -              | -   | -     | mV |
|  |                  |  |                     | 6                   | -    | ±10 | -   | -             | -   | -              | -   | -     | mV |
| Dynamic Output Resistance at DEM <sub>OUT</sub>      | R <sub>D</sub>   | V <sub>DEMOUT</sub> = $\frac{V_{CC}}{2}$   |                     | 3                   | -    | 25  | -   | -             | -   | -              | -   | Ω     |    |
|  |                  |  |                     | 4.5                 | -    | 25  | -   | -             | -   | -              | -   | -     | Ω  |
|  |                  |  |                     | 6                   | -    | 25  | -   | -             | -   | -              | -   | -     | Ω  |
| Quiescent Device Current                             | I <sub>CC</sub>  | Pins 3, 5 and 14 at V <sub>CC</sub> Pin 9 at GND, I <sub>1</sub> at Pins 3 and 14 to be excluded |                     | 6                   | -    | -   | 8   | -             | 80  | -              | 160 | μA    |    |

**HCT TYPES**

**VCO SECTION**

|   |                 |   |       |            |      |   |          |      |      |     |      |    |
|---|-----------------|---|-------|------------|------|---|----------|------|------|-----|------|----|
| INH High Level Input Voltage                            | V <sub>IH</sub> | -   | -     | 4.5 to 5.5 | 2    | - | -        | 2    | -    | 2   | -    | V  |
| INH Low Level Input Voltage                             | V <sub>IL</sub> | -   | -     | 4.5 to 5.5 | -    | - | 0.8      | -    | 0.8  | -   | 0.8  | V  |
| VCO <sub>OUT</sub> High Level Output Voltage CMOS Loads | V <sub>OH</sub> | V <sub>IH</sub> or V <sub>IL</sub>  | -0.02 | 4.5        | 4.4  | - | -        | 4.4  | -    | 4.4 | -    | V  |
| VCO <sub>OUT</sub> High Level Output Voltage TTL Loads  |                 |   | -4    | 4.5        | 3.98 | - | -        | 3.84 | -    | 3.7 | -    | V  |
| VCO <sub>OUT</sub> Low Level Output Voltage CMOS Loads  | V <sub>OL</sub> | V <sub>IH</sub> or V <sub>IL</sub>  | 0.02  | 4.5        | -    | - | 0.1      | -    | 0.1  | -   | 0.1  | V  |
| VCO <sub>OUT</sub> Low Level Output Voltage TTL Loads   |                 |   | 4     | 4.5        | -    | - | 0.26     | -    | 0.33 | -   | 0.4  | V  |
| C1A, C1B Low Level Output Voltage (Test Purposes Only)  | V <sub>OL</sub> | V <sub>IH</sub> or V <sub>IL</sub>  | 4     | 4.5        | -    | - | 0.40     | -    | 0.47 | -   | 0.54 | V  |
| INH VCO <sub>IN</sub> Input Leakage Current             | I <sub>I</sub>  | Any Voltage Between V <sub>CC</sub> and GND                                       |       | 5.5        | -    |   | ±0.1     | -    | ±1   | -   | ±1   | μA |
| R1 Range (Note 2)                                       | -               | -   | -     | 4.5        | 3    | - | 300      | -    | -    | -   | -    | kΩ |
| R2 Range (Note 2)                                       | -               | -   | -     | 4.5        | 3    | - | 300      | -    | -    | -   | -    | kΩ |
| C1 Capacitance Range                                    | -               | -   | -     | 4.5        | 0    | - | No Limit | -    | -    | -   | -    | pF |
| VCO <sub>IN</sub> Operating Voltage Range               | -               | Over the range specified for R1 for Linearity See Figure 10, and 34 - 37 (Note 3) |       | 4.5        | 1.1  | - | 3.2      | -    | -    | -   | -    | V  |

**PHASE COMPARATOR SECTION**

|  |                 |   |   |            |   |   |   |   |   |   |   |   |
|--|-----------------|---|---|------------|---|---|---|---|---|---|---|---|
| SIG <sub>IN</sub> , COMP <sub>IN</sub> DC Coupled High-Level Input Voltage | V <sub>IH</sub> | - | - | 4.5 to 5.5 | 2 | - | - | 2 | - | 2 | - | V |
|--|-----------------|---|---|------------|---|---|---|---|---|---|---|---|



**CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A**

**DC Electrical Specifications (Continued)**

| PARAMETER  | SYMBOL                       | TEST CONDITIONS  |                     | V <sub>CC</sub> (V) | 25°C |     |      | -40°C TO 85°C |      | -55°C TO 125°C |     | UNITS |
|--|------------------------------|--|---------------------|---------------------|------|-----|------|---------------|------|----------------|-----|-------|
|  |                              | V <sub>I</sub> (V)   | I <sub>O</sub> (mA) |                     | MIN  | TYP | MAX  | MIN           | MAX  | MIN            | MAX |       |
| SIG <sub>IN</sub> , COMP <sub>IN</sub><br>DC Coupled<br>Low-Level Input<br>Voltage | V <sub>IL</sub>              | -  | -                   | 4.5 to<br>5.5       | -    | -   | 0.8  | -             | 0.8  | -              | 0.8 | V     |
| PCP <sub>OUT</sub> , PCn OUT<br>High-Level Output<br>Voltage<br>CMOS Loads         | V <sub>OH</sub>              | V <sub>IL</sub> or V <sub>IH</sub>   | -                   | 4.5                 | 4.4  | -   | -    | 4.4           | -    | 4.4            | -   | V     |
| PCP <sub>OUT</sub> , PCn OUT<br>High-Level Output<br>Voltage<br>TTL Loads          | V <sub>OH</sub>              | V <sub>IL</sub> or V <sub>IH</sub>   | -                   | 4.5                 | 3.98 | -   | -    | 3.84          | -    | 3.7            | -   | V     |
| PCP <sub>OUT</sub> , PCn OUT<br>Low-Level Output<br>Voltage<br>CMOS Loads          | V <sub>OL</sub>              | V <sub>IL</sub> or V <sub>IH</sub>   | -                   | 4.5                 | -    | -   | 0.1  | -             | 0.1  | -              | 0.1 | V     |
| PCP <sub>OUT</sub> , PCn OUT<br>Low-Level Output<br>Voltage<br>TTL Loads           | V <sub>OL</sub>              | V <sub>IL</sub> or V <sub>IH</sub>   | -                   | 4.5                 | -    | -   | 0.26 | -             | 0.33 | -              | 0.4 | V     |
| SIG <sub>IN</sub> , COMP <sub>IN</sub> Input<br>Leakage Current                    | I <sub>I</sub>               | Any<br>Voltage<br>Between<br>V <sub>CC</sub> and<br>GND  | -                   | 5.5                 | -    | -   | ±30  |               | ±38  |                | ±45 | µA    |
| PC2 <sub>OUT</sub> Three-State<br>Off-State Current                                | I <sub>OZ</sub>              | V <sub>IL</sub> or V <sub>IH</sub>   | -                   | 5.5                 | -    | -   | ±0.5 | ±5            | -    | -              | ±10 | µA    |
| SIG <sub>IN</sub> , COMP <sub>IN</sub> Input<br>Resistance                         | R <sub>I</sub>               | V <sub>I</sub> at Self-Bias<br>Operation Point:<br>ΔV <sub>I</sub> = 0.5V,<br>See Figure 10                                |                     | 4.5                 | -    | 250 | -    | -             | -    | -              | -   | kΩ    |
| <b>DEMODULATOR SECTION</b>   |                              |  |                     |                     |      |     |      |               |      |                |     |       |
| Resistor Range   | R <sub>S</sub>               | at R <sub>S</sub> > 300kΩ<br>Leakage Current<br>Can Influence<br>V <sub>DEM OUT</sub>                                      |                     | 4.5                 | 5    | -   | 300  | -             | -    | -              | -   | kΩ    |
| Offset Voltage VCO <sub>IN</sub><br>to V <sub>DEM</sub>                            | V <sub>OFF</sub>             | V <sub>I</sub> = V <sub>VCO IN</sub> =<br>$\frac{V_{CC}}{2}$<br>Values taken over<br>R <sub>S</sub> Range<br>See Figure 23 |                     | 4.5                 | -    | ±20 | -    | -             | -    | -              | -   | mV    |
| Dynamic Output<br>Resistance at<br>DEM <sub>OUT</sub>                              | R <sub>D</sub>               | V <sub>DEM OUT</sub> =<br>$\frac{V_{CC}}{2}$   |                     | 4.5                 | -    | 25  | -    | -             | -    | -              | -   | Ω     |
| Quiescent Device<br>Current  | I <sub>CC</sub>              | V <sub>CC</sub> or<br>GND  | -                   | 5.5                 | -    | -   | 8    | -             | 80   | -              | 160 | µA    |
| Additional Quiescent<br>Device Current Per<br>Input Pin: 1 Unit Load               | ΔI <sub>CC</sub><br>(Note 4) | V <sub>CC</sub><br>-2.1<br>Excluding<br>Pin 5  | -                   | 4.5 to<br>5.5       | -    | 100 | 360  | -             | 450  | -              | 490 | µA    |

**NOTES:**

- The value for R1 and R2 in parallel should exceed 2.7kΩ.
- The maximum operating voltage can be as high as V<sub>CC</sub> -0.9V, however, this may result in an increased offset voltage.
- For dual-supply systems theoretical worst case (V<sub>I</sub> = 2.4V, V<sub>CC</sub> = 5.5V) specification is 1.8mA.

**CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A**

**HCT Input Loading Table**

| INPUT | UNIT LOADS |
|-------|------------|
| INH   | 1          |

NOTE: Unit load is  $\Delta I_{CC}$  limit specific in DC Electrical Specifications Table, e.g., 360 $\mu$ A max. at 25°C.

**Switching Specifications**  $C_L = 50$ pF, Input  $t_r, t_f = 6$ ns

| PARAMETER  | SYMBOL  | TEST CONDITIONS                                       | $V_{CC}$ (V) | 25°C |      |     | -40°C TO 85°C |     | -55°C TO 125°C |     | UNITS |    |
|--|---|---|--------------|------|------|-----|---------------|-----|----------------|-----|-------|----|
|  |   |   |              | MIN  | TYP  | MAX | MIN           | MAX | MIN            | MAX |       |    |
| <b>HC TYPES</b>  |   |   |              |      |      |     |               |     |                |     |       |    |
| <b>PHASE COMPARATOR SECTION</b>  |   |   |              |      |      |     |               |     |                |     |       |    |
| Propagation Delay<br>SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>I</sub> OUT<br><br>SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>P</sub> OUT<br><br>SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>3</sub> OUT | t <sub>PLH</sub> , t <sub>PHL</sub>                           |   | 2            | -    | -    | 200 | -             | 250 | -              | 300 | ns    |    |
|  |   |   | 4.5          | -    | -    | 40  | -             | 50  | -              | 60  | ns    |    |
|  |   |   | 6            | -    | -    | 34  | -             | 43  | -              | 51  | ns    |    |
|  | SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>P</sub> OUT |   |              | 2    | -    | -   | 300           | -   | 375            | -   | 450   | ns |
|  |   |   |              | 4.5  | -    | -   | 60            | -   | 75             | -   | 90    | ns |
|  |   |   |              | 6    | -    | -   | 51            | -   | 64             | -   | 77    | ns |
|  | SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>3</sub> OUT |   |              | 2    | -    | -   | 245           | -   | 305            | -   | 307   | ns |
|  |   |   |              | 4.5  | -    | -   | 49            | -   | 61             | -   | 74    | ns |
|  |   |   |              | 6    | -    | -   | 42            | -   | 52             | -   | 63    | ns |
| Output Transition Time   | t <sub>THL</sub> , t <sub>TLH</sub>                           |   | 2            | -    | -    | 75  | -             | 95  | -              | 110 | ns    |    |
|  |   |   | 4.5          | -    | -    | 15  | -             | 19  | -              | 22  | ns    |    |
|  |   |   | 6            | -    | -    | 13  | -             | 16  | -              | 19  | ns    |    |
| Output Enable Time, SIG <sub>IN</sub> ,<br>COMP <sub>IN</sub> to PC <sub>2</sub> OUT   | t <sub>PZH</sub> , t <sub>PZL</sub>                           |   | 2            | -    | -    | 265 | -             | 330 | -              | 400 | ns    |    |
|  |   |   | 4.5          | -    | -    | 53  | -             | 66  | -              | 80  | ns    |    |
|  |   |   | 6            | -    | -    | 45  | -             | 56  | -              | 68  | ns    |    |
| Output Disable Time, SIG <sub>IN</sub> ,<br>COMP <sub>IN</sub> to PC <sub>2</sub> OUT  | t <sub>PHZ</sub> , t <sub>PLZ</sub>                           |   | 2            | -    | -    | 315 | -             | 395 | -              | 475 | ns    |    |
|  |   |   | 4.5          | -    | -    | 63  | -             | 79  | -              | 95  | ns    |    |
|  |   |   | 6            | -    | -    | 54  | -             | 67  | -              | 81  | ns    |    |
| AC Coupled Input Sensitivity<br>(P-P) at SIG <sub>IN</sub> or COMP <sub>IN</sub>   |   | $V_{I(P-P)}$  | 3            | -    | 11   | -   | -             | -   | -              | -   | mV    |    |
|  |   |   | 4.5          | -    | 15   | -   | -             | -   | -              | -   | mV    |    |
|  |   |   | 6            | -    | 33   | -   | -             | -   | -              | -   | mV    |    |
| <b>VCO SECTION</b>   |   |   |              |      |      |     |               |     |                |     |       |    |
| Frequency Stability with<br>Temperature Change   | $\frac{\Delta f}{\Delta T}$                                   | $R_1 = 100k\Omega,$<br>$R_2 = \infty$                 | 3            | -    | 0.11 | -   | -             | -   | -              | -   | %/°C  |    |
|  |   |   | 4.5          | -    | 0.11 | -   | -             | -   | -              | -   | %/°C  |    |
|  |   |   | 6            | -    | 0.11 | -   | -             | -   | -              | -   | %/°C  |    |
| Maximum Frequency  | f <sub>MAX</sub>  | $C_1 = 50$ pF<br>$R_1 = 3.5k\Omega$<br>$R_2 = \infty$ | 3            | -    | 24   | -   | -             | -   | -              | -   | MHz   |    |
|  |   |   | 4.5          | -    | 24   | -   | -             | -   | -              | -   | MHz   |    |
|  |   |   | 6            | -    | 24   | -   | -             | -   | -              | -   | MHz   |    |
|  |   | $C_1 = 0$ pF<br>$R_1 = 9.1k\Omega$<br>$R_2 = \infty$  | 3            | -    | 38   | -   | -             | -   | -              | -   | MHz   |    |
|  |   |   | 4.5          | -    | 38   | -   | -             | -   | -              | -   | MHz   |    |
|  |   |   | 6            | -    | 38   | -   | -             | -   | -              | -   | MHz   |    |

**CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A**

**Switching Specifications**  $C_L = 50\text{pF}$ , Input  $t_r, t_f = 6\text{ns}$  (Continued)

| PARAMETER  | SYMBOL                      | TEST CONDITIONS  | $V_{CC}$ (V)   | 25°C               |                     |     | -40°C TO 85°C |     | -55°C TO 125°C |     | UNITS  |   |     |    |
|--|-----------------------------|--|--|--------------------|---------------------|-----|---------------|-----|----------------|-----|--------|---|-----|----|
|  |                             |  |  | MIN                | TYP                 | MAX | MIN           | MAX | MIN            | MAX |        |   |     |    |
| Center Frequency   |                             | $C_1 = 40\text{pF}$<br>$R_1 = 3\text{k}\Omega$<br>$R_2 = \infty$<br>$V_{COIN} = V_{CC}/2$  | 3  | 7                  | 10                  | -   | -             | -   | -              | -   | MHz    |   |     |    |
|  |                             |  | 4.5  | 12                 | 17                  | -   | -             | -   | -              | -   | MHz    |   |     |    |
|  |                             |  | 6  | 14                 | 21                  | -   | -             | -   | -              | -   | MHz    |   |     |    |
| Frequency Linearity  | $\Delta f_{VCO}$            | $R_1 = 100\text{k}\Omega$<br>$R_2 = \infty$<br>$C_1 = 100\text{pF}$  | 3  | -                  | 0.4                 | -   | -             | -   | -              | -   | %      |   |     |    |
|  |                             |  | 4.5  | -                  | 0.4                 | -   | -             | -   | -              | -   | %      |   |     |    |
|  |                             |  | 6  | -                  | 0.4                 | -   | -             | -   | -              | -   | %      |   |     |    |
| Offset Frequency   |                             | $R_2 = 220\text{k}\Omega$<br>$C_1 = 1\text{nF}$  | 3  | -                  | 400                 | -   | -             | -   | -              | -   | kHz    |   |     |    |
|  |                             |  | 4.5  | -                  | 400                 | -   | -             | -   | -              | -   | kHz    |   |     |    |
|  |                             |  | 6  | -                  | 400                 | -   | -             | -   | -              | -   | kHz    |   |     |    |
| <b>DEMODULATOR SECTION</b>   |                             |  |  |                    |                     |     |               |     |                |     |        |   |     |    |
| $V_{OUT}$ Vs $f_{IN}$  |                             | $R_1 = 100\text{k}\Omega$<br>$R_2 = \infty$<br>$C_1 = 100\text{pF}$<br>$R_S = 10\text{k}\Omega$<br>$R_3 = 100\text{k}\Omega$<br>$C_2 = 100\text{pF}$ | 3  | -                  | -                   | -   | -             | -   | -              | -   | mV/kHz |   |     |    |
|  |                             |  | 4.5  | -                  | 330                 | -   | -             | -   | -              | -   | mV/kHz |   |     |    |
|  |                             |  | 6  | -                  | -                   | -   | -             | -   | -              | -   | mV/kHz |   |     |    |
| <b>HCT TYPES</b>   |                             |  |  |                    |                     |     |               |     |                |     |        |   |     |    |
| <b>PHASE COMPARATOR SECTION</b>  |                             |  |  |                    |                     |     |               |     |                |     |        |   |     |    |
| Propagation Delay<br>SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>OUT</sub>     | $t_{PHL}, t_{PLH}$          | $C_L = 50\text{pF}$  | 4.5  | -                  | -                   | 45  | -             | 56  | -              | 68  | ns     |   |     |    |
|  |                             |  | SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>2OUT</sub> | $t_{PHL}, t_{PLH}$ | $C_L = 50\text{pF}$ | 4.5 | -             | -   | 68             | -   | 85     | - | 102 | ns |
|  |                             |  | SIG <sub>IN</sub> , COMP <sub>IN</sub> to PC <sub>3OUT</sub> | $t_{PHL}, t_{PLH}$ | $C_L = 50\text{pF}$ | 4.5 | -             | -   | 58             | -   | 73     | - | 87  | ns |
| Output Transition Time   | $t_{TLH}, t_{THL}$          | $C_L = 50\text{pF}$  | 4.5  | -                  | -                   | 15  | -             | 19  | -              | 22  | ns     |   |     |    |
| Output Enable Time, SIG <sub>IN</sub> ,<br>COMP <sub>IN</sub> to PC <sub>2OUT</sub>  | $t_{PZH}, t_{PZL}$          | $C_L = 50\text{pF}$  | 4.5  | -                  | -                   | 60  | -             | 75  | -              | 90  | pF     |   |     |    |
| Output Disable Time, SIG <sub>IN</sub> ,<br>COMP <sub>IN</sub> to PC <sub>ZOUT</sub> | $t_{PHZ}, t_{PLZ}$          | $C_L = 50\text{pF}$  | 4.5  | -                  | -                   | 68  | -             | 85  | -              | 102 | pF     |   |     |    |
| AC Coupled Input Sensitivity<br>(p-p) at SIG <sub>IN</sub> or COMP <sub>1</sub>      |                             | $V_{I(p-p)}$   | 4.5  | -                  | 15                  | -   | -             | -   | -              | -   | mV     |   |     |    |
| <b>VCO SECTION</b>   |                             |  |  |                    |                     |     |               |     |                |     |        |   |     |    |
| Frequency Stability with<br>Temperature Change                                       | $\frac{\Delta f}{\Delta T}$ | $R_1 = 100\text{k}\Omega$ ,<br>$R_2 = \infty$  | 4.5  | -                  | 0.11                | -   | -             | -   | -              | -   | %/°C   |   |     |    |
| Maximum Frequency  | $f_{MAX}$                   | $C_1 = 50\text{pF}$<br>$R_1 = 3.5\text{k}\Omega$<br>$R_2 = \infty$   | 4.5  | -                  | 24                  | -   | -             | -   | -              | -   | MHz    |   |     |    |
|  |                             | $C_1 = 0\text{pF}$<br>$R_1 = 9.1\text{k}\Omega$<br>$R_2 = \infty$  | 4.5  | -                  | 38                  | -   | -             | -   | -              | -   | MHz    |   |     |    |
| Center Frequency   |                             | $C_1 = 40\text{pF}$<br>$R_1 = 3\text{k}\Omega$<br>$R_2 = \infty$<br>$V_{COIN} = V_{CC}/2$  | 4.5  | 12                 | 17                  | -   | -             | -   | -              | -   | MHz    |   |     |    |
| Frequency Linearity  | $\Delta f_{VCO}$            | $R_1 = 100\text{k}\Omega$<br>$R_2 = \infty$<br>$C_1 = 100\text{pF}$  | 4.5  | -                  | 0.4                 | -   | -             | -   | -              | -   | %      |   |     |    |

# CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A

## Switching Specifications $C_L = 50\text{pF}$ , Input $t_r, t_f = 6\text{ns}$ (Continued)

| PARAMETER                  | SYMBOL | TEST CONDITIONS  | $V_{CC}$ (V) | 25°C |     |     | -40°C TO 85°C |     | -55°C TO 125°C |     | UNITS  |
|----------------------------|--------|--|--------------|------|-----|-----|---------------|-----|----------------|-----|--------|
|                            |        |  |              | MIN  | TYP | MAX | MIN           | MAX | MIN            | MAX |        |
| Offset Frequency           |        | $R_2 = 220\text{k}\Omega$<br>$C_1 = 1\text{nF}$  | 4.5          | -    | 400 | -   | -             | -   | -              | -   | kHz    |
| <b>DEMODULATOR SECTION</b> |        |  |              |      |     |     |               |     |                |     |        |
| $V_{OUT}$ Vs $f_{IN}$      |        | $R_1 = 100\text{k}\Omega$<br>$R_2 = \infty$<br>$C_1 = 100\text{pF}$<br>$R_S = 10\text{k}\Omega$<br>$R_3 = 100\text{k}\Omega$<br>$C_2 = 100\text{pF}$ | 4.5          | -    | 330 | -   | -             | -   | -              | -   | mV/kHz |

## Test Circuits and Waveforms



FIGURE 8. INPUT TO OUTPUT PROPAGATION DELAYS AND OUTPUT TRANSITION TIMES

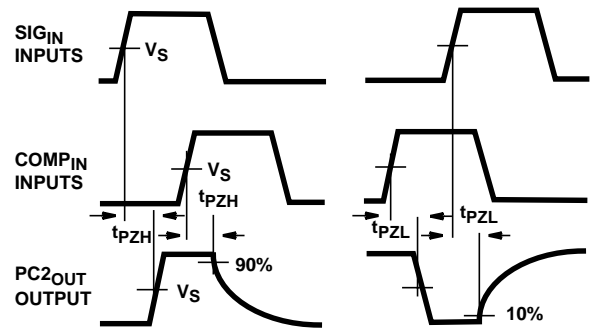


FIGURE 9. THREE STATE ENABLE AND DISABLE TIMES FOR PC2\_OUT

## Typical Performance Curves

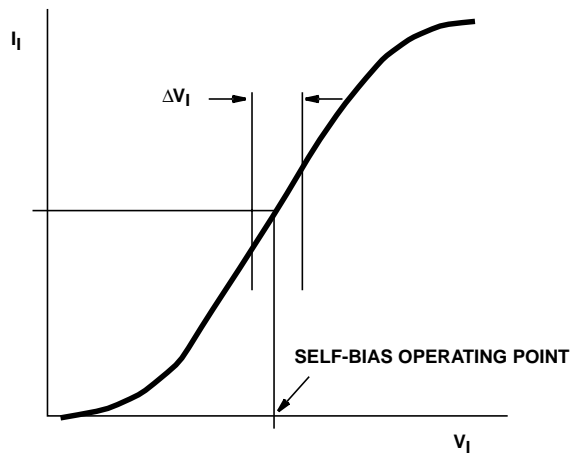


FIGURE 10. TYPICAL INPUT RESISTANCE CURVE AT SIG\_IN, COMP\_IN

Typical Performance Curves (Continued)



FIGURE 11. HC4046A TYPICAL CENTER FREQUENCY vs R1, C1 ( $V_{CC} = 4.5V$ )

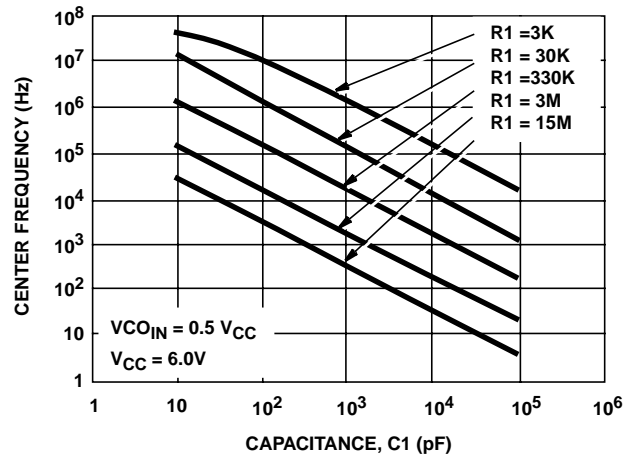


FIGURE 12. HC4046A TYPICAL CENTER FREQUENCY vs R1, C1 ( $V_{CC} = 6V$ )



FIGURE 13. HC4046A TYPICAL CENTER FREQUENCY vs R1, C1 ( $V_{CC} = 3V$ ,  $R2 = OPEN$ )

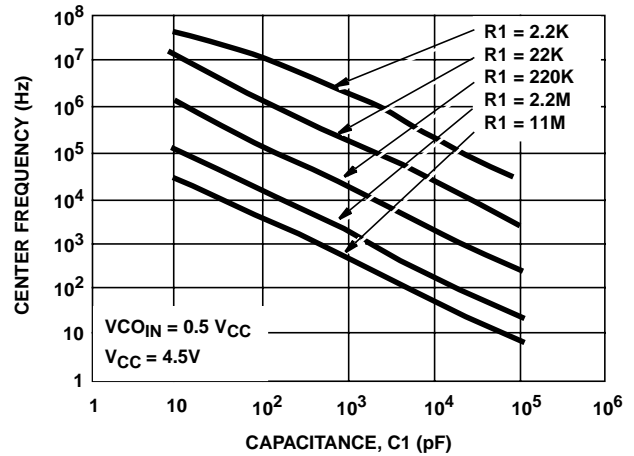


FIGURE 14. HCT4046A TYPICAL CENTER FREQUENCY vs R1, C1 ( $V_{CC} = 4.5V$ )



FIGURE 15. HCT4046A TYPICAL CENTER FREQUENCY vs R1, C1 ( $V_{CC} = 5.5V$ )

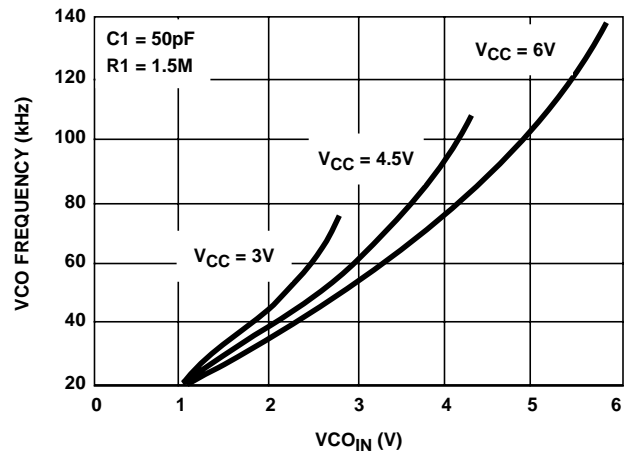


FIGURE 16. HC4046A TYPICAL VCO FREQUENCY vs  $V_{CO\_IN}$  ( $R1 = 1.5M\Omega$ ,  $C1 = 50pF$ )

Typical Performance Curves (Continued)

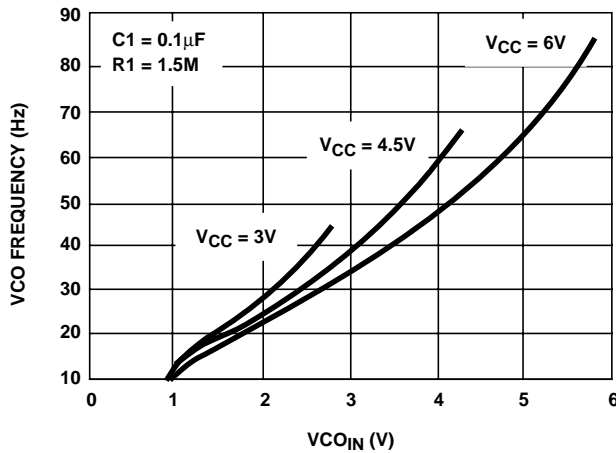


FIGURE 17. HC4046A TYPICAL VCO FREQUENCY vs VCO<sub>IN</sub> (R1 = 1.5MΩ, C1 = 0.1μF)

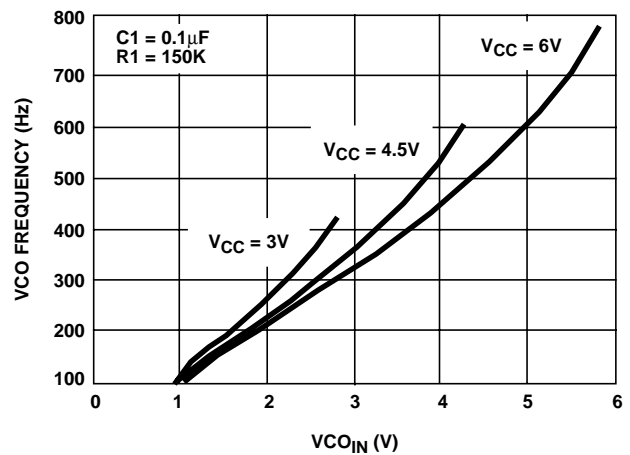


FIGURE 18. HC4046A TYPICAL VCO FREQUENCY vs VCO<sub>IN</sub> (R1 = 150kΩ, C1 = 0.1μF)

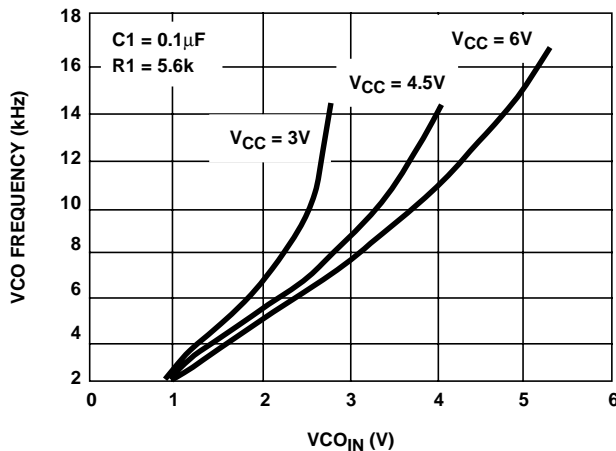


FIGURE 19. HC4046A TYPICAL VCO FREQUENCY vs VCO<sub>IN</sub> (R1 = 5.6kΩ, C1 = 0.1μF)

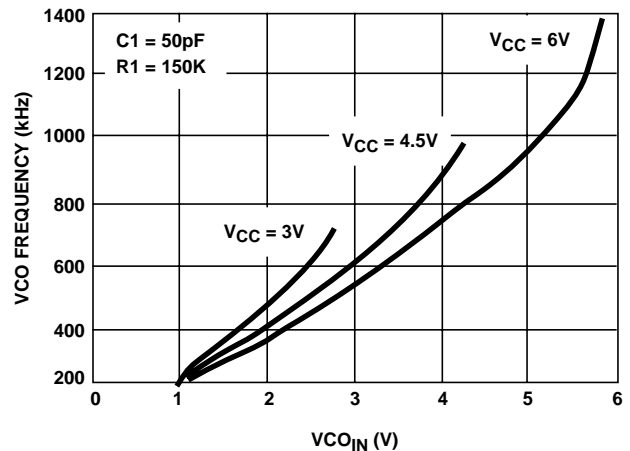


FIGURE 20. HC4046A TYPICAL VCO FREQUENCY vs VCO<sub>IN</sub> (R1 = 150kΩ, C1 = 50pF)

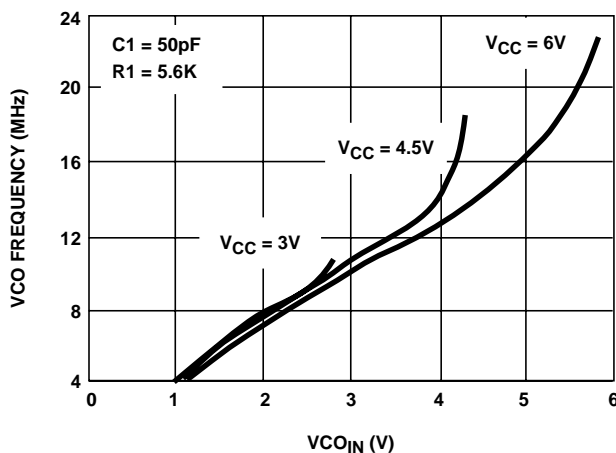


FIGURE 21. HC4046A TYPICAL VCO FREQUENCY vs VCO<sub>IN</sub> (R1 = 5.6kΩ, C1 = 50pF)

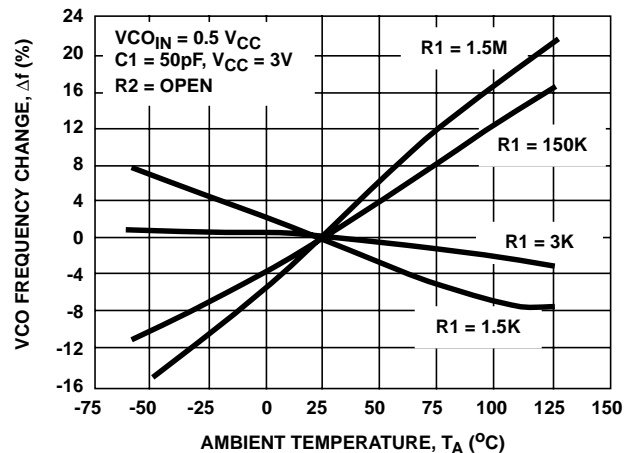


FIGURE 22. HC4046A TYPICAL CHANGE IN VCO FREQUENCY vs AMBIENT TEMPERATURE AS A FUNCTION OF R1 (V<sub>CC</sub> = 3V)

Typical Performance Curves (Continued)

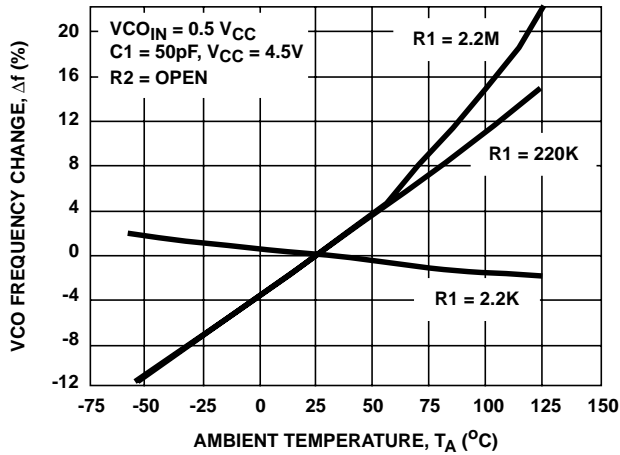


FIGURE 23. HC4046A TYPICAL CHANGE IN VCO FREQUENCY vs AMBIENT TEMPERATURE AS A FUNCTION OF  $R1$  ( $V_{CC} = 4.5\text{V}$ )

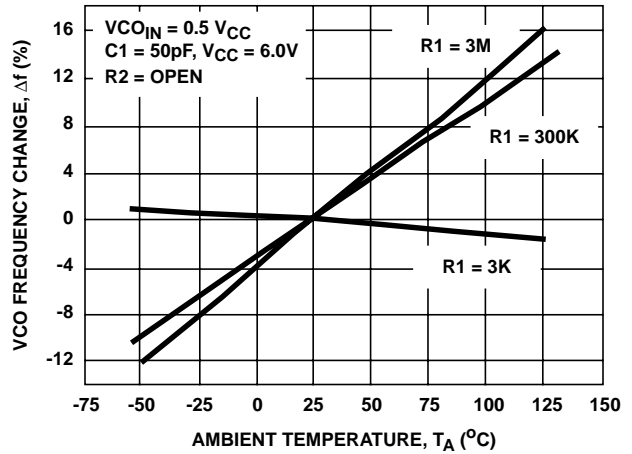


FIGURE 24. HC4046A TYPICAL CHANGE IN VCO FREQUENCY vs AMBIENT TEMPERATURE AS A FUNCTION OF  $R1$  ( $V_{CC} = 6\text{V}$ )

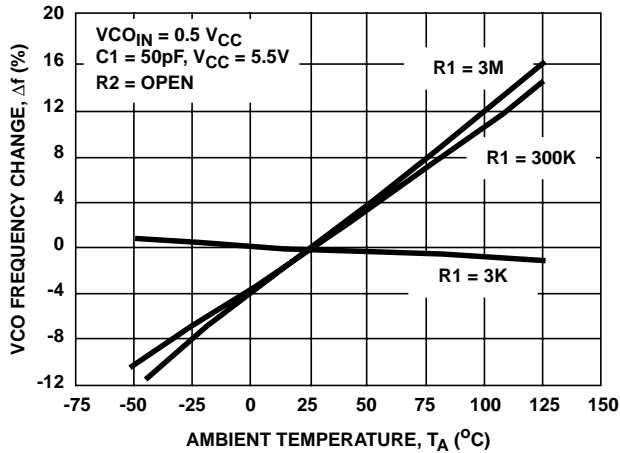


FIGURE 25. HCT4046A TYPICAL CHANGE IN VCO FREQUENCY vs AMBIENT TEMPERATURE AS A FUNCTION OF  $R1$

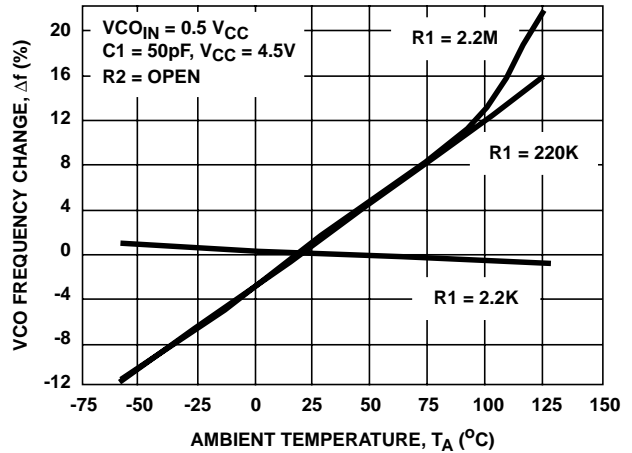


FIGURE 26. HC4046A TYPICAL CHANGE IN VCO FREQUENCY vs AMBIENT TEMPERATURE AS A FUNCTION OF  $R1$  ( $V_{CC} = 4.5\text{V}$ )

Typical Performance Curves (Continued)

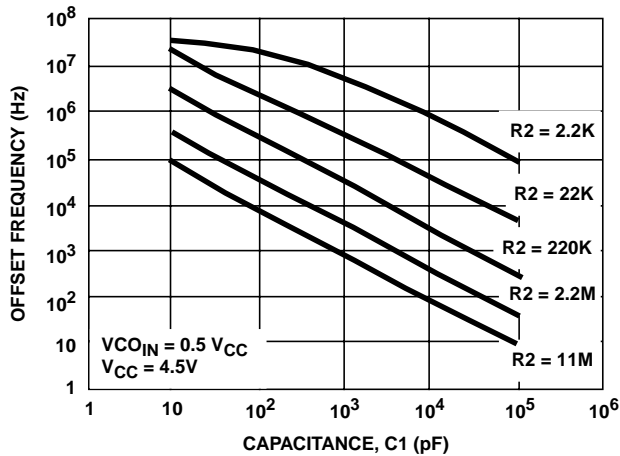


FIGURE 27. HC4046A OFFSET FREQUENCY vs R2, C1 ( $V_{CC} = 4.5V$ )

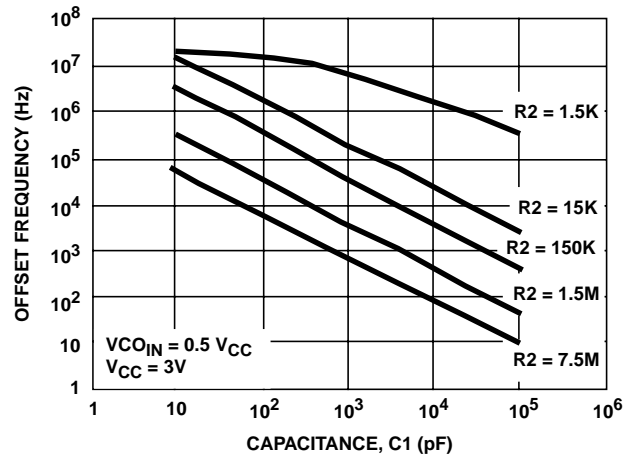


FIGURE 28. HC4046A OFFSET FREQUENCY vs R2, C1 ( $V_{CC} = 3V$ )

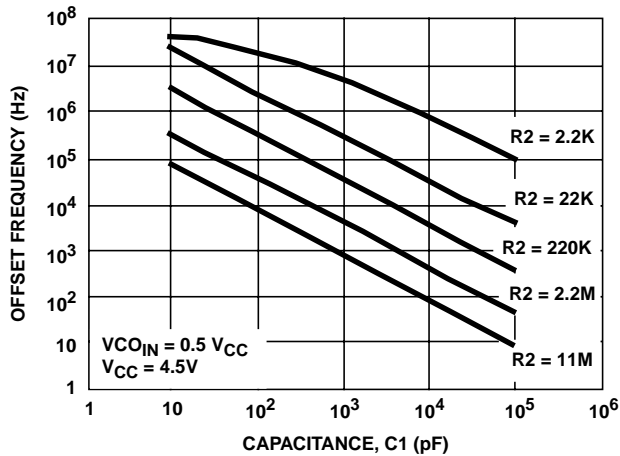


FIGURE 29. HCT4046A OFFSET FREQUENCY vs R2, C1 ( $V_{CC} = 4.5V$ )

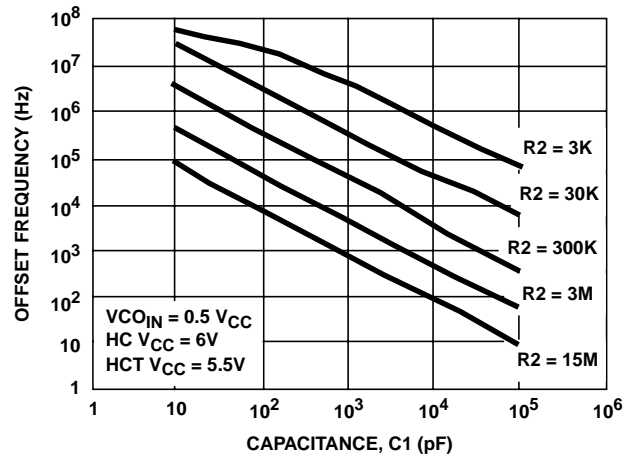


FIGURE 30. HC4046A AND HCT4046A OFFSET FREQUENCY vs R2, C1 ( $V_{CC} = 6V, V_{CC} = 5.5V$ )

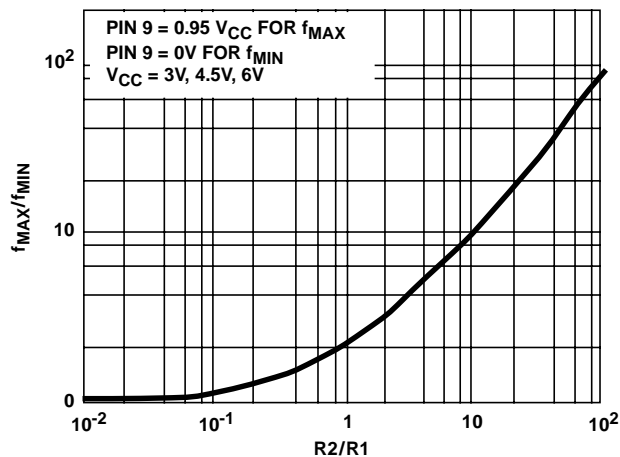


FIGURE 31. HC4046A  $f_{MIN}/f_{MAX}$  vs R2/R1 ( $V_{CC} = 3V, 4.5V, 6V$ )

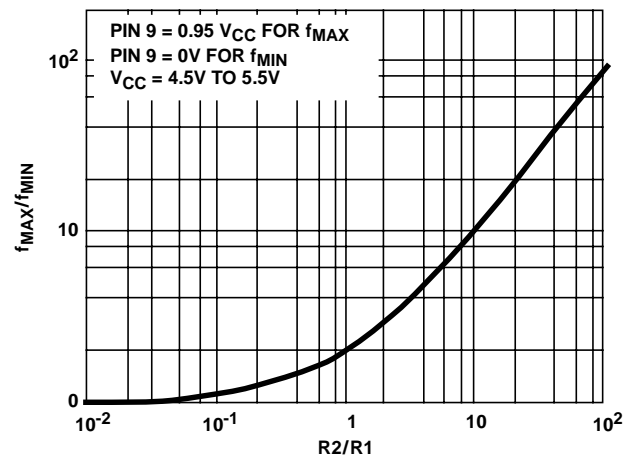


FIGURE 32. HCT4046A  $f_{MAX}/f_{MIN}$  vs R2/R1 ( $V_{CC} = 4.5V \text{ TO } 5.5V$ )



Typical Performance Curves (Continued)

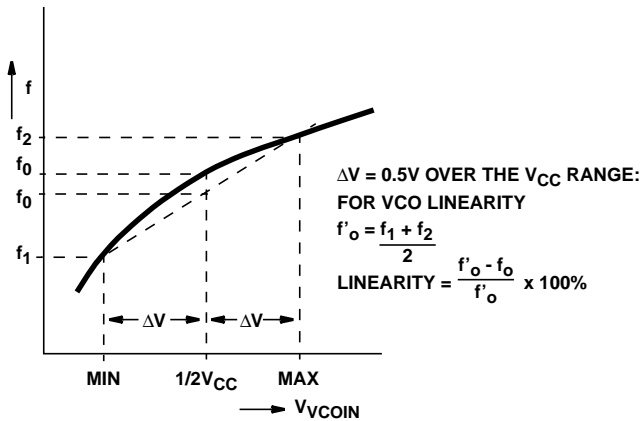


FIGURE 33. DEFINITION OF VCO FREQUENCY LINEARITY

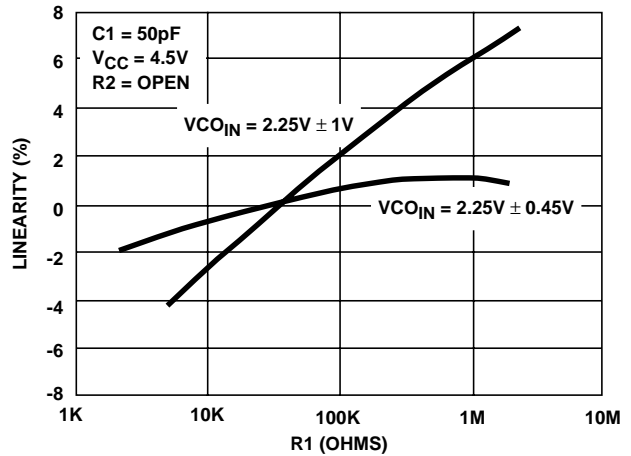


FIGURE 34. HC4046A VCO LINEARITY vs R1 ( $V_{CC} = 4.5V$ )

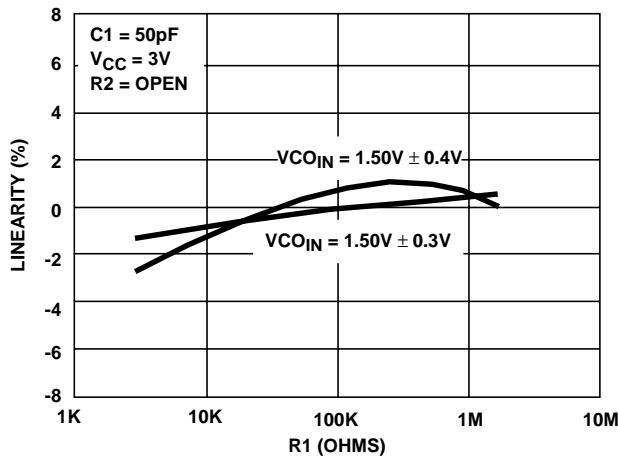


FIGURE 35. HC4046A VCO LINEARITY vs R1 ( $V_{CC} = 3V$ )

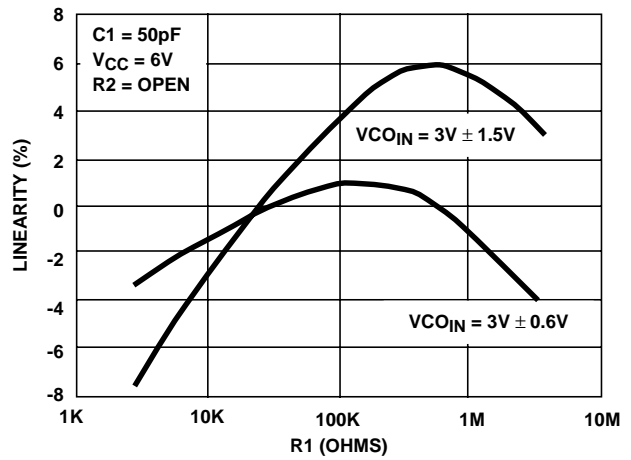


FIGURE 36. HC4046A VCO LINEARITY vs R1 ( $V_{CC} = 6V$ )

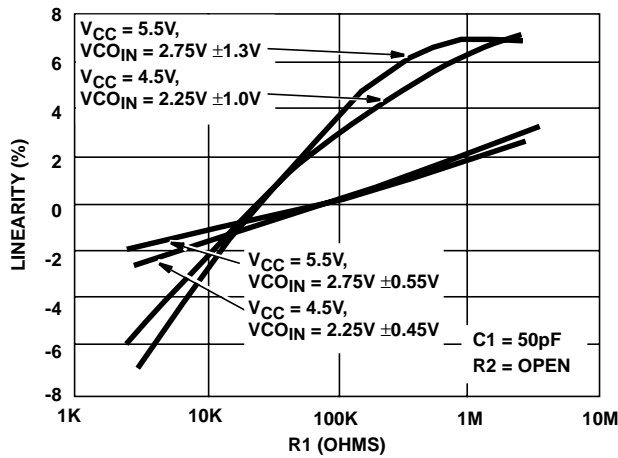


FIGURE 37. HCT4046A VCO LINEARITY vs R1 ( $V_{CC} = 4.5V, V_{CC} = 5.5V$ )

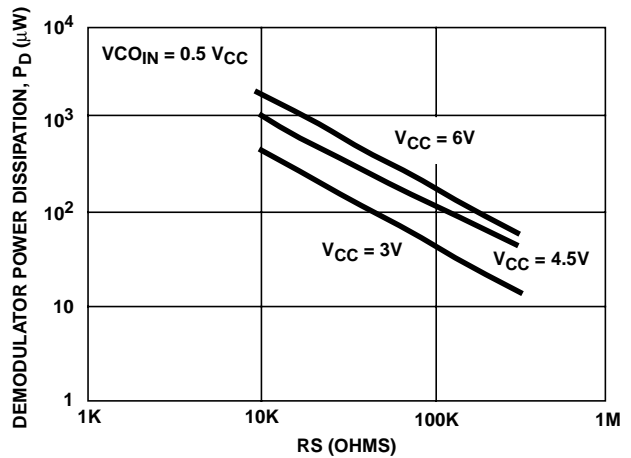


FIGURE 38. HC4046A DEMODULATOR POWER DISSIPATION vs  $R_S$  (TYP) ( $V_{CC} = 3V, 4.5V, 6V$ )

Typical Performance Curves (Continued)

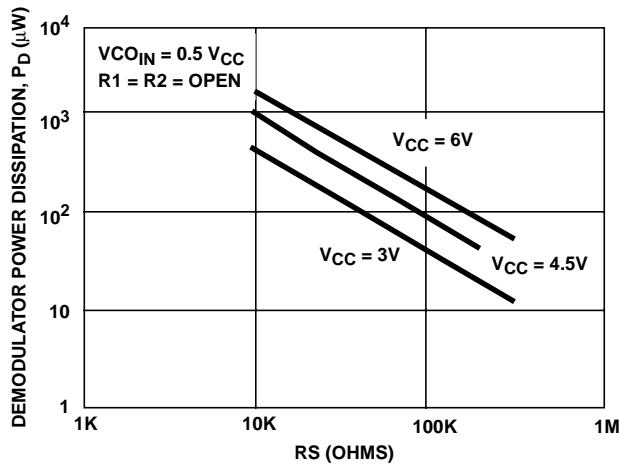


FIGURE 39. HCT4046A DEMODULATOR POWER DISSIPATION vs  $R_S$  (TYP) ( $V_{CC} = 3V, 4.5V, 6V$ )

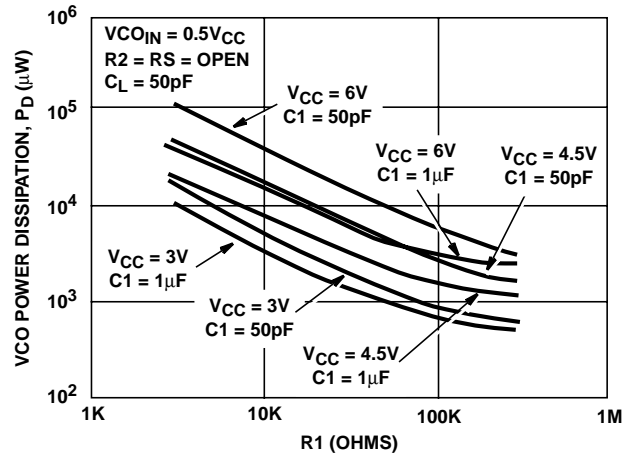


FIGURE 40. HC4046A VCO POWER DISSIPATION vs  $R_1$  ( $C_1 = 50pF, 1\mu F$ )

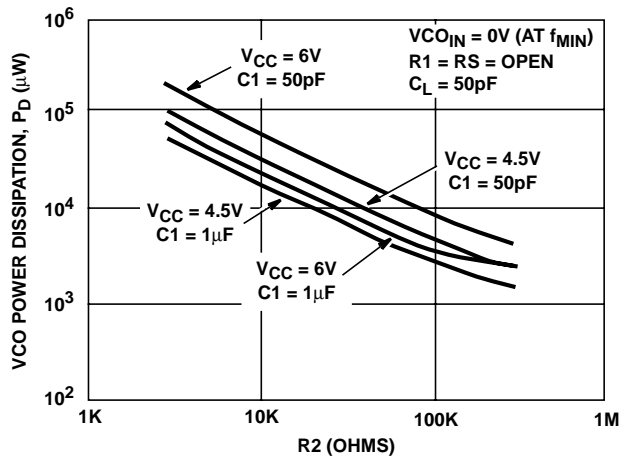


FIGURE 41. HCT4046A VCO POWER DISSIPATION vs  $R_2$  ( $C_1 = 50pF, 1\mu F$ )

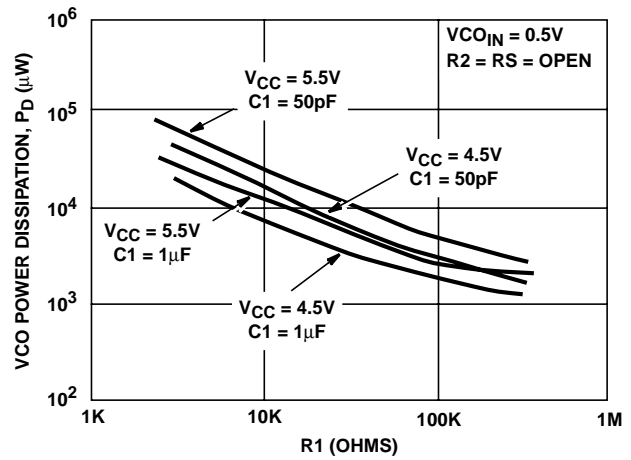


FIGURE 42. HCT4046A VCO POWER DISSIPATION vs  $R_1$  ( $C_1 = 50pF, 1\mu F$ )

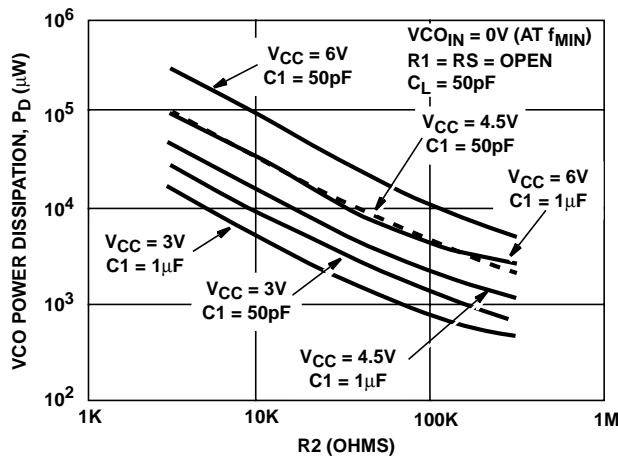


FIGURE 43. HC4046A VCO POWER DISSIPATION vs  $R_2$  ( $C_1 = 50pF, 1\mu F$ )

# CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A

## HC/HCT4046A C<sub>PD</sub>

| CHIP SECTION        | HC | HCT | UNIT |
|---------------------|----|-----|------|
| Comparator 1        | 48 | 50  | pF   |
| Comparators 2 and 3 | 39 | 48  | pF   |
| VCO                 | 61 | 53  | pF   |

References should be made to Figures 11 through 15 and Figures 27 through 32 as indicated in the table.

Values of the selected components should be within the following ranges:

- R1            Between 3kΩ and 300kΩ
- R2            Between 3kΩ and 300kΩ
- R1 + R2      Parallel Value > 2.7kΩ
- C1            Greater Than 40pF

### Application Information

This information is a guide for the approximation of values of external components to be used with the 'HC4046A and 'HCT4046A in a phase-lock-loop system.

| SUBJECT                            | PHASE COMPARATOR | DESIGN CONSIDERATIONS   |
|------------------------------------|------------------|---|
| VCO Frequency Without Extra Offset | PC1, PC2 or PC3  | <p>VCO Frequency Characteristic</p> <p>With <math>R2 = \infty</math> and <math>R1</math> within the range <math>3k\Omega &lt; R1 &lt; 300k\Omega</math>, the characteristics of the VCO operation will be as shown in Figures 11 - 15. (Due to <math>R1</math>, <math>C1</math> time constant a small offset remains when <math>R2 = \infty</math>.)</p> <p style="text-align: center;"><b>FIGURE 44. FREQUENCY CHARACTERISTIC OF VCO OPERATING WITHOUT OFFSET: <math>f_o</math> = CENTER FREQUENCY: <math>2f_L</math> = FREQUENCY LOCK RANGE</b></p> |
|                                    | PC1              | <p>Selection of <math>R1</math> and <math>C1</math></p> <p>Given <math>f_o</math>, determine the values of <math>R1</math> and <math>C1</math> using Figures 11 - 15</p>  |
|                                    | PC2 or PC3       | <p>Given <math>f_{MAX}</math> calculate <math>f_o</math> as <math>f_{MAX}/2</math> and determine the values of <math>R1</math> and <math>C1</math> using Figures 11 - 15. To obtain <math>2f_L</math>: <math>2f_L \approx 1.2 (V_{CC} - 1.8V)/(R1C1)</math> where valid range of <math>V_{COIN}</math> is <math>1.1V &lt; V_{COIN} &lt; V_{CC} - 0.9V</math></p>  |
| VCO Frequency with Extra Offset    | PC1, PC2 or PC3  | <p>VCO Frequency Characteristic</p> <p>With <math>R1</math> and <math>R2</math> within the ranges <math>3k\Omega &lt; R1 &lt; 300k\Omega</math>, <math>3k\Omega &lt; R2 &lt; 300k\Omega</math>, the characteristics of the VCO operation will be as shown in Figures 27 - 32.</p> <p style="text-align: center;"><b>FIGURE 45. FREQUENCY CHARACTERISTIC OF VCO OPERATING WITH OFFSET: <math>f_o</math> = CENTER FREQUENCY: <math>2f_L</math> = FREQUENCY LOCK RANGE</b></p>   |
|                                    | PC1, PC2 or PC3  | <p>Selection of <math>R1</math>, <math>R2</math> and <math>C1</math></p> <p>Given <math>f_o</math> and <math>f_L</math>, offset frequency, <math>f_{MIN}</math>, may be calculated from <math>f_{MIN} \approx f_o - 1.6 f_L</math>. Obtain the values of <math>C1</math> and <math>R2</math> by using Figures 27 - 30. Calculate the values of <math>R1</math> from Figures 31 - 32.</p>  |

**CD54HC4046A, CD74HC4046A, CD54HCT4046A, CD74HCT4046A**

| SUBJECT  | PHASE COMPARATOR | DESIGN CONSIDERATIONS   |
|--|------------------|---|
| PLL Conditions with No Signal at the SIG <sub>IN</sub> Input | PC1              | VCO adjusts to $f_0$ with $\phi_{\text{DEMOUT}} = 90^\circ$ and $V_{\text{VCOIN}} = 1/2 V_{\text{CC}}$ (see Figure 2)   |
|  | PC2              | VCO adjusts to $f_{\text{MIN}}$ with $\phi_{\text{DEMOUT}} = -360^\circ$ and $V_{\text{VCOIN}} = 0V$ (see Figure 4)   |
|  | PC3              | VCO adjusts to $f_{\text{MAX}}$ with $\phi_{\text{DEMOUT}} = 360^\circ$ and $V_{\text{VCOIN}} = V_{\text{CC}}$ (see Figure 6)   |
| PLL Frequency Capture Range                                  | PC1, PC2 or PC3  | <p>Loop Filter Component Selection</p> <p>(A) <math>\tau = R3 \times C2</math>      (B) AMPLITUDE CHARACTERISTIC      (C) POLE-ZERO DIAGRAM</p> <p>A small capture range (<math>2f_c</math>) is obtained if <math>\tau &gt; 2f_c \approx 1/\pi (2\pi f_L/\tau)^{1/2}</math></p> <p align="center"><b>FIGURE 46. SIMPLE LOOP FILTER FOR PLL WITHOUT OFFSET</b></p> |
|  |                  | <p>(A) <math>\tau1 = R3 \times C2;</math><br/> <math>\tau2 = R4 \times C2;</math><br/> <math>\tau3 = (R3 + R4) \times C2</math>      (B) AMPLITUDE CHARACTERISTIC      (C) POLE-ZERO DIAGRAM</p> <p align="center"><b>FIGURE 47. SIMPLE LOOP FILTER FOR PLL WITH OFFSET</b></p>   |
| PLL Locks on Harmonics at Center Frequency                   | PC1 or PC3       | Yes   |
|  | PC2              | No  |
| Noise Rejection at Signal Input                              | PC1              | High  |
|  | PC2 or PC3       | Low   |
| AC Ripple Content when PLL is Locked                         | PC1              | $f_r = 2f_i$ , large ripple content at $\phi_{\text{DEMOUT}} = 90^\circ$  |
|  | PC2              | $f_r = f_i$ , small ripple content at $\phi_{\text{DEMOUT}} = 0^\circ$  |
|  | PC3              | $f_r = f_{\text{SIGIN}}$ , large ripple content at $\phi_{\text{DEMOUT}} = 180^\circ$   |

**PACKAGING INFORMATION**

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                   |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------------------------|
| <a href="#">5962-8875701EA</a>  | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-8875701EA<br>CD54HCT4046AF3<br>A |
| <a href="#">5962-8960901EA</a>  | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-8960901EA<br>CD54HC4046AF3A      |
| <a href="#">CD54HC4046AF</a>    | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | CD54HC4046AF                          |
| CD54HC4046AF.A                  | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | CD54HC4046AF                          |
| <a href="#">CD54HC4046AF3A</a>  | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-8960901EA<br>CD54HC4046AF3A      |
| CD54HC4046AF3A.A                | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-8960901EA<br>CD54HC4046AF3A      |
| <a href="#">CD54HCT4046AF3A</a> | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-8875701EA<br>CD54HCT4046AF3<br>A |
| CD54HCT4046AF3A.A               | Active        | Production           | CDIP (J)   16   | 25   TUBE             | No          | SNPB                                 | N/A for Pkg Type                  | -55 to 125   | 5962-8875701EA<br>CD54HCT4046AF3<br>A |
| <a href="#">CD74HC4046AE</a>    | Active        | Production           | PDIP (N)   16   | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -55 to 125   | CD74HC4046AE                          |
| CD74HC4046AE.A                  | Active        | Production           | PDIP (N)   16   | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -55 to 125   | CD74HC4046AE                          |
| <a href="#">CD74HC4046AM</a>    | Active        | Production           | SOIC (D)   16   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046AM.A                  | Active        | Production           | SOIC (D)   16   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| <a href="#">CD74HC4046AM96</a>  | Active        | Production           | SOIC (D)   16   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046AM96.A                | Active        | Production           | SOIC (D)   16   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046AM96E4                | Active        | Production           | SOIC (D)   16   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046AM96G4                | Active        | Production           | SOIC (D)   16   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| <a href="#">CD74HC4046AMT</a>   | Active        | Production           | SOIC (D)   16   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046AMT.A                 | Active        | Production           | SOIC (D)   16   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| <a href="#">CD74HC4046ANSR</a>  | Active        | Production           | SOP (NS)   16   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046ANSR.A                | Active        | Production           | SOP (NS)   16   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HC4046AM                              |
| CD74HC4046APW.A                 | Active        | Production           | TSSOP (PW)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HJ4046A                               |
| <a href="#">CD74HC4046APWR</a>  | Active        | Production           | TSSOP (PW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HJ4046A                               |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| CD74HC4046APWR.A                | Active        | Production           | TSSOP (PW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HJ4046A             |
| <a href="#">CD74HC4046APWT</a>  | Active        | Production           | TSSOP (PW)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HJ4046A             |
| CD74HC4046APWT.A                | Active        | Production           | TSSOP (PW)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HJ4046A             |
| <a href="#">CD74HCT4046AE</a>   | Active        | Production           | PDIP (N)   16   | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -55 to 125   | CD74HCT4046AE       |
| CD74HCT4046AE.A                 | Active        | Production           | PDIP (N)   16   | 25   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -55 to 125   | CD74HCT4046AE       |
| <a href="#">CD74HCT4046AM</a>   | Active        | Production           | SOIC (D)   16   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HCT4046AM           |
| CD74HCT4046AM.A                 | Active        | Production           | SOIC (D)   16   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HCT4046AM           |
| <a href="#">CD74HCT4046AM96</a> | Active        | Production           | SOIC (D)   16   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HCT4046AM           |
| CD74HCT4046AM96.A               | Active        | Production           | SOIC (D)   16   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HCT4046AM           |
| <a href="#">CD74HCT4046AMT</a>  | Active        | Production           | SOIC (D)   16   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HCT4046AM           |
| CD74HCT4046AMT.A                | Active        | Production           | SOIC (D)   16   | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 125   | HCT4046AM           |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF CD54HC4046A, CD54HCT4046A, CD74HC4046A, CD74HCT4046A :**

- Catalog : [CD74HC4046A](#), [CD74HCT4046A](#)
- Military : [CD54HC4046A](#), [CD54HCT4046A](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| CD74HC4046AM96  | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |
| CD74HC4046ANSR  | SOP          | NS              | 16   | 2000 | 330.0              | 16.4               | 8.1     | 10.4    | 2.5     | 12.0    | 16.0   | Q1            |
| CD74HC4046APWR  | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| CD74HC4046APWT  | TSSOP        | PW              | 16   | 250  | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| CD74HCT4046AM96 | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |



**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| CD74HC4046AM96  | SOIC         | D               | 16   | 2500 | 353.0       | 353.0      | 32.0        |
| CD74HC4046ANSR  | SOP          | NS              | 16   | 2000 | 353.0       | 353.0      | 32.0        |
| CD74HC4046APWR  | TSSOP        | PW              | 16   | 2000 | 353.0       | 353.0      | 32.0        |
| CD74HC4046APWT  | TSSOP        | PW              | 16   | 250  | 353.0       | 353.0      | 32.0        |
| CD74HCT4046AM96 | SOIC         | D               | 16   | 2500 | 353.0       | 353.0      | 32.0        |

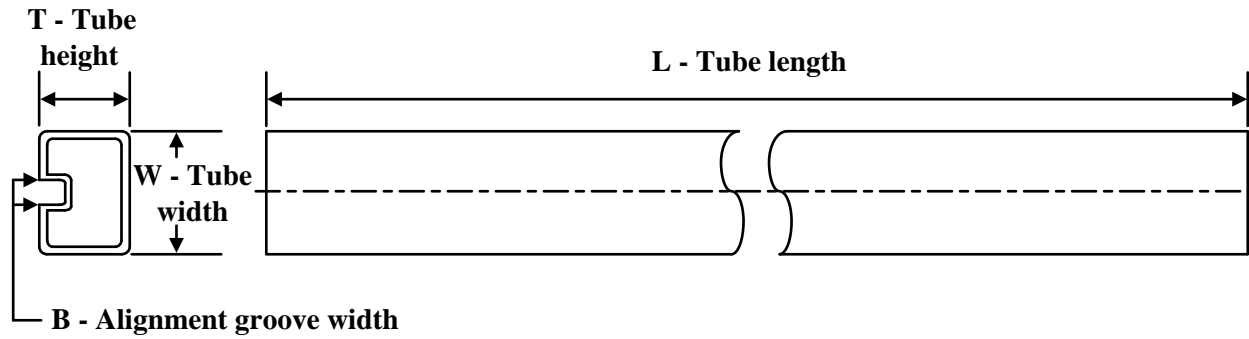**TUBE**


\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| CD74HC4046AE    | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HC4046AE    | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HC4046AE.A  | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HC4046AE.A  | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HC4046AM    | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| CD74HC4046AM.A  | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| CD74HC4046APW.A | PW           | TSSOP        | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |
| CD74HCT4046AE   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HCT4046AE   | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HCT4046AE.A | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HCT4046AE.A | N            | PDIP         | 16   | 25  | 506    | 13.97  | 11230  | 4.32   |
| CD74HCT4046AM   | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |
| CD74HCT4046AM.A | D            | SOIC         | 16   | 40  | 507    | 8      | 3940   | 4.32   |

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



4040047-6/M 06/11

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  -  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  -  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AC.

J (R-GDIP-T\*\*)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE




| DIM \ PINS ** | 14                     | 16                     | 18                     | 20                     |
|---------------|------------------------|------------------------|------------------------|------------------------|
| A             | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX         | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN         | —                      | —                      | —                      | —                      |
| C MAX         | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN         | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |



4040083/F 03/03

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package is hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

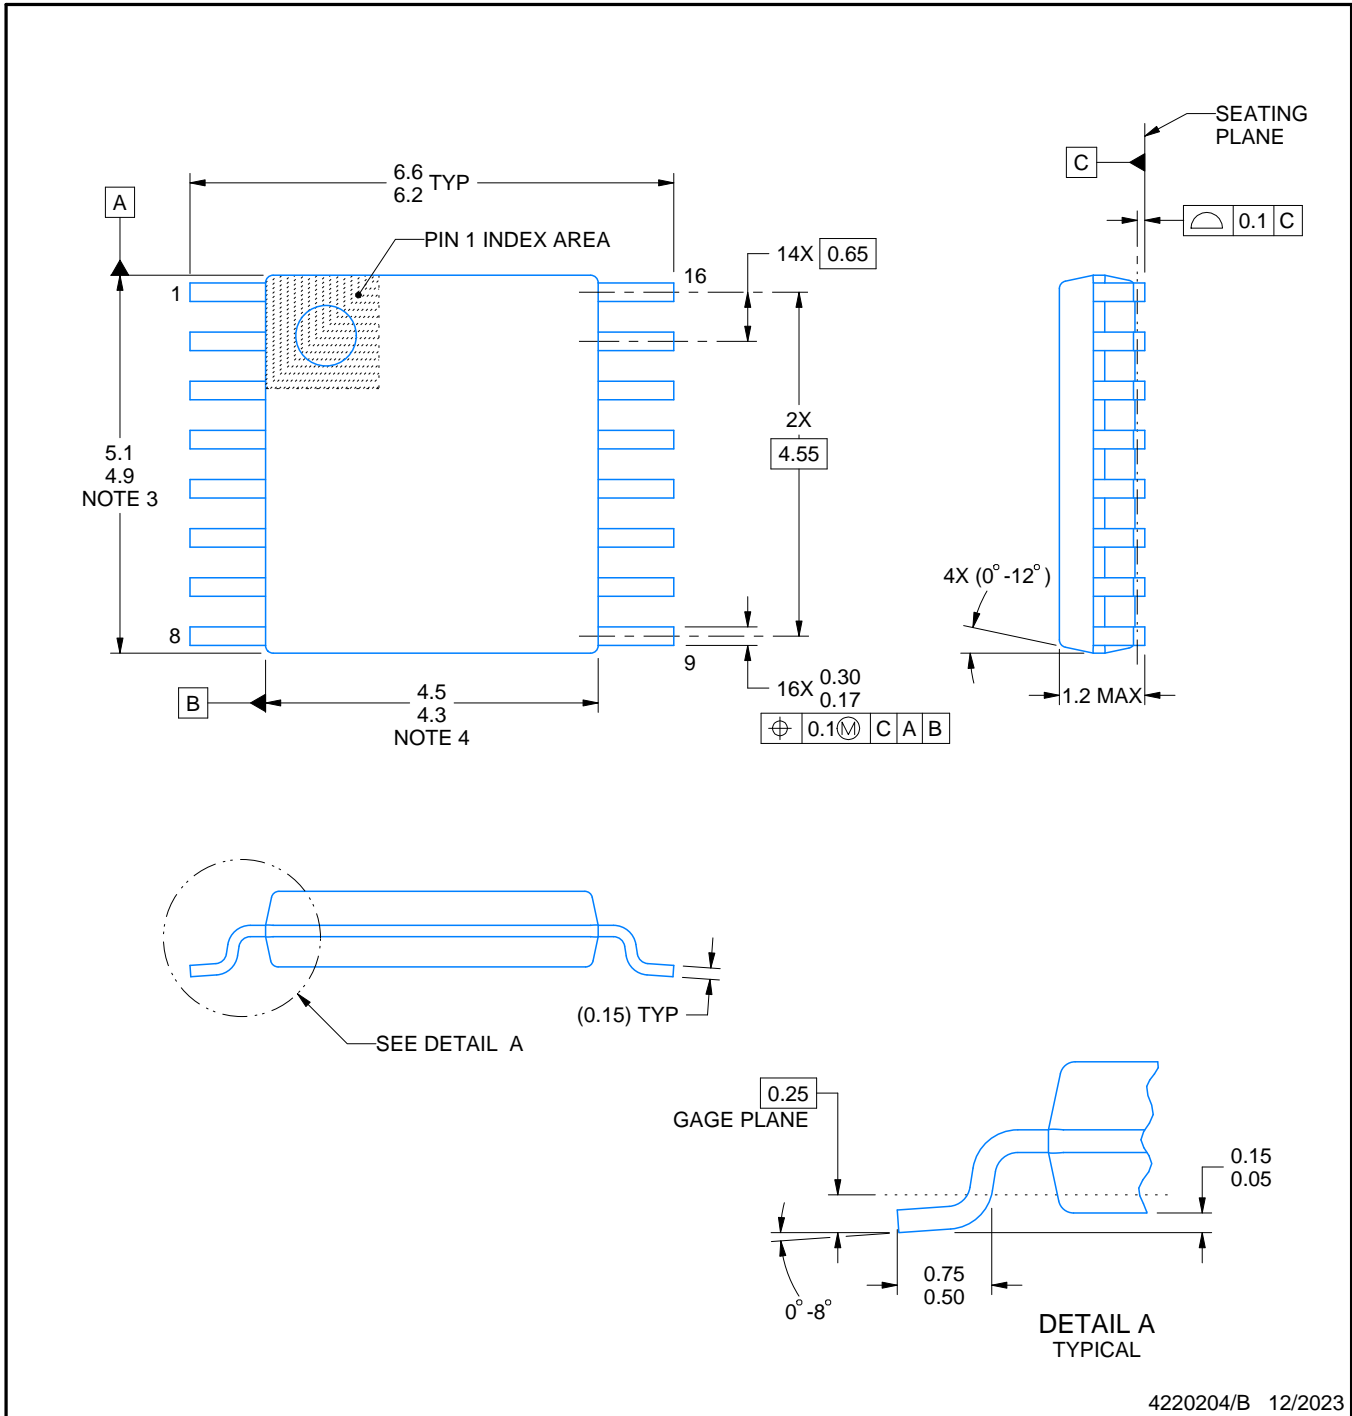

4220204/B 12/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X



SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

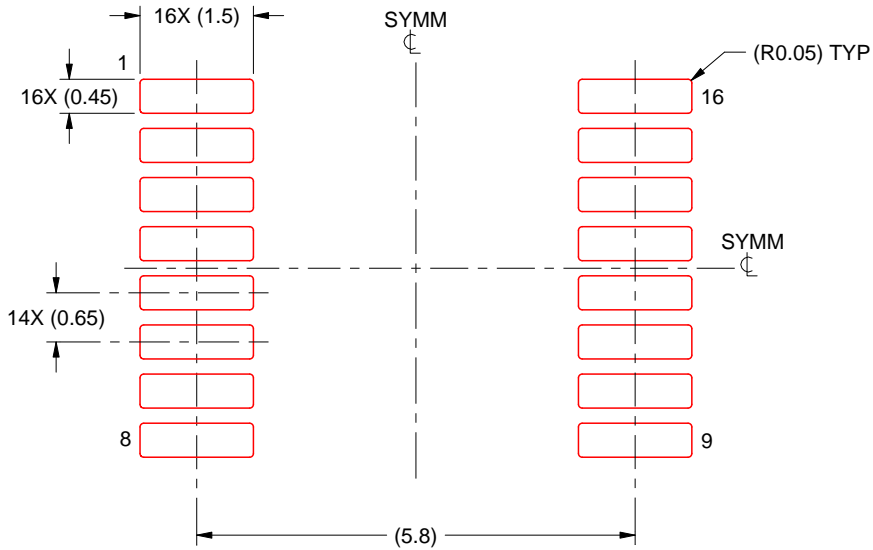

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - D The 20 pin end lead shoulder width is a vendor option, either half or full width.

4040049/E 12/2002





# PACKAGE OUTLINE

## NS0016A

### SOP - 2.00 mm max height

SOP



4220735/A 12/2021

#### NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.

# EXAMPLE BOARD LAYOUT

NS0016A

SOP - 2.00 mm max height

SOP



4220735/A 12/2021

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.

6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

NS0016A

SOP - 2.00 mm max height

SOP



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:7X

4220735/A 12/2021

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025