

# TAD5112-Q1 Automotive Low-Power Stereo audio DAC with 110dB Dynamic Range and Headphone/Line Driver

## 1 Features

- AEC-Q100 qualified for automotive applications
  - Temperature grade 1:  $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$
- Stereo differential or quad single-ended low-power audio DAC
  - Performance:
    - DAC to differential line-out dynamic range: 110dB
    - DAC to differential headphone-out dynamic range: 109dB
    - THD+N:  $-101\text{dB}$
  - Line-out/headphone output voltage:
    - Differential,  $2V_{\text{RMS}}$  full-scale
    - Psuedo-differential,  $1V_{\text{RMS}}$  full-scale
    - Single-ended,  $1V_{\text{RMS}}$  full-scale
  - DAC sample Rates ( $f_s$ ) = 4kHz to 768kHz
- Key features
  - Analog input to output bypass path
  - 4-channel PDM digital microphone record path
  - Input and output mix/mux options
  - Voice activity detection
  - Ultrasonic activity detection
  - Ultrasonic signal or tone generator
  - Battery and thermal foldback protection
  - Signal distortion limiter
  - Low and ultra-low latency filter options
  - Programmable HPF and biquad filters
  - I<sup>2</sup>C & SPI control interface
  - Audio serial interface
    - Format: TDM, I<sup>2</sup>S or Left-justified (LJ)
    - Word length: 16, 20, 24 or 32 Bits
    - Bus controller and target modes
    - Daisy chain in TDM mode
  - Programmable PLL for flexible clocking
  - Auto clock and sample rate detection
  - Low power modes
    - 10.5mW for 2-Ch playback (1.8V supply)
  - Single supply operation AVDD: 1.8V or 3.3V
  - I/O supply operation: 1.2V or 1.8V or 3.3V

## 2 Applications

- [Telematics control unit](#)
- [Automotive head unit](#)
- [Digital cockpit processing unit](#)
- [Rear seat entertainment](#)
- [Vehicle instrument cluster](#)


## 3 Description

The TAD5112-Q1 is an automotive low-power audio DAC with  $2V_{\text{RMS}}$  differential output, 110dB dynamic range stereo channels or  $1V_{\text{RMS}}$  single-ended output, 107dB dynamic range quad channels. The TAD5112-Q1 supports both differential and single-ended inputs and outputs. The DAC outputs can be configured for either line-output or headphone loads. The TAD5112-Q1 can drive up to 62.5mW into a  $16\Omega$  headphone load. The TAD5112-Q1 integrates programmable channel gain, digital volume control, a low-jitter phase-locked loop (PLL), a programmable high-pass filter (HPF), programmable EQ and biquad filters, low-latency and ultra low-latency filter modes, and allows for sample rates up to 768kHz for both the DAC and PDM microphone signal-chains. The TAD5112-Q1 supports analog input to output bypass option and also recording up to four-channel digital microphones with the PDM interface. Data from analog-in and digital-in can be mixed inside the device as well. The TAD5112-Q1 supports time-division multiplexing (TDM), I<sup>2</sup>S, or left-justified (LJ) audio formats, and can be controlled with I<sup>2</sup>C or SPI. These integrated high-performance features, along with a single supply operation, make TAD5112-Q1 an excellent choice for space-constrained audio applications.

### Device Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | PACKAGE SIZE (NOM) <sup>(2)</sup> |
|-------------|------------------------|-----------------------------------|
| TAD5112-Q1  | VQFN (24)              | 4mm x 4mm with 0.5mm Pitch        |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.

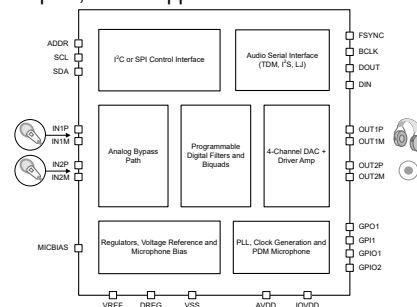


**Simplified Block Diagram**



## Table of Contents

|                                                                               |           |                                                                      |            |
|-------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------|------------|
| <b>1 Features</b> .....                                                       | <b>1</b>  | 6.1 Overview.....                                                    | <b>20</b>  |
| <b>2 Applications</b> .....                                                   | <b>1</b>  | 6.2 Functional Block Diagram.....                                    | <b>21</b>  |
| <b>3 Description</b> .....                                                    | <b>1</b>  | 6.3 Feature Description.....                                         | <b>21</b>  |
| <b>4 Pin Configuration and Functions</b> .....                                | <b>3</b>  | 6.4 Device Functional Modes.....                                     | <b>75</b>  |
| <b>5 Specifications</b> .....                                                 | <b>5</b>  | 6.5 Programming.....                                                 | <b>76</b>  |
| 5.1 Absolute Maximum Ratings.....                                             | <b>5</b>  | <b>7 Register Maps</b> .....                                         | <b>82</b>  |
| 5.2 ESD Ratings.....                                                          | <b>5</b>  | 7.1 Device Configuration Registers.....                              | <b>82</b>  |
| 5.3 Recommended Operating Conditions.....                                     | <b>5</b>  | 7.2 Programmable Coefficient Registers.....                          | <b>180</b> |
| 5.4 Thermal Information.....                                                  | <b>6</b>  | <b>8 Application and Implementation</b> .....                        | <b>211</b> |
| 5.5 Electrical Characteristics.....                                           | <b>6</b>  | 8.1 Application Information.....                                     | <b>211</b> |
| 5.6 Timing Requirements: I <sup>2</sup> C Interface.....                      | <b>12</b> | 8.2 Typical Application.....                                         | <b>211</b> |
| 5.7 Switching Characteristics: I <sup>2</sup> C Interface.....                | <b>13</b> | 8.3 Power Supply Recommendations.....                                | <b>214</b> |
| 5.8 Timing Requirements: SPI.....                                             | <b>13</b> | 8.4 Layout.....                                                      | <b>215</b> |
| 5.9 Switching Characteristics: SPI.....                                       | <b>13</b> | <b>9 Device and Documentation Support</b> .....                      | <b>217</b> |
| 5.10 Timing Requirements: TDM, I <sup>2</sup> S or LJ Interface.....          | <b>13</b> | 9.1 Documentation Support.....                                       | <b>217</b> |
| 5.11 Switching Characteristics: TDM, I <sup>2</sup> S or LJ<br>Interface..... | <b>14</b> | 9.2 Receiving Notification of Documentation Updates.....             | <b>217</b> |
| 5.12 Timing Requirements: PDM Digital Microphone<br>Interface.....            | <b>15</b> | 9.3 Support Resources.....                                           | <b>217</b> |
| 5.13 Switching Characteristics: PDM Digital<br>Microphone Interface.....      | <b>15</b> | 9.4 Trademarks.....                                                  | <b>217</b> |
| 5.14 Timing Diagrams.....                                                     | <b>15</b> | 9.5 Electrostatic Discharge Caution.....                             | <b>218</b> |
| 5.15 Typical Characteristics.....                                             | <b>17</b> | 9.6 Glossary.....                                                    | <b>218</b> |
| <b>6 Detailed Description</b> .....                                           | <b>20</b> | <b>10 Revision History</b> .....                                     | <b>218</b> |
|                                                                               |           | <b>11 Mechanical, Packaging, and Orderable<br/>Information</b> ..... | <b>218</b> |

## 4 Pin Configuration and Functions

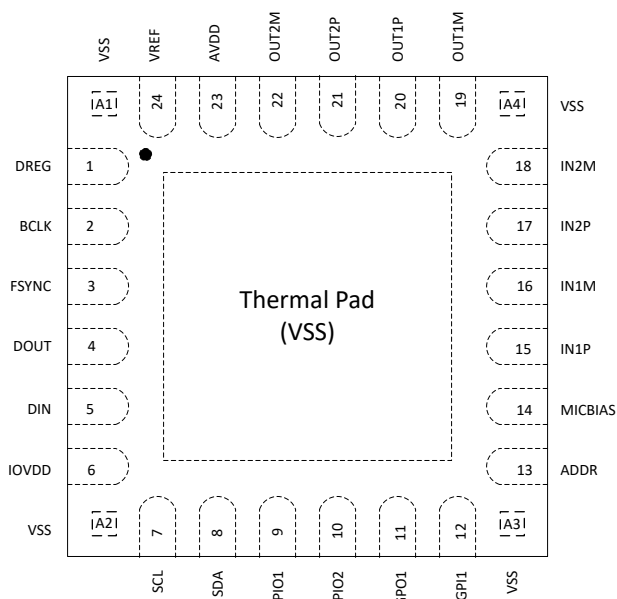

Notes:-  
Not to Scale

**Figure 4-1. 24-Pin QFN Package with Exposed Thermal Pad and Corner Pins, Top View**

**Table 4-1. Pin Functions**

| PIN   |     | TYPE <sup>(1)</sup> | DESCRIPTION                                                                                                                                                   |
|-------|-----|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME  | NO. |                     |                                                                                                                                                               |
| VSS   | A1  | Ground              | Ground pin. Short directly to board ground plane.                                                                                                             |
| DREG  | 1   | Digital Supply      | Digital on-chip regulator output voltage for digital supply (1.55V, nominal)                                                                                  |
| BCLK  | 2   | Digital I/O         | Audio serial data interface bus bit clock                                                                                                                     |
| FSYNC | 3   | Digital I/O         | Audio serial data interface bus frame synchronization signal                                                                                                  |
| DOUT  | 4   | Digital I/O         | Audio serial data interface bus output                                                                                                                        |
| DIN   | 5   | Digital Input       | Audio serial data interface bus input                                                                                                                         |
| IOVDD | 6   | Digital Supply      | Digital I/O power supply (1.2V or 1.8V or 3.3V, nominal)                                                                                                      |
| VSS   | A2  | Ground              | Ground pin. Short directly to board ground plane.                                                                                                             |
| SCL   | 7   | Digital Input       | Clock for I <sup>2</sup> C control interface                                                                                                                  |
| SDA   | 8   | Digital Input       | Data for I <sup>2</sup> C control interface                                                                                                                   |
| GPIO1 | 9   | Digital I/O         | General-purpose digital input/output 1 (multipurpose functions such as daisy-chain input, audio data output, PLL input clock source, interrupt, and so forth) |
| GPIO2 | 10  | Digital I/O         | General-purpose digital input/output 2 (multipurpose functions such as daisy-chain input, audio data output, PLL input clock source, interrupt, and so forth) |
| GPO1  | 11  | Digital Output      | General-purpose digital output 1 (multipurpose functions such as audio data output, interrupt, and so forth)                                                  |
| GPI1  | 12  | Digital Input       | General-purpose digital input 1 (multipurpose functions such as daisy-chain input, PLL input clock source, and so forth)                                      |

**Table 4-1. Pin Functions (continued)**

| PIN     |             | TYPE <sup>(1)</sup> | DESCRIPTION                                                                          |
|---------|-------------|---------------------|--------------------------------------------------------------------------------------|
| NAME    | NO.         |                     |                                                                                      |
| VSS     | A3          | Ground              | Ground pin. Short directly to board ground plane.                                    |
| ADDR    | 13          | Analog Input        | I <sup>2</sup> C address pin                                                         |
| MICBIAS | 14          | Analog              | Microphone bias output (Programmable output up to 3V)                                |
| IN1P    | 15          | Analog Input        | Analog input 1P pin (Analog Bypass Path)                                             |
| IN1M    | 16          | Analog Input        | Analog input 1M pin (Analog Bypass Path)                                             |
| IN2P    | 17          | Analog Input        | Analog input 2P pin (Analog Bypass Path)                                             |
| IN2M    | 18          | Analog Input        | Analog input 2M pin (Analog Bypass Path)                                             |
| VSS     | A4          | Ground              | Ground pin. Short directly to board ground plane.                                    |
| OUT1M   | 19          | Analog Output       | Analog output 1M pin                                                                 |
| OUT1P   | 20          | Analog Output       | Analog output 1P pin                                                                 |
| OUT2P   | 21          | Analog Output       | Analog output 2P pin                                                                 |
| OUT2M   | 22          | Analog Output       | Analog output 2M pin                                                                 |
| AVDD    | 23          | Analog Supply       | Analog power (1.8V or 3.3V, nominal)                                                 |
| VREF    | 24          | Analog              | Analog reference voltage filter output                                               |
| VSS     | Thermal Pad | Ground              | Thermal pad shorted to internal device ground. Short directly to board ground plane. |

(1) I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power.



## 5 Specifications

### 5.1 Absolute Maximum Ratings

over the operating ambient temperature range (unless otherwise noted)<sup>(1)</sup>

|                            |                                                 | MIN  | MAX         | UNIT |
|----------------------------|-------------------------------------------------|------|-------------|------|
| Supply voltage             | AVDD to VSS (thermal pad)                       | −0.3 | 3.9         | V    |
| Supply voltage             | IOVDD to VSS (thermal pad)                      | −0.3 | 3.9         | V    |
| Ground voltage differences | VSS to VSS (thermal pad)                        | −0.3 | 0.3         | V    |
| Analog input voltage       | Analog input pins voltage to VSS (thermal pad)  | −0.3 | 5.656       | V    |
| Digital input voltage      | Digital input pins voltage to VSS (thermal pad) | −0.3 | IOVDD + 0.3 | V    |
| Temperature                | Functional ambient, T <sub>A</sub>              | −55  | 125         | °C   |
|                            | Operating ambient, T <sub>A</sub>               | −40  | 125         |      |
|                            | Junction, T <sub>J</sub>                        | −40  | 150         |      |
|                            | Storage, T <sub>stg</sub>                       | −65  | 150         |      |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

### 5.2 ESD Ratings

|                    |                         |                                                         | VALUE | UNIT |
|--------------------|-------------------------|---------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup> | ±2000 | V    |
| V <sub>(ESD)</sub> | Electrostatic discharge | Charged-device model (CDM), per AEC Q100-011            | ±500  |      |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 5.3 Recommended Operating Conditions

over the operating ambient temperature range (unless otherwise noted)

|                     |                                                                                 | MIN  | NOM | MAX   | UNIT |
|---------------------|---------------------------------------------------------------------------------|------|-----|-------|------|
| <b>POWER</b>        |                                                                                 |      |     |       |      |
| AVDD <sup>(1)</sup> | Analog supply voltage to VSS (thermal pad) - AVDD 3.3V operation                | 3.0  | 3.3 | 3.6   | V    |
|                     | Analog supply voltage to VSS (thermal pad) - AVDD 1.8V operation <sup>(2)</sup> | 1.65 | 1.8 | 1.95  | V    |
| IOVDD               | IO supply voltage to VSS (thermal pad) - IOVDD 3.3V operation                   | 3.0  | 3.3 | 3.6   | V    |
|                     | IO supply voltage to VSS (thermal pad) - IOVDD 1.8V operation <sup>(3)</sup>    | 1.65 | 1.8 | 1.95  |      |
|                     | IO supply voltage to VSS (thermal pad) - IOVDD 1.2V operation <sup>(3)</sup>    | 1.08 | 1.2 | 1.32  | V    |
| <b>INPUTS</b>       |                                                                                 |      |     |       |      |
| INxx                | Analog input pins voltage to VSS (thermal pad) for line-in bypass path          | 0    |     | AVDD  | V    |
|                     | Digital input pins voltage to VSS (thermal pad)                                 | 0    |     | IOVDD | V    |
| ADDR                | ADDR pin w.r.t VSS (thermal pad)                                                | 0    |     | AVDD  | V    |
| <b>TEMPERATURE</b>  |                                                                                 |      |     |       |      |
| T <sub>A</sub>      | Operating ambient temperature                                                   | −40  |     | 125   | °C   |

over the operating ambient temperature range (unless otherwise noted)

|                |                                                                                                 | MIN | NOM | MAX                   | UNIT |
|----------------|-------------------------------------------------------------------------------------------------|-----|-----|-----------------------|------|
| <b>OTHERS</b>  |                                                                                                 |     |     |                       |      |
| CCLK           | GPIOx or GPIx controller mode clock frequency (CCLK)                                            |     |     | 36.864 <sup>(4)</sup> | MHz  |
| C <sub>b</sub> | SCL and SDA bus capacitance for I <sup>2</sup> C interface supports standard-mode and fast-mode |     |     | 400                   | pF   |
|                | SCL and SDA bus capacitance for I <sup>2</sup> C interface supports fast-mode plus              |     |     | 550                   |      |
| C <sub>L</sub> | Digital output load capacitance                                                                 |     | 20  | 50                    | pF   |

- (1) VSS and VSS (thermal pad); all ground pins must be tied together and must not differ in voltage by more than 0.2V.
- (2) Set the AVDD\_MODE bit correctly for AVDD 1.8V Operation. Refer Section 8.3 for more details.
- (3) Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.
- (4) CCLK input rise time (V<sub>IL</sub> to V<sub>IH</sub>) and fall time (V<sub>IH</sub> to V<sub>IL</sub>) must be less than 5ns. For better audio noise performance, CCLK input must be used with low jitter.

## 5.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TAD5112-Q1 | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | RGE (VQFN) |      |
|                               |                                              | 24 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 38.4       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 26.3       | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 15.9       | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.5        | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 15.8       | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 13.8       | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 5.5 Electrical Characteristics

At T<sub>A</sub> = 25°C, AVDD = 3.3V, IOVDD = 3.3V, f<sub>IN</sub> = 1kHz sinusoidal signal, f<sub>S</sub> = 48kHz, 32-bit audio data, BCLK = 256 × f<sub>S</sub>, TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters, 1200Ω/600Ω line-out load in differential/single-ended configuration or 32Ω/16Ω receiver/headphone load as applicable, MICBIAS programmed to VREF, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

| PARAMETER                                                  | TEST CONDITIONS                                                 | MIN | NOM | MAX | UNIT             |
|------------------------------------------------------------|-----------------------------------------------------------------|-----|-----|-----|------------------|
| <b>DAC Performance for Line Output/Head Phone Playback</b> |                                                                 |     |     |     |                  |
| Full Scale Output Voltage                                  | Differential output between OUTxP and OUTxM, AVDD = 3.3V        |     | 2   |     | V <sub>RMS</sub> |
|                                                            | Differential output between OUTxP and OUTxM, AVDD = 1.8V        |     | 1   |     |                  |
|                                                            | Single-ended output, AVDD = 3.3V                                |     | 1   |     |                  |
|                                                            | Single-ended output, AVDD = 1.8V                                |     | 0.5 |     |                  |
|                                                            | Pseudo-differential output between OUTxP and OUTxM, AVDD = 3.3V |     | 1   |     |                  |
|                                                            | Pseudo-differential output between OUTxP and OUTxM, AVDD = 1.8V |     | 0.5 |     |                  |

At  $T_A = 25^\circ\text{C}$ ,  $AVDD = 3.3\text{V}$ ,  $IOVDD = 3.3\text{V}$ ,  $f_{IN} = 1\text{kHz}$  sinusoidal signal,  $f_S = 48\text{kHz}$ , 32-bit audio data,  $BCLK = 256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters,  $1200\Omega/600\Omega$  line-out load in differential/single-ended configuration or  $32\Omega/16\Omega$  receiver/headphone load as applicable, MICBIAS programmed to VREF, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

| PARAMETER |                                                      | TEST CONDITIONS                                                                               | MIN | NOM | MAX | UNIT |
|-----------|------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----|-----|-----|------|
| SNR       | Signal-to-noise ratio, A-weighted <sup>(1) (2)</sup> | Differential output, 0dBFS signal, $AVDD=3.3\text{V}$                                         |     | 110 |     | dB   |
|           |                                                      | Single-ended output, 0dBFS signal, $AVDD=3.3\text{V}$                                         |     | 107 |     |      |
|           |                                                      | Pseudo-differential output, 0dBFS signal, $AVDD=3.3\text{V}$                                  |     | 108 |     |      |
|           |                                                      | Differential output, 0dBFS signal, $AVDD=1.8\text{V}$                                         |     | 109 |     |      |
|           |                                                      | Single-ended output, 0dBFS signal, $AVDD=1.8\text{V}$                                         |     | 103 |     |      |
|           |                                                      | Pseudo-differential output, 0dBFS signal, $AVDD=1.8\text{V}$                                  |     | 105 |     |      |
|           |                                                      | Differential output, 0dBFS signal, $AVDD=3.3\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 105 |     |      |
|           |                                                      | Single-ended output, 0dBFS signal, $AVDD=3.3\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 103 |     |      |
|           |                                                      | Pseudo-differential output, 0dBFS signal, $AVDD=3.3\text{V}$ , Power Tune Mode <sup>(3)</sup> |     | 106 |     |      |
|           |                                                      | Differential output, 0dBFS signal, $AVDD=1.8\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 107 |     |      |
|           |                                                      | Single-ended output, 0dBFS signal, $AVDD=1.8\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 99  |     |      |
|           |                                                      | Pseudo-differential output, 0dBFS Signal, $AVDD=1.8\text{V}$ , Power Tune Mode <sup>(3)</sup> |     | 103 |     |      |
| SNR       | Signal-to-noise ratio, A-weighted <sup>(1) (2)</sup> | Differential output, Receiver load, 0dBFS signal, $AVDD=3.3\text{V}$                          |     | 109 |     | dB   |
|           |                                                      | Single-ended output, Headphone load, 0dBFS signal, $AVDD=3.3\text{V}$                         |     | 107 |     |      |
|           |                                                      | Pseudo-differential output, Receiver load, 0dBFS signal, $AVDD=3.3\text{V}$                   |     | 108 |     |      |
|           |                                                      | Differential output, Receiver load, 0dBFS signal, $AVDD=1.8\text{V}$                          |     | 108 |     |      |
|           |                                                      | Single-ended output, Headphone load, 0dBFS signal, $AVDD=1.8\text{V}$                         |     | 103 |     |      |
|           |                                                      | Pseudo-differential output, Receiver load, 0dBFS signal, $AVDD=1.8\text{V}$                   |     | 105 |     |      |

At  $T_A = 25^\circ\text{C}$ ,  $AVDD = 3.3\text{V}$ ,  $IOVDD = 3.3\text{V}$ ,  $f_{IN} = 1\text{kHz}$  sinusoidal signal,  $f_S = 48\text{kHz}$ , 32-bit audio data,  $BCLK = 256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters,  $1200\Omega/600\Omega$  line-out load in differential/single-ended configuration or  $32\Omega/16\Omega$  receiver/headphone load as applicable, MICBIAS programmed to VREF, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

| PARAMETER                                             |                                          | TEST CONDITIONS                                                                                 | MIN | NOM  | MAX | UNIT       |
|-------------------------------------------------------|------------------------------------------|-------------------------------------------------------------------------------------------------|-----|------|-----|------------|
| DR                                                    | Dynamic range, A-weighted <sup>(2)</sup> | Differential output, -60dBFS signal, $AVDD=3.3\text{V}$                                         |     | 110  |     | dB         |
|                                                       |                                          | Single-ended output, -60dBFS signal, $AVDD=3.3\text{V}$                                         |     | 107  |     |            |
|                                                       |                                          | Pseudo-differential output, -60dBFS signal, $AVDD=3.3\text{V}$                                  |     | 108  |     |            |
|                                                       |                                          | Differential output, -60dBFS signal, $AVDD=1.8\text{V}$                                         |     | 109  |     |            |
|                                                       |                                          | Single-ended output, -60dBFS signal, $AVDD=1.8\text{V}$                                         |     | 104  |     |            |
|                                                       |                                          | Pseudo-differential output, -60dBFS signal, $AVDD=1.8\text{V}$                                  |     | 105  |     |            |
|                                                       |                                          | Differential output, -60dBFS signal, $AVDD=3.3\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 105  |     |            |
|                                                       |                                          | Single-ended output, -60dBFS signal, $AVDD=3.3\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 103  |     |            |
|                                                       |                                          | Pseudo-differential output, -60dBFS signal, $AVDD=3.3\text{V}$ , Power Tune Mode <sup>(3)</sup> |     | 107  |     |            |
|                                                       |                                          | Differential output, -60dBFS signal, $AVDD=1.8\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 107  |     |            |
|                                                       |                                          | Single-ended output, -60dBFS signal, $AVDD=1.8\text{V}$ , Power Tune Mode <sup>(3)</sup>        |     | 99   |     |            |
|                                                       |                                          | Pseudo-differential output, -60dBFS signal, $AVDD=1.8\text{V}$ , Power Tune Mode                |     | 103  |     |            |
| DR                                                    | Dynamic range, A-weighted <sup>(2)</sup> | Differential-output, Receiver load, -60dBFS signal, $AVDD=3.3\text{V}$                          |     | 109  |     | dB         |
|                                                       |                                          | Single-ended output, Headphone load, -60dBFS signal, $AVDD=3.3\text{V}$                         |     | 107  |     |            |
|                                                       |                                          | Pseudo-differential output, Receiver load, -60dBFS signal, $AVDD=3.3\text{V}$                   |     | 108  |     |            |
|                                                       |                                          | Differential-output, Receiver load, -60dBFS signal, $AVDD=1.8\text{V}$                          |     | 108  |     |            |
|                                                       |                                          | Single-ended output, Headphone load, -60dBFS signal, $AVDD=1.8\text{V}$                         |     | 103  |     |            |
|                                                       |                                          | Pseudo-differential output, Receiver load, -60dBFS signal, $AVDD=1.8\text{V}$                   |     | 105  |     |            |
| THD+N                                                 | Total harmonic distortion <sup>(2)</sup> | Differential output, -1dBFS signal, $AVDD= 3.3\text{V}$                                         |     | -101 |     | dB         |
|                                                       | Headphone load range                     | Single-ended                                                                                    | 4   | 16   | 600 | $\Omega$   |
|                                                       | Line-out load range                      | Single-ended                                                                                    | 600 |      |     | $\Omega$   |
|                                                       | Headphone/Line-out Cap load              | Single-ended                                                                                    | 0   |      | 2   | nF         |
| <b>Analog Bypass to Line Out/Head Phone Amplifier</b> |                                          |                                                                                                 |     |      |     |            |
|                                                       | Input impedance                          | Input pins INxP or INxM, 4.4k $\Omega$ Input Impedance Mode                                     |     | 4.4  |     | k $\Omega$ |
|                                                       |                                          | Input pins INxP or INxM, 20k $\Omega$ Input Impedance Mode                                      |     | 20   |     |            |
|                                                       | Single Ended Full Scale Output           | $AVDD = 3.3\text{V}$                                                                            |     | 1    |     | Vrms       |
|                                                       | Differential Full Scale Output           | $AVDD = 3.3\text{V}$                                                                            |     | 2    |     | Vrms       |
|                                                       |                                          | $AVDD = 1.8\text{V}$                                                                            |     | 1    |     | Vrms       |

At  $T_A = 25^\circ\text{C}$ ,  $AVDD = 3.3\text{V}$ ,  $IOVDD = 3.3\text{V}$ ,  $f_{IN} = 1\text{kHz}$  sinusoidal signal,  $f_S = 48\text{kHz}$ , 32-bit audio data,  $BCLK = 256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters,  $1200\Omega/600\Omega$  line-out load in differential/single-ended configuration or  $32\Omega/16\Omega$  receiver/headphone load as applicable, MICBIAS programmed to VREF, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

| PARAMETER                                 | TEST CONDITIONS                                                                                        | MIN                                                                                         | NOM        | MAX  | UNIT                       |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------|------|----------------------------|
| Gain Error                                | AC-Coupled Input, -6dBFS input                                                                         |                                                                                             | $\pm 0.1$  |      | dB                         |
| Noise, A-Weighted                         | Idle Channel, AC Coupled Input Shorted to Ground, Differential output                                  |                                                                                             | 7.5        |      | $\mu\text{V}_{\text{RMS}}$ |
| Noise, A-Weighted                         | Idle Channel, AC Coupled Input Shorted to Ground, Single-ended output                                  |                                                                                             | 25         |      | $\mu\text{V}_{\text{RMS}}$ |
| SNR                                       | Signal-to-noise ratio, A-weighted <sup>(1) (2)</sup>                                                   |                                                                                             | 108        |      | dB                         |
| SNR                                       | Signal-to-noise ratio, A-weighted <sup>(1) (2)</sup>                                                   |                                                                                             | 92         |      | dB                         |
| THD+N                                     | Total harmonic distortion <sup>(2)</sup>                                                               |                                                                                             | -100       |      | dB                         |
| <b>DAC Channel OTHER PARAMETERS</b>       |                                                                                                        |                                                                                             |            |      |                            |
| Output Offset                             | 0 Input, Differential line-output                                                                      |                                                                                             | $\pm 0.5$  |      | mV                         |
| Output Common Mode                        | Common Mode Level for OUTxP and OUTxM, $AVDD = 1.8\text{V}$ (Register Configurable)                    |                                                                                             | 0.9        |      | V                          |
|                                           | Common Mode Level for OUTxP and OUTxM $AVDD = 3.3\text{V}$ (Register Configurable)                     |                                                                                             | 1.65       |      |                            |
| Common Mode Error                         | DC Error in Common Mode Voltage                                                                        |                                                                                             | $\pm 20$   |      | mV                         |
| Output Signal Bandwidth                   | Up to 192KSPS FS Rate                                                                                  |                                                                                             | 0.46       |      | FS                         |
|                                           | >192KSPS                                                                                               |                                                                                             | 90         |      | kHz                        |
| Input data sample rate                    | Programmable                                                                                           | 4                                                                                           |            | 768  | kHz                        |
| Input data sample word length             | Programmable                                                                                           | 16                                                                                          |            | 32   | Bits                       |
| Digital high-pass filter cutoff frequency | First-order IIR filter with programmable coefficients, -3dB point (default setting)                    |                                                                                             | 1          |      | Hz                         |
| Interchannel isolation                    | Differential output, -1dBFS input signal on nonmeasurement channel                                     |                                                                                             | -120       |      | dB                         |
| Gain Error                                | Differential output, -6dBFS Input signal                                                               |                                                                                             | $\pm 0.1$  |      | dB                         |
| Interchannel gain mismatch                | Differential output, -6dBFS Input signal                                                               |                                                                                             | $\pm 0.1$  |      | dB                         |
| Interchannel phase mismatch               | Differential output, -6dBFS Input signal                                                               |                                                                                             | $\pm 0.01$ |      | Degrees                    |
| PSRR                                      | Power-supply rejection ratio                                                                           | 100mV <sub>pp</sub> , 1kHz sinusoidal signal on AVDD, differential output, 0dB channel gain |            | 110  | dB                         |
| Mute Attenuation                          |                                                                                                        |                                                                                             | -130       |      | dB                         |
| P <sub>out</sub>                          | Output Power Delivery                                                                                  | Single-ended/Pseudo-differential headphone $R_L = 16\Omega$ , THD+N < 0.1%                  |            | 62.5 | mW                         |
| <b>MICROPHONE BIAS</b>                    |                                                                                                        |                                                                                             |            |      |                            |
| MICBIAS noise                             | Bandwidth = 20Hz to 20kHz, A-weighted, 1 $\mu\text{F}$ capacitor between MICBIAS and VSS (thermal pad) |                                                                                             | 2          |      | $\mu\text{V}_{\text{RMS}}$ |
| MICBIAS voltage                           | Bypass to AVDD                                                                                         |                                                                                             | AVDD       |      | V                          |
|                                           | AVDD = 1.8V                                                                                            |                                                                                             | 1.375      |      | V                          |
|                                           | AVDD = 3.3V                                                                                            |                                                                                             | 2.75       |      | V                          |
| <b>DIGITAL I/O</b>                        |                                                                                                        |                                                                                             |            |      |                            |

**TAD5112-Q1**

SLASF39A – DECEMBER 2023 – REVISED MARCH 2025

At  $T_A = 25^\circ\text{C}$ ,  $AVDD = 3.3\text{V}$ ,  $IOVDD = 3.3\text{V}$ ,  $f_{IN} = 1\text{kHz}$  sinusoidal signal,  $f_S = 48\text{kHz}$ , 32-bit audio data,  $BCLK = 256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters,  $1200\Omega/600\Omega$  line-out load in differential/single-ended configuration or  $32\Omega/16\Omega$  receiver/headphone load as applicable, MICBIAS programmed to VREF, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

| PARAMETER      |                                                           | TEST CONDITIONS                                                                            | MIN                 | NOM | MAX                 | UNIT          |
|----------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------|-----|---------------------|---------------|
| $V_{IL}$       | Low-level digital input logic voltage threshold           | All digital pins except SDA and SCL, IOVDD 1.8V or 1.2V operation                          | -0.3                |     | $0.35 \times IOVDD$ | V             |
|                |                                                           | All digital pins except SDA and SCL, IOVDD 3.3V operation                                  | -0.3                |     | 0.8                 |               |
| $V_{IH}$       | High-level digital input logic voltage threshold          | All digital pins except SDA and SCL, IOVDD 1.8V or 1.2V operation                          | $0.65 \times IOVDD$ |     | $IOVDD + 0.3$       | V             |
|                |                                                           | All digital pins except SDA and SCL, IOVDD 3.3V operation                                  | 2                   |     | $IOVDD + 0.3$       |               |
| $V_{OL}$       | Low-level digital output voltage                          | All digital pins except SDA and SCL, $I_{OL} = -2\text{mA}$ , IOVDD 1.8V or 1.2V operation |                     |     | 0.45                | V             |
|                |                                                           | All digital pins except SDA and SCL, $I_{OL} = -2\text{mA}$ , IOVDD 3.3V operation         |                     |     | 0.4                 |               |
| $V_{OH}$       | High-level digital output voltage                         | All digital pins except SDA and SCL, $I_{OH} = 2\text{mA}$ , IOVDD 1.8V or 1.2V operation  | $IOVDD - 0.45$      |     |                     | V             |
|                |                                                           | All digital pins except SDA and SCL, $I_{OH} = 2\text{mA}$ , IOVDD 3.3V operation          | 2.4                 |     |                     |               |
| $V_{IL(I2C)}$  | Low-level digital input logic voltage threshold           | SDA and SCL                                                                                | -0.5                |     | $0.3 \times IOVDD$  | V             |
| $V_{IH(I2C)}$  | High-level digital input logic voltage threshold          | SDA and SCL                                                                                | $0.7 \times IOVDD$  |     | $IOVDD + 0.5$       | V             |
| $V_{OL1(I2C)}$ | Low-level digital output voltage                          | SDA, $I_{OL(I2C)} = -3\text{mA}$ , IOVDD 3.3V operation                                    |                     |     | 0.4                 | V             |
| $V_{OL2(I2C)}$ | Low-level digital output voltage                          | SDA, $I_{OL(I2C)} = -2\text{mA}$ , IOVDD 1.8V or 1.2V operation                            |                     |     | $0.2 \times IOVDD$  | V             |
| $I_{OL(I2C)}$  | Low-level digital output current                          | SDA, $V_{OL(I2C)} = 0.4\text{V}$ , standard-mode or fast-mode                              | 3                   |     |                     | mA            |
|                |                                                           | SDA, $V_{OL(I2C)} = 0.4\text{V}$ , fast-mode plus                                          | 20                  |     |                     |               |
| $I_{IL}$       | Input logic-low leakage for digital inputs                | All digital pins, input = 0V                                                               | -5                  | 0.1 | 5                   | $\mu\text{A}$ |
| $I_{IH}$       | Input logic-high leakage for digital inputs               | All digital pins, input = IOVDD                                                            | -5                  | 0.1 | 5                   | $\mu\text{A}$ |
| $C_{IN}$       | Input capacitance for digital inputs                      | All digital pins                                                                           |                     | 5   |                     | pF            |
| $R_{PD}$       | Pulldown resistance for digital I/O pins when asserted on |                                                                                            |                     | 20  |                     | k $\Omega$    |

**TYPICAL SUPPLY CURRENT CONSUMPTION**

|                    |                                                                                    |                                                     |      |    |
|--------------------|------------------------------------------------------------------------------------|-----------------------------------------------------|------|----|
| I <sub>AVDD</sub>  | Current consumption in sleep mode (software shutdown mode)                         | All device external clocks stopped                  | 9    | μA |
| I <sub>IOVDD</sub> |                                                                                    |                                                     | 1    |    |
| I <sub>AVDD</sub>  | Current consumption with MICBIAS ON, 5mA load, no recording/ playback              | f <sub>S</sub> = 48kHz, BCLK = 256 × f <sub>S</sub> | 1.5  | mA |
| I <sub>IOVDD</sub> |                                                                                    |                                                     | 0.02 |    |
| I <sub>AVDD</sub>  | Current consumption with DAC to Headphone 2-channel operation, MICBIAS off, PLL on | f <sub>S</sub> = 16kHz, BCLK = 512 × f <sub>S</sub> | 17.9 | mA |
| I <sub>IOVDD</sub> |                                                                                    |                                                     | 0.02 |    |

At  $T_A = 25^\circ\text{C}$ ,  $AVDD = 3.3\text{V}$ ,  $IOVDD = 3.3\text{V}$ ,  $f_{IN} = 1\text{kHz}$  sinusoidal signal,  $f_S = 48\text{kHz}$ , 32-bit audio data,  $BCLK = 256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters,  $1200\Omega/600\Omega$  line-out load in differential/single-ended configuration or  $32\Omega/16\Omega$  receiver/headphone load as applicable, MICBIAS programmed to VREF, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

| PARAMETER          |                                                                                                                                            | TEST CONDITIONS                                     | MIN  | NOM | MAX | UNIT |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------|-----|-----|------|
| I <sub>AVDD</sub>  | Current consumption with DAC to Headphone 2-channel operation, MICBIAS off, PLL off                                                        | f <sub>S</sub> = 48kHz, BCLK = 512 × f <sub>S</sub> | 15.2 |     |     | mA   |
| I <sub>IOVDD</sub> |                                                                                                                                            |                                                     | 0.04 |     |     |      |
| I <sub>AVDD</sub>  | Power Tune Mode <sup>(3)</sup> : Current consumption with DAC to Lineout 2-channel single-ended operation, MICBIAS off, PLL off, AVDD=1.8V | f <sub>S</sub> = 48kHz, BCLK = 128 × f <sub>S</sub> | 5.5  |     |     | mA   |
| I <sub>AVDD</sub>  | Power Tune Mode <sup>(3)</sup> : Current consumption with DAC to Lineout 2-channel operation, MICBIAS off, PLL on                          | f <sub>S</sub> = 48kHz, BCLK = 512 × f <sub>S</sub> | 9.2  |     |     | mA   |
| I <sub>IOVDD</sub> |                                                                                                                                            |                                                     | 0.04 |     |     |      |

- (1) Ratio of output level with 1kHz full-scale sine-wave input, to the output level with no generator input signal and input shorted to ground, measured with an A-weighted filter over a 20Hz to 20kHz bandwidth using an audio analyzer.
- (2) All performance measurements done with 20kHz low-pass filter and, where noted, an A-weighted filter. Failure to use such a filter can result in higher THD+N and lower SNR and dynamic range readings than shown in the Electrical Characteristics. The low-pass filter removes out-of-band noise, which, although not audible, can affect dynamic specification values.
- (3)  $PWR\_TUNE\_CFG0 = 0xD4$ ,  $PWR\_TUNE\_CFG1 = 0x96$  and  $PLL\_DIS = 1'b1$  for Power Tune Mode

## 5.6 Timing Requirements: I<sup>2</sup>C Interface

At T<sub>A</sub> = 25°C, IOVDD = 3.3V or 1.8V or 1.2V (unless otherwise noted); see Figure 5-1 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

|                       |                                                                                              | MIN                       | NOM | MAX  | UNIT |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------|-----|------|------|
| <b>STANDARD-MODE</b>  |                                                                                              |                           |     |      |      |
| f <sub>SCL</sub>      | SCL clock frequency                                                                          | 0                         |     | 100  | kHz  |
| t <sub>HD;STA</sub>   | Hold time (repeated) START condition. After this period, the first clock pulse is generated. | 4                         |     |      | μs   |
| t <sub>LOW</sub>      | Low period of the SCL clock                                                                  | 4.7                       |     |      | μs   |
| t <sub>HIGH</sub>     | High period of the SCL clock                                                                 | 4                         |     |      | μs   |
| t <sub>SU;STA</sub>   | Setup time for a repeated START condition                                                    | 4.7                       |     |      | μs   |
| t <sub>HD;DAT</sub>   | Data hold time                                                                               | 0                         |     | 3.45 | μs   |
| t <sub>SU;DAT</sub>   | Data setup time                                                                              | 250                       |     |      | ns   |
| t <sub>r</sub>        | SDA and SCL rise time                                                                        |                           |     | 1000 | ns   |
| t <sub>f</sub>        | SDA and SCL fall time                                                                        |                           |     | 300  | ns   |
| t <sub>SU;STO</sub>   | Setup time for STOP condition                                                                | 4                         |     |      | μs   |
| t <sub>BUF</sub>      | Bus free time between a STOP and START condition                                             | 4.7                       |     |      | μs   |
| <b>FAST-MODE</b>      |                                                                                              |                           |     |      |      |
| f <sub>SCL</sub>      | SCL clock frequency                                                                          | 0                         |     | 400  | kHz  |
| t <sub>HD;STA</sub>   | Hold time (repeated) START condition. After this period, the first clock pulse is generated. | 0.6                       |     |      | μs   |
| t <sub>LOW</sub>      | Low period of the SCL clock                                                                  | 1.3                       |     |      | μs   |
| t <sub>HIGH</sub>     | High period of the SCL clock                                                                 | 0.6                       |     |      | μs   |
| t <sub>SU;STA</sub>   | Setup time for a repeated START condition                                                    | 0.6                       |     |      | μs   |
| t <sub>HD;DAT</sub>   | Data hold time                                                                               | 0                         |     | 0.9  | μs   |
| t <sub>SU;DAT</sub>   | Data setup time                                                                              | 100                       |     |      | ns   |
| t <sub>r</sub>        | SDA and SCL rise time                                                                        | 20                        |     | 300  | ns   |
| t <sub>f</sub>        | SDA and SCL fall time                                                                        | 20 ×<br>(IOVDD /<br>5.5V) |     | 300  | ns   |
| t <sub>SU;STO</sub>   | Setup time for STOP condition                                                                | 0.6                       |     |      | μs   |
| t <sub>BUF</sub>      | Bus free time between a STOP and START condition                                             | 1.3                       |     |      | μs   |
| <b>FAST-MODE PLUS</b> |                                                                                              |                           |     |      |      |
| f <sub>SCL</sub>      | SCL clock frequency                                                                          | 0                         |     | 1000 | kHz  |
| t <sub>HD;STA</sub>   | Hold time (repeated) START condition. After this period, the first clock pulse is generated. | 0.26                      |     |      | μs   |
| t <sub>LOW</sub>      | Low period of the SCL clock                                                                  | 0.5                       |     |      | μs   |
| t <sub>HIGH</sub>     | High period of the SCL clock                                                                 | 0.26                      |     |      | μs   |
| t <sub>SU;STA</sub>   | Setup time for a repeated START condition                                                    | 0.26                      |     |      | μs   |
| t <sub>HD;DAT</sub>   | Data hold time                                                                               | 0                         |     |      | μs   |
| t <sub>SU;DAT</sub>   | Data setup time                                                                              | 50                        |     |      | ns   |
| t <sub>r</sub>        | SDA and SCL Rise Time                                                                        |                           |     | 120  | ns   |
| t <sub>f</sub>        | SDA and SCL Fall Time                                                                        | 20 ×<br>(IOVDD /<br>5.5V) |     | 120  | ns   |
| t <sub>SU;STO</sub>   | Setup time for STOP condition                                                                | 0.26                      |     |      | μs   |
| t <sub>BUF</sub>      | Bus free time between a STOP and START condition                                             | 0.5                       |     |      | μs   |



## 5.7 Switching Characteristics: I<sup>2</sup>C Interface

At T<sub>A</sub> = 25°C, IOVDD = 3.3V or 1.8V or 1.2V (unless otherwise noted); see Figure 5-1 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

| PARAMETER            |                  | TEST CONDITIONS | MIN | TYP | MAX  | UNIT |
|----------------------|------------------|-----------------|-----|-----|------|------|
| t <sub>d</sub> (SDA) | SCL to SDA delay | Standard-mode   | 200 |     | 1250 | ns   |
|                      |                  | Fast-mode       | 200 |     | 850  | ns   |
|                      |                  | Fast-mode plus  |     |     | 400  | ns   |

## 5.8 Timing Requirements: SPI

At T<sub>A</sub> = 25°C, IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-2 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

|                         |                           |                     | MIN | NOM | MAX | UNIT |
|-------------------------|---------------------------|---------------------|-----|-----|-----|------|
| t <sub>(SCLK)</sub>     | SCLK period               |                     | 40  |     |     | ns   |
| t <sub>H</sub> (SCLK)   | SCLK high pulse duration  |                     | 18  |     |     | ns   |
| t <sub>L</sub> (SCLK)   | SCLK low pulse duration   |                     | 18  |     |     | ns   |
| t <sub>LEAD</sub>       | Enable lead time          |                     | 16  |     |     | ns   |
| t <sub>TRAIL</sub>      | Enable trail time         |                     | 16  |     |     | ns   |
| t <sub>DSEQ</sub>       | Sequential transfer delay |                     | 20  |     |     | ns   |
| t <sub>SU</sub> (PICO)  | PICO data setup time      |                     | 8   |     |     | ns   |
| t <sub>HLD</sub> (PICO) | PICO data hold time       |                     | 8   |     |     | ns   |
| t <sub>r</sub> (SCLK)   | SCLK rise time            | 10% - 90% rise time |     |     | 6   | ns   |
| t <sub>f</sub> (SCLK)   | SCLK fall time            | 90% - 10% fall time |     |     | 6   | ns   |

## 5.9 Switching Characteristics: SPI

At T<sub>A</sub> = 25°C, IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-2 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

| PARAMETER               |                    | TEST CONDITIONS                          | MIN | TYP | MAX | UNIT |
|-------------------------|--------------------|------------------------------------------|-----|-----|-----|------|
| t <sub>a</sub> (POCI)   | POCI access time   | IOVDD = 1.2V                             |     |     | 18  | ns   |
|                         |                    | IOVDD = 1.8V                             |     |     | 18  | ns   |
|                         |                    | IOVDD = 3.3V                             |     |     | 14  | ns   |
| t <sub>d</sub> (POCI)   | SCLK to POCI delay | 50% of SCLK to 50% of POCI, IOVDD = 1.2V |     |     | 19  | ns   |
|                         |                    | 50% of SCLK to 50% of POCI, IOVDD = 1.8V |     |     | 19  | ns   |
|                         |                    | 50% of SCLK to 50% of POCI, IOVDD = 3.3V |     |     | 15  | ns   |
| t <sub>dis</sub> (POCI) | POCI disable time  | IOVDD = 1.2V                             |     |     | 18  | ns   |
|                         |                    | IOVDD = 1.8V                             |     |     | 18  | ns   |
|                         |                    | IOVDD = 3.3V                             |     |     | 14  | ns   |

## 5.10 Timing Requirements: TDM, I<sup>2</sup>S or LJ Interface

At T<sub>A</sub> = 25°C, IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-3 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

|                          |                                         |  | MIN | NOM | MAX | UNIT |
|--------------------------|-----------------------------------------|--|-----|-----|-----|------|
| t <sub>(BCLK)</sub>      | BCLK period                             |  | 40  |     |     | ns   |
| t <sub>H</sub> (BCLK)    | BCLK high pulse duration <sup>(1)</sup> |  | 18  |     |     | ns   |
| t <sub>L</sub> (BCLK)    | BCLK low pulse duration <sup>(1)</sup>  |  | 18  |     |     | ns   |
| t <sub>SU</sub> (FSYNC)  | FSYNC setup time                        |  | 8   |     |     | ns   |
| t <sub>HLD</sub> (FSYNC) | FSYNC hold time                         |  | 8   |     |     | ns   |
| t <sub>SU</sub> (DIN)    | DIN setup time                          |  | 8   |     |     | ns   |

**TAD5112-Q1**

SLASF39A – DECEMBER 2023 – REVISED MARCH 2025

At  $T_A = 25^\circ\text{C}$ , IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-3 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

|                              |                |                     | MIN | NOM | MAX | UNIT |
|------------------------------|----------------|---------------------|-----|-----|-----|------|
| $t_{\text{HLD}}(\text{DIN})$ | DIN hold time  |                     | 8   |     |     | ns   |
| $t_{\text{r}}(\text{BCLK})$  | BCLK rise time | 10% - 90% rise time |     |     | 10  | ns   |
| $t_{\text{f}}(\text{BCLK})$  | BCLK fall time | 90% - 10% fall time |     |     | 10  | ns   |

- (1) To meet the timing specifications, the BCLK minimum high or low pulse duration must be higher than 25ns, if the DOUT data line is latched on the opposite BCLK edge polarity from the one used by the device to transmit the DOUT data.

### 5.11 Switching Characteristics: TDM, I<sup>2</sup>S or LJ Interface

At  $T_A = 25^\circ\text{C}$ , IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-3 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

| PARAMETER                         | TEST CONDITIONS                                                         | MIN                                       | TYP | MAX    | UNIT |
|-----------------------------------|-------------------------------------------------------------------------|-------------------------------------------|-----|--------|------|
| $t_{\text{d}}(\text{DOUT-BCLK})$  | BCLK to DOUT delay                                                      | 50% of BCLK to 50% of DOUT, IOVDD = 1.2V  |     | 18     | ns   |
|                                   |                                                                         | 50% of BCLK to 50% of DOUT, IOVDD = 1.8V  |     | 18     |      |
|                                   |                                                                         | 50% of BCLK to 50% of DOUT, IOVDD = 3.3V  |     | 14     |      |
| $t_{\text{d}}(\text{DOUT-FSYNC})$ | FSYNC to DOUT delay in TDM or LJ mode (for MSB data with TX_OFFSET = 0) | 50% of FSYNC to 50% of DOUT, IOVDD = 1.2V |     | 18     | ns   |
|                                   |                                                                         | 50% of FSYNC to 50% of DOUT, IOVDD = 1.8V |     | 18     |      |
|                                   |                                                                         | 50% of FSYNC to 50% of DOUT, IOVDD = 3.3V |     | 14     |      |
| $f_{\text{BCLK}}$                 | BCLK output clock frequency; controller mode <sup>(1)</sup>             |                                           |     | 24.576 | MHz  |
| $t_{\text{H}}(\text{BCLK})$       | BCLK high pulse duration; controller mode                               | IOVDD = 1.2V                              | 14  |        | ns   |
|                                   |                                                                         | IOVDD = 1.8V                              | 14  |        |      |
|                                   |                                                                         | IOVDD = 3.3V                              | 14  |        |      |
| $t_{\text{L}}(\text{BCLK})$       | BCLK low pulse duration; controller mode                                | IOVDD = 1.2V                              | 14  |        | ns   |
|                                   |                                                                         | IOVDD = 1.8V                              | 14  |        |      |
|                                   |                                                                         | IOVDD = 3.3V                              | 14  |        |      |
| $t_{\text{d}}(\text{FSYNC})$      | BCLK to FSYNC delay; controller mode                                    | 50% of BCLK to 50% of FSYNC, IOVDD = 1.2V |     | 18     | ns   |
|                                   |                                                                         | 50% of BCLK to 50% of FSYNC, IOVDD = 1.8V |     | 18     |      |
|                                   |                                                                         | 50% of BCLK to 50% of FSYNC, IOVDD = 3.3V |     | 14     |      |
| $t_{\text{r}}(\text{BCLK})$       | BCLK rise time; controller mode                                         | 10% - 90% rise time, IOVDD = 1.2V         |     | 10     | ns   |
|                                   |                                                                         | 10% - 90% rise time, IOVDD = 1.8V         |     | 10     |      |
|                                   |                                                                         | 10% - 90% rise time, IOVDD = 3.3V         |     | 10     |      |
| $t_{\text{f}}(\text{BCLK})$       | BCLK fall time; controller mode                                         | 90% - 10% fall time, IOVDD = 1.2V         |     | 8      | ns   |
|                                   |                                                                         | 90% - 10% fall time, IOVDD = 1.8V         |     | 8      |      |
|                                   |                                                                         | 90% - 10% fall time, IOVDD = 3.3V         |     | 8      |      |

- (1) To meet the timing specifications, the BCLK output clock frequency must be lower than 18.5MHz, if the DOUT data line is latched on the opposite BCLK edge polarity from the one used by the device to transmit DOUT data.

## 5.12 Timing Requirements: PDM Digital Microphone Interface

At TA = 25°C, IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-4 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details.

|                           |                              | MIN | NOM | MAX | UNIT |
|---------------------------|------------------------------|-----|-----|-----|------|
| $t_{SU}(PDM\text{DIN}x)$  | PDM $\text{DIN}x$ setup time | 30  |     |     | ns   |
| $t_{HLD}(PDM\text{DIN}x)$ | PDM $\text{DIN}x$ hold time  | 0   |     |     | ns   |

## 5.13 Switching Characteristics: PDM Digital Microphone Interface

At TA = 25°C, IOVDD = 3.3V or 1.8V or 1.2V and 20pF load on all outputs (unless otherwise noted); see Figure 5-4 for timing diagram. Set the IOVDD\_IO\_MODE bit correctly for IOVDD 1.8V and 1.2V Operation. Refer Section 8.3 for more details

| PARAMETER              | TEST CONDITIONS            | MIN   | TYP                 | MAX   | UNIT |
|------------------------|----------------------------|-------|---------------------|-------|------|
| $f_{(PDM\text{CLK})}$  | PDMCLK clock frequency     | 0.768 |                     | 6.144 | MHz  |
| $t_{H(PDM\text{CLK})}$ | PDMCLK high pulse duration | 72    |                     |       | ns   |
| $t_{L(PDM\text{CLK})}$ | PDMCLK low pulse duration  | 72    |                     |       | ns   |
| $t_{r(PDM\text{CLK})}$ | PDMCLK rise time           |       | 10% - 90% rise time | 18    | ns   |
| $t_{f(PDM\text{CLK})}$ | PDMCLK fall time           |       | 90% - 10% fall time | 18    | ns   |

## 5.14 Timing Diagrams

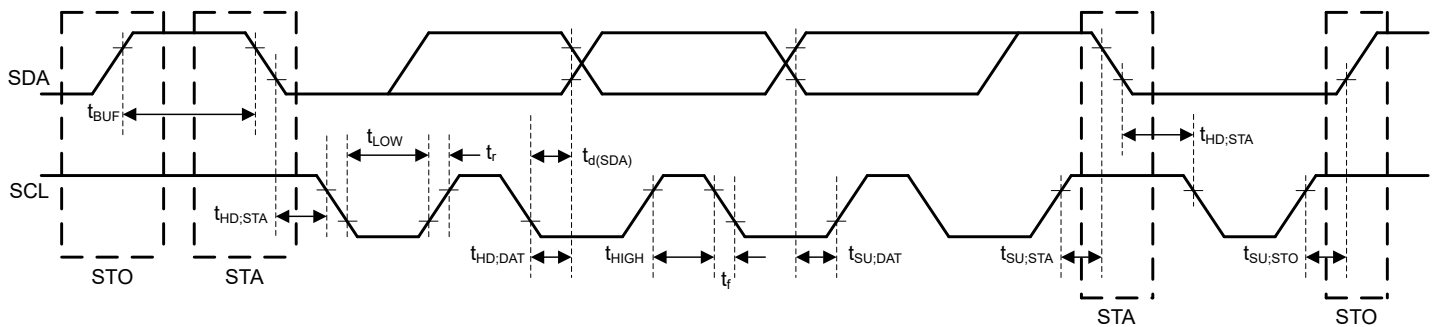


Figure 5-1. I²C Interface Timing Diagram



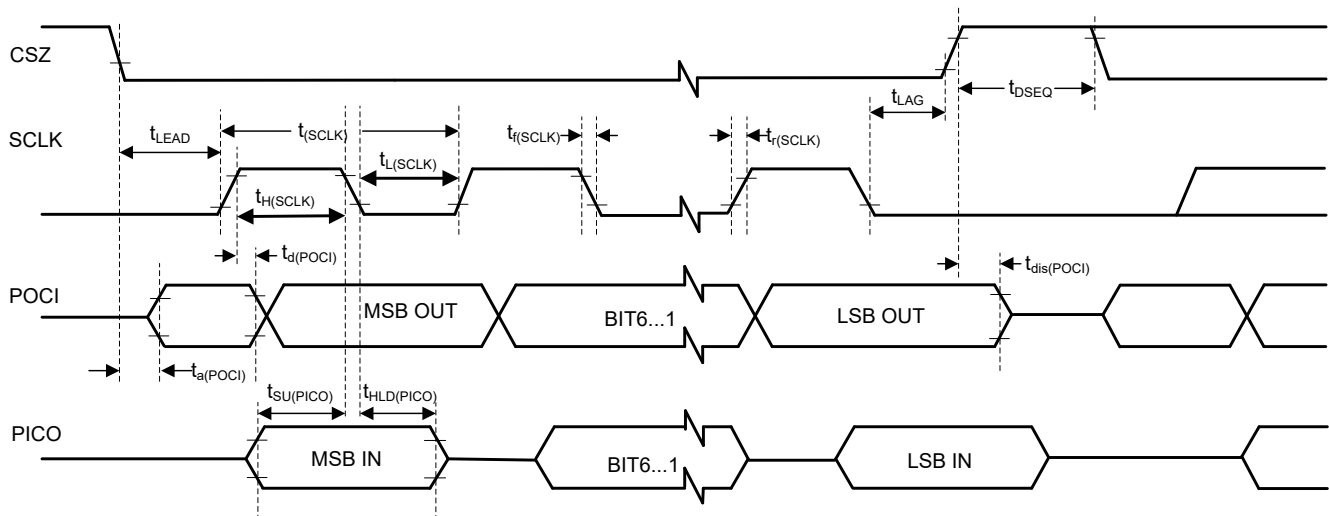


Figure 5-2. SPI Timing Diagram

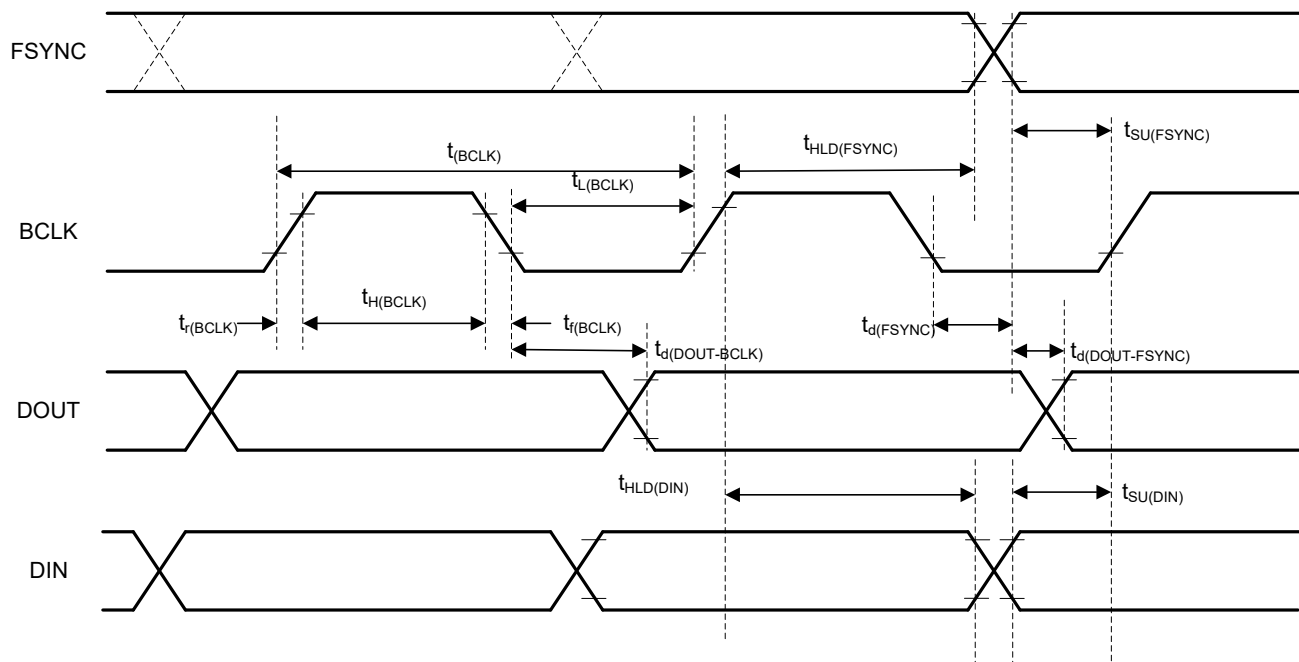


**Figure 5-3. TDM (With BCLK\_POL = 1), I²S, and LJ Interface Timing Diagram**

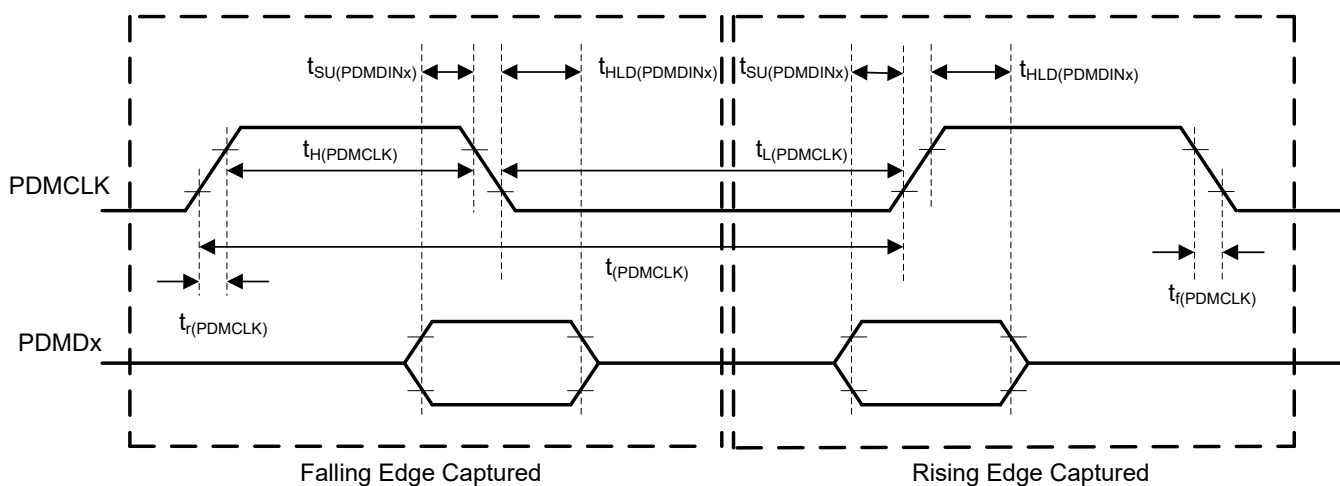


**Figure 5-4. PDM Digital Microphone Interface Timing Diagram**

## 5.15 Typical Characteristics


At  $T_A = 25^\circ\text{C}$ ,  $AV_{DD} = 3.3\text{ V}$ ,  $IOV_{DD} = 3.3\text{ V}$ ,  $f_{IN} = 1\text{ kHz}$  sinusoidal signal,  $f_S = 48\text{ kHz}$ , 32-bit audio data,  $BCLK = 256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters, 1200Ω/600Ω line-out load in differential/single-ended configuration or 32Ω/16Ω receiver/headphone load as applicable, and other default configurations; measured filter free with an Audio Precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

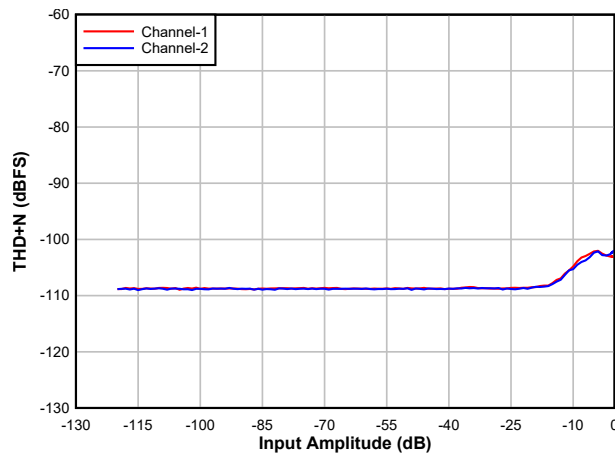


**Figure 5-5. DAC THD+N Level vs Input**

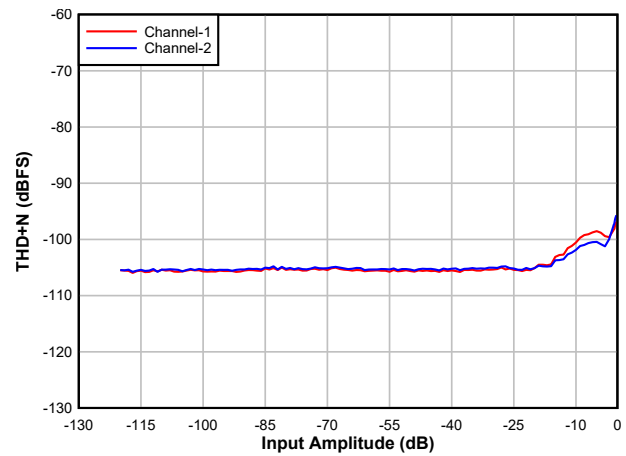


**Figure 5-6. DAC THD+N Level vs Input**

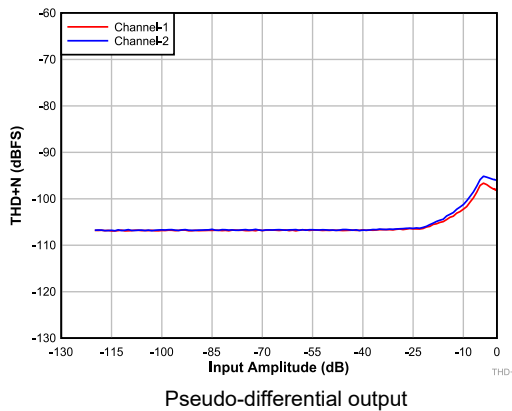


**Figure 5-7. DAC THD+N Level vs Input**

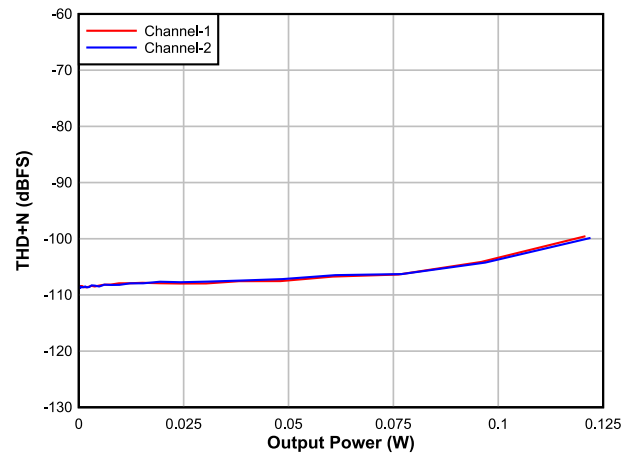


**Figure 5-8. DAC THD+N Level vs Output Power**

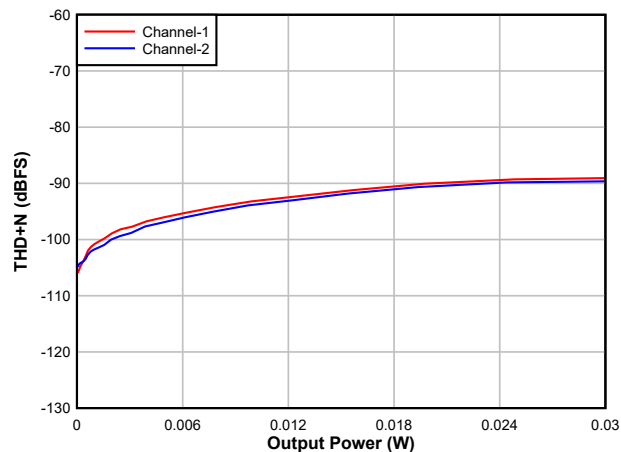


Pseudo-differential output, 32Ω headphone load

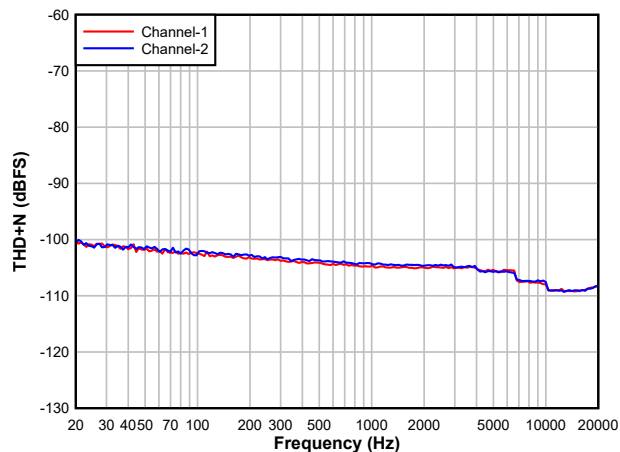**Figure 5-9. DAC THD+N Level vs Output Power**


Differential output (-1dBFS input)

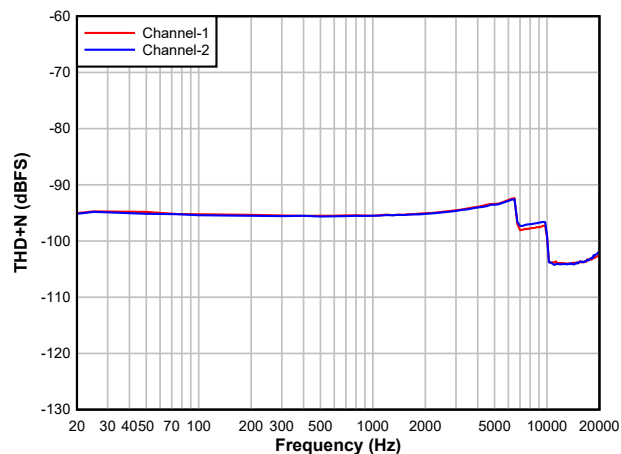**Figure 5-10. DAC THD+N Level vs Frequency**


Single-ended output (-1dBFS input)

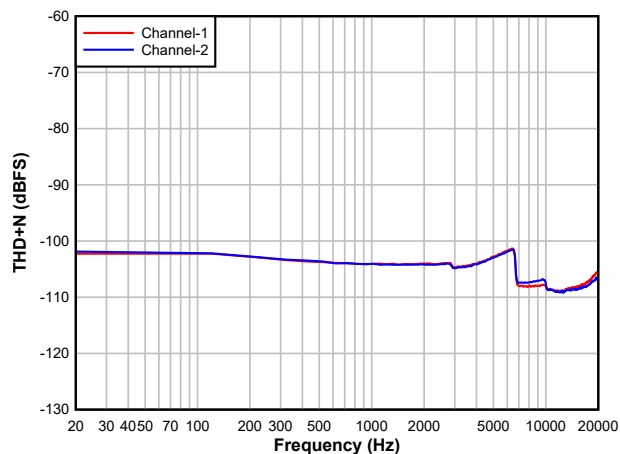**Figure 5-11. DAC THD+N Level vs Frequency**

Differential receiver output, 32Ω load (-1dBFS input)

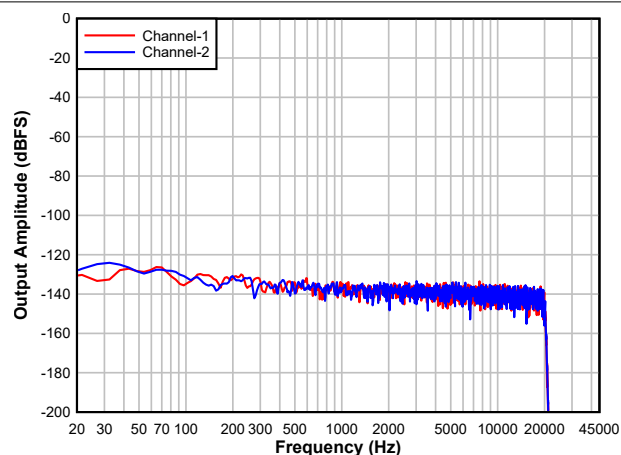
**Figure 5-12. DAC THD+N Level vs Frequency**

Differential output

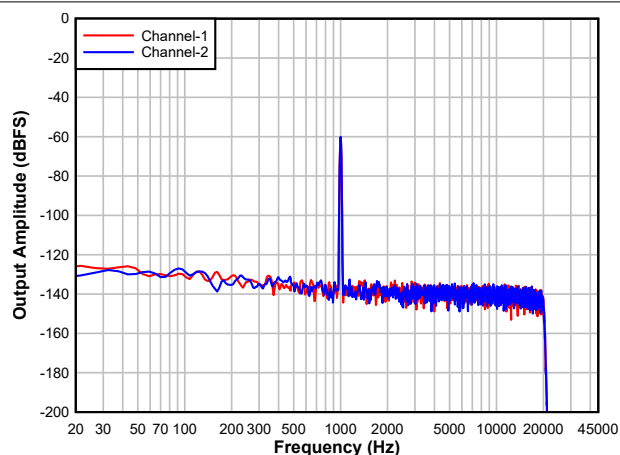
**Figure 5-13. DAC FFT with Idle Channel Input**

Differential output


**Figure 5-14. DAC FFT with -60dBFS Input**

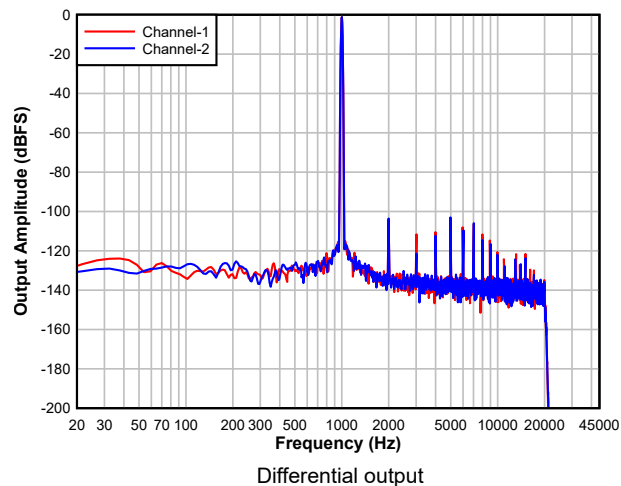


**Figure 5-15. DAC FFT with -1dBFS Input**

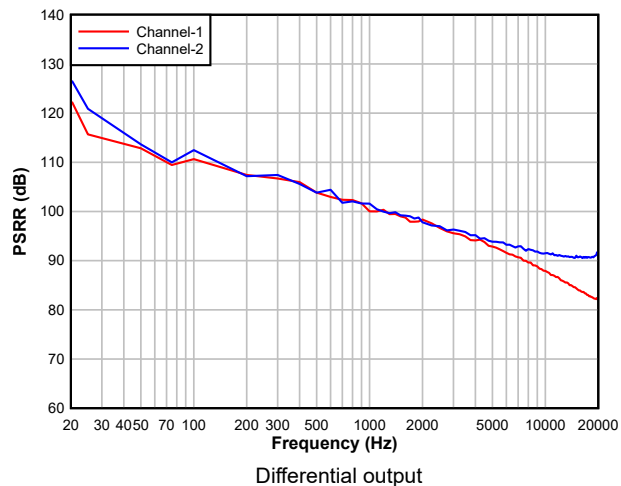

**Figure 5-16. DAC PSRR vs Frequency**

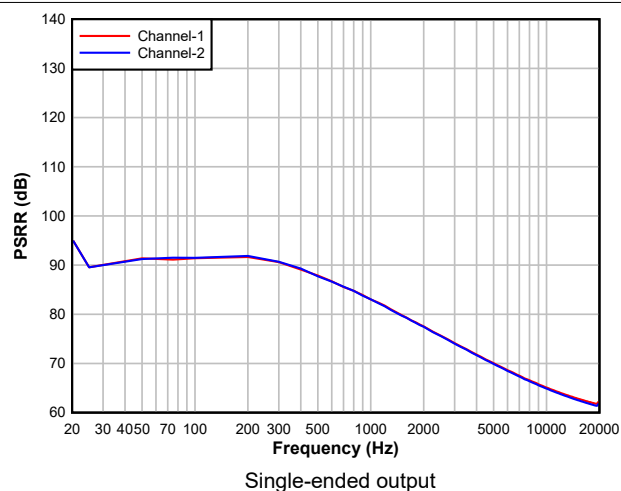

**Figure 5-17. DAC PSRR vs Frequency**

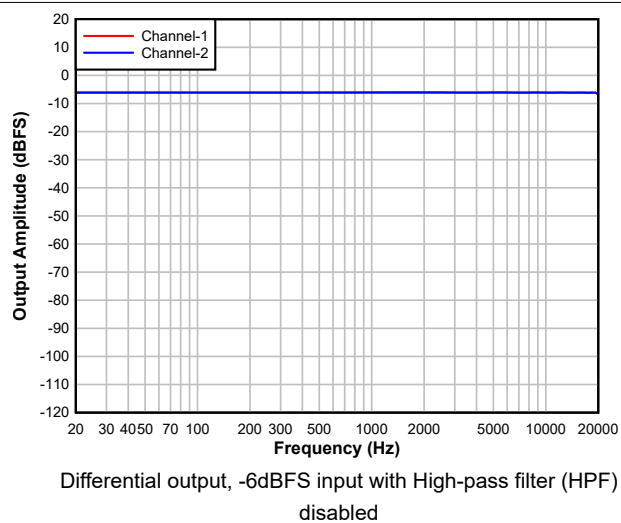

**Figure 5-18. DAC Frequency Response**

## 6 Detailed Description

### 6.1 Overview

The TAD5112-Q1 is from a scalable family of audio converter devices. As a part of the extended family of devices, the TAD5112-Q1 consists of a low-power, flexible stereo differential and quad single-ended audio digital-to-analog converter (DAC) with extensive feature integration. This device is intended for broad market applications such as home theater and entertainment speakers, AV receivers, portable audio devices, professional audio, and multimedia applications. This device integrates a host of features that reduce cost, board space, and power consumption in space-constrained automotive sub-system designs. Package, performance, and device-compatible configuration registers make this device an excellent fit for scalable system designs.

The TAD5112-Q1 consists of the following blocks:

- 4-channel, multibit, high-performance delta-sigma ( $\Delta\Sigma$ ) DACs
- Configurable single-ended, differential or pseudo-differential audio outputs
- Advanced thermal foldback and protection
- Advanced battery guard and distortion limiter
- Low-noise programmable microphone bias output
- Up to 4 pulse density modulation (PDM) digital microphone interface with a high-performance decimation filter
- Programmable decimation and interpolation filters with linear-phase, low-latency and ultra low-latency response options
- Programmable channel gain, volume control, and biquad filters for each record and playback channel
- Programmable phase and gain calibration with fine resolution for each record channel
- Programmable high-pass filter (HPF) and digital channel mixer for record and playback channels
- Automatic gain controller (AGC) for PDM record channels and dynamic range controller (DRC) for DAC playback channels
- Dual I<sup>2</sup>S or TDM interface with independent sample rate (synchronous)
- Synchronous sample rate converter (SRC)
- Integrated low-jitter, phase-locked loop (PLL) supporting a wide range of system clocks
- Integrated digital and analog voltage regulators to support single-supply operation

Communication to the TAD5112-Q1 for configuring the control registers is supported using an I<sup>2</sup>C and SPI interface. The device supports a highly flexible audio serial interface [time-division multiplexing (TDM), I<sup>2</sup>S, or left-justified (LJ)] to transmit audio data seamlessly in the system across devices.

The TAD5112 can support multiple devices by sharing the common TDM bus across devices. Moreover, the device includes a daisy-chain feature as well. These features relax the shared TDM bus timing requirements and board design complexities when operating multiple devices for applications requiring high audio data bandwidth.


[Table 6-1](#) lists the reference abbreviations used throughout this document to registers that control the device.

**Table 6-1. Abbreviations for Register References**

| REFERENCE                    | ABBREVIATION | DESCRIPTION                                                    | EXAMPLE                                       |
|------------------------------|--------------|----------------------------------------------------------------|-----------------------------------------------|
| Page y, register z, bit k    | Py_Rz_D[k]   | Single data bit. The value of a single bit in a register.      | Page 1, register 36, bit 0 = P1_R36_D[0]      |
| Page y, register z, bits k-m | Py_Rz_D[k:m] | Range of data bits. A range of data bits (inclusive).          | Page 1, register 36, bits 3-0 = P1_R36_D[3:0] |
| Page y, register z           | Py_Rz        | One entire register. All eight bits in the register as a unit. | Page 1, register 36 = P1_R36                  |
| Page y, registers z-n        | Py_Rz-Rn     | Range of registers. A range of registers in the same page.     | Page 1, registers 36, 37, 38 = P1_R36-R38     |



## 6.2 Functional Block Diagram

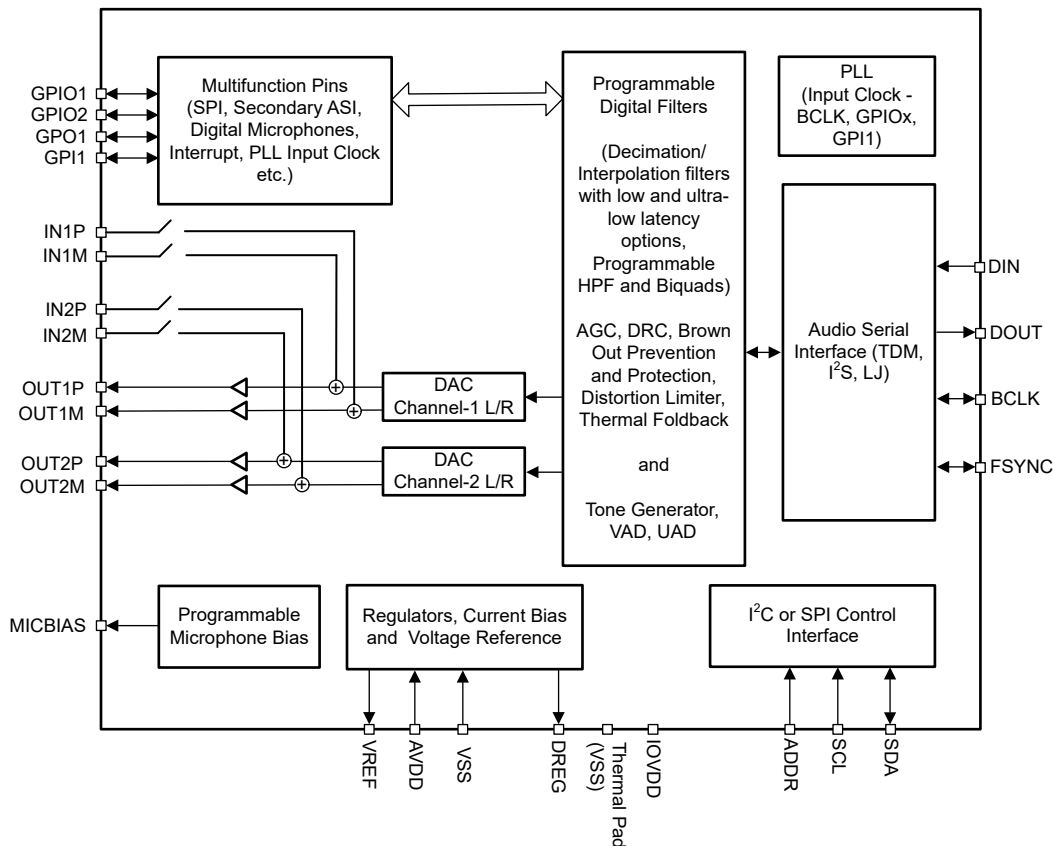

## 6.3 Feature Description

### 6.3.1 Serial Interfaces

This device has two serial interfaces: control and audio data. The control serial interface is used for device configuration. The audio data serial interface is used for transmitting audio data to the host device.

#### 6.3.1.1 Control Serial Interfaces

The device contains configuration registers and programmable coefficients that can be set to the desired values for a specific system and application use. All these registers can be accessed using either I²C or SPI communication to the device. For more information, see the [Section 6.5](#) and [Section 7](#).

#### 6.3.1.2 Audio Serial Interfaces

Digital audio data flows between the host processor and the TAD5112-Q1 on the digital audio serial interface (ASI), or audio bus. This highly flexible ASI bus includes a TDM mode for multichannel operation, support for I²S or left-justified protocols format, programmable data length options, very flexible controller-target configurability for bus clock lines and the ability to communicate with multiple devices within a system directly.

The TAD5112-Q1 supports up to two ASI Interfaces. Secondary ASI Clock and Data Pins can be configured by setting GPIO's. Frame Sync of two ASI's must be synchronous. See the [TAX5X1X Synchronous Sample Rate Conversion application report](#) for more details on Secondary ASI.

The bus protocol TDM, I<sup>2</sup>S, or left-justified (LJ) format can be selected for primary ASI by using the PASI\_FORMAT[1:0], P0\_R26\_D[7:6] register bits. As shown in [Table 6-2](#) and [Table 6-3](#), these modes are all most significant byte (MSB)-first, pulse code modulation (PCM) data format, with the output channel data word-length programmable as 16, 20, 24, or 32 bits by configuring the PASI\_WLEN[1:0], P0\_R26\_D[5:4] register bits.

**Table 6-2. Primary Audio Serial Interface Format**

| P0_R26_D[7:6] : PASI_FORMAT[1:0] | PRIMARY AUDIO SERIAL INTERFACE FORMAT  |
|----------------------------------|----------------------------------------|
| 00 (default)                     | Time division multiplexing (TDM) mode  |
| 01                               | Inter IC sound (I <sup>2</sup> S) mode |
| 10                               | Left-justified (LJ) mode               |
| 11                               | Reserved (do not use this setting)     |

**Table 6-3. Primary Audio Serial Interface Data Word-Length**

| P0_R26_D[5:4] : PASI_WLEN[1:0] | PRIMARY AUDIO OUTPUT CHANNEL DATA WORD-LENGTH |
|--------------------------------|-----------------------------------------------|
| 00                             | Data word-length set to 16 bits               |
| 01                             | Data word-length set to 20 bits               |
| 10                             | Data word-length set to 24 bits               |
| 11 (default)                   | Data word-length set to 32 bits               |

The frame sync pin, FSYNC, is used in this audio bus protocol to define the beginning of a frame and has the same frequency as the output data sample rates. The bit clock pin, BCLK, is used to clock out the digital audio data across the serial bus. The number of bit-clock cycles in a frame must accommodate multiple device active output channels with the programmed data word length.

A frame consists of multiple time-division channel slots (up to 32) to allow all input/output channel audio data transmissions to complete on the audio bus by a device or multiple devices sharing the same audio bus. The device supports up to eight input channels and eight output channels that can be configured on primary ASI bus to place the channels audio data on bus slot 0 to slot 31. [Table 6-4](#) lists the output channel-1 slot configuration settings. In I<sup>2</sup>S and LJ mode, the slots are divided into two sets, left-channel slots and right-channel slots, as described in the [Section 6.3.1.2.2](#) and [Section 6.3.1.2.3](#).

**Table 6-4. Output Channel-1 Slot Assignment Settings**

| P0_R30_D[4:0] : PASI_TX_CH1_SLOT[4:0] | OUTPUT CHANNEL 1 SLOT ASSIGNMENT                          |
|---------------------------------------|-----------------------------------------------------------|
| 0 0000 = 0d (default)                 | Slot 0 for TDM or left slot 0 for I <sup>2</sup> S, LJ.   |
| 0 0001 = 1d                           | Slot 1 for TDM or left slot 1 for LJ.                     |
| ...                                   | ...                                                       |
| 0 1111 = 15d                          | Slot 15 for TDM or left slot 15 for LJ.                   |
| 1 0000 = 32d                          | Slot 16 for TDM or right slot 0 for I <sup>2</sup> S, LJ. |
| ...                                   | ...                                                       |
| 1 1110 = 30d                          | Slot 30 for TDM or right slot 14 for LJ.                  |
| 1 1111 = 31d                          | Slot 31 for TDM or right slot 15 for LJ.                  |

Similarly, the slot assignment setting for output channel 2 to channel 8 can be done using the PASI\_TX\_CH2\_SLOT\_NUM (P0\_R31\_D[4:0]) to PASI\_TX\_CH8\_SLOT\_NUM (P0\_R37) registers and for input channel 1 to channel 8 by using the PASI\_RX\_CH1\_SLOT\_NUM (P0\_R40\_D[4:0]) to PASI\_RX\_CH8\_SLOT\_NUM (P0\_R47\_D[4:0]) registers, respectively.

The slot word length is the same as the primary ASI channel word length set for the device. The output channel data word length must be set to the same value for all TAD5112-Q1 devices if all devices share the same ASI bus in a system. The maximum number of slots possible for the ASI bus in a system is limited by the available

bus bandwidth, which depends upon the BCLK frequency, output data sample rate used, and the channel data word length configured.

The device also includes a feature that offsets the start of the slot data transfer with respect to the frame sync by up to 31 cycles of the bit clock. Offset can be configured independently for input and output data paths. [Table 6-5](#) and [Table 6-6](#) lists the programmable offset configuration settings for transmission and receive paths respectively.

**Table 6-5. Programmable Offset Settings for the ASI Slot Start for transmission**

| P0_R28_D[4:0] : PASI_TX_OFFSET[4:0] | PROGRAMMABLE OFFSET SETTING FOR SLOT DATA TRANSMISSION START                                                                                                                                                        |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 0000 = 0d (default)               | The device follows the standard protocol timing without any offset.                                                                                                                                                 |
| 0 0001 = 1d                         | Slot start is offset by one BCLK cycle, as compared to standard protocol timing.<br>For I <sup>2</sup> S or LJ, the left and right slot start is offset by one BCLK cycle, as compared to standard protocol timing. |
| .....                               | .....                                                                                                                                                                                                               |
| 1 1110 = 30d                        | Slot start is offset by 30 BCLK cycles, as compared to standard protocol timing.<br>For I <sup>2</sup> S or LJ, the left and right slot start is offset by 30 BCLK cycles, as compared to standard protocol timing. |
| 1 1111 = 31d                        | Slot start is offset by 31 BCLK cycles, as compared to standard protocol timing.<br>For I <sup>2</sup> S or LJ, the left and right slot start is offset by 31 BCLK cycles, as compared to standard protocol timing. |

**Table 6-6. Programmable Offset Settings for the ASI Slot Start for Receive**


| P0_R38_D[4:0] : PASI_RX_OFFSET[4:0] | PROGRAMMABLE OFFSET SETTING FOR SLOT DATA RECEIVE START                                                                                                                                                             |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0 0000 = 0d (default)               | The device follows the standard protocol timing without any offset.                                                                                                                                                 |
| 0 0001 = 1d                         | Slot start is offset by one BCLK cycle, as compared to standard protocol timing.<br>For I <sup>2</sup> S or LJ, the left and right slot start is offset by one BCLK cycle, as compared to standard protocol timing. |
| .....                               | .....                                                                                                                                                                                                               |
| 1 1110 = 30d                        | Slot start is offset by 30 BCLK cycles, as compared to standard protocol timing.<br>For I <sup>2</sup> S or LJ, the left and right slot start is offset by 30 BCLK cycles, as compared to standard protocol timing. |
| 1 1111 = 31d                        | Slot start is offset by 31 BCLK cycles, as compared to standard protocol timing.<br>For I <sup>2</sup> S or LJ, the left and right slot start is offset by 31 BCLK cycles, as compared to standard protocol timing. |

The device also features the ability to invert the polarity of the frame sync pin, FSYNC, used to transfer the audio data as compared to the default FSYNC polarity used in standard protocol timing. This feature can be set using the PASI\_FSYNC\_POL (P0\_R26\_D[3]) register bit. Similarly, the device can invert the polarity of the bit clock pin, BCLK, which can be set using the PASI\_BCLK\_POL (P0\_R26\_D[2]) register bit.


In addition, the word clock and bit clock can be independently configured in either Controller or Target mode, for flexible connectivity to a wide variety of processors. The word clock is used to define the beginning of a frame, and is programmed as either a pulse or a square-wave signal. The frequency of this clock corresponds to the maximum of the selected DAC channels sampling frequencies.

#### 6.3.1.2.1 Time Division Multiplexed Audio (TDM) Interface


In TDM mode, also known as DSP mode, the rising edge of FSYNC starts the data transfer with the slot 0 data first. Immediately after the slot 0 data transmission, the remaining slot data are transmitted in order. FSYNC and each data bit (except the MSB of slot 0 when TX\_OFFSET equals 0) is transmitted on the rising edge of BCLK. [Figure 6-1](#) to [Figure 6-4](#) illustrate the protocol timing for TDM operation with various configurations for transmit DOUT line. The same protocol is applicable for the receive DIN line as well.

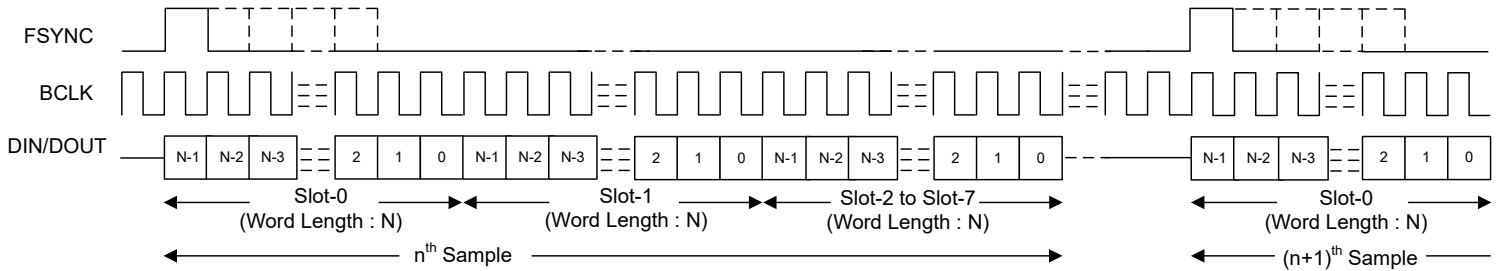


**Figure 6-1. TDM Mode Standard Protocol Timing (PASI\_TX\_OFFSET = 0)**

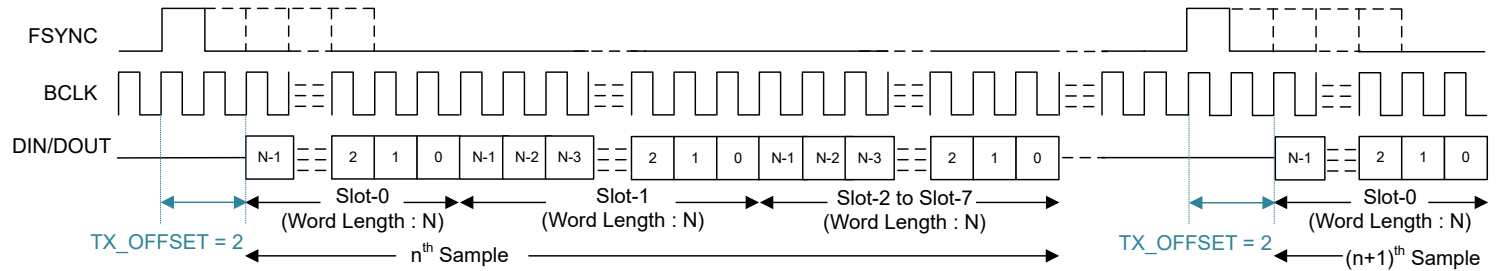

**Figure 6-2. TDM Mode Protocol Timing (PASI\_TX\_OFFSET = 2)**

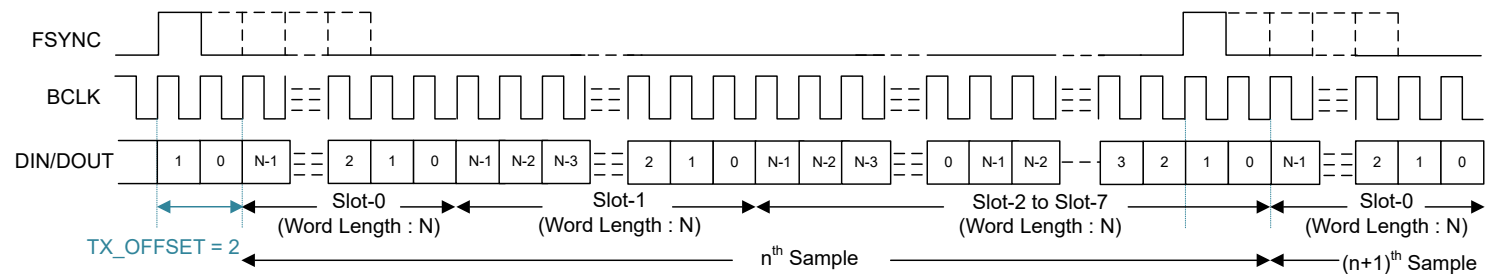

**Figure 6-3. TDM Mode Protocol Timing (No Idle BCLK Cycles, PASI\_TX\_OFFSET = 2)**

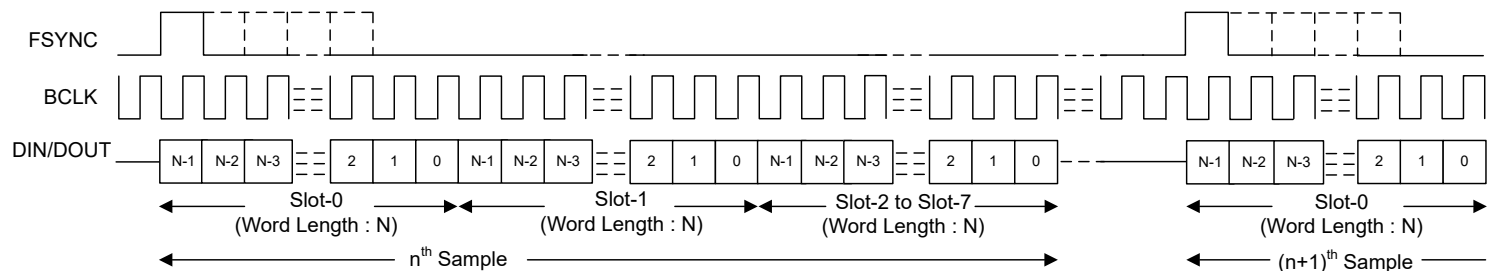


**Figure 6-4. TDM Mode Protocol Timing (PASI\_TX\_OFFSET = 0 and PASI\_BCLK\_POL = 1)**

For proper operation of the audio bus in TDM mode, the number of bit clocks per frame must be greater than or equal to the number of active output channels times the programmed word length of the output channel data. The device supports FSYNC as a pulse with a 1-cycle-wide bit clock but also supports multiples as well. For a higher BCLK frequency operation, using TDM mode with a PASI\_TX\_OFFSET value higher than 0 is recommended.


### 6.3.1.2.2 Inter IC Sound (I<sup>2</sup>S) Interface

The standard I<sup>2</sup>S protocol is defined for only two channels: left and right. The device extends the same protocol timing for multichannel operation. In I<sup>2</sup>S mode, the MSB of the left slot 0 is transmitted on the falling edge of BCLK in the second cycle after the *falling* edge of FSYNC. Immediately after the left slot 0 data transmission, the remaining left slot data are transmitted in order. The MSB of the right slot 0 is transmitted on the falling edge of


BCLK in the second cycle after the *rising* edge of FSYNC. Immediately after the right slot 0 data transmission, the remaining right slot data are transmitted in order. FSYNC and each data bit is transmitted on the falling edge of BCLK. Figure 6-5 to Figure 6-8 illustrate the protocol timing for I<sup>2</sup>S operation with various configurations for the transmit DOUT line. The same protocol is applicable for the receive DIN line as well.

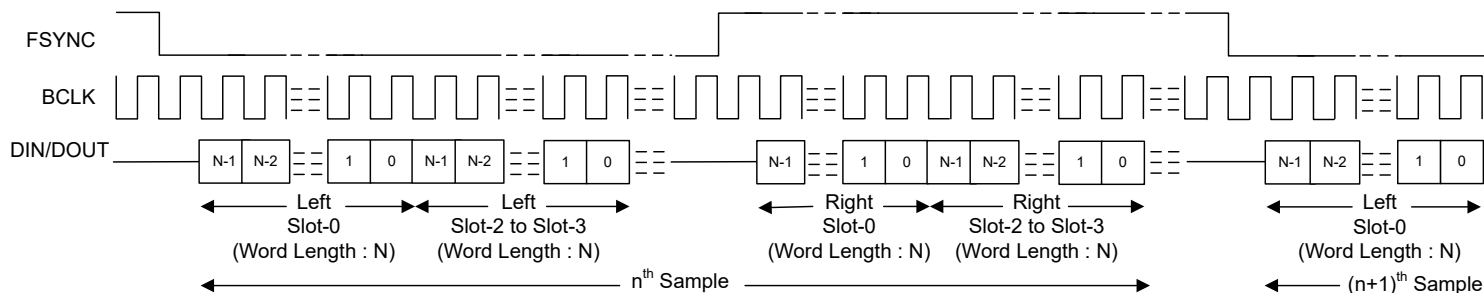


**Figure 6-5. I<sup>2</sup>S Mode Standard Protocol Timing (PASI\_TX\_OFFSET = 0)**

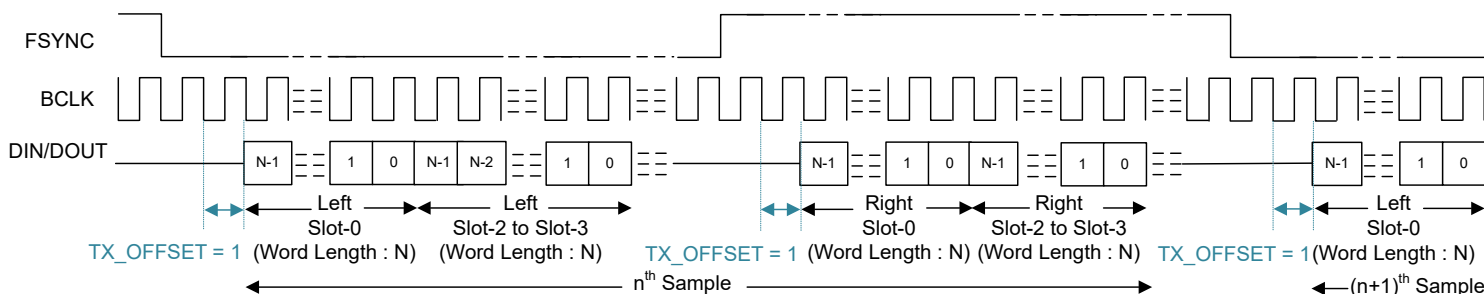

**Figure 6-6. I<sup>2</sup>S Protocol Timing (PASI\_TX\_OFFSET = 1)**

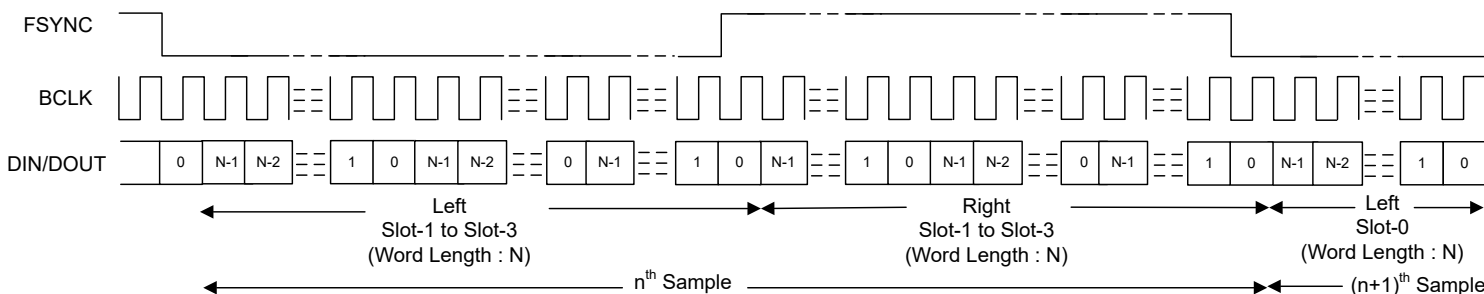

**Figure 6-7. I<sup>2</sup>S Protocol Timing (No Idle BCLK Cycles, PASI\_TX\_OFFSET = 0)**

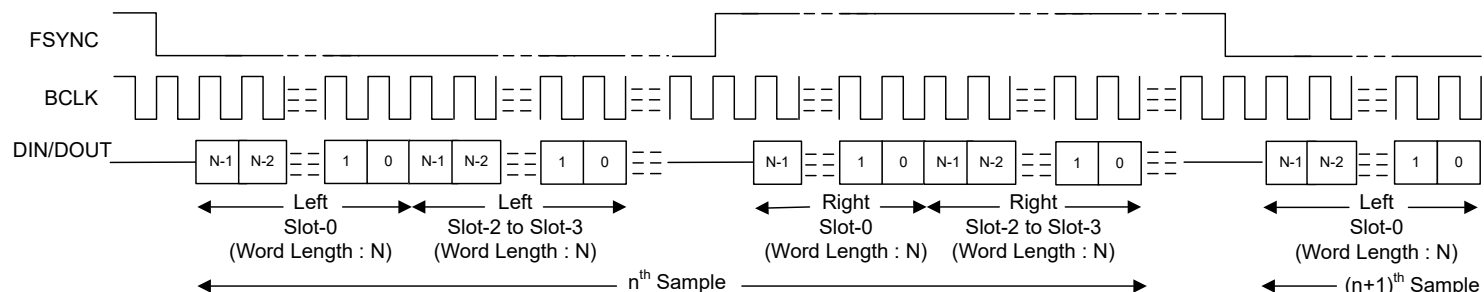


**Figure 6-8. I<sup>2</sup>S Protocol Timing (PASI\_TX\_OFFSET = 0 and PASI\_BCLK\_POL = 1)**

For proper operation of the audio bus in I<sup>2</sup>S mode, the number of bit clocks per frame must be greater than or equal to the number of active output channels (including left and right slots) times the programmed word length of the output channel data. The device FSYNC low pulse must be several BCLK cycles wide that is greater than


or equal to the number of active left slots times the data word length configured. Similarly, the FSYNC high pulse must be several BCLK cycles wide that is greater than or equal to the number of active right slots times the data word length configured.

### 6.3.1.2.3 Left-Justified (LJ) Interface


The standard LJ protocol is defined for only two channels: left and right. The device extends the same protocol timing for multichannel operation. In LJ mode, the MSB of the left slot 0 is transmitted in the same BCLK cycle after the *rising* edge of FSYNC. Each subsequent data bit is transmitted on the falling edge of BCLK. Immediately after the left slot 0 data transmission, the remaining left slot data are transmitted in order. The MSB of the right slot 0 is transmitted in the same BCLK cycle after the *falling* edge of FSYNC. Each subsequent data bit is transmitted on the falling edge of BCLK. Immediately after the right slot 0 data transmission, the remaining right slot data are transmitted in order. FSYNC is transmitted on the falling edge of BCLK. Figure 6-9 to Figure 6-12 illustrate the protocol timing for LJ operation with various configurations for the transmit DOUT line. The same protocol is applicable for the receive DIN line as well.

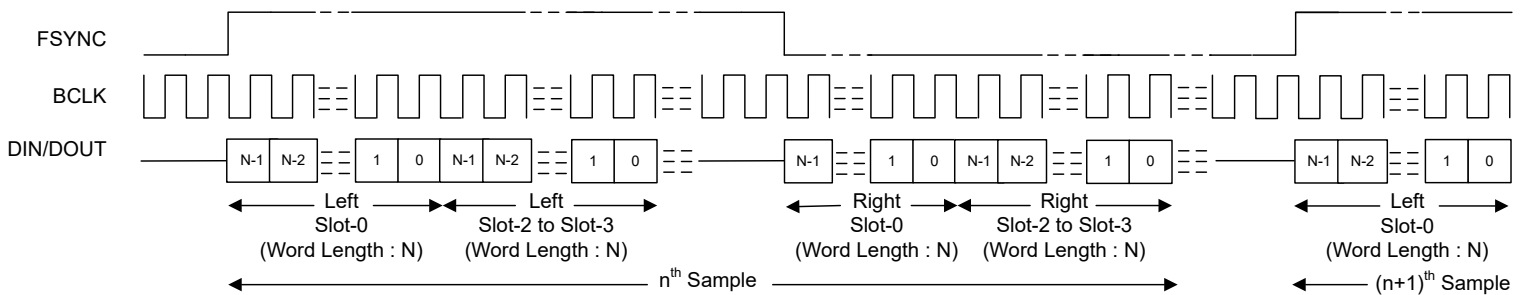


**Figure 6-9. LJ Mode Standard Protocol Timing (TX\_OFFSET = 0)**

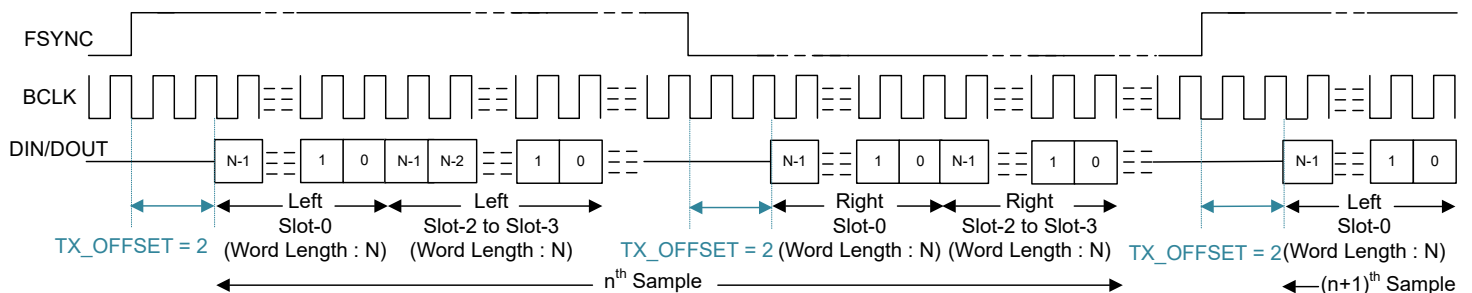

**Figure 6-10. LJ Protocol Timing (TX\_OFFSET = 2)**

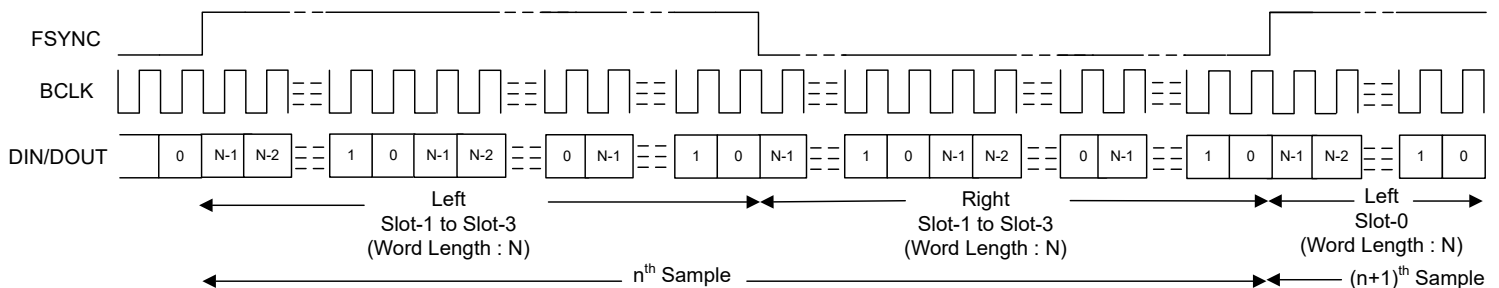

**Figure 6-11. LJ Protocol Timing (No Idle BCLK Cycles, TX\_OFFSET = 0)**

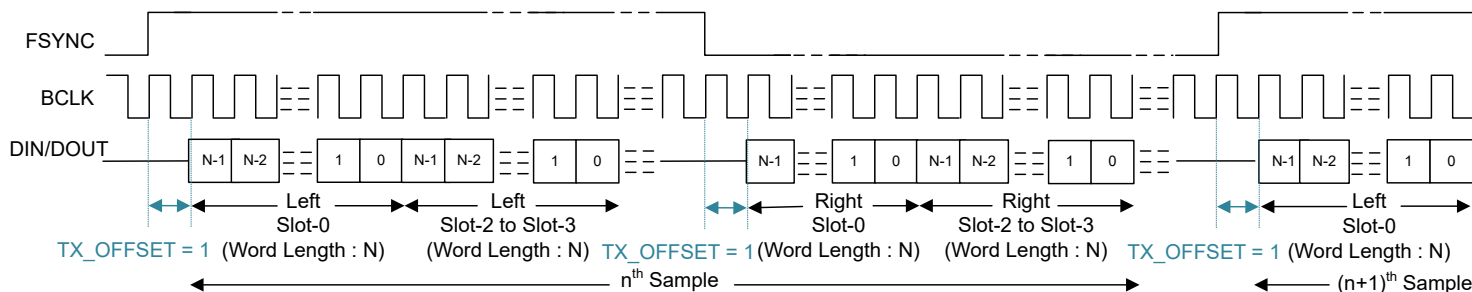


**Figure 6-12. LJ Protocol Timing (TX\_OFFSET = 1 and BCLK\_POL = 1)**

For proper operation of the audio bus in LJ mode, the number of bit clocks per frame must be greater than or equal to the number of active output channels (including left and right slots) times the programmed word length of the output channel data. The device FSYNC high pulse must be several BCLK cycles wide that is greater than or equal to the number of active left slots times the data word length configured. Similarly, the FSYNC low pulse must be several BCLK cycles wide that is greater than or equal to the number of active right slots times the data word length configured. For a higher BCLK frequency operation, using LJ mode with a TX\_OFFSET value higher than 0 is recommended.

### 6.3.1.3 Using Multiple Devices With Shared Buses

The device has many supported features and flexible options that can be used in the system to seamlessly connect multiple TAD5112-Q1 devices by sharing a single common I<sup>2</sup>C or SPI control bus and an audio serial interface bus. This architecture enables multiple applications to be applied to a system that require a microphone or speaker array for beam-forming operation, audio conferencing, noise cancellation, and so forth. [Figure 6-13](#) shows a diagram of multiple TAD5112-Q1 devices in a configuration where the control and audio data buses are shared.

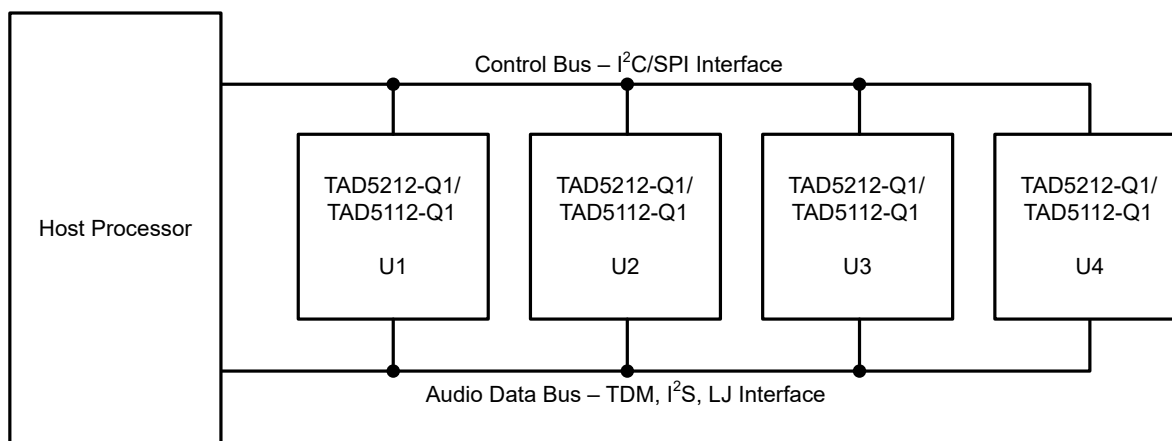

**Figure 6-13. Multiple TAD5112-Q1 Devices With Shared Control and Audio Data Buses**

The TAD5112-Q1 consists of the following features to enable seamless connection and interaction of multiple devices using a shared bus:

- Supports up to four pin-programmable I<sup>2</sup>C target addresses
- I<sup>2</sup>C broadcast simultaneously writes to (or triggers) all TAD5112-Q1 devices
- Supports up to 32 configuration input/output channel slots for the audio serial interface
- Tri-state feature (with enable and disable) for the unused audio data slots of the device
- Supports a bus-holder feature (with enable and disable) to keep the last driven value on the audio bus
- The GPIOx, GPI1 or GPO1 pin can be configured as a secondary input/output data lane or as a secondary audio serial interface
- The GPIOx, GPI1 or GPO1 pin can be used in a daisy-chain configuration of multiple TAD5112-Q1 devices



- Supports one BCLK cycle data latching timing to relax the timing requirement for the high-speed interface
- Programmable controller and target options for both primary and secondary audio serial interface
- Ability to synchronize the multiple devices for the simultaneous sampling requirement across devices
- Inter Channel Gain Alignment (ICGA) feature to align the DAC Channel gain across devices.

See the [Multiple TAC5x1x Devices With a Shared TDM and I<sup>2</sup>C/SPI Bus application report](#) for further details.

### 6.3.2 Phase-Locked Loop (PLL) and Clock Generation

The device has a smart auto-configuration block to generate all necessary internal clocks required for the DAC modulators and the digital filter engine used for signal processing. This configuration is done by monitoring the frequency of the FSYNC and BCLK signal on the audio buses.

The device supports the various data sample rates (of the FSYNC signal frequency) and the BCLK to FSYNC ratio to configure all clock dividers, including the PLL configuration, internally without host programming. [Table 6-7](#) and [Table 6-8](#) list the supported FSYNC and BCLK frequencies.

**Table 6-7. Supported FSYNC (Multiples or Submultiples of 48kHz) and BCLK Frequencies**

| BCLK TO<br>FSYNC<br>RATIO | BCLK (MHz)      |                  |                  |                  |                  |                  |                   |                   |                   |
|---------------------------|-----------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|
|                           | FSYNC<br>(8kHz) | FSYNC<br>(16kHz) | FSYNC<br>(24kHz) | FSYNC<br>(32kHz) | FSYNC<br>(48kHz) | FSYNC<br>(96kHz) | FSYNC<br>(192kHz) | FSYNC<br>(384kHz) | FSYNC<br>(768kHz) |
| 16                        | Reserved        | 0.256            | 0.384            | 0.512            | 0.768            | 1.536            | 3.072             | 6.144             | 12.288            |
| 24                        | Reserved        | 0.384            | 0.576            | 0.768            | 1.152            | 2.304            | 4.608             | 9.216             | 18.432            |
| 32                        | 0.256           | 0.512            | 0.768            | 1.024            | 1.536            | 3.072            | 6.144             | 12.288            | 24.576            |
| 48                        | 0.384           | 0.768            | 1.152            | 1.536            | 2.304            | 4.608            | 9.216             | 18.432            | Reserved          |
| 64                        | 0.512           | 1.024            | 1.536            | 2.048            | 3.072            | 6.144            | 12.288            | 24.576            | Reserved          |
| 96                        | 0.768           | 1.536            | 2.304            | 3.072            | 4.608            | 9.216            | 18.432            | Reserved          | Reserved          |
| 128                       | 1.024           | 2.048            | 3.072            | 4.096            | 6.144            | 12.288           | 24.576            | Reserved          | Reserved          |
| 192                       | 1.536           | 3.072            | 4.608            | 6.144            | 9.216            | 18.432           | Reserved          | Reserved          | Reserved          |
| 256                       | 2.048           | 4.096            | 6.144            | 8.192            | 12.288           | 24.576           | Reserved          | Reserved          | Reserved          |
| 384                       | 3.072           | 6.144            | 9.216            | 12.288           | 18.432           | Reserved         | Reserved          | Reserved          | Reserved          |
| 512                       | 4.096           | 8.192            | 12.288           | 16.384           | 24.576           | Reserved         | Reserved          | Reserved          | Reserved          |
| 1024                      | 8.192           | 16.384           | 24.576           | Reserved         | Reserved         | Reserved         | Reserved          | Reserved          | Reserved          |
| 2048                      | 16.384          | Reserved         | Reserved         | Reserved         | Reserved         | Reserved         | Reserved          | Reserved          | Reserved          |

**Table 6-8. Supported FSYNC (Multiples or Submultiples of 44.1kHz) and BCLK Frequencies**

| BCLK TO<br>FSYNC<br>RATIO | BCLK (MHz)         |                    |                     |                    |                    |                    |                     |                     |                     |
|---------------------------|--------------------|--------------------|---------------------|--------------------|--------------------|--------------------|---------------------|---------------------|---------------------|
|                           | FSYNC<br>(7.35kHz) | FSYNC<br>(14.7kHz) | FSYNC<br>(22.05kHz) | FSYNC<br>(29.4kHz) | FSYNC<br>(44.1kHz) | FSYNC<br>(88.2kHz) | FSYNC<br>(176.4kHz) | FSYNC<br>(352.8kHz) | FSYNC<br>(705.6kHz) |
| 16                        | Reserved           | Reserved           | 0.3528              | 0.4704             | 0.7056             | 1.4112             | 2.8224              | 5.6448              | 11.2896             |
| 24                        | Reserved           | 0.3528             | 0.5292              | 0.7056             | 1.0584             | 2.1168             | 4.2336              | 8.4672              | 16.9344             |
| 32                        | Reserved           | 0.4704             | 0.7056              | 0.9408             | 1.4112             | 2.8224             | 5.6448              | 11.2896             | 22.5792             |
| 48                        | 0.3528             | 0.7056             | 1.0584              | 1.4112             | 2.1168             | 4.2336             | 8.4672              | 16.9344             | Reserved            |
| 64                        | 0.4704             | 0.9408             | 1.4112              | 1.8816             | 2.8224             | 5.6448             | 11.2896             | 22.5792             | Reserved            |
| 96                        | 0.7056             | 1.4112             | 2.1168              | 2.8224             | 4.2336             | 8.4672             | 16.9344             | Reserved            | Reserved            |
| 128                       | 0.9408             | 1.8816             | 2.8224              | 3.7632             | 5.6448             | 11.2896            | 22.5792             | Reserved            | Reserved            |
| 192                       | 1.4112             | 2.8224             | 4.2336              | 5.6448             | 8.4672             | 16.9344            | Reserved            | Reserved            | Reserved            |
| 256                       | 1.8816             | 3.7632             | 5.6448              | 7.5264             | 11.2896            | 22.5792            | Reserved            | Reserved            | Reserved            |
| 384                       | 2.8224             | 5.6448             | 8.4672              | 11.2896            | 16.9344            | Reserved           | Reserved            | Reserved            | Reserved            |
| 512                       | 3.7632             | 7.5264             | 11.2896             | 15.0528            | 22.5792            | Reserved           | Reserved            | Reserved            | Reserved            |
| 1024                      | 7.5264             | 15.0528            | 22.5792             | Reserved           | Reserved           | Reserved           | Reserved            | Reserved            | Reserved            |
| 2048                      | 15.0528            | Reserved           | Reserved            | Reserved           | Reserved           | Reserved           | Reserved            | Reserved            | Reserved            |

The TAD5112-Q1 also supports non-Audio sample rates beyond those listed in prior tables. Refer to [Clocking Configuration of Device and Flexible Clocking For TAx5x1x Family application report](#) for more details.

The TAD5112-Q1 sample rate can be configured using registers CLK\_CFG0 (P0\_R50) and CLK\_CFG1 (P0\_R51) for primary and secondary ASI respectively. CLK\_DET\_STS0 (P0\_R62) and CLK\_DET\_STS1 (P0\_R63) registers also capture the device auto detect result for the FSYNC frequency in auto detection mode

for the primary and secondary ASI respectively. The registers CLK\_DET\_STS2 (P0\_R64) and CLK\_DET\_STS3 (P0\_R65) capture the BCLK to FSYNC ratio detected by the device in the auto detection mode for the selected ASI which is chosen to be the PLL reference through the CLK\_SRC\_SEL (P0\_R52\_D[3:1]) registers. If the device finds any unsupported combinations of FSYNC frequency and BCLK to FSYNC ratios, the device generates an ASI clock-error interrupt and shuts down various blocks of the device accordingly.

The TAD5112-Q1 also supports enabling channels while PDM or DAC channels are already in operation. This requires a pre-configuration before power to describe the maximum number of channels that can be enabled while in operation to maintain proper clock generation and use. This can be configured by using register DYN\_PUPD\_CFG (P0\_R119). ADC\_DYN\_PUPD\_EN (P0\_R119\_D[7]) and DAC\_DYN\_PUPD\_EN (P0\_R119\_D[5]) bits can be used to independently enable PDM or DAC Channels' dynamic power up. Number of maximum channels supported for dynamic power-up and power-down can be configured using ADC\_DYN\_MAXCH\_SEL (P0\_R119\_D[6]) and DAC\_DYN\_MAXCH\_SEL (P0\_R119\_D[4]) bits.

The device uses an integrated, low-jitter, phase-locked loop (PLL) to generate internal clocks required for the modulators and digital filter engine, as well as other control blocks. The device also supports an option to use BCLK, GPIOx, or the GPI1 pin (as CCLK) as the audio clock source without using the PLL to reduce power consumption. However, the DAC performance degrades based on jitter from the external clock source, and some processing features are not supported if the external audio clock source frequency is not high enough. Therefore, TI recommends using the PLL for high-performance applications. More details and information on how to configure and use the device in low-power mode without using the PLL are discussed in the [TAD5x1x Power Consumption Matrix Across Various Usage Scenarios application report](#).

The device also supports an audio bus controller mode operation using the GPIOx or GPI1 pin (as CCLK) as the reference input clock source and supports various flexible options and a wide variety of system clocks. More details and information on controller mode configuration and operation are discussed in the [Clocking Configuration of Device and Flexible Clocking For TAx5x1x Family application report](#).

The audio bus clock error detection and auto-detect feature automatically generates all internal clocks, but can be disabled using the IGNORE\_CLK\_ERR (P0\_R4\_D[6]) and CUSTOM\_CLK\_CFG (P0\_R50\_D[0]) register bits, respectively. In the system, this disable feature can be used to support custom clock frequencies that are not covered by the auto detect scheme. For such application use cases, care must be taken to make sure that the multiple clock dividers are all configured appropriately. TI recommends using the PPC3 GUI for device configuration settings; for more details see the [TAC5212EVM-PDK Evaluation module users guide](#) and the [PurePath™ console graphical development suite](#). The [Clocking Configuration of Device and Flexible Clocking For TAx5x1x Family application report](#) also covers various aspects of the custom clock configurations. Refer [Clock Error Configuration, Detection, and Modes Supported in TAx5x1x Family application report](#) for more details about the clock detection module of the device.

When the PLL is turned off, the digital volume control and other features using programmable coefficients like biquads, mixer, AGC etc., except the high pass filter (HPF) are not applicable.

### 6.3.3 Output Channel Configurations

The device consists of two pairs of analog output pins (OUTxP and OUTxM) that can be configured as differential inputs or single-ended outputs for playback channels. The device supports simultaneous playback of up to four channels of single-ended outputs or up to two channel differential output using the high-performance multichannel DAC. [Table 6-9](#) shows the input source selection for the playback channels.

**Table 6-9. Input Source Selection for the Playback Channel**

| P0_R100_D[7:5] : OUT1x_SRC[2:0] | OUT1P/OUT1M Input Source Selection                      |
|---------------------------------|---------------------------------------------------------|
| 000                             | Output driver disabled                                  |
| 001 (default)                   | DAC signal chain                                        |
| 010                             | Analog bypass signal chain                              |
| 011                             | Mixing of DAC and Analog bypass signal chains           |
| 100                             | OUT1P for DAC and OUT1M for Analog bypass signal chain  |
| 101                             | OUT1P for Analog bypass and OUT1M for DAC signal chain. |

**Table 6-9. Input Source Selection for the Playback Channel (continued)**

| P0_R100_D[7:5] : OUT1x_SRC[2:0] | OUT1P/OUT1M Input Source Selection |
|---------------------------------|------------------------------------|
| 11x                             | Reserved. Do not use this setting. |

Similarly, the input source selection setting for output channel 2 can be configured using the OUT2x\_SRC[2:0] (P0\_R107\_D[7:5]) register bits.

The TAD5112-Q1 supports up to 2-channel differential output, up to 2-channel pseudo-differential output, and up to 4-channel single-ended output. Each of the output channels can be independently configured for differential or single-ended output.





Table 6-10 shows the configuration modes for the output pins.

**Table 6-10. Output Pin Configuration for the Playback Channel**

| P0_R100_D[4:2] : OUT1x_CFG[2:0] | OUT1P/OUT1M Pin Configuration                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------|
| 000 (default)                   | OUT1P/OUT1M as a differential pair                                                                                   |
| 001                             | OUT1P and OUT1M as independent single-ended outputs                                                                  |
| 010                             | Mono single-ended output on OUT1P only                                                                               |
| 011                             | Mono single-ended output on OUT1M only                                                                               |
| 100                             | Pseudo-differential output with OUT1P as signal and OUT1M as VCOM                                                    |
| 101                             | Pseudo differential output with OUT1P as signal, OUT1M as VCOM and OUT2M as VCOM sense (external common mode sense). |
| 110                             | Pseudo-differential output with OUT1M as signal and OUT1P as VCOM                                                    |
| 111                             | Reserved. Do not use this setting.                                                                                   |

Similarly, the output pin configuration for output channel 2 can be done using the OUT2x\_CFG[2:0] (P0\_R107\_D[4:2]) register bits.

See Figure 6-14 to Figure 6-17 for the various typical output configuration diagrams.

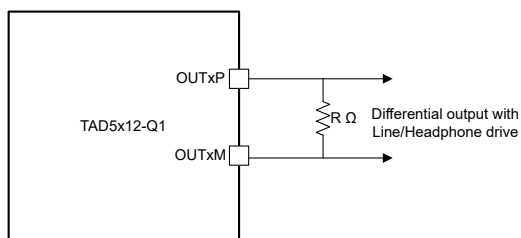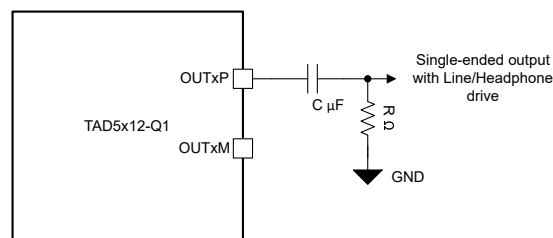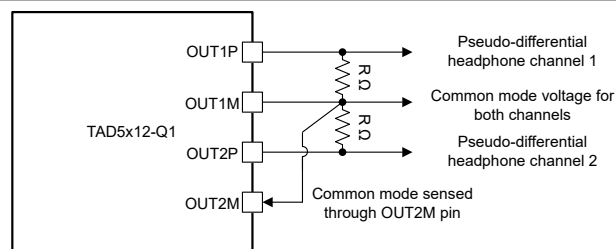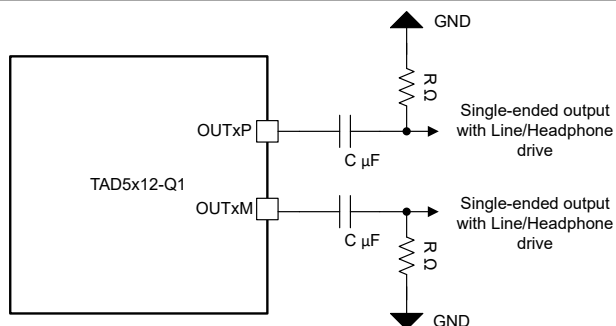**Figure 6-14. Differential Output Connection (OUT1x\_CFG[2:0] = 3'b000)****Figure 6-15. Mono Single-ended Output Connection on OUT1P (OUT1x\_CFG[2:0] = 3'b010)****Figure 6-16. Psuedo-differential Output Connection with External Common-Mode Sense (OUT1x\_CFG[2:0] = 3'b101)****Figure 6-17. Stereo Single-ended Output Connection (OUT1x\_CFG[2:0] = 3'b001)**

The TAD5112-Q1 can support a variety of loads including headphone, lineout, and receiver amplifiers. Load drive configurations are available for each pin independently. OUT1P\_DRIVE[1:0] (P0\_R101\_D[7:6]) configures the load drive capability for the OUT1P pin. Similarly, OUT1M\_DRIVE[1:0], OUT2P\_DRIVE[1:0], OUT2M\_DRIVE[1:0] control the output drive for OUT1M, OUT2P and OUT2M respectively.

#### 6.3.4 Reference Voltage

All audio data converters require a DC reference voltage. The TAD5112-Q1 achieves low-noise performance by internally generating a low-noise reference voltage. This reference voltage is generated using a band-gap circuit with high PSRR performance. This audio converter reference voltage must be filtered externally using a minimum 1µF capacitor connected from the VREF pin to analog ground (VSS).

The value of this reference voltage can be configured using the P0\_R77\_D[1:0] register bits and must be set to an appropriate value based on the desired full-scale input for the device (analog bypass path) and the AVDD supply voltage available in the system. The default VREF value is set to 2.75V, which in turn supports a 2V<sub>RMS</sub> differential full-scale input to the device. The required minimum AVDD voltage for this mode is 3V. [Table 6-11](#) lists the various VREF settings supported along with required AVDD range and the supported full-scale input signal for that configuration.

**Table 6-11. VREF Programmable Settings**

| P0_R77_D[1:0] : VREF[1:0] | VREF OUTPUT VOLTAGE | DIFFERENTIAL FULL-SCALE INPUT SUPPORTED | SINGLE-ENDED FULL-SCALE INPUT SUPPORTED | AVDD OPERATION MODE |
|---------------------------|---------------------|-----------------------------------------|-----------------------------------------|---------------------|
| 00 (default)              | 2.75V               | 2V <sub>RMS</sub>                       | 1V <sub>RMS</sub>                       | AVDD 3.3V Operation |
| 01                        | 2.5V                | 1.818V <sub>RMS</sub>                   | 0.909V <sub>RMS</sub>                   | AVDD 3.3V Operation |
| 10                        | 1.375V              | 1V <sub>RMS</sub>                       | 0.5V <sub>RMS</sub>                     | AVDD 1.8V Operation |
| 11                        | Reserved            | Reserved                                | Reserved                                | Reserved            |

To achieve low-power consumption, this audio reference block is powered down as described in the [Section 6.4](#). When exiting sleep mode, the audio reference block is powered up using the internal fast-charge scheme and the VREF pin settles to a steady-state voltage after the settling time (a function of the decoupling capacitor on the VREF pin). This time is approximately equal to 3.5ms when using a 1µF decoupling capacitor. If a higher-value decoupling capacitor is used on the VREF pin, the fast-charge setting must be reconfigured using the VREF\_QCHG (P0\_R2\_D[4:3]) register bits, which support options of 3.5ms (default), 10ms, 50ms, or 100ms.

#### 6.3.5 Programmable Microphone Bias

The device integrates a built-in, low-noise microphone bias pin that can be used in the system for biasing electret-condenser microphones or providing the supply to the MEMS analog or digital microphone. The integrated bias amplifier supports up to 10mA of load current that can be used for multiple microphones and is designed to provide a combination of high PSRR, low noise, and programmable bias voltages to allow the biasing to be fine tuned for specific microphone combinations.

When using this MICBIAS pin for biasing or supplying to multiple microphones, avoid any common impedance on the board layout for the MICBIAS connection to minimize coupling across microphones. [Table 6-12](#) shows the available microphone bias programmable options.

**Table 6-12. MICBIAS Programmable Settings**

| P0_R77_D[3:2] : MICBIAS_VAL[1:0] | P0_R77_D[1:0] : VREF_FSCALE[1:0] | MICBIAS OUTPUT VOLTAGE               |
|----------------------------------|----------------------------------|--------------------------------------|
| 00 (default)                     | 00 (default)                     | 2.75V (same as the VREF output)      |
|                                  | 01                               | 2.5V (same as the VREF output)       |
|                                  | 10                               | 1.375V (same as the VREF output)     |
|                                  | 11                               | Reserved (do not use these settings) |
| 01                               | 00 (default)                     | 1.375V (0.5 times the VREF output)   |
|                                  | 01                               | 1.250V (0.5 times the VREF output)   |
|                                  | 10 or 11                         | Reserved (do not use these settings) |

**Table 6-12. MICBIAS Programmable Settings (continued)**

| P0_R77_D[3:2] : MICBIAS_VAL[1:0] | P0_R77_D[1:0] : VREF_FSCALE[1:0] | MICBIAS OUTPUT VOLTAGE               |
|----------------------------------|----------------------------------|--------------------------------------|
| 10                               | XX                               | Reserved (do not use these settings) |
| 11                               | XX                               | Same as AVDD                         |


The microphone bias output can be powered on or powered off (default) by configuring the MICBIAS\_PDZ, P0\_R120\_D5 register bit. Additionally, the device provides an option to configure the GPIO1 or GPIx pin to directly control the microphone bias output powering on or off. This feature is useful to control the microphone directly without engaging the host for I<sup>2</sup>C or SPI communication. The MICBIAS\_PDZ, P0\_R120\_D5 register bit value is ignored if the GPIO1 or GPIx pin is configured to set the microphone bias on or off.

### 6.3.6 Digital PDM Microphone Record Channel

The TAD5112-Q1 supports interface to digital pulse-density-modulation (PDM) microphones and uses high-order and high-performance decimation filters to generate pulse code modulation (PCM) output data that can be transmitted on the audio serial interface to the host. The device supports simultaneous recording on up to four digital microphone channels.


The GPIOx, GPI1 and GPO1 pins can be configured for the PDM data lines (PDMDINx) and PDM clock (PDMCLK) functions as per the interrupts, Status, and digital I/O pin multiplexing section for the digital PDM microphone recording.

The device internally generates PDMCLK with a programmable frequency of either 6.144MHz, 3.072MHz, 1.536MHz, or 768kHz (for output data sample rates in multiples or submultiples of 48kHz) or 5.6448MHz, 2.8224MHz, 1.4112MHz, or 705.6kHz (for output data sample rates in multiples or submultiples of 44.1kHz) using the PDM\_CLK\_CFG[1:0] (P0\_R53\_D[7:6]) register bits. PDMCLK can be routed on the GPIOx and GPO1 pins using the respective configuration registers: GPIO1\_CFG (P0\_R10[7:4]), GPIO2\_CFG (P0\_R11[7:4]) and GPO1\_CFG (P0\_R12[7:4]). This clock can be connected to the external digital microphone device. [Figure 6-18](#) shows a connection diagram of the digital PDM microphones.

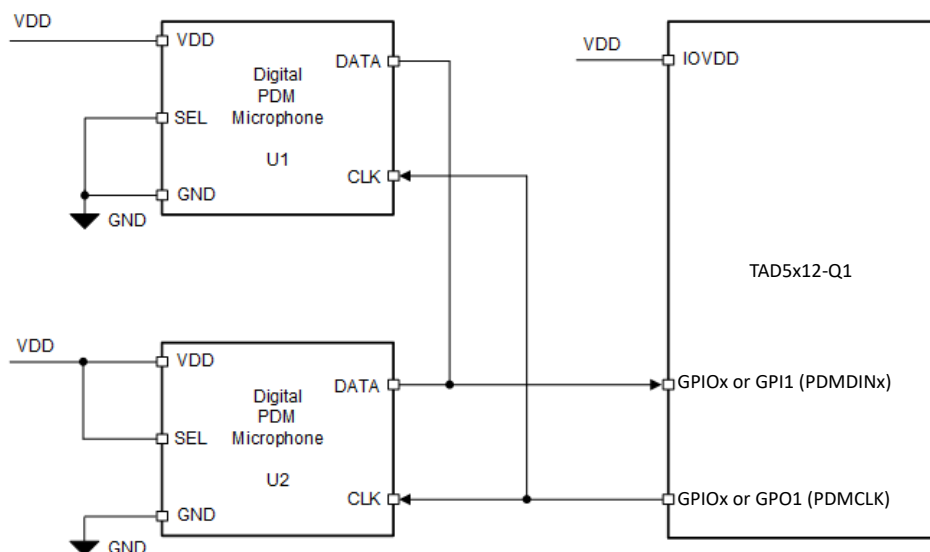**Figure 6-18. Digital PDM Microphones Connection Diagram for the TAD5112-Q1**

The single-bit output of the external digital microphone device can be connected to the GPI1 or GPIOx pin. The device supports two PDM data lines: PDMDIN1 and PDMDIN2 set through the registers PDM\_DIN1\_SEL (P0\_R19\_D[3:2]) and PDM\_DIN2\_SEL (P0\_R19\_D[1:0]). When using GPI1, make sure that the GPI1 function is enabled using the GPI1\_CFG (P0\_R13[1]). This single data line can be shared by two digital microphones to place the data on the opposite edge of PDMCLK. Internally, the device latches the steady value of the data on either the rising or falling edge of PDMCLK based on the configuration register bits set in PDMDIN1\_EDGE

(P0\_R19\_D[4]) and PDMDIN2\_EDGE (P0\_R19\_D[5]). [Figure 6-19](#) shows the digital PDM microphone interface timing diagram.

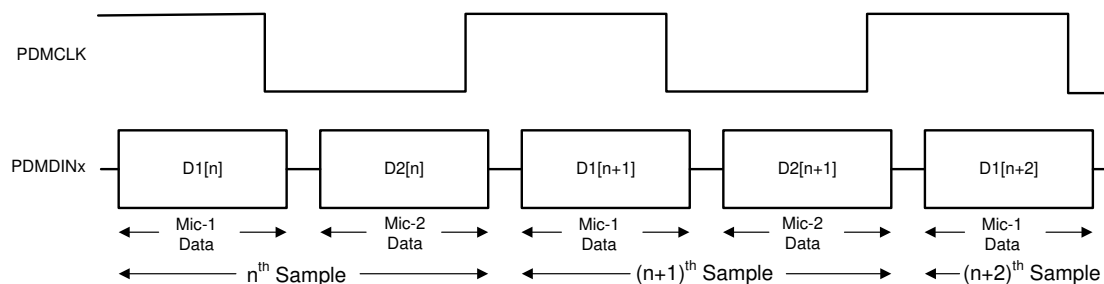

**Figure 6-19. Digital PDM Microphone Protocol Timing Diagram**

Use the PDM\_CH1\_SEL[1:0] (P0\_R19\_D[7]) and PDM\_CH2\_SEL[1:0] (P0\_R19\_D[6]) register bits to enable the digital microphone for channel 1 to channel 2 respectively.


### 6.3.7 Signal-Chain Processing

The TAD5112-Q1 signal chain is comprised of very-low-noise, high-performance, and low-power analog blocks and highly flexible and programmable digital processing blocks. The high performance and flexibility combined with a compact package makes the TAD5112-Q1 optimized for a variety of end-equipments and applications that require multichannel audio playback. [Section 6.3.7.1](#) describe key components in DAC signal chain further.



### 6.3.7.1 DAC Signal-Chain

Figure 6-20 shows the key components of the playback signal chain.

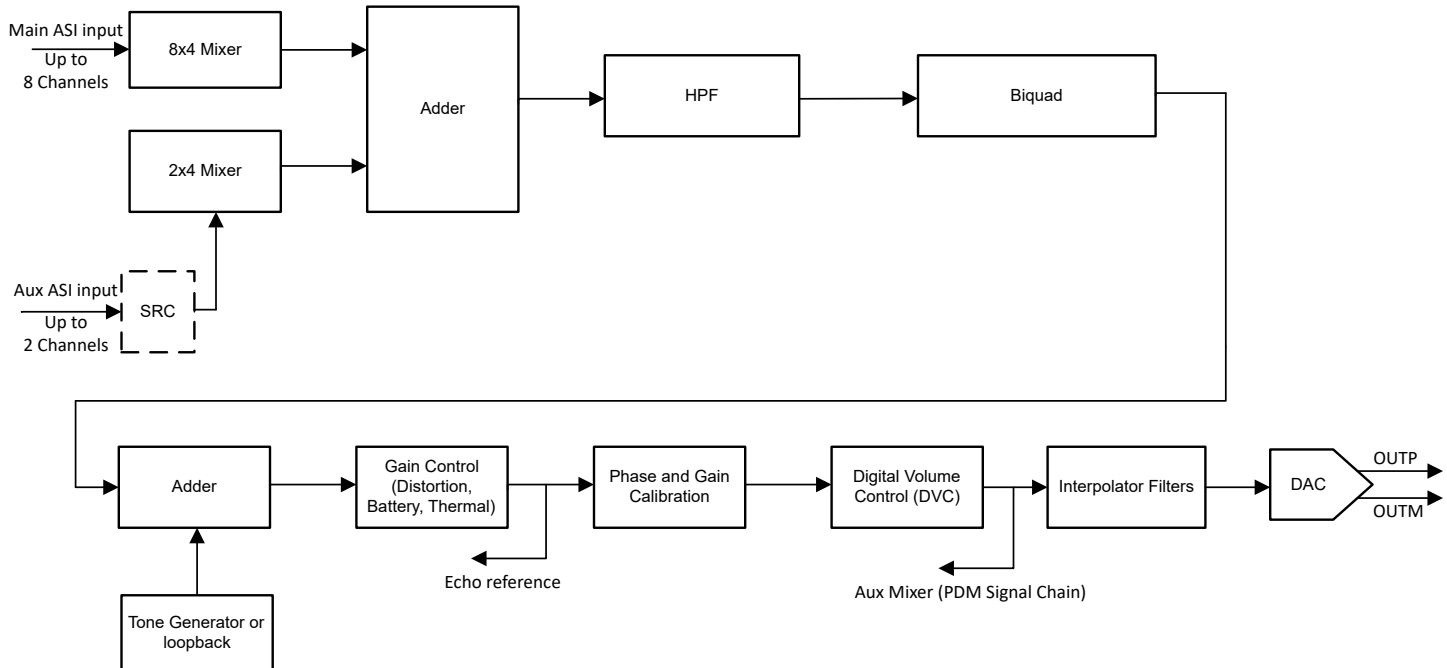

**Figure 6-20. DAC Signal-Chain Processing Flowchart**

The DAC signal chain offers a highly flexible low noise playback path for low noise and high-fidelity audio applications. This low-noise and low-distortion, multibit, delta-sigma DAC enables the TAD5112-Q1 to achieve 110dB dynamic range in a very low power. Moreover, the DAC architecture has inherent antialias filtering with a high rejection of out-of-band frequency noise around multiple modulator frequency components. Therefore, the device prevents noise from aliasing into the audio band. Further on in the signal chain, an integrated, high-performance multistage digital interpolation filter sharply cuts off any out-of-band frequency noise with high stop-band attenuation.

The signal chain also consists of various highly programmable digital processing blocks such as biquad filters, phase calibration, gain calibration, high-pass filter, digital summer or mixer, synchronous sample rate converter, distortion limiter, thermal foldback, brownout prevention and volume control. The details on these processing blocks are discussed further in this section. The device also supports up to four channel single-ended output modes and an analog bypass option from analog input to DAC output.

The output channels for playback can be enabled or disabled by using the CH\_EN (P0\_R118) register, and the input channels for the audio serial interface can be enabled or disabled by using the PASI\_RX\_CHx\_CFG or SASI\_RX\_CHx\_CFG bits. The device supports simultaneous power-up and power-down of all active channels for simultaneous playback. However, based on the application needs, if some channels must be powered-up or powered-down dynamically when the other channel playback is on, then that use case is supported by setting the DYN\_PUPD\_CFG (P0\_R119) register.

The device supports multiple data mixing options where up to 8 Input Channels from Main ASI, 2 Input Channels from Aux ASI, ADC loopback data, and tone generator can be mixed with flexible gain options for each path before playback on DAC output. By default, these mixers are disabled and channels are configured for only one channel of data. Mixers can be configured by setting ASI\_DIN\_Mixers programmable coefficient registers described in Register Map B0\_P17.

The device supports an output signal bandwidth of up to 90kHz, which allows the high-frequency non-audio signal to be played by using a 216kHz (or higher) sample rate. Wideband mode can be enabled or disabled by using the DAC\_CHx\_BW\_Mode bit (P0\_R101\_D[0], P0\_R108\_D[0]).

For sample rates of 48kHz or lower, the device supports all features and various programmable processing blocks. However, for sample rates higher than 48kHz, there are limitations in the number of simultaneous channel recordings and playback supported and the number of biquad filters and such. See the [TAC5212 Sampling Rates and Programmable Processing Blocks Supported application report](#) for further details.

The following section describes the key blocks of the DAC signal chain. More details on various other blocks of the DAC signal chain are available in application notes listed in [Section 9.1.1](#).

#### 6.3.7.1.1 Programmable Channel Gain and Digital Volume Control

The device has an independent programmable channel gain setting for each output channel that can be set to the appropriate value based on the maximum input signal expected in the system. This can be done by configuring OUT1x\_LVL\_CTRL and OUT2x\_LVL\_CTRL bits. Coarse gain configuration from -12dB to +12dB is available with these controls in steps of 6dB.

The device has a programmable digital volume control with a range from -100dB to 27dB in steps of 0.5dB with the option to mute the channel recording. The digital volume control value can be changed dynamically while the DAC channel is powered-up and playing. During volume control changes, the soft ramp-up or ramp-down volume feature is used internally to avoid any audible artifacts. Soft-stepping can be entirely disabled using the DAC\_DSP\_DISABLE\_SOFT\_STEP (P0\_R115\_D[1]) register bit.

The digital volume control setting is independently available for each of the 4 single-ended output channels. In the case of 2-Channel Differential DAC, only settings for DAC\_CH1A and DAC\_CH2A are applicable. The device also supports an option to gang up the volume control setting for all channels together using the channel 1A digital volume control setting, regardless if channel 1A is powered up or powered down. This gang-up can be enabled using the DAC\_DSP\_DVOL\_GANG (P0\_R115\_D[0]) register bit.

[Table 6-13](#) shows the programmable options available for the digital volume control.

**Table 6-13. Digital Volume Control (DVC) Programmable Settings**

| P0_R103_D[7:0] : DAC_CH1A_DVOL[7:0] | DVC SETTING FOR OUTPUT CHANNEL 1A      |
|-------------------------------------|----------------------------------------|
| 0000 0000 = 0d                      | Output channel 1 DVC is set to mute    |
| 0000 0001 = 1d                      | Output channel 1 DVC is set to -100dB  |
| 0000 0010 = 2d                      | Output channel 1 DVC is set to -99.5dB |
| 0000 0011 = 3d                      | Output channel 1 DVC is set to -99dB   |
| ...                                 | ...                                    |
| 1100 1000 = 200d                    | Output channel 1 DVC is set to -0.5dB  |
| 1100 1001 = 201d (default)          | Output channel 1 DVC is set to 0dB     |
| 1100 1010 = 202d                    | Output channel 1 DVC is set to 0.5dB   |
| ...                                 | ...                                    |
| 1111 1101 = 253d                    | Output channel 1 DVC is set to 26dB    |
| 1111 1110 = 254d                    | Output channel 1 DVC is set to 26.5dB  |
| 1111 1111 = 255d                    | Output channel 1 DVC is set to 27dB    |

Similarly, the digital volume control setting for output channels 1B, 2A, and 2B can be configured using the CH1B\_DVOL (P0\_R103) to CH2B\_DVOL (P0\_R112) register bits, respectively.

The internal digital processing engine soft ramps up the volume from a muted level to the programmed volume level when the channel is powered up, and the internal digital processing engine soft ramps down the volume from a programmed volume to mute when the channel is powered down. This soft-stepping of volume is done to prevent abruptly powering up and powering down the playback channel which can cause audible artifacts. This feature can also be entirely disabled using the DAC\_DSP\_DISABLE\_SOFT\_STEP (P0\_R115\_D[1]) register bit.

#### 6.3.7.1.2 Programmable Channel Gain Calibration

Along with the digital volume control, this device also provides programmable channel gain calibration. The gain of each channel can be finely calibrated or adjusted in steps of 0.1dB for a range of -0.8dB to 0.7dB gain error.

This adjustment is useful when trying to match the gain across channels resulting from transducer sensitivity and load impedance mismatch. This feature, in combination with the regular digital volume control, allows the gains across all channels to be matched for a wide gain error range with a resolution of 0.1dB. [Table 6-14](#) shows the programmable options available for the channel gain calibration.

**Table 6-14. DAC Channel Gain Calibration Programmable Settings**

| P0_R104_D[7:4] : DAC_CH1A_FGAIN[3:0] | CHANNEL GAIN CALIBRATION SETTING FOR INPUT CHANNEL 1A |
|--------------------------------------|-------------------------------------------------------|
| 0000 = 0d                            | Input channel 1 gain calibration is set to -0.8dB     |
| 0001 = 1d                            | Input channel 1 gain calibration is set to -0.7dB     |
| ...                                  | ...                                                   |
| 1000 = 8d (default)                  | Input channel 1 gain calibration is set to 0dB        |
| ...                                  | ...                                                   |
| 1110 = 14d                           | Input channel 1 gain calibration is set to 0.6dB      |
| 1111 = 15d                           | Input channel 1 gain calibration is set to 0.7dB      |

Similarly, the channel gain calibration setting for input channel 1B, 2A and 2B can be configured using the DAC\_CH1B\_CFG1 (P0\_R106), DAC\_CH2A\_CFG1 (P0\_R111), and DAC\_CH2B\_CFG1 (P0\_R113) register bits, respectively.

#### 6.3.7.1.3 Programmable Digital High-Pass Filter

To remove the DC offset component and attenuate the undesired low-frequency noise content in the record data, the device supports a programmable high-pass filter (HPF). The HPF is not a channel-independent filter setting but is globally applicable for all DAC channels. This HPF is constructed using the first-order infinite impulse response (IIR) filter, and is efficient enough to filter out possible DC components of the signal. [Table 6-15](#) shows the predefined –3dB cutoff frequencies available that can be set by using the DAC\_DSP\_HPF\_SEL[1:0] register bits of P0\_R115. Additionally, to achieve a custom –3dB cutoff frequency for a specific application, the device also allows the first-order IIR filter coefficients to be programmed when the DAC\_DSP\_HPF\_SEL[1:0] register bits are set to 2'b00. [Figure 6-21](#) illustrates a frequency response plot for the HPF filter.

**Table 6-15. HPF Programmable Settings**

| P0_R115_D[5:4] :<br>DAC_DSP_HPF_SEL[1:0] | -3dB CUTOFF FREQUENCY<br>SETTING  | -3dB CUTOFF FREQUENCY AT<br>16kHz SAMPLE RATE | -3dB CUTOFF FREQUENCY AT<br>48kHz SAMPLE RATE |
|------------------------------------------|-----------------------------------|-----------------------------------------------|-----------------------------------------------|
| 00                                       | Programmable 1st-order IIR filter | Programmable 1st-order IIR filter             | Programmable 1st-order IIR filter             |
| 01 (default)                             | $0.00002 \times f_s$              | 0.25Hz                                        | 1Hz                                           |
| 10                                       | $0.00025 \times f_s$              | 4Hz                                           | 12Hz                                          |
| 11                                       | $0.002 \times f_s$                | 32Hz                                          | 96Hz                                          |

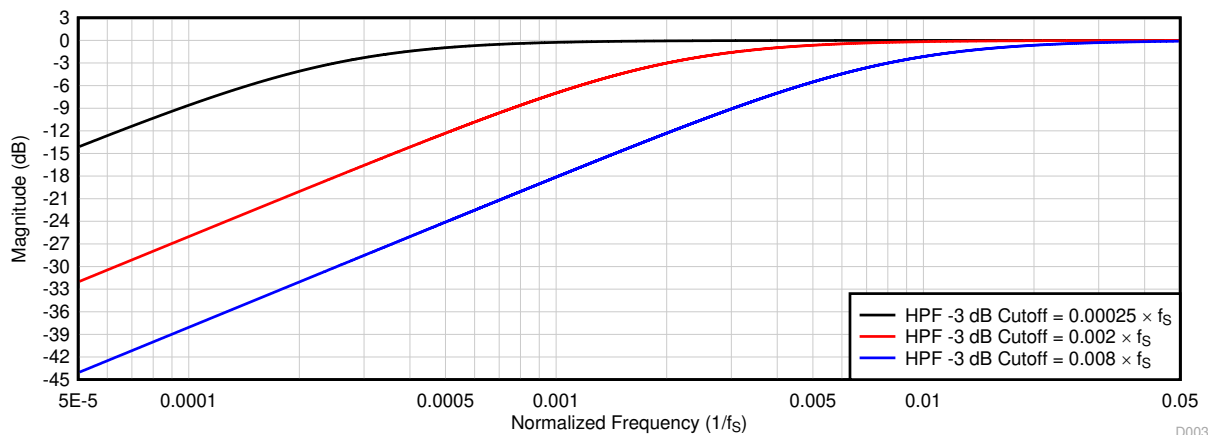


Figure 6-21. HPF Filter Frequency Response Plot

D003

Equation 1 gives the transfer function for the first-order programmable IIR filter:

$$H(z) = \frac{N_0 + N_1 z^{-1}}{2^{31} - D_1 z^{-1}} \quad (1)$$

The frequency response for this first-order programmable IIR filter with default coefficients is flat at a gain of 0dB (all-pass filter). The host device can override the frequency response by programming the IIR coefficients in Table 6-16 to achieve the desired frequency response for high-pass filtering or any other desired filtering. If DAC\_DSP\_HP\_FSEL[1:0] are set to 2'b00, the host device must write these coefficients values for the desired frequency response before powering-up any DAC channel for playback. Table 6-16 shows the filter coefficients for the first-order IIR filter.

Table 6-16. 1st-Order IIR Filter Coefficients

| FILTER                                                                                  | FILTER COEFFICIENT | DEFAULT COEFFICIENT VALUE | COEFFICIENT REGISTER MAPPING |
|-----------------------------------------------------------------------------------------|--------------------|---------------------------|------------------------------|
| Programmable 1st-order IIR filter (can be allocated to HPF or any other desired filter) | N <sub>0</sub>     | 0x7FFFFFFF                | P17_R120-R124                |
|                                                                                         | N <sub>1</sub>     | 0x00000000                | P17_R125-R128                |
|                                                                                         | D <sub>1</sub>     | 0x00000000                | P18_R8-R11                   |

#### 6.3.7.1.4 Programmable Digital Biquad Filters

The device supports up to 12 programmable digital biquad filters available for DAC signal chain limited to 3/channel. These highly efficient filters achieve the desired frequency response. The TAD5112-Q1 also supports on the fly programmable Biquad filters for two channel playback use case. In digital signal processing, a digital biquad filter is a second-order, recursive linear filter with two poles and two zeros. Equation 4 gives the transfer function of each biquad filter:

$$H(z) = \frac{N_0 + 2N_1 z^{-1} + N_2 z^{-2}}{2^{31} - 2D_1 z^{-1} - D_2 z^{-2}} \quad (2)$$

The frequency response for the biquad filter section with default coefficients is flat at a gain of 0dB (all-pass filter). The host device can override the frequency response by programming the biquad coefficients to achieve the desired frequency response for a low-pass, high-pass, or any other desired frequency shaping. The programmable coefficients for the biquads are located in the programmable coefficient registers in B0\_P15 and B0\_P16. If biquad filtering is required, then the host device must write these coefficients values before powering up any ADC channels for recording or DAC channels for playback. In two channel use case, the TAD5112-Q1 also supports on the fly programmable filters. In this case, the device uses two banks of filters for

one channel with a switch bit to perform the switch from one filter bank to the other. As described in [Table 6-17](#), these biquad filters can be allocated for each output channel based on the DAC\_DSP\_BQ\_CFG[1:0] register setting of P0\_R115. By setting DAC\_DSP\_BQ\_CFG[1:0] to 2'b00, the biquad filtering for all playback channels are disabled and the host device can choose this setting if no additional filtering is required for the system application. See the [TAC5x1x and TAC5x1x-Q1 Programmable Biquad Filters - Configuration and Applications application report](#) for further details.

**Table 6-17. Biquad Filter Allocation to the Record Output Channel**

| PROGRAMMABLE BIQUAD FILTER | PLAYBACK OUTPUT CHANNEL ALLOCATION USING P0_R115_D[3:2] REGISTER SETTING |                                                                     |                                                        |
|----------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------|
|                            | DAC_DSP_BQ_CFG[1:0] = 2'b01<br>(1 Biquad per Channel)                    | DAC_DSP_BQ_CFG[1:0] = 2'b10<br>(Default)<br>(2 Biquads per Channel) | DAC_DSP_BQ_CFG[1:0] = 2'b11<br>(3 Biquads per Channel) |
| Biquad filter 1            | Allocated to output channel 1                                            | Allocated to output channel 1                                       | Allocated to output channel 1                          |
| Biquad filter 2            | Allocated to output channel 2                                            | Allocated to output channel 2                                       | Allocated to output channel 2                          |
| Biquad filter 3            | Allocated to output channel 3                                            | Allocated to output channel 3                                       | Allocated to output channel 3                          |
| Biquad filter 4            | Allocated to output channel 4                                            | Allocated to output channel 4                                       | Allocated to output channel 4                          |
| Biquad filter 5            | Not used                                                                 | Allocated to output channel 1                                       | Allocated to output channel 1                          |
| Biquad filter 6            | Not used                                                                 | Allocated to output channel 2                                       | Allocated to output channel 2                          |
| Biquad filter 7            | Not used                                                                 | Allocated to output channel 3                                       | Allocated to output channel 3                          |
| Biquad filter 8            | Not used                                                                 | Allocated to output channel 4                                       | Allocated to output channel 4                          |
| Biquad filter 9            | Not used                                                                 | Not used                                                            | Allocated to output channel 1                          |
| Biquad filter 10           | Not used                                                                 | Not used                                                            | Allocated to output channel 2                          |
| Biquad filter 11           | Not used                                                                 | Not used                                                            | Allocated to output channel 3                          |
| Biquad filter 12           | Not used                                                                 | Not used                                                            | Allocated to output channel 4                          |

[Table 6-18](#) shows the biquad filter coefficients mapping to the register space.

**Table 6-18. Biquad Filter Coefficients Register Mapping**

| PROGRAMMABLE BIQUAD FILTER | BIQUAD FILTER COEFFICIENTS REGISTER MAPPING | PROGRAMMABLE BIQUAD FILTER | BIQUAD FILTER COEFFICIENTS REGISTER MAPPING |
|----------------------------|---------------------------------------------|----------------------------|---------------------------------------------|
| Biquad filter 1            | P16_R8-R27                                  | Biquad filter 7            | P17_R8-R27                                  |
| Biquad filter 2            | P16_R28-R47                                 | Biquad filter 8            | P17_R28-R47                                 |
| Biquad filter 3            | P16_R48-R67                                 | Biquad filter 9            | P17_R48-R67                                 |
| Biquad filter 4            | P16_R68-R87                                 | Biquad filter 10           | P17_R68-R87                                 |
| Biquad filter 5            | P16_R88-R107                                | Biquad filter 11           | P17_R88-R107                                |
| Biquad filter 6            | P16_R108-R127                               | Biquad filter 12           | P17_R108-R127                               |

### 6.3.7.1.5 Configurable Digital Interpolation Filters

The device playback channel includes a high dynamic range, built-in digital interpolation filter to process the input data stream to generate digital data stream for multibit delta-sigma ( $\Delta\Sigma$ ) modulator. The interpolation filter can be chosen from four different types, depending on the required frequency response, group delay, power consumption, and phase linearity requirements for the target application. The selection of the interpolation filter option can be done by configuring the DAC\_DSP\_INTX\_FILT (P0\_R115\_D[7:6]) register bits. Low power filter can be configured by setting DAC\_LOW\_PWR\_FILT (P0\_R79\_D[2]) bit. Table 6-19 shows the configuration register setting for the decimation filter mode selection for the record channel.

**Table 6-19. Interpolation Filter Mode Selection for the Playback Channel**


| P0_R79_D[2] :<br>DAC_LOW_PWR_FILT | P0_R115_D[7:6] :<br>DAC_DSP_INTX_FILT[1:0] | INTERPOLATION FILTER MODE SELECTION                      |
|-----------------------------------|--------------------------------------------|----------------------------------------------------------|
| 0                                 | 00 (default)                               | Linear phase filters are used for the interpolation      |
| 0                                 | 01                                         | Low latency filters are used for the interpolation       |
| 0                                 | 10                                         | Ultra-low latency filters are used for the interpolation |
| 0                                 | 11                                         | Reserved (do not use this setting)                       |
| 1                                 | XX                                         | Low power filters are used for the interpolation         |

#### 6.3.7.1.5.1 Linear-phase filters


The linear-phase interpolation filters are the default filters set by the device and can be used for all applications that require a linear phase with zero-phase deviation within the pass-band specification of the filter. The filter performance specifications and various plots for all supported output sampling rates are listed in this section.

##### 6.3.7.1.5.1.1 Sampling Rate: 8kHz or 7.35kHz

Figure 6-22 and Figure 6-23 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 8kHz or 7.35kHz, and Table 6-20 lists the specifications.

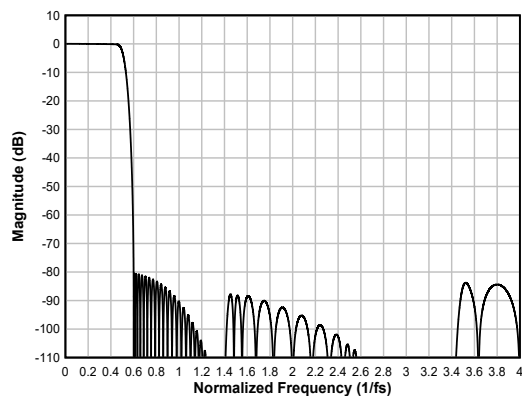

**Figure 6-22. Linear-phase Interpolation Filter Magnitude Response**

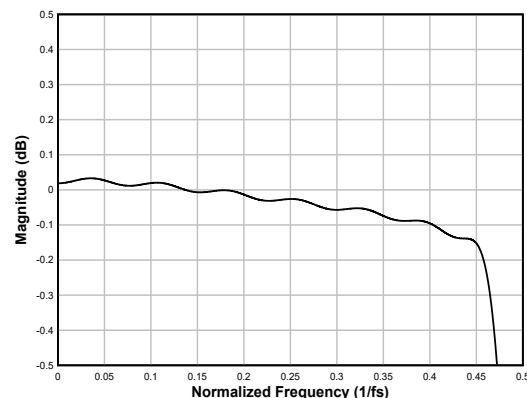


**Figure 6-23. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-20. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|-----|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_s$              | -0.17 |     | 0.03 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$   | 80.4  |     |      | dB      |
|                        | Frequency range is $4 \times f_s$ to $7.431 \times f_s$ | 86.9  |     |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_s$              |       | 16  |      | $1/f_s$ |

#### 6.3.7.1.5.1.2 Sampling Rate: 16kHz or 14.7kHz

Figure 6-24 and Figure 6-25 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 16kHz or 14.7kHz, and Table 6-21 lists the specifications.

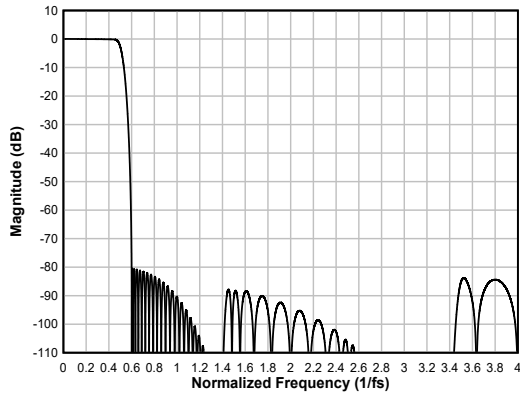

**Figure 6-24. Linear-phase Interpolation Filter Magnitude Response**

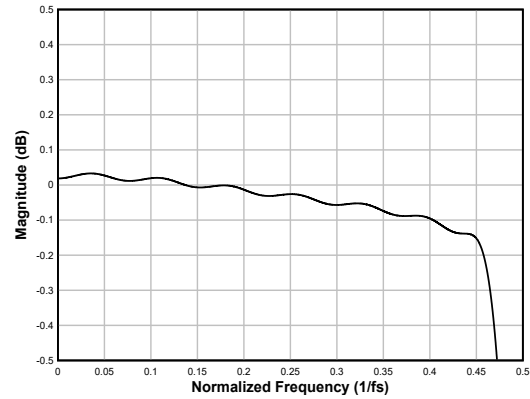


**Figure 6-25. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-21. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|-----|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_s$              | -0.17 |     | 0.03 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$   | 80.4  |     |      | dB      |
|                        | Frequency range is $4 \times f_s$ to $7.431 \times f_s$ | 86.9  |     |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_s$              |       | 16  |      | $1/f_s$ |

#### 6.3.7.1.5.1.3 Sampling Rate: 24kHz or 22.05kHz

Figure 6-26 and Figure 6-27 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 24kHz or 22.05kHz, and Table 6-22 lists the specifications.

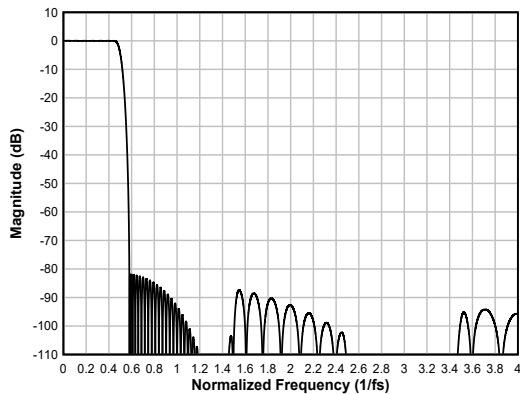

**Figure 6-26. Linear-phase Interpolation Filter Magnitude Response**

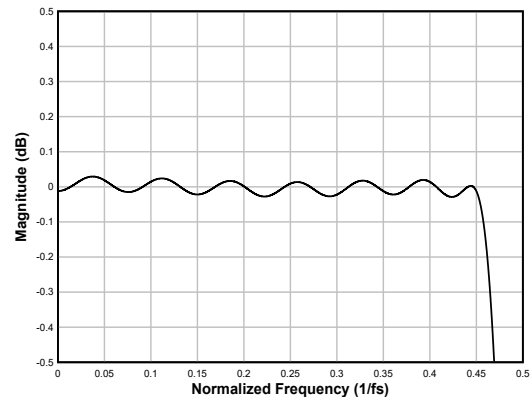

**Figure 6-27. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-22. Linear-phase Interpolation Filter Specifications**



| PARAMETER             | TEST CONDITIONS                                        | MIN   | TYP | MAX  | UNIT |
|-----------------------|--------------------------------------------------------|-------|-----|------|------|
| Pass-band ripple      | Frequency range is 0 to $0.455 \times f_s$             | -0.05 |     | 0.03 | dB   |
| Stop-band attenuation | Frequency range is $0.58 \times f_s$ to $4 \times f_s$ | 81.9  |     |      | dB   |
|                       | Frequency range is $4 \times f_s$ to $8 \times f_s$    | 87.7  |     |      |      |

**Table 6-22. Linear-phase Interpolation Filter Specifications (continued)**

| PARAMETER              | TEST CONDITIONS                            | MIN | TYP  | MAX | UNIT    |
|------------------------|--------------------------------------------|-----|------|-----|---------|
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$ |     | 17.6 |     | $1/f_S$ |

**6.3.7.1.5.1.4 Sampling Rate: 32kHz or 29.4kHz**



Figure 6-28 and Figure 6-29 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 32kHz or 29.4kHz, and Table 6-23 lists the specifications.

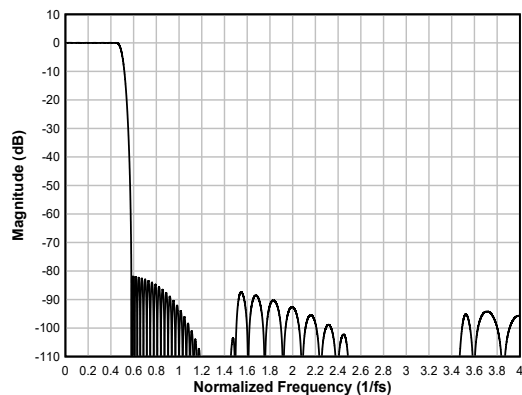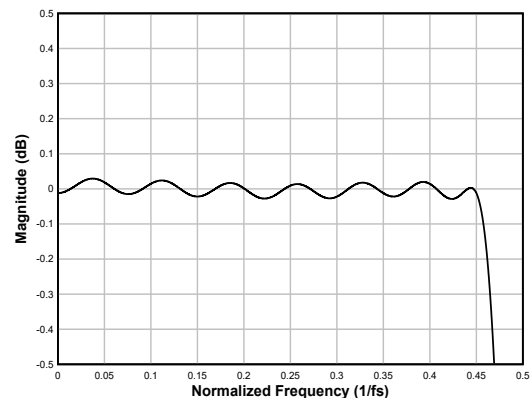**Figure 6-28. Linear-phase Interpolation Filter Magnitude Response****Figure 6-29. Linear-phase Interpolation Filter Pass-Band Ripple****Table 6-23. Linear-phase Interpolation Filter Specifications**

| PARAMETER              | TEST CONDITIONS                                        | MIN   | TYP  | MAX  | UNIT    |
|------------------------|--------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_S$             | -0.05 |      | 0.03 | dB      |
| Stop-band attenuation  | Frequency range is $0.58 \times f_S$ to $4 \times f_S$ | 81.9  |      |      | dB      |
|                        | Frequency range is $4 \times f_S$ to $8 \times f_S$    | 87.6  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$             |       | 17.6 |      | $1/f_S$ |

**6.3.7.1.5.1.5 Sampling Rate: 48kHz or 44.1kHz**

Figure 6-30 and Figure 6-31 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 48kHz or 44.1kHz, and Table 6-24 lists the specifications.

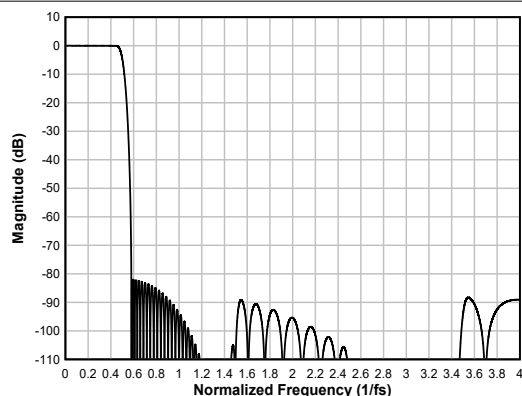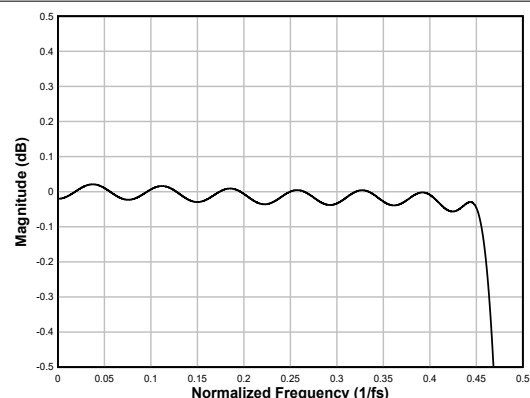**Figure 6-30. Linear-phase Interpolation Filter Magnitude Response****Figure 6-31. Linear-phase Interpolation Filter Pass-Band Ripple**




**Table 6-24. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP  | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_S$              | -0.09 |      | 0.02 | dB      |
| Stop-band attenuation  | Frequency range is $0.58 \times f_S$ to $4 \times f_S$  | 82    |      |      | dB      |
|                        | Frequency range is $4 \times f_S$ to $7.423 \times f_S$ | 89.1  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$              |       | 17.3 |      | $1/f_S$ |

#### 6.3.7.1.5.1.6 Sampling Rate: 96kHz or 88.2kHz

Figure 6-32 and Figure 6-33 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 96kHz or 88.2kHz, and Table 6-25 lists the specifications.

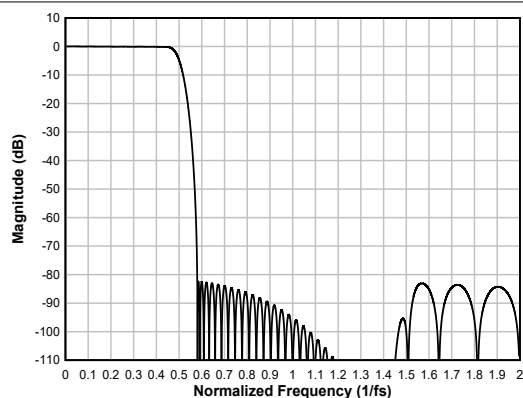

**Figure 6-32. Linear-phase Interpolation Filter Magnitude Response**

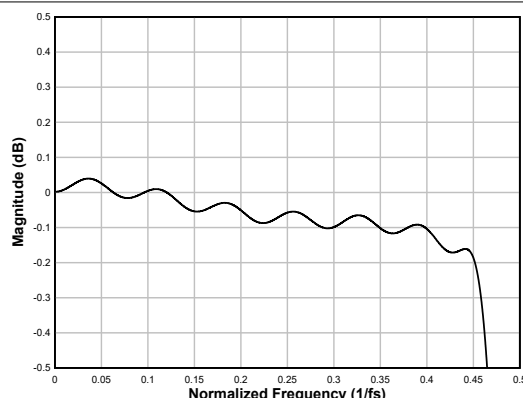


**Figure 6-33. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-25. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP  | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_S$              | -0.23 |      | 0.04 | dB      |
| Stop-band attenuation  | Frequency range is $0.58 \times f_S$ to $2 \times f_S$  | 82.4  |      |      | dB      |
|                        | Frequency range is $2 \times f_S$ to $3.422 \times f_S$ | 85.1  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$              |       | 16.7 |      | $1/f_S$ |

#### 6.3.7.1.5.1.7 Sampling Rate: 192kHz or 176.4kHz

Figure 6-34 and Figure 6-35 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 192kHz or 176.4kHz, and Table 6-26 lists the specifications.

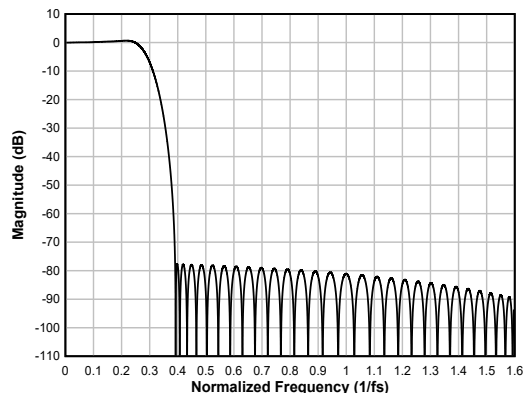

**Figure 6-34. Linear-phase Interpolation Filter Magnitude Response**

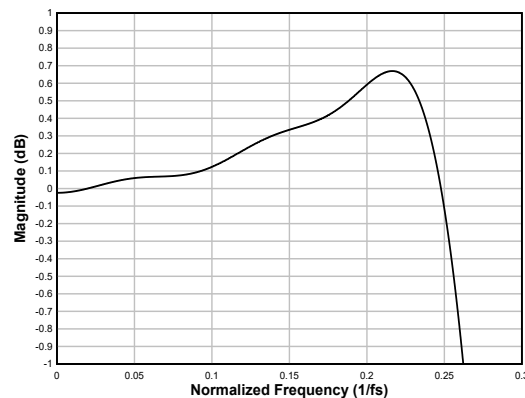


**Figure 6-35. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-26. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP  | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.258 \times f_s$              | -0.67 |      | 0.67 | dB      |
| Stop-band attenuation  | Frequency range is $0.391 \times f_s$ to $1 \times f_s$ | 77.7  |      |      | dB      |
|                        | Frequency range is $1 \times f_s$ to $1.612 \times f_s$ | 81.1  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.258 \times f_s$              |       | 10.7 |      | $1/f_s$ |

#### 6.3.7.1.5.1.8 Sampling Rate: 384kHz or 352.8kHz

Figure 6-36 and Figure 6-37 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 384kHz or 352.8kHz, and Table 6-27 lists the specifications.

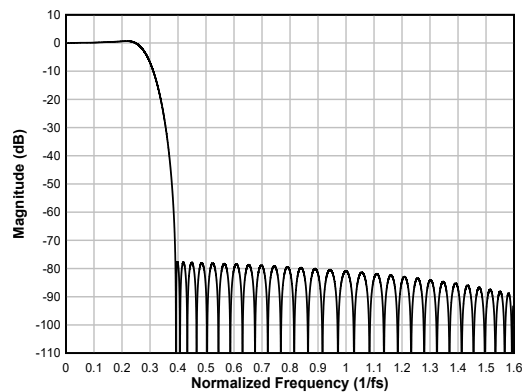

**Figure 6-36. Linear-phase Interpolation Filter Magnitude Response**

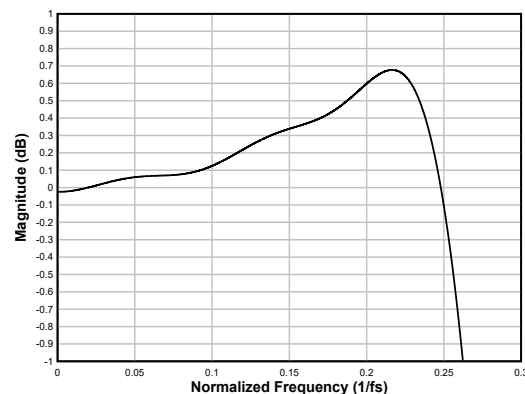


**Figure 6-37. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-27. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP  | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.258 \times f_s$              | -0.67 |      | 0.67 | dB      |
| Stop-band attenuation  | Frequency range is $0.391 \times f_s$ to $1 \times f_s$ | 77.7  |      |      | dB      |
|                        | Frequency range is $1 \times f_s$ to $1.612 \times f_s$ | 81.1  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.258 \times f_s$              |       | 10.7 |      | $1/f_s$ |

#### 6.3.7.1.5.1.9 Sampling Rate 768kHz or 705.6kHz

Figure 6-38 and Figure 6-39 respectively show the magnitude response and the pass-band ripple for this interpolation filter with a sampling rate of 768kHz or 705.6kHz, and Table 6-28 lists the specifications.

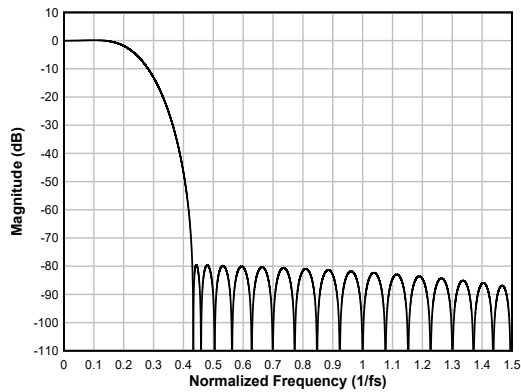

**Figure 6-38. Linear-phase Interpolation Filter Magnitude Response**

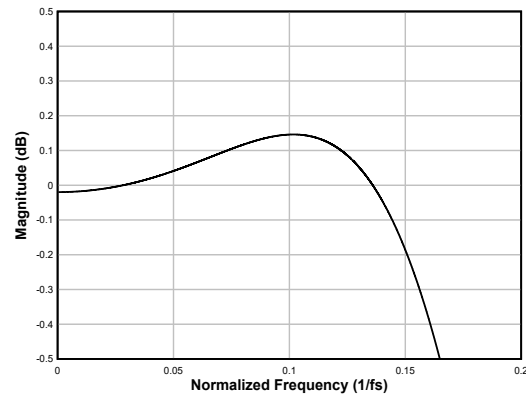

**Figure 6-39. Linear-phase Interpolation Filter Pass-Band Ripple**

**Table 6-28. Linear-phase Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                        | MIN   | TYP | MAX  | UNIT    |
|------------------------|--------------------------------------------------------|-------|-----|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.153 \times f_s$             | -0.15 |     | 0.15 | dB      |
| Stop-band attenuation  | Frequency range is $0.43 \times f_s$ to $1 \times f_s$ | 79.1  |     |      | dB      |
|                        | Frequency range is $1 \times f_s$ onwards              | 82.2  |     |      |         |
| Group delay or latency | Frequency range is 0 to $0.113 \times f_s$             |       | 5.9 |      | $1/f_s$ |

### 6.3.7.1.5.2 Low-latency Filters


For applications where low latency with minimal phase deviation (within the audio band) is critical, the low-latency interpolation filters on the TAD5112-Q1 can be used. The device supports these filters with a group delay of approximately seven samples with an almost linear phase response within the  $0.376 \times f_s$  frequency band. This section provides the filter performance specifications and various plots for all supported output sampling rates for the low-latency filters.

#### 6.3.7.1.5.2.1 Sampling Rate: 24kHz or 22.05kHz

Figure 6-40 shows the magnitude response and Figure 6-41 shows the pass-band ripple and phase deviation for this interpolation filter with a sampling rate of 24kHz or 22.05kHz. Table 6-29 lists the specifications.

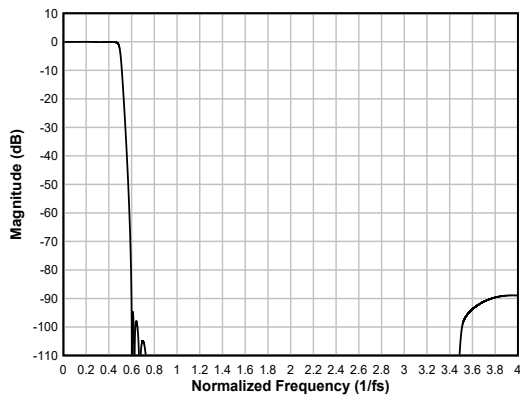

**Figure 6-40. Low-latency Interpolation Filter Magnitude Response**

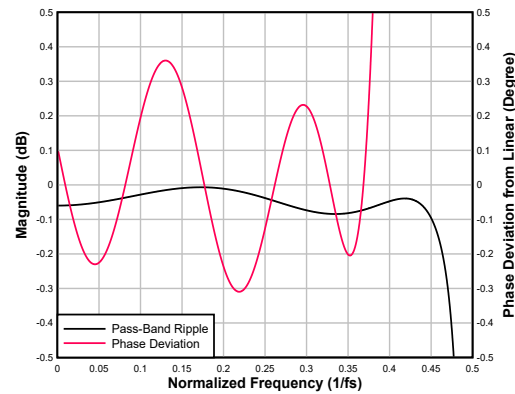


**Figure 6-41. Low-latency Interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-29. Low-latency Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN    | TYP  | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|--------|------|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_s$              | -0.12  |      | -0.01 | dB      |
| Stop-band attenuation  | Frequency range is $0.599 \times f_s$ to $4 \times f_s$ | 88.9   |      |       | dB      |
|                        | Frequency range is $4 \times f_s$ to $7.414 \times f_s$ | 89     |      |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$              |        | 7.19 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$              | -0.088 |      | 0.088 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_s$              | -0.31  |      | 0.36  | Degrees |

#### 6.3.7.1.5.2.2 Sampling Rate: 32kHz or 29.4kHz

Figure 6-42 shows the magnitude response and Figure 6-43 shows the pass-band ripple and phase deviation for this interpolation filter with a sampling rate of 32kHz or 29.4kHz. Table 6-30 lists the specifications.

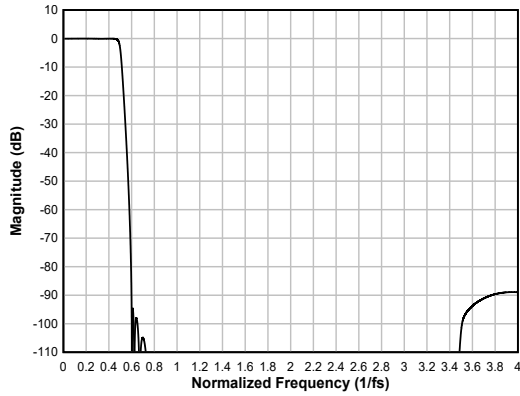

**Figure 6-42. Low-latency Interpolation Filter Magnitude Response**

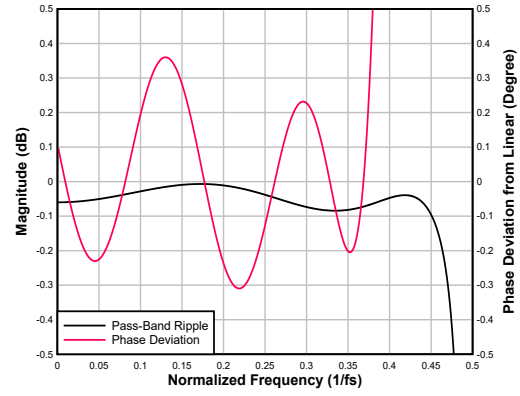


**Figure 6-43. Low-latency Interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-30. Low-latency Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN    | TYP  | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|--------|------|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_s$              | -0.12  |      | -0.01 | dB      |
| Stop-band attenuation  | Frequency range is $0.599 \times f_s$ to $4 \times f_s$ | 88.9   |      |       | dB      |
|                        | Frequency range is $4 \times f_s$ to $7.414 \times f_s$ | 89     |      |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$              |        | 7.19 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$              | -0.088 |      | 0.088 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_s$              | -0.31  |      | 0.36  | Degrees |

#### 6.3.7.1.5.2.3 Sampling Rate: 48kHz or 44.1kHz

Figure 6-44 shows the magnitude response and Figure 6-45 shows the pass-band ripple and phase deviation for this interpolation filter with a sampling rate of 48kHz or 44.1kHz. Table 6-31 lists the specifications.

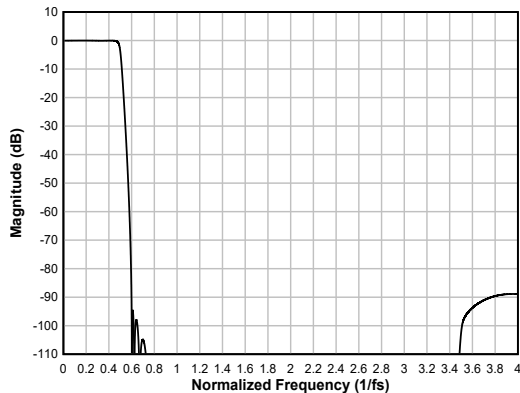

**Figure 6-44. Low-latency Interpolation Filter Magnitude Response**

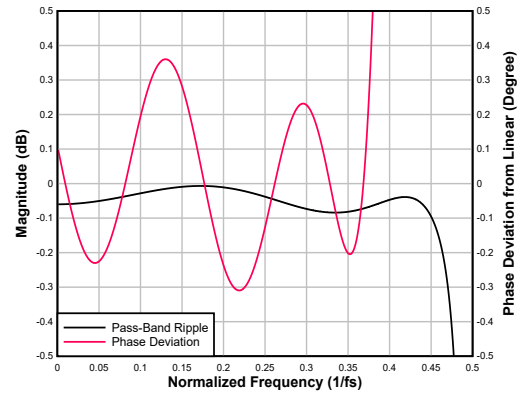

**Figure 6-45. Low-latency Interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-31. Low-latency Interpolation Filter Specifications**



| PARAMETER              | TEST CONDITIONS                                         | MIN    | TYP  | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|--------|------|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_s$              | -0.12  |      | -0.01 | dB      |
| Stop-band attenuation  | Frequency range is $0.599 \times f_s$ to $4 \times f_s$ | 88.9   |      |       | dB      |
|                        | Frequency range is $4 \times f_s$ to $7.414 \times f_s$ | 89     |      |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$              |        | 7.19 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$              | -0.088 |      | 0.088 | $1/f_s$ |

**Table 6-31. Low-latency Interpolation Filter Specifications (continued)**

| PARAMETER       | TEST CONDITIONS                            | MIN   | TYP | MAX  | UNIT    |
|-----------------|--------------------------------------------|-------|-----|------|---------|
| Phase deviation | Frequency range is 0 to $0.376 \times f_s$ | -0.31 |     | 0.36 | Degrees |

**6.3.7.1.5.2.4 Sampling Rate: 96kHz or 88.2kHz**



Figure 6-46 shows the magnitude response and Figure 6-47 shows the pass-band ripple and phase deviation for this interpolation filter with a sampling rate of 96kHz or 88.2kHz. Table 6-32 lists the specifications.

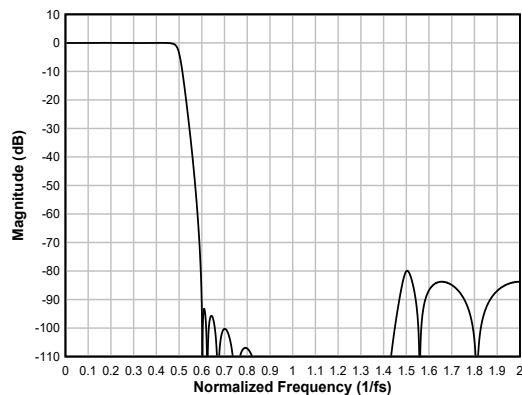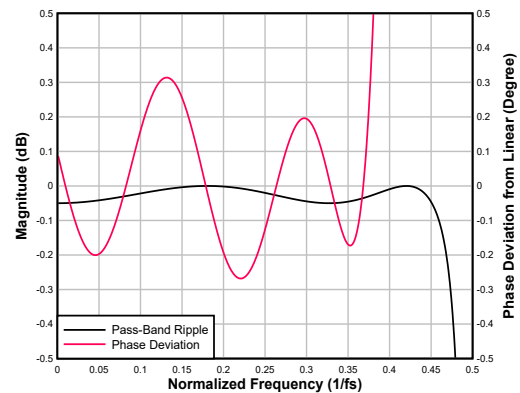**Figure 6-46. Low-latency Interpolation Filter Magnitude Response****Figure 6-47. Low-latency Interpolation Filter Pass-Band Ripple and Phase Deviation****Table 6-32. Low-latency Interpolation Filter Specifications**

| PARAMETER              | TEST CONDITIONS                                         | MIN    | TYP  | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|--------|------|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_s$              | -0.07  |      | 0     | dB      |
| Stop-band attenuation  | Frequency range is $0.595 \times f_s$ to $2 \times f_s$ | 79.9   |      |       | dB      |
|                        | Frequency range is $2 \times f_s$ to $3.405 \times f_s$ | 79.9   |      |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$              |        | 6.39 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$              | -0.078 |      | 0.022 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_s$              | -0.268 |      | 0.022 | Degrees |

**6.3.7.1.5.2.5 Sampling Rate: 192kHz or 176.4kHz**

Figure 6-48 shows the magnitude response and Figure 6-49 shows the pass-band ripple and phase deviation for this interpolation filter with a sampling rate of 192kHz or 176.4kHz. Table 6-33 lists the specifications.

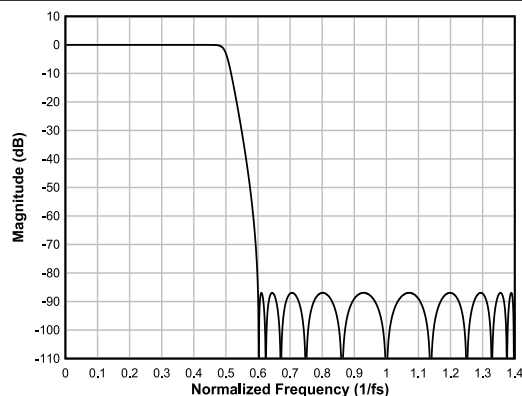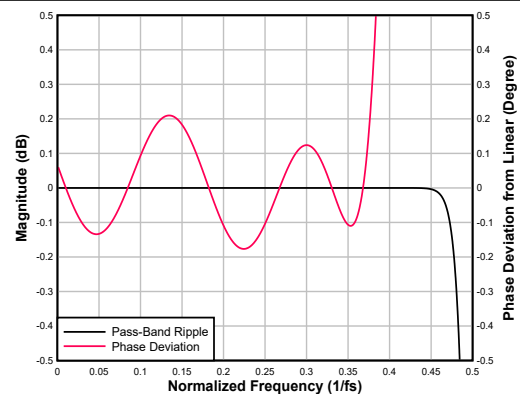**Figure 6-48. Low-latency Interpolation Filter Magnitude Response****Figure 6-49. Low-latency Interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-33. Low-latency Interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN    | TYP  | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|--------|------|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.452 \times f_s$              | -0.005 |      | 0     | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $1 \times f_s$   | 86.9   |      |       | dB      |
|                        | Frequency range is $1 \times f_s$ to $1.401 \times f_s$ | 86.9   |      |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$              |        | 5.41 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$              | -0.055 |      | 0.055 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_s$              | -0.177 |      | 0.21  | Degrees |

#### 6.3.7.1.5.3 Ultra-Low-Latency Filters


For applications where ultra-low latency (within the audio band) is critical, the ultra-low-latency interpolation filters on the TAD5112-Q1 can be used. The device supports these filters with a group delay of approximately four samples with an almost linear phase response within the  $0.325 \times f_s$  frequency band. This section provides the filter performance specifications and various plots for all supported output sampling rates for the ultra-low-latency filters.

### 6.3.7.1.5.3.1 Sampling Rate: 24kHz or 22.05kHz

Figure 6-50 shows the magnitude response and Figure 6-51 shows the pass-band ripple and phase deviation for a interpolation filter with a sampling rate of 24kHz or 22.05kHz. Table 6-34 lists the specifications.

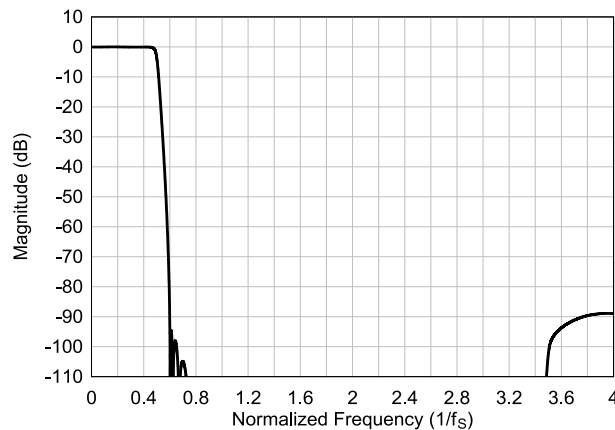

**Figure 6-50. Ultra-Low-Latency interpolation Filter Magnitude Response**

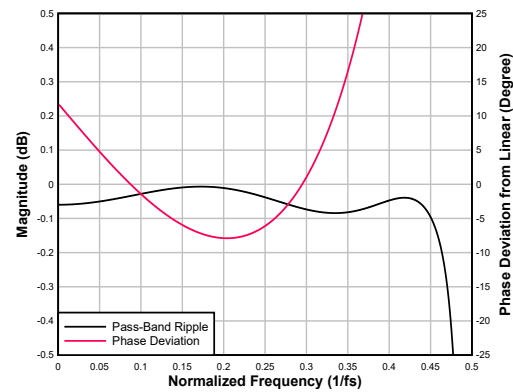


**Figure 6-51. Ultra-Low-Latency interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-34. Ultra-Low-Latency interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                        | MIN    | TYP | MAX   | UNIT    |
|------------------------|--------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.42 \times f_s$              | -0.005 |     | 0.01  | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$  | 88.9   |     |       | dB      |
|                        | Frequency range is $4 \times f_s$ to $7.41 \times f_s$ | 88.9   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_s$             |        | 3.2 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_s$             | -0.888 |     | 0.363 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_s$             | -7.9   |     | 11.7  | Degrees |

### 6.3.7.1.5.3.2 Sampling Rate: 32kHz or 29.4kHz

Figure 6-52 shows the magnitude response and Figure 6-53 shows the pass-band ripple and phase deviation for a interpolation filter with a sampling rate of 32kHz or 29.4kHz. Table 6-35 lists the specifications.

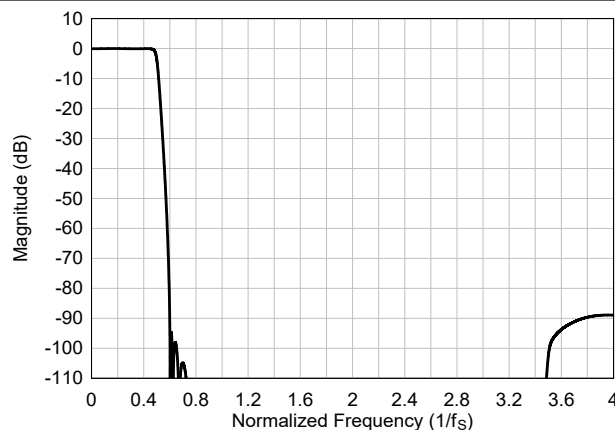

**Figure 6-52. Ultra-Low-Latency interpolation Filter Magnitude Response**

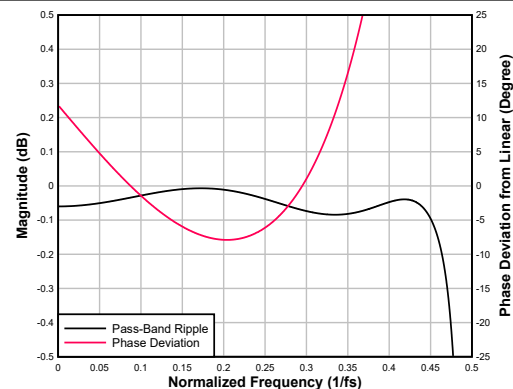

**Figure 6-53. Ultra-Low-Latency interpolation Filter Pass-Band Ripple and Phase Deviation**




**Table 6-35. Ultra-Low-Latency interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                        | MIN    | TYP | MAX   | UNIT    |
|------------------------|--------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.42 \times f_S$              | -0.005 |     | 0.01  | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $4 \times f_S$  | 88.9   |     |       | dB      |
|                        | Frequency range is $4 \times f_S$ to $7.41 \times f_S$ | 88.9   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_S$             |        | 3.2 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_S$             | -0.888 |     | 0.363 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_S$             | -7.9   |     | 11.7  | Degrees |

#### 6.3.7.1.5.3.3 Sampling Rate: 48kHz or 44.1kHz

Figure 6-54 shows the magnitude response and Figure 6-55 shows the pass-band ripple and phase deviation for a interpolation filter with a sampling rate of 48kHz or 44.1kHz. Table 6-36 lists the specifications.

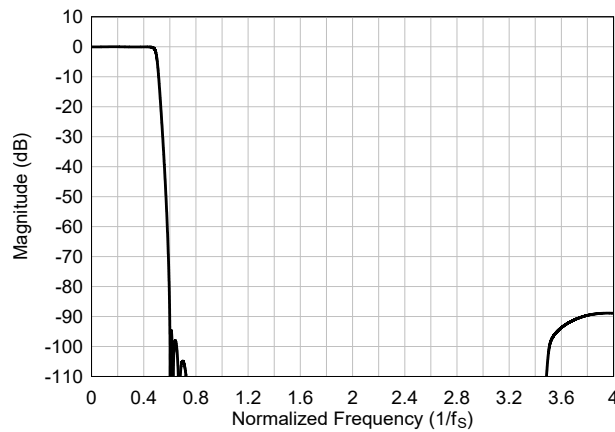

**Figure 6-54. Ultra-Low-Latency interpolation Filter Magnitude Response**

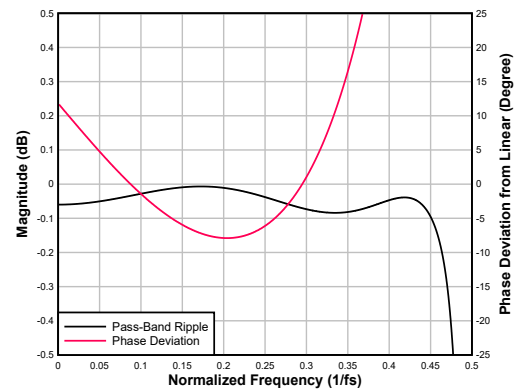


**Figure 6-55. Ultra-Low-Latency interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-36. Ultra-Low-Latency interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                        | MIN    | TYP | MAX   | UNIT    |
|------------------------|--------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.42 \times f_S$              | -0.005 |     | 0.01  | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $4 \times f_S$  | 88.9   |     |       | dB      |
|                        | Frequency range is $4 \times f_S$ to $7.41 \times f_S$ | 88.9   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_S$             |        | 3.2 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_S$             | -0.888 |     | 0.363 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_S$             | -7.9   |     | 11.7  | Degrees |

#### 6.3.7.1.5.3.4 Sampling Rate: 96kHz or 88.2kHz

Figure 6-56 shows the magnitude response and Figure 6-57 shows the pass-band ripple and phase deviation for a interpolation filter with a sampling rate of 96kHz or 88.2kHz. Table 6-37 lists the specifications.

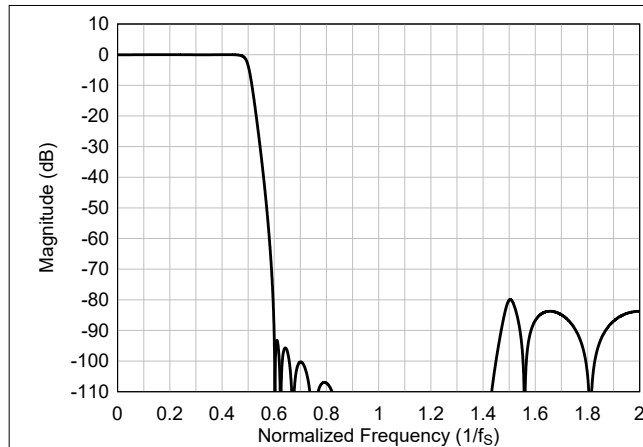

**Figure 6-56. Ultra-Low-Latency interpolation Filter Magnitude Response**

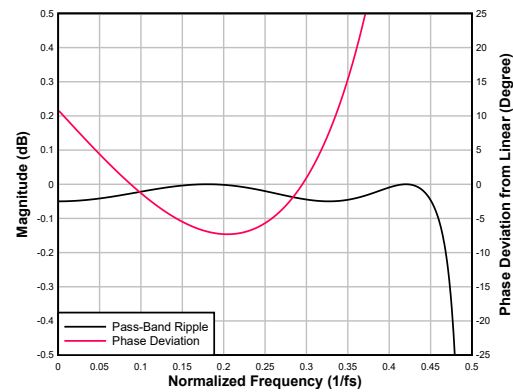


**Figure 6-57. Ultra-Low-Latency interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-37. Ultra-Low-Latency interpolation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.45 \times f_s$             | -0.05  |     | 0.001 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $2 \times f_s$ | 80.6   |     |       | dB      |
|                        | Frequency range is $2 \times f_s$ to $3.4 \times f_s$ | 80.6   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_s$            |        | 2.5 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_s$            | -0.826 |     | 0.333 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_s$            | -0.86  |     | 1.30  | Degrees |

#### 6.3.7.1.5.3.5 Sampling Rate 192kHz or 176.4kHz

Figure 6-58 shows the magnitude response and Figure 6-59 shows the pass-band ripple and phase deviation for a interpolation filter with a sampling rate of 192kHz or 176.4kHz. Table 6-38 lists the specifications.

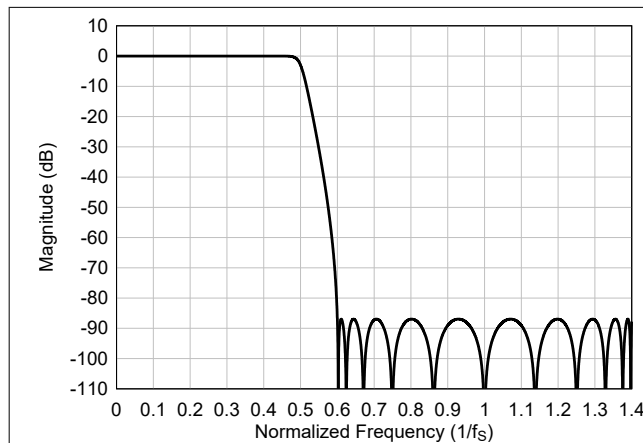

**Figure 6-58. Ultra-Low-Latency interpolation Filter Magnitude Response**

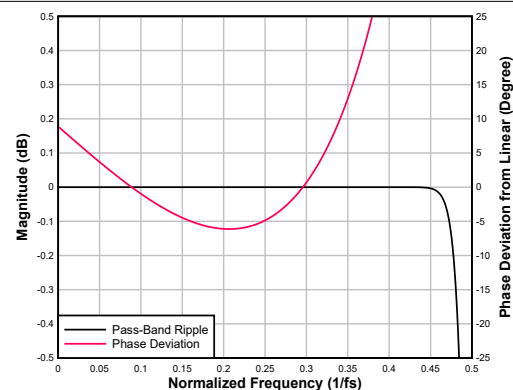

**Figure 6-59. Ultra-Low-Latency interpolation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-38. Ultra-Low-Latency Interpolation Filter Specifications 192**

| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.463 \times f_S$            | –0.001 |     | 0.001 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $1 \times f_S$ | 86.9   |     |       | dB      |
|                        | Frequency range is $1 \times f_S$ to $1.4 \times f_S$ | 86.9   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_S$            |        | 1.7 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_S$            | –0.702 |     | 0.268 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_S$            | –0.12  |     | 0.18  | Degrees |

#### 6.3.7.1.6 Programmable Digital Mixer

The device supports a fully programmable mixer feature that can mix the various input channels with the custom programmable scale factor to generate the final output channels. The 8x4 Mixer is for the 8 Main ASI inputs and 4 outputs. The 2x4 Mixer is for the 2 AUX ASI inputs and 4 outputs. The 4 outputs are RDAC, RDAC2, LDAC and LDAC2.

Tables below shows the coefficients for the programmable 8x4 Mixer and the programmable 2x4 Mixer.

**Table 6-39. Programmable 8x4 Mixer**

| Register Name           | DAC Register co-efficient Mapping | Reset Value |
|-------------------------|-----------------------------------|-------------|
| ASI_CH1_RDAC_MIX(15:0)  | B0_P17(R8-R9)                     | 0x0000      |
| ASI_CH1_LDAC_MIX(15:0)  | B0_P17(R10-R11)                   | 0x4000      |
| ASI_CH1_RDAC2_MIX(15:0) | B0_P17(R12-R13)                   | 0x0000      |
| ASI_CH1_LDAC2_MIX(15:0) | B0_P17(R14-R15)                   | 0x0000      |

Similarly the programmable mixer setting for main input channel can be done using ASI\_CH2\_(RDAC/LDAC/ RDAC2/LDAC2) to ASI\_CH8\_(RDAC/LDAC/RDAC2/LDAC2) register bits.

**Table 6-40. Programmable 2x4 Mixer**


| Register Name               | DAC Register co-efficient Mapping | Reset Value |
|-----------------------------|-----------------------------------|-------------|
| ASI_AUX_CH1_RDAC_MIX(15:0)  | B0_P17(R72-R73)                   | 0x0000      |
| ASI_AUX_CH1_LDAC_MIX(15:0)  | B0_P17(R74-R75)                   | 0x4000      |
| ASI_AUX_CH1_RDAC2_MIX(15:0) | B0_P17(R76-R77)                   | 0x0000      |
| ASI_AUX_CH1_LDAC2_MIX(15:0) | B0_P17(R78-R79)                   | 0x4000      |

Similarly the programmable mixer setting for input channel can be done using the ASI\_AUX\_CH2\_(RDAC/ LDAC/RDAC2/LDAC2) and ASI\_AUX\_CH2\_(RDAC/LDAC/RDAC2/LDAC2) register bits.

TI recommends using the PPC3 GUI for configuring the programmable coefficients settings; for more details see the [Using the TAx5x1x Programmable Digital Channel Mixer application report](#) and the [PurePath™ console graphical development suite](#).

### 6.3.7.2 PDM Recording Signal-Chain

The figure below shows the key components of the PDM record path signal chain.

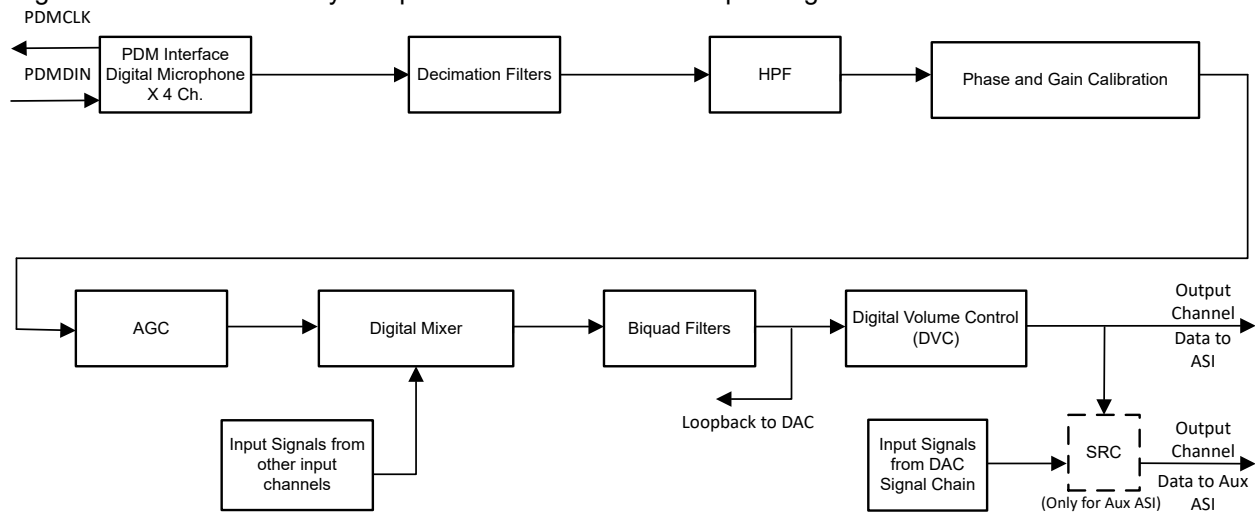

**Figure 6-60. PDM Recording Signal-Chain Processing Flowchart**

The device supports up to four digital PDM microphone recording channels. The architecture has an integrated, high-performance multistage digital decimation filter sharply cuts off any out-of-band frequency noise with high stop-band attenuation.

The device also has an integrated programmable biquad filter that allows for custom low-pass, high-pass, or any other desired frequency shaping. The signal chain also consists of various highly programmable digital processing blocks such as phase calibration, gain calibration, high-pass filter, digital summer or mixer, biquad filters, synchronous sample rate converter, and volume control. The details of these processing blocks are discussed further in this section.

The desired input channels for recording can be enabled or disabled by using the CH\_EN (P0\_R118) register, and the output channels for the audio serial interface can be enabled or disabled by using the ASI\_TX\_CHx\_CFG registers. In general, the device supports simultaneous power-up and power-down of all active channels for simultaneous recording. However, based on the application's needs, if some channels must be powered up or powered down dynamically when the other channel recording is on, then that use case is supported by setting the DYN\_PUPD\_CFG (P0\_R119) register.

For sample rates of 48kHz or lower, the device supports all features and various programmable processing blocks. However, for sample rates higher than 48kHz, there are limitations in the number of simultaneous channel recordings and playback supported and the number of biquad filters and such. See the [TAC5212 Sampling Rates and Programmable Processing Blocks Supported application report](#) for further details.

#### 6.3.7.2.1 Programmable Channel Gain and Digital Volume Control

The device has a programmable digital volume control with a range from –80dB to 47dB in steps of 0.5dB with the option to mute the channel recording. The digital volume control value can be changed dynamically while the record channel is powered up and recorded. During volume control changes, the soft ramp-up or ramp-down volume feature is used internally to avoid any audible artifacts. Soft-stepping can be entirely disabled using the ADC\_DSP\_DISABLE\_SOFT\_STEP (P0\_R114\_D[1]) register bit.

The digital volume control setting is independently available for each digital microphone record channel. However, the device also supports an option to gang up the volume control setting for all channels together using the channel 1 digital volume control setting, regardless if channel 1 is powered up or powered down. This gang-up can be enabled using the ADC\_DSP\_DVOL\_GANG (P0\_R114\_D[0]) register bit.

The table below shows the programmable options available for the digital volume control.

**Table 6-41. Digital Volume Control (DVC) Programmable Settings**

| P0_R82_D[7:0] : ADC_CH1_DVOL[7:0] | DVC SETTING FOR OUTPUT CHANNEL 1       |
|-----------------------------------|----------------------------------------|
| 0000 0000 = 0d                    | Output channel 1 DVC is set to mute    |
| 0000 0001 = 1d                    | Output channel 1 DVC is set to –80dB   |
| 0000 0010 = 2d                    | Output channel 1 DVC is set to –79.5dB |
| 0000 0011 = 3d                    | Output channel 1 DVC is set to –79dB   |
| ...                               | ...                                    |
| 1010 0000 = 160d                  | Output channel 1 DVC is set to –0.5dB  |
| 1010 0001 = 161d (default)        | Output channel 1 DVC is set to 0dB     |
| 1010 0010 = 162d                  | Output channel 1 DVC is set to 0.5dB   |
| ...                               | ...                                    |
| 1111 1101 = 253d                  | Output channel 1 DVC is set to 46dB    |
| 1111 1110 = 254d                  | Output channel 1 DVC is set to 46.5dB  |
| 1111 1111 = 255d                  | Output channel 1 DVC is set to 47dB    |

Similarly, the digital volume control setting for output channel 2 to channel 4 can be configured using the CH2\_DVOL (P0\_R87) to CH4\_DVOL (P0\_R95) register bits, respectively.

The internal digital processing engine soft ramps up the volume from a muted level to the programmed volume level when the channel is powered up, and the internal digital processing engine soft ramps down the volume from a programmed volume to mute when the channel is powered down. This soft-stepping of volume is done to prevent abruptly powering up and powering down the record channel. This feature can also be entirely disabled using the ADC\_DSP\_DISABLE\_SOFT\_STEP (P0\_R114\_D[1]) register bit.

The programmable channel digital volume control feature is not applicable if the PLL is turned off. For setting channel attenuation, user can configure this by using the programmable high pass filter coefficients as described in programmable coefficient registers in B0\_P11.

#### 6.3.7.2.2 Programmable Channel Gain Calibration

Along with the digital volume control, this device also provides programmable channel gain calibration. The gain of each channel can be finely calibrated or adjusted in steps of 0.1dB for a range of –0.8dB to 0.7dB gain error. This adjustment is useful when trying to match the gain across channels resulting from external components and microphone sensitivity. This feature, in combination with the regular digital volume control, allows the gains across all channels to be matched for a wide gain error range with a resolution of 0.1dB. Table 6-42 shows the programmable options available for the channel gain calibration.

**Table 6-42. Channel Gain Calibration Programmable Settings**

| P0_R83_D[7:4] : ADC_CH1_FGAIN[3:0] | CHANNEL GAIN CALIBRATION SETTING FOR INPUT CHANNEL 1 |
|------------------------------------|------------------------------------------------------|
| 0000 = 0d                          | Input channel 1 gain calibration is set to –0.8dB    |
| 0001 = 1d                          | Input channel 1 gain calibration is set to –0.7dB    |
| ...                                | ...                                                  |
| 1000 = 8d (default)                | Input channel 1 gain calibration is set to 0dB       |
| ...                                | ...                                                  |
| 1110 = 14d                         | Input channel 1 gain calibration is set to 0.6dB     |
| 1111 = 15d                         | Input channel 1 gain calibration is set to 0.7dB     |

Similarly, the channel gain calibration setting for input channel 2 to channel 4 can be configured using the ADC\_CH2\_CFG3 (P0\_R88) to ADC\_CH4\_CFG3 (P0\_R96) register bits, respectively.

#### 6.3.7.2.3 Programmable Channel Phase Calibration

In addition to the gain calibration, the phase delay in each record channel can be finely calibrated or adjusted in steps of one modulator clock cycle for a cycle range of 1 to 63 for the phase error. The modulator clock for

the digital microphones is the clock set by PDM\_CLK, and is 3.072MHz (the output data sample rate is multiples or submultiples of 48kHz) or 2.8224MHz (the output data sample rate is multiples or submultiples of 44.1kHz) in default configurations. User can configure the PDM\_CLK using the PDM\_CLK\_CFG[1:0] (P0\_R53\_D[7:6]) register bits. The programmable channel phase calibration feature is very useful for many applications that must match the phase with fine resolution between each channel, including any phase mismatch across channels resulting from external components or microphones. [Table 6-43](#) shows the available programmable options for channel phase calibration when operating with default modulator clocks.

**Table 6-43. Channel Phase Calibration Programmable Settings**

| P0_R84_D[7:2] : ADC_CH1_PCAL[5:0] | CHANNEL PHASE CALIBRATION SETTINGS FOR INPUT CHANNEL 1             |
|-----------------------------------|--------------------------------------------------------------------|
| 00 0000 = 0d (default)            | No phase calibration                                               |
| 00 0001 = 1d                      | Phase calibration delay is set to one cycle of the modulator clock |
| ...                               | ...                                                                |
| 11 1111 = 63d                     | Phase calibration delay is set to 63 cycles of the modulator clock |


Similarly, the channel phase calibration setting for input channel 2 to channel 4 can be configured using the ADC\_CH2\_PCAL (P0\_R89\_D[7:2]) to ADC\_CH4\_PCAL (P0\_R97\_D[7:2]) register bits, respectively.

#### 6.3.7.2.4 Programmable Digital High-Pass Filter

To remove the DC offset component and attenuate the undesired low-frequency noise content in the record data, the device supports a programmable high-pass filter (HPF). The HPF is not a channel-independent filter setting but is globally applicable for all record channels. This HPF is constructed using the first-order infinite impulse response (IIR) filter and is efficient enough to filter out possible DC components of the signal. [Table 6-44](#) shows the predefined –3dB cutoff frequencies available that can be set by using the ADC\_DSP\_HPF\_SEL[1:0] register bits of P0\_R114\_D[5:4]. Additionally, to achieve a custom –3dB cutoff frequency for a specific application, the device also allows the first-order IIR filter coefficients to be programmed when the HPF\_SEL[1:0] register bits are set to 2'b00. [Figure 6-61](#) illustrates the frequency response plot for the HPF filter.

**Table 6-44. HPF Programmable Settings**

| P0_R114_D[5:4] :<br>ADC_DSP_HPF_SEL[1:0] | -3dB CUTOFF FREQUENCY<br>SETTING  | -3dB CUTOFF FREQUENCY AT<br>16kHz SAMPLE RATE | -3dB CUTOFF FREQUENCY AT<br>48kHz SAMPLE RATE |
|------------------------------------------|-----------------------------------|-----------------------------------------------|-----------------------------------------------|
| 00                                       | Programmable 1st-order IIR filter | Programmable 1st-order IIR filter             | Programmable 1st-order IIR filter             |
| 01 (default)                             | $0.00002 \times f_s$              | 0.25Hz                                        | 1Hz                                           |
| 10                                       | $0.00025 \times f_s$              | 4Hz                                           | 12Hz                                          |
| 11                                       | $0.002 \times f_s$                | 32Hz                                          | 96Hz                                          |

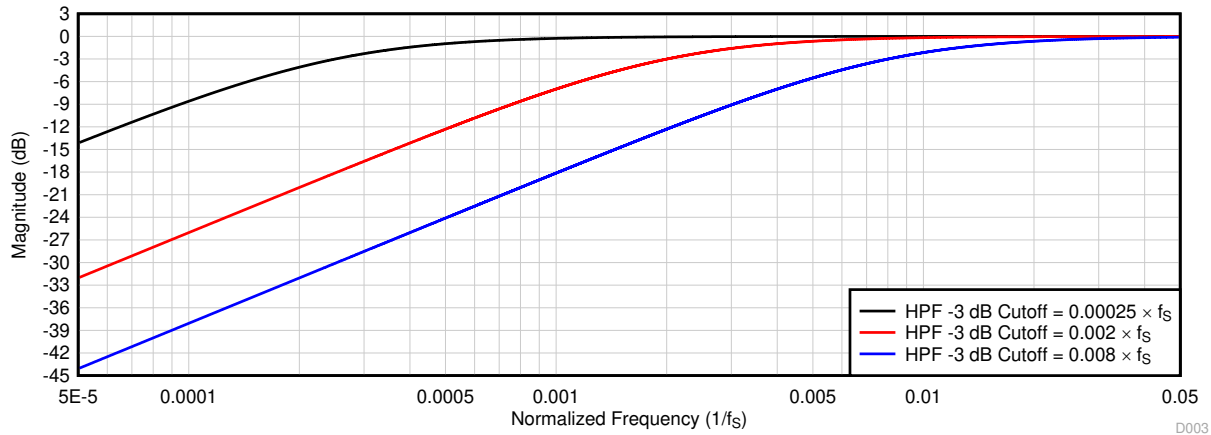

**Figure 6-61. HPF Filter Frequency Response Plot**

D003

Equation 3 gives the transfer function for the first-order programmable IIR filter:

$$H(z) = \frac{N_0 + N_1 z^{-1}}{2^{31} - D_1 z^{-1}} \quad (3)$$

The frequency response for this first-order programmable IIR filter with default coefficients is flat at a gain of 0 dB (all-pass filter). The host device can override the frequency response by programming the IIR coefficients in Table 6-45 to achieve the desired frequency response for high-pass filtering or any other desired filtering. If ADC\_DSP\_HPF\_SEL[1:0] is set to 2'b00, the host device must write these coefficient values for the desired frequency response before powering-up any record channel for recording. Table 6-45 shows the filter coefficients for the first-order IIR filter.

**Table 6-45. 1st-Order IIR Filter Coefficients**

| FILTER                                                                                  | FILTER COEFFICIENT | DEFAULT COEFFICIENT VALUE | COEFFICIENT REGISTER MAPPING |
|-----------------------------------------------------------------------------------------|--------------------|---------------------------|------------------------------|
| Programmable 1st-order IIR filter (can be allocated to HPF or any other desired filter) | N <sub>0</sub>     | 0x7FFFFFFF                | P10_R120-R123                |
|                                                                                         | N <sub>1</sub>     | 0x00000000                | P10_R124-R127                |
|                                                                                         | D <sub>1</sub>     | 0x00000000                | P11_R8-R11                   |

#### 6.3.7.2.5 Programmable Digital Biquad Filters

The device supports up to 12 programmable digital biquad filters available for record signal chain limited to 3/channel. These highly efficient filters achieve the desired frequency response. The TAD5112-Q1 also supports on-the-fly programmable Biquad filters for two-channel record use cases. In digital signal processing, a digital biquad filter is a second-order, recursive linear filter with two poles and two zeros. Equation 4 gives the transfer function of each biquad filter:

$$H(z) = \frac{N_0 + 2N_1 z^{-1} + N_2 z^{-2}}{2^{31} - 2D_1 z^{-1} - D_2 z^{-2}} \quad (4)$$

The frequency response for the biquad filter section with default coefficients is flat at a gain of 0dB (all-pass filter). The host device can override the frequency response by programming the biquad coefficients to achieve the desired frequency response for low-pass, high-pass, or any other desired frequency shaping. The programmable coefficients for the biquads are located in the B0\_P8 and B0\_P9. If biquad filtering is required, then the host device must write these coefficient values before powering up any record channels for recording. In two-channel use case, the TAD5112-Q1 also supports on-the-fly programmable filters. In this case, the device uses two banks of filters for one channel with a switch bit to perform the switch from one filter bank to the

other. As described in [Table 6-46](#), these biquad filters can be allocated for each output channel based on the ADC\_DSP\_BQ\_CFG[1:0] register setting of P0\_R114\_D[3:2]. By setting ADC\_DSP\_BQ\_CFG[1:0] to 2'b00, the biquad filtering for all record channels is disabled and the host device can choose this setting if no additional filtering is required for the system application. See the [TAC5x1x and TAC5x1x-Q1 Programmable Biquad Filters - Configuration and Applications application report](#) for further details.

**Table 6-46. Biquad Filter Allocation to the Record Output Channel**

| PROGRAMMABLE BIQUAD FILTER | RECORD OUTPUT CHANNEL ALLOCATION USING P0_R114_D[3:2] REGISTER SETTING |                                                                     |                                                        |
|----------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------|
|                            | ADC_DSP_BQ_CFG[1:0] = 2'b01<br>(1 Biquad per Channel)                  | ADC_DSP_BQ_CFG[1:0] = 2'b10<br>(Default)<br>(2 Biquads per Channel) | ADC_DSP_BQ_CFG[1:0] = 2'b11<br>(3 Biquads per Channel) |
| Biquad filter 1            | Allocated to output channel 1                                          | Allocated to output channel 1                                       | Allocated to output channel 1                          |
| Biquad filter 2            | Allocated to output channel 2                                          | Allocated to output channel 2                                       | Allocated to output channel 2                          |
| Biquad filter 3            | Allocated to output channel 3                                          | Allocated to output channel 3                                       | Allocated to output channel 3                          |
| Biquad filter 4            | Allocated to output channel 4                                          | Allocated to output channel 4                                       | Allocated to output channel 4                          |
| Biquad filter 5            | Not used                                                               | Allocated to output channel 1                                       | Allocated to output channel 1                          |
| Biquad filter 6            | Not used                                                               | Allocated to output channel 2                                       | Allocated to output channel 2                          |
| Biquad filter 7            | Not used                                                               | Allocated to output channel 3                                       | Allocated to output channel 3                          |
| Biquad filter 8            | Not used                                                               | Allocated to output channel 4                                       | Allocated to output channel 4                          |
| Biquad filter 9            | Not used                                                               | Not used                                                            | Allocated to output channel 1                          |
| Biquad filter 10           | Not used                                                               | Not used                                                            | Allocated to output channel 2                          |
| Biquad filter 11           | Not used                                                               | Not used                                                            | Allocated to output channel 3                          |
| Biquad filter 12           | Not used                                                               | Not used                                                            | Allocated to output channel 4                          |

[Table 6-47](#) shows the biquad filter coefficients mapping to the register space.

**Table 6-47. Biquad Filter Coefficients Register Mapping**

| PROGRAMMABLE BIQUAD FILTER | BIQUAD FILTER COEFFICIENTS REGISTER MAPPING | PROGRAMMABLE BIQUAD FILTER | BIQUAD FILTER COEFFICIENTS REGISTER MAPPING |
|----------------------------|---------------------------------------------|----------------------------|---------------------------------------------|
| Biquad filter 1            | P8_R8-R27                                   | Biquad filter 7            | P9_R8-R27                                   |
| Biquad filter 2            | P8_R28-R47                                  | Biquad filter 8            | P9_R28-R47                                  |
| Biquad filter 3            | P8_R48-R67                                  | Biquad filter 9            | P9_R48-R67                                  |
| Biquad filter 4            | P8_R68-R87                                  | Biquad filter 10           | P9_R68-R87                                  |
| Biquad filter 5            | P8_R88-R107                                 | Biquad filter 11           | P9_R88-R107                                 |
| Biquad filter 6            | P8_R108-R127                                | Biquad filter 12           | P9_R108-R127                                |



### 6.3.7.2.6 Configurable Digital Decimation Filters

The device record channel includes a high dynamic range and a built-in digital decimation filter for processing the oversampled PDM stream from the digital microphone. The decimation filter can be chosen from four different types, depending on the required frequency response, group delay, power consumption, and phase linearity requirements for the target application. The selection of the decimation filter option can be done by configuring the ADC\_DSP\_DECI\_FILT (P0\_R114\_D[7:6]) register bits. Low power filter can be configured by setting ADC\_LOW\_PWR\_FILT (P0\_R78\_D[2]) bit. The table below shows the configuration register setting for the decimation filter mode selection for the record channel. This makes them an excellent choice for a wide variety of audio applications.

**Table 6-48. Decimation Filter Mode Selection for the Record Channel**

| P0_R78_D[2] :<br>ADC_LOW_PWR_FILT | P0_R114_D[7:6] :<br>ADC_DSP_DECI_FILT[1:0] | DECIMATION FILTER MODE SELECTION                      |
|-----------------------------------|--------------------------------------------|-------------------------------------------------------|
| 0                                 | 00 (default)                               | Linear phase filters are used for the decimation      |
| 0                                 | 01                                         | Low latency filters are used for the decimation       |
| 0                                 | 10                                         | Ultra-low latency filters are used for the decimation |
| 0                                 | 11                                         | Reserved (do not use this setting)                    |
| 1                                 | x                                          | Low power filters are used for the decimation         |


The following sections describe the filter response for the different latency options and samples rates.

#### 6.3.7.2.6.1 Linear-phase filters


The linear-phase decimation filters are the default filters set by the device and can be used for all applications that require a linear phase with zero-phase deviation within the pass-band specification of the filter. The filter performance specifications and various plots for all supported output sampling rates are listed in this section.

##### 6.3.7.2.6.1.1 Sampling Rate: 8kHz or 7.35kHz

Figure 6-62 and Figure 6-63 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 8kHz or 7.35kHz, Table 6-49 and lists the specifications.

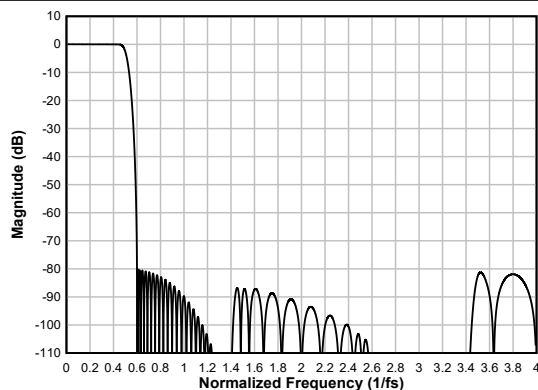

**Figure 6-62. Linear-phase Decimation Filter Magnitude Response**

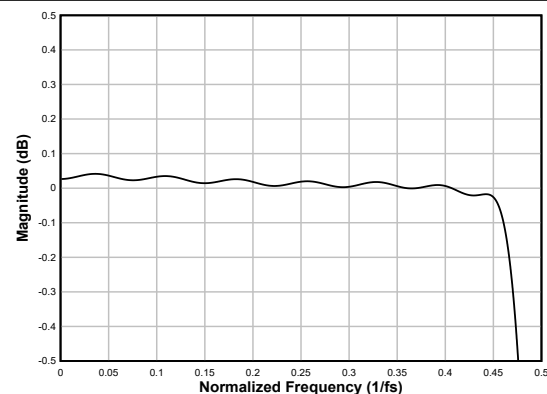


**Figure 6-63. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-49. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN   | TYP  | MAX  | UNIT    |
|------------------------|-------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.454 \times f_s$            | -0.04 |      | 0.04 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$ | 80.2  |      |      | dB      |
|                        | Frequency range is $4 \times f_s$ onwards             | 84.7  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.454 \times f_s$            |       | 16.1 |      | $1/f_s$ |

### 6.3.7.2.6.1.2 Sampling Rate: 16kHz or 14.7kHz

Figure 6-64 and Figure 6-65 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 16kHz or 14.7kHz, and Table 6-50 lists the specifications.

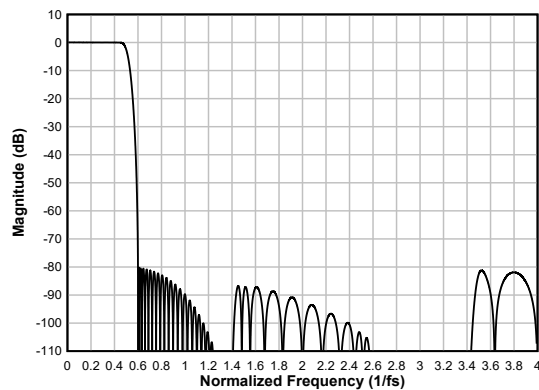

**Figure 6-64. Linear-phase Decimation Filter Magnitude Response**

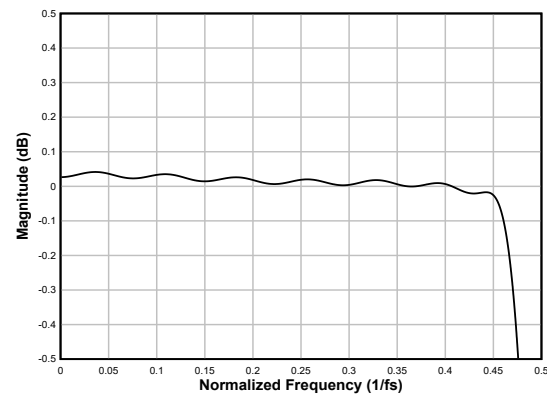


**Figure 6-65. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-50. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN   | TYP  | MAX  | UNIT    |
|------------------------|-------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.454 \times f_s$            | -0.04 |      | 0.04 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$ | 80.2  |      |      | dB      |
|                        | Frequency range is $4 \times f_s$ onwards             | 84.7  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.454 \times f_s$            |       | 16.1 |      | $1/f_s$ |

### 6.3.7.2.6.1.3 Sampling Rate: 24kHz or 22.05kHz

Figure 6-66 and Figure 6-67 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 24kHz or 22.05kHz, and Table 6-51 lists the specifications.

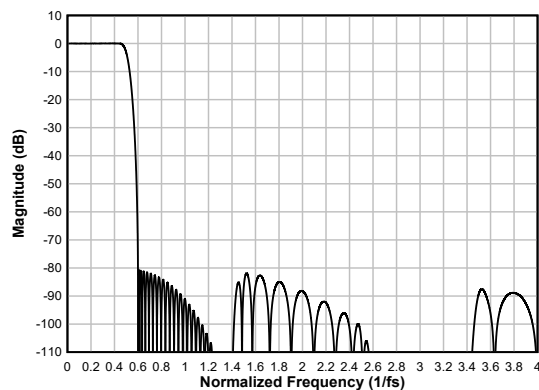

**Figure 6-66. Linear-phase Decimation Filter Magnitude Response**

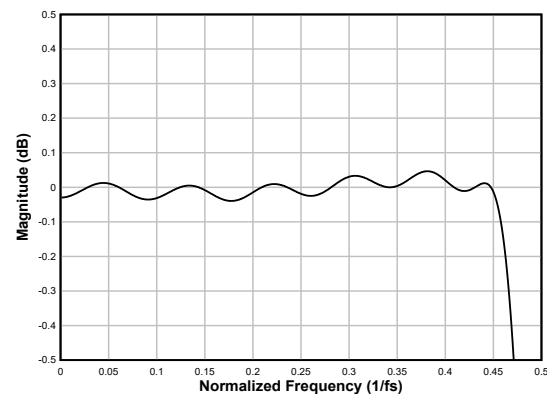

**Figure 6-67. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-51. Linear-phase Decimation Filter Specifications**


| PARAMETER             | TEST CONDITIONS                                       | MIN   | TYP | MAX  | UNIT |
|-----------------------|-------------------------------------------------------|-------|-----|------|------|
| Pass-band ripple      | Frequency range is 0 to $0.455 \times f_s$            | -0.05 |     | 0.05 | dB   |
| Stop-band attenuation | Frequency range is $0.6 \times f_s$ to $4 \times f_s$ | 80.6  |     |      | dB   |
|                       | Frequency range is $4 \times f_s$ onwards             | 93    |     |      |      |

**Table 6-51. Linear-phase Decimation Filter Specifications (continued)**


| PARAMETER              | TEST CONDITIONS                            | MIN | TYP  | MAX | UNIT    |
|------------------------|--------------------------------------------|-----|------|-----|---------|
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$ |     | 14.7 |     | $1/f_S$ |

#### 6.3.7.2.6.1.4 Sampling Rate: 32kHz or 29.4kHz

Figure 6-68 and Figure 6-69 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 32kHz or 29.4kHz, and Table 6-52 lists the specifications.

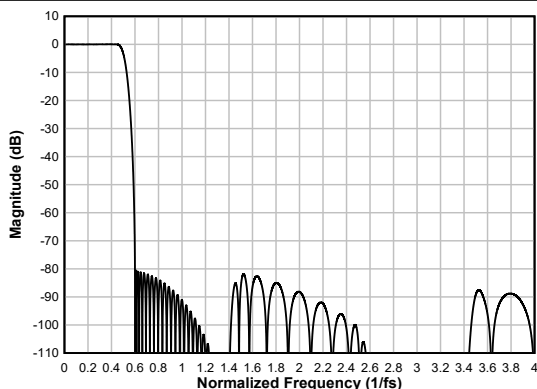

**Figure 6-68. Linear-phase Decimation Filter Magnitude Response**

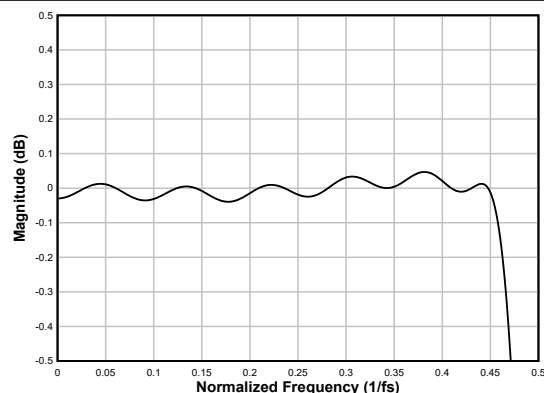


**Figure 6-69. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-52. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN   | TYP  | MAX  | UNIT    |
|------------------------|-------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_S$            | -0.05 |      | 0.05 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $4 \times f_S$ | 80.6  |      |      | dB      |
|                        | Frequency range is $4 \times f_S$ onwards             | 92.9  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$            |       | 14.7 |      | $1/f_S$ |

#### 6.3.7.2.6.1.5 Sampling Rate: 48kHz or 44.1kHz

Figure 6-70 and Figure 6-71 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 48kHz or 44.1kHz, and Table 6-53 lists the specifications.

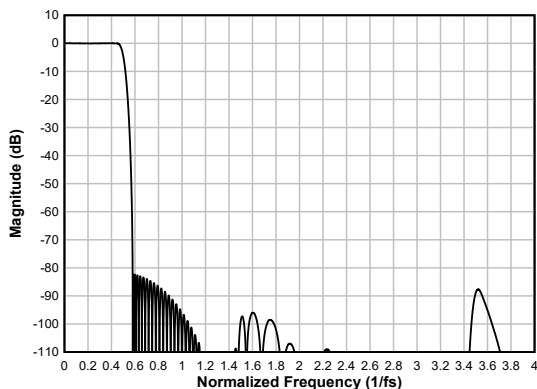

**Figure 6-70. Linear-phase Decimation Filter Magnitude Response**

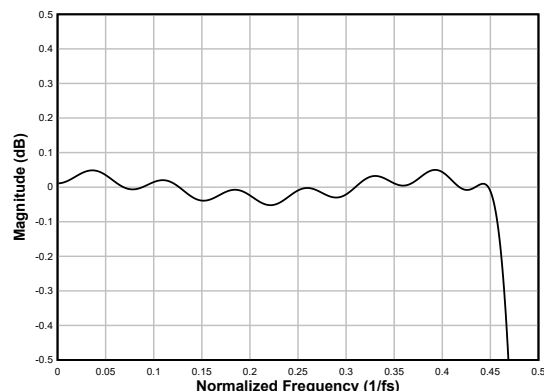



**Figure 6-71. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-53. Linear-phase Decimation Filter Specifications**

| PARAMETER              | TEST CONDITIONS                                        | MIN   | TYP | MAX  | UNIT    |
|------------------------|--------------------------------------------------------|-------|-----|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.454 \times f_S$             | -0.05 |     | 0.05 | dB      |
| Stop-band attenuation  | Frequency range is $0.58 \times f_S$ to $4 \times f_S$ | 82.2  |     |      | dB      |
|                        | Frequency range is $4 \times f_S$ onwards              | 98    |     |      |         |
| Group delay or latency | Frequency range is 0 to $0.454 \times f_S$             |       | 17  |      | $1/f_S$ |

**6.3.7.2.6.1.6 Sampling Rate: 96kHz or 88.2kHz**


Figure 6-72 and Figure 6-73 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 96kHz or 88.2kHz, and Table 6-54 lists the specifications.

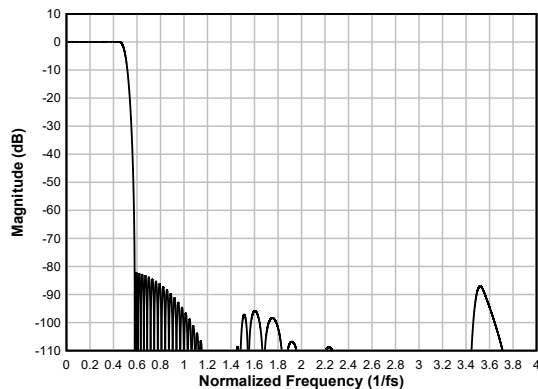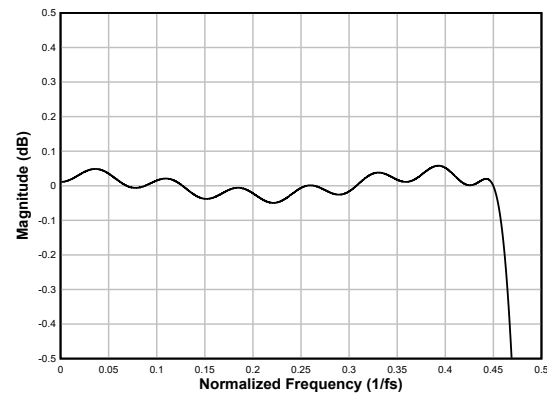**Figure 6-72. Linear-phase Decimation Filter Magnitude Response****Figure 6-73. Linear-phase Decimation Filter Pass-Band Ripple****Table 6-54. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                        | MIN   | TYP  | MAX  | UNIT    |
|------------------------|--------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.455 \times f_S$             | -0.05 |      | 0.06 | dB      |
| Stop-band attenuation  | Frequency range is $0.58 \times f_S$ to $4 \times f_S$ | 82.2  |      |      | dB      |
|                        | Frequency range is $4 \times f_S$ onwards              | 87    |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.455 \times f_S$             |       | 16.9 |      | $1/f_S$ |

**6.3.7.2.6.1.7 Sampling Rate: 192kHz or 176.4kHz**

Figure 6-74 and Figure 6-75 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 192kHz or 176.4kHz, and Table 6-55 lists the specifications.

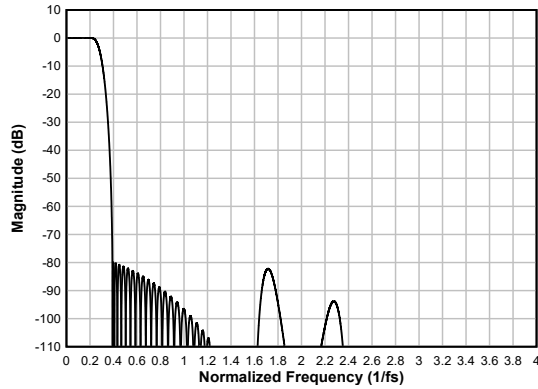

**Figure 6-74. Linear-phase Decimation Filter Magnitude Response**

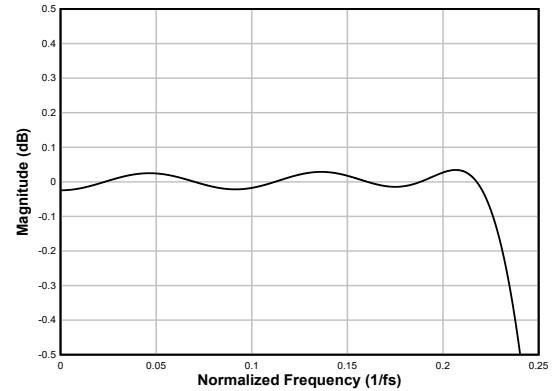


**Figure 6-75. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-55. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP  | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.223 \times f_s$              | -0.04 |      | 0.04 | dB      |
| Stop-band attenuation  | Frequency range is $0.391 \times f_s$ to $4 \times f_s$ | 80    |      |      | dB      |
|                        | Frequency range is $4 \times f_s$ onwards               | 82.2  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.223 \times f_s$              |       | 11.6 |      | $1/f_s$ |

### Sampling Rate: 384kHz or 352.8kHz

Figure 6-76 and Figure 6-77 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 384kHz or 352.8kHz, and Table 6-56 lists the specifications

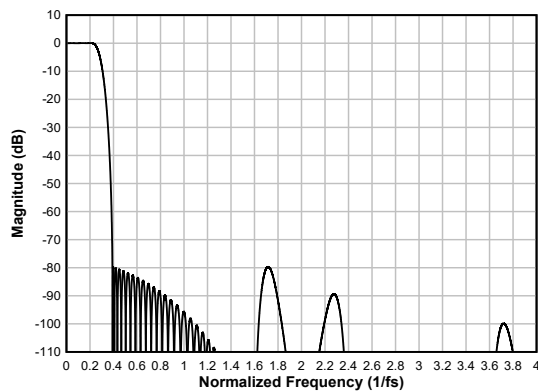

**Figure 6-76. Linear-phase Decimation Filter Magnitude Response**

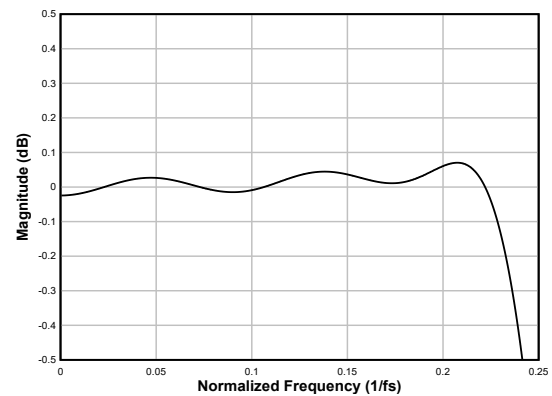


**Figure 6-77. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-56. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP  | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|------|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.227 \times f_s$              | -0.07 |      | 0.07 | dB      |
| Stop-band attenuation  | Frequency range is $0.391 \times f_s$ to $4 \times f_s$ | 80    |      |      | dB      |
|                        | Frequency range is $4 \times f_s$ onwards               | 88.1  |      |      |         |
| Group delay or latency | Frequency range is 0 to $0.227 \times f_s$              |       | 11.4 |      | $1/f_s$ |

### Sampling Rate: 768kHz or 705.6kHz

Figure 6-78 and Figure 6-79 respectively show the magnitude response and the pass-band ripple for this decimation filter with a sampling rate of 768kHz or 705.6kHz, and Table 6-57 lists the specifications

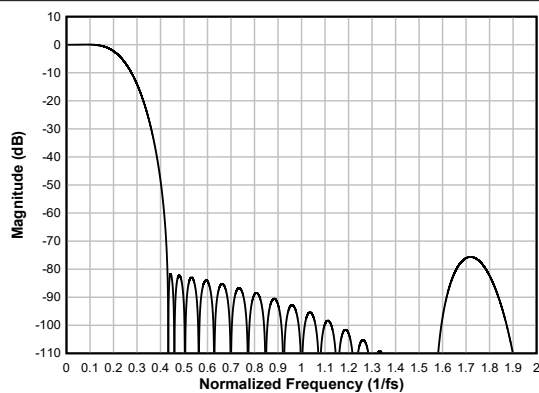

**Figure 6-78. Linear-phase Decimation Filter Magnitude Response**

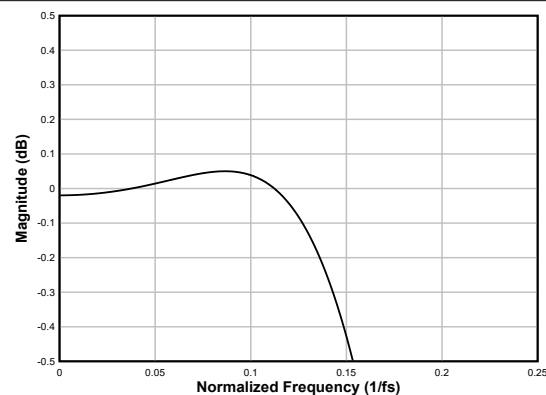

**Figure 6-79. Linear-phase Decimation Filter Pass-Band Ripple**

**Table 6-57. Linear-phase Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP | MAX  | UNIT    |
|------------------------|---------------------------------------------------------|-------|-----|------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.121 \times f_s$              | -0.05 |     | 0.05 | dB      |
| Stop-band attenuation  | Frequency range is $0.433 \times f_s$ to $4 \times f_s$ | 82.6  |     |      | dB      |
|                        | Frequency range is $4 \times f_s$ onwards               | 83.6  |     |      |         |
| Group delay or latency | Frequency range is 0 to $0.258 \times f_s$              |       | 6.4 |      | $1/f_s$ |

#### 6.3.7.2.6.2 Low-latency Filters


For applications where low latency with minimal phase deviation (within the audio band) is critical, the low-latency decimation filters on the TAD5112-Q1 can be used. The device supports these filters with a group delay of approximately seven samples with an almost linear phase response within the  $0.376 \times f_s$  frequency band. This section provides the filter performance specifications and various plots for all supported output sampling rates for the low-latency filters.

##### 6.3.7.2.6.2.1 Sampling Rate: 24kHz or 22.05kHz

Figure 6-80 shows the magnitude response and Figure 6-81 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 24kHz or 22.05kHz. Table 6-58 lists the specifications.

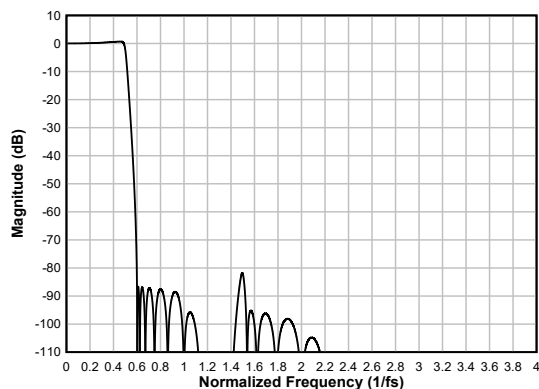

**Figure 6-80. Low-latency Decimation Filter Magnitude Response**

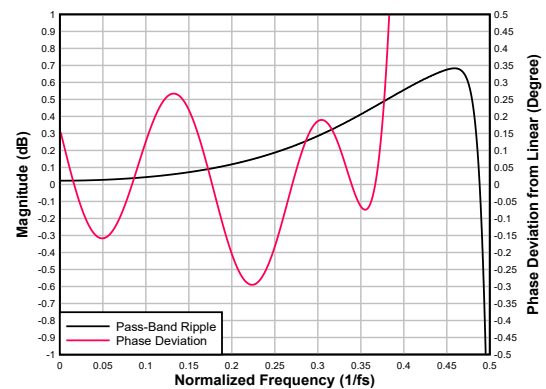


**Figure 6-81. Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-58. Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.492 \times f_S$            | -0.67  |     | 0.67  | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $4 \times f_S$ | 81.8   |     |       | dB      |
|                        | Frequency range is $4 \times f_S$ onwards             | 115    |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_S$            |        | 6.5 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_S$            | -0.092 |     | 0.029 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_S$            | -0.3   |     | 0.27  | Degrees |

#### 6.3.7.2.6.2.2 Sampling Rate: 32kHz or 29.4kHz

Figure 6-82 shows the magnitude response and Figure 6-83 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 32kHz or 29.4kHz. Table 6-59 lists the specifications.

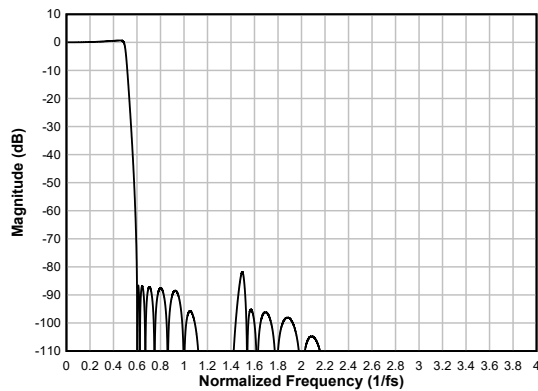

**Figure 6-82. Low-latency Decimation Filter Magnitude Response**

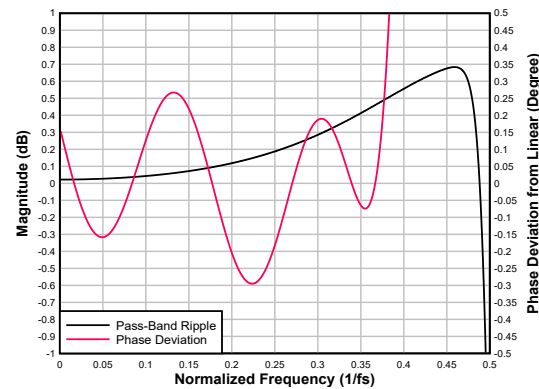


**Figure 6-83. Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-59. Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.492 \times f_S$            | -0.67  |     | 0.67  | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $4 \times f_S$ | 81.8   |     |       | dB      |
|                        | Frequency range is $4 \times f_S$ onwards             | 115    |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_S$            |        | 6.5 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_S$            | -0.092 |     | 0.029 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_S$            | -0.3   |     | 0.27  | Degrees |

#### 6.3.7.2.6.2.3 Sampling Rate: 48kHz or 44.1kHz

Figure 6-84 shows the magnitude response and Figure 6-85 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 48kHz or 44.1kHz. Table 6-60 lists the specifications.

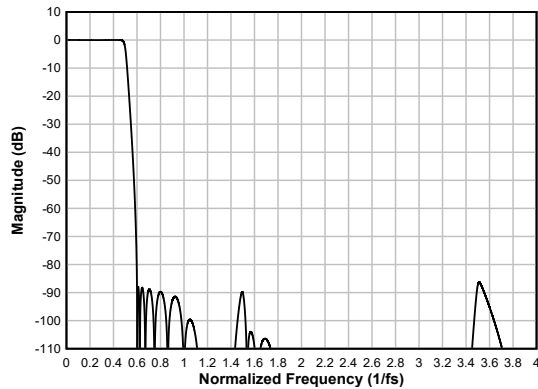

**Figure 6-84. Low-latency Decimation Filter Magnitude Response**

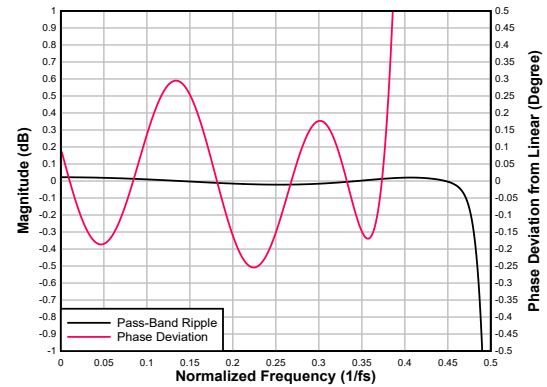


**Figure 6-85. Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-60. Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_s$            | -0.02  |     | 0.02  | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$ | 86.3   |     |       | dB      |
|                        | Frequency range is $4 \times f_s$ onwards             | 96.8   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$            |        | 6.6 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$            | -0.086 |     | 0.027 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.376 \times f_s$            | -0.25  |     | 0.3   | Degrees |

#### 6.3.7.2.6.2.4 Sampling Rate: 96kHz or 88.2kHz

Figure 6-86 shows the magnitude response and Figure 6-87 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 96kHz or 88.2kHz. Table 6-61 lists the specifications.

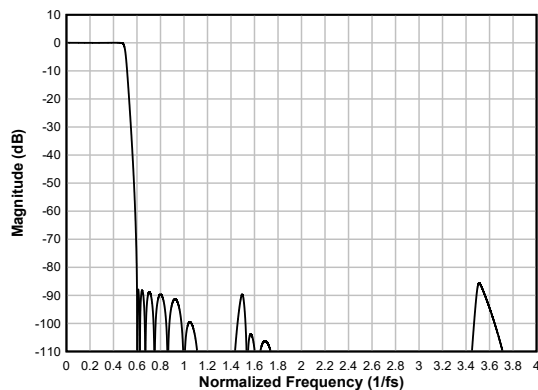

**Figure 6-86. Low-latency Decimation Filter Magnitude Response**

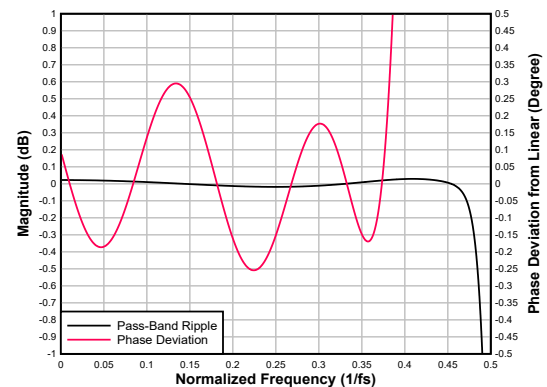

**Figure 6-87. Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-61. Low-latency Decimation Filter Specifications**

| PARAMETER              | TEST CONDITIONS                                         | MIN    | TYP | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_s$              | -0.02  |     | 0.03  | dB      |
| Stop-band attenuation  | Frequency range is $0.599 \times f_s$ to $4 \times f_s$ | 85.6   |     |       | dB      |
|                        | Frequency range is $4 \times f_s$ onwards               | 95.7   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.376 \times f_s$              |        | 6.6 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.376 \times f_s$              | -0.086 |     | 0.022 | $1/f_s$ |




**Table 6-61. Low-latency Decimation Filter Specifications (continued)**


| PARAMETER       | TEST CONDITIONS                            | MIN   | TYP | MAX  | UNIT    |
|-----------------|--------------------------------------------|-------|-----|------|---------|
| Phase deviation | Frequency range is 0 to $0.376 \times f_S$ | -0.25 |     | 0.30 | Degrees |

#### 6.3.7.2.6.2.5 Sampling Rate: 192kHz or 176.4kHz

Figure 6-88 shows the magnitude response and Figure 6-89 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 192kHz or 176.4kHz. Table 6-62 lists the specifications.

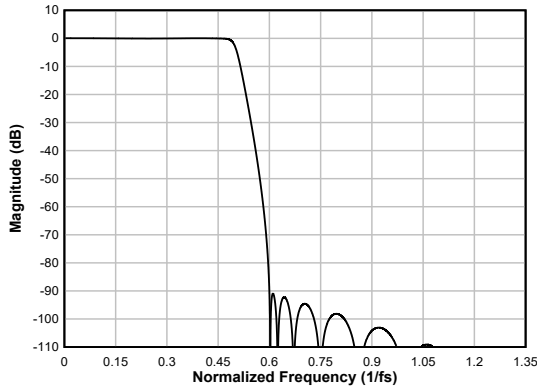

**Figure 6-88. Low-latency Decimation Filter Magnitude Response**

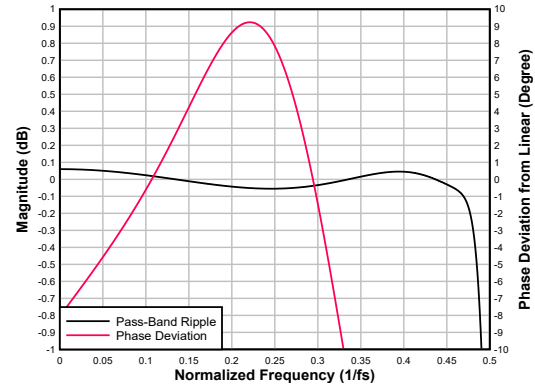

**Figure 6-89. Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-62. Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                            | MIN    | TYP | MAX   | UNIT    |
|------------------------|------------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_S$                 | -0.06  |     | 0.06  | dB      |
| Stop-band attenuation  | Frequency range is $0.571 \times f_S$ to $1.35 \times f_S$ | 90.5   |     |       | dB      |
|                        | Frequency range is $1 \times f_S$ onwards                  | 86.9   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.327 \times f_S$                 |        | 6.8 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.327 \times f_S$                 | -0.296 |     | 0.829 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.327 \times f_S$                 | -9.24  |     | 9.24  | Degrees |

#### 6.3.7.2.6.3 Ultra Low-latency Filters


For applications where ultra low latency with minimal phase deviation (within the audio band) is critical, the ultra low-latency decimation filters on the TAD5112-Q1 can be used. The device supports these filters with a group delay of approximately four samples with a fair phase response within the  $0.325 \times f_S$  frequency band. This section provides the filter performance specifications and various plots for all supported output sampling rates for the ultra low-latency filters.

##### 6.3.7.2.6.3.1 Sampling Rate: 24kHz or 22.05kHz

Figure 6-90 shows the magnitude response and Figure 6-91 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 24kHz or 22.05kHz. Table 6-63 lists the specifications.

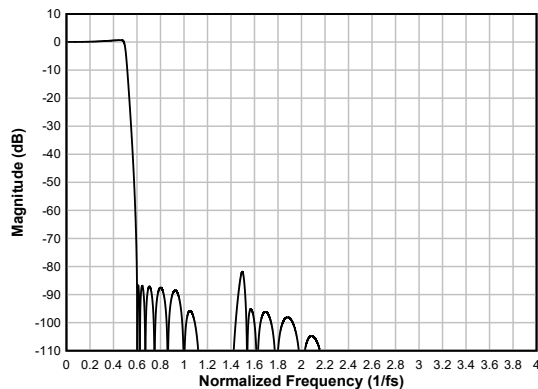

**Figure 6-90. Ultra Low-latency Decimation Filter Magnitude Response**

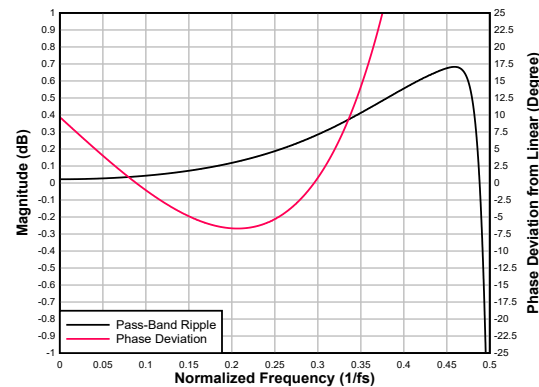


**Figure 6-91. Ultra Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-63. Ultra Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.492 \times f_s$            | -0.67  |     | -0.67 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$ | 81.8   |     |       | dB      |
|                        | Frequency range is $4 \times f_s$ onwards             | 115    |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_s$            |        | 2.8 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_s$            | -0.292 |     | 0.765 | $1/f_s$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_s$            | -6.7   |     | 9.7   | Degrees |

#### 6.3.7.2.6.3.2 Sampling Rate: 32kHz or 29.4kHz

Figure 6-92 shows the magnitude response and Figure 6-93 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 32kHz or 29.4kHz. Table 6-64 lists the specifications.

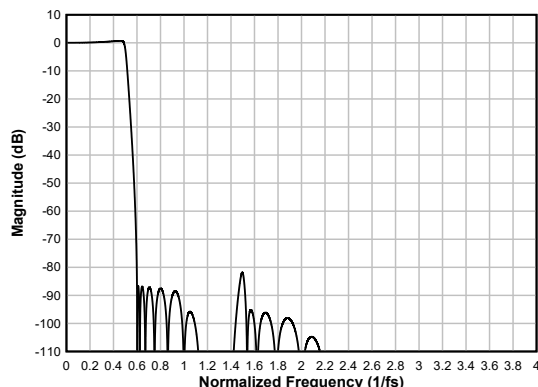

**Figure 6-92. Ultra Low-latency Decimation Filter Magnitude Response**

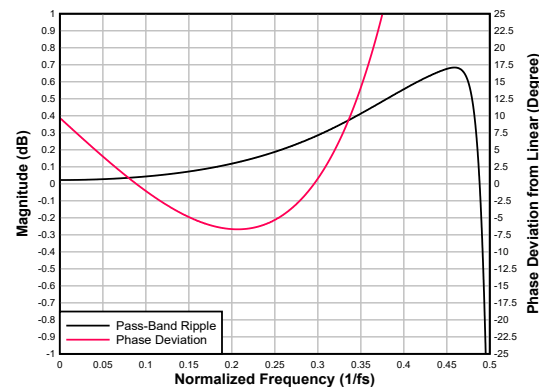

**Figure 6-93. Ultra Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-64. Ultra Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN    | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.492 \times f_s$            | -0.67  |     | -0.67 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_s$ to $4 \times f_s$ | 81.8   |     |       | dB      |
|                        | Frequency range is $4 \times f_s$ onwards             | 115    |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_s$            |        | 2.7 |       | $1/f_s$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_s$            | -0.292 |     | 0.765 | $1/f_s$ |

**Table 6-64. Ultra Low-latency Decimation Filter Specifications (continued)**


| PARAMETER       | TEST CONDITIONS                            | MIN  | TYP | MAX | UNIT    |
|-----------------|--------------------------------------------|------|-----|-----|---------|
| Phase deviation | Frequency range is 0 to $0.325 \times f_S$ | -6.7 |     | 9.7 | Degrees |

#### 6.3.7.2.6.3.3 Sampling Rate: 48kHz or 44.1kHz

Figure 6-94 shows the magnitude response and Figure 6-95 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 48kHz or 44.1kHz. Table 6-65 lists the specifications.

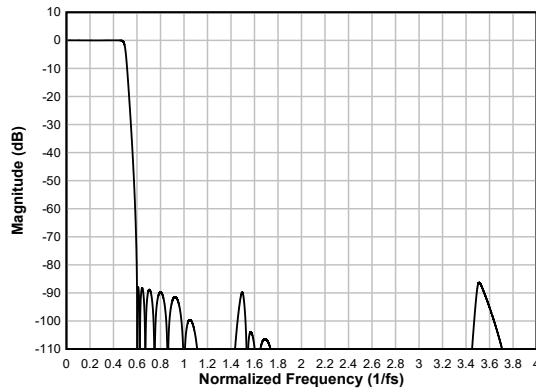

**Figure 6-94. Ultra Low-latency Decimation Filter Magnitude Response**

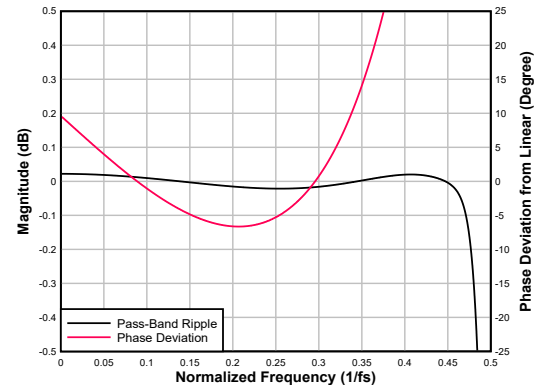


**Figure 6-95. Ultra Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-65. Ultra Low-latency Decimation Filter Specifications**


| PARAMETER              | TEST CONDITIONS                                       | MIN   | TYP | MAX   | UNIT    |
|------------------------|-------------------------------------------------------|-------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_S$            | -0.02 |     | -0.02 | dB      |
| Stop-band attenuation  | Frequency range is $0.6 \times f_S$ to $4 \times f_S$ | 86.3  |     |       | dB      |
|                        | Frequency range is $4 \times f_S$ onwards             | 96.8  |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_S$            |       | 2.8 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_S$            | -0.29 |     | 0.761 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_S$            | -6.6  |     | 9.6   | Degrees |

#### 6.3.7.2.6.3.4 Sampling Rate: 96kHz or 88.2kHz

Figure 6-96 shows the magnitude response and Figure 6-97 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 96kHz or 88.2kHz. Table 6-66 lists the specifications.

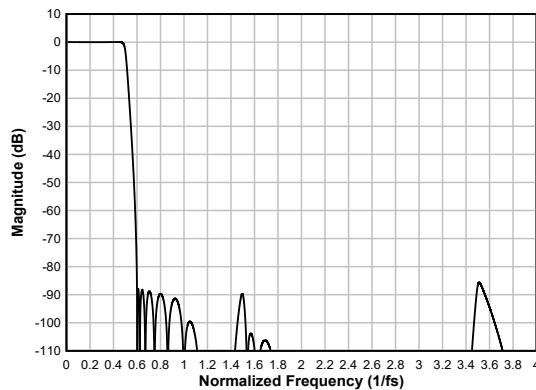

**Figure 6-96. Ultra Low-latency Decimation Filter Magnitude Response**

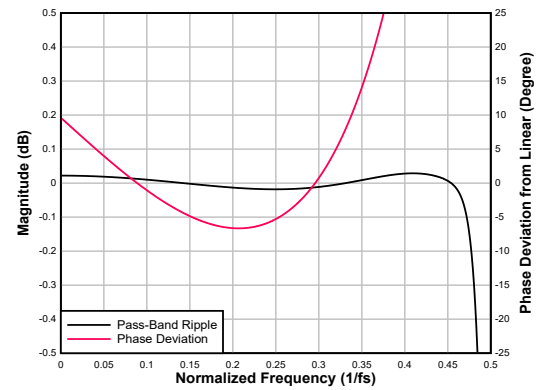



**Figure 6-97. Ultra Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation**

**Table 6-66. Ultra Low-latency Decimation Filter Specifications**

| PARAMETER              | TEST CONDITIONS                                         | MIN   | TYP | MAX   | UNIT    |
|------------------------|---------------------------------------------------------|-------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_S$              | -0.02 |     | 0.03  | dB      |
| Stop-band attenuation  | Frequency range is $0.599 \times f_S$ to $4 \times f_S$ | 85.6  |     |       | dB      |
|                        | Frequency range is $4 \times f_S$ onwards               | 95.7  |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_S$              |       | 2.7 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_S$              | -0.29 |     | 0.761 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_S$              | -6.6  |     | 9.6   | Degrees |

**6.3.7.2.6.3.5 Sampling Rate: 192kHz or 176.4kHz**


Figure 6-98 shows the magnitude response and Figure 6-99 shows the pass-band ripple and phase deviation for this decimation filter with a sampling rate of 192kHz or 176.4kHz. Table 6-67 lists the specifications.

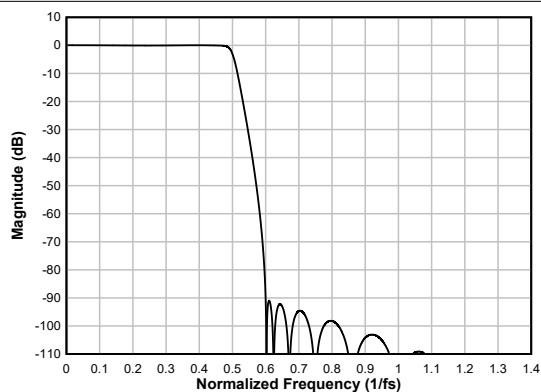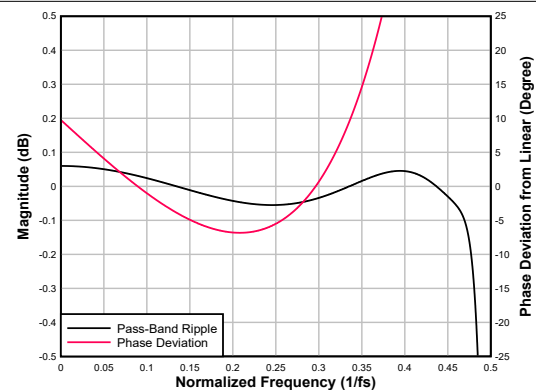**Figure 6-98. Ultra Low-latency Decimation Filter Magnitude Response****Figure 6-99. Ultra Low-latency Decimation Filter Pass-Band Ripple and Phase Deviation****Table 6-67. Ultra Low-latency Decimation Filter Specifications**

| PARAMETER              | TEST CONDITIONS                                            | MIN    | TYP | MAX   | UNIT    |
|------------------------|------------------------------------------------------------|--------|-----|-------|---------|
| Pass-band ripple       | Frequency range is 0 to $0.456 \times f_S$                 | -0.06  |     | 0.06  | dB      |
| Stop-band attenuation  | Frequency range is $0.571 \times f_S$ to $1.35 \times f_S$ | 90.5   |     |       | dB      |
|                        | Frequency range is $1.35 \times f_S$ onwards               | 86.9   |     |       |         |
| Group delay or latency | Frequency range is 0 to $0.325 \times f_S$                 |        | 2.7 |       | $1/f_S$ |
| Group delay deviation  | Frequency range is 0 to $0.325 \times f_S$                 | -0.293 |     | 0.794 | $1/f_S$ |
| Phase deviation        | Frequency range is 0 to $0.325 \times f_S$                 | -6.8   |     | 9.8   | Degrees |

#### 6.3.7.2.7 Automatic Gain Controller (AGC)

The device includes an automatic gain controller (AGC) for ADC recording. As shown in Figure 6-100, the AGC can be used to maintain a nominally constant output level when recording speech. Instead of manually setting the channel gain in AGC mode, the circuitry automatically adjusts the channel gain when the input signal becomes overly loud or very weak, such as when a person speaking into a microphone moves closer to or farther from the microphone. The AGC algorithm has several programmable parameters, including target level, maximum gain allowed, attack and release (or decay) time constants, and noise thresholds that allow the algorithm to be fine-tuned for any particular application. These are part of the programmable coefficients of the device for flexibility and can be configured using the programmable coefficient registers in B0\_P27 and B0\_P28.

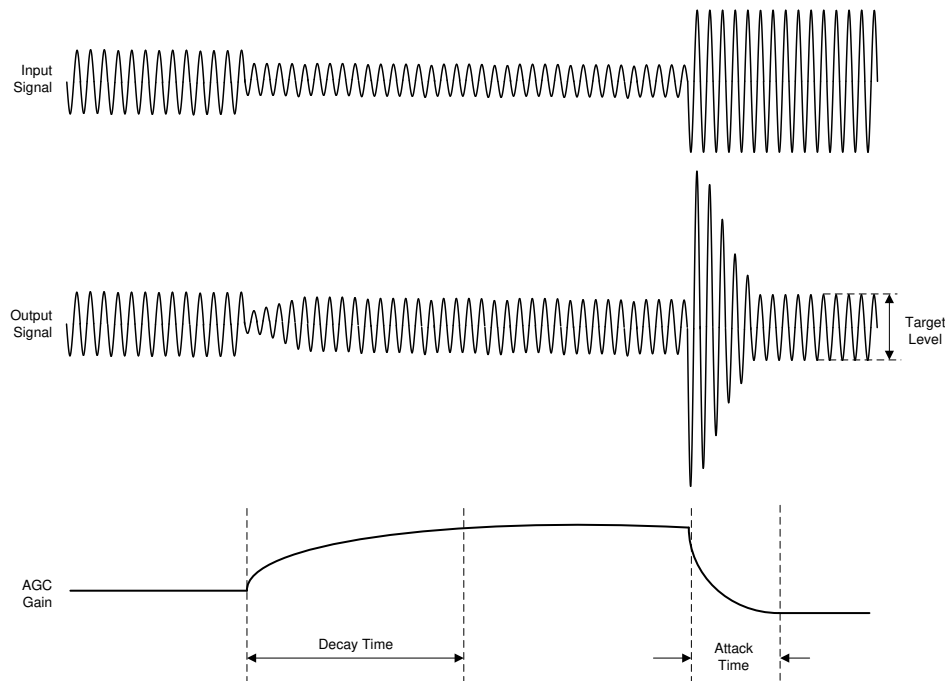

**Figure 6-100. AGC Characteristics**

The target level (AGC\_LVL) represents the nominal approximate output level at which the AGC attempts to hold the ADC output signal level. The TAD5112-Q1 allows programming of different target levels. The target level is recommended to be set with enough margin to prevent clipping when loud sounds occur. For further details on the AGC various configurable parameter and application use, see [Using the Automatic Gain Controller \(AGC\) in TAx5x1x Family application report](#). TI recommends using the PPC3 GUI for configuring the programmable coefficients settings; for more details see the [TAC5212EVM-PDK Evaluation module users guide](#) and the [PurePath™ console graphical development suite](#).

#### 6.3.7.2.8 Voice Activity Detection (VAD)

The TAD5112-Q1 supports voice activity detection (VAD) mode as part of low power activity detection (LPAD) schemes. In this mode, the TAD5112-Q1 continuously monitors one of the input channels for voice detection. The device consumes low quiescent current from the AVDD supply in this mode. This feature can be enabled by setting VAD\_EN (P0\_R120\_D[2]) to 1'b1. On detecting voice activity, the TAD5112-Q1 can alert the host through an interrupt or auto wake up and start recording based on the I<sup>2</sup>C programmed configuration. This alert can be configured through the LPAD\_MODE (P1\_R30\_D[7:6]) register bits.

The input channel for the VAD can be selected by setting the LPAD\_CH\_SEL (P1\_R30\_D[5:4]) register bits to an appropriate value. See the [How to use the Voice Activity Detection in the TAx511x and TAx521x application report](#) for further details.

### 6.3.7.2.9 Ultrasonic Activity Detection (UAD)

The TAD5112-Q1 supports ultrasonic activity detection (UAD) mode as part of low power activity detection (LPAD) schemes. In this mode, the TAD5112-Q1 continuously monitors one of the input channels for signals in the ultrasonic frequency band. The device consumes low quiescent current from the AVDD supply in this mode. This feature can be enabled by setting UAD\_EN (P0\_R120\_D[3]) to 1'b1. On detecting ultrasonic activity, the TAD5112-Q1 can alert the host through an interrupt or auto wake up and start recording based on the I<sup>2</sup>C programmed configuration. This alert can be configured through the LPAD\_MODE (P1\_R30\_D[7:6]) register bits.

The input channel for the UAD can be selected by setting the LPAD\_CH\_SEL (P1\_R30\_D[5:4]) register bits to an appropriate value. See the [How to use the Ultrasonic Activity Detection in the TAx511x and TAx521x](#) for further details.

### 6.3.8 Interrupts, Status, and Digital I/O Pin Multiplexing

Certain events in the device require host processor intervention and can be used to trigger interrupts to the host processor. One such event is an audio serial interface (ASI) bus error. The device powers down the record channels if any faults are detected with the ASI bus error clocks, such as:

- Invalid FSYNC frequency
- Invalid BCLK to FSYNC ratio
- Long pauses of the BCLK or FSYNC clocks

When an ASI bus clock error is detected, the device shuts down all the record and playback channels as quickly as possible. After all ASI bus clock errors are resolved, the device volume ramps back to the previous state to recover the audio. During an ASI bus clock error, the internal interrupt request (IRQ) interrupt signal asserts low if the clock error interrupt mask register bit INT\_MASK0[7] (P1\_R47\_D[7]) is set low. The clock fault is also available for readback in the latched fault status register bit INT\_LTCH0 (P1\_R52), which is a read-only register. Reading the latched fault status register, INT\_LTCH0, clears all latched fault status. The device can be additionally configured to route the internal IRQ interrupt signal on the GPIOx or GPO1 pins and also can be configured as open-drain outputs so that these pins can be wire-ANDed to the open-drain interrupt outputs of other devices.

The IRQ interrupt signal can either be configured as active low or active high polarity by setting the INT\_POL (P0\_R66\_D[7]) register bit. This signal can also be configured as a single pulse or a series of pulses by programming the INT\_EVENT[1:0] (P0\_R66\_D[6:5]) register bits. If the interrupts are configured as a series of pulses, the events trigger the start of pulses that stop when the latched fault status register is read to determine the cause of the interrupt.

The device also supports read-only live-status registers to determine if the channels are powered up or down and if the device is in sleep mode or not. These status registers are located in the DEV\_STS0 (P0\_R121) and DEV\_STS1 (P0\_R122) register bits.

The device has a multifunctional GPIOx, GPI1, GPO1 pin that can be configured for a desired specific function. [Table 6-68](#) lists all possible allocations of these multifunctional pins for the various features.

**Table 6-68. Multifunction Pin Assignments**

| ROW | PIN FUNCTION                       | GPIO1            | GPIO2       | GPO1        | GPI1              |
|-----|------------------------------------|------------------|-------------|-------------|-------------------|
| —   | —                                  | GPIO1_CFG        | GPIO2_CFG   | GPO1_CFG    | GPI1_CFG          |
| —   | —                                  | P0_R10[7:4]      | P0_R11[7:4] | P0_R12[7:4] | P0_R13[1]         |
| A   | Pin disabled                       | S <sup>(1)</sup> | S (default) | S (default) | S (default)       |
| B   | General-purpose output (GPO)       | S                | S           | S           | NS <sup>(2)</sup> |
| C   | Interrupt output (IRQ)             | S (default)      | S           | S           | NS                |
| D   | Power down for all record channels | S                | S           | NS          | S                 |
| E   | Power down for all DAC channels    | S                | S           | NS          | S                 |
| F   | PDM clock output (PDMCLK)          | S                | S           | S           | NS                |
| G   | PDM data input 1 (PDM DIN1)        | S                | S           | NS          | S                 |
| H   | PDM data input 2 (PDM DIN2)        | S                | S           | NS          | S                 |
| I   | MICBIAS on/off input (BIASEN)      | S                | S           | NS          | S                 |
| J   | General-purpose input (GPI)        | S                | S           | NS          | S                 |
| K   | Controller clock input (CCLK)      | S                | S           | S           | S                 |
| L   | ASI daisy-chain input              | S                | S           | NS          | S                 |
| M   | ASI DOUT                           | S                | S           | S           | NS                |
| N   | ASI BCLK                           | S                | S           | S           | S                 |
| O   | ASI FSYNC                          | S                | S           | S           | S                 |
| P   | General Purpose Clock Out          | S                | S           | S           | NS                |
| Q   | ASI daisy-chain output             | S                | S           | S           | NS                |

(1) S means the feature mentioned in this row is *supported* for the respective GPIOx, GPO1, or GPI1 pin mentioned in this column.

(2) NS means the feature mentioned in this row is *not supported* for the respective GPIOx, GPO1, or GPI1 pin mentioned in this column.

Each GPO1 or GPIOx pin can be independently set for the desired drive configurations setting using the GPIOx\_DRV[2:0] or GPO1\_DRV[2:0] register bits in P0\_R10\_D[2:0], P0\_R11\_D[2:0] and P0\_R12\_D[2:0] respectively. [Table 6-69](#) lists the drive configuration settings.

**Table 6-69. GPIO or GPOx Pins Drive Configuration Settings**

| P0_R10_D[2:0] : GPIO1_DRV[2:0] | GPIO OUTPUT DRIVE CONFIGURATION SETTINGS FOR GPIO1                           |
|--------------------------------|------------------------------------------------------------------------------|
| 000                            | The GPIO1 pin is set to high impedance (floated)                             |
| 001                            | The GPIO1 pin is set to be driven active low or active high                  |
| 010 (default)                  | The GPIO1 pin is set to be driven active low or weak high (on-chip pullup)   |
| 011                            | The GPIO1 pin is set to be driven active low or Hi-Z (floated)               |
| 100                            | The GPIO1 pin is set to be driven weak low (on-chip pulldown) or active high |
| 101                            | The GPIO1 pin is set to be driven Hi-Z (floated) or active high              |
| 110 and 111                    | Reserved (do not use these settings)                                         |

When configured as a general-purpose output (GPO), the GPIOx or GPO1 pin values can be driven by writing the GPO\_GPI\_VAL (P0\_R14) registers. The GPIO\_MON bits (P0\_R14\_D[3:1]) can be used to readback the status of the GPIOx or GPI1 pin when configured as a general-purpose input (GPI).

### 6.3.9 Power Tune Mode

For low power applications, the TAD5112-Q1 offers options to configure the device in a power tune mode with typical power consumption 10.5mW for 2-Ch playback for a 1.8V supply. This mode can be configured by setting the PWR\_TUNE\_CFG0 (P0\_R78) register to 0xD4 and PWR\_TUNE\_CFG1 (P0\_R79) register to 0x96. For power savings, the DAC modulator clocks are set to run at 1.536MHz (the input and output data sample rates are multiples or submultiples of 48kHz) or 1.4112MHz (the input and output data sample rates are multiples or submultiples of 44.1kHz). For more details refer the [TAD5x1x Power Consumption Matrix Across Various Usage Scenarios application report](#) for the supported settings in this mode.

## 6.4 Device Functional Modes



### 6.4.1 Sleep Mode or Software Shutdown

In sleep mode or software shutdown mode, the device consumes very low quiescent current from the AVDD supply and, at the same time, allows the I<sup>2</sup>C or SPI communication to wake the device for active operation.

The device can also enter sleep mode when the host device sets the SLEEP\_ENZ (P0\_R2\_D[0]) bit to 1'b0. If the SLEEP\_ENZ bit is asserted low when the device is in active mode, the device ramps down the volume on the record and playback data, powers down the analog and digital blocks, and enters sleep mode. However, the device still continues to retain the last programmed value of the device configuration registers and programmable coefficients.

In sleep mode, do not perform any I<sup>2</sup>C or SPI transactions, except for exiting sleep mode to enter active mode. After entering sleep mode, wait at least 10ms before starting I<sup>2</sup>C or SPI transactions to exit sleep mode.

### 6.4.2 Active Mode

If the host device exits sleep mode by setting the SLEEP\_ENZ bit to 1'b1, the device enters active mode. In active mode, I<sup>2</sup>C or SPI transactions can be done to configure and power-up the device for active operation. After entering active mode, wait at least 2ms before starting any I<sup>2</sup>C or SPI transactions to allow the device to complete the internal wake-up sequence.

Read and write operations to the programmable coefficient registers, and to the channel configuration registers must be done 10ms after exiting sleep mode.

After configuring all other registers for the target application and system settings, configure the input channel enable registers, P0\_R118 (CH\_EN). Lastly, configure the device power-up register, P0\_R120 (PWR\_CFG). All the programmable coefficient values must be written before powering up the respective channel.

In active mode, the power-up and power-down status of various blocks is monitored by reading the read-only device status bits located in the P0\_R121 (DEV\_STS0) and P0\_R122 (DEV\_STS1) registers.

### 6.4.3 Software Reset

A software reset can be done any time by asserting the SW\_RESET bit (P0\_R1\_D[0]), which is a self-clearing bit. This software reset immediately shuts down the device, and restores all device configuration registers and programmable coefficients to default values.

## 6.5 Programming

The device contains configuration registers and programmable coefficients that can be set to the desired values for a specific system and application use. These registers are called *device control registers* and are each eight bits in width, mapped using a page scheme.

Each page contains 128 configuration registers. All device configuration registers are stored in page 0, which is the default page setting at power up and after a software reset. All programmable coefficient registers are located in page 0, page 1, and page 3. The current page of the device can be switched to a new desired page by using the PAGE[7:0] bits located in register 0 of every page.

### 6.5.1 Control Serial Interfaces

The device control registers can be accessed using either I<sup>2</sup>C or SPI communication to the device.

For a given end application, the host device must always use either the I<sup>2</sup>C or SPI, but not both. To configure the device refer to the [Table 6-70](#). The pins SDA\_PICO, SCL\_SCLK, GPO1\_POCl, and GPI1\_CSZ are multiplexed pins for I<sup>2</sup>C or SPI, and are auto-configured for either I<sup>2</sup>C or SPI communication based on the ADDR pin setting.

**Table 6-70. I<sup>2</sup>C and SPI Address Configuration**

| ADDR Setting                | Mode             | Device Address (7-bit) | Device Address (8-bit) |
|-----------------------------|------------------|------------------------|------------------------|
| Short to Ground             | I <sup>2</sup> C | 0x50                   | 0xA0                   |
| Pull down 4.7KOhm to ground | I <sup>2</sup> C | 0x51                   | 0xA2                   |
| Pull up 22KOhm to AVDD      | I <sup>2</sup> C | 0x52                   | 0xA4                   |



**Table 6-70. I<sup>2</sup>C and SPI Address Configuration (continued)**

| ADDR Setting            | Mode             | Device Address (7-bit) | Device Address (8-bit) |
|-------------------------|------------------|------------------------|------------------------|
| Pull up 4.7KOhm to AVDD | I <sup>2</sup> C | 0x53                   | 0xA6                   |
| Short to AVDD           | SPI              | NA                     | NA                     |

#### 6.5.1.1 I<sup>2</sup>C Control Interface


The device supports the I<sup>2</sup>C control protocol as a target device, and is capable of operating in standard mode, fast mode, and fast mode plus. The I<sup>2</sup>C control protocol requires a 7-bit target address. The five most significant bits (MSBs) of the target address are fixed at 5'b10100 and cannot be changed. The two least significant bits (LSBs) are programmable and are controlled by the ADDR pin. Refer [Table 6-70](#) for the four possible device addresses supported by TAD5112-Q1 in I<sup>2</sup>C mode. If the I2C\_BRDCAST\_EN (P0\_R4\_D[1]) bit is set to 1'b1, then the 7-bit I<sup>2</sup>C target address is fixed to 7'b1010000 in order to allow simultaneous I<sup>2</sup>C broadcast communication to all TAD5112-Q1 devices in the system.

##### 6.5.1.1.1 General I<sup>2</sup>C Operation

The I<sup>2</sup>C bus employs two signals, SDA (data) and SCL (clock), to communicate between integrated circuits in a system using serial data transmission. The address and data 8-bit bytes are transferred MSB first. In addition, each byte transferred on the bus is acknowledged by the receiving device with an acknowledge bit. Each transfer operation begins with the controller device driving a start condition on the bus and ends with the controller device driving a stop condition on the bus. The bus uses transitions on the data pin (SDA) while the clock is at logic high to indicate start and stop conditions. A high-to-low transition on SDA indicates a start, and a low-to-high transition indicates a stop. Normal data-bit transitions must occur within the low time of the clock period.

The controller device drives a start condition followed by the 7-bit target address and the read/write (R/W) bit to open communication with another device and then waits for an acknowledgment condition. The target device holds SDA low during the acknowledge clock period to indicate acknowledgment. When this occurs, the controller device transmits the next byte of the sequence. Each target device is addressed by a unique 7-bit target address plus the R/W bit (1 byte). All compatible devices share the same signals via a bidirectional bus using a wired-AND connection.

There is no limit on the number of bytes that can be transmitted between start and stop conditions. When the last word transfers, the controller device generates a stop condition to release the bus. Figure 6-101 shows a generic data transfer sequence.

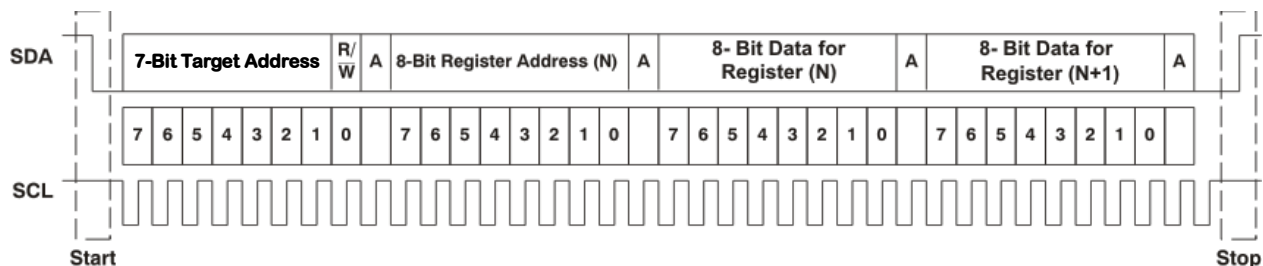

**Figure 6-101. Typical I<sup>2</sup>C Sequence**

In the system, use external pullup resistors for the SDA and SCL signals to set the logic high level for the bus. The SDA and SCL voltages must not exceed the device supply voltage, IOVDD.


#### 6.5.1.1.2 I<sup>2</sup>C Single-Byte and Multiple-Byte Transfers

The device I<sup>2</sup>C interface supports both single-byte and multiple-byte read/write operations for all registers. During multiple-byte read operations, the device responds with data, a byte at a time, starting at the register assigned, as long as the controller device continues to respond with acknowledges.

The device supports sequential I<sup>2</sup>C addressing. For write transactions, if a register is issued followed by data for that register and all the remaining registers that follow, a sequential I<sup>2</sup>C write transaction takes place. For I<sup>2</sup>C sequential write transactions, the register issued then serves as the starting point, and the amount of data subsequently transmitted, before a stop or start is transmitted, determines how many registers are written.

##### 6.5.1.1.2.1 I<sup>2</sup>C Single-Byte Write


As shown in Figure 6-102, a single-byte data write transfer begins with the controller device transmitting a start condition followed by the I<sup>2</sup>C device address and the read/write bit. The read/write bit determines the direction of the data transfer. For a write-data transfer, the read/write bit must be set to 0. After receiving the correct I<sup>2</sup>C target address and the read/write bit, the device responds with an acknowledge bit (ACK). Next, the controller device transmits the register byte corresponding to the device internal register address being accessed. After receiving the register byte, the device again responds with an acknowledge bit (ACK). Then, the controller device transmits the byte of data to be written to the specified register. When finished, the target device responds with an acknowledge bit (ACK). Finally, the controller device transmits a stop condition to complete the single-byte data write transfer.

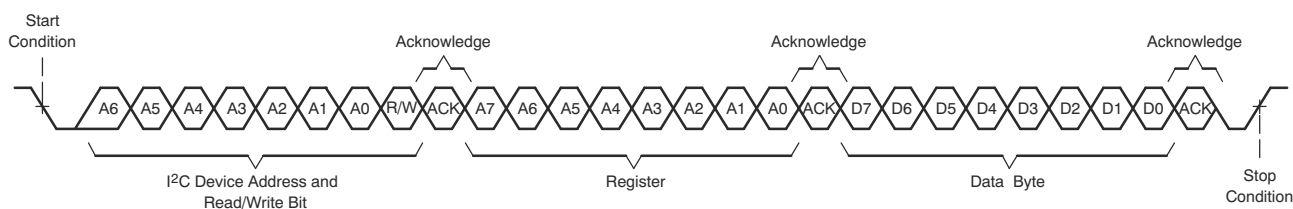

**Figure 6-102. I<sup>2</sup>C Single-Byte Write Transfer**

#### 6.5.1.1.2.2 I<sup>2</sup>C Multiple-Byte Write

As shown in Figure 6-103, a multiple-byte data write transfer is identical to a single-byte data write transfer except that multiple data bytes are transmitted by the controller device to the target device. After receiving each data byte, the device responds with an acknowledge bit (ACK). Finally, the controller device transmits a stop condition after the last data-byte write transfer.

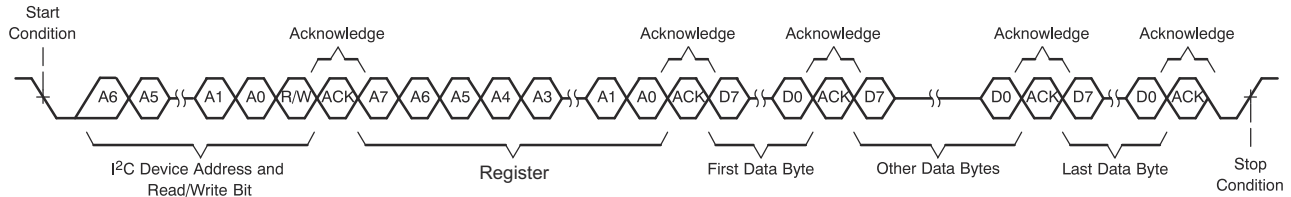


**Figure 6-103. I<sup>2</sup>C Multiple-Byte Write Transfer**

#### 6.5.1.1.2.3 I<sup>2</sup>C Single-Byte Read

As shown in Figure 6-104, a single-byte data read transfer begins with the controller device transmitting a start condition followed by the I<sup>2</sup>C target address and the read/write bit. For the data read transfer, both a write followed by a read are done. Initially, a write is done to transfer the address byte of the internal register address to be read. As a result, the read/write bit is set to 0.


After receiving the target address and the read/write bit, the device responds with an acknowledge bit (ACK). The controller device then sends the internal register address byte, after which the device issues an acknowledge bit (ACK). The controller device transmits another start condition followed by the target address and the read/write bit again. This time, the read/write bit is set to 1, indicating a read transfer. Next, the device transmits the data byte from the register address being read. After receiving the data byte, the controller device transmits a not-acknowledge (NACK) followed by a stop condition to complete the single-byte data read transfer.

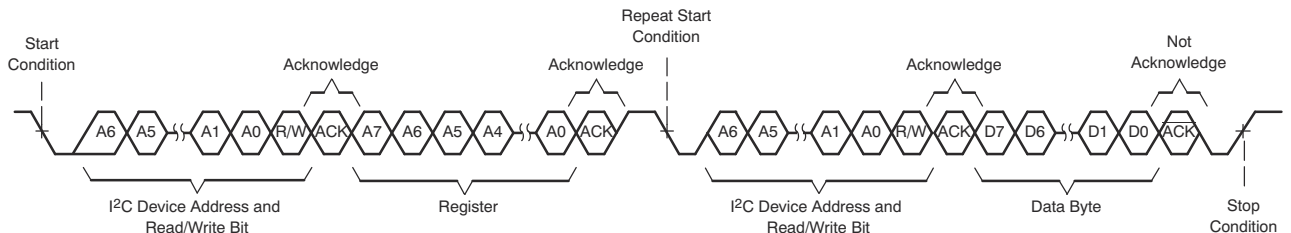

**Figure 6-104. I<sup>2</sup>C Single-Byte Read Transfer**

#### 6.5.1.1.2.4 I<sup>2</sup>C Multiple-Byte Read

As shown in Figure 6-105, a multiple-byte data read transfer is identical to a single-byte data read transfer except that multiple data bytes are transmitted by the device to the controller device. With the exception of the last data byte, the controller device responds with an acknowledge bit after receiving each data byte. After receiving the last data byte, the controller device transmits a not-acknowledge (NACK) followed by a stop condition to complete the data read transfer.

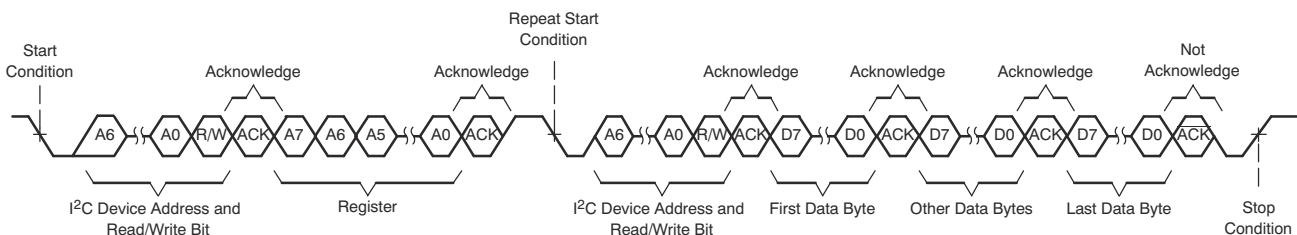

**Figure 6-105. I<sup>2</sup>C Multiple-Byte Read Transfer**

### 6.5.1.2 SPI Control Interface

The general SPI protocol allows full-duplex, synchronous, serial communication between a host processor (the controller) and peripheral devices. The SPI controller (in this case, the host processor) generates the synchronizing clock (driven on to SCLK) and initiates transmissions by taking the peripheral-select pin CSZ from high to low. The SPI peripheral devices (such as the TAD5112-Q1) depend on a controller device to start and synchronize transmissions. A transmission begins when initiated by an SPI controller. The byte from the SPI controller begins shifting in on the peripheral PICO pin under the control of the controller serial clock (driven onto SCLK). When the byte shifts in on the PICO pin, a byte shifts out on the POCI pin to the controller shift register.

Refer to [Table 6-71](#) to configure the device for SPI control. [Table 6-71](#) mentions the pin assignment for SPI mode of control.

**Table 6-71. Pin Assignments for SPI Control**


| Pin Number | Pin Name | Pin Name in SPI Mode | Description               |
|------------|----------|----------------------|---------------------------|
| 7          | SCL      | SCLK                 | SPI serial bit clock      |
| 8          | SDA      | PICO                 | SPI peripheral input pin  |
| 11         | GP01     | POCI                 | SPI peripheral output pin |
| 12         | GPI1     | CSZ                  | SPI chip select pin       |

The TAD5112-Q1 supports a standard SPI control protocol with a clock polarity setting of 0 (typical microprocessor SPI control bit CPOL = 0) and a clock phase setting of 1 (typical microprocessor SPI control bit CPHA = 1). The CSZ pin can remain low between transmissions; however, the device only interprets the first eight bits transmitted after the falling edge of CSZ as a command byte, and the next eight bits as a data byte only if writing to a register. The device is entirely controlled by registers. Reading and writing these registers is accomplished by an 8-bit command sent to the PICO pin prior to the data for that register. [Table 6-72](#) shows the command structure. The first seven bits specify the address of the register that is being written or read, from 0 to 127 (decimal). The command word ends with an R/W bit, which specifies the direction of data flow on the serial bus.


In the case of a register write, set the R/W bit to 0. A second byte of data is sent to the PICO pin and contains the data to be written to the register. A register read is accomplished in a similar fashion. The 8-bit command word sends the 7-bit register address, followed by the R/W bit equal to 1 to signify a register read. The 8-bit register data is then clocked out of the device on the POCI pin during the second eight SCLK clocks in the frame. The device supports sequential SPI addressing for a multiple-byte data write/read transfer until the CSZ pin is pulled high. A multiple-byte data write or read transfer is identical to a single-byte data write or read transfer, respectively, until all data byte transfers complete. The host device must keep the CSZ pin low during all data byte transfers. [Figure 6-106](#) shows the single-byte write transfer and [Figure 6-107](#) shows the single-byte read transfer.

**Table 6-72. SPI Command Word**

| BIT 7   | BIT 6   | BIT 5   | BIT 4   | BIT 3   | BIT 2   | BIT 1   | BIT 0 |
|---------|---------|---------|---------|---------|---------|---------|-------|
| ADDR(6) | ADDR(5) | ADDR(4) | ADDR(3) | ADDR(2) | ADDR(1) | ADDR(0) | R/WZ  |

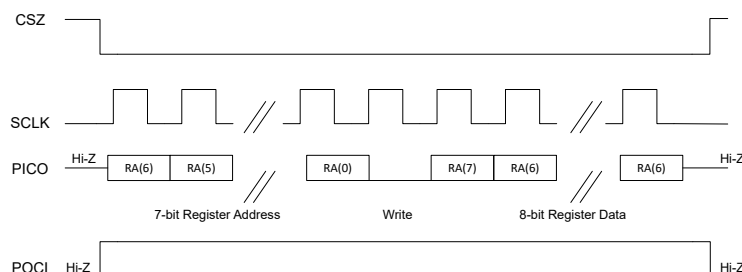

**Figure 6-106. SPI Single-Byte Write Transfer**

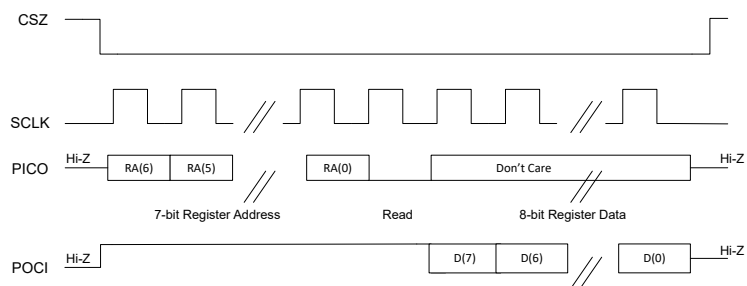

**Figure 6-107. SPI Single-Byte Read Transfer**

## 7 Register Maps

This section describes the control registers for the device in detail. All these registers are eight bits in width and allocated to device configuration and programmable coefficients settings. These registers are mapped internally using a page scheme that can be controlled using either I<sup>2</sup>C or SPI communication to the device. Each page contains 128 bytes of registers. All device configuration registers are stored in page 0, page 1 and page 3. Page 0 is the default page setting at power up (and after a software reset). The device current page can be switch to a new desired page by using the PAGE[7:0] bits located in register 0 of every page.

Do not read from or write to reserved pages or reserved registers. Write only default values for the reserved bits in the valid registers.

The procedure for register access across pages is:

- Select page N (write data *N* to register 0 regardless of the current page number)
- Read or write data from or to valid registers in page N
- Select the new page M (write data *M* to register 0 regardless of the current page number)
- Read or write data from or to valid registers in page M
- Repeat as needed

### 7.1 Device Configuration Registers

This section describes the device configuration registers for Page 0, Page 1 and Page 3 of the device. [Table 7-1](#) lists the access codes for the device registers.

**Table 7-1. Access Type Codes**

| Access Type | Code | Description   |
|-------------|------|---------------|
| Read Type   |      |               |
| R           | R    | Read          |
| R-W         | R/W  | Read or write |
| Write Type  |      |               |
| W           | W    | Write         |

### 7.1.1 TAD5212\_B0\_P0 Registers

Table 7-2 lists the memory-mapped registers for the TAD5212\_B0\_P0 registers. All register offset addresses not listed in Table 7-2 are considered as reserved locations and the register contents are not to be modified.

**Table 7-2. TAD5212\_B0\_P0 Registers**

| Address | Acronym         | Register Name                               | Reset Value | Section                          |
|---------|-----------------|---------------------------------------------|-------------|----------------------------------|
| 0x0     | PAGE_CFG        | Device page register                        | 0x00        | <a href="#">Section 7.1.1.1</a>  |
| 0x1     | SW_RESET        | Software reset register                     | 0x00        | <a href="#">Section 7.1.1.2</a>  |
| 0x2     | DEV_MISC_CFG    | Device miscellaneous configuration register | 0x00        | <a href="#">Section 7.1.1.3</a>  |
| 0x3     | AVDD_IOVDD_STS  | Supply status Register                      | 0x00        | <a href="#">Section 7.1.1.4</a>  |
| 0x4     | MISC_CFG        | Miscellaneous configuration register        | 0x00        | <a href="#">Section 7.1.1.5</a>  |
| 0x5     | MISC_CFG1       | Miscellaneous configuration register 1      | 0x15        | <a href="#">Section 7.1.1.6</a>  |
| 0x6     | DAC_CFG_A0      | DAC de-pop configuration register           | 0x35        | <a href="#">Section 7.1.1.7</a>  |
| 0x7     | MISC_CFG0       | Miscellaneous configuration register 0      | 0x00        | <a href="#">Section 7.1.1.8</a>  |
| 0xA     | GPIO1_CFG0      | GPIO1 configuration register 0              | 0x32        | <a href="#">Section 7.1.1.9</a>  |
| 0xB     | GPIO2_CFG0      | GPIO2 configuration register 0              | 0x00        | <a href="#">Section 7.1.1.10</a> |
| 0xC     | GPO1_CFG0       | GPO1 configuration register 0               | 0x00        | <a href="#">Section 7.1.1.11</a> |
| 0xD     | GPI_CFG         | GPI1 configuration register 0               | 0x00        | <a href="#">Section 7.1.1.12</a> |
| 0xE     | GPO_GPI_VAL     | GPIO, GPO output value register             | 0x00        | <a href="#">Section 7.1.1.13</a> |
| 0xF     | INTF_CFG0       | Interface configuration register 0          | 0x00        | <a href="#">Section 7.1.1.14</a> |
| 0x10    | INTF_CFG1       | Interface configuration register 1          | 0x52        | <a href="#">Section 7.1.1.15</a> |
| 0x11    | INTF_CFG2       | Interface configuration register 2          | 0x80        | <a href="#">Section 7.1.1.16</a> |
| 0x12    | INTF_CFG3       | Interface configuration register 3          | 0x00        | <a href="#">Section 7.1.1.17</a> |
| 0x13    | INTF_CFG4       | Interface configuration register 4          | 0x00        | <a href="#">Section 7.1.1.18</a> |
| 0x14    | INTF_CFG5       | Interface configuration register 5          | 0x00        | <a href="#">Section 7.1.1.19</a> |
| 0x15    | INTF_CFG6       | Interface configuration register 6          | 0x00        | <a href="#">Section 7.1.1.20</a> |
| 0x18    | ASI_CFG0        | ASI configuration register 0                | 0x40        | <a href="#">Section 7.1.1.21</a> |
| 0x19    | ASI_CFG1        | ASI configuration register 1                | 0x00        | <a href="#">Section 7.1.1.22</a> |
| 0x1A    | PASI_CFG0       | Primary ASI configuration register 0        | 0x30        | <a href="#">Section 7.1.1.23</a> |
| 0x1B    | PASI_TX_CFG0    | PASI TX configuration register 0            | 0x00        | <a href="#">Section 7.1.1.24</a> |
| 0x1C    | PASI_TX_CFG1    | PASI TX configuration register 1            | 0x00        | <a href="#">Section 7.1.1.25</a> |
| 0x1D    | PASI_TX_CFG2    | PASI TX configuration register 2            | 0x00        | <a href="#">Section 7.1.1.26</a> |
| 0x1E    | PASI_TX_CH1_CFG | PASI TX Channel 1 configuration register    | 0x20        | <a href="#">Section 7.1.1.27</a> |
| 0x1F    | PASI_TX_CH2_CFG | PASI TX Channel 2 configuration register    | 0x21        | <a href="#">Section 7.1.1.28</a> |
| 0x20    | PASI_TX_CH3_CFG | PASI TX Channel 3 configuration register    | 0x02        | <a href="#">Section 7.1.1.29</a> |
| 0x21    | PASI_TX_CH4_CFG | PASI TX Channel 4 configuration register    | 0x03        | <a href="#">Section 7.1.1.30</a> |
| 0x22    | PASI_TX_CH5_CFG | PASI TX Channel 5 configuration register    | 0x04        | <a href="#">Section 7.1.1.31</a> |
| 0x23    | PASI_TX_CH6_CFG | PASI TX Channel 6 configuration register    | 0x05        | <a href="#">Section 7.1.1.32</a> |
| 0x24    | PASI_TX_CH7_CFG | PASI TX Channel 7 configuration register    | 0x06        | <a href="#">Section 7.1.1.33</a> |
| 0x25    | PASI_TX_CH8_CFG | PASI TX Channel 8 configuration register    | 0x07        | <a href="#">Section 7.1.1.34</a> |
| 0x26    | PASI_RX_CFG0    | PASI RX configuration register 0            | 0x00        | <a href="#">Section 7.1.1.35</a> |
| 0x27    | PASI_RX_CFG1    | PASI RX configuration register 1            | 0x00        | <a href="#">Section 7.1.1.36</a> |
| 0x28    | PASI_RX_CH1_CFG | PASI RX Channel 1 configuration register    | 0x20        | <a href="#">Section 7.1.1.37</a> |
| 0x29    | PASI_RX_CH2_CFG | PASI RX Channel 2 configuration register    | 0x21        | <a href="#">Section 7.1.1.38</a> |
| 0x2A    | PASI_RX_CH3_CFG | PASI RX Channel 3 configuration register    | 0x02        | <a href="#">Section 7.1.1.39</a> |
| 0x2B    | PASI_RX_CH4_CFG | PASI RX Channel 4 configuration register    | 0x03        | <a href="#">Section 7.1.1.40</a> |
| 0x2C    | PASI_RX_CH5_CFG | PASI RX Channel 5 configuration register    | 0x04        | <a href="#">Section 7.1.1.41</a> |
| 0x2D    | PASI_RX_CH6_CFG | PASI RX Channel 6 configuration register    | 0x05        | <a href="#">Section 7.1.1.42</a> |

**Table 7-2. TAD5212\_B0\_P0 Registers (continued)**

| Address | Acronym          | Register Name                                  | Reset Value | Section                          |
|---------|------------------|------------------------------------------------|-------------|----------------------------------|
| 0x2E    | PASI_RX_CH7_CFG  | PASI RX Channel 7 configuration register       | 0x06        | <a href="#">Section 7.1.1.43</a> |
| 0x2F    | PASI_RX_CH8_CFG  | PASI RX Channel 8 configuration register       | 0x07        | <a href="#">Section 7.1.1.44</a> |
| 0x32    | CLK_CFG0         | Clock configuration register 0                 | 0x00        | <a href="#">Section 7.1.1.45</a> |
| 0x33    | CLK_CFG1         | Clock configuration register 1                 | 0x00        | <a href="#">Section 7.1.1.46</a> |
| 0x34    | CLK_CFG2         | Clock configuration register 2                 | 0x40        | <a href="#">Section 7.1.1.47</a> |
| 0x35    | CNT_CLK_CFG0     | Controller mode clock configuration register 0 | 0x00        | <a href="#">Section 7.1.1.48</a> |
| 0x36    | CNT_CLK_CFG1     | Controller mode clock configuration register 1 | 0x00        | <a href="#">Section 7.1.1.49</a> |
| 0x37    | CNT_CLK_CFG2     | Controller mode clock configuration register 2 | 0x20        | <a href="#">Section 7.1.1.50</a> |
| 0x38    | CNT_CLK_CFG3     | Controller mode clock configuration register 3 | 0x00        | <a href="#">Section 7.1.1.51</a> |
| 0x39    | CNT_CLK_CFG4     | Controller mode clock configuration register 4 | 0x00        | <a href="#">Section 7.1.1.52</a> |
| 0x3A    | CNT_CLK_CFG5     | Controller mode clock configuration register 5 | 0x00        | <a href="#">Section 7.1.1.53</a> |
| 0x3B    | CNT_CLK_CFG6     | Controller mode clock configuration register 6 | 0x00        | <a href="#">Section 7.1.1.54</a> |
| 0x3C    | CLK_ERR_STS0     | Clock error and status register 0              | 0x00        | <a href="#">Section 7.1.1.55</a> |
| 0x3D    | CLK_ERR_STS1     | Clock error and status register 1              | 0x00        | <a href="#">Section 7.1.1.56</a> |
| 0x3E    | CLK_DET_STS0     | Clock ratio detection register 0               | 0x00        | <a href="#">Section 7.1.1.57</a> |
| 0x3F    | CLK_DET_STS1     | Clock ratio detection register 1               | 0x00        | <a href="#">Section 7.1.1.58</a> |
| 0x40    | CLK_DET_STS2     | Clock ratio detection register 2               | 0x00        | <a href="#">Section 7.1.1.59</a> |
| 0x41    | CLK_DET_STS3     | Clock ratio detection register 3               | 0x00        | <a href="#">Section 7.1.1.60</a> |
| 0x42    | INT_CFG          | Interrupt configuration register               | 0x00        | <a href="#">Section 7.1.1.61</a> |
| 0x43    | DAC_FLT_CFG      | Interrupt configuration register               | 0x54        | <a href="#">Section 7.1.1.62</a> |
| 0x4D    | VREF_MICBIAS_CFG | VREF and MICBIAS configuration register        | 0x00        | <a href="#">Section 7.1.1.63</a> |
| 0x4E    | PWR_TUNE_CFG0    | Power tune configuration register 0            | 0x00        | <a href="#">Section 7.1.1.64</a> |
| 0x4F    | PWR_TUNE_CFG1    | Power tune configuration register 1            | 0x00        | <a href="#">Section 7.1.1.65</a> |
| 0x52    | ADC_CH1_CFG2     | ADC Channel 1 configuration register 2         | 0xA1        | <a href="#">Section 7.1.1.66</a> |
| 0x53    | ADC_CH1_CFG3     | ADC Channel 1 configuration register 3         | 0x80        | <a href="#">Section 7.1.1.67</a> |
| 0x54    | ADC_CH1_CFG4     | ADC Channel 1 configuration register 4         | 0x00        | <a href="#">Section 7.1.1.68</a> |
| 0x57    | ADC_CH2_CFG2     | Channel 2 configuration register 2             | 0xA1        | <a href="#">Section 7.1.1.69</a> |
| 0x58    | ADC_CH2_CFG3     | ADC Channel 2 configuration register 3         | 0x80        | <a href="#">Section 7.1.1.70</a> |
| 0x59    | ADC_CH2_CFG4     | ADC Channel 2 configuration register 4         | 0x00        | <a href="#">Section 7.1.1.71</a> |
| 0x5A    | ADC_CH3_CFG0     | ADC Channel 3 configuration register 0         | 0x00        | <a href="#">Section 7.1.1.72</a> |
| 0x5B    | ADC_CH3_CFG2     | ADC Channel 3 configuration register 2         | 0xA1        | <a href="#">Section 7.1.1.73</a> |
| 0x5C    | ADC_CH3_CFG3     | ADC Channel 3 configuration register 3         | 0x80        | <a href="#">Section 7.1.1.74</a> |
| 0x5D    | ADC_CH3_CFG4     | ADC Channel 3 configuration register 4         | 0x00        | <a href="#">Section 7.1.1.75</a> |
| 0x5E    | ADC_CH4_CFG0     | ADC Channel 4 configuration register 0         | 0x00        | <a href="#">Section 7.1.1.76</a> |
| 0x5F    | ADC_CH4_CFG2     | Channel 4 configuration register 2             | 0xA1        | <a href="#">Section 7.1.1.77</a> |
| 0x60    | ADC_CH4_CFG3     | ADC Channel 4 configuration register 3         | 0x80        | <a href="#">Section 7.1.1.78</a> |
| 0x61    | ADC_CH4_CFG4     | ADC Channel 4 configuration register 4         | 0x00        | <a href="#">Section 7.1.1.79</a> |
| 0x64    | OUT1x_CFG0       | Channel OUT1x configuration register 0         | 0x20        | <a href="#">Section 7.1.1.80</a> |
| 0x65    | OUT1x_CFG1       | Channel OUT1x configuration register 1         | 0x20        | <a href="#">Section 7.1.1.81</a> |
| 0x66    | OUT1x_CFG2       | Channel OUT2x configuration register 2         | 0x20        | <a href="#">Section 7.1.1.82</a> |
| 0x67    | DAC_CH1A_CFG0    | DAC Channel 1A configuration register 0        | 0xC9        | <a href="#">Section 7.1.1.83</a> |
| 0x68    | DAC_CH1A_CFG1    | DAC Channel 1A configuration register 1        | 0x80        | <a href="#">Section 7.1.1.84</a> |
| 0x69    | DAC_CH1B_CFG0    | DAC Channel 1B configuration register 0        | 0xC9        | <a href="#">Section 7.1.1.85</a> |
| 0x6A    | DAC_CH1B_CFG1    | DAC Channel 1B configuration register 1        | 0x80        | <a href="#">Section 7.1.1.86</a> |
| 0x6B    | OUT2x_CFG0       | Channel OUT2x configuration register 0         | 0x20        | <a href="#">Section 7.1.1.87</a> |



**Table 7-2. TAD5212\_B0\_P0 Registers (continued)**

| Address | Acronym       | Register Name                           | Reset Value | Section                           |
|---------|---------------|-----------------------------------------|-------------|-----------------------------------|
| 0x6C    | OUT2x_CFG1    | Channel OUT2x configuration register 1  | 0x20        | <a href="#">Section 7.1.1.88</a>  |
| 0x6D    | OUT2x_CFG2    | Channel OUT2x configuration register 2  | 0x20        | <a href="#">Section 7.1.1.89</a>  |
| 0x6E    | DAC_CH2A_CFG0 | DAC Channel 2A configuration register 0 | 0xC9        | <a href="#">Section 7.1.1.90</a>  |
| 0x6F    | DAC_CH2A_CFG1 | DAC Channel 2A configuration register 1 | 0x80        | <a href="#">Section 7.1.1.91</a>  |
| 0x70    | DAC_CH2B_CFG0 | DAC Channel 2B configuration register 0 | 0xC9        | <a href="#">Section 7.1.1.92</a>  |
| 0x71    | DAC_CH2B_CFG1 | DAC Channel 2B configuration register 1 | 0x80        | <a href="#">Section 7.1.1.93</a>  |
| 0x72    | DSP_CFG0      | DSP configuration register 0            | 0x18        | <a href="#">Section 7.1.1.94</a>  |
| 0x73    | DSP_CFG1      | DSP configuration register 0            | 0x18        | <a href="#">Section 7.1.1.95</a>  |
| 0x76    | CH_EN         | Channel enable configuration register   | 0xCC        | <a href="#">Section 7.1.1.96</a>  |
| 0x77    | DYN_PUPD_CFG  | Power up configuration register         | 0x00        | <a href="#">Section 7.1.1.97</a>  |
| 0x78    | PWR_CFG       | Power up configuration register         | 0x00        | <a href="#">Section 7.1.1.98</a>  |
| 0x79    | DEV_STS0      | Device status value register 0          | 0x00        | <a href="#">Section 7.1.1.99</a>  |
| 0x7A    | DEV_STS1      | Device status value register 1          | 0x80        | <a href="#">Section 7.1.1.100</a> |
| 0x7E    | I2C_CKSUM     | I <sup>2</sup> C checksum register      | 0x00        | <a href="#">Section 7.1.1.101</a> |

#### 7.1.1.1 PAGE\_CFG Register (Address = 0x0) [Reset = 0x00]

PAGE\_CFG is shown in [Table 7-3](#).

Return to the [Summary Table](#).

The device memory map is divided into pages. This register sets the page.

**Table 7-3. PAGE\_CFG Register Field Descriptions**

| Bit | Field     | Type | Reset     | Description                                                                                                                      |
|-----|-----------|------|-----------|----------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PAGE[7:0] | R/W  | 00000000b | These bits set the device page.<br>0d = Page 0<br>1d = Page 1<br>2d to 254d = Page 2 to page 254 respectively<br>255d = Page 255 |

#### 7.1.1.2 SW\_RESET Register (Address = 0x1) [Reset = 0x00]

SW\_RESET is shown in [Table 7-4](#).

Return to the [Summary Table](#).

This register is the software reset register. Asserting a software reset places all register values in default power-on-reset (POR) state.

**Table 7-4. SW\_RESET Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                 |
|-----|----------|------|-------|-------------------------------------------------------------------------------------------------------------|
| 7-1 | RESERVED | R    | 0b    | Reserved bits; Write only reset value                                                                       |
| 0   | SW_RESET | R/W  | 0b    | Software reset. This bit is self clearing.<br>0d = Do not reset<br>1d = Reset all registers to reset values |

#### 7.1.1.3 DEV\_MISC\_CFG Register (Address = 0x2) [Reset = 0x00]

DEV\_MISC\_CFG is shown in [Table 7-5](#).

Return to the [Summary Table](#).

This register configures miscellaneous device registers.

**Table 7-5. DEV\_MISC\_CFG Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                                                               |
|-----|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED           | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                    |
| 5-4 | VREF_QCHG[1:0]     | R/W  | 00b   | The duration of the quick-charge for the VREF external capacitor is set using an internal series impedance of 200Ω.<br>0d = VREF quick-charge duration of 3.5ms (typical)<br>1d = VREF quick-charge duration of 10ms (typical)<br>2d = VREF quick-charge duration of 50ms (typical)<br>3d = VREF quick-charge duration of 100ms (typical) |
| 3   | SLEEP_EXIT_VREF_EN | R/W  | 0b    | Sleep mode exit configuration<br>0d = Only DREG Enabled<br>1d = DREG and VREF enabled                                                                                                                                                                                                                                                     |
| 2   | AVDD_MODE          | R/W  | 0b    | AVDD mode configuration.<br>0d = Internal AREG regulator is used (Used for AVDD 3.3V Operation)<br>1d = AVDD 1.8V used directly for AREG (Strictly use this setting for AVDD 1.8V Operation)                                                                                                                                              |
| 1   | IOVDD_IO_MODE      | R/W  | 0b    | IOVDD mode configuration.<br>0d = IOVDD at 3.3V / 1.8V / 1.2V (speed limitation applicable for 1.8V and 1.2V Operation)<br>1d = IOVDD at 1.8V / 1.2V only (no speed limitation - Strictly don't use this setting for IOVDD 3.3V Operation).                                                                                               |
| 0   | SLEEP_ENZ          | R/W  | 0b    | Sleep mode setting.<br>0d = Device is in sleep mode<br>1d = Device is not in sleep mode                                                                                                                                                                                                                                                   |

#### 7.1.1.4 AVDD\_IOVDD\_STS Register (Address = 0x3) [Reset = 0x00]

AVDD\_IOVDD\_STS is shown in [Table 7-6](#).

Return to the [Summary Table](#).

This register contains status of the supply detection and brown-out.

**Table 7-6. AVDD\_IOVDD\_STS Register Field Descriptions**

| Bit | Field                   | Type | Reset | Description                                                                                                                     |
|-----|-------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------|
| 7   | AVDD_MODE_STS           | R    | 0b    | AVDD mode status flag register.<br>0d = AVDD_MODE as per configured<br>1d = AVDD 3.3V Operation (AVDD_MODE forced to 0d)        |
| 6   | IOVDD_IO_MODE_STS       | R    | 0b    | IOVDD mode status flag register.<br>0d = IOVDD_MODE as per configured<br>1d = IOVDD 3.3V Operation (IOVDD_IO_MODE forced to 0d) |
| 5-2 | RESERVED                | R    | 0b    | Reserved bits; Write only reset values                                                                                          |
| 1   | BRWNOUT_SHDN_STS        | R    | 0b    | Brownout shutdown status<br>0d = No brownout shutdown<br>1d = Brownout shutdown                                                 |
| 0   | BRWNOUT_SHDN_EXIT_SLEEP | R/W  | 0b    | Brownout shutdown sleep exit config<br>0d = Stay in sleep mode<br>1d = Exit sleep mode                                          |

#### 7.1.1.5 MISC\_CFG Register (Address = 0x4) [Reset = 0x00]

MISC\_CFG is shown in [Table 7-7](#).

Return to the [Summary Table](#).

This register configures miscellaneous configuration registers.

**Table 7-7. MISC\_CFG Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                       |
|-----|----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                              |
| 6   | IGNORE_CLK_ERR | R/W  | 0b    | Clock error detection action<br>0b = Clock error enabled<br>1b = Clock error disabled                                                                                                                                             |
| 5   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                              |
| 4   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                              |
| 3   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                              |
| 2   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                              |
| 1   | I2C_BRDCAST_EN | R/W  | 0b    | I <sup>2</sup> C broadcast addressing setting.<br>0d = I <sup>2</sup> C broadcast mode disabled<br>1d = I <sup>2</sup> C broadcast mode enabled; the I <sup>2</sup> C target address is fixed with pin-controlled LSB bits as '0' |
| 0   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                              |

#### 7.1.1.6 MISC\_CFG1 Register (Address = 0x5) [Reset = 0x15]

MISC\_CFG1 is shown in [Table 7-8](#).

Return to the [Summary Table](#).

This register configures the miscellaneous configuration register 1.

**Table 7-8. MISC\_CFG1 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                               |
|-----|-------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | INCAP_QCHG[1:0]   | R/W  | 00b   | The duration of the quick-charge for the external AC-coupling capacitor is set using an internal series impedance of 800Ω.<br>0d = INxP, INxM quick-charge duration of 2.5ms (typical)<br>1d = INxP, INxM quick-charge duration of 12.5ms (typical)<br>2d = INxP, INxM quick-charge duration of 25ms (typical)<br>3d = INxP, INxM quick-charge duration of 50ms (typical) |
| 5-4 | SHDN_CFG[1:0]     | R/W  | 01b   | Shutdown configuration.<br>0d = DREG is powered down immediately after IOVDD is deasserted<br>1d = DREG remains active to enable a clean shut down until a time-out (DREG_KA_TIME) is reached; after the time-out period, DREG is forced to power off<br>2d = DREG remains active until the device cleanly shuts down<br>3d = Reserved; Don't use                         |
| 3-2 | DREG_KA_TIME[1:0] | R/W  | 01b   | These bits set how long DREG remains active after IOVDD is deasserted.<br>0d = DREG remains active for 30ms (typical)<br>1d = DREG remains active for 25ms (typical)<br>2d = DREG remains active for 10ms (typical)<br>3d = DREG remains active for 5ms (typical)                                                                                                         |
| 1-0 | RESERVED          | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                    |

#### 7.1.1.7 DAC\_CFG\_A0 Register (Address = 0x6) [Reset = 0x35]

DAC\_CFG\_A0 is shown in [Table 7-9](#).

Return to the [Summary Table](#).

This register configures the device DAC de-pop.

**Table 7-9. DAC\_CFG\_A0 Register Field Descriptions**

| Bit | Field                    | Type | Reset | Description                                                                                                                                                                                   |
|-----|--------------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RSERIES_DE_POP_INT[1:0]  | R/W  | 00b   | HP Amp series resistor select config.<br>0d = 1K<br>1d = 0.5K<br>2d = 0.33K<br>3d = 0.25k                                                                                                     |
| 5-4 | RSERIES_DE_POP_MID[1:0]  | R/W  | 11b   | HP Amp series resistor select config.<br>0d = 1K<br>1d = 0.5K<br>2d = 0.33K<br>3d = 0.25k                                                                                                     |
| 3-0 | PWR_UP_TIME_DE_PO P[3:0] | R/W  | 0101b | HP Amp external cap charging time config.<br>0d = 2ms<br>1d = 4ms<br>2d = 8ms<br>3d = 16ms<br>4d = 50ms<br>5d = 100ms<br>6d = 250ms<br>7d = 500ms<br>8d = 1s<br>9d = 5s<br>10d-15d = Reserved |

**7.1.1.8 MISC\_CFG0 Register (Address = 0x7) [Reset = 0x00]**

MISC\_CFG0 is shown in [Table 7-10](#).

Return to the [Summary Table](#).

This register configures the miscellaneous configuration register 0.

**Table 7-10. MISC\_CFG0 Register Field Descriptions**

| Bit | Field                    | Type | Reset | Description                                                                                                               |
|-----|--------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------|
| 7   | DAC_ST_W_CAP_DIS         | R/W  | 0b    | DAC start with dc blocking capacitor discharge sequence.<br>0d = disable<br>1d = enable                                   |
| 6   | DAC_DLYD_PWRUP           | R/W  | 0b    | DAC power up delayed config.<br>0d = disable<br>1d = enable (Delay power-up by based on DAC_DLYD_PWRUP_TIME config)       |
| 5   | DAC_DLYD_PWRUP_TIME      | R/W  | 0b    | DAC power up delayed time config.<br>0d = 64-128ms<br>1d = 256-512ms                                                      |
| 4   | HW_RESET_ON_CLK_S TOP_EN | R/W  | 0b    | Assertion of Hard Reset when clock selected by CLK_SRC_SEL is not available for 2ms config<br>0d = disable<br>1d = enable |
| 3-0 | RESERVED                 | R    | 0b    | Reserved bits; Write only reset values                                                                                    |

**7.1.1.9 GPIO1\_CFG0 Register (Address = 0xA) [Reset = 0x32]**

GPIO1\_CFG0 is shown in [Table 7-11](#).

Return to the [Summary Table](#).

This register is the GPIO1 configuration register 0.

**Table 7-11. GPIO1\_CFG0 Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | GPIO1_CFG[3:0] | R/W  | 0011b | GPIO1 configuration.<br>0d = GPIO1 is disabled<br>1d = GPIO1 is configured as a general-purpose input (GPI) or any other input function<br>2d = GPIO1 is configured as a general-purpose output (GPO)<br>3d = GPIO1 is configured as a chip interrupt output (IRQ)<br>4d = GPIO1 is configured as a PDM clock output (PDMCLK)<br>5d = GPIO1 is configured as primary ASI DOUT<br>6d = GPIO1 is configured as primary ASI DOUT2<br>7d = GPIO1 is configured as secondary ASI DOUT<br>8d = GPIO1 is configured as secondary ASI DOUT2<br>9d = GPIO1 is configured as secondary ASI BCLK output<br>10d = GPIO1 is configured as secondary ASI FSYNC output<br>11d = GPIO1 is configured as general purpose CLKOUT<br>12d = GPIO1 is configured as PASI DOUT and SASI DOUT muxed<br>13d = GPIO1 is configured as DAISY_OUT for DIN Daisy<br>14d to 15d = Reserved |
| 3   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 2-0 | GPIO1_DRV[2:0] | R/W  | 010b  | GPIO1 output drive configuration. (Not valid if GPIO1_CFG configured as I <sup>2</sup> S out)<br>0d = Hi-Z output<br>1d = Drive active low and active high<br>2d = Drive active low and weak high<br>3d = Drive active low and Hi-Z<br>4d = Drive weak low and active high<br>5d = Drive Hi-Z and active high<br>6d to 7d = Reserved; Don't use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

#### 7.1.1.10 GPIO2\_CFG0 Register (Address = 0xB) [Reset = 0x00]

GPIO2\_CFG0 is shown in [Table 7-12](#).

Return to the [Summary Table](#).

This register is the GPIO2 configuration register 0.

**Table 7-12. GPIO2\_CFG0 Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | GPIO2_CFG[3:0] | R/W  | 0000b | GPIO2 configuration.<br>0d = GPIO2 is disabled<br>1d = GPIO2 is configured as a general-purpose input (GPI) or any other input function<br>2d = GPIO2 is configured as a general-purpose output (GPO)<br>3d = GPIO2 is configured as a chip interrupt output (IRQ)<br>4d = GPIO2 is configured as a PDM clock output (PDMCLK)<br>5d = GPIO2 is configured as primary ASI DOUT<br>6d = GPIO2 is configured as primary ASI DOUT2<br>7d = GPIO2 is configured as secondary ASI DOUT<br>8d = GPIO2 is configured as secondary ASI DOUT2<br>9d = GPIO2 is configured as secondary ASI BCLK output<br>10d = GPIO2 is configured as secondary ASI FSYNC output<br>11d = GPIO2 is configured as general purpose CLKOUT<br>12d = GPIO2 is configured as PASI DOUT and SASI DOUT muxed<br>13d = GPIO2 is configured as DAISY_OUT for DIN Daisy<br>14d to 15d = Reserved |
| 3   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Table 7-12. GPIO2\_CFG0 Register Field Descriptions (continued)**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                     |
|-----|----------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2-0 | GPIO2_DRV[2:0] | R/W  | 000b  | GPIO2 output drive configuration. (Not valid if GPIO2_CFG configured as I <sup>2</sup> S out)<br>0d = Hi-Z output<br>1d = Drive active low and active high<br>2d = Drive active low and weak high<br>3d = Drive active low and Hi-Z<br>4d = Drive weak low and active high<br>5d = Drive Hi-Z and active high<br>6d to 7d = Reserved; Don't use |

**7.1.1.11 GPO1\_CFG0 Register (Address = 0xC) [Reset = 0x00]**

GPO1\_CFG0 is shown in [Table 7-13](#).

Return to the [Summary Table](#).

This register is the GPO1 configuration register 0.

**Table 7-13. GPO1\_CFG0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | GPO1_CFG[3:0] | R/W  | 0000b | GPO1 configuration. (For SPI mode, this pin act as POCI and the below configuration settings are not applicable) (Always buskeeper en is not supported when used as DOUT)<br>0d = GPO1 is disabled<br>1d = Reserved<br>2d = GPO1 is configured as a general-purpose output (GPO)<br>3d = GPO1 is configured as a chip interrupt output (IRQ)<br>4d = GPO1 is configured as a PDM clock output (PDMCLK)<br>5d = GPO1 is configured as primary ASI DOUT<br>6d = GPO1 is configured as primary ASI DOUT2<br>7d = GPO1 is configured as secondary ASI DOUT<br>8d = GPO1 is configured as secondary ASI DOUT2<br>9d = GPO1 is configured as secondary ASI BCLK output<br>10d = GPO1 is configured as secondary ASI FSYNC output<br>11d = GPO1 is configured as general purpose CLKOUT<br>12d = GPO1 is configured as PASI DOUT and SASI DOUT muxed<br>13d = GPO1 is configured as DAISY_OUT for DIN Daisy<br>14d to 15d = Reserved |
| 3   | RESERVED      | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 2-0 | GPO1_DRV[2:0] | R/W  | 000b  | GPO1 output drive configuration. (Not valid if GPO1_CFG configured as I <sup>2</sup> S out) (For SPI mode, this pin act as CSZ and the below configuration settings are not applicable)<br>0d = Hi-Z output<br>1d = Drive active low and active high<br>2d = Drive active low and weak high<br>3d = Drive active low and Hi-Z<br>4d = Drive weak low and active high<br>5d = Drive Hi-Z and active high<br>6d to 7d = Reserved; Don't use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**7.1.1.12 GPI\_CFG Register (Address = 0xD) [Reset = 0x00]**

GPI\_CFG is shown in [Table 7-14](#).

Return to the [Summary Table](#).

This register is the GPI1 configuration register 0.

**Table 7-14. GPI\_CFG Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                                                                                                      |
|-----|----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | RESERVED | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                           |
| 1   | GPI1_CFG | R/W  | 0b    | GPI1 configuration. (For SPI mode, this pin act as CSZ and the below configuration settings are not applicable)<br>0d = GPI1 is disabled<br>1d = GPI1 is configured as a general-purpose input (GPI) or any other input function |
| 0   | RESERVED | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                             |

#### 7.1.1.13 GPO\_GPI\_VAL Register (Address = 0xE) [Reset = 0x00]

GPO\_GPI\_VAL is shown in [Table 7-15](#).

Return to the [Summary Table](#).

This register is the GPIO and GPO output value register.

**Table 7-15. GPO\_GPI\_VAL Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                                                                        |
|-----|-----------|------|-------|------------------------------------------------------------------------------------------------------------------------------------|
| 7   | GPIO1_VAL | R/W  | 0b    | GPIO1 output value when configured as a GPO.<br>0d = Drive the output with a value of 0<br>1d = Drive the output with a value of 1 |
| 6   | GPIO2_VAL | R/W  | 0b    | GPIO2 output value when configured as a GPO.<br>0d = Drive the output with a value of 0<br>1d = Drive the output with a value of 1 |
| 5   | GPO1_VAL  | R/W  | 0b    | GPO1 output value when configured as a GPO.<br>0d = Drive the output with a value of 0<br>1d = Drive the output with a value of 1  |
| 4   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                                               |
| 3   | GPIO1_MON | R    | 0b    | GPIO1 monitor value when configured as a GPI.<br>0d = Input monitor value 0<br>1d = Input monitor value 1                          |
| 2   | GPIO2_MON | R    | 0b    | GPIO2 monitor value when configured as a GPI.<br>0d = Input monitor value 0<br>1d = Input monitor value 1                          |
| 1   | GPI1_MON  | R    | 0b    | GPI1 monitor value when configured as a GPI.<br>0d = Input monitor value 0<br>1d = Input monitor value 1                           |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                                               |

#### 7.1.1.14 INTF\_CFG0 Register (Address = 0xF) [Reset = 0x00]

INTF\_CFG0 is shown in [Table 7-16](#).

Return to the [Summary Table](#).

This register is the interface configuration register 0.

**Table 7-16. INTF\_CFG0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                  |
|-----|---------------|------|-------|----------------------------------------------------------------------------------------------|
| 7   | RESERVED      | R    | 0b    | Reserved bit; Write only reset value                                                         |
| 6-5 | CCLK_SEL[1:0] | R/W  | 00b   | CCLK select configuration.<br>0d = CCLK is disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1 |

**Table 7-16. INTF\_CFG0 Register Field Descriptions (continued)**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                      |
|-----|--------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-2 | PASI_DIN2_SEL[2:0] | R/W  | 000b  | Primary ASI DIN2 select configuration.<br>0d = Primary ASI DIN2 is disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1<br>4d = DOUT<br>5d = Primary ASI DIN<br>6d to 7d = Reserved |
| 1   | PASI_BCLK_SEL      | R/W  | 0b    | Primary ASI BCLK select configuration.<br>0d = Primary ASI BCLK is BCLK<br>1d = Primary ASI BCLK is Secondary ASI BCLK                                                           |
| 0   | PASI_FSYNC_SEL     | R/W  | 0b    | Primary ASI FSYNC select configuration.<br>0d = Primary ASI FSYNC is FSYNC<br>1d = Primary ASI FSYNC is Secondary ASI FSYNC                                                      |

**7.1.1.15 INTF\_CFG1 Register (Address = 0x10) [Reset = 0x52]**

INTF\_CFG1 is shown in [Table 7-17](#).

Return to the [Summary Table](#).

This register is the interface configuration register 1.

**Table 7-17. INTF\_CFG1 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----|---------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | DOUT_SEL[3:0] | R/W  | 0101b | DOUT select configuration.<br>0d = DOUT is disabled<br>1d = DOUT is configured as input<br>2d = DOUT is configured as a general-purpose output (GPO)<br>3d = DOUT is configured as a chip interrupt output (IRQ)<br>4d = DOUT is configured as a PDM clock output (PDMCLK)<br>5d = DOUT is configured as primary ASI DOUT<br>6d = DOUT is configured as primary ASI DOUT2<br>7d = DOUT is configured as secondary ASI DOUT<br>8d = DOUT is configured as secondary ASI DOUT2<br>9d = DOUT is configured as secondary ASI BCLK output<br>10d = DOUT is configured as secondary ASI FSYNC output<br>11d = DOUT is configured as general purpose CLKOUT<br>12d = DOUT is configured as PASI DOUT and SASI DOUT muxed<br>13d = DOUT is configured as DAISY_OUT for DIN Daisy<br>14d = DOUT is configured as DIN (LOOPBACK)<br>15d = Reserved |
| 3   | DOUT_VAL      | R/W  | 0b    | DOUT output value when configured as a GPO.<br>0d = Drive the output with a value of 0<br>1d = Drive the output with a value of 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 2-0 | DOUT_DRV[2:0] | R/W  | 010b  | DOUT output drive configuration.<br>0d = Hi-Z output<br>1d = Drive active low and active high<br>2d = Drive active low and weak high<br>3d = Drive active low and Hi-Z<br>4d = Drive weak low and active high<br>5d = Drive Hi-Z and active high<br>6d to 7d = Reserved; Don't use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**7.1.1.16 INTF\_CFG2 Register (Address = 0x11) [Reset = 0x80]**

INTF\_CFG2 is shown in [Table 7-18](#).

Return to the [Summary Table](#).



This register is the interface configuration register 2.

**Table 7-18. INTF\_CFG2 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                         |
|-----|---------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_DIN_EN         | R/W  | 1b    | Primary ASI DIN enable configuration.<br>0d = Primary ASI DIN is disabled<br>1d = Primary ASI DIN is enabled                                                                        |
| 6-4 | SASI_FSYNC_SEL[2:0] | R/W  | 000b  | Secondary ASI FSYNC select configuration.<br>0d = Secondary ASI disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1<br>4d = Reserved<br>5d = Primary ASI FSYNC<br>6d to 7d = Reserved |
| 3-1 | SASI_BCLK_SEL[2:0]  | R/W  | 000b  | Secondary ASI BCLK select configuration.<br>0d = Secondary ASI disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1<br>4d = Reserved<br>5d = Primary ASI BCLK<br>6d to 7d = Reserved   |
| 0   | RESERVED            | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                |

#### 7.1.1.17 INTF\_CFG3 Register (Address = 0x12) [Reset = 0x00]

INTF\_CFG3 is shown in [Table 7-19](#).

Return to the [Summary Table](#).

This register is the interface configuration register 3.

**Table 7-19. INTF\_CFG3 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                          |
|-----|--------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | SASI_DIN_SEL[2:0]  | R/W  | 000b  | Secondary ASI DIN select configuration.<br>0d = Secondary ASI DIN is disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1<br>4d = DOUT<br>5d = Primary ASI DIN<br>6d to 7d = Reserved   |
| 4-2 | SASI_DIN2_SEL[2:0] | R/W  | 000b  | Secondary ASI DIN2 select configuration.<br>0d = Secondary ASI DIN2 is disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1<br>4d = DOUT<br>5d = Primary ASI DIN<br>6d to 7d = Reserved |
| 1-0 | RESERVED           | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                               |

#### 7.1.1.18 INTF\_CFG4 Register (Address = 0x13) [Reset = 0x00]

INTF\_CFG4 is shown in [Table 7-20](#).

Return to the [Summary Table](#).

This register is the interface configuration register 4.

**Table 7-20. INTF\_CFG4 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                   |
|-----|-------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PDM_CH1_SEL       | R/W  | 0b    | PDM select configuration for channel 1 of record path.<br>0d = Reserved<br>1d = Channel 1 is digital (PDM) type on the record path                                                                                                                                            |
| 6   | PDM_CH2_SEL       | R/W  | 0b    | PDM select configuration for channel 2 of record path.<br>0d = Reserved<br>1d = Channel 2 is digital (PDM) type on the record path                                                                                                                                            |
| 5   | PDMDIN1_EDGE      | R/W  | 0b    | PDMCLK latching edge used for channel 1 and channel 2 data.<br>0d = Channel 1 data are latched on the negative edge, channel 2 data are latched on the positive edge<br>1d = Channel 1 data are latched on the positive edge, channel 2 data are latched on the negative edge |
| 4   | PDMDIN2_EDGE      | R/W  | 0b    | PDMCLK latching edge used for channel 3 and channel 4 data.<br>0d = Channel 3 data are latched on the negative edge, channel 4 data are latched on the positive edge<br>1d = Channel 3 data are latched on the positive edge, channel 4 data are latched on the negative edge |
| 3-2 | PDM_DIN1_SEL[1:0] | R/W  | 00b   | PDM data channels 1 and 2 select configuration.<br>0d = PDM data channels 1 and 2 are disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1                                                                                                                                       |
| 1-0 | PDM_DIN2_SEL[1:0] | R/W  | 00b   | PDM data channels 3 and 4 select configuration.<br>0d = PDM data channels 3 and 4 are disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1                                                                                                                                       |

**7.1.1.19 INTF\_CFG5 Register (Address = 0x14) [Reset = 0x00]**

INTF\_CFG5 is shown in [Table 7-21](#).

Return to the [Summary Table](#).

This register is the interface configuration register 5.

**Table 7-21. INTF\_CFG5 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                                                                                            |
|-----|------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PDM_DIN_SEL_OVRD | R/W  | 0b    | PDM data channels (1 and 2)/(3 and 4) select configuration override.<br>0d = No Override<br>1d = PDM_DIN1/2_SEL if configured as GPI1 is overridden as DIN                                                                                                                             |
| 6   | DOUT_WITH_DIN    | R/W  | 0b    | DOUT used as both ASI OUT and ASI IN<br>0d = DOUT based on DOUT_SEL<br>1d = DOUT used as both ASI OUT and ASI DIN                                                                                                                                                                      |
| 5-4 | PD_ADC_GPIO[1:0] | R/W  | 00b   | Power down ADC using GPIO select configuration.(ADC powered down if any one of the PD_ADC_GPIO/ADC_PDZ is configured power down)<br>0d = Power down ADC using GPIO is disabled<br>1d = Power down ADC using GPIO1<br>2d = Power down ADC using GPIO2<br>3d = Power down ADC using GPI1 |
| 3-2 | PD_DAC_GPIO[1:0] | R/W  | 00b   | Power down DAC using GPIO select configuration.(DAC powered down if any one of the PD_DAC_GPIO/DAC_PDZ is configured power down)<br>0d = Power down DAC using GPIO is disabled<br>1d = Power down DAC using GPIO1<br>2d = Power down DAC using GPIO2<br>3d = Power down DAC using GPI1 |

**Table 7-21. INTF\_CFG5 Register Field Descriptions (continued)**

| Bit | Field     | Type | Reset | Description                                                                                   |
|-----|-----------|------|-------|-----------------------------------------------------------------------------------------------|
| 1   | PLIM_GPIO | R/W  | 0b    | PLIM using GPIO1 configuration.<br>0d = PLIM using GPIO1 is disabled<br>1d = PLIM using GPIO1 |
| 0   | GPA_GPIO  | R/W  | 0b    | GPA using GPIO1 configuration.<br>0d = GPA using GPIO1 is disabled<br>1d = GPA using GPIO1    |

#### 7.1.1.20 INTF\_CFG6 Register (Address = 0x15) [Reset = 0x00]

INTF\_CFG6 is shown in [Table 7-22](#).

Return to the [Summary Table](#).

This register is the interface configuration register 6.

**Table 7-22. INTF\_CFG6 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                           |
|-----|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | EN_MBIAS_GPIO[1:0] | R/W  | 00b   | Enable MICBIAS using GPIO select configuration.<br>0d = Enable MICBIAS using GPIO is disabled<br>1d = Enable MICBIAS using GPIO1<br>2d = Enable MICBIAS using GPIO2<br>3d = Enable MICBIAS using GPI1 |
| 5-4 | RESERVED           | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                |
| 3-0 | RESERVED           | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                 |

#### 7.1.1.21 ASI\_CFG0 Register (Address = 0x18) [Reset = 0x40]

ASI\_CFG0 is shown in [Table 7-23](#).

Return to the [Summary Table](#).

This register is the ASI configuration register 0.

**Table 7-23. ASI\_CFG0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                                                                                                                |
|-----|---------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_DIS      | R/W  | 0b    | Disable or enable primary ASI (PASI).<br>0d = Primary ASI enabled<br>1d = Primary ASI disabled                                                                                                                                                             |
| 6   | SASI_DIS      | R/W  | 1b    | Disable or enable secondary ASI (SASI).<br>0d = Secondary ASI enabled<br>1d = Secondary ASI disabled                                                                                                                                                       |
| 5   | SASI_CFG_GANG | R/W  | 0b    | All configurations of secondary ASI ganged with primary ASI.<br>0d = Secondary ASI has independent configurations<br>1d = Secondary ASI configurations same as primary ASI                                                                                 |
| 4-3 | DAISY_EN[1:0] | R/W  | 00b   | Daisy chain feature enable (Only 1 ASI with 1 DOUT AND DIN available)<br>0d = Daisy chain disabled<br>1d = PASI daisy chain enabled (Secondary ASI not available)<br>2d = SASI daisy chain enabled (Primary ASI not available)<br>3d = Reserved; Don't use |

**Table 7-23. ASI\_CFG0 Register Field Descriptions (continued)**

| Bit | Field             | Type | Reset | Description                                                                                                                                                 |
|-----|-------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2-0 | DAISY_IN_SEL[2:0] | R/W  | 000b  | Daisy input select configuration.<br>0d = Daisy input disabled<br>1d = GPIO1<br>2d = GPIO2<br>3d = GPI1<br>4d = Reserved<br>5d = DIN<br>6d to 7d = Reserved |

**7.1.1.22 ASI\_CFG1 Register (Address = 0x19) [Reset = 0x00]**

ASI\_CFG1 is shown in [Table 7-24](#).

Return to the [Summary Table](#).

This register is the ASI configuration register 1.

**Table 7-24. ASI\_CFG1 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                          |
|-----|-------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | ASI_DOUT_CFG[1:0] | R/W  | 00b   | ASI data output configuration.<br>0d = 1 data output for Primary ASI and 1 data output for Secondary ASI<br>1d = 2 data outputs for Primary ASI<br>2d = 2 data outputs for Secondary ASI<br>3d = Reserved; Don't use |
| 5-4 | ASI_DIN_CFG[1:0]  | R/W  | 00b   | ASI data input configuration.<br>0d = 1 data input for Primary ASI and 1 data input for Secondary ASI<br>1d = 2 data inputs for Primary ASI<br>2d = 2 data inputs for Secondary ASI<br>3d = Reserved; Don't use      |
| 3   | DAISY_DIR         | R/W  | 0b    | Daisy direction configuration.<br>0d = ASI DOUT daisy<br>1d = ASI DIN daisy                                                                                                                                          |
| 2   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                 |
| 1   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                 |
| 0   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                 |

**7.1.1.23 PASI\_CFG0 Register (Address = 0x1A) [Reset = 0x30]**

PASI\_CFG0 is shown in [Table 7-25](#).

Return to the [Summary Table](#).

This register is the ASI configuration register 0.

**Table 7-25. PASI\_CFG0 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                    |
|-----|------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | PASI_FORMAT[1:0] | R/W  | 00b   | Primary ASI protocol format.<br>0d = TDM mode<br>1d = I <sup>2</sup> S mode<br>2d = LJ (left-justified) mode<br>3d = Reserved; Don't use                                       |
| 5-4 | PASI_WLEN[1:0]   | R/W  | 11b   | Primary ASI word or slot length.<br>0d = 16 bits (Recommended this setting to be used with 10kΩ input impedance configuration)<br>1d = 20 bits<br>2d = 24 bits<br>3d = 32 bits |

**Table 7-25. PASI\_CFG0 Register Field Descriptions (continued)**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                  |
|-----|-------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3   | PASI_FSYNC_POL    | R/W  | 0b    | ASI FSYNC polarity (for PASI protocol only).<br>0d = Default polarity as per standard protocol<br>1d = Inverted polarity with respect to standard protocol                                   |
| 2   | PASI_BCLK_POL     | R/W  | 0b    | ASI BCLK polarity (for PASI protocol only).<br>0d = Default polarity as per standard protocol<br>1d = Inverted polarity with respect to standard protocol                                    |
| 1   | PASI_BUS_ERR      | R/W  | 0b    | ASI bus error detection.<br>0d = Enable bus error detection<br>1d = Disable bus error detection                                                                                              |
| 0   | PASI_BUS_ERR_RCOV | R/W  | 0b    | ASI bus error auto resume.<br>0d = Enable auto resume after bus error recovery<br>1d = Disable auto resume after bus error recovery and remain powered down until host configures the device |

#### 7.1.1.24 PASI\_TX\_CFG0 Register (Address = 0x1B) [Reset = 0x00]

PASI\_TX\_CFG0 is shown in [Table 7-26](#).

Return to the [Summary Table](#).

This register is the PASI TX configuration register 0.

**Table 7-26. PASI\_TX\_CFG0 Register Field Descriptions**

| Bit | Field                  | Type | Reset | Description                                                                                                                                                                                                                                                                                                          |
|-----|------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_TX_EDGE           | R/W  | 0b    | Primary ASI data output (on the primary and secondary data pin) transmit edge.<br>0d = Default edge as per the protocol configuration setting in PASI_BCLK_POL<br>1d = Inverted following edge (half cycle delay) with respect to the default edge setting                                                           |
| 6   | PASI_TX_FILL           | R/W  | 0b    | Primary ASI data output (on the primary and secondary data pin) for any unused cycles<br>0d = Always transmit 0 for unused cycles<br>1d = Always use Hi-Z for unused cycles                                                                                                                                          |
| 5   | PASI_TX_LSB            | R/W  | 0b    | Primary ASI data output (on the primary and secondary data pin) for LSB transmissions.<br>0d = Transmit the LSB for a full cycle<br>1d = Transmit the LSB for the first half cycle and Hi-Z for the second half cycle                                                                                                |
| 4-3 | PASI_TX_KEEPER[1:0]    | R/W  | 00b   | Primary ASI data output (on the primary and secondary data pin) bus keeper.<br>0d = Bus keeper is always disabled<br>1d = Bus keeper is always enabled<br>2d = Bus keeper is enabled during LSB transmissions only for one cycle<br>3d = Bus keeper is enabled during LSB transmissions only for one and half cycles |
| 2   | PASI_TX_USE_INT_FSY NC | R/W  | 0b    | Primary ASI uses internal FSYNC for output data generation in Controller mode configuration as applicable.<br>0d = Use external FSYNC for ASI protocol data generation<br>1d = Use internal FSYNC for ASI protocol data generation                                                                                   |
| 1   | PASI_TX_USE_INT_BCL K  | R/W  | 0b    | Primary ASI uses internal BCLK for output data generation in Controller mode configuration.<br>0d = Use external BCLK for ASI protocol data generation<br>1d = Use internal BCLK for ASI protocol data generation                                                                                                    |

**Table 7-26. PASI\_TX\_CFG0 Register Field Descriptions (continued)**

| Bit | Field                | Type | Reset | Description                                                                                                                                                  |
|-----|----------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | PASI_TDM_PULSE_WIDTH | R/W  | 0b    | Primary ASI fsync pulse width in TDM format. (Valid for Controller mode)<br>0d = Fsync pulse is 1 bclk period wide<br>1d = Fsync pulse is 2 bclk period wide |

**7.1.1.25 PASI\_TX\_CFG1 Register (Address = 0x1C) [Reset = 0x00]**

PASI\_TX\_CFG1 is shown in [Table 7-27](#).

Return to the [Summary Table](#).

This register is the PASI TX configuration register 1.

**Table 7-27. PASI\_TX\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----|---------------------|------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | RESERVED            | R    | 0b     | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 4-0 | PASI_TX_OFFSET[4:0] | R/W  | 00000b | Primary ASI output data MSB slot 0 offset (on the primary and secondary data pin).<br>0d = ASI data MSB location has no offset and is as per standard protocol<br>1d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of one BCLK cycle with respect to standard protocol<br>2d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of two BCLK cycles with respect to standard protocol<br>3d to 30d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset assigned as per configuration<br>31d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of 31 BCLK cycles with respect to standard protocol |

**7.1.1.26 PASI\_TX\_CFG2 Register (Address = 0x1D) [Reset = 0x00]**

PASI\_TX\_CFG2 is shown in [Table 7-28](#).

Return to the [Summary Table](#).

This register is the PASI TX configuration register 2.

**Table 7-28. PASI\_TX\_CFG2 Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                           |
|-----|-----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_TX_CH8_SEL | R/W  | 0b    | Primary ASI output channel 8 select.<br>0d = Primary ASI channel 8 output is on DOUT<br>1d = Primary ASI channel 8 output is on DOUT2 |
| 6   | PASI_TX_CH7_SEL | R/W  | 0b    | Primary ASI output channel 7 select.<br>0d = Primary ASI channel 7 output is on DOUT<br>1d = Primary ASI channel 7 output is on DOUT2 |
| 5   | PASI_TX_CH6_SEL | R/W  | 0b    | Primary ASI output channel 6 select.<br>0d = Primary ASI channel 6 output is on DOUT<br>1d = Primary ASI channel 6 output is on DOUT2 |
| 4   | PASI_TX_CH5_SEL | R/W  | 0b    | Primary ASI output channel 5 select.<br>0d = Primary ASI channel 5 output is on DOUT<br>1d = Primary ASI channel 5 output is on DOUT2 |
| 3   | PASI_TX_CH4_SEL | R/W  | 0b    | Primary ASI output channel 4 select.<br>0d = Primary ASI channel 4 output is on DOUT<br>1d = Primary ASI channel 4 output is on DOUT2 |

**Table 7-28. PASI\_TX\_CFG2 Register Field Descriptions (continued)**

| Bit | Field           | Type | Reset | Description                                                                                                                           |
|-----|-----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------|
| 2   | PASI_TX_CH3_SEL | R/W  | 0b    | Primary ASI output channel 3 select.<br>0d = Primary ASI channel 3 output is on DOUT<br>1d = Primary ASI channel 3 output is on DOUT2 |
| 1   | PASI_TX_CH2_SEL | R/W  | 0b    | Primary ASI output channel 2 select.<br>0d = Primary ASI channel 2 output is on DOUT<br>1d = Primary ASI channel 2 output is on DOUT2 |
| 0   | PASI_TX_CH1_SEL | R/W  | 0b    | Primary ASI output channel 1 select.<br>0d = Primary ASI channel 1 output is on DOUT<br>1d = Primary ASI channel 1 output is on DOUT2 |

#### 7.1.1.27 PASI\_TX\_CH1\_CFG Register (Address = 0x1E) [Reset = 0x20]

PASI\_TX\_CH1\_CFG is shown in [Table 7-29](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 1 configuration register.

**Table 7-29. PASI\_TX\_CH1\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5   | PASI_TX_CH1_CFG           | R/W  | 1b     | Primary ASI output channel 1 configuration.<br>0d = Primary ASI channel 1 output is in a tri-state condition<br>1d = Primary ASI channel 1 output corresponds to PDM Channel 1 data                                                                                                                                                                                                                                                                                                                                                           |
| 4-0 | PASI_TX_CH1_SLOT_NUM[4:0] | R/W  | 00000b | Primary ASI output channel 1 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.28 PASI\_TX\_CH2\_CFG Register (Address = 0x1F) [Reset = 0x21]

PASI\_TX\_CH2\_CFG is shown in [Table 7-30](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 2 configuration register.

**Table 7-30. PASI\_TX\_CH2\_CFG Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                                                                         |
|-----|-----------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED        | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                              |
| 5   | PASI_TX_CH2_CFG | R/W  | 1b    | Primary ASI output channel 2 configuration.<br>0d = Primary ASI channel 2 output is in a tri-state condition<br>1d = Primary ASI channel 2 output corresponds to PDM Channel 2 data |

**Table 7-30. PASI\_TX\_CH2\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_TX_CH2_SLOT_NUM[4:0] | R/W  | 00001b | Primary ASI output channel 2 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.29 PASI\_TX\_CH3\_CFG Register (Address = 0x20) [Reset = 0x02]**

PASI\_TX\_CH3\_CFG is shown in [Table 7-31](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 3 configuration register.

**Table 7-31. PASI\_TX\_CH3\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 6-5 | PASI_TX_CH3_CFG[1:0]      | R/W  | 00b    | Primary ASI output channel 3 configuration.<br>0d = Primary ASI channel 3 output is in a tri-state condition<br>1d = Primary ASI channel 3 output corresponds to PDM Channel 3 data<br>2d = Reserved<br>3d = Reserved                                                                                                                                                                                                                                                                                                                         |
| 4-0 | PASI_TX_CH3_SLOT_NUM[4:0] | R/W  | 00010b | Primary ASI output channel 3 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.30 PASI\_TX\_CH4\_CFG Register (Address = 0x21) [Reset = 0x03]**

PASI\_TX\_CH4\_CFG is shown in [Table 7-32](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 4 configuration register.

**Table 7-32. PASI\_TX\_CH4\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                        |
|-----|----------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                               |
| 6-5 | PASI_TX_CH4_CFG[1:0] | R/W  | 00b   | Primary ASI output channel 4 configuration.<br>0d = Primary ASI channel 4 output is in a tri-state condition<br>1d = Primary ASI channel 4 output corresponds to PDM Channel 4 data<br>2d = Primary ASI channel 4 output corresponds to TEMP data<br>3d = Reserved |



**Table 7-32. PASI\_TX\_CH4\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_TX_CH4_SLOT_NUM[4:0] | R/W  | 00011b | Primary ASI output channel 4 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.31 PASI\_TX\_CH5\_CFG Register (Address = 0x22) [Reset = 0x04]

PASI\_TX\_CH5\_CFG is shown in [Table 7-33](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 5 configuration register.

**Table 7-33. PASI\_TX\_CH5\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 6-5 | PASI_TX_CH5_CFG[1:0]      | R/W  | 00b    | Primary ASI output channel 5 configuration.<br>0d = Primary ASI channel 5 output is in a tri-state condition<br>1d = Primary ASI channel 5 output corresponds to ASI Input Channel 1 loopback data<br>2d = Primary ASI channel 5 output corresponds to echo reference Channel 1 data<br>3d = Reserved                                                                                                                                                                                                                                         |
| 4-0 | PASI_TX_CH5_SLOT_NUM[4:0] | R/W  | 00100b | Primary ASI output channel 5 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.32 PASI\_TX\_CH6\_CFG Register (Address = 0x23) [Reset = 0x05]

PASI\_TX\_CH6\_CFG is shown in [Table 7-34](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 6 configuration register.

**Table 7-34. PASI\_TX\_CH6\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                           |
|-----|----------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                  |
| 6-5 | PASI_TX_CH6_CFG[1:0] | R/W  | 00b   | Primary ASI output channel 6 configuration.<br>0d = Primary ASI channel 6 output is in a tri-state condition<br>1d = Primary ASI channel 6 output corresponds to ASI Input Channel 2 loopback data<br>2d = Primary ASI channel 6 output corresponds to echo reference Channel 2 data<br>3d = Reserved |

**Table 7-34. PASI\_TX\_CH6\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_TX_CH6_SLOT_NUM[4:0] | R/W  | 00101b | Primary ASI output channel 6 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.33 PASI\_TX\_CH7\_CFG Register (Address = 0x24) [Reset = 0x06]**

PASI\_TX\_CH7\_CFG is shown in [Table 7-35](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 7 configuration register.

**Table 7-35. PASI\_TX\_CH7\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 6-5 | PASI_TX_CH7_CFG[1:0]      | R/W  | 00b    | Primary ASI output channel 7 configuration.<br>0d = Primary ASI channel 7 output is in a tri-state condition<br>1d = Reserved<br>2d = Primary ASI channel 7 output corresponds to {echo_ref_ch1, echo_ref_ch2}<br>3d = Reserved                                                                                                                                                                                                                                                                                                               |
| 4-0 | PASI_TX_CH7_SLOT_NUM[4:0] | R/W  | 00110b | Primary ASI output channel 7 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.34 PASI\_TX\_CH8\_CFG Register (Address = 0x25) [Reset = 0x07]**

PASI\_TX\_CH8\_CFG is shown in [Table 7-36](#).

Return to the [Summary Table](#).

This register is the PASI TX Channel 8 configuration register.

**Table 7-36. PASI\_TX\_CH8\_CFG Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                                                                |
|-----|-----------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED        | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                     |
| 5   | PASI_TX_CH8_CFG | R/W  | 0b    | Primary ASI output channel 8 configuration.<br>0d = Primary ASI channel 8 output is in a tri-state condition<br>1d = Primary ASI channel 8 output corresponds to ICLA data |

**Table 7-36. PASI\_TX\_CH8\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|---------------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_TX_CH8_SLOT_NUM[4:0] | R/W  | 00111b | Primary ASI output channel 8 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.35 PASI\_RX\_CFG0 Register (Address = 0x26) [Reset = 0x00]

PASI\_RX\_CFG0 is shown in [Table 7-37](#).

Return to the [Summary Table](#).

This register is the PASI RX configuration register 0.

**Table 7-37. PASI\_RX\_CFG0 Register Field Descriptions**

| Bit | Field                 | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|-----------------------|------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_RX_EDGE          | R/W  | 0b     | Primary ASI data input (on the primary and secondary data pin) receive edge.<br>0d = Default edge as per the protocol configuration setting in PASI_BCLK_POL<br>1d = Inverted following edge (half cycle delay) with respect to the default edge setting                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 6   | PASI_RX_USE_INT_FSYNC | R/W  | 0b     | Primary ASI uses internal FSYNC for input data latching in Controller mode configuration as applicable.<br>0d = Use external FSYNC for ASI protocol data latching<br>1d = Use internal FSYNC for ASI protocol data latching                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 5   | PASI_RX_USE_INT_BCLK  | R/W  | 0b     | Primary ASI uses internal BCLK for input data latching in Controller mode configuration.<br>0d = Use external BCLK for ASI protocol data latching<br>1d = Use internal BCLK for ASI protocol data latching                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 4-0 | PASI_RX_OFFSET[4:0]   | R/W  | 00000b | Primary ASI data input MSB slot 0 offset (on the primary and secondary data pin).<br>0d = ASI data MSB location has no offset and is as per standard protocol<br>1d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of one BCLK cycle with respect to standard protocol<br>2d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of two BCLK cycles with respect to standard protocol<br>3d to 30d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset assigned as per configuration<br>31d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of 31 BCLK cycles with respect to standard protocol |

#### 7.1.1.36 PASI\_RX\_CFG1 Register (Address = 0x27) [Reset = 0x00]

PASI\_RX\_CFG1 is shown in [Table 7-38](#).

Return to the [Summary Table](#).

This register is the PASI RX configuration register 1.

**Table 7-38. PASI\_RX\_CFG1 Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                      |
|-----|-----------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_RX_CH8_SEL | R/W  | 0b    | Primary ASI input channel 8 select.<br>0d = Primary ASI channel 8 input is on DIN<br>1d = Primary ASI channel 8 input is on DIN2 |
| 6   | PASI_RX_CH7_SEL | R/W  | 0b    | Primary ASI input channel 7 select.<br>0d = Primary ASI channel 7 input is on DIN<br>1d = Primary ASI channel 7 input is on DIN2 |
| 5   | PASI_RX_CH6_SEL | R/W  | 0b    | Primary ASI input channel 6 select.<br>0d = Primary ASI channel 6 input is on DIN<br>1d = Primary ASI channel 6 input is on DIN2 |
| 4   | PASI_RX_CH5_SEL | R/W  | 0b    | Primary ASI input channel 5 select.<br>0d = Primary ASI channel 5 input is on DIN<br>1d = Primary ASI channel 5 input is on DIN2 |
| 3   | PASI_RX_CH4_SEL | R/W  | 0b    | Primary ASI input channel 4 select.<br>0d = Primary ASI channel 4 input is on DIN<br>1d = Primary ASI channel 4 input is on DIN2 |
| 2   | PASI_RX_CH3_SEL | R/W  | 0b    | Primary ASI input channel 3 select.<br>0d = Primary ASI channel 3 input is on DIN<br>1d = Primary ASI channel 3 input is on DIN2 |
| 1   | PASI_RX_CH2_SEL | R/W  | 0b    | Primary ASI input channel 2 select.<br>0d = Primary ASI channel 2 input is on DIN<br>1d = Primary ASI channel 2 input is on DIN2 |
| 0   | PASI_RX_CH1_SEL | R/W  | 0b    | Primary ASI input channel 1 select.<br>0d = Primary ASI channel 1 input is on DIN<br>1d = Primary ASI channel 1 input is on DIN2 |

**7.1.1.37 PASI\_RX\_CH1\_CFG Register (Address = 0x28) [Reset = 0x20]**

PASI\_RX\_CH1\_CFG is shown in [Table 7-39](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 1 configuration register.

**Table 7-39. PASI\_RX\_CH1\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5   | PASI_RX_CH1_CFG           | R/W  | 1b     | Primary ASI input channel 1 configuration.<br>0d = Primary ASI channel 1 input is disabled<br>1d = Primary ASI channel 1 input corresponds to DAC Channel 1 data                                                                                                                                                                                                                                                                                                                                                                             |
| 4-0 | PASI_RX_CH1_SLOT_NUM[4:0] | R/W  | 00000b | Primary ASI input channel 1 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.38 PASI\_RX\_CH2\_CFG Register (Address = 0x29) [Reset = 0x21]**

PASI\_RX\_CH2\_CFG is shown in [Table 7-40](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 2 configuration register.

**Table 7-40. PASI\_RX\_CH2\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5   | PASI_RX_CH2_CFG           | R/W  | 1b     | Primary ASI input channel 2 configuration.<br>0d = Primary ASI channel 2 input is disabled<br>1d = Primary ASI channel 2 input corresponds to DAC Channel 2 data                                                                                                                                                                                                                                                                                                                                                                             |
| 4-0 | PASI_RX_CH2_SLOT_NUM[4:0] | R/W  | 00001b | Primary ASI input channel 2 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.39 PASI\_RX\_CH3\_CFG Register (Address = 0x2A) [Reset = 0x02]

PASI\_RX\_CH3\_CFG is shown in [Table 7-41](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 3 configuration register.

**Table 7-41. PASI\_RX\_CH3\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 5   | PASI_RX_CH3_CFG           | R/W  | 0b     | Primary ASI input channel 3 configuration.<br>0d = Primary ASI channel 3 input is disabled<br>1d = Primary ASI channel 3 input corresponds to DAC Channel 3 data                                                                                                                                                                                                                                                                                                                                                                             |
| 4-0 | PASI_RX_CH3_SLOT_NUM[4:0] | R/W  | 00010b | Primary ASI input channel 3 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.40 PASI\_RX\_CH4\_CFG Register (Address = 0x2B) [Reset = 0x03]

PASI\_RX\_CH4\_CFG is shown in [Table 7-42](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 4 configuration register.

**Table 7-42. PASI\_RX\_CH4\_CFG Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                                                      |
|-----|-----------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED        | R    | 0b    | Reserved bits; Write only reset values                                                                                                                           |
| 5   | PASI_RX_CH4_CFG | R/W  | 0b    | Primary ASI input channel 4 configuration.<br>0d = Primary ASI channel 4 input is disabled<br>1d = Primary ASI channel 4 input corresponds to DAC Channel 4 data |

**Table 7-42. PASI\_RX\_CH4\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_RX_CH4_SLOT_NUM[4:0] | R/W  | 00011b | Primary ASI input channel 4 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.41 PASI\_RX\_CH5\_CFG Register (Address = 0x2C) [Reset = 0x04]**

PASI\_RX\_CH5\_CFG is shown in [Table 7-43](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 5 configuration register.

**Table 7-43. PASI\_RX\_CH5\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 6-5 | PASI_RX_CH5_CFG[1:0]      | R/W  | 00b    | Primary ASI input channel 5 configuration.<br>0d = Primary ASI channel 5 input is disabled<br>1d = Primary ASI channel 5 input corresponds to DAC Channel 5 data<br>2d = Primary ASI channel 5 input corresponds to ADC Channel 1 output loopback<br>3d = Reserved                                                                                                                                                                                                                                                                           |
| 4-0 | PASI_RX_CH5_SLOT_NUM[4:0] | R/W  | 00100b | Primary ASI input channel 5 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.42 PASI\_RX\_CH6\_CFG Register (Address = 0x2D) [Reset = 0x05]**

PASI\_RX\_CH6\_CFG is shown in [Table 7-44](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 6 configuration register.

**Table 7-44. PASI\_RX\_CH6\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                             |
|-----|----------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                    |
| 6-5 | PASI_RX_CH6_CFG[1:0] | R/W  | 00b   | Primary ASI input channel 6 configuration.<br>0d = Primary ASI channel 6 input is disabled<br>1d = Primary ASI channel 6 input corresponds to DAC Channel 6 data<br>2d = Primary ASI channel 6 input corresponds to ADC Channel 2 output loopback<br>3d = Primary ASI channel 6 input corresponds to ICLA device 1 data |

**Table 7-44. PASI\_RX\_CH6\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_RX_CH6_SLOT_NUM[4:0] | R/W  | 00101b | Primary ASI input channel 6 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.43 PASI\_RX\_CH7\_CFG Register (Address = 0x2E) [Reset = 0x06]

PASI\_RX\_CH7\_CFG is shown in [Table 7-45](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 7 configuration register.

**Table 7-45. PASI\_RX\_CH7\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 6-5 | PASI_RX_CH7_CFG[1:0]      | R/W  | 00b    | Primary ASI input channel 7 configuration.<br>0d = Primary ASI channel 7 input is disabled<br>1d = Primary ASI channel 7 input corresponds to DAC Channel 7 data<br>2d = Primary ASI channel 7 input corresponds to ADC Channel 3 output loopback<br>3d = Primary ASI channel 7 input corresponds to ICLA device 2 data                                                                                                                                                                                                                      |
| 4-0 | PASI_RX_CH7_SLOT_NUM[4:0] | R/W  | 00110b | Primary ASI input channel 7 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.1.44 PASI\_RX\_CH8\_CFG Register (Address = 0x2F) [Reset = 0x07]

PASI\_RX\_CH8\_CFG is shown in [Table 7-46](#).

Return to the [Summary Table](#).

This register is the PASI RX Channel 8 configuration register.

**Table 7-46. PASI\_RX\_CH8\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                             |
|-----|----------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                    |
| 6-5 | PASI_RX_CH8_CFG[1:0] | R/W  | 00b   | Primary ASI input channel 8 configuration.<br>0d = Primary ASI channel 8 input is disabled<br>1d = Primary ASI channel 8 input corresponds to DAC Channel 8 data<br>2d = Primary ASI channel 8 input corresponds to ADC Channel 4 output loopback<br>3d = Primary ASI channel 8 input corresponds to ICLA device 3 data |

**Table 7-46. PASI\_RX\_CH8\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|---------------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | PASI_RX_CH8_SLOT_NUM[4:0] | R/W  | 00111b | Primary ASI input channel 8 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.1.45 CLK\_CFG0 Register (Address = 0x32) [Reset = 0x00]**

CLK\_CFG0 is shown in [Table 7-47](#).

Return to the [Summary Table](#).

This register is the clock configuration register 0.

**Table 7-47. CLK\_CFG0 Register Field Descriptions**

| Bit | Field               | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------|------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | PASI_SAMP_RATE[5:0] | R/W  | 000000b | Primary ASI sample rate configuration. -Typical (Allowed Range)<br>0d = Primary ASI sampling rate auto detected in the device<br>1d = 768000 (670320-791040)<br>2d = 614400 (536256-632832)<br>3d = 512000 (446880-527360)<br>4d = 438857 (383040-452022)<br>5d = 384000 (335160-395520)<br>6d = 341333 (297920-351573)<br>7d = 307200 (268128-316416)<br>8d = 256000 (223440-263680)<br>9d = 219429 (191520-226011)<br>10d = 192000 (167580-197760)<br>11d = 170667 (148960-175786)<br>12d = 153600 (134064-158208)<br>13d = 128000 (111720-131840)<br>14d = 109714 (95760-113005)<br>15d = 96000 (83790-98880)<br>16d = 85333 (74480-87893)<br>17d = 76800 (67032-79104)<br>18d = 64000 (55860-65920)<br>19d = 54857 (47880-56502)<br>20d = 48000 (41895-49440)<br>21d = 42667 (37240-43946)<br>22d = 38400 (33516-39552)<br>23d = 32000 (27930-32960)<br>24d = 27429 (23940-28251)<br>25d = 24000 (20947-24720)<br>26d = 21333 (18620-21973)<br>27d = 19200 (16758-19776)<br>28d = 16000 (13965-16480)<br>29d = 13714 (11970-14125)<br>30d = 12000 (10473-12360)<br>31d = 10667 (9310-10986)<br>32d = 9600 (8379-9888)<br>33d = 8000 (6982-8240)<br>34d = 6857 (5985-7062)<br>35d = 6000 (5236-6180)<br>36d = 5333 (4655-5493)<br>37d = 4800 (4189-4944)<br>38d = 4000 (3491-4120)<br>39d = 3429 (2992-3531)<br>40d = 3000 (2618-3090)<br>41d-63d = Reserved |



**Table 7-47. CLK\_CFG0 Register Field Descriptions (continued)**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                |
|-----|---------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | PASI_FS_RATE_NO_LIM | R/W  | 0b    | Limit sampling rate to standard audio sample rates only.<br>0d = Standard audio rates with 1% tolerance supported using auto mode<br>1d = Standard audio rates with 5% tolerance supported using auto mode |
| 0   | CUSTOM_CLK_CFG      | R/W  | 0b    | Custom clock configuration enable, all dividers and mux selects need to be manually configured.<br>0d = Auto clock configuration<br>1d = Custom clock configuration                                        |

#### 7.1.1.46 CLK\_CFG1 Register (Address = 0x33) [Reset = 0x00]

CLK\_CFG1 is shown in [Table 7-48](#).

Return to the [Summary Table](#).

This register is the clock configuration register 1.

**Table 7-48. CLK\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|---------------------|------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | SASI_SAMP_RATE[5:0] | R/W  | 000000b | Secondary ASI sample rate configuration. -Typical (Range)<br>0d = Secondary ASI sampling rate auto detected in the device<br>1d = 768000 (670320-791040)<br>2d = 614400 (536256-632832)<br>3d = 512000 (446880-527360)<br>4d = 438857 (383040-452022)<br>5d = 384000 (335160-395520)<br>6d = 341333 (297920-351573)<br>7d = 307200 (268128-316416)<br>8d = 256000 (223440-263680)<br>9d = 219429 (191520-226011)<br>10d = 192000 (167580-197760)<br>11d = 170667 (148960-175786)<br>12d = 153600 (134064-158208)<br>13d = 128000 (111720-131840)<br>14d = 109714 (95760-113005)<br>15d = 96000 (83790-98880)<br>16d = 85333 (74480-87893)<br>17d = 76800 (67032-79104)<br>18d = 64000 (55860-65920)<br>19d = 54857 (47880-56502)<br>20d = 48000 (41895-49440)<br>21d = 42667 (37240-43946)<br>22d = 38400 (33516-39552)<br>23d = 32000 (27930-32960)<br>24d = 27429 (23940-28251)<br>25d = 24000 (20947-24720)<br>26d = 21333 (18620-21973)<br>27d = 19200 (16758-19776)<br>28d = 16000 (13965-16480)<br>29d = 13714 (11970-14125)<br>30d = 12000 (10473-12360)<br>31d = 10667 (9310-10986)<br>32d = 9600 (8379-9888)<br>33d = 8000 (6982-8240)<br>34d = 6857 (5985-7062)<br>35d = 6000 (5236-6180)<br>36d = 5333 (4655-5493)<br>37d = 4800 (4189-4944)<br>38d = 4000 (3491-4120)<br>39d = 3429 (2992-3531)<br>40d = 3000 (2618-3090)<br>41d-63d = Reserved |

**Table 7-48. CLK\_CFG1 Register Field Descriptions (continued)**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                |
|-----|---------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | SASI_FS_RATE_NO_LIM | R/W  | 0b    | Limit sampling rate to standard audio sample rates only.<br>0d = Standard audio rates with 1% tolerance supported using auto mode<br>1d = Standard audio rates with 5% tolerance supported using auto mode |
| 0   | RESERVED            | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                       |

**7.1.1.47 CLK\_CFG2 Register (Address = 0x34) [Reset = 0x40]**

CLK\_CFG2 is shown in [Table 7-49](#).

Return to the [Summary Table](#).

This register is the clock configuration register 2.

**Table 7-49. CLK\_CFG2 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|-------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PLL_DIS           | R/W  | 0b    | Custom/Auto clock mode PLL setting.<br>0d = PLL is always enabled in custom clk mode/PLL is enabled based on DSP MIPS requirement in auto clock mode<br>1d = PLL is disabled                                                                                                                                                                                                                                                                                                                           |
| 6   | AUTO_PLL_FR_ALLOW | R/W  | 1b    | Allow the PLL to operate in fractional mode of operation.<br>0d = PLL fractional mode disabled<br>1d = PLL fractional mode allowed                                                                                                                                                                                                                                                                                                                                                                     |
| 5   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 3-1 | CLK_SRC_SEL[2:0]  | R/W  | 000b  | Input clock source select.<br>0d = Primary ASI BCLK is the input clock source<br>1d = CCLK synchronized with Primary ASI FSYNC is the input clock source<br>2d = Secondary ASI BCLK is the input clock source<br>3d = CCLK synchronized with Secondary ASI FSYNC is the input clock source<br>4d = Fixed CCLK frequency (used only in controller mode configuration)<br>5d = Internal oscillator clock is the input clock source (only supported in custom clock configuration)<br>6d to 7d = Reserved |
| 0   | RATIO_CLK_EDGE    | R/W  | 0b    | Edge selection for clock source ratio detection.<br>0d = Use rising edge of clock source to check ratio with primary or secondary FSYNC<br>1d = Use falling edge of clock source to check ratio with primary or secondary FSYNC                                                                                                                                                                                                                                                                        |

**7.1.1.48 CNT\_CLK\_CFG0 Register (Address = 0x35) [Reset = 0x00]**

CNT\_CLK\_CFG0 is shown in [Table 7-50](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 0.

**Table 7-50. CNT\_CLK\_CFG0 Register Field Descriptions**

| Bit | Field                  | Type | Reset   | Description                                                                                                                                                                                                                                                              |
|-----|------------------------|------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | PDM_CLK_CFG[1:0]       | R/W  | 00b     | PDM_CLK configuration.<br>0d = PDM_CLK is 2.8224MHz or 3.072MHz<br>1d = PDM_CLK is 1.4112MHz or 1.536MHz<br>2d = PDM_CLK is 705.6kHz or 768kHz<br>3d = PDM_CLK is 5.6448MHz or 6.144MHz                                                                                  |
| 5-0 | CCLK_FS_RATIO_MSB[5:0] | R/W  | 000000b | Most significant bits for selecting the ratio between CCLK and primary/secondary ASI FSYNC with which CCLK is synchronized.<br>0d = Auto detect the ratio (assumption is CCLK is synchronized with primary/secondary FSYNC)<br>1d to 16383d = Ratio as per configuration |

#### 7.1.1.49 CNT\_CLK\_CFG1 Register (Address = 0x36) [Reset = 0x00]

CNT\_CLK\_CFG1 is shown in [Table 7-51](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 1.

**Table 7-51. CNT\_CLK\_CFG1 Register Field Descriptions**

| Bit | Field                  | Type | Reset     | Description                                                                                                                                                                                                                                 |
|-----|------------------------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | CCLK_FS_RATIO_LSB[7:0] | R/W  | 00000000b | Select the ratio between CCLK and primary/secondary ASI FSYNC with which CCLK is synchronized.<br>0d = Auto detect the ratio (assumption is CCLK is synchronized with primary/secondary FSYNC)<br>1d to 16383d = Ratio as per configuration |

#### 7.1.1.50 CNT\_CLK\_CFG2 Register (Address = 0x37) [Reset = 0x20]

CNT\_CLK\_CFG2 is shown in [Table 7-52](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 2.

**Table 7-52. CNT\_CLK\_CFG2 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                           |
|-----|--------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | CCLK_FREQ_SEL[2:0] | R/W  | 001b  | These bits select the CCLK input frequency (used only in controller mode configuration).<br>0d = 12MHz<br>1d = 12.288MHz<br>2d = 13MHz<br>3d = 16MHz<br>4d = 19.2MHz<br>5d = 19.68MHz<br>6d = 24MHz<br>7d = 24.576MHz |
| 4   | PASI_CNT_CFG       | R/W  | 0b    | Primary ASI controller or target configuration<br>0d = Primary ASI in target configuration<br>1d = Primary ASI in controller configuration                                                                            |
| 3   | SASI_CNT_CFG       | R/W  | 0b    | Secondary ASI controller or target configuration<br>0d = Secondary ASI in target configuration<br>1d = Secondary ASI in controller configuration                                                                      |
| 2   | RESERVED           | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                  |
| 1   | RESERVED           | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                  |

**Table 7-52. CNT\_CLK\_CFG2 Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                                                                                                                                                                                 |
|-----|---------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | FS_MODE | R/W  | 0b    | Sample rate setting (valid when the device is in controller mode). This is applicable for both PASI and SASI.<br>0d = sampling rate is a multiple (or submultiple) of 48kHz<br>1d = sampling rate is a multiple (or submultiple) of 44.1kHz |

**7.1.1.51 CNT\_CLK\_CFG3 Register (Address = 0x38) [Reset = 0x00]**

CNT\_CLK\_CFG3 is shown in [Table 7-53](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 3.

**Table 7-53. CNT\_CLK\_CFG3 Register Field Descriptions**

| Bit | Field                           | Type | Reset   | Description                                                                                                                                                                                                               |
|-----|---------------------------------|------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_USE_INT_BCLK_F<br>OR_FSYNC | R/W  | 0b      | Use internal BCLK for FSYNC generation in PASI during controller mode configuration.<br>0d = Use external BCLK for FSYNC generation<br>1d = Use internal BCLK for FSYNC generation                                        |
| 6   | PASI_INV_BCLK_FOR_F<br>SYNC     | R/W  | 0b      | Invert PASI BCLK polarity only for PASI FSYNC generation in controller mode configuration.<br>0d = Do not invert PASI BCLK polarity for PASI FSYNC generation<br>1d = Invert PASI BCLK polarity for PASI FSYNC generation |
| 5-0 | PASI_BCLK_FS_RATIO_<br>MSB[5:0] | R/W  | 000000b | MSB bits for primary ASI BCLK to FSYNC ratio in controller mode.                                                                                                                                                          |

**7.1.1.52 CNT\_CLK\_CFG4 Register (Address = 0x39) [Reset = 0x00]**

CNT\_CLK\_CFG4 is shown in [Table 7-54](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 4.

**Table 7-54. CNT\_CLK\_CFG4 Register Field Descriptions**

| Bit | Field                           | Type | Reset     | Description                                                      |
|-----|---------------------------------|------|-----------|------------------------------------------------------------------|
| 7-0 | PASI_BCLK_FS_RATIO_L<br>SB[7:0] | R/W  | 00000000b | LSB byte for primary ASI BCLK to FSYNC ratio in controller mode. |

**7.1.1.53 CNT\_CLK\_CFG5 Register (Address = 0x3A) [Reset = 0x00]**

CNT\_CLK\_CFG5 is shown in [Table 7-55](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 5.

**Table 7-55. CNT\_CLK\_CFG5 Register Field Descriptions**

| Bit | Field                           | Type | Reset | Description                                                                                                                                                                                                               |
|-----|---------------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SASI_USE_INT_BCLK_F<br>OR_FSYNC | R/W  | 0b    | Use internal BCLK for FSYNC generation in SASI during controller mode configuration.<br>0d = Use external BCLK for FSYNC generation<br>1d = Use internal BCLK for FSYNC generation                                        |
| 6   | SASI_INV_BCLK_FOR_F<br>SYNC     | R/W  | 0b    | Invert SASI BCLK polarity only for SASI FSYNC generation in controller mode configuration.<br>0d = Do not invert SASI BCLK polarity for SASI FSYNC generation<br>1d = Invert SASI BCLK polarity for SASI FSYNC generation |

**Table 7-55. CNT\_CLK\_CFG5 Register Field Descriptions (continued)**

| Bit | Field                       | Type | Reset   | Description                                                        |
|-----|-----------------------------|------|---------|--------------------------------------------------------------------|
| 5-0 | SASI_BCLK_FS_RATIO_MSB[5:0] | R/W  | 000000b | MSB bits for secondary ASI BCLK to FSYNC ratio in controller mode. |

#### 7.1.1.54 CNT\_CLK\_CFG6 Register (Address = 0x3B) [Reset = 0x00]

CNT\_CLK\_CFG6 is shown in [Table 7-56](#).

Return to the [Summary Table](#).

This register is the controller mode clock configuration register 6.

**Table 7-56. CNT\_CLK\_CFG6 Register Field Descriptions**

| Bit | Field                       | Type | Reset     | Description                                                        |
|-----|-----------------------------|------|-----------|--------------------------------------------------------------------|
| 7-0 | SASI_BCLK_FS_RATIO_LSB[7:0] | R/W  | 00000000b | LSB byte for secondary ASI BCLK to FSYNC ratio in controller mode. |

#### 7.1.1.55 CLK\_ERR\_STS0 Register (Address = 0x3C) [Reset = 0x00]

CLK\_ERR\_STS0 is shown in [Table 7-57](#).

Return to the [Summary Table](#).

This register is the clock error and status register 0.

**Table 7-57. CLK\_ERR\_STS0 Register Field Descriptions**

| Bit | Field                     | Type | Reset | Description                                                                                                                                                                                  |
|-----|---------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | DSP_CLK_ERR               | R    | 0b    | Flag indicating ratio error between FSYNC and selected clock source.<br>0d = No ratio error<br>1d = Ratio error between primary or secondary ASI FSYNC and selected clock source             |
| 6   | RESERVED                  | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                         |
| 5   | RESERVED                  | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                         |
| 4   | SRC_RATIO_ERR             | R    | 0b    | Flag indicating that SRC m:n ratio is unsupported. (not valid for custom m/n ratio config).<br>0d = m:n ratio supported<br>1d = Unsupported m:n ratio error                                  |
| 3   | DEM_RATE_ERR              | R    | 0b    | Flag indicating that clock configuration does not allow valid DEM rate.<br>0d = No DEM clock rate error<br>1d = DEM clock rate error in selected clock configuration                         |
| 2   | PDM_CLK_ERR               | R    | 0b    | Flag indicating that clock configuration does not allow valid PDM clock generation.<br>0d = No PDM clock generation error<br>1d = PDM clock generation error in selected clock configuration |
| 1   | RESET_ON_CLK_STOP_DET_STS | R    | 0b    | Flag indicating that audio clock source stopped for at least 1ms.<br>0d = No audio clock source error<br>1d = Audio clock source stopped for at least 1ms                                    |
| 0   | RESERVED                  | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                         |

#### 7.1.1.56 CLK\_ERR\_STS1 Register (Address = 0x3D) [Reset = 0x00]

CLK\_ERR\_STS1 is shown in [Table 7-58](#).

Return to the [Summary Table](#).

This register is the clock error and status register 1.

**Table 7-58. CLK\_ERR\_STS1 Register Field Descriptions**

| Bit | Field                  | Type | Reset | Description                                                                                                                                             |
|-----|------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PASI_BCLK_FS_RATIO_ERR | R    | 0b    | Flag indicating PASI bclk fsync ratio error.<br>0d = No PASI bclk fsync ratio error<br>1d = PASI bclk fsync ratio error in selected clock configuration |
| 6   | SASI_BCLK_FS_RATIO_ERR | R    | 0b    | Flag indicating SASI bclk fsync ratio error.<br>0d = No SASI bclk fsync ratio error<br>1d = SASI bclk fsync ratio error in selected clock configuration |
| 5   | CCLK_FS_RATIO_ERR      | R    | 0b    | Flag indicating CCLK fsync ratio error.<br>0d = No CCLK fsync ratio error<br>1d = CCLK fsync ratio error                                                |
| 4   | PASI_FS_ERR            | R    | 0b    | Flag indicating PASI FS rate change or halt error.<br>0d = No PASI FS error<br>1d = PASI FS rate change or halt detected                                |
| 3   | SASI_FS_ERR            | R    | 0b    | Flag indicating SASI FS rate change or halt error.<br>0d = No SASI FS error<br>1d = SASI FS rate change or halt detected                                |
| 2-0 | RESERVED               | R    | 0b    | Reserved bits; Write only reset values                                                                                                                  |

#### 7.1.1.57 CLK\_DET\_STS0 Register (Address = 0x3E) [Reset = 0x00]

CLK\_DET\_STS0 is shown in [Table 7-59](#).

Return to the [Summary Table](#).

This register is the clock ratio detection register 0.

**Table 7-59. CLK\_DET\_STS0 Register Field Descriptions**

| Bit | Field                   | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-------------------------|------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | PASI_SAMP_RATE_STS[5:0] | R    | 000000b | Primary ASI Sample rate detected status.<br>0d = Reserved<br>1d = 768000 (670320-791040)<br>2d = 614400 (536256-632832)<br>3d = 512000 (446880-527360)<br>4d = 438857 (383040-452022)<br>5d = 384000 (335160-395520)<br>6d = 341333 (297920-351573)<br>7d = 307200 (268128-316416)<br>8d = 256000 (223440-263680)<br>9d = 219429 (191520-226011)<br>10d = 192000 (167580-197760)<br>11d = 170667 (148960-175786)<br>12d = 153600 (134064-158208)<br>13d = 128000 (111720-131840)<br>14d = 109714 (95760-113005)<br>15d = 96000 (83790-98880)<br>16d = 85333 (74480-87893)<br>17d = 76800 (67032-79104)<br>18d = 64000 (55860-65920)<br>19d = 54857 (47880-56502)<br>20d = 48000 (41895-49440)<br>21d = 42667 (37240-43946)<br>22d = 38400 (33516-39552)<br>23d = 32000 (27930-32960)<br>24d = 27429 (23940-28251)<br>25d = 24000 (20947-24720)<br>26d = 21333 (18620-21973)<br>27d = 19200 (16758-19776)<br>28d = 16000 (13965-16480)<br>29d = 13714 (11970-14125)<br>30d = 12000 (10473-12360)<br>31d = 10667 (9310-10986)<br>32d = 9600 (8379-9888)<br>33d = 8000 (6982-8240)<br>34d = 6857 (5985-7062)<br>35d = 6000 (5236-6180)<br>36d = 5333 (4655-5493)<br>37d = 4800 (4189-4944)<br>38d = 4000 (3491-4120)<br>39d = 3429 (2992-3531)<br>40d = 3000 (2618-3090)<br>41d-63d = Reserved |
| 1-0 | PLL_MODE_STS[1:0]       | R    | 00b     | PLL usage status.<br>0d = PLL used in integer mode<br>1d = PLL used in fractional mode<br>2d = PLL not used<br>3d = Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

#### 7.1.1.58 CLK\_DET\_STS1 Register (Address = 0x3F) [Reset = 0x00]

CLK\_DET\_STS1 is shown in [Table 7-60](#).

Return to the [Summary Table](#).

This register is the clock ratio detection register 1.

**Table 7-60. CLK\_DET\_STS1 Register Field Descriptions**

| Bit | Field                   | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|-------------------------|------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | SASI_SAMP_RATE_STS[5:0] | R    | 000000b | Secondary ASI Sample rate detected status.<br>0d = Reserved<br>1d = 768000 (670320-791040)<br>2d = 614400 (536256-632832)<br>3d = 512000 (446880-527360)<br>4d = 438857 (383040-452022)<br>5d = 384000 (335160-395520)<br>6d = 341333 (297920-351573)<br>7d = 307200 (268128-316416)<br>8d = 256000 (223440-263680)<br>9d = 219429 (191520-226011)<br>10d = 192000 (167580-197760)<br>11d = 170667 (148960-175786)<br>12d = 153600 (134064-158208)<br>13d = 128000 (111720-131840)<br>14d = 109714 (95760-113005)<br>15d = 96000 (83790-98880)<br>16d = 85333 (74480-87893)<br>17d = 76800 (67032-79104)<br>18d = 64000 (55860-65920)<br>19d = 54857 (47880-56502)<br>20d = 48000 (41895-49440)<br>21d = 42667 (37240-43946)<br>22d = 38400 (33516-39552)<br>23d = 32000 (27930-32960)<br>24d = 27429 (23940-28251)<br>25d = 24000 (20947-24720)<br>26d = 21333 (18620-21973)<br>27d = 19200 (16758-19776)<br>28d = 16000 (13965-16480)<br>29d = 13714 (11970-14125)<br>30d = 12000 (10473-12360)<br>31d = 10667 (9310-10986)<br>32d = 9600 (8379-9888)<br>33d = 8000 (6982-8240)<br>34d = 6857 (5985-7062)<br>35d = 6000 (5236-6180)<br>36d = 5333 (4655-5493)<br>37d = 4800 (4189-4944)<br>38d = 4000 (3491-4120)<br>39d = 3429 (2992-3531)<br>40d = 3000 (2618-3090)<br>41d-63d = Reserved |
| 1-0 | RESERVED                | R    | 0b      | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**7.1.1.59 CLK\_DET\_STS2 Register (Address = 0x40) [Reset = 0x00]**

CLK\_DET\_STS2 is shown in [Table 7-61](#).

Return to the [Summary Table](#).

This register is the clock ratio detection register 2.

**Table 7-61. CLK\_DET\_STS2 Register Field Descriptions**

| Bit | Field                            | Type | Reset   | Description                                                                     |
|-----|----------------------------------|------|---------|---------------------------------------------------------------------------------|
| 7-6 | RESERVED                         | R    | 0b      | Reserved bits; Write only reset values                                          |
| 5-0 | FS_CLKSRC_RATIO_DET_MSB_STS[5:0] | R    | 000000b | MSB bits for primary ASI or secondary ASI FSYNC to clock source ratio detected. |



### 7.1.1.60 CLK\_DET\_STS3 Register (Address = 0x41) [Reset = 0x00]

CLK\_DET\_STS3 is shown in [Table 7-62](#).

Return to the [Summary Table](#).

This register is the clock ratio detection register 3.

**Table 7-62. CLK\_DET\_STS3 Register Field Descriptions**

| Bit | Field                            | Type | Reset     | Description                                                                     |
|-----|----------------------------------|------|-----------|---------------------------------------------------------------------------------|
| 7-0 | FS_CLKSRC_RATIO_DET_LSB_STS[7:0] | R    | 00000000b | LSB byte for primary ASI or secondary ASI FSYNC to clock source ratio detected. |

### 7.1.1.61 INT\_CFG Register (Address = 0x42) [Reset = 0x00]

INT\_CFG is shown in [Table 7-63](#).

Return to the [Summary Table](#).

This register is the interrupt configuration register.

**Table 7-63. INT\_CFG Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                          |
|-----|--------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | INT_POL            | R/W  | 0b    | Interrupt polarity.<br>0b = Active low (IRQZ)<br>1b = Active high (IRQ)                                                                                                                                                                                                                                                                                              |
| 6-5 | INT_EVENT[1:0]     | R/W  | 00b   | Interrupt event configuration.<br>0d = INT asserts on any unmasked latched interrupts event<br>1d = INT asserts on any unmasked live interrupts event<br>2d = INT asserts for 2ms (typical) for every 4ms (typical) duration on any unmasked latched interrupts event<br>3d = INT asserts for 2ms (typical) one time on each pulse for any unmasked interrupts event |
| 4-3 | PD_ON_FLT_CFG[1:0] | R/W  | 00b   | Power down configuration during fault for chx and micbias.<br>0d = Faults are not considered for power down<br>1d = Only unmasked faults are considered for power down<br>2d = All faults are considered for power down<br>3d = Reserved                                                                                                                             |
| 2   | LTCH_READ_CFG      | R/W  | 0b    | Interrupt latch registers readback configuration.<br>0b = All interrupts can be read through the LTCH registers<br>1b = Only unmasked interrupts can be read through the LTCH registers                                                                                                                                                                              |
| 1   | PD_ON_FLT_RCV_CFG  | R/W  | 0b    | Configuration for Power down ADC channels on fault<br>0b = Auto recovery, ADC channels are re-powered up when fault goes away<br>1b = Manual recovery, ADC channels are not re-powered up when fault goes away                                                                                                                                                       |
| 0   | LTCH_CLR_ON_READ   | R/W  | 0b    | Cfgn for clearing LTCH register bits<br>0 = LTCH reg bits are cleared on reg read only if live status is zero<br>1 = LTCH reg bits are cleared on reg read irrespective of live status                                                                                                                                                                               |

### 7.1.1.62 DAC\_FLT\_CFG Register (Address = 0x43) [Reset = 0x54]

DAC\_FLT\_CFG is shown in [Table 7-64](#).

Return to the [Summary Table](#).

This register is the interrupt configuration register.

**Table 7-64. DAC\_FLT\_CFG Register Field Descriptions**

| Bit | Field                  | Type | Reset | Description                                                                                                                                                                                                                   |
|-----|------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED               | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                          |
| 6-5 | DAC_PD_ON_FLT_CFG[1:0] | R/W  | 10b   | Power down configuration during fault for DAC .<br>0d = Faults are not considered for power down<br>1d = Only unmasked faults are considered for power down<br>2d = All faults are considered for power down<br>3d = Reserved |
| 4   | DAC_PD_ON_FLT_RCV_CFG  | R/W  | 1b    | Configuration for Power down DAC channels on fault<br>0b = Auto recovery, DAC channels are re-powered up when fault goes away<br>1b = Manual recovery, DAC channels are not re-powered up when fault goes away                |
| 3   | OUT_CHx_PD_FLT_STS     | R    | 0b    | Status for PD on OUTxx faults<br>0d = No DAC Channel is Powered Down due to fault/s<br>1d = Some DAC Channel is Powered Down due to fault/s                                                                                   |
| 2   | DAC_DIS_PD_W_PU        | R/W  | 1b    | Disable power down on DRVr VG fault while powering up DAC<br>0b = Power down DAC on DRVr VG fault while power up<br>1b = Disable power down DAC on DRVr VG fault while power up                                               |
| 1   | DAC_FLT_DET_DIS        | R/W  | 0b    | DAC vg_fault/sc_fault detect config<br>0b = enable<br>1b = disable                                                                                                                                                            |
| 0   | AREG_SC_FLAG_DET_DIS   | R/W  | 0b    | AREG short circuit detect config<br>0b = enable<br>1b = disable                                                                                                                                                               |

**7.1.1.63 VREF\_MICBIAS\_CFG Register (Address = 0x4D) [Reset = 0x00]**

VREF\_MICBIAS\_CFG is shown in [Table 7-65](#).

Return to the [Summary Table](#).

This register is the configuration register for VREF and MICBIAS.

**Table 7-65. VREF\_MICBIAS\_CFG Register Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----|------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | RESERVED         | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 4   | MICBIAS_LDO_GAIN | R/W  | 0b    | MICBIAS Output Gain Setting<br>0d = LDO gain = 1<br>1d = LDO gain = 1.096                                                                                                                                                                                                                                                                                                                                                                                                                |
| 3-2 | MICBIAS_VAL[1:0] | R/W  | 00b   | MICBIAS Output Setting<br>0d = Microphone Bias is set to VREF<br>1d = Microphone Bias is set to VREF/2 (Valid only for VREF_FSCALE 0 or 1 setting)<br>2d = Reserved<br>3d = Microphone Bias output is bypassed to AVDD                                                                                                                                                                                                                                                                   |
| 1-0 | VREF_FSCALE[1:0] | R/W  | 00b   | VREF/Full-Scale Setting (Need to configure this based on AVDD min voltage used)<br>0d = VREF set to 2.75V to support 2V <sub>RMS</sub> for Differential Input or 1V <sub>RMS</sub> for Single-Ended Input<br>1d = VREF set to 2.5V to support 1.818V <sub>RMS</sub> for Differential Input or 0.909V <sub>RMS</sub> for Single-Ended Input<br>2d = VREF set to 1.375V to support 1V <sub>RMS</sub> for Differential Input or 0.5V <sub>RMS</sub> for Single-Ended Input<br>3d = Reserved |

**7.1.1.64 PWR\_TUNE\_CFG0 Register (Address = 0x4E) [Reset = 0x00]**

PWR\_TUNE\_CFG0 is shown in [Table 7-66](#).

Return to the [Summary Table](#).

This register is configuration register 0 for power tune configuration.

**Table 7-66. PWR\_TUNE\_CFG0 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                   |
|-----|-------------------|------|-------|---------------------------------------------------------------------------------------------------------------|
| 7   | ADC_CLK_BY2_MODE  | R/W  | 0b    | ADC MOD CLK select configuration.<br>0d = MOD CLK 3.072MHz or 2.8224MHz<br>1d = MOD CLK 1.536MHz or 1.4112MHz |
| 6   | ADC_CIC_ORDER     | R/W  | 0b    | ADC CIC order configuration.<br>0d = 5th order CIC<br>1d = 4th order CIC                                      |
| 5   | ADC_FIR_BYPASS    | R/W  | 0b    | ADC FIR bypass configuration.<br>0d = Bypass disable<br>1d = Bypass enable                                    |
| 4   | ADC_DEM_RATE_OVRD | R/W  | 0b    | ADC DEM rate override configuration.<br>0d = Default<br>1d = 2x                                               |
| 3   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                          |
| 2   | ADC_LOW_PWR_FILT  | R/W  | 0b    | Low Power filter configuration for ADC<br>0d = Disable<br>1d = Enable                                         |
| 1-0 | RESERVED          | R    | 0b    | Reserved bits; Write only reset values                                                                        |

#### 7.1.1.65 PWR\_TUNE\_CFG1 Register (Address = 0x4F) [Reset = 0x00]

PWR\_TUNE\_CFG1 is shown in [Table 7-67](#).

Return to the [Summary Table](#).

This register is configuration register for power tune configuration.

**Table 7-67. PWR\_TUNE\_CFG1 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                   |
|-----|-------------------|------|-------|-------------------------------------------------------------------------------|
| 7   | DAC_CLK_BY2_MODE  | R/W  | 0b    | DAC MOD CLK select configuration.<br>0d = MOD CLK 3MHz<br>1d = MOD CLK 1.5MHz |
| 6   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                          |
| 5   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                          |
| 4   | DAC_DEM_RATE_OVRD | R/W  | 0b    | DAC DEM rate override configuration.<br>0d = Default<br>1d = 2x               |
| 3   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                          |
| 2   | DAC_LOW_PWR_FILT  | R/W  | 0b    | Low Power Filter configuration for DAC<br>0d = Disable<br>1d = Enable         |
| 1   | DAC_POWER_SCAL    | R/W  | 0b    | DAC IREF select configuration.<br>0d = Vref/R<br>1d = Vref/2R                 |
| 0   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                          |

#### 7.1.1.66 ADC\_CH1\_CFG2 Register (Address = 0x52) [Reset = 0xA1]

ADC\_CH1\_CFG2 is shown in [Table 7-68](#).

Return to the [Summary Table](#).

This register is configuration register 2 for ADC channel 1.

**Table 7-68. ADC\_CH1\_CFG2 Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADC_CH1_DVOL[7:0] | R/W  | 10100001b | Channel 1 digital volume control.<br>0d = Digital volume is muted<br>1d = Digital volume control is set to -80dB<br>2d = Digital volume control is set to -79.5dB<br>3d to 160d = Digital volume control is set as per configuration<br>161d = Digital volume control is set to 0dB<br>162d = Digital volume control is set to 0.5dB<br>163d to 253d = Digital volume control is set as per configuration<br>254d = Digital volume control is set to 46.5dB<br>255d = Digital volume control is set to 47dB |

#### 7.1.1.67 ADC\_CH1\_CFG3 Register (Address = 0x53) [Reset = 0x80]

ADC\_CH1\_CFG3 is shown in [Table 7-69](#).

Return to the [Summary Table](#).

This register is configuration register 3 for ADC channel 1.

**Table 7-69. ADC\_CH1\_CFG3 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | ADC_CH1_FGAIN[3:0] | R/W  | 1000b | ADC channel 1 fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED           | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                           |

#### 7.1.1.68 ADC\_CH1\_CFG4 Register (Address = 0x54) [Reset = 0x00]

ADC\_CH1\_CFG4 is shown in [Table 7-70](#).

Return to the [Summary Table](#).

This register is configuration register 4 for ADC channel 1.

**Table 7-70. ADC\_CH1\_CFG4 Register Field Descriptions**

| Bit | Field                 | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|-----------------------|------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | ADC_CH1_PCAL[5:0]     | R/W  | 000000b | ADC channel 1 phase calibration with modulator clock resolution.<br>0d = No phase calibration<br>1d = Phase calibration delay is set to one cycle of the modulator clock<br>2d = Phase calibration delay is set to two cycles of the modulator clock<br>3d to 62d = Phase calibration delay as per configuration<br>63d = Phase calibration delay is set to 63 cycles of the modulator clock |
| 1-0 | PCAL_ANA_DIG_SEL[1:0] | R/W  | 00b     | PCAL support configuration.<br>0d = Pcal for both Ana-Dig supported<br>1d = Pcal for only Ana<br>2d = Pcal for only Dig<br>3d = Reserved                                                                                                                                                                                                                                                     |

### 7.1.1.69 ADC\_CH2\_CFG2 Register (Address = 0x57) [Reset = 0xA1]

ADC\_CH2\_CFG2 is shown in [Table 7-71](#).

Return to the [Summary Table](#).

This register is configuration register 2 for channel 2.

**Table 7-71. ADC\_CH2\_CFG2 Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADC_CH2_DVOL[7:0] | R/W  | 10100001b | Channel 1 digital volume control.<br>0d = Digital volume is muted<br>1d = Digital volume control is set to -80dB<br>2d = Digital volume control is set to -79.5dB<br>3d to 160d = Digital volume control is set as per configuration<br>161d = Digital volume control is set to 0dB<br>162d = Digital volume control is set to 0.5dB<br>163d to 253d = Digital volume control is set as per configuration<br>254d = Digital volume control is set to 46.5dB<br>255d = Digital volume control is set to 47dB |

### 7.1.1.70 ADC\_CH2\_CFG3 Register (Address = 0x58) [Reset = 0x80]

ADC\_CH2\_CFG3 is shown in [Table 7-72](#).

Return to the [Summary Table](#).

This register is configuration register 3 for ADC Channel 2.

**Table 7-72. ADC\_CH2\_CFG3 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | ADC_CH2_FGAIN[3:0] | R/W  | 1000b | ADC Channel 2 fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED           | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                           |

### 7.1.1.71 ADC\_CH2\_CFG4 Register (Address = 0x59) [Reset = 0x00]

ADC\_CH2\_CFG4 is shown in [Table 7-73](#).

Return to the [Summary Table](#).

This register is configuration register 4 for ADC Channel 2.

**Table 7-73. ADC\_CH2\_CFG4 Register Field Descriptions**

| Bit | Field             | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|-------------------|------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | ADC_CH2_PCAL[5:0] | R/W  | 000000b | ADC Channel 2 phase calibration with modulator clock resolution.<br>0d = No phase calibration<br>1d = Phase calibration delay is set to one cycle of the modulator clock<br>2d = Phase calibration delay is set to two cycles of the modulator clock<br>3d to 62d = Phase calibration delay as per configuration<br>63d = Phase calibration delay is set to 63 cycles of the modulator clock |

**Table 7-73. ADC\_CH2\_CFG4 Register Field Descriptions (continued)**

| Bit | Field    | Type | Reset | Description                           |
|-----|----------|------|-------|---------------------------------------|
| 1-0 | RESERVED | R    | 0b    | Reserved bits; Write only reset value |

**7.1.1.72 ADC\_CH3\_CFG0 Register (Address = 0x5A) [Reset = 0x00]**

ADC\_CH3\_CFG0 is shown in [Table 7-74](#).

Return to the [Summary Table](#).

This register is configuration register 0 for ADC channel 3.

**Table 7-74. ADC\_CH3\_CFG0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                         |
|-----|---------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | ADC_CH3_CLONE | R/W  | 0b    | ADC Channel 3 input configuration.<br>0d = clone disabled<br>1d = Channel 3 Digital Filter Input is generated same as Channel 1 Digital Filter Input (Cloned Input) |
| 6-0 | RESERVED      | R    | 0b    | Reserved bits; Write only reset value                                                                                                                               |

**7.1.1.73 ADC\_CH3\_CFG2 Register (Address = 0x5B) [Reset = 0xA1]**

ADC\_CH3\_CFG2 is shown in [Table 7-75](#).

Return to the [Summary Table](#).

This register is configuration register 2 for ADC channel 3.

**Table 7-75. ADC\_CH3\_CFG2 Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADC_CH3_DVOL[7:0] | R/W  | 10100001b | Channel 3 digital volume control.<br>0d = Digital volume is muted<br>1d = Digital volume control is set to -80dB<br>2d = Digital volume control is set to -79.5dB<br>3d to 160d = Digital volume control is set as per configuration<br>161d = Digital volume control is set to 0dB<br>162d = Digital volume control is set to 0.5dB<br>163d to 253d = Digital volume control is set as per configuration<br>254d = Digital volume control is set to 46.5dB<br>255d = Digital volume control is set to 47dB |

**7.1.1.74 ADC\_CH3\_CFG3 Register (Address = 0x5C) [Reset = 0x80]**

ADC\_CH3\_CFG3 is shown in [Table 7-76](#).

Return to the [Summary Table](#).

This register is configuration register 3 for ADC channel 3.

**Table 7-76. ADC\_CH3\_CFG3 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | ADC_CH3_FGAIN[3:0] | R/W  | 1000b | ADC channel 3 fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED           | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                           |

#### 7.1.1.75 ADC\_CH3\_CFG4 Register (Address = 0x5D) [Reset = 0x00]

ADC\_CH3\_CFG4 is shown in [Table 7-77](#).

Return to the [Summary Table](#).

This register is configuration register 4 for ADC channel 3.

**Table 7-77. ADC\_CH3\_CFG4 Register Field Descriptions**

| Bit | Field             | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|-------------------|------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | ADC_CH3_PCAL[5:0] | R/W  | 000000b | ADC channel 3 phase calibration with modulator clock resolution.<br>0d = No phase calibration<br>1d = Phase calibration delay is set to one cycle of the modulator clock<br>2d = Phase calibration delay is set to two cycles of the modulator clock<br>3d to 62d = Phase calibration delay as per configuration<br>63d = Phase calibration delay is set to 63 cycles of the modulator clock |
| 1-0 | RESERVED          | R    | 0b      | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                        |

#### 7.1.1.76 ADC\_CH4\_CFG0 Register (Address = 0x5E) [Reset = 0x00]

ADC\_CH4\_CFG0 is shown in [Table 7-78](#).

Return to the [Summary Table](#).

This register is configuration register 0 for ADC Channel 4.

**Table 7-78. ADC\_CH4\_CFG0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                         |
|-----|---------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | ADC_CH4_CLONE | R/W  | 0b    | ADC Channel 4 input configuration.<br>0d = clone disabled<br>1d = Channel 4 Digital Filter Input is generated same as Channel 2 Digital Filter Input (Cloned Input) |
| 6-0 | RESERVED      | R    | 0b    | Reserved bits; Write only reset value                                                                                                                               |

#### 7.1.1.77 ADC\_CH4\_CFG2 Register (Address = 0x5F) [Reset = 0xA1]

ADC\_CH4\_CFG2 is shown in [Table 7-79](#).

Return to the [Summary Table](#).

This register is configuration register 2 for channel 4.

**Table 7-79. ADC\_CH4\_CFG2 Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|-------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADC_CH4_DVOL[7:0] | R/W  | 10100001b | Channel 4 digital volume control.<br>0d = Digital volume is muted<br>1d = Digital volume control is set to -80dB<br>2d = Digital volume control is set to -79.5dB<br>3d to 160d = Digital volume control is set as per configuration<br>161d = Digital volume control is set to 0dB<br>162d = Digital volume control is set to 0.5dB<br>163d to 253d = Digital volume control is set as per configuration<br>254d = Digital volume control is set to 46.5dB<br>255d = Digital volume control is set to 47dB |

**7.1.1.78 ADC\_CH4\_CFG3 Register (Address = 0x60) [Reset = 0x80]**

ADC\_CH4\_CFG3 is shown in [Table 7-80](#).

Return to the [Summary Table](#).

This register is configuration register 3 for ADC Channel 4.

**Table 7-80. ADC\_CH4\_CFG3 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | ADC_CH4_FGAIN[3:0] | R/W  | 1000b | ADC Channel 4 fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED           | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                           |

**7.1.1.79 ADC\_CH4\_CFG4 Register (Address = 0x61) [Reset = 0x00]**

ADC\_CH4\_CFG4 is shown in [Table 7-81](#).

Return to the [Summary Table](#).

This register is configuration register 4 for ADC Channel 4.

**Table 7-81. ADC\_CH4\_CFG4 Register Field Descriptions**

| Bit | Field             | Type | Reset   | Description                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|-------------------|------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | ADC_CH4_PCAL[5:0] | R/W  | 000000b | ADC Channel 4 phase calibration with modulator clock resolution.<br>0d = No phase calibration<br>1d = Phase calibration delay is set to one cycle of the modulator clock<br>2d = Phase calibration delay is set to two cycles of the modulator clock<br>3d to 62d = Phase calibration delay as per configuration<br>63d = Phase calibration delay is set to 63 cycles of the modulator clock |
| 1-0 | RESERVED          | R    | 0b      | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                        |

**7.1.1.80 OUT1x\_CFG0 Register (Address = 0x64) [Reset = 0x20]**

OUT1x\_CFG0 is shown in [Table 7-82](#).



Return to the [Summary Table](#).

This register is configuration register 0 for Channel OUT1x.

**Table 7-82. OUT1x\_CFG0 Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | OUT1x_SRC[2:0] | R/W  | 001b  | OUT1x Source Configuration.<br>0d = Reserved; Don't use<br>1d = Input from DAC signal chain<br>2d = Input from Analog bypass path<br>3d = Input from both DAC signal chain and Analog bypass path<br>4d = Independent input from both DAC signal chain and Analog bypass path (DAC -> OUT1P, IN1P -> OUT1M)<br>5d = Independent input from both DAC signal chain and Analog bypass path (IN1M -> OUT1P, DAC -> OUT1M)<br>6d-7d = Reserved; Don't use                                                                                                                                                                                                                                                                                                                        |
| 4-2 | OUT1x_CFG[2:0] | R/W  | 000b  | OUT1x DAC / Analog Bypass Routing Configuration. (Don't use if OUT1x_SRC configured 4d or 5d)<br>0d = Differential (DAC1AP + DAC1BP / IN1M -> OUT1P; DAC1AM + DAC1BM / IN1P -> OUT1M)<br>1d = Stereo single-ended (DAC1A / IN1M -> OUT1P; DAC1B / IN1P -> OUT1M)<br>2d = Mono single-ended with output at OUT1P only (DAC1A + DAC1B / IN1M -> OUT1P)<br>3d = Mono single-ended with output at OUT1M only (DAC1A + DAC1B / IN1P -> OUT1M)<br>4d = Pseudo differential with OUT1M as VCOM (DAC1A, DAC1B / IN1M -> OUT1P, VCOM -> OUT1M)<br>5d = Pseudo differential with OUT1M as VCOM and OUT2M for external sensing (DAC1A, DAC1B / IN1M -> OUT1P, VCOM -> OUT1M)<br>6d = Pseudo differential with OUT1P as VCOM (IN1P -> OUT1M, VCOM -> OUT1P)<br>7d = Reserved; Don't use |
| 1   | OUT1x_VCOM     | R/W  | 0b    | Channel OUT1x VCOM configuration.<br>0d = $0.6 \cdot V_{ref}$ (for 1.375V VREF mode alone as $0.654 \cdot V_{ref}$ )<br>1d = AVDD by 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

#### 7.1.1.81 OUT1x\_CFG1 Register (Address = 0x65) [Reset = 0x20]

OUT1x\_CFG1 is shown in [Table 7-83](#).

Return to the [Summary Table](#).

This register is configuration register 1 for Channel OUT1x.

**Table 7-83. OUT1x\_CFG1 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                                                                                |
|-----|------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | OUT1P_DRIVE[1:0] | R/W  | 00b   | Channel OUT1P drive configuration.<br>0d = Line out driver with minimum 300Ω single ended impedance<br>1d = Headphone driver with minimum 16Ω single ended impedance<br>2d = To drive minimum of 4Ω single ended impedance<br>3d = For higher DR/SNR for FD receiver loads |

**Table 7-83. OUT1x\_CFG1 Register Field Descriptions (continued)**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5-3 | OUT1P_LVL_CTRL[2:0] | R/W  | 100b  | Channel OUT1P level control configuration.<br>0d = Reserved; Don't use<br>1d = Reserved; Don't use<br>2d = 12dB (only valid in bypass only mode configured in OUT1x_SRC{B0_P0_R100})<br>3d = 6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT1x_SRC{B0_P0_R100})<br>4d = 0dB<br>5d = -6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT1x_SRC{B0_P0_R100})<br>6d = -12dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT1x_SRC{B0_P0_R100} and AIN1M_BYP_IMP configured 4.4kΩ )<br>7d = Reserved; Don't use |
| 2   | AIN1M_BYP_IMP       | R/W  | 0b    | AIN1M Analog Bypass input impedance.<br>0d = 4.4kΩ<br>1d = 20kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1   | AIN1x_BYP_CFG       | R/W  | 0b    | IN1x Analog Bypass input config.<br>0d = FD / Pseudo Diff<br>1d = SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 0   | DAC_CH1_BW_MODE     | R/W  | 0b    | DAC Channel 1 band-width selection.<br>0d = audio band-width (24kHz mode)<br>1d = wide band-width (96kHz mode)                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**7.1.1.82 OUT1x\_CFG2 Register (Address = 0x66) [Reset = 0x20]**

OUT1x\_CFG2 is shown in [Table 7-84](#).

Return to the [Summary Table](#).

This register is configuration register 2 for Channel OUT2x.

**Table 7-84. OUT1x\_CFG2 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | OUT1M_DRIVE[1:0]    | R/W  | 00b   | Channel OUT1M drive configuration.<br>0d = Line out driver with minimum 300Ω single ended impedance<br>1d = Headphone driver with minimum 16Ω single ended impedance<br>2d = To drive minimum of 4Ω single ended impedance<br>3d = For higher DR/SNR for FD receiver loads                                                                                                                                                                                                                                                                                                     |
| 5-3 | OUT1M_LVL_CTRL[2:0] | R/W  | 100b  | Channel OUT1M level control configuration.<br>0d = Reserved; Don't use<br>1d = Reserved; Don't use<br>2d = 12dB (only valid in bypass only mode configured in OUT1x_SRC{B0_P0_R100})<br>3d = 6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT1x_SRC{B0_P0_R100})<br>4d = 0dB<br>5d = -6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT1x_SRC{B0_P0_R100})<br>6d = -12dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT1x_SRC{B0_P0_R100} and AIN1M_BYP_IMP configured 4.4kΩ)<br>7d = Reserved; Don't use |
| 2   | AIN1P_BYP_IMP       | R/W  | 0b    | AIN1P Analog Bypass input impedance.<br>0d = 4.4kΩ<br>1d = 20kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 1   | RESERVED            | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Table 7-84. OUT1x\_CFG2 Register Field Descriptions (continued)**

| Bit | Field          | Type | Reset | Description                                                                                                                    |
|-----|----------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------|
| 0   | DAC_CH1_CM_TOL | R/W  | 0b    | DAC Channel 1 input coupling (applicable for the analog input).<br>0d = AC-coupled input<br>1d = AC-coupled / DC-coupled input |

#### 7.1.1.83 DAC\_CH1A\_CFG0 Register (Address = 0x67) [Reset = 0xC9]

DAC\_CH1A\_CFG0 is shown in [Table 7-85](#).

Return to the [Summary Table](#).

This register is configuration register 0 for DAC channel 1A.

**Table 7-85. DAC\_CH1A\_CFG0 Register Field Descriptions**

| Bit | Field              | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|--------------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DAC_CH1A_DVOL[7:0] | R/W  | 11001001b | Channel 1A digital volume control.<br>0d = Digital Volume is muted<br>1d = Digital Volume Control set to -100dB<br>2d = Digital Volume Control set to -99.5dB<br>3d to 200d = Digital Volume Control set to as per configuration<br>201d = Digital Volume Control set to 0dB<br>202d = Digital Volume Control set to +0.5dB<br>203d to 253d = Digital Volume Control set to as per configuration<br>254d = Digital Volume Control set to +26.5dB<br>255d = Digital Volume Control set to +27dB |

#### 7.1.1.84 DAC\_CH1A\_CFG1 Register (Address = 0x68) [Reset = 0x80]

DAC\_CH1A\_CFG1 is shown in [Table 7-86](#).

Return to the [Summary Table](#).

This register is configuration register 1 for DAC channel 1A.

**Table 7-86. DAC\_CH1A\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | DAC_CH1A_FGAIN[3:0] | R/W  | 1000b | DAC channel 1A fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED            | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                            |

#### 7.1.1.85 DAC\_CH1B\_CFG0 Register (Address = 0x69) [Reset = 0xC9]

DAC\_CH1B\_CFG0 is shown in [Table 7-87](#).

Return to the [Summary Table](#).

This register is configuration register 0 for DAC channel 1B.

**Table 7-87. DAC\_CH1B\_CFG0 Register Field Descriptions**

| Bit | Field              | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|--------------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DAC_CH1B_DVOL[7:0] | R/W  | 11001001b | Channel 1B digital volume control.<br>0d = Digital Volume is muted<br>1d = Digital Volume Control set to -100dB<br>2d = Digital Volume Control set to -99.5dB<br>3d to 200d = Digital Volume Control set to as per configuration<br>201d = Digital Volume Control set to 0dB<br>202d = Digital Volume Control set to +0.5dB<br>203d to 253d = Digital Volume Control set to as per configuration<br>254d = Digital Volume Control set to +26.5dB<br>255d = Digital Volume Control set to +27dB |

**7.1.1.86 DAC\_CH1B\_CFG1 Register (Address = 0x6A) [Reset = 0x80]**

DAC\_CH1B\_CFG1 is shown in [Table 7-88](#).

Return to the [Summary Table](#).

This register is configuration register 1 for DAC channel 1B.

**Table 7-88. DAC\_CH1B\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | DAC_CH1B_FGAIN[3:0] | R/W  | 1000b | DAC channel 1B fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED            | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                            |

**7.1.1.87 OUT2x\_CFG0 Register (Address = 0x6B) [Reset = 0x20]**

OUT2x\_CFG0 is shown in [Table 7-89](#).

Return to the [Summary Table](#).

This register is configuration register 0 for Channel OUT2x.

**Table 7-89. OUT2x\_CFG0 Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----|----------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | OUT2x_SRC[2:0] | R/W  | 001b  | OUT2x Source Configuration.<br>0d = Reserved; Don't use<br>1d = Input from DAC signal chain<br>2d = Input from Analog bypass path<br>3d = Input from both DAC signal chain and Analog bypass path<br>4d = Independent input from both DAC signal chain and Analog bypass path (DAC -> OUT2P, IN2P -> OUT2M)<br>5d = Independent input from both DAC signal chain and Analog bypass path (IN2M -> OUT2P, DAC -> OUT2M)<br>6d-7d = Reserved; Don't use |

**Table 7-89. OUT2x\_CFG0 Register Field Descriptions (continued)**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-2 | OUT2x_CFG[2:0] | R/W  | 000b  | OUT2x DAC / Analog Bypass Routing Configuration. (Don't use if OUT1x_SRC configured 4d or 5d)<br>0d = Differential (DAC2AP + DAC2BP / IN2M -> OUT2P ; DAC2AM + DAC2BM / IN2P -> OUT2M)<br>1d = Stereo single-ended (DAC2A / IN2M -> OUT2P ; DAC2B / IN2P -> OUT2M)<br>2d = Mono single-ended with output at OUT2P only (DAC2A + DAC2B / IN2M-> OUT2P)<br>3d = Mono single-ended with output at OUT2M only (DAC2A + DAC2B / IN2P -> OUT2M)<br>4d = Pseudo differential with OUT2M as VCOM (DAC2A, DAC2B / IN2M -> OUT2P, VCOM -> OUT2M)<br>5d =Reserved; Don't use<br>6d = Pseudo differential with OUT2P as VCOM (IN2P -> OUT2M, VCOM -> OUT2P)<br>7d = Reserved; Don't use |
| 1   | OUT2x_VCOM     | R/W  | 0b    | Channel OUT2x VCOM configuration.<br>0d = 0.6 * Vref (for 1.375V VREF mode alone as 0.654*Vref)<br>2d = AVDD by 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

#### 7.1.1.88 OUT2x\_CFG1 Register (Address = 0x6C) [Reset = 0x20]

OUT2x\_CFG1 is shown in [Table 7-90](#).

Return to the [Summary Table](#).

This register is configuration register 1 for Channel OUT2x.

**Table 7-90. OUT2x\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | OUT2P_DRIVE[1:0]    | R/W  | 00b   | Channel OUT2P drive configuration.<br>0d = Line out driver with minimum 300Ω single ended impedance<br>1d = Headphone driver with minimum 16Ω single ended impedance<br>2d = To drive minimum of 4Ω single ended impedance<br>3d = For higher DR/SNR for FD receiver loads                                                                                                                                                                                                                                                                                                     |
| 5-3 | OUT2P_LVL_CTRL[2:0] | R/W  | 100b  | Channel OUT2P level control configuration.<br>0d = Reserved; Don't use<br>1d = Reserved; Don't use<br>2d = 12dB (only valid in bypass only mode configured in OUT2x_SRC{B0_P0_R107})<br>3d = 6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT2x_SRC{B0_P0_R107})<br>4d = 0dB<br>5d = -6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT2x_SRC{B0_P0_R107})<br>6d = -12dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT2x_SRC{B0_P0_R107} and AIN1M_BYP_IMP configured 4.4kΩ)<br>7d = Reserved; Don't use |
| 2   | AIN2M_BYP_IMP       | R/W  | 0b    | AIN2M Analog Bypass input impedance.<br>0d = 4.4kΩ<br>1d = 20kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 1   | AIN2x_BYP_CFG       | R/W  | 0b    | IN2x Analog Bypass input config.<br>0d = FD / Pseudo Diff<br>1d = SE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0   | DAC_CH2_BW_MODE     | R/W  | 0b    | DAC Channel 2 band-width selection.<br>0d = audio band-width (24kHz mode)<br>1d = wide band-width (96kHz mode)                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

### 7.1.1.89 OUT2x\_CFG2 Register (Address = 0x6D) [Reset = 0x20]

OUT2x\_CFG2 is shown in [Table 7-91](#).

Return to the [Summary Table](#).

This register is configuration register 2 for Channel OUT2x.

**Table 7-91. OUT2x\_CFG2 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | OUT2M_DRIVE[1:0]    | R/W  | 00b   | Channel OUT2M drive configuration.<br>0d = Line out driver with minimum 300Ω single ended impedance<br>1d = Headphone driver with minimum 16Ω single ended impedance<br>2d = To drive minimum of 4Ω single ended impedance<br>3d = For higher DR/SNR for FD receiver loads                                                                                                                                                                                                                                                                                                     |
| 5-3 | OUT2M_LVL_CTRL[2:0] | R/W  | 100b  | Channel OUT2M level control configuration.<br>0d = Reserved; Don't use<br>1d = Reserved; Don't use<br>2d = 12dB (only valid in bypass only mode configured in OUT2x_SRC{B0_P0_R107})<br>3d = 6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT2x_SRC{B0_P0_R107})<br>4d = 0dB<br>5d = -6dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT2x_SRC{B0_P0_R107})<br>6d = -12dB (only valid if ana bypass mode or ana-dig mix mode configured in OUT2x_SRC{B0_P0_R107} and AIN1M_BYP_IMP configured 4.4kΩ)<br>7d = Reserved; Don't use |
| 2   | AIN2P_BYP_IMP       | R/W  | 0b    | AIN2P Analog Bypass input impedance.<br>0d = 4.4kΩ<br>1d = 20kΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 1   | RESERVED            | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0   | DAC_CH2_CM_TOL      | R/W  | 0b    | DAC Channel 2 input coupling (applicable for the analog input).<br>0d = AC-coupled input<br>1d = AC-coupled / DC-coupled input                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

### 7.1.1.90 DAC\_CH2A\_CFG0 Register (Address = 0x6E) [Reset = 0xC9]

DAC\_CH2A\_CFG0 is shown in [Table 7-92](#).

Return to the [Summary Table](#).

This register is configuration register 0 for DAC channel 2A.

**Table 7-92. DAC\_CH2A\_CFG0 Register Field Descriptions**

| Bit | Field              | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|--------------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DAC_CH2A_DVOL[7:0] | R/W  | 11001001b | Channel 2A digital volume control.<br>0d = Digital Volume is muted<br>1d = Digital Volume Control set to -100dB<br>2d = Digital Volume Control set to -99.5dB<br>3d to 200d = Digital Volume Control set to as per configuration<br>201d = Digital Volume Control set to 0dB<br>202d = Digital Volume Control set to +0.5dB<br>203d to 253d = Digital Volume Control set to as per configuration<br>254d = Digital Volume Control set to +26.5dB<br>255d = Digital Volume Control set to +27dB |

### 7.1.1.91 DAC\_CH2A\_CFG1 Register (Address = 0x6F) [Reset = 0x80]

DAC\_CH2A\_CFG1 is shown in [Table 7-93](#).

Return to the [Summary Table](#).

This register is configuration register 1 for DAC channel 2A.

**Table 7-93. DAC\_CH2A\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | DAC_CH2A_FGAIN[3:0] | R/W  | 1000b | DAC channel 2A fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED            | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                            |

#### 7.1.1.92 DAC\_CH2B\_CFG0 Register (Address = 0x70) [Reset = 0xC9]

DAC\_CH2B\_CFG0 is shown in [Table 7-94](#).

Return to the [Summary Table](#).

This register is configuration register 0 for DAC channel 2B.

**Table 7-94. DAC\_CH2B\_CFG0 Register Field Descriptions**

| Bit | Field              | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|--------------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DAC_CH2B_DVOL[7:0] | R/W  | 11001001b | Channel 2B digital volume control.<br>0d = Digital Volume is muted<br>1d = Digital Volume Control set to -100dB<br>2d = Digital Volume Control set to -99.5dB<br>3d to 200d = Digital Volume Control set to as per configuration<br>201d = Digital Volume Control set to 0dB<br>202d = Digital Volume Control set to +0.5dB<br>203d to 253d = Digital Volume Control set to as per configuration<br>254d = Digital Volume Control set to +26.5dB<br>255d = Digital Volume Control set to +27dB |

#### 7.1.1.93 DAC\_CH2B\_CFG1 Register (Address = 0x71) [Reset = 0x80]

DAC\_CH2B\_CFG1 is shown in [Table 7-95](#).

Return to the [Summary Table](#).

This register is configuration register 1 for DAC channel 2B.

**Table 7-95. DAC\_CH2B\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | DAC_CH2B_FGAIN[3:0] | R/W  | 1000b | DAC channel 2B fine gain calibration.<br>0d = Fine gain is set to -0.8dB<br>1d = Fine gain is set to -0.7dB<br>2d = Fine gain is set to -0.6dB<br>3d to 7d = Fine gain is set as per configuration<br>8d = Fine gain is set to 0dB<br>9d = Fine gain is set to 0.1dB<br>10d to 13d = Fine gain is set as per configuration<br>14d = Fine gain is set to 0.6dB<br>15d = Fine gain is set to 0.7dB |
| 3-0 | RESERVED            | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                            |

### 7.1.1.94 DSP\_CFG0 Register (Address = 0x72) [Reset = 0x18]

DSP\_CFG0 is shown in [Table 7-96](#).

Return to the [Summary Table](#).

This register is the digital signal processor (DSP) configuration register 0.

**Table 7-96. DSP\_CFG0 Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----|-----------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | ADC_DSP_DECI_FILT[1:0]<br>] | R/W  | 00b   | ADC channel decimation filter response.<br>0d = Linear phase<br>1d = Low latency<br>2d = Ultra-low latency<br>3d = Reserved; Don't use                                                                                                                                                                                                                                                                                                                                                     |
| 5-4 | ADC_DSP_HPF_SEL[1:0]        | R/W  | 01b   | ADC channel high-pass filter (HPF) selection.<br>0d = Programmable first-order IIR filter for a custom HPF with default coefficient values in P10_R120-127 and P11_R8-11 set as the all-pass filter<br>1d = HPF with a cutoff of $0.00002 \times f_s$ (1Hz at $f_s = 48\text{kHz}$ ) is selected<br>2d = HPF with a cutoff of $0.00025 \times f_s$ (12Hz at $f_s = 48\text{kHz}$ ) is selected<br>3d = HPF with a cutoff of $0.002 \times f_s$ (96Hz at $f_s = 48\text{kHz}$ ) is selected |
| 3-2 | ADC_DSP_BQ_CFG[1:0]         | R/W  | 10b   | Number of biquads per ADC channel configuration.<br>0d = No biquads per channel; biquads are all disabled<br>1d = 1 biquad per channel<br>2d = 2 biquads per channel<br>3d = 3 biquads per channel                                                                                                                                                                                                                                                                                         |
| 1   | ADC_DSP_DISABLE_SOFT_STEP   | R/W  | 0b    | ADC Soft-stepping disable during DVOL change, mute, and unmute.<br>0d = Soft-stepping enabled<br>1d = Soft-stepping disabled                                                                                                                                                                                                                                                                                                                                                               |
| 0   | ADC_DSP_DVOL_GANG           | R/W  | 0b    | DVOL control ganged across ADC channels.<br>0d = Each channel has DVOL CTRL settings as programmed in the ADC_CHx_DVOL bits<br>1d = All active channels must use the channel 1 DVOL setting (ADC_CH1_DVOL) irrespective of whether channel 1 is turned on or not                                                                                                                                                                                                                           |

### 7.1.1.95 DSP\_CFG1 Register (Address = 0x73) [Reset = 0x18]

DSP\_CFG1 is shown in [Table 7-97](#).

Return to the [Summary Table](#).

This register is the digital signal processor (DSP) configuration register 1.

**Table 7-97. DSP\_CFG1 Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----|-----------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | DAC_DSP_INTX_FILT[1:0]<br>] | R/W  | 00b   | DAC channel decimation filter response.<br>0d = Linear phase<br>1d = Low latency<br>2d = Ultra-low latency<br>3d = Reserved; Don't use                                                                                                                                                                                                                                                                                                                                                     |
| 5-4 | DAC_DSP_HPF_SEL[1:0]        | R/W  | 01b   | DAC channel high-pass filter (HPF) selection.<br>0d = Programmable first-order IIR filter for a custom HPF with default coefficient values in P17_R120-127 and P18_R8-11 set as the all-pass filter<br>1d = HPF with a cutoff of $0.00002 \times f_s$ (1Hz at $f_s = 48\text{kHz}$ ) is selected<br>2d = HPF with a cutoff of $0.00025 \times f_s$ (12Hz at $f_s = 48\text{kHz}$ ) is selected<br>3d = HPF with a cutoff of $0.002 \times f_s$ (96Hz at $f_s = 48\text{kHz}$ ) is selected |



**Table 7-97. DSP\_CFG1 Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset | Description                                                                                                                                                                                                                                                          |
|-----|---------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3-2 | DAC_DSP_BQ_CFG[1:0]       | R/W  | 10b   | Number of biquads per DAC channel configuration.<br>0d = No biquads per channel; biquads are all disabled<br>1d = 1 biquad per channel<br>2d = 2 biquads per channel<br>3d = 3 biquads per channel                                                                   |
| 1   | DAC_DSP_DISABLE_SOFT_STEP | R/W  | 0b    | DAC Soft-stepping disable during DVOL change, mute, and unmute.<br>0d = Soft-stepping enabled<br>1d = Soft-stepping disabled                                                                                                                                         |
| 0   | DAC_DSP_DVOL_GANG         | R/W  | 0b    | DVOL control ganged across DAC channels.<br>0d = Each DAC channel has DVOL CTRL settings as programmed in the DAC_CHx_DVOL bits<br>1d = All active channels must use the channel 1 DVOL setting (DAC_CH1_DVOL) irrespective of whether channel 1 is turned on or not |

#### 7.1.1.96 CH\_EN Register (Address = 0x76) [Reset = 0xCC]

CH\_EN is shown in [Table 7-98](#).

Return to the [Summary Table](#).

This register is the channel enable configuration register.

**Table 7-98. CH\_EN Register Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                               |
|-----|------------|------|-------|-----------------------------------------------------------------------------------------------------------|
| 7   | IN_CH1_EN  | R/W  | 1b    | Input channel 1 enable setting.<br>0d = Input channel 1 is disabled<br>1d = Input channel 1 is enabled    |
| 6   | IN_CH2_EN  | R/W  | 1b    | Input channel 2 enable setting.<br>0d = Input channel 2 is disabled<br>1d = Input channel 2 is enabled    |
| 5   | IN_CH3_EN  | R/W  | 0b    | Input channel 3 enable setting.<br>0d = Input channel 3 is disabled<br>1d = Input channel 3 is enabled    |
| 4   | IN_CH4_EN  | R/W  | 0b    | Input channel 4 enable setting.<br>0d = Input channel 4 is disabled<br>1d = Input channel 4 is enabled    |
| 3   | OUT_CH1_EN | R/W  | 1b    | Output channel 1 enable setting.<br>0d = Output channel 1 is disabled<br>1d = Output channel 1 is enabled |
| 2   | OUT_CH2_EN | R/W  | 1b    | Output channel 2 enable setting.<br>0d = Output channel 2 is disabled<br>1d = Output channel 2 is enabled |
| 1   | OUT_CH3_EN | R/W  | 0b    | Output channel 3 enable setting.<br>0d = Output channel 3 is disabled<br>1d = Output channel 3 is enabled |
| 0   | OUT_CH4_EN | R/W  | 0b    | Output channel 4 enable setting.<br>0d = Output channel 4 is disabled<br>1d = Output channel 4 is enabled |

#### 7.1.1.97 DYN\_PUPD\_CFG Register (Address = 0x77) [Reset = 0x00]

DYN\_PUPD\_CFG is shown in [Table 7-99](#).

Return to the [Summary Table](#).

This register is the power-up configuration register.

**Table 7-99. DYN\_PUPD\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset | Description                                                                                                                                                                                                                                                               |
|-----|---------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | ADC_DYN_PUPD_EN           | R/W  | 0b    | Dynamic channel power-up, power-down enable for record path.<br>0d = Channel power-up, power-down is not supported if any channel recording is on<br>1d = Channel can be powered up or down individually, even if channel recording is on                                 |
| 6   | ADC_DYN_MAXCH_SEL         | R/W  | 0b    | Dynamic mode maximum channel select configuration for record path.<br>0d = Channel 1 and channel 2 are used with dynamic channel power-up, power-down feature enabled<br>1d = Channel 1 to channel 4 are used with dynamic channel power-up, power-down feature enabled   |
| 5   | DAC_DYN_PUPD_EN           | R/W  | 0b    | Dynamic channel power-up, power-down enable for playback path.<br>0d = Channel power-up, power-down is not supported if any channel playback is on<br>1d = Channel can be powered up or down individually, even if channel playback is on                                 |
| 4   | DAC_DYN_MAXCH_SEL         | R/W  | 0b    | Dynamic mode maximum channel select configuration for playback path.<br>0d = Channel 1 and channel 2 are used with dynamic channel power-up, power-down feature enabled<br>1d = Channel 1 to channel 4 are used with dynamic channel power-up, power-down feature enabled |
| 3   | DYN_PUPD_ADC_PDM_DIFF_CLK | R/W  | 0b    | Dynamic power-up power-down with different adc mod clock and pdm clock configuration.<br>0d = Same ADC MOD CLK and PDM CLK in dynamic pupd<br>1d = Different ADC MOD CLK and PDM CLK in dynamic pupd                                                                      |
| 2   | RESERVED                  | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                      |
| 1   | ADC_CH_SWAP               | R/W  | 0b    | ADC channel swap enable configuration.<br>1d = No swap<br>1d = ADC channel 1 and 2 are swapped                                                                                                                                                                            |
| 0   | DAC_CH_SWAP               | R/W  | 0b    | DAC channel swap enable configuration.<br>1d = No swap<br>1d = DAC channel 1 and 2 are swapped                                                                                                                                                                            |

**7.1.1.98 PWR\_CFG Register (Address = 0x78) [Reset = 0x00]**

PWR\_CFG is shown in [Table 7-100](#).

Return to the [Summary Table](#).

This register is the power-up configuration register.

**Table 7-100. PWR\_CFG Register Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                           |
|-----|-------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------|
| 7   | ADC_PDZ     | R/W  | 0b    | Power control for ADC and PDM channels.<br>0d = Power down all ADC and PDM channels<br>1d = Power up all enabled ADC and PDM channels |
| 6   | DAC_PDZ     | R/W  | 0b    | Power control for DAC channels.<br>0d = Power down all DAC channels<br>1d = Power up all enabled DAC channels                         |
| 5   | MICBIAS_PDZ | R/W  | 0b    | Power control for MICBIAS.<br>0d = Power down MICBIAS<br>1d = Power up MICBIAS                                                        |
| 4   | RESERVED    | R    | 0b    | Reserved bit; Write only reset value                                                                                                  |
| 3   | UAD_EN      | R/W  | 0b    | Enable ultrasound activity detection (UAD) algorithm.<br>0d = UAD is disabled<br>1d = UAD is enabled                                  |

**Table 7-100. PWR\_CFG Register Field Descriptions (continued)**

| Bit | Field    | Type | Reset | Description                                                                                          |
|-----|----------|------|-------|------------------------------------------------------------------------------------------------------|
| 2   | VAD_EN   | R/W  | 0b    | Enable voice activity detection (VAD) algorithm.<br>0d = VAD is disabled<br>1d = VAD is enabled      |
| 1   | UAG_EN   | R/W  | 0b    | Enable ultrasound activity detection (UAG) algorithm.<br>0d = UAG is disabled<br>1d = UAG is enabled |
| 0   | RESERVED | R    | 0b    | Reserved bit; Write only reset value                                                                 |

#### 7.1.1.99 DEV\_STS0 Register (Address = 0x79) [Reset = 0x00]

DEV\_STS0 is shown in [Table 7-101](#).

Return to the [Summary Table](#).

This register is the device status value register 0.

**Table 7-101. DEV\_STS0 Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                            |
|-----|----------------|------|-------|------------------------------------------------------------------------------------------------------------------------|
| 7   | IN_CH1_STATUS  | R    | 0b    | ADC or PDM channel 1 power status.<br>0d = ADC or PDM channel is powered down<br>1d = ADC or PDM channel is powered up |
| 6   | IN_CH2_STATUS  | R    | 0b    | ADC or PDM channel 2 power status.<br>0d = ADC or PDM channel is powered down<br>1d = ADC or PDM channel is powered up |
| 5   | IN_CH3_STATUS  | R    | 0b    | ADC or PDM channel 1 power status.<br>0d = ADC or PDM channel is powered down<br>1d = ADC or PDM channel is powered up |
| 4   | IN_CH4_STATUS  | R    | 0b    | ADC or PDM channel 2 power status.<br>0d = ADC or PDM channel is powered down<br>1d = ADC or PDM channel is powered up |
| 3   | OUT_CH1_STATUS | R    | 0b    | DAC channel 1 power status.<br>0d = DAC channel is powered down<br>1d = DAC channel is powered up                      |
| 2   | OUT_CH2_STATUS | R    | 0b    | DAC channel 2 power status.<br>0d = DAC channel is powered down<br>1d = DAC channel is powered up                      |
| 1   | OUT_CH3_STATUS | R    | 0b    | DAC channel 3 power status.<br>0d = DAC channel is powered down<br>1d = DAC channel is powered up                      |
| 0   | OUT_CH4_STATUS | R    | 0b    | DAC channel 4 power status.<br>0d = DAC channel is powered down<br>1d = DAC channel is powered up                      |

#### 7.1.1.100 DEV\_STS1 Register (Address = 0x7A) [Reset = 0x80]

DEV\_STS1 is shown in [Table 7-102](#).

Return to the [Summary Table](#).

This register is the device status value register 1.

**Table 7-102. DEV\_STS1 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                                                                                                                                                 |
|-----|---------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | MODE_STS[2:0] | R    | 100b  | Device mode status.<br>0-3d = Reserved<br>4d = Device is in sleep mode or software shutdown mode<br>5d = Reserved<br>6d = Device is in active mode with all record and playback channels turned off<br>7d = Device is in active mode with at least one record or playback channel turned on |
| 4   | PLL_STS       | R    | 0b    | PLL status.<br>0d = PLL is not enabled<br>1d = PLL is enabled                                                                                                                                                                                                                               |
| 3   | MICBIAS_STS   | R    | 0b    | MICBIAS status.<br>0d = MICBIAS is disabled<br>1d = MICBIAS is enabled                                                                                                                                                                                                                      |
| 2   | RESERVED      | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                        |
| 1   | RESERVED      | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                        |
| 0   | RESERVED      | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                        |

**7.1.1.101 I2C\_CKSUM Register (Address = 0x7E) [Reset = 0x00]**

I2C\_CKSUM is shown in [Table 7-103](#).

Return to the [Summary Table](#).

This register returns the I<sup>2</sup>C transactions checksum value.

**Table 7-103. I2C\_CKSUM Register Field Descriptions**

| Bit | Field          | Type | Reset     | Description                                                                                                                                                                                                |
|-----|----------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | I2C_CKSUM[7:0] | R/W  | 00000000b | These bits return the I <sup>2</sup> C transactions checksum value. Writing to this register resets the checksum to the written value. This register is updated on writes to other registers on all pages. |

### 7.1.2 TAD5212\_B0\_P1 Registers

Table 7-104 lists the memory-mapped registers for the TAD5212\_B0\_P1 registers. All register offset addresses not listed in Table 7-104 are considered as reserved locations and the register contents are not be modified.

**Table 7-104. TAD5212\_B0\_P1 Registers**

| Address | Acronym        | Register Name                                                                                | Reset Value | Section                          |
|---------|----------------|----------------------------------------------------------------------------------------------|-------------|----------------------------------|
| 0x0     | PAGE_CFG       | Device page register                                                                         | 0x00        | <a href="#">Section 7.1.2.1</a>  |
| 0x3     | DSP_CFG0       | DSP configuration register 0                                                                 | 0x00        | <a href="#">Section 7.1.2.2</a>  |
| 0xD     | CLK_CFG0       | Clock configuration register 0                                                               | 0x00        | <a href="#">Section 7.1.2.3</a>  |
| 0xE     | CHANNEL_CFG1   | ADC channel configuration register                                                           | 0x00        | <a href="#">Section 7.1.2.4</a>  |
| 0xF     | CHANNEL_CFG2   | DAC channel configuration register                                                           | 0x00        | <a href="#">Section 7.1.2.5</a>  |
| 0x17    | SRC_CFG0       | SRC configuration register 1                                                                 | 0x00        | <a href="#">Section 7.1.2.6</a>  |
| 0x18    | SRC_CFG1       | SRC configuration register 2                                                                 | 0x00        | <a href="#">Section 7.1.2.7</a>  |
| 0x19    | JACK_DET_CFG0  | Jack Detection configuration register 0                                                      | 0x00        | <a href="#">Section 7.1.2.8</a>  |
| 0x1A    | JACK_DET_CFG1  | Jack Detection configuration register 1                                                      | 0x00        | <a href="#">Section 7.1.2.9</a>  |
| 0x1B    | JACK_DET_CFG2  | Jack Detection configuration register 2                                                      | 0x00        | <a href="#">Section 7.1.2.10</a> |
| 0x1C    | JACK_DET_CFG3  | Jack Detection configuration register 3                                                      | 0x00        | <a href="#">Section 7.1.2.11</a> |
| 0x1E    | LPAD_CFG1      | Low power activity detection configuration register                                          | 0x20        | <a href="#">Section 7.1.2.12</a> |
| 0x1F    | LPSG_CFG1      | Low power signal generation configuration register 1                                         | 0x80        | <a href="#">Section 7.1.2.13</a> |
| 0x20    | LPAD_LPSG_CFG1 | Low power activity detection and Low power signal generation common configuration register 1 | 0x00        | <a href="#">Section 7.1.2.14</a> |
| 0x23    | LIMITER_CFG    | Limiter configuration register                                                               | 0x00        | <a href="#">Section 7.1.2.15</a> |
| 0x24    | AGC_DRC_CFG    | AGC and DRC configuration register                                                           | 0x00        | <a href="#">Section 7.1.2.16</a> |
| 0x2B    | PLIM_CFG0      | PLIM configuration register 0                                                                | 0x00        | <a href="#">Section 7.1.2.17</a> |
| 0x2C    | MIXER_CFG0     | MIXER configuration register 0                                                               | 0x00        | <a href="#">Section 7.1.2.18</a> |
| 0x2D    | MISC_CFG0      | Miscellaneous configuration register 0                                                       | 0x00        | <a href="#">Section 7.1.2.19</a> |
| 0x2E    | BRWNOUT        | Brownout configuration register                                                              | 0xBF        | <a href="#">Section 7.1.2.20</a> |
| 0x2F    | INT_MASK0      | Interrupt mask register 0                                                                    | 0xFF        | <a href="#">Section 7.1.2.21</a> |
| 0x32    | INT_MASK4      | Interrupt mask register 4                                                                    | 0x00        | <a href="#">Section 7.1.2.22</a> |
| 0x33    | INT_MASK5      | Interrupt mask register 5                                                                    | 0x30        | <a href="#">Section 7.1.2.23</a> |
| 0x34    | INT_LTCH0      | Latched interrupt readback register 0                                                        | 0x00        | <a href="#">Section 7.1.2.24</a> |
| 0x35    | CHx_LTCH       | Latched summary of diagnostics register                                                      | 0x00        | <a href="#">Section 7.1.2.25</a> |
| 0x38    | OUT_CH1_LTCH   | Channel 1 output DC faults diagnostics latched status register                               | 0x00        | <a href="#">Section 7.1.2.26</a> |
| 0x39    | OUT_CH2_LTCH   | Channel 2 output DC faults diagnostics latched status register                               | 0x00        | <a href="#">Section 7.1.2.27</a> |
| 0x3A    | INT_LTCH1      | Latched interrupt readback register 1                                                        | 0x00        | <a href="#">Section 7.1.2.28</a> |
| 0x3B    | INT_LTCH2      | Latched interrupt readback register 2                                                        | 0x00        | <a href="#">Section 7.1.2.29</a> |
| 0x3C    | INT_LIVE0      | Live Interrupt readback register 0                                                           | 0x00        | <a href="#">Section 7.1.2.30</a> |
| 0x3D    | CHx_LIVE       | Live summary of diagnostics registers                                                        | 0x00        | <a href="#">Section 7.1.2.31</a> |
| 0x40    | OUT_CH1_LIVE   | Channel 1 output DC faults diagnostics live status register                                  | 0x00        | <a href="#">Section 7.1.2.32</a> |
| 0x41    | OUT_CH2_LIVE   | Channel 2 output DC faults diagnostics live status register                                  | 0x00        | <a href="#">Section 7.1.2.33</a> |
| 0x42    | INT_LIVE1      | Live interrupt readback register 1                                                           | 0x00        | <a href="#">Section 7.1.2.34</a> |
| 0x43    | INT_LIVE2      | Live interrupt readback register 2                                                           | 0x00        | <a href="#">Section 7.1.2.35</a> |
| 0x4E    | DIAG_CFG8      | Input diagnostics configuration register 8                                                   | 0xBA        | <a href="#">Section 7.1.2.36</a> |
| 0x4F    | DIAG_CFG9      | Input diagnostics configuration register 9                                                   | 0x4B        | <a href="#">Section 7.1.2.37</a> |
| 0x53    | DIAG_CFG13     | Input diagnostics configuration register 13                                                  | 0x00        | <a href="#">Section 7.1.2.38</a> |
| 0x54    | DIAG_CFG14     | Input diagnostics configuration register 14                                                  | 0x48        | <a href="#">Section 7.1.2.39</a> |

**Table 7-104. TAD5212\_B0\_P1 Registers (continued)**

| Address | Acronym            | Register Name                                        | Reset Value | Section                          |
|---------|--------------------|------------------------------------------------------|-------------|----------------------------------|
| 0x55    | DIAGDATA_CFG       | Input diagnostics data configuration register        | 0x00        | <a href="#">Section 7.1.2.40</a> |
| 0x58    | DIAG_MON_MSB_MBIAS | Diagnostics SAR MICBIAS monitor data MSB byte        | 0x00        | <a href="#">Section 7.1.2.41</a> |
| 0x59    | DIAG_MON_LSB_MBIAS | Diagnostics SAR MICBIAS monitor data LSB nibble      | 0x01        | <a href="#">Section 7.1.2.42</a> |
| 0x62    | DIAG_MON_MSB_OUT1P | Diagnostics SAR OUT1P monitor data MSB byte          | 0x00        | <a href="#">Section 7.1.2.43</a> |
| 0x63    | DIAG_MON_LSB_OUT1P | Diagnostics SAR OUT1P monitor data LSB nibble        | 0x06        | <a href="#">Section 7.1.2.44</a> |
| 0x64    | DIAG_MON_MSB_OUT1M | Diagnostics SAR OUT1M monitor data MSB byte          | 0x00        | <a href="#">Section 7.1.2.45</a> |
| 0x65    | DIAG_MON_LSB_OUT1M | Diagnostics SAR OUT1M monitor data LSB nibble        | 0x07        | <a href="#">Section 7.1.2.46</a> |
| 0x66    | DIAG_MON_MSB_OUT2P | Diagnostics SAR OUT2P monitor data MSB byte          | 0x00        | <a href="#">Section 7.1.2.47</a> |
| 0x67    | DIAG_MON_LSB_OUT2P | Diagnostics SAR OUT2P monitor data LSB nibble        | 0x08        | <a href="#">Section 7.1.2.48</a> |
| 0x68    | DIAG_MON_MSB_OUT2M | Diagnostics SAR OUT2M monitor data MSB byte          | 0x00        | <a href="#">Section 7.1.2.49</a> |
| 0x69    | DIAG_MON_LSB_OUT2M | Diagnostics SAR OUT2M monitor data LSB nibble        | 0x09        | <a href="#">Section 7.1.2.50</a> |
| 0x6A    | DIAG_MON_MSB_TEMP  | Diagnostics SAR Temperature monitor data MSB byte    | 0x00        | <a href="#">Section 7.1.2.51</a> |
| 0x6B    | DIAG_MON_LSB_TEMP  | Diagnostics SAR Temperature monitor data LSB nibble  | 0x0A        | <a href="#">Section 7.1.2.52</a> |
| 0x6E    | DIAG_MON_MSB_AVDD  | Diagnostics SAR AVDD monitor data MSB byte           | 0x00        | <a href="#">Section 7.1.2.53</a> |
| 0x6F    | DIAG_MON_LSB_AVDD  | Diagnostics SAR AVDD monitor data LSB nibble         | 0x0C        | <a href="#">Section 7.1.2.54</a> |
| 0x70    | DIAG_MON_MSB_GPA   | Diagnostics SAR GPA monitor data MSB byte            | 0x00        | <a href="#">Section 7.1.2.55</a> |
| 0x71    | DIAG_MON_LSB_GPA   | Diagnostics SAR GPA monitor data LSB nibble register | 0x0D        | <a href="#">Section 7.1.2.56</a> |

**7.1.2.1 PAGE\_CFG Register (Address = 0x0) [Reset = 0x00]**

PAGE\_CFG is shown in [Table 7-105](#).

Return to the [Summary Table](#).

The device memory map is divided into pages. This register sets the page.

**Table 7-105. PAGE\_CFG Register Field Descriptions**

| Bit | Field     | Type | Reset     | Description                                                                                                                      |
|-----|-----------|------|-----------|----------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PAGE[7:0] | R/W  | 00000000b | These bits set the device page.<br>0d = Page 0<br>1d = Page 1<br>2d to 254d = Page 2 to page 254 respectively<br>255d = Page 255 |

**7.1.2.2 DSP\_CFG0 Register (Address = 0x3) [Reset = 0x00]**

DSP\_CFG0 is shown in [Table 7-106](#).

Return to the [Summary Table](#).

This register is the configuration register for on-the-fly filter updates.

**Table 7-106. DSP\_CFG0 Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 7   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 6   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 5   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 4   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 3   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 2   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 1   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**Table 7-106. DSP\_CFG0 Register Field Descriptions (continued)**

| Bit | Field         | Type | Reset | Description                                                                                                                    |
|-----|---------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------|
| 0   | EN_BQ_OTF_CHG | R/W  | 0b    | Enable run-time changes to Biquad settings.<br>0d = Disable on the fly biquad changes<br>1d = Enable on the fly biquad changes |

### 7.1.2.3 CLK\_CFG0 Register (Address = 0xD) [Reset = 0x00]

CLK\_CFG0 is shown in [Table 7-107](#).

Return to the [Summary Table](#).

This register is the Clock configuration register 0.

**Table 7-107. CLK\_CFG0 Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                         |
|-----|----------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CNT_TGT_CFG_OVR_PASI | R/W  | 0b    | ASI controller target Config Override Register<br>0d = controller-target Config as per PASI_CNT_CFG bit.<br>1d = Override the standard behavior of the PASI_CNT_CFG. In this case the clock auto detect feature is not available.<br>PASI_CNT_CFG = 0 : BCLK is input but FSYNC is output.<br>PASI_CNT_CFG = 1 : BCLK is output but FSYNC in input. |
| 6   | CNT_TGT_CFG_OVR_SASI | R/W  | 0b    | ASI controller target Config Override Register<br>0d = controller-target Config as per SASI_CNT_CFG bit.<br>1d = Override the standard behavior of the SASI_CNT_CFG. In this case the clock auto detect feature is not available.<br>SASI_CNT_CFG = 0 : BCLK is input but FSYNC is output.<br>SASI_CNT_CFG = 1 : BCLK is output but FSYNC in input. |
| 5-3 | RESERVED             | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                               |
| 2   | PASI_USE_INT_FSYNC   | R/W  | 0b    | For Primary use internal FSYNC in controller mode configuration.<br>0d = Use external FSYNC<br>1d = Use internal FSYNC                                                                                                                                                                                                                              |
| 1   | SASI_USE_INT_FSYNC   | R/W  | 0b    | For Secondary use internal FSYNC in controller mode configuration.<br>0d = Use external FSYNC<br>1d = Use internal FSYNC                                                                                                                                                                                                                            |
| 0   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                |

### 7.1.2.4 CHANNEL\_CFG1 Register (Address = 0xE) [Reset = 0x00]

CHANNEL\_CFG1 is shown in [Table 7-108](#).

Return to the [Summary Table](#).

This is the ADC channel dynamic power-on or off configuration register.

**Table 7-108. CHANNEL\_CFG1 Register Field Descriptions**

| Bit | Field                      | Type | Reset | Description                                                                                                                                                                    |
|-----|----------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | FORCE_DYN_MODE_CUST_MAX_CH | R/W  | 0b    | ADC Force dynamic mode custom max channel<br>0d = In Dynamic, Max channel is based on ADC_DYN_MAXCH_SEL<br>1d = In Dynamic mode, max channel is custom as DYN_MODE_CUST_MAX_CH |
| 6-3 | DYN_MODE_CUST_MAX_CH[3:0]  | R/W  | 0000b | ADC Dynamic mode custom max channel configuration<br>[3]->CH4_EN<br>[2]->CH3_EN<br>[1]->CH2_EN<br>[0]->CH1_EN                                                                  |
| 2-0 | RESERVED                   | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                         |

### 7.1.2.5 CHANNEL\_CFG2 Register (Address = 0xF) [Reset = 0x00]

CHANNEL\_CFG2 is shown in [Table 7-109](#).

Return to the [Summary Table](#).

This is the DAC channel dynamic power-on or off configuration register.

**Table 7-109. CHANNEL\_CFG2 Register Field Descriptions**

| Bit | Field                          | Type | Reset | Description                                                                                                                                                                            |
|-----|--------------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | DAC_FORCE_DYN_MODE_CUST_MAX_CH | R/W  | 0b    | DAC Force dynamic mode custom max channel<br>0d = In Dynamic, Max channel is based on DAC_DYN_MAXCH_SEL<br>1d = In Dynamic mode, max channel is custom as per DAC_DYN_MODE_CUST_MAX_CH |
| 6-3 | DAC_DYN_MODE_CUST_MAX_CH[3:0]  | R/W  | 0000b | DAC Dynamic mode custom max channel configuration ([3]->CH4_EN, [2]->CH3_EN, [1]->CH2_EN, [0]->CH1_EN)<br>[3]->CH4_EN<br>[2]->CH3_EN<br>[1]->CH2_EN<br>[0]->CH1_EN                     |
| 2-0 | RESERVED                       | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                 |

### 7.1.2.6 SRC\_CFG0 Register (Address = 0x17) [Reset = 0x00]

SRC\_CFG0 is shown in [Table 7-110](#).

Return to the [Summary Table](#).

This register is configuration register 1 for SRC.

**Table 7-110. SRC\_CFG0 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                             |
|-----|------------------|------|-------|-----------------------------------------------------------------------------------------|
| 7   | SRC_EN           | R/W  | 0b    | SRC enable config<br>0b = SRC disable<br>1b = SRC enable                                |
| 6   | DIS_AUTO_SRC_DET | R/W  | 0b    | SRC auto detect config<br>0b = SRC auto detect enabled<br>1b = SRC auto detect disabled |
| 5-0 | RESERVED         | R    | 0b    | Reserved bits; Write only reset value                                                   |

### 7.1.2.7 SRC\_CFG1 Register (Address = 0x18) [Reset = 0x00]

SRC\_CFG1 is shown in [Table 7-111](#).

Return to the [Summary Table](#).

This register is configuration register 2 for SRC.

**Table 7-111. SRC\_CFG1 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                                                        |
|-----|--------------------|------|-------|--------------------------------------------------------------------------------------------------------------------|
| 7   | MAIN_FS_CUSTOM_CFG | R/W  | 0b    | Main Fs custom config<br>0b = Main Fs is auto inferred<br>1b = Main Fs need to be selected from MAIN_FS_SELECT_CFG |
| 6   | MAIN_FS_SELECT_CFG | R/W  | 0b    | Main Fs select config<br>0b = PASI Fs shall be used as Main Fs<br>1b = SASI Fs shall be used as Main Fs            |



**Table 7-111. SRC\_CFG1 Register Field Descriptions (continued)**

| Bit | Field                                | Type | Reset | Description                                                                                                                                     |
|-----|--------------------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 5-3 | MAIN_AUX_RATIO_M_C<br>USTOM_CFG[2:0] | R/W  | 000b  | Main and Aux Fs Ratio m:n config<br>0d = m is auto inferred<br>1d = 1<br>2d = 2<br>3d = 3<br>4d = 4<br>5d = Reserved<br>6d = 6<br>7d = Reserved |
| 2-0 | MAIN_AUX_RATIO_N_C<br>USTOM_CFG[2:0] | R/W  | 000b  | Main and Aux Fs Ratio m:n config<br>0d = n is auto inferred<br>1d = 1<br>2d = 2<br>3d = 3<br>4d = 4<br>5d = Reserved<br>6d = 6<br>7d = Reserved |

#### 7.1.2.8 JACK\_DET\_CFG0 Register (Address = 0x19) [Reset = 0x00]

JACK\_DET\_CFG0 is shown in [Table 7-112](#).

Return to the [Summary Table](#).

This register is the Jack Detection configuration register 0.

**Table 7-112. JACK\_DET\_CFG0 Register Field Descriptions**

| Bit | Field                          | Type | Reset | Description                                                                                           |
|-----|--------------------------------|------|-------|-------------------------------------------------------------------------------------------------------|
| 7-6 | JACK_DET_MONITOR_F<br>REQ[1:0] | R/W  | 00b   | Headset Detection Pulse Frequency<br>0d = 0.5Hz<br>1d = 1Hz<br>2d = 7.5Hz<br>3d = 15Hz                |
| 5   | JACK_DET_PULSE_WID<br>TH       | R/W  | 0b    | Detector Pulse High Width<br>0d = 4ms (MICBIAS PIN Cap = 1 uF)<br>1d = 32ms (MICBIAS PIN Cap = 10 uF) |
| 4   | RESERVED                       | R    | 0b    | Reserved bit; Write only reset value                                                                  |
| 3   | RESERVED                       | R    | 0b    | Reserved bit; Write only reset value                                                                  |
| 2-1 | HPDET_CLOCK_SEL[1:0]           | R/W  | 00b   | Headphone Detection Clock Time period Select<br>0d = 1ms<br>1d = 2ms<br>2d = 4ms<br>3d = Reserved     |
| 0   | RESERVED                       | R    | 0b    | Reserved bit; Write only reset value                                                                  |

#### 7.1.2.9 JACK\_DET\_CFG1 Register (Address = 0x1A) [Reset = 0x00]

JACK\_DET\_CFG1 is shown in [Table 7-113](#).

Return to the [Summary Table](#).

This register is the Jack Detection configuration register 1.

**Table 7-113. JACK\_DET\_CFG1 Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 7   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**Table 7-113. JACK\_DET\_CFG1 Register Field Descriptions (continued)**

| Bit | Field                        | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----|------------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6   | JACK_DET_COMP_CTRL<br>2      | R/W  | 0b    | Hook Press Threshold Control in Fixed External Resistance case, controls the choice of Lowest Microphone impedance to be supported or Highest Hook button Impedance to be supported<br>0d = Minimum Microphone resistance supported, R_Mic = 800 $\Omega$ s and Max Hook button impedance supported, R_Hook = 320 $\Omega$ s for AC coupled Headphones R26<3> = 0 (else, when R26<3> = 1, R_hook = 150 $\Omega$ s)<br>1d = Max Hook button impedance supported, R_hook = 680 $\Omega$ s and Minimum Microphone resistance supported, R_Mic = 1350 $\Omega$ s for AC coupled Headphones R26<3> = 0 (else, when R26<3> = 1, R_Mic = 1750 $\Omega$ s) |
| 5-4 | JACK_DET_COMP_CTRL<br>3[1:0] | R/W  | 00b   | Hook Pressed Jack Insertion support, valid only for External Resistor Type P0_R25_D4 = 0 else Don't care.<br>0d = supports minimum Hook button impedance of 150 $\Omega$ s for Hook Pressed Jack Insertion detection<br>1d = supports minimum Hook button impedance of 100 $\Omega$ s for Hook Pressed Jack Insertion detection<br>2d = supports minimum Hook button impedance of 50 $\Omega$ s for Hook Pressed Jack Insertion detection<br>3d = Reserved                                                                                                                                                                                         |
| 3   | HPDET_COUPLING               | R/W  | 0b    | Headphone detect coupling<br>0d = AC coupled<br>1d = DC coupled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 2   | HPDET_USE_2x_CURR            | R/W  | 0b    | Headset detect current sel config<br>0d = 2x current for headphone detection disabled<br>1d = 2x current for headphone detection enabled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 1   | JACK_DET_EN                  | R/W  | 0b    | Headset Detection Enable<br>0d = Headset Detection Disabled<br>1d = Headset Detection Enabled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0   | RESERVED                     | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**7.1.2.10 JACK\_DET\_CFG2 Register (Address = 0x1B) [Reset = 0x00]**

JACK\_DET\_CFG2 is shown in [Table 7-114](#).

Return to the [Summary Table](#).

This register is the Jack Detection configuration register 2.

**Table 7-114. JACK\_DET\_CFG2 Register Field Descriptions**

| Bit | Field                         | Type | Reset | Description                                                                                                                                                                                                                                                             |
|-----|-------------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                      | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                    |
| 6   | HPDET_DEB                     | R/W  | 0b    | Headphone Detection Debounce Programmability<br>0d = No Debounce<br>1d = Debounce of 3 detections                                                                                                                                                                       |
| 5-3 | JACK_DET_DEB_INSERT<br>T[2:0] | R/W  | 000b  | Headset Insert Detection Debounce Programmability<br>0d = Debounce Time = 16ms<br>1d = Debounce Time = 32ms<br>2d = Debounce Time = 64ms<br>3d = Debounce Time = 128ms<br>4d = Debounce Time = 256ms<br>5d = Debounce Time = 512ms<br>6d = Reserved<br>7d = No Debounce |
| 2   | JACK_DET_DEB_REMO<br>VAL      | R/W  | 0b    | Headset Removal Detection Debounce Programmability<br>0d = Debounce of 5 detections<br>1d = Debounce of 3 detections                                                                                                                                                    |

**Table 7-114. JACK\_DET\_CFG2 Register Field Descriptions (continued)**

| Bit | Field                        | Type | Reset | Description                                                                                                                          |
|-----|------------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------|
| 1-0 | JACK_DET_DEB_HOOK_PRESS[1:0] | R/W  | 00b   | Hook Press Debounce config<br>0d = No Debounce<br>1d = No Debounce<br>2d = Debounce of 2 detections<br>3d = Debounce of 3 detections |

#### 7.1.2.11 JACK\_DET\_CFG3 Register (Address = 0x1C) [Reset = 0x00]

JACK\_DET\_CFG3 is shown in [Table 7-115](#).

Return to the [Summary Table](#).

This register is the Jack Detection configuration register 3.

**Table 7-115. JACK\_DET\_CFG3 Register Field Descriptions**

| Bit | Field                 | Type | Reset | Description                                                                                                                                                                     |
|-----|-----------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | JACK_TYPE_FLAG[1:0]   | R    | 00b   | Headset Jack type flag<br>0d = Jack is not inserted<br>1d = Jack is inserted without Microphone<br>2d = Reserved. Do not use<br>3d = Jack is inserted with Microphone           |
| 5-4 | HEADSET_TYPE_DET[1:0] | R    | 00b   | Headset type<br>0d = Headset is not inserted<br>1d = Jack is inserted with mono-HS (RIGHT)<br>2d = Jack is inserted with mono-HS (LEFT)<br>3d = Jack is inserted with stereo-HS |
| 3-0 | RESERVED              | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                           |

#### 7.1.2.12 LPAD\_CFG1 Register (Address = 0x1E) [Reset = 0x20]

LPAD\_CFG1 is shown in [Table 7-116](#).

Return to the [Summary Table](#).

This register is the voice activity detection or ultrasonic activity detection configuration register 1.

**Table 7-116. LPAD\_CFG1 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                    |
|-----|-------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | LPAD_MODE[1:0]    | R/W  | 00b   | Auto ADC power up / power down configuration selection.<br>0d = User initiated ADC power-up and ADC power-down<br>1d = VAD/UAD interrupt based ADC power up and ADC power down<br>2d = VAD/UAD interrupt based ADC power up but user initiated ADC power down<br>3d = Reserved |
| 5-4 | LPAD_CH_SEL[1:0]  | R/W  | 10b   | VAD channel select.<br>0d = Channel 1 is monitored for VAD/UAD activity<br>1d = Channel 2 is monitored for VAD/UAD activity<br>2d = Channel 3 is monitored for VAD/UAD activity<br>3d = Channel 4 is monitored for VAD/UAD activity                                            |
| 3   | LPAD_DOUT_INT_CFG | R/W  | 0b    | DOUT interrupt configuration.<br>0d = DOUT pin is not enabled for interrupt function<br>1d = DOUT pin is enabled to support interrupt output when channel data in not being recorded                                                                                           |
| 2   | RESERVED          | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                           |
| 1   | LPAD_PD_DET_EN    | R/W  | 0b    | Enable ASI output data during VAD/UAD activity.<br>0d = VAD/UAD processing is not enabled during ADC recording<br>1d = VAD/UAD processing is enabled during ADC recording and VAD interrupts are generated as configured                                                       |

**Table 7-116. LPAD\_CFG1 Register Field Descriptions (continued)**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 0   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**7.1.2.13 LPSG\_CFG1 Register (Address = 0x1F) [Reset = 0x80]**

LPSG\_CFG1 is shown in [Table 7-117](#).

Return to the [Summary Table](#).

This register is configuration register 1 for Ultrasonic signal generation.

**Table 7-117. LPSG\_CFG1 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                           |
|-----|------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | LPSG_CH_SEL[1:0] | R/W  | 10b   | LPSG channel select.- UAG<br>0d = UAG activity is generated on channel 1<br>1d = UAG activity is generated on channel 2<br>2d = UAG activity is generated on channel 3<br>3d = UAG activity is generated on channel 4 |
| 5   | RESERVED         | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                  |
| 4-0 | RESERVED         | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                |

**7.1.2.14 LPAD\_LPSG\_CFG1 Register (Address = 0x20) [Reset = 0x00]**

LPAD\_LPSG\_CFG1 is shown in [Table 7-118](#).

Return to the [Summary Table](#).

This register is configuration register 1 for VAD/UAD/UAG.

**Table 7-118. LPAD\_LPSG\_CFG1 Register Field Descriptions**

| Bit | Field                      | Type | Reset | Description                                                                                                                                                                                                                                                                                                                     |
|-----|----------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | LPAD_LPSG_CLK_CFG[1:0]     | R/W  | 00b   | Clock select for VAD/UAD/UAG<br>0d = VAD/UAD/UAG processing using internal oscillator clock<br>1d = VAD/UAD/UAG processing using external clock on BCLK input<br>2d = VAD/UAD/UAG processing using external clock on CCLK input<br>3d = Custom clock configuration based on CNT_CFG, CLK_SRC and CLKGEN_CFG registers in page 0 |
| 5-4 | LPAD_LPSG_EXT_CLK_CFG[1:0] | R/W  | 00b   | Clock configuration using external clock for VAD/UAD/UAG<br>0d = External clock is 24.576MHz<br>1d = Reserved<br>2d = External clock is 12.288MHz<br>3d = External clock is 18.432MHz                                                                                                                                           |
| 3   | RESERVED                   | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                            |
| 2   | LPAD_PH1_EN                | R/W  | 0b    | Enable LPAD Phase 1 detection through Jack Detection comparator.<br>0d = LPAD phase 1 disabled<br>1d = LPAD phase 1 enabled                                                                                                                                                                                                     |
| 1-0 | RESERVED                   | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                          |

**7.1.2.15 LIMITER\_CFG Register (Address = 0x23) [Reset = 0x00]**

LIMITER\_CFG is shown in [Table 7-119](#).

Return to the [Summary Table](#).

This register is configuration register for Limiter.

**Table 7-119. LIMITER\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                         |
|-----|----------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | LIMITER_INP_SEL[1:0] | R/W  | 00b   | Limiter input select config<br>0d = max(dacin_ch0, dacin_ch1)<br>1d = dacin_ch1<br>2d = dacin_ch0<br>3d = avg(dacin_ch0, dacin_ch1) |
| 5-4 | LIMITER_OUT_SEL[1:0] | R/W  | 00b   | Limiter output select config<br>0d = applied on both<br>1d = dacin_ch1<br>2d = dacin_ch0<br>3d = applied none                       |
| 3-0 | RESERVED             | R    | 0b    | Reserved bits; Write only reset values                                                                                              |

#### 7.1.2.16 AGC\_DRC\_CFG Register (Address = 0x24) [Reset = 0x00]

AGC\_DRC\_CFG is shown in [Table 7-120](#).

Return to the [Summary Table](#).

This register is configuration register for AGC and DRC.

**Table 7-120. AGC\_DRC\_CFG Register Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                |
|-----|------------|------|-------|------------------------------------------------------------|
| 7   | AGC_CH1_EN | R/W  | 0b    | AGC Channel 1 enable config<br>0d = disable<br>1d = enable |
| 6   | AGC_CH2_EN | R/W  | 0b    | AGC Channel 2 enable config<br>0d = disable<br>1d = enable |
| 5   | AGC_CH3_EN | R/W  | 0b    | AGC Channel 3 enable config<br>0d = disable<br>1d = enable |
| 4   | AGC_CH4_EN | R/W  | 0b    | AGC Channel 4 enable config<br>0d = disable<br>1d = enable |
| 3   | DRC_CH1_EN | R/W  | 0b    | DRC Channel 1 enable config<br>0d = disable<br>1d = enable |
| 2   | DRC_CH2_EN | R/W  | 0b    | DRC Channel 2 enable config<br>0d = disable<br>1d = enable |
| 1   | DRC_CH3_EN | R/W  | 0b    | DRC Channel 3 enable config<br>0d = disable<br>1d = enable |
| 0   | DRC_CH4_EN | R/W  | 0b    | DRC Channel 4 enable config<br>0d = disable<br>1d = enable |

#### 7.1.2.17 PLIM\_CFG0 Register (Address = 0x2B) [Reset = 0x00]

PLIM\_CFG0 is shown in [Table 7-121](#).

Return to the [Summary Table](#).

This register is configuration register 0 for PLIM.

**Table 7-121. PLIM\_CFG0 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                              |
|-----|---------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | EN_PLIM             | R/W  | 0b    | Enable PLIM<br>0d = Disable<br>1d = Enable                                                                                                                                                                                                                                                                                               |
| 6-4 | PLIM_ATTEN_VAL[2:0] | R/W  | 000b  | PLIM attenuation factor<br>0d = 0dB<br>1d = -6dB<br>2d = -12dB<br>3d = -18dB<br>4d = -24dB<br>5d = -30dB<br>6d = -36dB<br>7d = -42dB                                                                                                                                                                                                     |
| 3   | PLIM_BY_SAR_GPA     | R/W  | 0b    | PLIM attenuation value source<br>0d = Plimit attenuation based on GPIO and reg_plimi_attn_val<br>1d = Plimit attenuation based on GPA Analog voltage. LUT maps SAR ADC data to Attenuation factor                                                                                                                                        |
| 2   | PLIM_RECOVERY       | R/W  | 0b    | PLIM attenuation recovery<br>0d = Plimit func doesn't recover. Plimit stays at same attenuation level or can apply more attenuation if required<br>1d = Plimit func recovers (reduces the attenuation) if "gpio_val=0" or "sar_adc_gpa" data suggest that Battery Voltage has recovered then we can reduce the attenuation being applied |
| 1-0 | RESERVED            | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                    |

**7.1.2.18 MIXER\_CFG0 Register (Address = 0x2C) [Reset = 0x00]**

MIXER\_CFG0 is shown in [Table 7-122](#).

Return to the [Summary Table](#).

This register is the MIXER configuration register 0.

**Table 7-122. MIXER\_CFG0 Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                               |
|-----|----------------------|------|-------|-----------------------------------------------------------|
| 7   | EN_DAC_ASI_MIXER     | R/W  | 0b    | Enable DAC ASI Mixer<br>0b = Disabled<br>1b = Enabled     |
| 6   | EN_SIDE_CHAIN_MIXER  | R/W  | 0b    | Enable Side Chain Mixer<br>0b = Disabled<br>1b = Enabled  |
| 5   | EN_ADC_CHANNEL_MIXER | R/W  | 0b    | Enable ADC Channel Mixer<br>0b = Disabled<br>1b = Enabled |
| 4   | EN_LOOPBACK_MIXER    | R/W  | 0b    | Enable Loopback Mixer<br>0b = Disabled<br>1b = Enabled    |
| 3-0 | RESERVED             | R    | 0b    | Reserved bits; Write only reset value                     |

**7.1.2.19 MISC\_CFG0 Register (Address = 0x2D) [Reset = 0x00]**

MISC\_CFG0 is shown in [Table 7-123](#).

Return to the [Summary Table](#).

This register is the miscellaneous configuration register 0.

**Table 7-123. MISC\_CFG0 Register Field Descriptions**

| Bit | Field                         | Type | Reset | Description                                                                                             |
|-----|-------------------------------|------|-------|---------------------------------------------------------------------------------------------------------|
| 7   | EN_DISTORTION                 | R/W  | 0b    | Distortion Limiter enable config<br>0b = Distortion Limiter disable<br>1b = Distortion Limiter enable   |
| 6   | EN_BOP                        | R/W  | 0b    | BOP enable config<br>0b = BOP disable<br>1b = BOP enable                                                |
| 5   | EN_THERMAL_FOLDBACK           | R/W  | 0b    | Thermal Foldback enable config<br>0b = Thermal Foldback disable<br>1b = Thermal Foldback enable         |
| 4   | RESERVED                      | R    | 0b    | Reserved bit; Write only reset value                                                                    |
| 3   | DAC_SIGNAL_GENERATOR_1_ENABLE | R/W  | 0b    | DAC signal generator 1 enable config<br>0b = Signal generator disabled<br>1b = Signal generator enabled |
| 2   | DAC_SIGNAL_GENERATOR_2_ENABLE | R/W  | 0b    | DAC signal generator 2 enable config<br>0b = Signal generator disabled<br>1b = Signal generator enabled |
| 1   | DSP_AVDD_SEL                  | R/W  | 0b    | SAR data source select for DSP Limiter, BOP, DRC<br>0b = Reserved<br>1b = SAR AVDD data to DSP          |
| 0   | BRWNOUT_EN                    | R/W  | 0b    | Brownout enable config<br>0b = Brownout disable<br>1b = Brownout enable                                 |

#### 7.1.2.20 BRWNOUT Register (Address = 0x2E) [Reset = 0xBF]

BRWNOUT is shown in [Table 7-124](#).

Return to the [Summary Table](#).

This register is the brownout configuration register.

**Table 7-124. BRWNOUT Register Field Descriptions**

| Bit | Field             | Type | Reset    | Description                                                                                                                                                                                                                                                                              |
|-----|-------------------|------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | BRWNOUT_THRS[7:0] | R/W  | 1011111b | Threshold for brownout shutdown<br>Default = 7.8V ((IF P1_R45_D1->DSP_AVDD_SEL=1) = 2.7V)<br>$N_d = ((0.9 \cdot (N \cdot 16) / 4095) - 0 \cdot 211764) \times 17 \text{ (V)}$ ((IF P1_R45_D1->DSP_AVDD_SEL=1) = $((0.9 \cdot (N \cdot 16) / 4095) - 0 \cdot 225) \times 6 \text{ (V)}$ ) |

#### 7.1.2.21 INT\_MASK0 Register (Address = 0x2F) [Reset = 0xFF]

INT\_MASK0 is shown in [Table 7-125](#).

Return to the [Summary Table](#).

This register is the interrupt mask register 0.

**Table 7-125. INT\_MASK0 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                 |
|-----|-----------|------|-------|-------------------------------------------------------------|
| 7   | INT_MASK0 | R/W  | 1b    | Clock error interrupt mask.<br>0b = Don't Mask<br>1b = Mask |
| 6   | INT_MASK0 | R/W  | 1b    | PLL Lock interrupt mask.<br>0b = Don't Mask<br>1b = Mask    |
| 5   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                        |
| 4   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                        |

**Table 7-125. INT\_MASK0 Register Field Descriptions (continued)**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 3   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 2   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 1   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 0   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**7.1.2.22 INT\_MASK4 Register (Address = 0x32) [Reset = 0x00]**

INT\_MASK4 is shown in [Table 7-126](#).

Return to the [Summary Table](#).

This register is the interrupt mask register 4.

**Table 7-126. INT\_MASK4 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                    |
|-----|-----------|------|-------|--------------------------------------------------------------------------------|
| 7   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                           |
| 6   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                           |
| 5   | INT_MASK4 | R/W  | 0b    | OUT Short Circuit Fault Interrupt Mask.<br>0b = Don't Mask<br>1b = Mask        |
| 4   | INT_MASK4 | R/W  | 0b    | DRVR Virtual Ground Fault Interrupt Mask.<br>0b = Don't Mask<br>1b = Mask      |
| 3   | INT_MASK4 | R/W  | 0b    | Headset insert detection interrupt mask.<br>0b = Don't Mask<br>1b = Mask       |
| 2   | INT_MASK4 | R/W  | 0b    | Headset remove detection interrupt mask.<br>0b = Don't Mask<br>1b = Mask       |
| 1   | INT_MASK4 | R/W  | 0b    | Headset detection hook(button) interrupt mask.<br>0b = Don't Mask<br>1b = Mask |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                           |

**7.1.2.23 INT\_MASK5 Register (Address = 0x33) [Reset = 0x30]**

INT\_MASK5 is shown in [Table 7-127](#).

Return to the [Summary Table](#).

This register is the interrupt mask register 5.

**Table 7-127. INT\_MASK5 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                         |
|-----|-----------|------|-------|---------------------------------------------------------------------|
| 7   | INT_MASK5 | R/W  | 0b    | GPA up threshold fault mask.<br>0b = Don't Mask<br>1b = Mask        |
| 6   | INT_MASK5 | R/W  | 0b    | GPA low threshold fault mask.<br>0b = Don't Mask<br>1b = Mask       |
| 5   | INT_MASK5 | R/W  | 1b    | VAD power up detect interrupt mask.<br>0b = Don't Mask<br>1b = Mask |



**Table 7-127. INT\_MASK5 Register Field Descriptions (continued)**

| Bit | Field     | Type | Reset | Description                                                           |
|-----|-----------|------|-------|-----------------------------------------------------------------------|
| 4   | INT_MASK5 | R/W  | 1b    | VAD power down detect interrupt mask.<br>0b = Don't Mask<br>1b = Mask |
| 3   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 2   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 1   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |

#### 7.1.2.24 INT\_LTCH0 Register (Address = 0x34) [Reset = 0x00]

INT\_LTCH0 is shown in [Table 7-128](#).

Return to the [Summary Table](#).

This register is the latched interrupt readback register 0.

**Table 7-128. INT\_LTCH0 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                              |
|-----|-----------|------|-------|------------------------------------------------------------------------------------------|
| 7   | INT_LTCH0 | R    | 0b    | Interrupt due to clock error (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt |
| 6   | INT_LTCH0 | R    | 0b    | Interrupt due to PLL Lock (self clearing bit)<br>0b = No interrupt<br>1b = Interrupt     |
| 5   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                     |
| 4   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                     |
| 3   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                     |
| 2   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                     |
| 1   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                     |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                     |

#### 7.1.2.25 CHx\_LTCH Register (Address = 0x35) [Reset = 0x00]

CHx\_LTCH is shown in [Table 7-129](#).

Return to the [Summary Table](#).

This register is the channel level diagnostics latched status register.

**Table 7-129. CHx\_LTCH Register Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                                                                     |
|-----|--------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 6   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 5   | STS_CHx_LTCH | R    | 0b    | Status of Output CH1_LTCH (INP1/INM1).<br>0b = No faults occurred in output channel 1<br>1b = Fault or Faults have occurred in output channel 1 |
| 4   | STS_CHx_LTCH | R    | 0b    | Status of Output CH2_LTCH (INP2/INM2).<br>0b = No faults occurred in output channel 2<br>1b = Fault or Faults have occurred in output channel 2 |
| 3   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 2   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 1   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |

**Table 7-129. CHx\_LTCH Register Field Descriptions (continued)**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 0   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**7.1.2.26 OUT\_CH1\_LTCH Register (Address = 0x38) [Reset = 0x00]**

OUT\_CH1\_LTCH is shown in [Table 7-130](#).

Return to the [Summary Table](#).

This register is the latched status register for channel 1 output DC faults diagnostics.

**Table 7-130. OUT\_CH1\_LTCH Register Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                                            |
|-----|--------------|------|-------|------------------------------------------------------------------------------------------------------------------------|
| 7   | OUT_CH1_LTCH | R    | 0b    | OUT1P Short Circuit Fault (self clearing bit).<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 6   | OUT_CH1_LTCH | R    | 0b    | OUT1M Short Circuit Fault (self clearing bit).<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 5   | OUT_CH1_LTCH | R    | 0b    | Channel 1 DRVPR Virtual Ground Fault (self clearing bit).<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 4   | OUT_CH1_LTCH | R    | 0b    | Channel 1 DRVPM Virtual Ground Fault (self clearing bit).<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 3   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                   |
| 2   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                   |
| 1-0 | RESERVED     | R    | 0b    | Reserved bits; Write only reset value                                                                                  |

**7.1.2.27 OUT\_CH2\_LTCH Register (Address = 0x39) [Reset = 0x00]**

OUT\_CH2\_LTCH is shown in [Table 7-131](#).

Return to the [Summary Table](#).

This register is the latched status register for channel 2 output DC faults diagnostics.

**Table 7-131. OUT\_CH2\_LTCH Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                            |
|-----|-------------------|------|-------|------------------------------------------------------------------------------------------------------------------------|
| 7   | OUT_CH2_LTCH      | R    | 0b    | OUT2P Short Circuit Fault (self clearing bit).<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 6   | OUT_CH2_LTCH      | R    | 0b    | OUT2M Short Circuit Fault (self clearing bit).<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 5   | OUT_CH2_LTCH      | R    | 0b    | Channel 2 DRVPR Virtual Ground Fault (self clearing bit).<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 4   | OUT_CH2_LTCH      | R    | 0b    | Channel 2 DRVPM Virtual Ground Fault (self clearing bit).<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 3-2 | RESERVED          | R    | 0b    | Reserved bits; Write only reset value                                                                                  |
| 1   | MASK_AREG_SC_FLAG | R/W  | 0b    | AREG SC fault mask.<br>0b = Don't Mask<br>1b = Mask                                                                    |

**Table 7-131. OUT\_CH2\_LTCH Register Field Descriptions (continued)**

| Bit | Field             | Type | Reset | Description                                                                                             |
|-----|-------------------|------|-------|---------------------------------------------------------------------------------------------------------|
| 0   | AREG_SC_FLAG_LTCH | R    | 0b    | AREG SC fault (self clearing bit).<br>0b = No AREG short circuit fault<br>1b = AREG short circuit fault |

#### 7.1.2.28 INT\_LTCH1 Register (Address = 0x3A) [Reset = 0x00]

INT\_LTCH1 is shown in [Table 7-132](#).

Return to the [Summary Table](#).

This is the register 1 for latched interrupt readback.

**Table 7-132. INT\_LTCH1 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                                           |
|-----|-----------|------|-------|-------------------------------------------------------------------------------------------------------|
| 7   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                  |
| 6   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                  |
| 5   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                  |
| 4   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                  |
| 3   | INT_LTCH1 | R    | 0b    | Interrupt due to Headset Insert Detection (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt |
| 2   | INT_LTCH1 | R    | 0b    | Interrupt due to Headset Remove Detection (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt |
| 1   | INT_LTCH1 | R    | 0b    | Interrupt due to Headset hook(button) (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt     |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                  |

#### 7.1.2.29 INT\_LTCH2 Register (Address = 0x3B) [Reset = 0x00]

INT\_LTCH2 is shown in [Table 7-133](#).

Return to the [Summary Table](#).

This is the register 2 for latched interrupt readback.

**Table 7-133. INT\_LTCH2 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                                          |
|-----|-----------|------|-------|------------------------------------------------------------------------------------------------------|
| 7   | INT_LTCH2 | R    | 0b    | Interrupt due to GPA up threshold fault (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt  |
| 6   | INT_LTCH2 | R    | 0b    | Interrupt due to GPA low threshold fault (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt |
| 5   | INT_LTCH2 | R    | 0b    | Interrupt due to VAD power up detect (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt     |
| 4   | INT_LTCH2 | R    | 0b    | Interrupt due to VAD power down detect (self clearing bit).<br>0b = No interrupt<br>1b = Interrupt   |
| 3   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                 |
| 2   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                 |
| 1   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                                                 |

**Table 7-133. INT\_LTCH2 Register Field Descriptions (continued)**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 0   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**7.1.2.30 INT\_LIVE0 Register (Address = 0x3C) [Reset = 0x00]**

INT\_LIVE0 is shown in [Table 7-134](#).

Return to the [Summary Table](#).

This is the register 0 for live interrupt readback.

**Table 7-134. INT\_LIVE0 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                           |
|-----|-----------|------|-------|-----------------------------------------------------------------------|
| 7   | INT_LIVE0 | R    | 0b    | Interrupt due to clock error .<br>0b = No interrupt<br>1b = Interrupt |
| 6   | INT_LIVE0 | R    | 0b    | Interrupt due to PLL Lock<br>0b = No interrupt<br>1b = Interrupt      |
| 5   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 4   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 3   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 2   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 1   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                  |

**7.1.2.31 CHx\_LIVE Register (Address = 0x3D) [Reset = 0x00]**

CHx\_LIVE is shown in [Table 7-135](#).

Return to the [Summary Table](#).

This register is the channel level diagnostics live status register.

**Table 7-135. CHx\_LIVE Register Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                                                                     |
|-----|--------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 6   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 5   | STS_CHx_LIVE | R    | 0b    | Status of Output CH1_LIVE (INP1/INM1).<br>0b = No faults occurred in output channel 1<br>1b = Fault or Faults have occurred in output channel 1 |
| 4   | STS_CHx_LIVE | R    | 0b    | Status of Output CH2_LIVE (INP2/INM2).<br>0b = No faults occurred in output channel 2<br>1b = Fault or Faults have occurred in output channel 2 |
| 3   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 2   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 1   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |
| 0   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                                                                            |

**7.1.2.32 OUT\_CH1\_LIVE Register (Address = 0x40) [Reset = 0x00]**

OUT\_CH1\_LIVE is shown in [Table 7-136](#).

Return to the [Summary Table](#).

This register is the live status register for channel 1 output DC faults diagnostics.

**Table 7-136. OUT\_CH1\_LIVE Register Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                         |
|-----|--------------|------|-------|-----------------------------------------------------------------------------------------------------|
| 7   | OUT_CH1_LIVE | R    | 0b    | OUT1P Short Circuit Fault .<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 6   | OUT_CH1_LIVE | R    | 0b    | OUT1M Short Circuit Fault .<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 5   | OUT_CH1_LIVE | R    | 0b    | Channel 1 DRVRP Virtual Ground Fault .<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 4   | OUT_CH1_LIVE | R    | 0b    | Channel 1 DRVRM Virtual Ground Fault .<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 3-0 | RESERVED     | R    | 0b    | Reserved bits; Write only reset value                                                               |

#### 7.1.2.33 OUT\_CH2\_LIVE Register (Address = 0x41) [Reset = 0x00]

OUT\_CH2\_LIVE is shown in [Table 7-137](#).

Return to the [Summary Table](#).

This register is the live status register for channel 2 output DC faults diagnostics.

**Table 7-137. OUT\_CH2\_LIVE Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                         |
|-----|-------------------|------|-------|-----------------------------------------------------------------------------------------------------|
| 7   | OUT_CH2_LIVE      | R    | 0b    | OUT2P Short Circuit Fault .<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 6   | OUT_CH2_LIVE      | R    | 0b    | OUT2M Short Circuit Fault .<br>0b = No short circuit fault<br>1b = Short circuit fault              |
| 5   | OUT_CH2_LIVE      | R    | 0b    | Channel 2 DRVRP Virtual Ground Fault .<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 4   | OUT_CH2_LIVE      | R    | 0b    | Channel 2 DRVRM Virtual Ground Fault .<br>0b = No virtual ground fault<br>1b = Virtual ground fault |
| 3-1 | RESERVED          | R    | 0b    | Reserved bits; Write only reset value                                                               |
| 0   | AREG_SC_FLAG_LIVE | R    | 0b    | AREG SC fault .<br>0b = No AREG short circuit fault<br>1b = AREG short circuit fault                |

#### 7.1.2.34 INT\_LIVE1 Register (Address = 0x42) [Reset = 0x00]

INT\_LIVE1 is shown in [Table 7-138](#).

Return to the [Summary Table](#).

This is the register 1 for live interrupt readback.

**Table 7-138. INT\_LIVE1 Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                          |
|-----|----------|------|-------|--------------------------------------|
| 7   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 6   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |
| 5   | RESERVED | R    | 0b    | Reserved bit; Write only reset value |

**Table 7-138. INT\_LIVE1 Register Field Descriptions (continued)**

| Bit | Field     | Type | Reset | Description                                                                        |
|-----|-----------|------|-------|------------------------------------------------------------------------------------|
| 4   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                               |
| 3   | INT_LIVE1 | R    | 0b    | Interrupt due to Headset Insert Detection .<br>0b = No interrupt<br>1b = Interrupt |
| 2   | INT_LIVE1 | R    | 0b    | Interrupt due to Headset Remove Detection .<br>0b = No interrupt<br>1b = Interrupt |
| 1   | INT_LIVE1 | R    | 0b    | Interrupt due to Headset hook(button) .<br>0b = No interrupt<br>1b = Interrupt     |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                               |

**7.1.2.35 INT\_LIVE2 Register (Address = 0x43) [Reset = 0x00]**

INT\_LIVE2 is shown in [Table 7-139](#).

Return to the [Summary Table](#).

This is the register 2 for live interrupt readback.

**Table 7-139. INT\_LIVE2 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                      |
|-----|-----------|------|-------|----------------------------------------------------------------------------------|
| 7   | INT_LIVE2 | R    | 0b    | Interrupt due to GPA up threshold fault .<br>0b = No interrupt<br>1b = Interrupt |
| 6   | INT_LIVE2 | R    | 0b    | Interrupt due to GPA low threshold fault<br>0b = No interrupt<br>1b = Interrupt  |
| 5   | INT_LIVE2 | R    | 0b    | Interrupt due to VAD power up detect .<br>0b = No interrupt<br>1b = Interrupt    |
| 4   | INT_LIVE2 | R    | 0b    | Interrupt due to VAD power down detect .<br>0b = No interrupt<br>1b = Interrupt  |
| 3   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                             |
| 2   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                             |
| 1   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                             |
| 0   | RESERVED  | R    | 0b    | Reserved bit; Write only reset value                                             |

**7.1.2.36 DIAG\_CFG8 Register (Address = 0x4E) [Reset = 0xBA]**

DIAG\_CFG8 is shown in [Table 7-140](#).

Return to the [Summary Table](#).

This is the input diagnostics configuration register 8.

**Table 7-140. DIAG\_CFG8 Register Field Descriptions**

| Bit | Field                       | Type | Reset     | Description                                                                                                                                    |
|-----|-----------------------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | GPA_UP_THRS_FLT_TH RES[7:0] | R/W  | 10111010b | General Purpose Analog High Threshold<br>Default = approximately 2.6V<br>$nd = ((0.9 \cdot (N \cdot 16) / 4095) - 0.225) \times 6 \text{ (V)}$ |

### 7.1.2.37 DIAG\_CFG9 Register (Address = 0x4F) [Reset = 0x4B]

DIAG\_CFG9 is shown in [Table 7-141](#).

Return to the [Summary Table](#).

This is the input diagnostics configuration register 9.

**Table 7-141. DIAG\_CFG9 Register Field Descriptions**

| Bit | Field                           | Type | Reset     | Description                                                                                                                           |
|-----|---------------------------------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | GPA_LOW_THRS_FLT_T<br>HRES[7:0] | R/W  | 01001011b | General Purpose Analog Low Threshold<br>Default = approximately 0.2V<br>$nd = ((0.9 \cdot (N \cdot 16) / 4095) - 0.225) \times 6$ (V) |

### 7.1.2.38 DIAG\_CFG13 Register (Address = 0x53) [Reset = 0x00]

DIAG\_CFG13 is shown in [Table 7-142](#).

Return to the [Summary Table](#).

This is the input diagnostics configuration register 13.

**Table 7-142. DIAG\_CFG13 Register Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                |
|-----|--------------|------|-------|--------------------------------------------------------------------------------------------|
| 7   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                       |
| 6   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                       |
| 5   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                       |
| 4   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                       |
| 3   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                       |
| 2   | DIAG_EN_AVDD | R/W  | 0b    | AVDD channel enable for Diagnostics<br>0b = Diagnostic Disabled<br>1b = Diagnostic Enabled |
| 1   | DIAG_EN_GPA  | R/W  | 0b    | GPA channel enable for Diagnostics<br>0b = Diagnostic Disabled<br>1b = Diagnostic Enabled  |
| 0   | RESERVED     | R    | 0b    | Reserved bit; Write only reset value                                                       |

### 7.1.2.39 DIAG\_CFG14 Register (Address = 0x54) [Reset = 0x48]

DIAG\_CFG14 is shown in [Table 7-143](#).

Return to the [Summary Table](#).

This is the input diagnostics configuration register 14.

**Table 7-143. DIAG\_CFG14 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description                                                                       |
|-----|--------------------|------|-------|-----------------------------------------------------------------------------------|
| 7   | RESERVED           | R    | 0b    | Reserved bit; Write only reset value                                              |
| 6-5 | AVDD_FILT_SEL[1:0] | R/W  | 10b   | AVDD filter select<br>0d = 3.5MHz<br>1d = 200kHz<br>2d = 100kHz<br>3d = No filter |
| 4   | RESERVED           | R    | 0b    | Reserved bit; Write only reset value                                              |
| 3-2 | RESERVED           | R    | 0b    | Reserved bits; Write only reset values                                            |
| 1   | RESERVED           | R    | 0b    | Reserved bit; Write only reset value                                              |
| 0   | RESERVED           | R    | 0b    | Reserved bit; Write only reset value                                              |

#### 7.1.2.40 DIAGDATA\_CFG Register (Address = 0x55) [Reset = 0x00]

DIAGDATA\_CFG is shown in [Table 7-144](#).

Return to the [Summary Table](#).

This register is the input diagnostics data configuration register.

**Table 7-144. DIAGDATA\_CFG Register Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                        |
|-----|----------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | RESERVED       | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                             |
| 3   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                               |
| 2   | RESERVED       | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                               |
| 1   | OVRD_TEMP_DATA | R/W  | 0b    | Override TEMP data<br>0b= Override Disabled<br>1b= Override Enabled                                                                                                                |
| 0   | HOLD_SAR_DATA  | R/W  | 0b    | Hold SAR data update during register readback<br>0b= Data update is not held, Data register is continuously updated<br>1b= Data update is held, Data register readback can be done |

#### 7.1.2.41 DIAG\_MON\_MSB\_MBIAS Register (Address = 0x58) [Reset = 0x00]

DIAG\_MON\_MSB\_MBIAS is shown in [Table 7-145](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR MICBIAS monitor data MSB byte register.

**Table 7-145. DIAG\_MON\_MSB\_MBIAS Register Field Descriptions**

| Bit | Field                   | Type | Reset     | Description                            |
|-----|-------------------------|------|-----------|----------------------------------------|
| 7-0 | DIAG_MON_MSB_MBIAS[7:0] | R    | 00000000b | D diagnostic SAR Monitor Data MSB Byte |

#### 7.1.2.42 DIAG\_MON\_LSB\_MBIAS Register (Address = 0x59) [Reset = 0x01]

DIAG\_MON\_LSB\_MBIAS is shown in [Table 7-146](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR MICBIAS monitor data LSB nibble.

**Table 7-146. DIAG\_MON\_LSB\_MBIAS Register Field Descriptions**

| Bit | Field                   | Type | Reset | Description                              |
|-----|-------------------------|------|-------|------------------------------------------|
| 7-4 | DIAG_MON_LSB_MBIAS[3:0] | R    | 0000b | D diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]            | R    | 0001b | Channel ID                               |

#### 7.1.2.43 DIAG\_MON\_MSB\_OUT1P Register (Address = 0x62) [Reset = 0x00]

DIAG\_MON\_MSB\_OUT1P is shown in [Table 7-147](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT1P monitor data MSB byte register.



**Table 7-147. DIAG\_MON\_MSB\_OUT1P Register Field Descriptions**

| Bit | Field                      | Type | Reset     | Description                          |
|-----|----------------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_OUT_CH1P[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

#### 7.1.2.44 DIAG\_MON\_LSB\_OUT1P Register (Address = 0x63) [Reset = 0x06]

DIAG\_MON\_LSB\_OUT1P is shown in [Table 7-148](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT1P monitor data LSB nibble register.

**Table 7-148. DIAG\_MON\_LSB\_OUT1P Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                            |
|-----|-----------------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_OUT_C H1P[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]                | R    | 0110b | Channel ID                             |

#### 7.1.2.45 DIAG\_MON\_MSB\_OUT1M Register (Address = 0x64) [Reset = 0x00]

DIAG\_MON\_MSB\_OUT1M is shown in [Table 7-149](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT1M monitor data MSB byte register.

**Table 7-149. DIAG\_MON\_MSB\_OUT1M Register Field Descriptions**

| Bit | Field                      | Type | Reset     | Description                          |
|-----|----------------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_OUT_CH1N[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

#### 7.1.2.46 DIAG\_MON\_LSB\_OUT1M Register (Address = 0x65) [Reset = 0x07]

DIAG\_MON\_LSB\_OUT1M is shown in [Table 7-150](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT1M monitor data LSB nibble register.

**Table 7-150. DIAG\_MON\_LSB\_OUT1M Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                            |
|-----|-----------------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_OUT_C H1N[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]                | R    | 0111b | Channel ID                             |

#### 7.1.2.47 DIAG\_MON\_MSB\_OUT2P Register (Address = 0x66) [Reset = 0x00]

DIAG\_MON\_MSB\_OUT2P is shown in [Table 7-151](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT2P monitor data MSB byte register.

**Table 7-151. DIAG\_MON\_MSB\_OUT2P Register Field Descriptions**

| Bit | Field                      | Type | Reset     | Description                          |
|-----|----------------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_OUT_CH2P[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

**7.1.2.48 DIAG\_MON\_LSB\_OUT2P Register (Address = 0x67) [Reset = 0x08]**

DIAG\_MON\_LSB\_OUT2P is shown in [Table 7-152](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT2P monitor data LSB nibble register.

**Table 7-152. DIAG\_MON\_LSB\_OUT2P Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                            |
|-----|-----------------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_OUT_C H2P[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]                | R    | 1000b | Channel ID                             |

**7.1.2.49 DIAG\_MON\_MSB\_OUT2M Register (Address = 0x68) [Reset = 0x00]**

DIAG\_MON\_MSB\_OUT2M is shown in [Table 7-153](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT2M monitor data MSB byte register.

**Table 7-153. DIAG\_MON\_MSB\_OUT2M Register Field Descriptions**

| Bit | Field                      | Type | Reset     | Description                          |
|-----|----------------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_OUT_CH2N[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

**7.1.2.50 DIAG\_MON\_LSB\_OUT2M Register (Address = 0x69) [Reset = 0x09]**

DIAG\_MON\_LSB\_OUT2M is shown in [Table 7-154](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR OUT2M monitor data LSB nibble register.

**Table 7-154. DIAG\_MON\_LSB\_OUT2M Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                            |
|-----|-----------------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_OUT_C H2N[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]                | R    | 1001b | Channel ID                             |

**7.1.2.51 DIAG\_MON\_MSB\_TEMP Register (Address = 0x6A) [Reset = 0x00]**

DIAG\_MON\_MSB\_TEMP is shown in [Table 7-155](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR Temperature monitor data MSB byte register.

**Table 7-155. DIAG\_MON\_MSB\_TEMP Register Field Descriptions**

| Bit | Field                  | Type | Reset     | Description                          |
|-----|------------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_TEMP[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

#### 7.1.2.52 DIAG\_MON\_LSB\_TEMP Register (Address = 0x6B) [Reset = 0x0A]

DIAG\_MON\_LSB\_TEMP is shown in [Table 7-156](#).

Return to the [Summary Table](#).

This register is the diagnostics SAR Temperature monitor data LSB nibble register.

**Table 7-156. DIAG\_MON\_LSB\_TEMP Register Field Descriptions**

| Bit | Field                  | Type | Reset | Description                            |
|-----|------------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_TEMP[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]           | R    | 1010b | Channel ID                             |

#### 7.1.2.53 DIAG\_MON\_MSB\_AVDD Register (Address = 0x6E) [Reset = 0x00]

DIAG\_MON\_MSB\_AVDD is shown in [Table 7-157](#).

Return to the [Summary Table](#).

This register is the diagnostic SAR AVDD monitor data MSB byte register.

**Table 7-157. DIAG\_MON\_MSB\_AVDD Register Field Descriptions**

| Bit | Field                  | Type | Reset     | Description                          |
|-----|------------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_AVDD[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

#### 7.1.2.54 DIAG\_MON\_LSB\_AVDD Register (Address = 0x6F) [Reset = 0x0C]

DIAG\_MON\_LSB\_AVDD is shown in [Table 7-158](#).

Return to the [Summary Table](#).

This register is the diagnostic SAR AVDD monitor data LSB nibble register

**Table 7-158. DIAG\_MON\_LSB\_AVDD Register Field Descriptions**

| Bit | Field                  | Type | Reset | Description                            |
|-----|------------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_AVDD[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]           | R    | 1100b | Channel ID                             |

#### 7.1.2.55 DIAG\_MON\_MSB\_GPA Register (Address = 0x70) [Reset = 0x00]

DIAG\_MON\_MSB\_GPA is shown in [Table 7-159](#).

Return to the [Summary Table](#).

This register is the diagnostic SAR GPA monitor data MSB byte register.

**Table 7-159. DIAG\_MON\_MSB\_GPA Register Field Descriptions**

| Bit | Field                 | Type | Reset     | Description                          |
|-----|-----------------------|------|-----------|--------------------------------------|
| 7-0 | DIAG_MON_MSB_GPA[7:0] | R    | 00000000b | Diagnostic SAR Monitor Data MSB Byte |

**7.1.2.56 DIAG\_MON\_LSB\_GPA Register (Address = 0x71) [Reset = 0x0D]**

DIAG\_MON\_LSB\_GPA is shown in [Table 7-160](#).

Return to the [Summary Table](#).

This register is the diagnostic SAR GPA monitor data LSB nibble register.

**Table 7-160. DIAG\_MON\_LSB\_GPA Register Field Descriptions**

| Bit | Field                 | Type | Reset | Description                            |
|-----|-----------------------|------|-------|----------------------------------------|
| 7-4 | DIAG_MON_LSB_GPA[3:0] | R    | 0000b | Diagnostic SAR Monitor Data LSB Nibble |
| 3-0 | Channel[3:0]          | R    | 1101b | Channel ID                             |

### 7.1.3 TAD5212\_B0\_P3 Registers

**Table 7-161** lists the memory-mapped registers for the TAD5212\_B0\_P3 registers. All register offset addresses not listed in **Table 7-161** are considered as reserved locations and the register contents are not to be modified.

**Table 7-161. TAD5212\_B0\_P3 Registers**

| Address | Acronym         | Register Name                            | Reset Value | Section                          |
|---------|-----------------|------------------------------------------|-------------|----------------------------------|
| 0x0     | PAGE_CFG        | Device page register                     | 0x00        | <a href="#">Section 7.1.3.1</a>  |
| 0x1A    | SASI_CFG0       | Secondary ASI configuration register 0   | 0x30        | <a href="#">Section 7.1.3.2</a>  |
| 0x1B    | SASI_TX_CFG0    | SASI TX configuration register 0         | 0x00        | <a href="#">Section 7.1.3.3</a>  |
| 0x1C    | SASI_TX_CFG1    | SASI TX configuration register 1         | 0x00        | <a href="#">Section 7.1.3.4</a>  |
| 0x1D    | SASI_TX_CFG2    | SASI TX configuration register 2         | 0x00        | <a href="#">Section 7.1.3.5</a>  |
| 0x1E    | SASI_TX_CH1_CFG | SASI TX Channel 1 configuration register | 0x00        | <a href="#">Section 7.1.3.6</a>  |
| 0x1F    | SASI_TX_CH2_CFG | SASI TX Channel 2 configuration register | 0x01        | <a href="#">Section 7.1.3.7</a>  |
| 0x20    | SASI_TX_CH3_CFG | SASI TX Channel 3 configuration register | 0x02        | <a href="#">Section 7.1.3.8</a>  |
| 0x21    | SASI_TX_CH4_CFG | SASI TX Channel 4 configuration register | 0x03        | <a href="#">Section 7.1.3.9</a>  |
| 0x22    | SASI_TX_CH5_CFG | SASI TX Channel 5 configuration register | 0x04        | <a href="#">Section 7.1.3.10</a> |
| 0x23    | SASI_TX_CH6_CFG | SASI TX Channel 6 configuration register | 0x05        | <a href="#">Section 7.1.3.11</a> |
| 0x24    | SASI_TX_CH7_CFG | SASI TX Channel 7 configuration register | 0x06        | <a href="#">Section 7.1.3.12</a> |
| 0x25    | SASI_TX_CH8_CFG | SASI TX Channel 8 configuration register | 0x07        | <a href="#">Section 7.1.3.13</a> |
| 0x26    | SASI_RX_CFG0    | SASI RX configuration register 0         | 0x00        | <a href="#">Section 7.1.3.14</a> |
| 0x27    | SASI_RX_CFG1    | SASI RX configuration register 1         | 0x00        | <a href="#">Section 7.1.3.15</a> |
| 0x28    | SASI_RX_CH1_CFG | SASI RX Channel 1 configuration register | 0x00        | <a href="#">Section 7.1.3.16</a> |
| 0x29    | SASI_RX_CH2_CFG | SASI RX Channel 2 configuration register | 0x01        | <a href="#">Section 7.1.3.17</a> |
| 0x2A    | SASI_RX_CH3_CFG | SASI RX Channel 3 configuration register | 0x02        | <a href="#">Section 7.1.3.18</a> |
| 0x2B    | SASI_RX_CH4_CFG | SASI RX Channel 4 configuration register | 0x03        | <a href="#">Section 7.1.3.19</a> |
| 0x2C    | SASI_RX_CH5_CFG | SASI RX Channel 5 configuration register | 0x04        | <a href="#">Section 7.1.3.20</a> |
| 0x2D    | SASI_RX_CH6_CFG | SASI RX Channel 6 configuration register | 0x05        | <a href="#">Section 7.1.3.21</a> |
| 0x2E    | SASI_RX_CH7_CFG | SASI RX Channel 7 configuration register | 0x06        | <a href="#">Section 7.1.3.22</a> |
| 0x2F    | SASI_RX_CH8_CFG | SASI RX Channel 8 configuration register | 0x07        | <a href="#">Section 7.1.3.23</a> |
| 0x32    | CLK_CFG12       | Clock configuration register 12          | 0x00        | <a href="#">Section 7.1.3.24</a> |
| 0x33    | CLK_CFG13       | Clock configuration register 13          | 0x00        | <a href="#">Section 7.1.3.25</a> |
| 0x34    | CLK_CFG14       | Clock configuration register 14          | 0x10        | <a href="#">Section 7.1.3.26</a> |
| 0x35    | CLK_CFG15       | Clock configuration register 15          | 0x01        | <a href="#">Section 7.1.3.27</a> |
| 0x36    | CLK_CFG16       | Clock configuration register 16          | 0x00        | <a href="#">Section 7.1.3.28</a> |
| 0x37    | CLK_CFG17       | Clock configuration register 17          | 0x00        | <a href="#">Section 7.1.3.29</a> |
| 0x38    | CLK_CFG18       | Clock configuration register 18          | 0x08        | <a href="#">Section 7.1.3.30</a> |
| 0x39    | CLK_CFG19       | Clock configuration register 19          | 0x20        | <a href="#">Section 7.1.3.31</a> |
| 0x3A    | CLK_CFG20       | Clock configuration register 20          | 0x04        | <a href="#">Section 7.1.3.32</a> |
| 0x3B    | CLK_CFG21       | Clock configuration register 21          | 0x00        | <a href="#">Section 7.1.3.33</a> |
| 0x3C    | CLK_CFG22       | Clock configuration register 22          | 0x01        | <a href="#">Section 7.1.3.34</a> |
| 0x3D    | CLK_CFG23       | Clock configuration register 23          | 0x01        | <a href="#">Section 7.1.3.35</a> |
| 0x3E    | CLK_CFG24       | Clock configuration register 24          | 0x01        | <a href="#">Section 7.1.3.36</a> |
| 0x44    | CLK_CFG30       | Clock configuration register 30          | 0x00        | <a href="#">Section 7.1.3.37</a> |
| 0x45    | CLK_CFG31       | Clock configuration register 31          | 0x00        | <a href="#">Section 7.1.3.38</a> |
| 0x46    | CLKOUT_CFG1     | CLKOUT configuration register 1          | 0x00        | <a href="#">Section 7.1.3.39</a> |
| 0x47    | CLKOUT_CFG2     | CLKOUT configuration register 2          | 0x01        | <a href="#">Section 7.1.3.40</a> |
| 0x49    | SARCLK_CFG1     | SAR clock configuration register 1       | 0x00        | <a href="#">Section 7.1.3.41</a> |

### 7.1.3.1 PAGE\_CFG Register (Address = 0x0) [Reset = 0x00]

PAGE\_CFG is shown in [Table 7-162](#).

Return to the [Summary Table](#).

The device memory map is divided into pages. This register sets the page.

**Table 7-162. PAGE\_CFG Register Field Descriptions**

| Bit | Field     | Type | Reset     | Description                                                                                                                      |
|-----|-----------|------|-----------|----------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PAGE[7:0] | R/W  | 00000000b | These bits set the device page.<br>0d = Page 0<br>1d = Page 1<br>2d to 254d = Page 2 to page 254 respectively<br>255d = Page 255 |

### 7.1.3.2 SASI\_CFG0 Register (Address = 0x1A) [Reset = 0x30]

SASI\_CFG0 is shown in [Table 7-163](#).

Return to the [Summary Table](#).

This register is the ASI configuration register 0.

**Table 7-163. SASI\_CFG0 Register Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                  |
|-----|-------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | SASI_FORMAT[1:0]  | R/W  | 00b   | Secondary ASI protocol format.<br>0d = TDM mode<br>1d = I <sup>2</sup> S mode<br>2d = LJ (left-justified) mode<br>3d = Reserved; Don't use                                                   |
| 5-4 | SASI_WLEN[1:0]    | R/W  | 11b   | Secondary ASI word or slot length.<br>0d = 16 bits (Recommended this setting to be used with 10kΩ input impedance configuration)<br>1d = 20 bits<br>2d = 24 bits<br>3d = 32 bits             |
| 3   | SASI_FSYNC_POL    | R/W  | 0b    | ASI FSYNC polarity (for SASI protocol only).<br>0d = Default polarity as per standard protocol<br>1d = Inverted polarity with respect to standard protocol                                   |
| 2   | SASI_BCLK_POL     | R/W  | 0b    | ASI BCLK polarity (for SASI protocol only).<br>0d = Default polarity as per standard protocol<br>1d = Inverted polarity with respect to standard protocol                                    |
| 1   | SASI_BUS_ERR      | R/W  | 0b    | ASI bus error detection.<br>0d = Enable bus error detection<br>1d = Disable bus error detection                                                                                              |
| 0   | SASI_BUS_ERR_RCOV | R/W  | 0b    | ASI bus error auto resume.<br>0d = Enable auto resume after bus error recovery<br>1d = Disable auto resume after bus error recovery and remain powered down until host configures the device |

### 7.1.3.3 SASI\_TX\_CFG0 Register (Address = 0x1B) [Reset = 0x00]

SASI\_TX\_CFG0 is shown in [Table 7-164](#).

Return to the [Summary Table](#).

This register is the SASI TX configuration register 0.

**Table 7-164. SASI\_TX\_CFG0 Register Field Descriptions**

| Bit | Field                 | Type | Reset | Description                                                                                                                                                                                                                                                                                                            |
|-----|-----------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SASI_TX_EDGE          | R/W  | 0b    | Secondary ASI data output (on the primary and secondary data pin) transmit edge.<br>0d = Default edge as per the protocol configuration setting in SASI_BCLK_POL<br>1d = Inverted following edge (half cycle delay) with respect to the default edge setting                                                           |
| 6   | SASI_TX_FILL          | R/W  | 0b    | Secondary ASI data output (on the primary and secondary data pin) for any unused cycles<br>0d = Always transmit 0 for unused cycles<br>1d = Always use Hi-Z for unused cycles                                                                                                                                          |
| 5   | SASI_TX_LSB           | R/W  | 0b    | Secondary ASI data output (on the primary and secondary data pin) for LSB transmissions.<br>0d = Transmit the LSB for a full cycle<br>1d = Transmit the LSB for the first half cycle and Hi-Z for the second half cycle                                                                                                |
| 4-3 | SASI_TX_KEEPER[1:0]   | R/W  | 00b   | Secondary ASI data output (on the primary and secondary data pin) bus keeper.<br>0d = Bus keeper is always disabled<br>1d = Bus keeper is always enabled<br>2d = Bus keeper is enabled during LSB transmissions only for one cycle<br>3d = Bus keeper is enabled during LSB transmissions only for one and half cycles |
| 2   | SASI_TX_USE_INT_FSYNC | R/W  | 0b    | Secondary ASI uses internal FSYNC for output data generation in controller mode configuration as applicable.<br>0d = Use external FSYNC for ASI protocol data generation<br>1d = Use internal FSYNC for ASI protocol data generation                                                                                   |
| 1   | SASI_TX_USE_INT_BCLK  | R/W  | 0b    | Secondary ASI uses internal BCLK for output data generation in controller mode configuration.<br>0d = Use external BCLK for ASI protocol data generation<br>1d = Use internal BCLK for ASI protocol data generation                                                                                                    |
| 0   | SASI_TDM_PULSE_WIDTH  | R/W  | 0b    | Secondary ASI fsync pulse width in TDM format.<br>0d = Fsync pulse is 1 bclk period wide<br>1d = Fsync pulse is 2 bclk period wide                                                                                                                                                                                     |

#### 7.1.3.4 SASI\_TX\_CFG1 Register (Address = 0x1C) [Reset = 0x00]

SASI\_TX\_CFG1 is shown in [Table 7-165](#).

Return to the [Summary Table](#).

This register is the SASI TX configuration register 1.

**Table 7-165. SASI\_TX\_CFG1 Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                           |
|-----|----------|------|-------|---------------------------------------|
| 7-5 | RESERVED | R    | 0b    | Reserved bits; Write only reset value |

**Table 7-165. SASI\_TX\_CFG1 Register Field Descriptions (continued)**

| Bit | Field               | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|---------------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_TX_OFFSET[4:0] | R/W  | 00000b | Secondary ASI output data MSB slot 0 offset (on the primary and secondary data pin).<br>0d = ASI data MSB location has no offset and is as per standard protocol<br>1d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of one BCLK cycle with respect to standard protocol<br>2d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of two BCLK cycles with respect to standard protocol<br>3d to 30d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset assigned as per configuration<br>31d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of 31 BCLK cycles with respect to standard protocol |

**7.1.3.5 SASI\_TX\_CFG2 Register (Address = 0x1D) [Reset = 0x00]**

SASI\_TX\_CFG2 is shown in [Table 7-166](#).

Return to the [Summary Table](#).

This register is the SASI TX configuration register 2.

**Table 7-166. SASI\_TX\_CFG2 Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                                 |
|-----|-----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SASI_TX_CH8_SEL | R/W  | 0b    | Secondary ASI output channel 8 select.<br>0d = Secondary ASI channel 8 output is on DOUT<br>1d = Secondary ASI channel 8 output is on DOUT2 |
| 6   | SASI_TX_CH7_SEL | R/W  | 0b    | Secondary ASI output channel 7 select.<br>0d = Secondary ASI channel 7 output is on DOUT<br>1d = Secondary ASI channel 7 output is on DOUT2 |
| 5   | SASI_TX_CH6_SEL | R/W  | 0b    | Secondary ASI output channel 6 select.<br>0d = Secondary ASI channel 6 output is on DOUT<br>1d = Secondary ASI channel 6 output is on DOUT2 |
| 4   | SASI_TX_CH5_SEL | R/W  | 0b    | Secondary ASI output channel 5 select.<br>0d = Secondary ASI channel 5 output is on DOUT<br>1d = Secondary ASI channel 5 output is on DOUT2 |
| 3   | SASI_TX_CH4_SEL | R/W  | 0b    | Secondary ASI output channel 4 select.<br>0d = Secondary ASI channel 4 output is on DOUT<br>1d = Secondary ASI channel 4 output is on DOUT2 |
| 2   | SASI_TX_CH3_SEL | R/W  | 0b    | Secondary ASI output channel 3 select.<br>0d = Secondary ASI channel 3 output is on DOUT<br>1d = Secondary ASI channel 3 output is on DOUT2 |
| 1   | SASI_TX_CH2_SEL | R/W  | 0b    | Secondary ASI output channel 2 select.<br>0d = Secondary ASI channel 2 output is on DOUT<br>1d = Secondary ASI channel 2 output is on DOUT2 |
| 0   | SASI_TX_CH1_SEL | R/W  | 0b    | Secondary ASI output channel 1 select.<br>0d = Secondary ASI channel 1 output is on DOUT<br>1d = Secondary ASI channel 1 output is on DOUT2 |

**7.1.3.6 SASI\_TX\_CH1\_CFG Register (Address = 0x1E) [Reset = 0x00]**

SASI\_TX\_CH1\_CFG is shown in [Table 7-167](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 1 configuration register.



**Table 7-167. SASI\_TX\_CH1\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5   | SASI_TX_CH1_CFG           | R/W  | 0b     | Secondary ASI output channel 1 configuration.<br>0d = Secondary ASI channel 1 output is in a tri-state condition<br>1d = Secondary ASI channel 1 output corresponds to ADC Channel 1 data                                                                                                                                                                                                                                                                                                                                                       |
| 4-0 | SASI_TX_CH1_SLOT_NUM[4:0] | R/W  | 00000b | Secondary ASI output channel 1 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.7 SASI\_TX\_CH2\_CFG Register (Address = 0x1F) [Reset = 0x01]

SASI\_TX\_CH2\_CFG is shown in [Table 7-168](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 2 configuration register.

**Table 7-168. SASI\_TX\_CH2\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5   | SASI_TX_CH2_CFG           | R/W  | 0b     | Secondary ASI output channel 2 configuration.<br>0d = Secondary ASI channel 2 output is in a tri-state condition<br>1d = Secondary ASI channel 2 output corresponds to ADC Channel 2 data                                                                                                                                                                                                                                                                                                                                                       |
| 4-0 | SASI_TX_CH2_SLOT_NUM[4:0] | R/W  | 00001b | Secondary ASI output channel 2 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.8 SASI\_TX\_CH3\_CFG Register (Address = 0x20) [Reset = 0x02]

SASI\_TX\_CH3\_CFG is shown in [Table 7-169](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 3 configuration register.

**Table 7-169. SASI\_TX\_CH3\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                 |
|-----|----------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                        |
| 6-5 | SASI_TX_CH3_CFG[1:0] | R/W  | 00b   | Secondary ASI output channel 3 configuration.<br>0d = Secondary ASI channel 3 output is in a tri-state condition<br>1d = Secondary ASI channel 3 output corresponds to ADC Channel 3 data<br>2d = Reserved<br>3d = Reserved |

**Table 7-169. SASI\_TX\_CH3\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_TX_CH3_SLOT_NUM[4:0] | R/W  | 00010b | Secondary ASI output channel 3 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.9 SASI\_TX\_CH4\_CFG Register (Address = 0x21) [Reset = 0x03]**

SASI\_TX\_CH4\_CFG is shown in [Table 7-170](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 4 configuration register.

**Table 7-170. SASI\_TX\_CH4\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 6-5 | SASI_TX_CH4_CFG[1:0]      | R/W  | 00b    | Secondary ASI output channel 4 configuration.<br>0d = Secondary ASI channel 4 output is in a tri-state condition<br>1d = Secondary ASI channel 4 output corresponds to ADC Channel 4 data<br>2d = Secondary ASI channel 4 output corresponds to TEMP data<br>3d = Reserved                                                                                                                                                                                                                                                                      |
| 4-0 | SASI_TX_CH4_SLOT_NUM[4:0] | R/W  | 00011b | Secondary ASI output channel 4 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.10 SASI\_TX\_CH5\_CFG Register (Address = 0x22) [Reset = 0x04]**

SASI\_TX\_CH5\_CFG is shown in [Table 7-171](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 5 configuration register.

**Table 7-171. SASI\_TX\_CH5\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                   |
|-----|----------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                          |
| 6-5 | SASI_TX_CH5_CFG[1:0] | R/W  | 00b   | Secondary ASI output channel 5 configuration.<br>0d = Secondary ASI channel 5 output is in a tri-state condition<br>1d = Secondary ASI channel 5 output corresponds to ASI Input Channel 1 loopback data<br>2d = Secondary ASI channel 5 output corresponds to echo reference channel 1 data<br>3d = Reserved |

**Table 7-171. SASI\_TX\_CH5\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_TX_CH5_SLOT_NUM[4:0] | R/W  | 00100b | Secondary ASI output channel 5 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.11 SASI\_TX\_CH6\_CFG Register (Address = 0x23) [Reset = 0x05]

SASI\_TX\_CH6\_CFG is shown in [Table 7-172](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 6 configuration register.

**Table 7-172. SASI\_TX\_CH6\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 6-5 | SASI_TX_CH6_CFG[1:0]      | R/W  | 00b    | Secondary ASI output channel 6 configuration.<br>0d = Secondary ASI channel 6 output is in a tri-state condition<br>1d = Secondary ASI channel 6 output corresponds to ASI Input Channel 2 loopback data<br>2d = Secondary ASI channel 6 output corresponds to echo reference channel 2 data<br>3d = Reserved                                                                                                                                                                                                                                   |
| 4-0 | SASI_TX_CH6_SLOT_NUM[4:0] | R/W  | 00101b | Secondary ASI output channel 6 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.12 SASI\_TX\_CH7\_CFG Register (Address = 0x24) [Reset = 0x06]

SASI\_TX\_CH7\_CFG is shown in [Table 7-173](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 7 configuration register.

**Table 7-173. SASI\_TX\_CH7\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                       |
|-----|----------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                              |
| 6-5 | SASI_TX_CH7_CFG[1:0] | R/W  | 00b   | Secondary ASI output channel 7 configuration.<br>0d = Secondary ASI channel 7 output is in a tri-state condition<br>1d = Reserved<br>2d = Secondary ASI channel 7 output corresponds to {echo_ref_ch1_wlby2, echo_ref_ch2_wlby2}<br>3d = Reserved |

**Table 7-173. SASI\_TX\_CH7\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_TX_CH7_SLOT_NUM[4:0] | R/W  | 00110b | Secondary ASI output channel 7 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.13 SASI\_TX\_CH8\_CFG Register (Address = 0x25) [Reset = 0x07]**

SASI\_TX\_CH8\_CFG is shown in [Table 7-174](#).

Return to the [Summary Table](#).

This register is the SASI TX Channel 8 configuration register.

**Table 7-174. SASI\_TX\_CH8\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----|---------------------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 5   | SASI_TX_CH8_CFG           | R/W  | 0b     | Secondary ASI output channel 8 configuration.<br>0d = Secondary ASI channel 8 output is in a tri-state condition<br>1d = Secondary ASI channel 8 output corresponds to ICLA data                                                                                                                                                                                                                                                                                                                                                                |
| 4-0 | SASI_TX_CH8_SLOT_NUM[4:0] | R/W  | 00111b | Secondary ASI output channel 8 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.14 SASI\_RX\_CFG0 Register (Address = 0x26) [Reset = 0x00]**

SASI\_RX\_CFG0 is shown in [Table 7-175](#).

Return to the [Summary Table](#).

This register is the SASI RX configuration register 0.

**Table 7-175. SASI\_RX\_CFG0 Register Field Descriptions**

| Bit | Field                  | Type | Reset | Description                                                                                                                                                                                                                                                   |
|-----|------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SASI_RX_EDGE           | R/W  | 0b    | Secondary ASI data input (on the primary and secondary data pin) receive edge.<br>0d = Default edge as per the protocol configuration setting in bit 2 (BCLK_POL)<br>1d = Inverted following edge (half cycle delay) with respect to the default edge setting |
| 6   | SASI_RX_USE_INT_FSYNCH | R/W  | 0b    | Secondary ASI uses internal FSYNCH for input data latching in controller mode configuration as applicable.<br>0d = Use external FSYNCH for ASI protocol data latching<br>1d = Use internal FSYNCH for ASI protocol data latching                              |
| 5   | SASI_RX_USE_INT_BCLK   | R/W  | 0b    | Secondary ASI uses internal BCLK for input data latching in controller mode configuration.<br>0d = Use external BCLK for ASI protocol data latching<br>1d = Use internal BCLK for ASI protocol data latching                                                  |

**Table 7-175. SASI\_RX\_CFG0 Register Field Descriptions (continued)**

| Bit | Field               | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----|---------------------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_RX_OFFSET[4:0] | R/W  | 00000b | Secondary ASI data input MSB slot 0 offset (on the primary and secondary data pin).<br>0d = ASI data MSB location has no offset and is as per standard protocol<br>1d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of one BCLK cycle with respect to standard protocol<br>2d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of two BCLK cycles with respect to standard protocol<br>3d to 30d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset assigned as per configuration<br>31d = ASI data MSB location (TDM mode is slot 0 or I <sup>2</sup> S, LJ mode is the left and right slot 0) offset of 31 BCLK cycles with respect to standard protocol |

#### 7.1.3.15 SASI\_RX\_CFG1 Register (Address = 0x27) [Reset = 0x00]

SASI\_RX\_CFG1 is shown in [Table 7-176](#).

Return to the [Summary Table](#).

This register is the SASI RX configuration register 1.

**Table 7-176. SASI\_RX\_CFG1 Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                            |
|-----|-----------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SASI_RX_CH8_SEL | R/W  | 0b    | Secondary ASI input channel 8 select.<br>0d = Secondary ASI channel 8 input is on DIN<br>1d = Secondary ASI channel 8 input is on DIN2 |
| 6   | SASI_RX_CH7_SEL | R/W  | 0b    | Secondary ASI input channel 7 select.<br>0d = Secondary ASI channel 7 input is on DIN<br>1d = Secondary ASI channel 7 input is on DIN2 |
| 5   | SASI_RX_CH6_SEL | R/W  | 0b    | Secondary ASI input channel 6 select.<br>0d = Secondary ASI channel 6 input is on DIN<br>1d = Secondary ASI channel 6 input is on DIN2 |
| 4   | SASI_RX_CH5_SEL | R/W  | 0b    | Secondary ASI input channel 5 select.<br>0d = Secondary ASI channel 5 input is on DIN<br>1d = Secondary ASI channel 5 input is on DIN2 |
| 3   | SASI_RX_CH4_SEL | R/W  | 0b    | Secondary ASI input channel 4 select.<br>0d = Secondary ASI channel 4 input is on DIN<br>1d = Secondary ASI channel 4 input is on DIN2 |
| 2   | SASI_RX_CH3_SEL | R/W  | 0b    | Secondary ASI input channel 3 select.<br>0d = Secondary ASI channel 3 input is on DIN<br>1d = Secondary ASI channel 3 input is on DIN2 |
| 1   | SASI_RX_CH2_SEL | R/W  | 0b    | Secondary ASI input channel 2 select.<br>0d = Secondary ASI channel 2 input is on DIN<br>1d = Secondary ASI channel 2 input is on DIN2 |
| 0   | SASI_RX_CH1_SEL | R/W  | 0b    | Secondary ASI input channel 1 select.<br>0d = Secondary ASI channel 1 input is on DIN<br>1d = Secondary ASI channel 1 input is on DIN2 |

#### 7.1.3.16 SASI\_RX\_CH1\_CFG Register (Address = 0x28) [Reset = 0x00]

SASI\_RX\_CH1\_CFG is shown in [Table 7-177](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 1 configuration register.

**Table 7-177. SASI\_RX\_CH1\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5   | SASI_RX_CH1_CFG           | R/W  | 0b     | Secondary ASI input channel 1 configuration.<br>0d = Secondary ASI channel 1 input is disabled<br>1d = Secondary ASI channel 1 input corresponds to DAC Channel 1 data                                                                                                                                                                                                                                                                                                                                                                         |
| 4-0 | SASI_RX_CH1_SLOT_NUM[4:0] | R/W  | 00000b | Secondary ASI input channel 1 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.17 SASI\_RX\_CH2\_CFG Register (Address = 0x29) [Reset = 0x01]**

SASI\_RX\_CH2\_CFG is shown in [Table 7-178](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 2 configuration register.

**Table 7-178. SASI\_RX\_CH2\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                  | R    | 0b     | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5   | SASI_RX_CH2_CFG           | R/W  | 0b     | Secondary ASI input channel 2 configuration.<br>0d = Secondary ASI channel 2 input is disabled<br>1d = Secondary ASI channel 2 input corresponds to DAC Channel 2 data                                                                                                                                                                                                                                                                                                                                                                         |
| 4-0 | SASI_RX_CH2_SLOT_NUM[4:0] | R/W  | 00001b | Secondary ASI input channel 2 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.18 SASI\_RX\_CH3\_CFG Register (Address = 0x2A) [Reset = 0x02]**

SASI\_RX\_CH3\_CFG is shown in [Table 7-179](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 3 configuration register.

**Table 7-179. SASI\_RX\_CH3\_CFG Register Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                                                            |
|-----|-----------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED        | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                  |
| 5   | SASI_RX_CH3_CFG | R/W  | 0b    | Secondary ASI input channel 3 configuration.<br>0d = Secondary ASI channel 3 input is disabled<br>1d = Secondary ASI channel 3 input corresponds to DAC Channel 3 data |

**Table 7-179. SASI\_RX\_CH3\_CFG Register Field Descriptions (continued)**

| Bit | Field                         | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|-------------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_RX_CH3_SLOT_N<br>UM[4:0] | R/W  | 00010b | Secondary ASI input channel 3 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.19 SASI\_RX\_CH4\_CFG Register (Address = 0x2B) [Reset = 0x03]

SASI\_RX\_CH4\_CFG is shown in [Table 7-180](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 4 configuration register.

**Table 7-180. SASI\_RX\_CH4\_CFG Register Field Descriptions**

| Bit | Field                         | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|-------------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                      | R    | 0b     | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5   | SASI_RX_CH4_CFG               | R/W  | 0b     | Secondary ASI input channel 4 configuration.<br>0d = Secondary ASI channel 4 input is disabled<br>1d = Secondary ASI channel 4 input corresponds to DAC Channel 4 data                                                                                                                                                                                                                                                                                                                                                                         |
| 4-0 | SASI_RX_CH4_SLOT_N<br>UM[4:0] | R/W  | 00011b | Secondary ASI input channel 4 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.20 SASI\_RX\_CH5\_CFG Register (Address = 0x2C) [Reset = 0x04]

SASI\_RX\_CH5\_CFG is shown in [Table 7-181](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 5 configuration register.

**Table 7-181. SASI\_RX\_CH5\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                |
|-----|----------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                       |
| 6-5 | SASI_RX_CH5_CFG[1:0] | R/W  | 00b   | Secondary ASI input channel 5 configuration.<br>0d = Secondary ASI channel 5 input is disabled<br>1d = Secondary ASI channel 5 input corresponds to DAC Channel 5 data<br>2d = Secondary ASI channel 5 input corresponds to ADC Channel 1 output loopback<br>3d = Reserved |

**Table 7-181. SASI\_RX\_CH5\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_RX_CH5_SLOT_NUM[4:0] | R/W  | 00100b | Secondary ASI input channel 5 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.21 SASI\_RX\_CH6\_CFG Register (Address = 0x2D) [Reset = 0x05]**

SASI\_RX\_CH6\_CFG is shown in [Table 7-182](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 6 configuration register.

**Table 7-182. SASI\_RX\_CH6\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 6-5 | SASI_RX_CH6_CFG[1:0]      | R/W  | 00b    | Secondary ASI input channel 6 configuration.<br>0d = Secondary ASI channel 6 input is disabled<br>1d = Secondary ASI channel 6 input corresponds to DAC Channel 6 data<br>2d = Secondary ASI channel 6 input corresponds to ADC Channel 2 output loopback<br>3d = Secondary ASI channel 6 input corresponds to ICLA device 1 data                                                                                                                                                                                                              |
| 4-0 | SASI_RX_CH6_SLOT_NUM[4:0] | R/W  | 00101b | Secondary ASI input channel 6 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

**7.1.3.22 SASI\_RX\_CH7\_CFG Register (Address = 0x2E) [Reset = 0x06]**

SASI\_RX\_CH7\_CFG is shown in [Table 7-183](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 7 configuration register.

**Table 7-183. SASI\_RX\_CH7\_CFG Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                                       |
|-----|----------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED             | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                              |
| 6-5 | SASI_RX_CH7_CFG[1:0] | R/W  | 00b   | Secondary ASI input channel 7 configuration.<br>0d = Secondary ASI channel 7 input is disabled<br>1d = Secondary ASI channel 7 input corresponds to DAC Channel 7 data<br>2d = Secondary ASI channel 7 input corresponds to ADC Channel 3 output loopback<br>3d = Secondary ASI channel 7 input corresponds to ICLA device 2 data |



**Table 7-183. SASI\_RX\_CH7\_CFG Register Field Descriptions (continued)**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4-0 | SASI_RX_CH7_SLOT_NUM[4:0] | R/W  | 00110b | Secondary ASI input channel 7 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.23 SASI\_RX\_CH8\_CFG Register (Address = 0x2F) [Reset = 0x07]

SASI\_RX\_CH8\_CFG is shown in [Table 7-184](#).

Return to the [Summary Table](#).

This register is the SASI RX Channel 8 configuration register.

**Table 7-184. SASI\_RX\_CH8\_CFG Register Field Descriptions**

| Bit | Field                     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|---------------------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                  | R    | 0b     | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 6-5 | SASI_RX_CH8_CFG[1:0]      | R/W  | 00b    | Secondary ASI input channel 8 configuration.<br>0d = Secondary ASI channel 8 input is disabled<br>1d = Secondary ASI channel 8 input corresponds to DAC Channel 8 data<br>2d = Secondary ASI channel 8 input corresponds to ADC Channel 4 output loopback<br>3d = Secondary ASI channel 8 input corresponds to ICLA device 3 data                                                                                                                                                                                                              |
| 4-0 | SASI_RX_CH8_SLOT_NUM[4:0] | R/W  | 00111b | Secondary ASI input channel 8 slot assignment.<br>0d = TDM is slot 0 or I <sup>2</sup> S, LJ is left slot 0<br>1d = TDM is slot 1 or I <sup>2</sup> S, LJ is left slot 1<br>2d to 14d = Slot assigned as per configuration<br>15d = TDM is slot 15 or I <sup>2</sup> S, LJ is left slot 15<br>16d = TDM is slot 16 or I <sup>2</sup> S, LJ is right slot 0<br>17d = TDM is slot 17 or I <sup>2</sup> S, LJ is right slot 1<br>18d to 30d = Slot assigned as per configuration<br>31d = TDM is slot 31 or I <sup>2</sup> S, LJ is right slot 15 |

#### 7.1.3.24 CLK\_CFG12 Register (Address = 0x32) [Reset = 0x00]

CLK\_CFG12 is shown in [Table 7-185](#).

Return to the [Summary Table](#).

This register is the clock configuration register 12.

**Table 7-185. CLK\_CFG12 Register Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                |
|-----|----------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | PDIV_CLKSRC_SEL[1:0] | R/W  | 00b   | Source clock selection for PLL PDIV Divider.<br>0d = PLL_PDIV_IN_CLK is Primary ASI BCLK<br>1d = PLL_PDIV_IN_CLK is Secondary ASI BCLK<br>2d = PLL_PDIV_IN_CLK is CCLK<br>3d = PLL_PDIV_IN_CLK is internal Oscillator Clock (only supported in custom clock configuration) |

**Table 7-185. CLK\_CFG12 Register Field Descriptions (continued)**

| Bit | Field                      | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|----------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5-3 | PASI_BCLK_DIV_CLK_SEL[2:0] | R/W  | 000b  | Primary ASI BCLK divider clock source selection.<br>0d = Primary ASI BCLK divider clock source is PLL output<br>1d = Reserved<br>2d = Primary ASI BCLK divider clock source is secondary ASI BCLK<br>3d = Primary ASI BCLK divider clock source is CCLK<br>4d = Primary ASI BCLK divider clock source is internal oscillator clock (only supported in custom clock configuration)<br>5d = Primary ASI BCLK divider clock source is DSP clock<br>6d to 7d = Reserved |
| 2-0 | RESERVED                   | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                               |

**7.1.3.25 CLK\_CFG13 Register (Address = 0x33) [Reset = 0x00]**

CLK\_CFG13 is shown in [Table 7-186](#).

Return to the [Summary Table](#).

This register is the clock configuration register 13.

**Table 7-186. CLK\_CFG13 Register Field Descriptions**

| Bit | Field                      | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----|----------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | RESERVED                   | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 6-4 | SASI_BCLK_DIV_CLK_SEL[2:0] | R/W  | 000b  | Secondary ASI BCLK divider clock source selection.<br>0d = Secondary ASI BCLK divider clock source is PLL output<br>1d = Secondary ASI BCLK divider clock source is primary ASI BCLK<br>2d = Reserved<br>3d = Secondary ASI BCLK divider clock source is CCLK<br>4d = Secondary ASI BCLK divider clock source is internal oscillator clock (only supported in custom clock configuration)<br>5d = Secondary ASI BCLK divider clock source is DSP clock<br>6d to 7d = Reserved |
| 3-0 | RESERVED                   | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                                                                                                                                                                         |

**7.1.3.26 CLK\_CFG14 Register (Address = 0x34) [Reset = 0x10]**

CLK\_CFG14 is shown in [Table 7-187](#).

Return to the [Summary Table](#).

This register is the clock configuration register 14.

**Table 7-187. CLK\_CFG14 Register Field Descriptions**

| Bit | Field                       | Type | Reset | Description                                                                                                                                                                                                                                                                                                               |
|-----|-----------------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | DIG_NM_DIV_CLK_SRC_SEL[1:0] | R/W  | 00b   | Source clock selection for DIG NMDIV CLK clock.<br>0d = DIG NM divider input clock is Primary ASI BCLK<br>1d = DIG NM divider input clock is Secondary ASI BCLK<br>2d = DIG NM divider input clock is CCLK<br>3d = DIG NM divider input clock is internal oscillator clock (only supported in custom clock configuration) |
| 5-4 | ANA_NM_DIV_CLK_SRC_SEL[1:0] | R/W  | 01b   | Source clock selection for NMDIV CLK clock.<br>0d = NM divider input clock is PLL Output<br>1d = NM divider input clock is PLL Output<br>2d = NM divider input clock is DIG NM Divider Clock Source<br>3d = NM divider input clock is Primary ASI BCLK (Low Jitter Path)                                                  |
| 3-2 | RESERVED                    | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                    |
| 1-0 | RESERVED                    | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                                                                                                                    |

### 7.1.3.27 CLK\_CFG15 Register (Address = 0x35) [Reset = 0x01]

CLK\_CFG15 is shown in [Table 7-188](#).

Return to the [Summary Table](#).

This register is the clock configuration register 15.

**Table 7-188. CLK\_CFG15 Register Field Descriptions**

| Bit | Field         | Type | Reset     | Description                                                                                                                                                                                                                                             |
|-----|---------------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PLL_PDIV[7:0] | R/W  | 00000001b | PLL pre-scaler P-divisor value (Don't care when auto detection is enabled)<br>0d = PLL PDIV value is 256<br>1d = PLL PDIV value is 1<br>2d = PLL PDIV value is 2<br>3d to 254d = PLL PDIV value is as per configuration<br>255d = PLL PDIV value is 255 |

### 7.1.3.28 CLK\_CFG16 Register (Address = 0x36) [Reset = 0x00]

CLK\_CFG16 is shown in [Table 7-189](#).

Return to the [Summary Table](#).

This register is the clock configuration register 16.

**Table 7-189. CLK\_CFG16 Register Field Descriptions**

| Bit | Field                | Type | Reset   | Description                                                                                        |
|-----|----------------------|------|---------|----------------------------------------------------------------------------------------------------|
| 7   | PLL_JMUL_MSB         | R/W  | 0b      | PLL integer portion J-multiplier value MSB bit. (Don't care when auto detection is enabled)        |
| 6   | PLL_DIV_CLK_DIV_BY_2 | R/W  | 0b      | PLL DIV clock divide by 2 configuration<br>0d = No divide/2 inside PLL<br>1d = PLL does a divide/2 |
| 5-0 | PLL_DMUL_MSB[5:0]    | R/W  | 000000b | PLL fractional portion D-multiplier value MSB bits. (Don't care when auto detection is enabled)    |

### 7.1.3.29 CLK\_CFG17 Register (Address = 0x37) [Reset = 0x00]

CLK\_CFG17 is shown in [Table 7-190](#).

Return to the [Summary Table](#).

This register is the clock configuration register 17.

**Table 7-190. CLK\_CFG17 Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----|-------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PLL_DMUL_LSB[7:0] | R/W  | 00000000b | PLL fractional portion D-multiplier value LSB byte. Above D-multiplier value MSB bits (PLL_DMUL_MSB) along with this LSB byte (PLL_DMUL_LSB) is concatenated to determine final D-multiplier value. (Don't care when auto detection is enabled)<br>0d = PLL DMUL value is 0<br>1d = PLL DMUL value is 1<br>2d = PLL DMUL value is 2<br>3d to 9998d = PLL JMUL value is as per configuration<br>9999d = PLL JMUL value is 9999<br>10000d to 16383d = Reserved; Don't use |

### 7.1.3.30 CLK\_CFG18 Register (Address = 0x38) [Reset = 0x08]

CLK\_CFG18 is shown in [Table 7-191](#).

Return to the [Summary Table](#).

This register is the clock configuration register 18.

**Table 7-191. CLK\_CFG18 Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|-------------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PLL_JMUL_LSB[7:0] | R/W  | 00001000b | PLL integer portion J-multiplier value LSB byte. Above J-multiplier value MSB bit (PLL_JMUL_MSB) along with this LSB byte (PLL_JMUL_LSB) is concatenated to determine final J-multiplier value. (Don't care when auto detection is enabled)<br>0d = Reserved; Don't use<br>1d = PLL JMUL value is 1<br>2d = PLL JMUL value is 2<br>3d to 510d = PLL JMUL value is as per configuration<br>511d = PLL JMUL value is 511 |

#### 7.1.3.31 CLK\_CFG19 Register (Address = 0x39) [Reset = 0x20]

CLK\_CFG19 is shown in [Table 7-192](#).

Return to the [Summary Table](#).

This register is the clock configuration register 19.

**Table 7-192. CLK\_CFG19 Register Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                                                                                                                                              |
|-----|--------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | NDIV[2:0]    | R/W  | 001b  | NDIV divider value. (Don't care when auto detection is enabled)<br>0d = NDIV value is 8<br>1d = NDIV value is 1<br>2d = NDIV value is 2<br>3d to 6d = NDIV value is as per configuration<br>7d = NDIV value is 7         |
| 4-2 | PDM_DIV[2:0] | R/W  | 000b  | PDM divider value. (Don't care when auto detection is enabled)<br>0d = PDM_DIV value is 1<br>1d = PDM_DIV value is 2<br>2d = PDM_DIV value is 4<br>3d = PDM_DIV value is 8<br>4d = PDM_DIV value is 16<br>5d-7d Reserved |
| 1-0 | RESERVED     | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                                   |

#### 7.1.3.32 CLK\_CFG20 Register (Address = 0x3A) [Reset = 0x04]

CLK\_CFG20 is shown in [Table 7-193](#).

Return to the [Summary Table](#).

This register is the clock configuration register 20.

**Table 7-193. CLK\_CFG20 Register Field Descriptions**

| Bit | Field     | Type | Reset   | Description                                                                                                                                                                                                          |
|-----|-----------|------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | MDIV[5:0] | R/W  | 000001b | MDIV divider value. (Don't care when auto detection is enabled)<br>0d = MDIV value is 64<br>1d = MDIV value is 1<br>2d = MDIV value is 2<br>3d to 62d = MDIV value is as per configuration<br>63d = MDIV value is 63 |

**Table 7-193. CLK\_CFG20 Register Field Descriptions (continued)**

| Bit | Field                   | Type | Reset | Description                                                                                                                                                                                                       |
|-----|-------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1-0 | DIG_ADC_MODCLK_DIV[1:0] | R/W  | 00b   | ADC modulator clock divider value. (Don't care when auto detection is enabled)<br>0d = DIG_ADC_MODCLK_DIV value is 1<br>1d = DIG_ADC_MODCLK_DIV value is 2<br>2d = DIG_ADC_MODCLK_DIV value is 4<br>3d = Reserved |

### 7.1.3.33 CLK\_CFG21 Register (Address = 0x3B) [Reset = 0x00]

CLK\_CFG21 is shown in [Table 7-194](#).

Return to the [Summary Table](#).

This register is the clock configuration register 21.

**Table 7-194. CLK\_CFG21 Register Field Descriptions**

| Bit | Field                   | Type | Reset | Description                                                                                                                                                                                                       |
|-----|-------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED                | R    | 0b    | Reserved bits; Write only reset values                                                                                                                                                                            |
| 5-4 | DIG_DAC_MODCLK_DIV[1:0] | R/W  | 00b   | DAC modulator clock divider value. (Don't care when auto detection is enabled)<br>0d = DIG_DAC_MODCLK_DIV value is 1<br>1d = DIG_DAC_MODCLK_DIV value is 2<br>2d = DIG_DAC_MODCLK_DIV value is 4<br>3d = Reserved |
| 3   | DAC_MODCLKx2_DIS        | R/W  | 0b    | DAC modulator clock select configuration.<br>0d = DAC MOD clock 2x enabled<br>1d = DAC MOD clock 2x disabled                                                                                                      |
| 2   | PASI_BDIV_MSB           | R/W  | 0b    | Primary ASI BCLK divider value MSB bit. (Don't care when auto detection is enabled)                                                                                                                               |
| 1   | SASI_BDIV_MSB           | R/W  | 0b    | Secondary ASI BCLK divider value MSB bit. (Don't care when auto detection is enabled)                                                                                                                             |
| 0   | RESERVED                | R    | 0b    | Reserved bit; Write only reset value                                                                                                                                                                              |

### 7.1.3.34 CLK\_CFG22 Register (Address = 0x3C) [Reset = 0x01]

CLK\_CFG22 is shown in [Table 7-195](#).

Return to the [Summary Table](#).

This register is the clock configuration register 22.

**Table 7-195. CLK\_CFG22 Register Field Descriptions**

| Bit | Field              | Type | Reset     | Description                                                                                                                                                                                                                                                                                           |
|-----|--------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | PASI_BDIV_LSB[7:0] | R/W  | 00000001b | Secondary ASI BCLK divider value. (Don't care when auto detection is enabled)<br>0d = SASI BCLK divider value is 512<br>1d = SASI BCLK divider value is 1<br>2d = SASI BCLK divider value is 2<br>3d to 62d = SASI BCLK divider value is as per configuration<br>63d = SASI BCLK divider value is 511 |

### 7.1.3.35 CLK\_CFG23 Register (Address = 0x3D) [Reset = 0x01]

CLK\_CFG23 is shown in [Table 7-196](#).

Return to the [Summary Table](#).

This register is the clock configuration register 23.

**Table 7-196. CLK\_CFG23 Register Field Descriptions**

| Bit | Field              | Type | Reset     | Description                                                                                                                                                                                                                                                                                           |
|-----|--------------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | SASI_BDIV_LSB[7:0] | R/W  | 00000001b | Secondary ASI BCLK divider value. (Don't care when auto detection is enabled)<br>0d = SASI BCLK divider value is 512<br>1d = SASI BCLK divider value is 1<br>2d = SASI BCLK divider value is 2<br>3d to 62d = SASI BCLK divider value is as per configuration<br>63d = SASI BCLK divider value is 511 |

#### 7.1.3.36 CLK\_CFG24 Register (Address = 0x3E) [Reset = 0x01]

CLK\_CFG24 is shown in [Table 7-197](#).

Return to the [Summary Table](#).

This register is the clock configuration register 24.

**Table 7-197. CLK\_CFG24 Register Field Descriptions**

| Bit | Field           | Type | Reset   | Description                                                                                                                                                                                                                                            |
|-----|-----------------|------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | RESERVED        | R    | 0b      | Reserved bits; Write only reset value                                                                                                                                                                                                                  |
| 5-0 | ANA_NM_DIV[5:0] | R/W  | 000001b | Analog N-M DIV divider value. (Don't care when auto detection is enabled)<br>0d = ANA_NM_DIV value is 64<br>1d = ANA_NM_DIV value is 1<br>2d = ANA_NM_DIV value is 2<br>3d to 62d = ANA_NM_DIV value is as per configuration<br>63d = NDIV value is 63 |

#### 7.1.3.37 CLK\_CFG30 Register (Address = 0x44) [Reset = 0x00]

CLK\_CFG30 is shown in [Table 7-198](#).

Return to the [Summary Table](#).

This register is the clock configuration register 30.

**Table 7-198. CLK\_CFG30 Register Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                          |
|-----|------------|------|-------|----------------------------------------------------------------------|
| 7-3 | RESERVED   | R    | 0b    | Reserved bits; Write only reset value                                |
| 2   | NDIV_EN    | R/W  | 0b    | NDIV divider enable<br>0d = divider disabled<br>1d = divider enabled |
| 1   | MDIV_EN    | R/W  | 0b    | MDIV divider enable<br>0d = divider disabled<br>1d = divider enabled |
| 0   | PDM_DIV_EN | R/W  | 0b    | PDM divider enable<br>0d = divider disabled<br>1d = divider enabled  |

#### 7.1.3.38 CLK\_CFG31 Register (Address = 0x45) [Reset = 0x00]

CLK\_CFG31 is shown in [Table 7-199](#).

Return to the [Summary Table](#).

This register is the clock configuration register 31.

**Table 7-199. CLK\_CFG31 Register Field Descriptions**

| Bit | Field                 | Type | Reset | Description                                                                    |
|-----|-----------------------|------|-------|--------------------------------------------------------------------------------|
| 7   | RESERVED              | R    | 0b    | Reserved bit; Write only reset value                                           |
| 6   | RESERVED              | R    | 0b    | Reserved bit; Write only reset value                                           |
| 5   | RESERVED              | R    | 0b    | Reserved bit; Write only reset value                                           |
| 4   | DIG_DAC_MODCLK_DIV_EN | R/W  | 0b    | DAC MODCLK divider enable<br>0d = divider disabled<br>1d = divider enabled     |
| 3   | PASI_BDIV_EN          | R/W  | 0b    | PASI BDIV divider enable<br>0d = divider disabled<br>1d = divider enabled      |
| 2   | SASI_BDIV_EN          | R/W  | 0b    | SASI BDIV divider enable<br>0d = divider disabled<br>1d = divider enabled      |
| 1   | PASI_FSYNC_DIV_EN     | R/W  | 0b    | PASI FSYNC DIV divider enable<br>0d = divider disabled<br>1d = divider enabled |
| 0   | SASI_FSYNC_DIV_EN     | R/W  | 0b    | SASI FSYNC DIV divider enable<br>0d = divider disabled<br>1d = divider enabled |

#### 7.1.3.39 CLKOUT\_CFG1 Register (Address = 0x46) [Reset = 0x00]

CLKOUT\_CFG1 is shown in [Table 7-200](#).

Return to the [Summary Table](#).

This register is the CLKOUT configuration register 1.

**Table 7-200. CLKOUT\_CFG1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                           |
|-----|---------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-3 | RESERVED            | R    | 0b    | Reserved bits; Write only reset value                                                                                                                                                                                                                                                                                 |
| 2-0 | CLKOUT_CLK_SEL[2:0] | R/W  | 000b  | General Purpose CLKOUT divider clock source selection.<br>0d = Source clock is PLL output<br>1d = Source clock is primary ASI BCLK<br>2d = Source clock is secondary ASI BCLK<br>3d = Source clock is CCLK<br>4d = Source clock is internal oscillator clock<br>5d = Source clock is DSP clock<br>6d to 7d = Reserved |

#### 7.1.3.40 CLKOUT\_CFG2 Register (Address = 0x47) [Reset = 0x01]

CLKOUT\_CFG2 is shown in [Table 7-201](#).

Return to the [Summary Table](#).

This register is the CLKOUT configuration register 2.

**Table 7-201. CLKOUT\_CFG2 Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                           |
|-----|---------------|------|-------|---------------------------------------------------------------------------------------|
| 7   | CLKOUT_DIV_EN | R/W  | 0b    | CLKOUT divider enable.<br>0d = CLKOUT divider disabled<br>1d = CLKOUT divider enabled |

**Table 7-201. CLKOUT\_CFG2 Register Field Descriptions (continued)**

| Bit | Field           | Type | Reset    | Description                                                                                                                                                                                                      |
|-----|-----------------|------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6-0 | CLKOUT_DIV[6:0] | R/W  | 0000001b | CLKOUT DIV divider value.<br>0d = CLKOUT_DIV value is 128<br>1d = CLKOUT_DIV value is 1<br>2d = CLKOUT_DIV value is 2<br>3d to 126d = CLKOUT_DIV value is as per configuration<br>127d = CLKOUT_DIV value is 127 |

**7.1.3.41 SARCLK\_CFG1 Register (Address = 0x49) [Reset = 0x00]**

SARCLK\_CFG1 is shown in [Table 7-202](#).

Return to the [Summary Table](#).

This register is the SAR clock configuration register 1

**Table 7-202. SARCLK\_CFG1 Register Field Descriptions**

| Bit | Field                    | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                         |
|-----|--------------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | SAR_CLK_FREQ_SEL[1:0]    | R/W  | 00b   | SAR clock frequency mode<br>0d = SAR clock frequency is approximately 6MHz<br>1d = SAR clock frequency is approximately 3MHz<br>2d = SAR clock frequency is approximately 1.5MHz<br>3d = SAR clock frequency is approximately 12MHz (valid only when SAR clock is generated directly using internal oscillator clock in custom clock configuration) |
| 5   | SAR_CLK_SRC_AUTO_DISABLE | R/W  | 0b    | SAR divider source clock auto selection disable<br>0d = SAR divider source clock auto-selection based on clock detection scheme<br>1d = Reserved                                                                                                                                                                                                    |
| 4   | SAR_CLK_SRC_MANUAL_SEL   | R/W  | 0b    | SAR clock source manual selection (don't care in auto mode)<br>0d = SAR clock generated based on Audio clock available for ADC/DAC<br>1d = SAR clock generated based on internal oscillator clock (only supported in custom clock configuration)                                                                                                    |
| 3   | SAR_CLK_EN_AUTO_DISABLE  | R/W  | 0b    | SAR divider source clock auto selection disable<br>0d = SAR divider auto-enabled<br>1d = Reserved                                                                                                                                                                                                                                                   |
| 2   | SAR_CLK_MANUAL_EN        | R/W  | 0b    | SAR divider manual enable (don't care in auto mode)<br>0d = SAR divider disabled<br>1d = SAR divider enabled                                                                                                                                                                                                                                        |
| 1-0 | SAR_CLK_MANUAL_DIV[1:0]  | R/W  | 00b   | SAR divider value (don't care in auto mode)<br>0d = SAR divider value is 1<br>1d = SAR divider value is 2<br>2d = SAR divider value is 4<br>3d = SAR divider value is 8                                                                                                                                                                             |

**7.2 Programmable Coefficient Registers**

The register pages in this section consists of the programmable coefficients of the device. TI recommends using the PPC3 GUI for configuring the programmable coefficients settings; for more details see the [TAC5212EVM-PDK Evaluation module user's guide](#) and the [PurePath™ console graphical development suite](#). To optimize the coefficients register transaction time for the register pages in this section, the device also supports (by default) auto-incremented pages for the I<sup>2</sup>C and SPI burst writes and reads. After a transaction of register address 0x7F, the device auto increments to the next page at register 0x08 to transact the next coefficient value. These programmable coefficients are 32-bit, two's complement numbers. For a successful coefficient register transaction, the host device must write and read all four bytes starting with the most significant byte (BYT1) for a target coefficient register transaction. When using SPI for a coefficient register read transaction, the device transmits the first byte as a dummy read byte; therefore, the host must read five bytes, including the first dummy



read byte and the last four bytes corresponding to the coefficient register value starting with the most significant byte (BYT1).

### 7.2.1 Programmable Coefficient Registers: Page 8

This register page shown in [Table 7-203](#) consists of the programmable coefficients for the ADC biquad 1 to biquad 6 filters.

**Table 7-203. Page 8 Programmable Coefficient Registers**

| ADDRESS | REGISTER             | RESET | DESCRIPTION                                           |
|---------|----------------------|-------|-------------------------------------------------------|
| 0x00    | PAGE[7:0]            | 0x00  | Device Page Register                                  |
| 0x08    | ADC_BQ1_N0_BYT1[7:0] | 0x7F  | Programmable ADC biquad 1, N0 coefficient byte[31:24] |
| 0x09    | ADC_BQ1_N0_BYT2[7:0] | 0xFF  | Programmable ADC biquad 1, N0 coefficient byte[23:16] |
| 0x0A    | ADC_BQ1_N0_BYT3[7:0] | 0xFF  | Programmable ADC biquad 1, N0 coefficient byte[15:8]  |
| 0x0B    | ADC_BQ1_N0_BYT4[7:0] | 0xFF  | Programmable ADC biquad 1, N0 coefficient byte[7:0]   |
| 0x0C    | ADC_BQ1_N1_BYT1[7:0] | 0x00  | Programmable ADC biquad 1, N1 coefficient byte[31:24] |
| 0x0D    | ADC_BQ1_N1_BYT2[7:0] | 0x00  | Programmable ADC biquad 1, N1 coefficient byte[23:16] |
| 0x0E    | ADC_BQ1_N1_BYT3[7:0] | 0x00  | Programmable ADC biquad 1, N1 coefficient byte[15:8]  |
| 0x0F    | ADC_BQ1_N1_BYT4[7:0] | 0x00  | Programmable ADC biquad 1, N1 coefficient byte[7:0]   |
| 0x10    | ADC_BQ1_N2_BYT1[7:0] | 0x00  | Programmable ADC biquad 1, N2 coefficient byte[31:24] |
| 0x11    | ADC_BQ1_N2_BYT2[7:0] | 0x00  | Programmable ADC biquad 1, N2 coefficient byte[23:16] |
| 0x12    | ADC_BQ1_N2_BYT3[7:0] | 0x00  | Programmable ADC biquad 1, N2 coefficient byte[15:8]  |
| 0x13    | ADC_BQ1_N2_BYT4[7:0] | 0x00  | Programmable ADC biquad 1, N2 coefficient byte[7:0]   |
| 0x14    | ADC_BQ1_D1_BYT1[7:0] | 0x00  | Programmable ADC biquad 1, D1 coefficient byte[31:24] |
| 0x15    | ADC_BQ1_D1_BYT2[7:0] | 0x00  | Programmable ADC biquad 1, D1 coefficient byte[23:16] |
| 0x16    | ADC_BQ1_D1_BYT3[7:0] | 0x00  | Programmable ADC biquad 1, D1 coefficient byte[15:8]  |
| 0x17    | ADC_BQ1_D1_BYT4[7:0] | 0x00  | Programmable ADC biquad 1, D1 coefficient byte[7:0]   |
| 0x18    | ADC_BQ1_D2_BYT1[7:0] | 0x00  | Programmable ADC biquad 1, D2 coefficient byte[31:24] |
| 0x19    | ADC_BQ1_D2_BYT2[7:0] | 0x00  | Programmable ADC biquad 1, D2 coefficient byte[23:16] |
| 0x1A    | ADC_BQ1_D2_BYT3[7:0] | 0x00  | Programmable ADC biquad 1, D2 coefficient byte[15:8]  |
| 0x1B    | ADC_BQ1_D2_BYT4[7:0] | 0x00  | Programmable ADC biquad 1, D2 coefficient byte[7:0]   |
| 0x1C    | ADC_BQ2_N0_BYT1[7:0] | 0x7F  | Programmable ADC biquad 2, N0 coefficient byte[31:24] |
| 0x1D    | ADC_BQ2_N0_BYT2[7:0] | 0xFF  | Programmable ADC biquad 2, N0 coefficient byte[23:16] |
| 0x1E    | ADC_BQ2_N0_BYT3[7:0] | 0xFF  | Programmable ADC biquad 2, N0 coefficient byte[15:8]  |
| 0x1F    | ADC_BQ2_N0_BYT4[7:0] | 0xFF  | Programmable ADC biquad 2, N0 coefficient byte[7:0]   |
| 0x20    | ADC_BQ2_N1_BYT1[7:0] | 0x00  | Programmable ADC biquad 2, N1 coefficient byte[31:24] |
| 0x21    | ADC_BQ2_N1_BYT2[7:0] | 0x00  | Programmable ADC biquad 2, N1 coefficient byte[23:16] |
| 0x22    | ADC_BQ2_N1_BYT3[7:0] | 0x00  | Programmable ADC biquad 2, N1 coefficient byte[15:8]  |
| 0x23    | ADC_BQ2_N1_BYT4[7:0] | 0x00  | Programmable ADC biquad 2, N1 coefficient byte[7:0]   |
| 0x24    | ADC_BQ2_N2_BYT1[7:0] | 0x00  | Programmable ADC biquad 2, N2 coefficient byte[31:24] |
| 0x25    | ADC_BQ2_N2_BYT2[7:0] | 0x00  | Programmable ADC biquad 2, N2 coefficient byte[23:16] |
| 0x26    | ADC_BQ2_N2_BYT3[7:0] | 0x00  | Programmable ADC biquad 2, N2 coefficient byte[15:8]  |
| 0x27    | ADC_BQ2_N2_BYT4[7:0] | 0x00  | Programmable ADC biquad 2, N2 coefficient byte[7:0]   |
| 0x28    | ADC_BQ2_D1_BYT1[7:0] | 0x00  | Programmable ADC biquad 2, D1 coefficient byte[31:24] |
| 0x29    | ADC_BQ2_D1_BYT2[7:0] | 0x00  | Programmable ADC biquad 2, D1 coefficient byte[23:16] |
| 0x2A    | ADC_BQ2_D1_BYT3[7:0] | 0x00  | Programmable ADC biquad 2, D1 coefficient byte[15:8]  |
| 0x2B    | ADC_BQ2_D1_BYT4[7:0] | 0x00  | Programmable ADC biquad 2, D1 coefficient byte[7:0]   |
| 0x2C    | ADC_BQ2_D2_BYT1[7:0] | 0x00  | Programmable ADC biquad 2, D2 coefficient byte[31:24] |
| 0x2D    | ADC_BQ2_D2_BYT2[7:0] | 0x00  | Programmable ADC biquad 2, D2 coefficient byte[23:16] |

**Table 7-203. Page 8 Programmable Coefficient Registers (continued)**

|      |                      |      |                                                       |
|------|----------------------|------|-------------------------------------------------------|
| 0x2E | ADC_BQ2_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 2, D2 coefficient byte[15:8]  |
| 0x2F | ADC_BQ2_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 2, D2 coefficient byte[7:0]   |
| 0x30 | ADC_BQ3_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 3, N0 coefficient byte[31:24] |
| 0x31 | ADC_BQ3_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 3, N0 coefficient byte[23:16] |
| 0x32 | ADC_BQ3_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 3, N0 coefficient byte[15:8]  |
| 0x33 | ADC_BQ3_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 3, N0 coefficient byte[7:0]   |
| 0x34 | ADC_BQ3_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 3, N1 coefficient byte[31:24] |
| 0x35 | ADC_BQ3_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 3, N1 coefficient byte[23:16] |
| 0x36 | ADC_BQ3_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 3, N1 coefficient byte[15:8]  |
| 0x37 | ADC_BQ3_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 3, N1 coefficient byte[7:0]   |
| 0x38 | ADC_BQ3_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 3, N2 coefficient byte[31:24] |
| 0x39 | ADC_BQ3_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 3, N2 coefficient byte[23:16] |
| 0x3A | ADC_BQ3_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 3, N2 coefficient byte[15:8]  |
| 0x3B | ADC_BQ3_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 3, N2 coefficient byte[7:0]   |
| 0x3C | ADC_BQ3_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 3, D1 coefficient byte[31:24] |
| 0x3D | ADC_BQ3_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 3, D1 coefficient byte[23:16] |
| 0x3E | ADC_BQ3_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 3, D1 coefficient byte[15:8]  |
| 0x3F | ADC_BQ3_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 3, D1 coefficient byte[7:0]   |
| 0x40 | ADC_BQ3_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 3, D2 coefficient byte[31:24] |
| 0x41 | ADC_BQ3_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 3, D2 coefficient byte[23:16] |
| 0x42 | ADC_BQ3_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 3, D2 coefficient byte[15:8]  |
| 0x43 | ADC_BQ3_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 3, D2 coefficient byte[7:0]   |
| 0x44 | ADC_BQ4_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 4, N0 coefficient byte[31:24] |
| 0x45 | ADC_BQ4_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 4, N0 coefficient byte[23:16] |
| 0x46 | ADC_BQ4_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 4, N0 coefficient byte[15:8]  |
| 0x47 | ADC_BQ4_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 4, N0 coefficient byte[7:0]   |
| 0x48 | ADC_BQ4_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 4, N1 coefficient byte[31:24] |
| 0x49 | ADC_BQ4_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 4, N1 coefficient byte[23:16] |
| 0x4A | ADC_BQ4_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 4, N1 coefficient byte[15:8]  |
| 0x4B | ADC_BQ4_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 4, N1 coefficient byte[7:0]   |
| 0x4C | ADC_BQ4_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 4, N2 coefficient byte[31:24] |
| 0x4D | ADC_BQ4_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 4, N2 coefficient byte[23:16] |
| 0x4E | ADC_BQ4_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 4, N2 coefficient byte[15:8]  |
| 0x4F | ADC_BQ4_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 4, N2 coefficient byte[7:0]   |
| 0x50 | ADC_BQ4_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 4, D1 coefficient byte[31:24] |
| 0x51 | ADC_BQ4_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 4, D1 coefficient byte[23:16] |
| 0x52 | ADC_BQ4_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 4, D1 coefficient byte[15:8]  |
| 0x53 | ADC_BQ4_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 4, D1 coefficient byte[7:0]   |
| 0x54 | ADC_BQ4_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 4, D2 coefficient byte[31:24] |
| 0x55 | ADC_BQ4_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 4, D2 coefficient byte[23:16] |
| 0x56 | ADC_BQ4_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 4, D2 coefficient byte[15:8]  |
| 0x57 | ADC_BQ4_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 4, D2 coefficient byte[7:0]   |
| 0x58 | ADC_BQ5_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 5, N0 coefficient byte[31:24] |
| 0x59 | ADC_BQ5_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 5, N0 coefficient byte[23:16] |
| 0x5A | ADC_BQ5_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 5, N0 coefficient byte[15:8]  |
| 0x5B | ADC_BQ5_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 5, N0 coefficient byte[7:0]   |

**Table 7-203. Page 8 Programmable Coefficient Registers (continued)**

|      |                      |      |                                                       |
|------|----------------------|------|-------------------------------------------------------|
| 0x5C | ADC_BQ5_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 5, N1 coefficient byte[31:24] |
| 0x5D | ADC_BQ5_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 5, N1 coefficient byte[23:16] |
| 0x5E | ADC_BQ5_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 5, N1 coefficient byte[15:8]  |
| 0x5F | ADC_BQ5_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 5, N1 coefficient byte[7:0]   |
| 0x60 | ADC_BQ5_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 5, N2 coefficient byte[31:24] |
| 0x61 | ADC_BQ5_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 5, N2 coefficient byte[23:16] |
| 0x62 | ADC_BQ5_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 5, N2 coefficient byte[15:8]  |
| 0x63 | ADC_BQ5_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 5, N2 coefficient byte[7:0]   |
| 0x64 | ADC_BQ5_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 5, D1 coefficient byte[31:24] |
| 0x65 | ADC_BQ5_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 5, D1 coefficient byte[23:16] |
| 0x66 | ADC_BQ5_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 5, D1 coefficient byte[15:8]  |
| 0x67 | ADC_BQ5_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 5, D1 coefficient byte[7:0]   |
| 0x68 | ADC_BQ5_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 5, D2 coefficient byte[31:24] |
| 0x69 | ADC_BQ5_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 5, D2 coefficient byte[23:16] |
| 0x6A | ADC_BQ5_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 5, D2 coefficient byte[15:8]  |
| 0x6B | ADC_BQ5_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 5, D2 coefficient byte[7:0]   |
| 0x6C | ADC_BQ6_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 6, N0 coefficient byte[31:24] |
| 0x6D | ADC_BQ6_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 6, N0 coefficient byte[23:16] |
| 0x6E | ADC_BQ6_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 6, N0 coefficient byte[15:8]  |
| 0x6F | ADC_BQ6_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 6, N0 coefficient byte[7:0]   |
| 0x70 | ADC_BQ6_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 6, N1 coefficient byte[31:24] |
| 0x71 | ADC_BQ6_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 6, N1 coefficient byte[23:16] |
| 0x72 | ADC_BQ6_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 6, N1 coefficient byte[15:8]  |
| 0x73 | ADC_BQ6_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 6, N1 coefficient byte[7:0]   |
| 0x74 | ADC_BQ6_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 6, N2 coefficient byte[31:24] |
| 0x75 | ADC_BQ6_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 6, N2 coefficient byte[23:16] |
| 0x76 | ADC_BQ6_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 6, N2 coefficient byte[15:8]  |
| 0x77 | ADC_BQ6_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 6, N2 coefficient byte[7:0]   |
| 0x78 | ADC_BQ6_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 6, D1 coefficient byte[31:24] |
| 0x79 | ADC_BQ6_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 6, D1 coefficient byte[23:16] |
| 0x7A | ADC_BQ6_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 6, D1 coefficient byte[15:8]  |
| 0x7B | ADC_BQ6_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 6, D1 coefficient byte[7:0]   |
| 0x7C | ADC_BQ6_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 6, D2 coefficient byte[31:24] |
| 0x7D | ADC_BQ6_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 6, D2 coefficient byte[23:16] |
| 0x7E | ADC_BQ6_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 6, D2 coefficient byte[15:8]  |
| 0x7F | ADC_BQ6_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 6, D2 coefficient byte[7:0]   |

### 7.2.2 Programmable Coefficient Registers: Page 9

This register page shown in [Table 7-204](#) consists of the programmable coefficients for the ADC biquad 7 to biquad 12 filters.

**Table 7-204. Page 9 Programmable Coefficient Registers**

| ADDRESS | REGISTER             | RESET | DESCRIPTION                                           |
|---------|----------------------|-------|-------------------------------------------------------|
| 0x00    | PAGE[7:0]            | 0x00  | Device Page Register                                  |
| 0x08    | ADC_BQ7_N0_BYT1[7:0] | 0x7F  | Programmable ADC biquad 7, N0 coefficient byte[31:24] |
| 0x09    | ADC_BQ7_N0_BYT2[7:0] | 0xFF  | Programmable ADC biquad 7, N0 coefficient byte[23:16] |
| 0x0A    | ADC_BQ7_N0_BYT3[7:0] | 0xFF  | Programmable ADC biquad 7, N0 coefficient byte[15:8]  |

**Table 7-204. Page 9 Programmable Coefficient Registers (continued)**

|      |                      |      |                                                       |
|------|----------------------|------|-------------------------------------------------------|
| 0x0B | ADC_BQ7_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 7, N0 coefficient byte[7:0]   |
| 0x0C | ADC_BQ7_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 7, N1 coefficient byte[31:24] |
| 0x0D | ADC_BQ7_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 7, N1 coefficient byte[23:16] |
| 0x0E | ADC_BQ7_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 7, N1 coefficient byte[15:8]  |
| 0x0F | ADC_BQ7_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 7, N1 coefficient byte[7:0]   |
| 0x10 | ADC_BQ7_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 7, N2 coefficient byte[31:24] |
| 0x11 | ADC_BQ7_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 7, N2 coefficient byte[23:16] |
| 0x12 | ADC_BQ7_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 7, N2 coefficient byte[15:8]  |
| 0x13 | ADC_BQ7_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 7, N2 coefficient byte[7:0]   |
| 0x14 | ADC_BQ7_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 7, D1 coefficient byte[31:24] |
| 0x15 | ADC_BQ7_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 7, D1 coefficient byte[23:16] |
| 0x16 | ADC_BQ7_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 7, D1 coefficient byte[15:8]  |
| 0x17 | ADC_BQ7_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 7, D1 coefficient byte[7:0]   |
| 0x18 | ADC_BQ7_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 7, D2 coefficient byte[31:24] |
| 0x19 | ADC_BQ7_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 7, D2 coefficient byte[23:16] |
| 0x1A | ADC_BQ7_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 7, D2 coefficient byte[15:8]  |
| 0x1B | ADC_BQ7_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 7, D2 coefficient byte[7:0]   |
| 0x1C | ADC_BQ8_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 8, N0 coefficient byte[31:24] |
| 0x1D | ADC_BQ8_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 8, N0 coefficient byte[23:16] |
| 0x1E | ADC_BQ8_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 8, N0 coefficient byte[15:8]  |
| 0x1F | ADC_BQ8_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 8, N0 coefficient byte[7:0]   |
| 0x20 | ADC_BQ8_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 8, N1 coefficient byte[31:24] |
| 0x21 | ADC_BQ8_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 8, N1 coefficient byte[23:16] |
| 0x22 | ADC_BQ8_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 8, N1 coefficient byte[15:8]  |
| 0x23 | ADC_BQ8_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 8, N1 coefficient byte[7:0]   |
| 0x24 | ADC_BQ8_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 8, N2 coefficient byte[31:24] |
| 0x25 | ADC_BQ8_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 8, N2 coefficient byte[23:16] |
| 0x26 | ADC_BQ8_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 8, N2 coefficient byte[15:8]  |
| 0x27 | ADC_BQ8_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 8, N2 coefficient byte[7:0]   |
| 0x28 | ADC_BQ8_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 8, D1 coefficient byte[31:24] |
| 0x29 | ADC_BQ8_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 8, D1 coefficient byte[23:16] |
| 0x2A | ADC_BQ8_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 8, D1 coefficient byte[15:8]  |
| 0x2B | ADC_BQ8_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 8, D1 coefficient byte[7:0]   |
| 0x2C | ADC_BQ8_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 8, D2 coefficient byte[31:24] |
| 0x2D | ADC_BQ8_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 8, D2 coefficient byte[23:16] |
| 0x2E | ADC_BQ8_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 8, D2 coefficient byte[15:8]  |
| 0x2F | ADC_BQ8_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 8, D2 coefficient byte[7:0]   |
| 0x30 | ADC_BQ9_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 9, N0 coefficient byte[31:24] |
| 0x31 | ADC_BQ9_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 9, N0 coefficient byte[23:16] |
| 0x32 | ADC_BQ9_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 9, N0 coefficient byte[15:8]  |
| 0x33 | ADC_BQ9_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 9, N0 coefficient byte[7:0]   |
| 0x34 | ADC_BQ9_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 9, N1 coefficient byte[31:24] |
| 0x35 | ADC_BQ9_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 9, N1 coefficient byte[23:16] |
| 0x36 | ADC_BQ9_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 9, N1 coefficient byte[15:8]  |
| 0x37 | ADC_BQ9_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 9, N1 coefficient byte[7:0]   |
| 0x38 | ADC_BQ9_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 9, N2 coefficient byte[31:24] |

**Table 7-204. Page 9 Programmable Coefficient Registers (continued)**

|      |                       |      |                                                        |
|------|-----------------------|------|--------------------------------------------------------|
| 0x39 | ADC_BQ9_N2_BYT2[7:0]  | 0x00 | Programmable ADC biquad 9, N2 coefficient byte[23:16]  |
| 0x3A | ADC_BQ9_N2_BYT3[7:0]  | 0x00 | Programmable ADC biquad 9, N2 coefficient byte[15:8]   |
| 0x3B | ADC_BQ9_N2_BYT4[7:0]  | 0x00 | Programmable ADC biquad 9, N2 coefficient byte[7:0]    |
| 0x3C | ADC_BQ9_D1_BYT1[7:0]  | 0x00 | Programmable ADC biquad 9, D1 coefficient byte[31:24]  |
| 0x3D | ADC_BQ9_D1_BYT2[7:0]  | 0x00 | Programmable ADC biquad 9, D1 coefficient byte[23:16]  |
| 0x3E | ADC_BQ9_D1_BYT3[7:0]  | 0x00 | Programmable ADC biquad 9, D1 coefficient byte[15:8]   |
| 0x3F | ADC_BQ9_D1_BYT4[7:0]  | 0x00 | Programmable ADC biquad 9, D1 coefficient byte[7:0]    |
| 0x40 | ADC_BQ9_D2_BYT1[7:0]  | 0x00 | Programmable ADC biquad 9, D2 coefficient byte[31:24]  |
| 0x41 | ADC_BQ9_D2_BYT2[7:0]  | 0x00 | Programmable ADC biquad 9, D2 coefficient byte[23:16]  |
| 0x42 | ADC_BQ9_D2_BYT3[7:0]  | 0x00 | Programmable ADC biquad 9, D2 coefficient byte[15:8]   |
| 0x43 | ADC_BQ9_D2_BYT4[7:0]  | 0x00 | Programmable ADC biquad 9, D2 coefficient byte[7:0]    |
| 0x44 | ADC_BQ10_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 10, N0 coefficient byte[31:24] |
| 0x45 | ADC_BQ10_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 10, N0 coefficient byte[23:16] |
| 0x46 | ADC_BQ10_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 10, N0 coefficient byte[15:8]  |
| 0x47 | ADC_BQ10_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 10, N0 coefficient byte[7:0]   |
| 0x48 | ADC_BQ10_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 10, N1 coefficient byte[31:24] |
| 0x49 | ADC_BQ10_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 10, N1 coefficient byte[23:16] |
| 0x4A | ADC_BQ10_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 10, N1 coefficient byte[15:8]  |
| 0x4B | ADC_BQ10_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 10, N1 coefficient byte[7:0]   |
| 0x4C | ADC_BQ10_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 10, N2 coefficient byte[31:24] |
| 0x4D | ADC_BQ10_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 10, N2 coefficient byte[23:16] |
| 0x4E | ADC_BQ10_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 10, N2 coefficient byte[15:8]  |
| 0x4F | ADC_BQ10_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 10, N2 coefficient byte[7:0]   |
| 0x50 | ADC_BQ10_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 10, D1 coefficient byte[31:24] |
| 0x51 | ADC_BQ10_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 10, D1 coefficient byte[23:16] |
| 0x52 | ADC_BQ10_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 10, D1 coefficient byte[15:8]  |
| 0x53 | ADC_BQ10_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 10, D1 coefficient byte[7:0]   |
| 0x54 | ADC_BQ10_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 10, D2 coefficient byte[31:24] |
| 0x55 | ADC_BQ10_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 10, D2 coefficient byte[23:16] |
| 0x56 | ADC_BQ10_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 10, D2 coefficient byte[15:8]  |
| 0x57 | ADC_BQ10_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 10, D2 coefficient byte[7:0]   |
| 0x58 | ADC_BQ11_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 11, N0 coefficient byte[31:24] |
| 0x59 | ADC_BQ11_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 11, N0 coefficient byte[23:16] |
| 0x5A | ADC_BQ11_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 11, N0 coefficient byte[15:8]  |
| 0x5B | ADC_BQ11_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 11, N0 coefficient byte[7:0]   |
| 0x5C | ADC_BQ11_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 11, N1 coefficient byte[31:24] |
| 0x5D | ADC_BQ11_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 11, N1 coefficient byte[23:16] |
| 0x5E | ADC_BQ11_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 11, N1 coefficient byte[15:8]  |
| 0x5F | ADC_BQ11_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 11, N1 coefficient byte[7:0]   |
| 0x60 | ADC_BQ11_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 11, N2 coefficient byte[31:24] |
| 0x61 | ADC_BQ11_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 11, N2 coefficient byte[23:16] |
| 0x62 | ADC_BQ11_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 11, N2 coefficient byte[15:8]  |
| 0x63 | ADC_BQ11_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 11, N2 coefficient byte[7:0]   |
| 0x64 | ADC_BQ11_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 11, D1 coefficient byte[31:24] |
| 0x65 | ADC_BQ11_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 11, D1 coefficient byte[23:16] |
| 0x66 | ADC_BQ11_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 11, D1 coefficient byte[15:8]  |



**Table 7-204. Page 9 Programmable Coefficient Registers (continued)**

|      |                       |      |                                                        |
|------|-----------------------|------|--------------------------------------------------------|
| 0x67 | ADC_BQ11_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 11, D1 coefficient byte[7:0]   |
| 0x68 | ADC_BQ11_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 11, D2 coefficient byte[31:24] |
| 0x69 | ADC_BQ11_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 11, D2 coefficient byte[23:16] |
| 0x6A | ADC_BQ11_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 11, D2 coefficient byte[15:8]  |
| 0x6B | ADC_BQ11_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 11, D2 coefficient byte[7:0]   |
| 0x6C | ADC_BQ12_N0_BYT1[7:0] | 0x7F | Programmable ADC biquad 12, N0 coefficient byte[31:24] |
| 0x6D | ADC_BQ12_N0_BYT2[7:0] | 0xFF | Programmable ADC biquad 12, N0 coefficient byte[23:16] |
| 0x6E | ADC_BQ12_N0_BYT3[7:0] | 0xFF | Programmable ADC biquad 12, N0 coefficient byte[15:8]  |
| 0x6F | ADC_BQ12_N0_BYT4[7:0] | 0xFF | Programmable ADC biquad 12, N0 coefficient byte[7:0]   |
| 0x70 | ADC_BQ12_N1_BYT1[7:0] | 0x00 | Programmable ADC biquad 12, N1 coefficient byte[31:24] |
| 0x71 | ADC_BQ12_N1_BYT2[7:0] | 0x00 | Programmable ADC biquad 12, N1 coefficient byte[23:16] |
| 0x72 | ADC_BQ12_N1_BYT3[7:0] | 0x00 | Programmable ADC biquad 12, N1 coefficient byte[15:8]  |
| 0x73 | ADC_BQ12_N1_BYT4[7:0] | 0x00 | Programmable ADC biquad 12, N1 coefficient byte[7:0]   |
| 0x74 | ADC_BQ12_N2_BYT1[7:0] | 0x00 | Programmable ADC biquad 12, N2 coefficient byte[31:24] |
| 0x75 | ADC_BQ12_N2_BYT2[7:0] | 0x00 | Programmable ADC biquad 12, N2 coefficient byte[23:16] |
| 0x76 | ADC_BQ12_N2_BYT3[7:0] | 0x00 | Programmable ADC biquad 12, N2 coefficient byte[15:8]  |
| 0x77 | ADC_BQ12_N2_BYT4[7:0] | 0x00 | Programmable ADC biquad 12, N2 coefficient byte[7:0]   |
| 0x78 | ADC_BQ12_D1_BYT1[7:0] | 0x00 | Programmable ADC biquad 12, D1 coefficient byte[31:24] |
| 0x79 | ADC_BQ12_D1_BYT2[7:0] | 0x00 | Programmable ADC biquad 12, D1 coefficient byte[23:16] |
| 0x7A | ADC_BQ12_D1_BYT3[7:0] | 0x00 | Programmable ADC biquad 12, D1 coefficient byte[15:8]  |
| 0x7B | ADC_BQ12_D1_BYT4[7:0] | 0x00 | Programmable ADC biquad 12, D1 coefficient byte[7:0]   |
| 0x7C | ADC_BQ12_D2_BYT1[7:0] | 0x00 | Programmable ADC biquad 12, D2 coefficient byte[31:24] |
| 0x7D | ADC_BQ12_D2_BYT2[7:0] | 0x00 | Programmable ADC biquad 12, D2 coefficient byte[23:16] |
| 0x7E | ADC_BQ12_D2_BYT3[7:0] | 0x00 | Programmable ADC biquad 12, D2 coefficient byte[15:8]  |
| 0x7F | ADC_BQ12_D2_BYT4[7:0] | 0x00 | Programmable ADC biquad 12, D2 coefficient byte[7:0]   |

### 7.2.3 Programmable Coefficient Registers: Page 10

This register page shown in [Table 7-205](#) consists of the prorammmable coefficients for the ADC mixer 1 to 4, ADC to DAC loopback mixer and the ADC first-order IIR filter. All channel mixer coefficients are 32-bit, two's complement numbers using a 1.31 number format. The value of 0x7FFFFFFF is equivalent to +1 (0dB gain), the value 0x00000000 is equivalent to mute (zero data) and all values in between set the mixer attenuation computed accordingly ( $\text{hex2dec}(\text{value})/2^{31}$ ). If the MSB is set to '1' then the attenuation remains the same but the signal phase is inverted.

**Table 7-205. Page 10 Programmable Coefficient Registers**

| ADDRESS | REGISTER               | RESET | DESCRIPTION                                            |
|---------|------------------------|-------|--------------------------------------------------------|
| 0x00    | PAGE[7:0]              | 0x00  | Device Page Register                                   |
| 0x08    | ADC_MIX1_CH1_BYT1[7:0] | 0x7F  | Digital mixer 1, ADC channel 1 coefficient byte[31:24] |
| 0x09    | ADC_MIX1_CH1_BYT2[7:0] | 0xFF  | Digital mixer 1, ADC channel 1 coefficient byte[23:16] |
| 0x0A    | ADC_MIX1_CH1_BYT3[7:0] | 0xFF  | Digital mixer 1, ADC channel 1 coefficient byte[15:8]  |
| 0x0B    | ADC_MIX1_CH1_BYT4[7:0] | 0xFF  | Digital mixer 1, ADC channel 1 coefficient byte[7:0]   |
| 0x0C    | ADC_MIX1_CH2_BYT1[7:0] | 0x00  | Digital mixer 1, ADC channel 2 coefficient byte[31:24] |
| 0x0D    | ADC_MIX1_CH2_BYT2[7:0] | 0x00  | Digital mixer 1, ADC channel 2 coefficient byte[23:16] |
| 0x0E    | ADC_MIX1_CH2_BYT3[7:0] | 0x00  | Digital mixer 1, ADC channel 2 coefficient byte[15:8]  |
| 0x0F    | ADC_MIX1_CH2_BYT4[7:0] | 0x00  | Digital mixer 1, ADC channel 2 coefficient byte[7:0]   |
| 0x10    | ADC_MIX1_CH3_BYT1[7:0] | 0x00  | Digital mixer 1, ADC channel 3 coefficient byte[31:24] |
| 0x11    | ADC_MIX1_CH3_BYT2[7:0] | 0x00  | Digital mixer 1, ADC channel 3 coefficient byte[23:16] |
| 0x12    | ADC_MIX1_CH3_BYT3[7:0] | 0x00  | Digital mixer 1, ADC channel 3 coefficient byte[15:8]  |

**Table 7-205. Page 10 Programmable Coefficient Registers (continued)**

|      |                        |      |                                                        |
|------|------------------------|------|--------------------------------------------------------|
| 0x13 | ADC_MIX1_CH3_BYT4[7:0] | 0x00 | Digital mixer 1, ADC channel 3 coefficient byte[7:0]   |
| 0x14 | ADC_MIX1_CH4_BYT1[7:0] | 0x00 | Digital mixer 1, ADC channel 4 coefficient byte[31:24] |
| 0x15 | ADC_MIX1_CH4_BYT2[7:0] | 0x00 | Digital mixer 1, ADC channel 4 coefficient byte[23:16] |
| 0x16 | ADC_MIX1_CH4_BYT3[7:0] | 0x00 | Digital mixer 1, ADC channel 4 coefficient byte[15:8]  |
| 0x17 | ADC_MIX1_CH4_BYT4[7:0] | 0x00 | Digital mixer 1, ADC channel 4 coefficient byte[7:0]   |
| 0x18 | ADC_MIX2_CH1_BYT1[7:0] | 0x00 | Digital mixer 2, ADC channel 1 coefficient byte[31:24] |
| 0x19 | ADC_MIX2_CH1_BYT2[7:0] | 0x00 | Digital mixer 2, ADC channel 1 coefficient byte[23:16] |
| 0x1A | ADC_MIX2_CH1_BYT3[7:0] | 0x00 | Digital mixer 2, ADC channel 1 coefficient byte[15:8]  |
| 0x1B | ADC_MIX2_CH1_BYT4[7:0] | 0x00 | Digital mixer 2, ADC channel 1 coefficient byte[7:0]   |
| 0x1C | ADC_MIX2_CH2_BYT1[7:0] | 0x7F | Digital mixer 2, ADC channel 2 coefficient byte[31:24] |
| 0x1D | ADC_MIX2_CH2_BYT2[7:0] | 0xFF | Digital mixer 2, ADC channel 2 coefficient byte[23:16] |
| 0x1E | ADC_MIX2_CH2_BYT3[7:0] | 0xFF | Digital mixer 2, ADC channel 2 coefficient byte[15:8]  |
| 0x1F | ADC_MIX2_CH2_BYT4[7:0] | 0xFF | Digital mixer 2, ADC channel 2 coefficient byte[7:0]   |
| 0x20 | ADC_MIX2_CH3_BYT1[7:0] | 0x00 | Digital mixer 2, ADC channel 3 coefficient byte[31:24] |
| 0x21 | ADC_MIX2_CH3_BYT2[7:0] | 0x00 | Digital mixer 2, ADC channel 3 coefficient byte[23:16] |
| 0x22 | ADC_MIX2_CH3_BYT3[7:0] | 0x00 | Digital mixer 2, ADC channel 3 coefficient byte[15:8]  |
| 0x23 | ADC_MIX2_CH3_BYT4[7:0] | 0x00 | Digital mixer 2, ADC channel 3 coefficient byte[7:0]   |
| 0x24 | ADC_MIX2_CH4_BYT1[7:0] | 0x00 | Digital mixer 2, ADC channel 4 coefficient byte[31:24] |
| 0x25 | ADC_MIX2_CH4_BYT2[7:0] | 0x00 | Digital mixer 2, ADC channel 4 coefficient byte[23:16] |
| 0x26 | ADC_MIX2_CH4_BYT3[7:0] | 0x00 | Digital mixer 2, ADC channel 4 coefficient byte[15:8]  |
| 0x27 | ADC_MIX2_CH4_BYT4[7:0] | 0x00 | Digital mixer 2, ADC channel 4 coefficient byte[7:0]   |
| 0x28 | ADC_MIX3_CH1_BYT1[7:0] | 0x00 | Digital mixer 3, ADC channel 1 coefficient byte[31:24] |
| 0x29 | ADC_MIX3_CH1_BYT2[7:0] | 0x00 | Digital mixer 3, ADC channel 1 coefficient byte[23:16] |
| 0x2A | ADC_MIX3_CH1_BYT3[7:0] | 0x00 | Digital mixer 3, ADC channel 1 coefficient byte[15:8]  |
| 0x2B | ADC_MIX3_CH1_BYT4[7:0] | 0x00 | Digital mixer 3, ADC channel 1 coefficient byte[7:0]   |
| 0x2C | ADC_MIX3_CH2_BYT1[7:0] | 0x00 | Digital mixer 3, ADC channel 2 coefficient byte[31:24] |
| 0x2D | ADC_MIX3_CH2_BYT2[7:0] | 0x00 | Digital mixer 3, ADC channel 2 coefficient byte[23:16] |
| 0x2E | ADC_MIX3_CH2_BYT3[7:0] | 0x00 | Digital mixer 3, ADC channel 2 coefficient byte[15:8]  |
| 0x2F | ADC_MIX3_CH2_BYT4[7:0] | 0x00 | Digital mixer 3, ADC channel 2 coefficient byte[7:0]   |
| 0x30 | ADC_MIX3_CH3_BYT1[7:0] | 0x7F | Digital mixer 3, ADC channel 3 coefficient byte[31:24] |
| 0x31 | ADC_MIX3_CH3_BYT2[7:0] | 0xFF | Digital mixer 3, ADC channel 3 coefficient byte[23:16] |
| 0x32 | ADC_MIX3_CH3_BYT3[7:0] | 0xFF | Digital mixer 3, ADC channel 3 coefficient byte[15:8]  |
| 0x33 | ADC_MIX3_CH3_BYT4[7:0] | 0xFF | Digital mixer 3, ADC channel 3 coefficient byte[7:0]   |
| 0x34 | ADC_MIX3_CH4_BYT1[7:0] | 0x00 | Digital mixer 3, ADC channel 4 coefficient byte[31:24] |
| 0x35 | ADC_MIX3_CH4_BYT2[7:0] | 0x00 | Digital mixer 3, ADC channel 4 coefficient byte[23:16] |
| 0x36 | ADC_MIX3_CH4_BYT3[7:0] | 0x00 | Digital mixer 3, ADC channel 4 coefficient byte[15:8]  |
| 0x37 | ADC_MIX3_CH4_BYT4[7:0] | 0x00 | Digital mixer 3, ADC channel 4 coefficient byte[7:0]   |
| 0x38 | ADC_MIX4_CH1_BYT1[7:0] | 0x00 | Digital mixer 4, ADC channel 1 coefficient byte[31:24] |
| 0x39 | ADC_MIX4_CH1_BYT2[7:0] | 0x00 | Digital mixer 4, ADC channel 1 coefficient byte[23:16] |
| 0x3A | ADC_MIX4_CH1_BYT3[7:0] | 0x00 | Digital mixer 4, ADC channel 1 coefficient byte[15:8]  |
| 0x3B | ADC_MIX4_CH1_BYT4[7:0] | 0x00 | Digital mixer 4, ADC channel 1 coefficient byte[7:0]   |
| 0x3C | ADC_MIX4_CH2_BYT1[7:0] | 0x00 | Digital mixer 4, ADC channel 2 coefficient byte[31:24] |
| 0x3D | ADC_MIX4_CH2_BYT2[7:0] | 0x00 | Digital mixer 4, ADC channel 2 coefficient byte[23:16] |
| 0x3E | ADC_MIX4_CH2_BYT3[7:0] | 0x00 | Digital mixer 4, ADC channel 2 coefficient byte[15:8]  |
| 0x3F | ADC_MIX4_CH2_BYT4[7:0] | 0x00 | Digital mixer 4, ADC channel 2 coefficient byte[7:0]   |
| 0x40 | ADC_MIX4_CH3_BYT1[7:0] | 0x00 | Digital mixer 4, ADC channel 3 coefficient byte[31:24] |

**Table 7-205. Page 10 Programmable Coefficient Registers (continued)**

|      |                           |      |                                                                              |
|------|---------------------------|------|------------------------------------------------------------------------------|
| 0x41 | ADC_MIX4_CH3_BYT2[7:0]    | 0x00 | Digital mixer 4, ADC channel 3 coefficient byte[23:16]                       |
| 0x42 | ADC_MIX4_CH3_BYT3[7:0]    | 0x00 | Digital mixer 4, ADC channel 3 coefficient byte[15:8]                        |
| 0x43 | ADC_MIX4_CH3_BYT4[7:0]    | 0x00 | Digital mixer 4, ADC channel 3 coefficient byte[7:0]                         |
| 0x44 | ADC_MIX4_CH4_BYT1[7:0]    | 0x7F | Digital mixer 4, ADC channel 4 coefficient byte[31:24]                       |
| 0x45 | ADC_MIX4_CH4_BYT2[7:0]    | 0xFF | Digital mixer 4, ADC channel 4 coefficient byte[23:16]                       |
| 0x46 | ADC_MIX4_CH4_BYT3[7:0]    | 0xFF | Digital mixer 4, ADC channel 4 coefficient byte[15:8]                        |
| 0x47 | ADC_MIX4_CH4_BYT4[7:0]    | 0xFF | Digital mixer 4, ADC channel 4 coefficient byte[7:0]                         |
| 0x48 | ADC_LB_MIX1_CH1_BYT1[7:0] | 0x7F | Digital loopback (ADC to DAC) mixer 1, ADC channel 1 coefficient byte[31:24] |
| 0x49 | ADC_LB_MIX1_CH1_BYT2[7:0] | 0xFF | Digital loopback (ADC to DAC) mixer 1, ADC channel 1 coefficient byte[23:16] |
| 0x4A | ADC_LB_MIX1_CH1_BYT3[7:0] | 0xFF | Digital loopback (ADC to DAC) mixer 1, ADC channel 1 coefficient byte[15:8]  |
| 0x4B | ADC_LB_MIX1_CH1_BYT4[7:0] | 0xFF | Digital loopback (ADC to DAC) mixer 1, ADC channel 1 coefficient byte[7:0]   |
| 0x4C | ADC_LB_MIX1_CH2_BYT1[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 2 coefficient byte[31:24] |
| 0x4D | ADC_LB_MIX1_CH2_BYT2[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 2 coefficient byte[23:16] |
| 0x4E | ADC_LB_MIX1_CH2_BYT3[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 2 coefficient byte[15:8]  |
| 0x4F | ADC_LB_MIX1_CH2_BYT4[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 2 coefficient byte[7:0]   |
| 0x50 | ADC_LB_MIX1_CH3_BYT1[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 3 coefficient byte[31:24] |
| 0x51 | ADC_LB_MIX1_CH3_BYT2[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 3 coefficient byte[23:16] |
| 0x52 | ADC_LB_MIX1_CH3_BYT3[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 3 coefficient byte[15:8]  |
| 0x53 | ADC_LB_MIX1_CH3_BYT4[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 3 coefficient byte[7:0]   |
| 0x54 | ADC_LB_MIX1_CH4_BYT1[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 4 coefficient byte[31:24] |
| 0x55 | ADC_LB_MIX1_CH4_BYT2[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 4 coefficient byte[23:16] |
| 0x56 | ADC_LB_MIX1_CH4_BYT3[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 4 coefficient byte[15:8]  |
| 0x57 | ADC_LB_MIX1_CH4_BYT4[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 1, ADC channel 4 coefficient byte[7:0]   |
| 0x58 | ADC_LB_MIX2_CH1_BYT1[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 1 coefficient byte[31:24] |
| 0x59 | ADC_LB_MIX2_CH1_BYT2[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 1 coefficient byte[23:16] |
| 0x5A | ADC_LB_MIX2_CH1_BYT3[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 1 coefficient byte[15:8]  |
| 0x5B | ADC_LB_MIX2_CH1_BYT4[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 1 coefficient byte[7:0]   |
| 0x5C | ADC_LB_MIX2_CH2_BYT1[7:0] | 0x7F | Digital loopback (ADC to DAC) mixer 2, ADC channel 2 coefficient byte[31:24] |
| 0x5D | ADC_LB_MIX2_CH2_BYT2[7:0] | 0xFF | Digital loopback (ADC to DAC) mixer 2, ADC channel 2 coefficient byte[23:16] |
| 0x5E | ADC_LB_MIX2_CH2_BYT3[7:0] | 0xFF | Digital loopback (ADC to DAC) mixer 2, ADC channel 2 coefficient byte[15:8]  |



**Table 7-205. Page 10 Programmable Coefficient Registers (continued)**

|      |                           |      |                                                                              |
|------|---------------------------|------|------------------------------------------------------------------------------|
| 0x5F | ADC_LB_MIX2_CH2_BYT4[7:0] | 0xFF | Digital loopback (ADC to DAC) mixer 2, ADC channel 2 coefficient byte[7:0]   |
| 0x60 | ADC_LB_MIX2_CH3_BYT1[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 3 coefficient byte[31:24] |
| 0x61 | ADC_LB_MIX2_CH3_BYT2[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 3 coefficient byte[23:16] |
| 0x62 | ADC_LB_MIX2_CH3_BYT3[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 3 coefficient byte[15:8]  |
| 0x63 | ADC_LB_MIX2_CH3_BYT4[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 3 coefficient byte[7:0]   |
| 0x64 | ADC_LB_MIX2_CH4_BYT1[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 4 coefficient byte[31:24] |
| 0x65 | ADC_LB_MIX2_CH4_BYT2[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 4 coefficient byte[23:16] |
| 0x66 | ADC_LB_MIX2_CH4_BYT3[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 4 coefficient byte[15:8]  |
| 0x67 | ADC_LB_MIX2_CH4_BYT4[7:0] | 0x00 | Digital loopback (ADC to DAC) mixer 2, ADC channel 4 coefficient byte[7:0]   |
| 0x78 | ADC_IIR_N0_BYT1[7:0]      | 0x7F | Programmable ADC first-order IIR, N0 coefficient byte[31:24]                 |
| 0x79 | ADC_IIR_N0_BYT2[7:0]      | 0xFF | Programmable ADC first-order IIR, N0 coefficient byte[23:16]                 |
| 0x7A | ADC_IIR_N0_BYT3[7:0]      | 0xFF | Programmable ADC first-order IIR, N0 coefficient byte[15:8]                  |
| 0x7B | ADC_IIR_N0_BYT4[7:0]      | 0xFF | Programmable ADC first-order IIR, N0 coefficient byte[7:0]                   |
| 0x7C | ADC_IIR_N1_BYT1[7:0]      | 0x00 | Programmable ADC first-order IIR, N1 coefficient byte[31:24]                 |
| 0x7D | ADC_IIR_N1_BYT2[7:0]      | 0x00 | Programmable ADC first-order IIR, N1 coefficient byte[23:16]                 |
| 0x7E | ADC_IIR_N1_BYT3[7:0]      | 0x00 | Programmable ADC first-order IIR, N1 coefficient byte[15:8]                  |
| 0x7F | ADC_IIR_N1_BYT4[7:0]      | 0x00 | Programmable ADC first-order IIR, N1 coefficient byte[7:0]                   |

### 7.2.4 Programmable Coefficient Registers: Page 11

This register page shown in [Table 7-206](#) consists of the programmable coefficients for the ADC first-order IIR filter, ADC digital volume control and fine gain control for channels 1 to 4, ADC Auxiliary mixer and UAD filters.

**Table 7-206. Page 11 Programmable Coefficient Registers**

| ADDRESS | REGISTER                      | RESET | DESCRIPTION                                                   |
|---------|-------------------------------|-------|---------------------------------------------------------------|
| 0x00    | PAGE[7:0]                     | 0x00  | Device Page Register                                          |
| 0x08    | ADC_IIR_D1_BYT1[7:0]          | 0x00  | Programmable ADC first-order IIR, D1 coefficient byte[31:24]  |
| 0x09    | ADC_IIR_D1_BYT2[7:0]          | 0x00  | Programmable ADC first-order IIR, D1 coefficient byte[23:16]  |
| 0x0A    | ADC_IIR_D1_BYT3[7:0]          | 0x00  | Programmable ADC first-order IIR, D1 coefficient byte[15:8]   |
| 0x0B    | ADC_IIR_D1_BYT4[7:0]          | 0x00  | Programmable ADC first-order IIR, D1 coefficient byte[7:0]    |
| 0x0C    | DEV_BQ_BUFSWAP_FLAG_BYT1[7:0] | 0x00  | Device Biquad Buffer Swap Flag coefficient byte[31:24]        |
| 0x0D    | DEV_BQ_BUFSWAP_FLAG_BYT2[7:0] | 0x00  | Device Biquad Buffer Swap Flag coefficient byte[23:16]        |
| 0x0E    | DEV_BQ_BUFSWAP_FLAG_BYT3[7:0] | 0x00  | Device Biquad Buffer Swap Flag coefficient byte[15:8]         |
| 0x0F    | DEV_BQ_BUFSWAP_FLAG_BYT4[7:0] | 0x00  | Device Biquad Buffer Swap Flag coefficient byte[7:0]          |
| 0x0C    | ADC_VOL_CH1_BYT1[7:0]         | 0x00  | Digital volume control, ADC channel 1 coefficient byte[31:24] |
| 0x0D    | ADC_VOL_CH1_BYT2[7:0]         | 0x80  | Digital volume control, ADC channel 1 coefficient byte[23:16] |
| 0x0E    | ADC_VOL_CH1_BYT3[7:0]         | 0x00  | Digital volume control, ADC channel 1 coefficient byte[15:8]  |
| 0x0F    | ADC_VOL_CH1_BYT4[7:0]         | 0x00  | Digital volume control, ADC channel 1 coefficient byte[7:0]   |
| 0x10    | ADC_VOL_CH2_BYT1[7:0]         | 0x00  | Digital volume control, ADC channel 2 coefficient byte[31:24] |

**Table 7-206. Page 11 Programmable Coefficient Registers (continued)**

|      |                           |      |                                                                        |
|------|---------------------------|------|------------------------------------------------------------------------|
| 0x11 | ADC_VOL_CH2_BYT2[7:0]     | 0x80 | Digital volume control, ADC channel 2 coefficient byte[23:16]          |
| 0x12 | ADC_VOL_CH2_BYT3[7:0]     | 0x00 | Digital volume control, ADC channel 2 coefficient byte[15:8]           |
| 0x13 | ADC_VOL_CH2_BYT4[7:0]     | 0x00 | Digital volume control, ADC channel 2 coefficient byte[7:0]            |
| 0x14 | ADC_VOL_CH3_BYT1[7:0]     | 0x00 | Digital volume control, ADC channel 3 coefficient byte[31:24]          |
| 0x15 | ADC_VOL_CH3_BYT2[7:0]     | 0x80 | Digital volume control, ADC channel 3 coefficient byte[23:16]          |
| 0x16 | ADC_VOL_CH3_BYT3[7:0]     | 0x00 | Digital volume control, ADC channel 3 coefficient byte[15:8]           |
| 0x17 | ADC_VOL_CH3_BYT4[7:0]     | 0x00 | Digital volume control, ADC channel 3 coefficient byte[7:0]            |
| 0x18 | ADC_VOL_CH4_BYT1[7:0]     | 0x00 | Digital volume control, ADC channel 4 coefficient byte[31:24]          |
| 0x19 | ADC_VOL_CH4_BYT2[7:0]     | 0x80 | Digital volume control, ADC channel 4 coefficient byte[23:16]          |
| 0x1A | ADC_VOL_CH4_BYT3[7:0]     | 0x00 | Digital volume control, ADC channel 4 coefficient byte[15:8]           |
| 0x1F | ADC_VOL_CH4_BYT4[7:0]     | 0x00 | Digital volume control, ADC channel 4 coefficient byte[7:0]            |
| 0x20 | ADC_SF2_CH1_BYT1[7:0]     | 0x40 | Digital SF2 (fine gain) control, ADC channel 1 coefficient byte[31:24] |
| 0x21 | ADC_SF2_CH1_BYT2[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 1 coefficient byte[23:16] |
| 0x22 | ADC_SF2_CH1_BYT3[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 1 coefficient byte[15:8]  |
| 0x23 | ADC_SF2_CH1_BYT4[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 1 coefficient byte[7:0]   |
| 0x24 | ADC_SF2_CH2_BYT1[7:0]     | 0x40 | Digital SF2 (fine gain) control, ADC channel 2 coefficient byte[31:24] |
| 0x25 | ADC_SF2_CH2_BYT2[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 2 coefficient byte[23:16] |
| 0x26 | ADC_SF2_CH2_BYT3[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 2 coefficient byte[15:8]  |
| 0x27 | ADC_SF2_CH2_BYT4[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 2 coefficient byte[7:0]   |
| 0x28 | ADC_SF2_CH3_BYT1[7:0]     | 0x40 | Digital SF2 (fine gain) control, ADC channel 3 coefficient byte[31:24] |
| 0x29 | ADC_SF2_CH3_BYT2[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 3 coefficient byte[23:16] |
| 0x2A | ADC_SF2_CH3_BYT3[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 3 coefficient byte[15:8]  |
| 0x2B | ADC_SF2_CH3_BYT4[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 3 coefficient byte[7:0]   |
| 0x2C | ADC_SF2_CH4_BYT1[7:0]     | 0x40 | Digital SF2 (fine gain) control, ADC channel 4 coefficient byte[31:24] |
| 0x2D | ADC_SF2_CH4_BYT2[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 4 coefficient byte[23:16] |
| 0x2E | ADC_SF2_CH4_BYT3[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 4 coefficient byte[15:8]  |
| 0x2F | ADC_SF2_CH4_BYT4[7:0]     | 0x00 | Digital SF2 (fine gain) control, ADC channel 4 coefficient byte[7:0]   |
| 0x30 | ADC_AUX_MIX_CH1_BYT1[7:0] | 0x00 | ADC Auxiliary Mixer CH1 coefficient byte[31:24]                        |
| 0x31 | ADC_AUX_MIX_CH1_BYT2[7:0] | 0x00 | ADC Auxiliary Mixer CH1 coefficient byte[23:16]                        |
| 0x32 | ADC_AUX_MIX_CH1_BYT3[7:0] | 0x00 | ADC Auxiliary Mixer CH1 coefficient byte[15:8]                         |
| 0x33 | ADC_AUX_MIX_CH1_BYT4[7:0] | 0x00 | ADC Auxiliary Mixer CH1 coefficient byte[7:0]                          |
| 0x34 | ADC_AUX_MIX_CH2_BYT1[7:0] | 0x00 | ADC Auxiliary Mixer CH2 coefficient byte[31:24]                        |

**Table 7-206. Page 11 Programmable Coefficient Registers (continued)**

|      |                           |      |                                                 |
|------|---------------------------|------|-------------------------------------------------|
| 0x35 | ADC_AUX_MIX_CH2_BYT2[7:0] | 0x00 | ADC Auxiliary Mixer CH2 coefficient byte[23:16] |
| 0x36 | ADC_AUX_MIX_CH2_BYT3[7:0] | 0x00 | ADC Auxiliary Mixer CH2 coefficient byte[15:8]  |
| 0x37 | ADC_AUX_MIX_CH2_BYT4[7:0] | 0x00 | ADC Auxiliary Mixer CH2 coefficient byte[7:0]   |
| 0x68 | ADC_UAD_BPF_B0_BYT1[7:0]  | 0x07 | UAD BQ B0 Coefficient [31:24]                   |
| 0x69 | ADC_UAD_BPF_B0_BYT2[7:0]  | 0xDF | UAD BQ B0 Coefficient [23:16]                   |
| 0x6A | ADC_UAD_BPF_B0_BYT3[7:0]  | 0x9E | UAD BQ B0 Coefficient[15:8]                     |
| 0x6B | ADC_UAD_BPF_B0_BYT4[7:0]  | 0x1D | UAD BQ B0 Coefficient[7:0]                      |
| 0x6C | ADC_UAD_BPF_B1_BYT1[7:0]  | 0x00 | UAD BQ B1 Coefficient [31:24]                   |
| 0x6D | ADC_UAD_BPF_B1_BYT2[7:0]  | 0x00 | UAD BQ B1 Coefficient [23:16]                   |
| 0x6E | ADC_UAD_BPF_B1_BYT3[7:0]  | 0x00 | UAD BQ B1 Coefficient[15:8]                     |
| 0x6F | ADC_UAD_BPF_B1_BYT4[7:0]  | 0x00 | UAD BQ B1 Coefficient [7:0]                     |
| 0x70 | ADC_UAD_BPF_B2_BYT1[7:0]  | 0xF8 | UAD BQ B2 Coefficient [31:24]                   |
| 0x71 | ADC_UAD_BPF_B2_BYT2[7:0]  | 0x20 | UAD BQ B2 Coefficient [23:16]                   |
| 0x72 | ADC_UAD_BPF_B2_BYT3[7:0]  | 0x61 | UAD BQ B2 Coefficient[15:8]                     |
| 0x73 | ADC_UAD_BPF_B2_BYT4[7:0]  | 0xE2 | UAD BQ B2 Coefficient[7:0]                      |
| 0x74 | ADC_UAD_BPF_A1_BYT1[7:0]  | 0x3C | UAD BQ A1 Coefficient [31:24]                   |
| 0x75 | ADC_UAD_BPF_A1_BYT2[7:0]  | 0x31 | UAD BQ A1 Coefficient [23:16]                   |
| 0x76 | ADC_UAD_BPF_A1_BYT3[7:0]  | 0x2E | UAD BQ A1 Coefficient[15:8]                     |
| 0x77 | ADC_UAD_BPF_A1_BYT4[7:0]  | 0xF5 | UAD BQ A1 Coefficient[7:0]                      |
| 0x78 | ADC_UAD_BPF_A2_BYT1[7:0]  | 0x70 | UAD BQ A2 Coefficient [31:24]                   |
| 0x79 | ADC_UAD_BPF_A2_BYT2[7:0]  | 0x40 | UAD BQ A2 Coefficient [23:16]                   |
| 0x7A | ADC_UAD_BPF_A2_BYT3[7:0]  | 0xC3 | UAD BQ A2 Coefficient[15:8]                     |
| 0x7B | ADC_UAD_BPF_A2_BYT4[7:0]  | 0xC5 | UAD BQ A2 Coefficient[7:0]                      |

### 7.2.5 Programmable Coefficient Registers: Page 15

This register page shown in [Table 7-207](#) consists of the programmable coefficients for the DAC biquad 1 to biquad 6 filters.

**Table 7-207. Page 15 Programmable Coefficient Registers**

| ADDRESS | REGISTER             | RESET | DESCRIPTION                                           |
|---------|----------------------|-------|-------------------------------------------------------|
| 0x00    | PAGE[7:0]            | 0x00  | Device Page Register                                  |
| 0x08    | DAC_BQ1_N0_BYT1[7:0] | 0x7F  | Programmable DAC biquad 1, N0 coefficient byte[31:24] |
| 0x09    | DAC_BQ1_N0_BYT2[7:0] | 0xFF  | Programmable DAC biquad 1, N0 coefficient byte[23:16] |
| 0x0A    | DAC_BQ1_N0_BYT3[7:0] | 0xFF  | Programmable DAC biquad 1, N0 coefficient byte[15:8]  |
| 0x0B    | DAC_BQ1_N0_BYT4[7:0] | 0xFF  | Programmable DAC biquad 1, N0 coefficient byte[7:0]   |
| 0x0C    | DAC_BQ1_N1_BYT1[7:0] | 0x00  | Programmable DAC biquad 1, N1 coefficient byte[31:24] |
| 0x0D    | DAC_BQ1_N1_BYT2[7:0] | 0x00  | Programmable DAC biquad 1, N1 coefficient byte[23:16] |
| 0x0E    | DAC_BQ1_N1_BYT3[7:0] | 0x00  | Programmable DAC biquad 1, N1 coefficient byte[15:8]  |
| 0x0F    | DAC_BQ1_N1_BYT4[7:0] | 0x00  | Programmable DAC biquad 1, N1 coefficient byte[7:0]   |
| 0x10    | DAC_BQ1_N2_BYT1[7:0] | 0x00  | Programmable DAC biquad 1, N2 coefficient byte[31:24] |
| 0x11    | DAC_BQ1_N2_BYT2[7:0] | 0x00  | Programmable DAC biquad 1, N2 coefficient byte[23:16] |
| 0x12    | DAC_BQ1_N2_BYT3[7:0] | 0x00  | Programmable DAC biquad 1, N2 coefficient byte[15:8]  |
| 0x13    | DAC_BQ1_N2_BYT4[7:0] | 0x00  | Programmable DAC biquad 1, N2 coefficient byte[7:0]   |
| 0x14    | DAC_BQ1_D1_BYT1[7:0] | 0x00  | Programmable DAC biquad 1, D1 coefficient byte[31:24] |
| 0x15    | DAC_BQ1_D1_BYT2[7:0] | 0x00  | Programmable DAC biquad 1, D1 coefficient byte[23:16] |

**Table 7-207. Page 15 Programmable Coefficient Registers (continued)**

|      |                      |      |                                                       |
|------|----------------------|------|-------------------------------------------------------|
| 0x16 | DAC_BQ1_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 1, D1 coefficient byte[15:8]  |
| 0x17 | DAC_BQ1_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 1, D1 coefficient byte[7:0]   |
| 0x18 | DAC_BQ1_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 1, D2 coefficient byte[31:24] |
| 0x19 | DAC_BQ1_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 1, D2 coefficient byte[23:16] |
| 0x1A | DAC_BQ1_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 1, D2 coefficient byte[15:8]  |
| 0x1B | DAC_BQ1_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 1, D2 coefficient byte[7:0]   |
| 0x1C | DAC_BQ2_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 2, N0 coefficient byte[31:24] |
| 0x1D | DAC_BQ2_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 2, N0 coefficient byte[23:16] |
| 0x1E | DAC_BQ2_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 2, N0 coefficient byte[15:8]  |
| 0x1F | DAC_BQ2_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 2, N0 coefficient byte[7:0]   |
| 0x20 | DAC_BQ2_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 2, N1 coefficient byte[31:24] |
| 0x21 | DAC_BQ2_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 2, N1 coefficient byte[23:16] |
| 0x22 | DAC_BQ2_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 2, N1 coefficient byte[15:8]  |
| 0x23 | DAC_BQ2_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 2, N1 coefficient byte[7:0]   |
| 0x24 | DAC_BQ2_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 2, N2 coefficient byte[31:24] |
| 0x25 | DAC_BQ2_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 2, N2 coefficient byte[23:16] |
| 0x26 | DAC_BQ2_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 2, N2 coefficient byte[15:8]  |
| 0x27 | DAC_BQ2_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 2, N2 coefficient byte[7:0]   |
| 0x28 | DAC_BQ2_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 2, D1 coefficient byte[31:24] |
| 0x29 | DAC_BQ2_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 2, D1 coefficient byte[23:16] |
| 0x2A | DAC_BQ2_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 2, D1 coefficient byte[15:8]  |
| 0x2B | DAC_BQ2_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 2, D1 coefficient byte[7:0]   |
| 0x2C | DAC_BQ2_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 2, D2 coefficient byte[31:24] |
| 0x2D | DAC_BQ2_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 2, D2 coefficient byte[23:16] |
| 0x2E | DAC_BQ2_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 2, D2 coefficient byte[15:8]  |
| 0x2F | DAC_BQ2_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 2, D2 coefficient byte[7:0]   |
| 0x30 | DAC_BQ3_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 3, N0 coefficient byte[31:24] |
| 0x31 | DAC_BQ3_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 3, N0 coefficient byte[23:16] |
| 0x32 | DAC_BQ3_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 3, N0 coefficient byte[15:8]  |
| 0x33 | DAC_BQ3_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 3, N0 coefficient byte[7:0]   |
| 0x34 | DAC_BQ3_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 3, N1 coefficient byte[31:24] |
| 0x35 | DAC_BQ3_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 3, N1 coefficient byte[23:16] |
| 0x36 | DAC_BQ3_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 3, N1 coefficient byte[15:8]  |
| 0x37 | DAC_BQ3_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 3, N1 coefficient byte[7:0]   |
| 0x38 | DAC_BQ3_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 3, N2 coefficient byte[31:24] |
| 0x39 | DAC_BQ3_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 3, N2 coefficient byte[23:16] |
| 0x3A | DAC_BQ3_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 3, N2 coefficient byte[15:8]  |
| 0x3B | DAC_BQ3_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 3, N2 coefficient byte[7:0]   |
| 0x3C | DAC_BQ3_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 3, D1 coefficient byte[31:24] |
| 0x3D | DAC_BQ3_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 3, D1 coefficient byte[23:16] |
| 0x3E | DAC_BQ3_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 3, D1 coefficient byte[15:8]  |
| 0x3F | DAC_BQ3_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 3, D1 coefficient byte[7:0]   |
| 0x40 | DAC_BQ3_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 3, D2 coefficient byte[31:24] |
| 0x41 | DAC_BQ3_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 3, D2 coefficient byte[23:16] |
| 0x42 | DAC_BQ3_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 3, D2 coefficient byte[15:8]  |
| 0x43 | DAC_BQ3_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 3, D2 coefficient byte[7:0]   |

**Table 7-207. Page 15 Programmable Coefficient Registers (continued)**

|      |                      |      |                                                       |
|------|----------------------|------|-------------------------------------------------------|
| 0x44 | DAC_BQ4_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 4, N0 coefficient byte[31:24] |
| 0x45 | DAC_BQ4_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 4, N0 coefficient byte[23:16] |
| 0x46 | DAC_BQ4_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 4, N0 coefficient byte[15:8]  |
| 0x47 | DAC_BQ4_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 4, N0 coefficient byte[7:0]   |
| 0x48 | DAC_BQ4_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 4, N1 coefficient byte[31:24] |
| 0x49 | DAC_BQ4_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 4, N1 coefficient byte[23:16] |
| 0x4A | DAC_BQ4_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 4, N1 coefficient byte[15:8]  |
| 0x4B | DAC_BQ4_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 4, N1 coefficient byte[7:0]   |
| 0x4C | DAC_BQ4_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 4, N2 coefficient byte[31:24] |
| 0x4D | DAC_BQ4_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 4, N2 coefficient byte[23:16] |
| 0x4E | DAC_BQ4_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 4, N2 coefficient byte[15:8]  |
| 0x4F | DAC_BQ4_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 4, N2 coefficient byte[7:0]   |
| 0x50 | DAC_BQ4_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 4, D1 coefficient byte[31:24] |
| 0x51 | DAC_BQ4_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 4, D1 coefficient byte[23:16] |
| 0x52 | DAC_BQ4_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 4, D1 coefficient byte[15:8]  |
| 0x53 | DAC_BQ4_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 4, D1 coefficient byte[7:0]   |
| 0x54 | DAC_BQ4_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 4, D2 coefficient byte[31:24] |
| 0x55 | DAC_BQ4_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 4, D2 coefficient byte[23:16] |
| 0x56 | DAC_BQ4_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 4, D2 coefficient byte[15:8]  |
| 0x57 | DAC_BQ4_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 4, D2 coefficient byte[7:0]   |
| 0x58 | DAC_BQ5_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 5, N0 coefficient byte[31:24] |
| 0x59 | DAC_BQ5_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 5, N0 coefficient byte[23:16] |
| 0x5A | DAC_BQ5_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 5, N0 coefficient byte[15:8]  |
| 0x5B | DAC_BQ5_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 5, N0 coefficient byte[7:0]   |
| 0x5C | DAC_BQ5_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 5, N1 coefficient byte[31:24] |
| 0x5D | DAC_BQ5_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 5, N1 coefficient byte[23:16] |
| 0x5E | DAC_BQ5_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 5, N1 coefficient byte[15:8]  |
| 0x5F | DAC_BQ5_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 5, N1 coefficient byte[7:0]   |
| 0x60 | DAC_BQ5_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 5, N2 coefficient byte[31:24] |
| 0x61 | DAC_BQ5_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 5, N2 coefficient byte[23:16] |
| 0x62 | DAC_BQ5_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 5, N2 coefficient byte[15:8]  |
| 0x63 | DAC_BQ5_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 5, N2 coefficient byte[7:0]   |
| 0x64 | DAC_BQ5_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 5, D1 coefficient byte[31:24] |
| 0x65 | DAC_BQ5_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 5, D1 coefficient byte[23:16] |
| 0x66 | DAC_BQ5_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 5, D1 coefficient byte[15:8]  |
| 0x67 | DAC_BQ5_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 5, D1 coefficient byte[7:0]   |
| 0x68 | DAC_BQ5_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 5, D2 coefficient byte[31:24] |
| 0x69 | DAC_BQ5_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 5, D2 coefficient byte[23:16] |
| 0x6A | DAC_BQ5_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 5, D2 coefficient byte[15:8]  |
| 0x6B | DAC_BQ5_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 5, D2 coefficient byte[7:0]   |
| 0x6C | DAC_BQ6_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 6, N0 coefficient byte[31:24] |
| 0x6D | DAC_BQ6_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 6, N0 coefficient byte[23:16] |
| 0x6E | DAC_BQ6_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 6, N0 coefficient byte[15:8]  |
| 0x6F | DAC_BQ6_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 6, N0 coefficient byte[7:0]   |
| 0x70 | DAC_BQ6_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 6, N1 coefficient byte[31:24] |
| 0x71 | DAC_BQ6_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 6, N1 coefficient byte[23:16] |



**Table 7-207. Page 15 Programmable Coefficient Registers (continued)**

|      |                      |      |                                                       |
|------|----------------------|------|-------------------------------------------------------|
| 0x72 | DAC_BQ6_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 6, N1 coefficient byte[15:8]  |
| 0x73 | DAC_BQ6_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 6, N1 coefficient byte[7:0]   |
| 0x74 | DAC_BQ6_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 6, N2 coefficient byte[31:24] |
| 0x75 | DAC_BQ6_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 6, N2 coefficient byte[23:16] |
| 0x76 | DAC_BQ6_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 6, N2 coefficient byte[15:8]  |
| 0x77 | DAC_BQ6_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 6, N2 coefficient byte[7:0]   |
| 0x78 | DAC_BQ6_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 6, D1 coefficient byte[31:24] |
| 0x79 | DAC_BQ6_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 6, D1 coefficient byte[23:16] |
| 0x7A | DAC_BQ6_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 6, D1 coefficient byte[15:8]  |
| 0x7B | DAC_BQ6_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 6, D1 coefficient byte[7:0]   |
| 0x7C | DAC_BQ6_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 6, D2 coefficient byte[31:24] |
| 0x7D | DAC_BQ6_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 6, D2 coefficient byte[23:16] |
| 0x7E | DAC_BQ6_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 6, D2 coefficient byte[15:8]  |
| 0x7F | DAC_BQ6_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 6, D2 coefficient byte[7:0]   |

**7.2.6 Programmable Coefficient Registers: Page 16**

This register page shown in [Section 7.2.6](#) consists of the programmable coefficients for the DAC biquad 7 to biquad 12 filters.

**Table 7-208. Page 16 Programmable Coefficient Registers**

| ADDRESS | REGISTER             | RESET | DESCRIPTION                                           |
|---------|----------------------|-------|-------------------------------------------------------|
| 0x00    | PAGE[7:0]            | 0x00  | Device Page Register                                  |
| 0x08    | DAC_BQ7_N0_BYT1[7:0] | 0x7F  | Programmable DAC biquad 7, N0 coefficient byte[31:24] |
| 0x09    | DAC_BQ7_N0_BYT2[7:0] | 0xFF  | Programmable DAC biquad 7, N0 coefficient byte[23:16] |
| 0x0A    | DAC_BQ7_N0_BYT3[7:0] | 0xFF  | Programmable DAC biquad 7, N0 coefficient byte[15:8]  |
| 0x0B    | DAC_BQ7_N0_BYT4[7:0] | 0xFF  | Programmable DAC biquad 7, N0 coefficient byte[7:0]   |
| 0x0C    | DAC_BQ7_N1_BYT1[7:0] | 0x00  | Programmable DAC biquad 7, N1 coefficient byte[31:24] |
| 0x0D    | DAC_BQ7_N1_BYT2[7:0] | 0x00  | Programmable DAC biquad 7, N1 coefficient byte[23:16] |
| 0x0E    | DAC_BQ7_N1_BYT3[7:0] | 0x00  | Programmable DAC biquad 7, N1 coefficient byte[15:8]  |
| 0x0F    | DAC_BQ7_N1_BYT4[7:0] | 0x00  | Programmable DAC biquad 7, N1 coefficient byte[7:0]   |
| 0x10    | DAC_BQ7_N2_BYT1[7:0] | 0x00  | Programmable DAC biquad 7, N2 coefficient byte[31:24] |
| 0x11    | DAC_BQ7_N2_BYT2[7:0] | 0x00  | Programmable DAC biquad 7, N2 coefficient byte[23:16] |
| 0x12    | DAC_BQ7_N2_BYT3[7:0] | 0x00  | Programmable DAC biquad 7, N2 coefficient byte[15:8]  |
| 0x13    | DAC_BQ7_N2_BYT4[7:0] | 0x00  | Programmable DAC biquad 7, N2 coefficient byte[7:0]   |
| 0x14    | DAC_BQ7_D1_BYT1[7:0] | 0x00  | Programmable DAC biquad 7, D1 coefficient byte[31:24] |
| 0x15    | DAC_BQ7_D1_BYT2[7:0] | 0x00  | Programmable DAC biquad 7, D1 coefficient byte[23:16] |
| 0x16    | DAC_BQ7_D1_BYT3[7:0] | 0x00  | Programmable DAC biquad 7, D1 coefficient byte[15:8]  |
| 0x17    | DAC_BQ7_D1_BYT4[7:0] | 0x00  | Programmable DAC biquad 7, D1 coefficient byte[7:0]   |
| 0x18    | DAC_BQ7_D2_BYT1[7:0] | 0x00  | Programmable DAC biquad 7, D2 coefficient byte[31:24] |
| 0x19    | DAC_BQ7_D2_BYT2[7:0] | 0x00  | Programmable DAC biquad 7, D2 coefficient byte[23:16] |
| 0x1A    | DAC_BQ7_D2_BYT3[7:0] | 0x00  | Programmable DAC biquad 7, D2 coefficient byte[15:8]  |
| 0x1B    | DAC_BQ7_D2_BYT4[7:0] | 0x00  | Programmable DAC biquad 7, D2 coefficient byte[7:0]   |
| 0x1C    | DAC_BQ8_N0_BYT1[7:0] | 0x7F  | Programmable DAC biquad 8, N0 coefficient byte[31:24] |
| 0x1D    | DAC_BQ8_N0_BYT2[7:0] | 0xFF  | Programmable DAC biquad 8, N0 coefficient byte[23:16] |
| 0x1E    | DAC_BQ8_N0_BYT3[7:0] | 0xFF  | Programmable DAC biquad 8, N0 coefficient byte[15:8]  |
| 0x1F    | DAC_BQ8_N0_BYT4[7:0] | 0xFF  | Programmable DAC biquad 8, N0 coefficient byte[7:0]   |
| 0x20    | DAC_BQ8_N1_BYT1[7:0] | 0x00  | Programmable DAC biquad 8, N1 coefficient byte[31:24] |

**Table 7-208. Page 16 Programmable Coefficient Registers (continued)**

|      |                       |      |                                                        |
|------|-----------------------|------|--------------------------------------------------------|
| 0x21 | DAC_BQ8_N1_BYT2[7:0]  | 0x00 | Programmable DAC biquad 8, N1 coefficient byte[23:16]  |
| 0x22 | DAC_BQ8_N1_BYT3[7:0]  | 0x00 | Programmable DAC biquad 8, N1 coefficient byte[15:8]   |
| 0x23 | DAC_BQ8_N1_BYT4[7:0]  | 0x00 | Programmable DAC biquad 8, N1 coefficient byte[7:0]    |
| 0x24 | DAC_BQ8_N2_BYT1[7:0]  | 0x00 | Programmable DAC biquad 8, N2 coefficient byte[31:24]  |
| 0x25 | DAC_BQ8_N2_BYT2[7:0]  | 0x00 | Programmable DAC biquad 8, N2 coefficient byte[23:16]  |
| 0x26 | DAC_BQ8_N2_BYT3[7:0]  | 0x00 | Programmable DAC biquad 8, N2 coefficient byte[15:8]   |
| 0x27 | DAC_BQ8_N2_BYT4[7:0]  | 0x00 | Programmable DAC biquad 8, N2 coefficient byte[7:0]    |
| 0x28 | DAC_BQ8_D1_BYT1[7:0]  | 0x00 | Programmable DAC biquad 8, D1 coefficient byte[31:24]  |
| 0x29 | DAC_BQ8_D1_BYT2[7:0]  | 0x00 | Programmable DAC biquad 8, D1 coefficient byte[23:16]  |
| 0x2A | DAC_BQ8_D1_BYT3[7:0]  | 0x00 | Programmable DAC biquad 8, D1 coefficient byte[15:8]   |
| 0x2B | DAC_BQ8_D1_BYT4[7:0]  | 0x00 | Programmable DAC biquad 8, D1 coefficient byte[7:0]    |
| 0x2C | DAC_BQ8_D2_BYT1[7:0]  | 0x00 | Programmable DAC biquad 8, D2 coefficient byte[31:24]  |
| 0x2D | DAC_BQ8_D2_BYT2[7:0]  | 0x00 | Programmable DAC biquad 8, D2 coefficient byte[23:16]  |
| 0x2E | DAC_BQ8_D2_BYT3[7:0]  | 0x00 | Programmable DAC biquad 8, D2 coefficient byte[15:8]   |
| 0x2F | DAC_BQ8_D2_BYT4[7:0]  | 0x00 | Programmable DAC biquad 8, D2 coefficient byte[7:0]    |
| 0x30 | DAC_BQ9_N0_BYT1[7:0]  | 0x7F | Programmable DAC biquad 9, N0 coefficient byte[31:24]  |
| 0x31 | DAC_BQ9_N0_BYT2[7:0]  | 0xFF | Programmable DAC biquad 9, N0 coefficient byte[23:16]  |
| 0x32 | DAC_BQ9_N0_BYT3[7:0]  | 0xFF | Programmable DAC biquad 9, N0 coefficient byte[15:8]   |
| 0x33 | DAC_BQ9_N0_BYT4[7:0]  | 0xFF | Programmable DAC biquad 9, N0 coefficient byte[7:0]    |
| 0x34 | DAC_BQ9_N1_BYT1[7:0]  | 0x00 | Programmable DAC biquad 9, N1 coefficient byte[31:24]  |
| 0x35 | DAC_BQ9_N1_BYT2[7:0]  | 0x00 | Programmable DAC biquad 9, N1 coefficient byte[23:16]  |
| 0x36 | DAC_BQ9_N1_BYT3[7:0]  | 0x00 | Programmable DAC biquad 9, N1 coefficient byte[15:8]   |
| 0x37 | DAC_BQ9_N1_BYT4[7:0]  | 0x00 | Programmable DAC biquad 9, N1 coefficient byte[7:0]    |
| 0x38 | DAC_BQ9_N2_BYT1[7:0]  | 0x00 | Programmable DAC biquad 9, N2 coefficient byte[31:24]  |
| 0x39 | DAC_BQ9_N2_BYT2[7:0]  | 0x00 | Programmable DAC biquad 9, N2 coefficient byte[23:16]  |
| 0x3A | DAC_BQ9_N2_BYT3[7:0]  | 0x00 | Programmable DAC biquad 9, N2 coefficient byte[15:8]   |
| 0x3B | DAC_BQ9_N2_BYT4[7:0]  | 0x00 | Programmable DAC biquad 9, N2 coefficient byte[7:0]    |
| 0x3C | DAC_BQ9_D1_BYT1[7:0]  | 0x00 | Programmable DAC biquad 9, D1 coefficient byte[31:24]  |
| 0x3D | DAC_BQ9_D1_BYT2[7:0]  | 0x00 | Programmable DAC biquad 9, D1 coefficient byte[23:16]  |
| 0x3E | DAC_BQ9_D1_BYT3[7:0]  | 0x00 | Programmable DAC biquad 9, D1 coefficient byte[15:8]   |
| 0x3F | DAC_BQ9_D1_BYT4[7:0]  | 0x00 | Programmable DAC biquad 9, D1 coefficient byte[7:0]    |
| 0x40 | DAC_BQ9_D2_BYT1[7:0]  | 0x00 | Programmable DAC biquad 9, D2 coefficient byte[31:24]  |
| 0x41 | DAC_BQ9_D2_BYT2[7:0]  | 0x00 | Programmable DAC biquad 9, D2 coefficient byte[23:16]  |
| 0x42 | DAC_BQ9_D2_BYT3[7:0]  | 0x00 | Programmable DAC biquad 9, D2 coefficient byte[15:8]   |
| 0x43 | DAC_BQ9_D2_BYT4[7:0]  | 0x00 | Programmable DAC biquad 9, D2 coefficient byte[7:0]    |
| 0x44 | DAC_BQ10_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 10, N0 coefficient byte[31:24] |
| 0x45 | DAC_BQ10_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 10, N0 coefficient byte[23:16] |
| 0x46 | DAC_BQ10_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 10, N0 coefficient byte[15:8]  |
| 0x47 | DAC_BQ10_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 10, N0 coefficient byte[7:0]   |
| 0x48 | DAC_BQ10_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 10, N1 coefficient byte[31:24] |
| 0x49 | DAC_BQ10_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 10, N1 coefficient byte[23:16] |
| 0x4A | DAC_BQ10_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 10, N1 coefficient byte[15:8]  |
| 0x4B | DAC_BQ10_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 10, N1 coefficient byte[7:0]   |
| 0x4C | DAC_BQ10_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 10, N2 coefficient byte[31:24] |
| 0x4D | DAC_BQ10_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 10, N2 coefficient byte[23:16] |
| 0x4E | DAC_BQ10_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 10, N2 coefficient byte[15:8]  |

**Table 7-208. Page 16 Programmable Coefficient Registers (continued)**

|      |                       |      |                                                        |
|------|-----------------------|------|--------------------------------------------------------|
| 0x4F | DAC_BQ10_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 10, N2 coefficient byte[7:0]   |
| 0x50 | DAC_BQ10_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 10, D1 coefficient byte[31:24] |
| 0x51 | DAC_BQ10_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 10, D1 coefficient byte[23:16] |
| 0x52 | DAC_BQ10_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 10, D1 coefficient byte[15:8]  |
| 0x53 | DAC_BQ10_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 10, D1 coefficient byte[7:0]   |
| 0x54 | DAC_BQ10_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 10, D2 coefficient byte[31:24] |
| 0x55 | DAC_BQ10_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 10, D2 coefficient byte[23:16] |
| 0x56 | DAC_BQ10_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 10, D2 coefficient byte[15:8]  |
| 0x57 | DAC_BQ10_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 10, D2 coefficient byte[7:0]   |
| 0x58 | DAC_BQ11_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 11, N0 coefficient byte[31:24] |
| 0x59 | DAC_BQ11_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 11, N0 coefficient byte[23:16] |
| 0x5A | DAC_BQ11_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 11, N0 coefficient byte[15:8]  |
| 0x5B | DAC_BQ11_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 11, N0 coefficient byte[7:0]   |
| 0x5C | DAC_BQ11_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 11, N1 coefficient byte[31:24] |
| 0x5D | DAC_BQ11_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 11, N1 coefficient byte[23:16] |
| 0x5E | DAC_BQ11_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 11, N1 coefficient byte[15:8]  |
| 0x5F | DAC_BQ11_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 11, N1 coefficient byte[7:0]   |
| 0x60 | DAC_BQ11_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 11, N2 coefficient byte[31:24] |
| 0x61 | DAC_BQ11_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 11, N2 coefficient byte[23:16] |
| 0x62 | DAC_BQ11_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 11, N2 coefficient byte[15:8]  |
| 0x63 | DAC_BQ11_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 11, N2 coefficient byte[7:0]   |
| 0x64 | DAC_BQ11_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 11, D1 coefficient byte[31:24] |
| 0x65 | DAC_BQ11_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 11, D1 coefficient byte[23:16] |
| 0x66 | DAC_BQ11_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 11, D1 coefficient byte[15:8]  |
| 0x67 | DAC_BQ11_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 11, D1 coefficient byte[7:0]   |
| 0x68 | DAC_BQ11_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 11, D2 coefficient byte[31:24] |
| 0x69 | DAC_BQ11_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 11, D2 coefficient byte[23:16] |
| 0x6A | DAC_BQ11_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 11, D2 coefficient byte[15:8]  |
| 0x6B | DAC_BQ11_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 11, D2 coefficient byte[7:0]   |
| 0x6C | DAC_BQ12_N0_BYT1[7:0] | 0x7F | Programmable DAC biquad 12, N0 coefficient byte[31:24] |
| 0x6D | DAC_BQ12_N0_BYT2[7:0] | 0xFF | Programmable DAC biquad 12, N0 coefficient byte[23:16] |
| 0x6E | DAC_BQ12_N0_BYT3[7:0] | 0xFF | Programmable DAC biquad 12, N0 coefficient byte[15:8]  |
| 0x6F | DAC_BQ12_N0_BYT4[7:0] | 0xFF | Programmable DAC biquad 12, N0 coefficient byte[7:0]   |
| 0x70 | DAC_BQ12_N1_BYT1[7:0] | 0x00 | Programmable DAC biquad 12, N1 coefficient byte[31:24] |
| 0x71 | DAC_BQ12_N1_BYT2[7:0] | 0x00 | Programmable DAC biquad 12, N1 coefficient byte[23:16] |
| 0x72 | DAC_BQ12_N1_BYT3[7:0] | 0x00 | Programmable DAC biquad 12, N1 coefficient byte[15:8]  |
| 0x73 | DAC_BQ12_N1_BYT4[7:0] | 0x00 | Programmable DAC biquad 12, N1 coefficient byte[7:0]   |
| 0x74 | DAC_BQ12_N2_BYT1[7:0] | 0x00 | Programmable DAC biquad 12, N2 coefficient byte[31:24] |
| 0x75 | DAC_BQ12_N2_BYT2[7:0] | 0x00 | Programmable DAC biquad 12, N2 coefficient byte[23:16] |
| 0x76 | DAC_BQ12_N2_BYT3[7:0] | 0x00 | Programmable DAC biquad 12, N2 coefficient byte[15:8]  |
| 0x77 | DAC_BQ12_N2_BYT4[7:0] | 0x00 | Programmable DAC biquad 12, N2 coefficient byte[7:0]   |
| 0x78 | DAC_BQ12_D1_BYT1[7:0] | 0x00 | Programmable DAC biquad 12, D1 coefficient byte[31:24] |
| 0x79 | DAC_BQ12_D1_BYT2[7:0] | 0x00 | Programmable DAC biquad 12, D1 coefficient byte[23:16] |
| 0x7A | DAC_BQ12_D1_BYT3[7:0] | 0x00 | Programmable DAC biquad 12, D1 coefficient byte[15:8]  |
| 0x7B | DAC_BQ12_D1_BYT4[7:0] | 0x00 | Programmable DAC biquad 12, D1 coefficient byte[7:0]   |
| 0x7C | DAC_BQ12_D2_BYT1[7:0] | 0x00 | Programmable DAC biquad 12, D2 coefficient byte[31:24] |



**Table 7-208. Page 16 Programmable Coefficient Registers (continued)**

|      |                       |      |                                                        |
|------|-----------------------|------|--------------------------------------------------------|
| 0x7D | DAC_BQ12_D2_BYT2[7:0] | 0x00 | Programmable DAC biquad 12, D2 coefficient byte[23:16] |
| 0x7E | DAC_BQ12_D2_BYT3[7:0] | 0x00 | Programmable DAC biquad 12, D2 coefficient byte[15:8]  |
| 0x7F | DAC_BQ12_D2_BYT4[7:0] | 0x00 | Programmable DAC biquad 12, D2 coefficient byte[7:0]   |

### 7.2.7 Programmable Coefficient Registers: Page 17

This register page shown in [Table 7-209](#) consists of the programmable coefficients for the ASI DIN mixer for DAC channels 1 to 4, DAC Aux mixer, Loopback mixer, Signal-generator mixer and the DAC first-order IIR filter.

**Table 7-209. Page 17 Programmable Coefficient Registers**

| ADDRESS | REGISTER                                | RESET | DESCRIPTION                                            |
|---------|-----------------------------------------|-------|--------------------------------------------------------|
| 0x00    | PAGE[7:0]                               | 0x00  | Device Page Register                                   |
| 0x08    | ASI_DIN_MIX_ASI_CH1_RDAC_MIX_BYT1[7:0]  | 0x00  | ASI DIN MIXER, ASI CH1 to RDAC coefficient byte[15:8]  |
| 0x09    | ASI_DIN_MIX_ASI_CH1_RDAC_MIX_BYT2[7:0]  | 0x00  | ASI DIN MIXER, ASI CH1 to RDAC coefficient byte[7:0]   |
| 0x0A    | ASI_DIN_MIX_ASI_CH1_LDAC_MIX_BYT1[7:0]  | 0x40  | ASI DIN MIXER, ASI CH1 to LDAC coefficient byte[15:8]  |
| 0x0B    | ASI_DIN_MIX_ASI_CH1_LDAC_MIX_BYT2[7:0]  | 0x00  | ASI DIN MIXER, ASI CH1 to LDAC coefficient byte[7:0]   |
| 0x0C    | ASI_DIN_MIX_ASI_CH1_RDAC2_MIX_BYT1[7:0] | 0x00  | ASI DIN MIXER, ASI CH1 to RDAC2 coefficient byte[15:8] |
| 0x0D    | ASI_DIN_MIX_ASI_CH1_RDAC2_MIX_BYT2[7:0] | 0x00  | ASI DIN MIXER, ASI CH1 to RDAC2 coefficient byte[7:0]  |
| 0x0E    | ASI_DIN_MIX_ASI_CH1_LDAC2_MIX_BYT1[7:0] | 0x00  | ASI DIN MIXER, ASI CH1 to LDAC2 coefficient byte[15:8] |
| 0x0F    | ASI_DIN_MIX_ASI_CH1_LDAC2_MIX_BYT2[7:0] | 0x00  | ASI DIN MIXER, ASI CH1 to LDAC2 coefficient byte[7:0]  |
| 0x10    | ASI_DIN_MIX_ASI_CH2_RDAC_MIX_BYT1[7:0]  | 0x40  | ASI DIN MIXER, ASI CH2 to RDAC coefficient byte[15:8]  |
| 0x11    | ASI_DIN_MIX_ASI_CH2_RDAC_MIX_BYT2[7:0]  | 0x00  | ASI DIN MIXER, ASI CH2 to RDAC coefficient byte[7:0]   |
| 0x12    | ASI_DIN_MIX_ASI_CH2_LDAC_MIX_BYT1[7:0]  | 0x00  | ASI DIN MIXER, ASI CH2 to LDAC coefficient byte[15:8]  |
| 0x13    | ASI_DIN_MIX_ASI_CH2_LDAC_MIX_BYT2[7:0]  | 0x00  | ASI DIN MIXER, ASI CH2 to LDAC coefficient byte[7:0]   |
| 0x14    | ASI_DIN_MIX_ASI_CH2_RDAC2_MIX_BYT1[7:0] | 0x00  | ASI DIN MIXER, ASI CH2 to RDAC2 coefficient byte[15:8] |
| 0x15    | ASI_DIN_MIX_ASI_CH2_RDAC2_MIX_BYT2[7:0] | 0x00  | ASI DIN MIXER, ASI CH2 to RDAC2 coefficient byte[7:0]  |
| 0x16    | ASI_DIN_MIX_ASI_CH2_LDAC2_MIX_BYT1[7:0] | 0x00  | ASI DIN MIXER, ASI CH2 to LDAC2 coefficient byte[15:8] |
| 0x17    | ASI_DIN_MIX_ASI_CH2_LDAC2_MIX_BYT2[7:0] | 0x00  | ASI DIN MIXER, ASI CH2 to LDAC2 coefficient byte[7:0]  |
| 0x18    | ASI_DIN_MIX_ASI_CH3_RDAC_MIX_BYT1[7:0]  | 0x00  | ASI DIN MIXER, ASI CH3 to RDAC coefficient byte[15:8]  |
| 0x19    | ASI_DIN_MIX_ASI_CH3_RDAC_MIX_BYT2[7:0]  | 0x00  | ASI DIN MIXER, ASI CH3 to RDAC coefficient byte[7:0]   |
| 0x1A    | ASI_DIN_MIX_ASI_CH3_LDAC_MIX_BYT1[7:0]  | 0x00  | ASI DIN MIXER, ASI CH3 to LDAC coefficient byte[15:8]  |
| 0x1B    | ASI_DIN_MIX_ASI_CH3_LDAC_MIX_BYT2[7:0]  | 0x00  | ASI DIN MIXER, ASI CH3 to LDAC coefficient byte[7:0]   |
| 0x1C    | ASI_DIN_MIX_ASI_CH3_RDAC2_MIX_BYT1[7:0] | 0x00  | ASI DIN MIXER, ASI CH3 to RDAC2 coefficient byte[15:8] |

**Table 7-209. Page 17 Programmable Coefficient Registers (continued)**

|      |                                             |      |                                                        |
|------|---------------------------------------------|------|--------------------------------------------------------|
| 0x1D | ASI_DIN_MIX_ASI_CH3_RDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH3 to RDAC2 coefficient byte[7:0]  |
| 0x1E | ASI_DIN_MIX_ASI_CH3_LDAC<br>2_MIX_BYT1[7:0] | 0x40 | ASI DIN MIXER, ASI CH3 to LDAC2 coefficient byte[15:8] |
| 0x1F | ASI_DIN_MIX_ASI_CH3_LDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH3 to LDAC2 coefficient byte[7:0]  |
| 0x20 | ASI_DIN_MIX_ASI_CH4_RDAC<br>_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI CH4 to RDAC coefficient byte[15:8]  |
| 0x21 | ASI_DIN_MIX_ASI_CH4_RDAC<br>_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI CH4 to RDAC coefficient byte[7:0]   |
| 0x22 | ASI_DIN_MIX_ASI_CH4_LDAC<br>_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI CH4 to LDAC coefficient byte[15:8]  |
| 0x23 | ASI_DIN_MIX_ASI_CH4_LDAC<br>_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI CH4 to LDAC coefficient byte[7:0]   |
| 0x24 | ASI_DIN_MIX_ASI_CH4_RDAC<br>2_MIX_BYT1[7:0] | 0x40 | ASI DIN MIXER, ASI CH4 to RDAC2 coefficient byte[15:8] |
| 0x25 | ASI_DIN_MIX_ASI_CH4_RDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH4 to RDAC2 coefficient byte[7:0]  |
| 0x26 | ASI_DIN_MIX_ASI_CH4_LDAC<br>2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI CH4 to LDAC2 coefficient byte[15:8] |
| 0x27 | ASI_DIN_MIX_ASI_CH4_LDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH4 to LDAC2 coefficient byte[7:0]  |
| 0x28 | ASI_DIN_MIX_ASI_CH5_RDAC<br>_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI CH5 to RDAC coefficient byte[15:8]  |
| 0x29 | ASI_DIN_MIX_ASI_CH5_RDAC<br>_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI CH5 to RDAC coefficient byte[7:0]   |
| 0x2A | ASI_DIN_MIX_ASI_CH5_LDAC<br>_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI CH5 to LDAC coefficient byte[15:8]  |
| 0x2B | ASI_DIN_MIX_ASI_CH5_LDAC<br>_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI CH5 to LDAC coefficient byte[7:0]   |
| 0x2C | ASI_DIN_MIX_ASI_CH5_RDAC<br>2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI CH5 to RDAC2 coefficient byte[15:8] |
| 0x2D | ASI_DIN_MIX_ASI_CH5_RDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH5 to RDAC2 coefficient byte[7:0]  |
| 0x2E | ASI_DIN_MIX_ASI_CH5_LDAC<br>2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI CH5 to LDAC2 coefficient byte[15:8] |
| 0x2F | ASI_DIN_MIX_ASI_CH5_LDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH5 to LDAC2 coefficient byte[7:0]  |
| 0x30 | ASI_DIN_MIX_ASI_CH6_RDAC<br>_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI CH6 to RDAC coefficient byte[15:8]  |
| 0x31 | ASI_DIN_MIX_ASI_CH6_RDAC<br>_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI CH6 to RDAC coefficient byte[7:0]   |
| 0x32 | ASI_DIN_MIX_ASI_CH6_LDAC<br>_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI CH6 to LDAC coefficient byte[15:8]  |
| 0x33 | ASI_DIN_MIX_ASI_CH6_LDAC<br>_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI CH6 to LDAC coefficient byte[7:0]   |
| 0x34 | ASI_DIN_MIX_ASI_CH6_RDAC<br>2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI CH6 to RDAC2 coefficient byte[15:8] |
| 0x35 | ASI_DIN_MIX_ASI_CH6_RDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH6 to RDAC2 coefficient byte[7:0]  |
| 0x36 | ASI_DIN_MIX_ASI_CH6_LDAC<br>2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI CH6 to LDAC2 coefficient byte[15:8] |
| 0x37 | ASI_DIN_MIX_ASI_CH6_LDAC<br>2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI CH6 to LDAC2 coefficient byte[7:0]  |

**Table 7-209. Page 17 Programmable Coefficient Registers (continued)**

|      |                                             |      |                                                            |
|------|---------------------------------------------|------|------------------------------------------------------------|
| 0x38 | ASI_DIN_MIX_ASI_CH7_RDAC_MIX_BYT1[7:0]      | 0x00 | ASI DIN MIXER, ASI CH7 to RDAC coefficient byte[15:8]      |
| 0x39 | ASI_DIN_MIX_ASI_CH7_RDAC_MIX_BYT2[7:0]      | 0x00 | ASI DIN MIXER, ASI CH7 to RDAC coefficient byte[7:0]       |
| 0x3A | ASI_DIN_MIX_ASI_CH7_LDAC_MIX_BYT1[7:0]      | 0x00 | ASI DIN MIXER, ASI CH7 to LDAC coefficient byte[15:8]      |
| 0x3B | ASI_DIN_MIX_ASI_CH7_LDAC_MIX_BYT2[7:0]      | 0x00 | ASI DIN MIXER, ASI CH7 to LDAC coefficient byte[7:0]       |
| 0x3C | ASI_DIN_MIX_ASI_CH7_RDAC2_MIX_BYT1[7:0]     | 0x00 | ASI DIN MIXER, ASI CH7 to RDAC2 coefficient byte[15:8]     |
| 0x3D | ASI_DIN_MIX_ASI_CH7_RDAC2_MIX_BYT2[7:0]     | 0x00 | ASI DIN MIXER, ASI CH7 to RDAC2 coefficient byte[7:0]      |
| 0x3E | ASI_DIN_MIX_ASI_CH7_LDAC2_MIX_BYT1[7:0]     | 0x00 | ASI DIN MIXER, ASI CH7 to LDAC2 coefficient byte[15:8]     |
| 0x3F | ASI_DIN_MIX_ASI_CH7_LDAC2_MIX_BYT2[7:0]     | 0x00 | ASI DIN MIXER, ASI CH7 to LDAC2 coefficient byte[7:0]      |
| 0x40 | ASI_DIN_MIX_ASI_CH8_RDAC_MIX_BYT1[7:0]      | 0x00 | ASI DIN MIXER, ASI CH8 to RDAC coefficient byte[15:8]      |
| 0x41 | ASI_DIN_MIX_ASI_CH8_RDAC_MIX_BYT2[7:0]      | 0x00 | ASI DIN MIXER, ASI CH8 to RDAC coefficient byte[7:0]       |
| 0x42 | ASI_DIN_MIX_ASI_CH8_LDAC_MIX_BYT1[7:0]      | 0x00 | ASI DIN MIXER, ASI CH8 to LDAC coefficient byte[15:8]      |
| 0x43 | ASI_DIN_MIX_ASI_CH8_LDAC_MIX_BYT2[7:0]      | 0x00 | ASI DIN MIXER, ASI CH8 to LDAC coefficient byte[7:0]       |
| 0x44 | ASI_DIN_MIX_ASI_CH8_RDAC2_MIX_BYT1[7:0]     | 0x00 | ASI DIN MIXER, ASI CH8 to RDAC2 coefficient byte[15:8]     |
| 0x45 | ASI_DIN_MIX_ASI_CH8_RDAC2_MIX_BYT2[7:0]     | 0x00 | ASI DIN MIXER, ASI CH8 to RDAC2 coefficient byte[7:0]      |
| 0x46 | ASI_DIN_MIX_ASI_CH8_LDAC2_MIX_BYT1[7:0]     | 0x00 | ASI DIN MIXER, ASI CH8 to LDAC2 coefficient byte[15:8]     |
| 0x47 | ASI_DIN_MIX_ASI_CH8_LDAC2_MIX_BYT2[7:0]     | 0x00 | ASI DIN MIXER, ASI CH8 to LDAC2 coefficient byte[7:0]      |
| 0x48 | ASI_DIN_MIX_ASI_AUX_CH1_RDAC_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI AUX_CH1 to RDAC coefficient byte[15:8]  |
| 0x49 | ASI_DIN_MIX_ASI_AUX_CH1_RDAC_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI AUX_CH1 to RDAC coefficient byte[7:0]   |
| 0x4A | ASI_DIN_MIX_ASI_AUX_CH1_LDAC_MIX_BYT1[7:0]  | 0x40 | ASI DIN MIXER, ASI AUX_CH1 to LDAC coefficient byte[15:8]  |
| 0x4B | ASI_DIN_MIX_ASI_AUX_CH1_LDAC_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI AUX_CH1 to LDAC coefficient byte[7:0]   |
| 0x4C | ASI_DIN_MIX_ASI_AUX_CH1_RDAC2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI AUX_CH1 to RDAC2 coefficient byte[15:8] |
| 0x4D | ASI_DIN_MIX_ASI_AUX_CH1_RDAC2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI AUX_CH1 to RDAC2 coefficient byte[7:0]  |
| 0x4E | ASI_DIN_MIX_ASI_AUX_CH1_LDAC2_MIX_BYT1[7:0] | 0x40 | ASI DIN MIXER, ASI AUX_CH1 to LDAC2 coefficient byte[15:8] |
| 0x4F | ASI_DIN_MIX_ASI_AUX_CH1_LDAC2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI AUX_CH1 to LDAC2 coefficient byte[7:0]  |
| 0x50 | ASI_DIN_MIX_ASI_AUX_CH2_RDAC_MIX_BYT1[7:0]  | 0x40 | ASI DIN MIXER, ASI AUX_CH2 to RDAC coefficient byte[15:8]  |
| 0x51 | ASI_DIN_MIX_ASI_AUX_CH2_RDAC_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI AUX_CH2 to RDAC coefficient byte[7:0]   |
| 0x52 | ASI_DIN_MIX_ASI_AUX_CH2_LDAC_MIX_BYT1[7:0]  | 0x00 | ASI DIN MIXER, ASI AUX_CH2 to LDAC coefficient byte[15:8]  |

**Table 7-209. Page 17 Programmable Coefficient Registers (continued)**

|      |                                             |      |                                                                    |
|------|---------------------------------------------|------|--------------------------------------------------------------------|
| 0x53 | ASI_DIN_MIX_ASI_AUX_CH2_LDAC_MIX_BYT2[7:0]  | 0x00 | ASI DIN MIXER, ASI AUX_CH2 to LDAC coefficient byte[7:0]           |
| 0x54 | ASI_DIN_MIX_ASI_AUX_CH2_RDAC2_MIX_BYT1[7:0] | 0x40 | ASI DIN MIXER, ASI AUX_CH2 to RDAC2 coefficient byte[15:8]         |
| 0x55 | ASI_DIN_MIX_ASI_AUX_CH2_RDAC2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI AUX_CH2 to RDAC2 coefficient byte[7:0]          |
| 0x56 | ASI_DIN_MIX_ASI_AUX_CH2_LDAC2_MIX_BYT1[7:0] | 0x00 | ASI DIN MIXER, ASI AUX_CH2 to LDAC2 coefficient byte[15:8]         |
| 0x57 | ASI_DIN_MIX_ASI_AUX_CH2_LDAC2_MIX_BYT2[7:0] | 0x00 | ASI DIN MIXER, ASI AUX_CH2 to LDAC2 coefficient byte[7:0]          |
| 0x58 | SC_DAC_MIX_ADCLB_CH1_RDAC_MIX_BYT1[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH1 to RDAC coefficient byte[15:8]      |
| 0x59 | SC_DAC_MIX_ADCLB_CH1_RDAC_MIX_BYT2[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH1 to RDAC coefficient byte[7:0]       |
| 0x5A | SC_DAC_MIX_ADCLB_CH1_LDAC_MIX_BYT1[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH1 to LDAC coefficient byte[15:8]      |
| 0x5B | SC_DAC_MIX_ADCLB_CH1_LDAC_MIX_BYT2[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH1 to LDAC coefficient byte[7:0]       |
| 0x5C | SC_DAC_MIX_ADCLB_CH1_RDAC2_MIX_BYT1[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH1 to RDAC2 coefficient byte[15:8]     |
| 0x5D | SC_DAC_MIX_ADCLB_CH1_RDAC2_MIX_BYT2[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH1 to RDAC2 coefficient byte[7:0]      |
| 0x5E | SC_DAC_MIX_ADCLB_CH1_LDAC2_MIX_BYT1[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH1 to LDAC2 coefficient byte[15:8]     |
| 0x5F | SC_DAC_MIX_ADCLB_CH1_LDAC2_MIX_BYT2[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH1 to LDAC2 coefficient byte[7:0]      |
| 0x60 | SC_DAC_MIX_ADCLB_CH2_RDAC_MIX_BYT1[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH2 to RDAC coefficient byte[15:8]      |
| 0x61 | SC_DAC_MIX_ADCLB_CH2_RDAC_MIX_BYT2[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH2 to RDAC coefficient byte[7:0]       |
| 0x62 | SC_DAC_MIX_ADCLB_CH2_LDAC_MIX_BYT1[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH2 to LDAC coefficient byte[15:8]      |
| 0x63 | SC_DAC_MIX_ADCLB_CH2_LDAC_MIX_BYT2[7:0]     | 0x00 | SC DAC MIXER, ADC Loopback CH2 to LDAC coefficient byte[7:0]       |
| 0x64 | SC_DAC_MIX_ADCLB_CH2_RDAC2_MIX_BYT1[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH2 to RDAC2 coefficient byte[15:8]     |
| 0x65 | SC_DAC_MIX_ADCLB_CH2_RDAC2_MIX_BYT2[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH2 to RDAC2 coefficient byte[7:0]      |
| 0x66 | SC_DAC_MIX_ADCLB_CH2_LDAC2_MIX_BYT1[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH2 to LDAC2 coefficient byte[15:8]     |
| 0x67 | SC_DAC_MIX_ADCLB_CH2_LDAC2_MIX_BYT2[7:0]    | 0x00 | SC DAC MIXER, ADC Loopback CH2 to LDAC2 coefficient byte[7:0]      |
| 0x68 | SC_DAC_MIX_SIGGEN_CH1_RDAC_MIX_BYT1[7:0]    | 0x00 | SC DAC MIXER, Signal Generator CH1 to RDAC coefficient byte[15:8]  |
| 0x69 | SC_DAC_MIX_SIGGEN_CH1_RDAC_MIX_BYT2[7:0]    | 0x00 | SC DAC MIXER, Signal Generator CH1 to RDAC coefficient byte[7:0]   |
| 0x6A | SC_DAC_MIX_SIGGEN_CH1_LDAC_MIX_BYT1[7:0]    | 0x00 | SC DAC MIXER, Signal Generator CH1 to LDAC coefficient byte[15:8]  |
| 0x6B | SC_DAC_MIX_SIGGEN_CH1_LDAC_MIX_BYT2[7:0]    | 0x00 | SC DAC MIXER, Signal Generator CH1 to LDAC coefficient byte[7:0]   |
| 0x6C | SC_DAC_MIX_SIGGEN_CH1_RDAC2_MIX_BYT1[7:0]   | 0x00 | SC DAC MIXER, Signal Generator CH1 to RDAC2 coefficient byte[15:8] |
| 0x6D | SC_DAC_MIX_SIGGEN_CH1_RDAC2_MIX_BYT2[7:0]   | 0x00 | SC DAC MIXER, Signal Generator CH1 to RDAC2 coefficient byte[7:0]  |

**Table 7-209. Page 17 Programmable Coefficient Registers (continued)**

|      |                                           |      |                                                                    |
|------|-------------------------------------------|------|--------------------------------------------------------------------|
| 0x6E | SC_DAC_MIX_SIGGEN_CH1_LDAC2_MIX_BYT1[7:0] | 0x00 | SC DAC MIXER, Signal Generator CH1 to LDAC2 coefficient byte[15:8] |
| 0x6F | SC_DAC_MIX_SIGGEN_CH1_LDAC2_MIX_BYT2[7:0] | 0x00 | SC DAC MIXER, Signal Generator CH1 to LDAC2 coefficient byte[7:0]  |
| 0x70 | SC_DAC_MIX_SIGGEN_CH2_RDAC_MIX_BYT1[7:0]  | 0x00 | SC DAC MIXER, Signal Generator CH2 to RDAC coefficient byte[15:8]  |
| 0x71 | SC_DAC_MIX_SIGGEN_CH2_RDAC_MIX_BYT2[7:0]  | 0x00 | SC DAC MIXER, Signal Generator CH2 to RDAC coefficient byte[7:0]   |
| 0x72 | SC_DAC_MIX_SIGGEN_CH2_LDAC_MIX_BYT1[7:0]  | 0x00 | SC DAC MIXER, Signal Generator CH2 to LDAC coefficient byte[15:8]  |
| 0x73 | SC_DAC_MIX_SIGGEN_CH2_LDAC_MIX_BYT2[7:0]  | 0x00 | SC DAC MIXER, Signal Generator CH2 to LDAC coefficient byte[7:0]   |
| 0x74 | SC_DAC_MIX_SIGGEN_CH2_RDAC2_MIX_BYT1[7:0] | 0x00 | SC DAC MIXER, Signal Generator CH2 to RDAC2 coefficient byte[15:8] |
| 0x75 | SC_DAC_MIX_SIGGEN_CH2_RDAC2_MIX_BYT2[7:0] | 0x00 | SC DAC MIXER, Signal Generator CH2 to RDAC2 coefficient byte[7:0]  |
| 0x76 | SC_DAC_MIX_SIGGEN_CH2_LDAC2_MIX_BYT1[7:0] | 0x00 | SC DAC MIXER, Signal Generator CH2 to LDAC2 coefficient byte[15:8] |
| 0x77 | SC_DAC_MIX_SIGGEN_CH2_LDAC2_MIX_BYT2[7:0] | 0x00 | SC DAC MIXER, Signal Generator CH2 to LDAC2 coefficient byte[7:0]  |
| 0x78 | DAC_IIR_N0_BYT1[7:0]                      | 0x7F | Programmable DAC first-order IIR, N0 coefficient byte[31:24]       |
| 0x79 | DAC_IIR_N0_BYT2[7:0]                      | 0xFF | Programmable DAC first-order IIR, N0 coefficient byte[23:16]       |
| 0x7A | DAC_IIR_N0_BYT3[7:0]                      | 0xFF | Programmable DAC first-order IIR, N0 coefficient byte[15:8]        |
| 0x7B | DAC_IIR_N0_BYT4[7:0]                      | 0xFF | Programmable DAC first-order IIR, N0 coefficient byte[7:0]         |
| 0x7C | DAC_IIR_N1_BYT1[7:0]                      | 0x00 | Programmable DAC first-order IIR, N1 coefficient byte[31:24]       |
| 0x7D | DAC_IIR_N1_BYT2[7:0]                      | 0x00 | Programmable DAC first-order IIR, N1 coefficient byte[23:16]       |
| 0x7E | DAC_IIR_N1_BYT3[7:0]                      | 0x00 | Programmable DAC first-order IIR, N1 coefficient byte[15:8]        |
| 0x7F | DAC_IIR_N1_BYT4[7:0]                      | 0x00 | Programmable DAC first-order IIR, N1 coefficient byte[7:0]         |

### 7.2.8 Programmable Coefficient Registers: Page 18

This register page shown in [Table 7-210](#) consists of the programmable coefficients for the DAC first-order IIR filter, DAC digital volume control for channels 1 to 4 and DAC Beep generator.

**Table 7-210. Page 18 Programmable Coefficient Registers**

| ADDRESS | REGISTER              | RESET | DESCRIPTION                                                   |
|---------|-----------------------|-------|---------------------------------------------------------------|
| 0x00    | PAGE[7:0]             | 0x00  | Device Page Register                                          |
| 0x08    | DAC_IIR_D1_BYT1[7:0]  | 0x00  | Programmable DAC first-order IIR, D1 coefficient byte[31:24]  |
| 0x09    | DAC_IIR_D1_BYT2[7:0]  | 0x00  | Programmable DAC first-order IIR, D1 coefficient byte[23:16]  |
| 0x0A    | DAC_IIR_D1_BYT3[7:0]  | 0x00  | Programmable DAC first-order IIR, D1 coefficient byte[15:8]   |
| 0x0B    | DAC_IIR_D1_BYT4[7:0]  | 0x00  | Programmable DAC first-order IIR, D1 coefficient byte[7:0]    |
| 0x0C    | DAC_VOL_CH1_BYT1[7:0] | 0x00  | Digital volume control, DAC channel 1 coefficient byte[31:24] |
| 0x0D    | DAC_VOL_CH1_BYT2[7:0] | 0x80  | Digital volume control, DAC channel 1 coefficient byte[23:16] |
| 0x0E    | DAC_VOL_CH1_BYT3[7:0] | 0x00  | Digital volume control, DAC channel 1 coefficient byte[15:8]  |
| 0x0F    | DAC_VOL_CH1_BYT4[7:0] | 0x00  | Digital volume control, DAC channel 1 coefficient byte[7:0]   |
| 0x10    | DAC_VOL_CH2_BYT1[7:0] | 0x00  | Digital volume control, DAC channel 2 coefficient byte[31:24] |
| 0x11    | DAC_VOL_CH2_BYT2[7:0] | 0x80  | Digital volume control, DAC channel 2 coefficient byte[23:16] |
| 0x12    | DAC_VOL_CH2_BYT3[7:0] | 0x00  | Digital volume control, DAC channel 2 coefficient byte[15:8]  |
| 0x13    | DAC_VOL_CH2_BYT4[7:0] | 0x00  | Digital volume control, DAC channel 2 coefficient byte[7:0]   |
| 0x14    | DAC_VOL_CH3_BYT1[7:0] | 0x00  | Digital volume control, DAC channel 3 coefficient byte[31:24] |
| 0x15    | DAC_VOL_CH3_BYT2[7:0] | 0x80  | Digital volume control, DAC channel 3 coefficient byte[23:16] |

**Table 7-210. Page 18 Programmable Coefficient Registers (continued)**

|      |                                 |      |                                                               |
|------|---------------------------------|------|---------------------------------------------------------------|
| 0x16 | DAC_VOL_CH3_BYT3[7:0]           | 0x00 | Digital volume control, DAC channel 3 coefficient byte[15:8]  |
| 0x17 | DAC_VOL_CH3_BYT4[7:0]           | 0x00 | Digital volume control, DAC channel 3 coefficient byte[7:0]   |
| 0x18 | DAC_VOL_CH4_BYT1[7:0]           | 0x00 | Digital volume control, DAC channel 4 coefficient byte[31:24] |
| 0x19 | DAC_VOL_CH4_BYT2[7:0]           | 0x80 | Digital volume control, DAC channel 4 coefficient byte[23:16] |
| 0x1A | DAC_VOL_CH4_BYT3[7:0]           | 0x00 | Digital volume control, DAC channel 4 coefficient byte[15:8]  |
| 0x1B | DAC_VOL_CH4_BYT4[7:0]           | 0x00 | Digital volume control, DAC channel 4 coefficient byte[7:0]   |
| 0x20 | DAC_BEEP<br>GEN_SINX_BYT1[7:0]  | 0x45 | Programmable DAC BEEP GEN sin(x) coefficient byte[31:24]      |
| 0x21 | DAC_BEEP<br>GEN_SINX_BYT2[7:0]  | 0xF4 | Programmable DAC BEEP GEN sin(x) coefficient byte[23:16]      |
| 0x22 | DAC_BEEP<br>GEN_SINX_BYT3[7:0]  | 0x61 | Programmable DAC BEEP GEN sin(x) coefficient byte[15:8]       |
| 0x23 | DAC_BEEP<br>GEN_SINX_BYT4[7:0]  | 0xD0 | Programmable DAC BEEP GEN sin(x) coefficient byte[7:0]        |
| 0x24 | DAC_BEEP<br>GEN_COSX_BYT1[7:0]  | 0x7F | Programmable DAC BEEP GEN cos(x) coefficient byte[31:24]      |
| 0x25 | DAC_BEEP<br>GEN_COSX_BYT2[7:0]  | 0xFE | Programmable DAC BEEP GEN cos(x) coefficient byte[23:16]      |
| 0x26 | DAC_BEEP<br>GEN_COSX_BYT3[7:0]  | 0xFD | Programmable DAC BEEP GEN cos(x) coefficient byte[15:8]       |
| 0x27 | DAC_BEEP<br>GEN_COSX_BYT4[7:0]  | 0x46 | Programmable DAC BEEP GEN cos(x) coefficient byte[7:0]        |
| 0x28 | DAC_BEEP<br>GEN2_SINX_BYT1[7:0] | 0x5D | Programmable DAC BEEP GEN2 sin(x) coefficient byte[31:24]     |
| 0x29 | DAC_BEEP<br>GEN2_SINX_BYT2[7:0] | 0xA2 | Programmable DAC BEEP GEN2 sin(x) coefficient byte[23:16]     |
| 0x2A | DAC_BEEP<br>GEN2_SINX_BYT3[7:0] | 0x74 | Programmable DAC BEEP GEN2 sin(x) coefficient byte[15:8]      |
| 0x2B | DAC_BEEP<br>GEN2_SINX_BYT4[7:0] | 0xB4 | Programmable DAC BEEP GEN2 sin(x) coefficient byte[7:0]       |
| 0x2C | DAC_BEEP<br>GEN2_COSX_BYT1[7:0] | 0x01 | Programmable DAC BEEP GEN2 cos(x) coefficient byte[31:24]     |
| 0x2D | DAC_BEEP<br>GEN2_COSX_BYT2[7:0] | 0x01 | Programmable DAC BEEP GEN2 cos(x) coefficient byte[23:16]     |
| 0x2E | DAC_BEEP<br>GEN2_COSX_BYT3[7:0] | 0x5B | Programmable DAC BEEP GEN2 cos(x) coefficient byte[15:8]      |
| 0x2F | DAC_BEEP<br>GEN2_COSX_BYT4[7:0] | 0x4B | Programmable DAC BEEP GEN2 cos(x) coefficient byte[7:0]       |

**7.2.9 Programmable Coefficient Registers: Page 19**

This register page shown in [Table 7-211](#) consists of the programmable coefficients for the ADC and DAC MSA for channels 1 to 4.

**Table 7-211. Page 19 Programmable Coefficient Registers**

| ADDRESS | REGISTER              | RESET | DESCRIPTION                         |
|---------|-----------------------|-------|-------------------------------------|
| 0x00    | PAGE[7:0]             | 0x00  | Device Page Register                |
| 0x58    | ADC_CH1_SF1_BYT1[7:0] | 0x04  | ADC CH1 MSA coefficient byte[31:24] |
| 0x59    | ADC_CH1_SF1_BYT2[7:0] | 0x00  | ADC CH1 MSA coefficient byte[23:16] |
| 0x5A    | ADC_CH1_SF1_BYT3[7:0] | 0x00  | ADC CH1 MSA coefficient byte[15:8]  |
| 0x5B    | ADC_CH1_SF1_BYT4[7:0] | 0x00  | ADC CH1 MSA coefficient byte[7:0]   |
| 0x5C    | ADC_CH2_SF1_BYT1[7:0] | 0x04  | ADC CH2 MSA coefficient byte[31:24] |
| 0x5D    | ADC_CH2_SF1_BYT2[7:0] | 0x00  | ADC CH2 MSA coefficient byte[23:16] |



**Table 7-211. Page 19 Programmable Coefficient Registers (continued)**

|      |                       |      |                                     |
|------|-----------------------|------|-------------------------------------|
| 0x5E | ADC_CH2_SF1_BYT3[7:0] | 0x00 | ADC CH2 MSA coefficient byte[15:8]  |
| 0x5F | ADC_CH2_SF1_BYT4[7:0] | 0x00 | ADC CH2 MSA coefficient byte[7:0]   |
| 0x60 | ADC_CH3_SF1_BYT1[7:0] | 0x04 | ADC CH3 MSA coefficient byte[31:24] |
| 0x61 | ADC_CH3_SF1_BYT2[7:0] | 0x00 | ADC CH3 MSA coefficient byte[23:16] |
| 0x62 | ADC_CH3_SF1_BYT3[7:0] | 0x00 | ADC CH3 MSA coefficient byte[15:8]  |
| 0x63 | ADC_CH3_SF1_BYT4[7:0] | 0x00 | ADC CH3 MSA coefficient byte[7:0]   |
| 0x64 | ADC_CH4_SF1_BYT1[7:0] | 0x04 | ADC CH4 MSA coefficient byte[31:24] |
| 0x65 | ADC_CH4_SF1_BYT2[7:0] | 0x00 | ADC CH4 MSA coefficient byte[23:16] |
| 0x66 | ADC_CH4_SF1_BYT3[7:0] | 0x00 | ADC CH4 MSA coefficient byte[15:8]  |
| 0x67 | ADC_CH4_SF1_BYT4[7:0] | 0x00 | ADC CH4 MSA coefficient byte[7:0]   |
| 0x68 | LDAC_SF1_BYT1[7:0]    | 0x04 | LDAC MSA coefficient byte[31:24]    |
| 0x69 | LDAC_SF1_BYT2[7:0]    | 0x00 | LDAC MSA coefficient byte[23:16]    |
| 0x6A | LDAC_SF1_BYT3[7:0]    | 0x00 | LDAC MSA coefficient byte[15:8]     |
| 0x6B | LDAC_SF1_BYT4[7:0]    | 0x00 | LDAC MSA coefficient byte[7:0]      |
| 0x6C | RDAC_SF1_BYT1[7:0]    | 0x04 | RDAC MSA coefficient byte[31:24]    |
| 0x6D | RDAC_SF1_BYT2[7:0]    | 0x00 | RDAC MSA coefficient byte[23:16]    |
| 0x6E | RDAC_SF1_BYT3[7:0]    | 0x00 | RDAC MSA coefficient byte[15:8]     |
| 0x6F | RDAC_SF1_BYT4[7:0]    | 0x00 | RDAC MSA coefficient byte[7:0]      |
| 0x70 | LDAC2_SF1_BYT1[7:0]   | 0x04 | LDAC2 MSA coefficient byte[31:24]   |
| 0x71 | LDAC2_SF1_BYT2[7:0]   | 0x00 | LDAC2 MSA coefficient byte[23:16]   |
| 0x72 | LDAC2_SF1_BYT3[7:0]   | 0x00 | LDAC2 MSA coefficient byte[15:8]    |
| 0x73 | LDAC2_SF1_BYT4[7:0]   | 0x00 | LDAC2 MSA coefficient byte[7:0]     |
| 0x74 | RDAC2_SF1_BYT1[7:0]   | 0x04 | RDAC2 MSA coefficient byte[31:24]   |
| 0x75 | RDAC2_SF1_BYT2[7:0]   | 0x00 | RDAC2 MSA coefficient byte[23:16]   |
| 0x76 | RDAC2_SF1_BYT3[7:0]   | 0x00 | RDAC2 MSA coefficient byte[15:8]    |
| 0x77 | RDAC2_SF1_BYT4[7:0]   | 0x00 | RDAC2 MSA coefficient byte[7:0]     |

### 7.2.10 Programmable Coefficient Registers: Page 25

This register page shown in [Table 7-212](#) consists of the programmable coefficients for the DAC Limiter.

**Table 7-212. Page 25 Programmable Coefficient Registers**

| ADDRESS | REGISTER                        | RESET | DESCRIPTION                                        |
|---------|---------------------------------|-------|----------------------------------------------------|
| 0x00    | PAGE[7:0]                       | 0x00  | Device Page Register                               |
| 0x60    | LIMITER_ATTACK_COEFF_BYT1[7:0]  | 0x78  | Distortion limiter Attack coefficient byte[31:24]  |
| 0x61    | LIMITER_ATTACK_COEFF_BYT2[7:0]  | 0xD6  | Distortion limiter Attack coefficient byte[23:16]  |
| 0x62    | LIMITER_ATTACK_COEFF_BYT3[7:0]  | 0xFC  | Distortion limiter Attack coefficient byte[15:8]   |
| 0x63    | LIMITER_ATTACK_COEFF_BYT4[7:0]  | 0x9F  | Distortion limiter Attack coefficient byte[7:0]    |
| 0x64    | LIMITER_RELEASE_COEFF_BYT1[7:0] | 0x40  | Distortion limiter Release coefficient byte[31:24] |
| 0x65    | LIMITER_RELEASE_COEFF_BYT2[7:0] | 0xBD  | Distortion limiter Release coefficient byte[23:16] |
| 0x66    | LIMITER_RELEASE_COEFF_BYT3[7:0] | 0xB7  | Distortion limiter Release coefficient byte[15:8]  |
| 0x67    | LIMITER_RELEASE_COEFF_BYT4[7:0] | 0xC0  | Distortion limiter Release coefficient byte[7:0]   |

**Table 7-212. Page 25 Programmable Coefficient Registers (continued)**

|      |                                     |      |                                                             |
|------|-------------------------------------|------|-------------------------------------------------------------|
| 0x68 | LIMITER_ENV_DECAY_COEF_F_BYT1[7:0]  | 0x7F | Distortion limiter envelope decay coefficient byte[31:24]   |
| 0x69 | LIMITER_ENV_DECAY_COEF_F_BYT2[7:0]  | 0xFC | Distortion limiter envelope decay coefficient byte[23:16]   |
| 0x6A | LIMITER_ENV_DECAY_COEF_F_BYTT3[7:0] | 0x3A | Distortion limiter envelope decay coefficient byte[15:8]    |
| 0x6B | LIMITER_ENV_DECAY_COEF_F_BYTT4[7:0] | 0x48 | Distortion limiter envelope decay coefficient byte[7:0]     |
| 0x6C | LIMITER_THRESHOLD_MAX_BYT1[7:0]     | 0x01 | Distortion limiter Threshold Max coefficient byte[31:24]    |
| 0x6D | LIMITER_THRESHOLD_MAX_BYT2[7:0]     | 0x69 | Distortion limiter Threshold Max coefficient byte[23:16]    |
| 0x6E | LIMITER_THRESHOLD_MAX_BYTT3[7:0]    | 0x9C | Distortion limiter Threshold Max coefficient byte[15:8]     |
| 0x6F | LIMITER_THRESHOLD_MAX_BYTT4[7:0]    | 0x10 | Distortion limiter Threshold Max coefficient byte[7:0]      |
| 0x70 | LIMITER_THRESHOLD_MIN_BYT1[7:0]     | 0x00 | Distortion limiter Threshold Min coefficient byte[31:24]    |
| 0x71 | LIMITER_THRESHOLD_MIN_BYT2[7:0]     | 0x72 | Distortion limiter Threshold Min coefficient byte[23:16]    |
| 0x72 | LIMITER_THRESHOLD_MIN_BYTT3[7:0]    | 0x59 | Distortion limiter Threshold Min coefficient byte[15:8]     |
| 0x73 | LIMITER_THRESHOLD_MIN_BYTT4[7:0]    | 0xDB | Distortion limiter Threshold Min coefficient byte[7:0]      |
| 0x74 | LIMITER_INFLECTION_POINT_BYT1[7:0]  | 0x00 | Distortion limiter Inflection Point coefficient byte[31:24] |
| 0x75 | LIMITER_INFLECTION_POINT_BYT2[7:0]  | 0x00 | Distortion limiter Inflection Point coefficient byte[23:16] |
| 0x76 | LIMITER_INFLECTION_POINT_BYTT3[7:0] | 0x19 | Distortion limiter Inflection Point coefficient byte[15:8]  |
| 0x77 | LIMITER_INFLECTION_POINT_BYTT4[7:0] | 0x9A | Distortion limiter Inflection Point coefficient byte[7:0]   |
| 0x78 | LIMITER_SLOPE_BYT1[7:0]             | 0x10 | Distortion limiter Slope coefficient byte[31:24]            |
| 0x79 | LIMITER_SLOPE_BYT2[7:0]             | 0x00 | Distortion limiter Slope coefficient byte[23:16]            |
| 0x7A | LIMITER_SLOPE_BYTT3[7:0]            | 0x00 | Distortion limiter Slope coefficient byte[15:8]             |
| 0x7B | LIMITER_SLOPE_BYTT4[7:0]            | 0x00 | Distortion limiter Slope coefficient byte[7:0]              |
| 0x7C | LIMITER_RESET_COUNTER_BYT1[7:0]     | 0x00 | Distortion limiter Hold Count coefficient byte[31:24]       |
| 0x7D | LIMITER_RESET_COUNTER_BYT2[7:0]     | 0x00 | Distortion limiter Hold Count coefficient byte[23:16]       |
| 0x7E | LIMITER_RESET_COUNTER_BYTT3[7:0]    | 0x09 | Distortion limiter Hold Count coefficient byte[15:8]        |
| 0x7F | LIMITER_RESET_COUNTER_BYTT4[7:0]    | 0x60 | Distortion limiter Hold Count coefficient byte[7:0]         |

**7.2.11 Programmable Coefficient Registers: Page 26**

This register page shown in [Table 7-213](#) consists of the programmable coefficients for the DAC brownout protection (BOP), thermal foldback (THF) protection and Limiter.

**Table 7-213. Page 26 Programmable Coefficient Registers**

| ADDRESS | REGISTER                   | RESET | DESCRIPTION                        |
|---------|----------------------------|-------|------------------------------------|
| 0x00    | PAGE[7:0]                  | 0x00  | Device Page Register               |
| 0x14    | BOP_ATTACK_COEFF_BYT1[7:0] | 0x78  | BOP Attack coefficient byte[31:24] |



**Table 7-213. Page 26 Programmable Coefficient Registers (continued)**

|      |                              |      |                                               |
|------|------------------------------|------|-----------------------------------------------|
| 0x15 | BOP_ATTACK_COEFF_BYT2[7:0]   | 0xD6 | BOP Attack coefficient byte[23:16]            |
| 0x16 | BOP_ATTACK_COEFF_BYTT3[7:0]  | 0xFC | BOP Attack coefficient byte[15:8]             |
| 0x17 | BOP_ATTACK_COEFF_BYTT4[7:0]  | 0x9F | BOP Attack coefficient byte[7:0]              |
| 0x18 | BOP_RELEASE_COEFF_BYT1[7:0]  | 0x40 | BOP Release coefficient byte[31:24]           |
| 0x19 | BOP_RELEASE_COEFF_BYT2[7:0]  | 0xBD | BOP Release coefficient byte[23:16]           |
| 0x1A | BOP_RELEASE_COEFF_BYTT3[7:0] | 0xB7 | BOP Release coefficient byte[15:8]            |
| 0x1B | BOP_RELEASE_COEFF_BYTT4[7:0] | 0xC0 | BOP Release coefficient byte[7:0]             |
| 0x1C | BOP_RESET_COUNTER_BYT1[7:0]  | 0x00 | BOP Hold Count coefficient byte[31:24]        |
| 0x1D | BOP_RESET_COUNTER_BYT2[7:0]  | 0x00 | BOP Hold Count coefficient byte[23:16]        |
| 0x1E | BOP_RESET_COUNTER_BYTT3[7:0] | 0x09 | BOP Hold Count coefficient byte[15:8]         |
| 0x1F | BOP_RESET_COUNTER_BYTT4[7:0] | 0x60 | BOP Hold Count coefficient byte[7:0]          |
| 0x20 | BOP_VSUP_TH1_BYT1[7:0]       | 0x00 | BOP Supply Threshold1 coefficient byte[31:24] |
| 0x21 | BOP_VSUP_TH1_BYT2[7:0]       | 0x00 | BOP Supply Threshold1 coefficient byte[23:16] |
| 0x22 | BOP_VSUP_TH1_BYTT3[7:0]      | 0x19 | BOP Supply Threshold1 coefficient byte[15:8]  |
| 0x23 | BOP_VSUP_TH1_BYTT4[7:0]      | 0x9A | BOP Supply Threshold1 coefficient byte[7:0]   |
| 0x24 | BOP_THRESHOLD1_BYT1[7:0]     | 0x2D | BOP Threshold1 Gain coefficient byte[31:24]   |
| 0x25 | BOP_THRESHOLD1_BYT2[7:0]     | 0x4E | BOP Threshold1 Gain coefficient byte[23:16]   |
| 0x26 | BOP_THRESHOLD1_BYTT3[7:0]    | 0xFB | BOP Threshold1 Gain coefficient byte[15:8]    |
| 0x27 | BOP_THRESHOLD1_BYTT4[7:0]    | 0xD6 | BOP Threshold1 Gain coefficient byte[7:0]     |
| 0x28 | BOP_VSUP_TH2_BYT1[7:0]       | 0x00 | BOP Supply Threshold2 coefficient byte[31:24] |
| 0x29 | BOP_VSUP_TH2_BYT2[7:0]       | 0x00 | BOP Supply Threshold2 coefficient byte[23:16] |
| 0x2A | BOP_VSUP_TH2_BYTT3[7:0]      | 0x16 | BOP Supply Threshold2 coefficient byte[15:8]  |
| 0x2B | BOP_VSUP_TH2_BYTT4[7:0]      | 0x66 | BOP Supply Threshold2 coefficient byte[7:0]   |
| 0x2C | BOP_THRESHOLD2_BYT1[7:0]     | 0x14 | BOP Threshold2 Gain coefficient byte[31:24]   |
| 0x2D | BOP_THRESHOLD2_BYT2[7:0]     | 0x3D | BOP Threshold2 Gain coefficient byte[23:16]   |
| 0x2E | BOP_THRESHOLD2_BYTT3[7:0]    | 0x13 | BOP Threshold2 Gain coefficient byte[15:8]    |
| 0x2F | BOP_THRESHOLD2_BYTT4[7:0]    | 0x62 | BOP Threshold2 Gain coefficient byte[7:0]     |
| 0x30 | THF_ATTACK_COEFF_BYT1[7:0]   | 0x78 | THF Attack coefficient byte[31:24]            |
| 0x31 | THF_ATTACK_COEFF_BYT2[7:0]   | 0xD6 | THF Attack coefficient byte[23:16]            |
| 0x32 | THF_ATTACK_COEFF_BYTT3[7:0]  | 0xFC | THF Attack coefficient byte[15:8]             |

**Table 7-213. Page 26 Programmable Coefficient Registers (continued)**

|      |                                      |      |                                                                     |
|------|--------------------------------------|------|---------------------------------------------------------------------|
| 0x33 | THF_ATTACK_COEFF_BYTT4[7:0]          | 0x9F | THF Attack coefficient byte[7:0]                                    |
| 0x34 | THF_RELEASE_COEFF_BYT1[7:0]          | 0x40 | THF Release coefficient byte[31:24]                                 |
| 0x35 | THF_RELEASE_COEFF_BYT2[7:0]          | 0xBD | THF Release coefficient byte[23:16]                                 |
| 0x36 | THF_RELEASE_COEFF_BYTT3[7:0]         | 0xB7 | THF Release coefficient byte[15:8]                                  |
| 0x37 | THF_RELEASE_COEFF_BYTT4[7:0]         | 0xC0 | THF Release coefficient byte[7:0]                                   |
| 0x38 | THF_RESET_COUNTER_BYT1[7:0]          | 0x00 | THF Hold Count coefficient byte[31:24]                              |
| 0x39 | THF_RESET_COUNTER_BYT2[7:0]          | 0x00 | THF Hold Count coefficient byte[23:16]                              |
| 0x3A | THF_RESET_COUNTER_BYTT3[7:0]         | 0x09 | THF Hold Count coefficient byte[15:8]                               |
| 0x3B | THF_RESET_COUNTER_BYTT4[7:0]         | 0x60 | THF Hold Count coefficient byte[7:0]                                |
| 0x3C | THF_TEMP_THRESHOLD_BYT1[7:0]         | 0x00 | THF Temperature Threshold coefficient byte[31:24]                   |
| 0x3D | THF_TEMP_THRESHOLD_BYT2[7:0]         | 0x00 | THF Temperature Threshold coefficient byte[23:16]                   |
| 0x3E | THF_TEMP_THRESHOLD_BYTT3[7:0]        | 0x23 | THF Temperature Threshold coefficient byte[15:8]                    |
| 0x3F | THF_TEMP_THRESHOLD_BYTT4[7:0]        | 0x80 | THF Temperature Threshold coefficient byte[7:0]                     |
| 0x40 | THF_MAX_ATTEN_BYT1[7:0]              | 0x2D | THF Max Attenuation coefficient byte[31:24]                         |
| 0x41 | THF_MAX_ATTEN_BYT2[7:0]              | 0x6A | THF Max Attenuation coefficient byte[23:16]                         |
| 0x42 | THF_MAX_ATTEN_BYTT3[7:0]             | 0x86 | THF Max Attenuation coefficient byte[15:8]                          |
| 0x43 | THF_MAX_ATTEN_BYTT4[7:0]             | 0x6F | THF Max Attenuation coefficient byte[7:0]                           |
| 0x44 | THF_SLOPE_BYT1[7:0]                  | 0xFE | THF Slope coefficient byte[31:24]                                   |
| 0x45 | THF_SLOPE_BYT2[7:0]                  | 0x66 | THF Slope coefficient byte[23:16]                                   |
| 0x46 | THF_SLOPE_BYTT3[7:0]                 | 0x66 | THF Slope coefficient byte[15:8]                                    |
| 0x47 | THF_SLOPE_BYTT4[7:0]                 | 0x66 | THF Slope coefficient byte[7:0]                                     |
| 0x48 | LIMITER_ATTACK_HYS_LEVEL_BYT1[7:0]   | 0x08 | Distortion Limiter Attack Level Hysteresis coefficient byte[31:24]  |
| 0x49 | LIMITER_ATTACK_HYS_LEVEL_BYT2[7:0]   | 0xF9 | Distortion Limiter Attack Level Hysteresis coefficient byte[23:16]  |
| 0x4A | LIMITER_ATTACK_HYS_LEVEL_BYTT3[7:0]  | 0xE4 | Distortion Limiter Attack Level Hysteresis coefficient byte[15:8]   |
| 0x4B | LIMITER_ATTACK_HYS_LEVEL_BYTT4[7:0]  | 0xD0 | Distortion Limiter Attack Level Hysteresis coefficient byte[7:0]    |
| 0x4C | LIMITER_RELEASE_HYS_LEVEL_BYT1[7:0]  | 0x07 | Distortion Limiter Release Level Hysteresis coefficient byte[31:24] |
| 0x4D | LIMITER_RELEASE_HYS_LEVEL_BYT2[7:0]  | 0x21 | Distortion Limiter Release Level Hysteresis coefficient byte[23:16] |
| 0x4E | LIMITER_RELEASE_HYS_LEVEL_BYTT3[7:0] | 0x48 | Distortion Limiter Release Level Hysteresis coefficient byte[15:8]  |
| 0x4F | LIMITER_RELEASE_HYS_LEVEL_BYTT4[7:0] | 0x2C | Distortion Limiter Release Level Hysteresis coefficient byte[7:0]   |
| 0x50 | BOP_LEVEL_HYS_SUP_BYT1[7:0]          | 0x00 | BOP Level Hysteresis coefficient byte[31:24]                        |

**Table 7-213. Page 26 Programmable Coefficient Registers (continued)**

|      |                               |      |                                              |
|------|-------------------------------|------|----------------------------------------------|
| 0x51 | BOP_LEVEL_HYS_SUP_BYT2[7:0]   | 0x00 | BOP Level Hysteresis coefficient byte[23:16] |
| 0x52 | BOP_LEVEL_HYS_SUP_BYTT3[7:0]  | 0x00 | BOP Level Hysteresis coefficient byte[15:8]  |
| 0x53 | BOP_LEVEL_HYS_SUP_BYTT4[7:0]  | 0x14 | BOP Level Hysteresis coefficient byte[7:0]   |
| 0x54 | BOP_LEVEL_HYS_GAIN_BYT1[7:0]  | 0x03 | BOP gain Hysteresis coefficient byte[31:24]  |
| 0x55 | BOP_LEVEL_HYS_GAIN_BYT2[7:0]  | 0xD7 | BOP gain Hysteresis coefficient byte[23:16]  |
| 0x56 | BOP_LEVEL_HYS_GAIN_BYTT3[7:0] | 0x0A | BOP gain Hysteresis coefficient byte[15:8]   |
| 0x57 | BOP_LEVEL_HYS_GAIN_BYTT4[7:0] | 0x3E | BOP gain Hysteresis coefficient byte[7:0]    |
| 0x58 | THF_GAIN_HYS_BYT1[7:0]        | 0x03 | THF gain Hysteresis coefficient byte[31:24]  |
| 0x59 | THF_GAIN_HYS_BYT2[7:0]        | 0xD7 | THF gain Hysteresis coefficient byte[23:16]  |
| 0x5A | THF_GAIN_HYS_BYTT3[7:0]       | 0x0A | THF gain Hysteresis coefficient byte[15:8]   |
| 0x5B | THF_GAIN_HYS_BYTT4[7:0]       | 0x3D | THF gain Hysteresis coefficient byte[7:0]    |

### 7.2.12 Programmable Coefficient Registers: Page 27

This register page shown in [Table 7-214](#) consists of the programmable coefficients for the ADC AGC.

**Table 7-214. Page 27 Programmable Coefficient Registers**

| ADDRESS | REGISTER                       | RESET | DESCRIPTION                                        |
|---------|--------------------------------|-------|----------------------------------------------------|
| 0x00    | PAGE[7:0]                      | 0x00  | Device Page Register                               |
| 0x5C    | AGC_NOISE_FLOOR_BYT1[7:0]      | 0xFF  | AGC Noise Floor coefficient byte[31:24]            |
| 0x5D    | AGC_NOISE_FLOOR_BYT2[7:0]      | 0xFE  | AGC Noise Floor coefficient byte[23:16]            |
| 0x5E    | AGC_NOISE_FLOOR_BYTT3[7:0]     | 0xB0  | AGC Noise Floor coefficient byte[15:8]             |
| 0x5F    | AGC_NOISE_FLOOR_BYTT4[7:0]     | 0x00  | AGC Noise Floor coefficient byte[7:0]              |
| 0x60    | AGC_TARGET_LEVEL_BYT1[7:0]     | 0xFF  | AGC Target Level coefficient byte[31:24]           |
| 0x61    | AGC_TARGET_LEVEL_BYT2[7:0]     | 0xFF  | AGC Target Level coefficient byte[23:16]           |
| 0x62    | AGC_TARGET_LEVEL_BYTT3[7:0]    | 0x78  | AGC Target Level coefficient byte[15:8]            |
| 0x63    | AGC_TARGET_LEVEL_BYTT4[7:0]    | 0x00  | AGC Target Level coefficient byte[7:0]             |
| 0x64    | AGC_NOISE_COUNT_MAX_BYT1[7:0]  | 0x00  | AGC Noise Floor Hold Count coefficient byte[31:24] |
| 0x65    | AGC_NOISE_COUNT_MAX_BYT2[7:0]  | 0x00  | AGC Noise Floor Hold Count coefficient byte[23:16] |
| 0x66    | AGC_NOISE_COUNT_MAX_BYTT3[7:0] | 0x04  | AGC Noise Floor Hold Count coefficient byte[15:8]  |
| 0x67    | AGC_NOISE_COUNT_MAX_BYTT4[7:0] | 0xB0  | AGC Noise Floor Hold Count coefficient byte[7:0]   |
| 0x68    | AGC_MAX_GAIN_BYT1[7:0]         | 0x00  | AGC Maximum Gain coefficient byte[31:24]           |
| 0x69    | AGC_MAX_GAIN_BYT2[7:0]         | 0x00  | AGC Maximum Gain coefficient byte[23:16]           |
| 0x6A    | AGC_MAX_GAIN_BYTT3[7:0]        | 0x60  | AGC Maximum Gain coefficient byte[15:8]            |
| 0x6B    | AGC_MAX_GAIN_BYTT4[7:0]        | 0x00  | AGC Maximum Gain coefficient byte[7:0]             |

**Table 7-214. Page 27 Programmable Coefficient Registers (continued)**

|      |                                   |      |                                                   |
|------|-----------------------------------|------|---------------------------------------------------|
| 0x6C | AGC_MIN_GAIN_BYT1[7:0]            | 0xFF | AGC Minimum Gain coefficient byte[31:24]          |
| 0x6D | AGC_MIN_GAIN_BYT2[7:0]            | 0xFF | AGC Minimum Gain coefficient byte[23:16]          |
| 0x6E | AGC_MIN_GAIN_BYTT3[7:0]           | 0x88 | AGC Minimum Gain coefficient byte[15:8]           |
| 0x6F | AGC_MIN_GAIN_BYTT4[7:0]           | 0x00 | AGC Minimum Gain coefficient byte[7:0]            |
| 0x70 | AGC_NOISE_HYS_BYT1[7:0]           | 0x00 | AGC Noise Gate Hysteresis coefficient byte[31:24] |
| 0x71 | AGC_NOISE_HYS_BYT2[7:0]           | 0x00 | AGC Noise Gate Hysteresis coefficient byte[23:16] |
| 0x72 | AGC_NOISE_HYS_BYTT3[7:0]          | 0x18 | AGC Noise Gate Hysteresis coefficient byte[15:8]  |
| 0x73 | AGC_NOISE_HYS_BYTT4[7:0]          | 0x00 | AGC Noise Gate Hysteresis coefficient byte[7:0]   |
| 0x74 | AGC_ATTACK_HOLD_COUNT_BYT1[7:0]   | 0x00 | AGC Attack Hold Count coefficient byte[31:24]     |
| 0x75 | AGC_ATTACK_HOLD_COUNT_BYT2[7:0]   | 0x00 | AGC Attack Hold Count coefficient byte[23:16]     |
| 0x76 | AGC_ATTACK_HOLD_COUNT_BYTT3[7:0]  | 0x00 | AGC Attack Hold Count coefficient byte[15:8]      |
| 0x77 | AGC_ATTACK_HOLD_COUNT_BYTT4[7:0]  | 0x01 | AGC Attack Hold Count coefficient byte[7:0]       |
| 0x78 | AGC_RELEASE_HOLD_COUNT_BYT1[7:0]  | 0x00 | AGC Release Hold Count coefficient byte[31:24]    |
| 0x79 | AGC_RELEASE_HOLD_COUNT_BYT2[7:0]  | 0x00 | AGC Release Hold Count coefficient byte[23:16]    |
| 0x7A | AGC_RELEASE_HOLD_COUNT_BYTT3[7:0] | 0x04 | AGC Release Hold Count coefficient byte[15:8]     |
| 0x7B | AGC_RELEASE_HOLD_COUNT_BYTT4[7:0] | 0xB0 | AGC Release Hold Count coefficient byte[7:0]      |
| 0x7C | AGC_RELEASE_HYST_BYT1[7:0]        | 0x00 | AGC Release Hysteresis coefficient byte[31:24]    |
| 0x7D | AGC_RELEASE_HYST_BYT2[7:0]        | 0x00 | AGC Release Hysteresis coefficient byte[23:16]    |
| 0x7E | AGC_RELEASE_HYST_BYTT3[7:0]       | 0x08 | AGC Release Hysteresis coefficient byte[15:8]     |
| 0x7F | AGC_RELEASE_HYST_BYTT4[7:0]       | 0x00 | AGC Release Hysteresis coefficient byte[7:0]      |

**7.2.13 Programmable Coefficient Registers: Page 28**

This register page shown in [Table 7-215](#) consists of the programmable coefficients for the ADC AGC and DAC DRC.

**Table 7-215. Page 28 Programmable Coefficient Registers**

| ADDRESS | REGISTER                   | RESET | DESCRIPTION                              |
|---------|----------------------------|-------|------------------------------------------|
| 0x00    | PAGE[7:0]                  | 0x00  | Device Page Register                     |
| 0x08    | AGC_ATTACK_RATE_BYT1[7:0]  | 0x50  | AGC Attack Rate coefficient byte[31:24]  |
| 0x09    | AGC_ATTACK_RATE_BYT2[7:0]  | 0xFC  | AGC Attack Rate coefficient byte[23:16]  |
| 0x0A    | AGC_ATTACK_RATE_BYTT3[7:0] | 0x64  | AGC Attack Rate coefficient byte[15:8]   |
| 0x0B    | AGC_ATTACK_RATE_BYTT4[7:0] | 0x5C  | AGC Attack Rate coefficient byte[7:0]    |
| 0x0C    | AGC_RELEASE_RATE_BYT1[7:0] | 0x7F  | AGC Release Rate coefficient byte[31:24] |
| 0x0D    | AGC_RELEASE_RATE_BYT2[7:0] | 0xC4  | AGC Release Rate coefficient byte[23:16] |

**Table 7-215. Page 28 Programmable Coefficient Registers (continued)**

|      |                                   |      |                                                   |
|------|-----------------------------------|------|---------------------------------------------------|
| 0x0E | AGC_RELEASE_RATE_BYTT3[7:0]       | 0x0E | AGC Release Rate coefficient byte[15:8]           |
| 0x0F | AGC_RELEASE_RATE_BYTT4[7:0]       | 0x57 | AGC Release Rate coefficient byte[7:0]            |
| 0x1C | DRC_MAX_GAIN_BYT1[7:0]            | 0x00 | DRC Maximum Gain (dB) coefficient byte[31:24]     |
| 0x1D | DRC_MAX_GAIN_BYT2[7:0]            | 0x00 | DRC Maximum Gain (dB) coefficient byte[23:16]     |
| 0x1E | DRC_MAX_GAIN_BYTT3[7:0]           | 0x60 | DRC Maximum Gain (dB) coefficient byte[15:8]      |
| 0x1F | DRC_MAX_GAIN_BYTT4[7:0]           | 0x00 | DRC Maximum Gain (dB) coefficient byte[7:0]       |
| 0x20 | DRC_MIN_GAIN_BYT1[7:0]            | 0xFF | DRC Minimum Gain (dB) coefficient byte[31:24]     |
| 0x21 | DRC_MIN_GAIN_BYT2[7:0]            | 0xFF | DRC Minimum Gain (dB) coefficient byte[23:16]     |
| 0x22 | DRC_MIN_GAIN_BYTT3[7:0]           | 0x82 | DRC Minimum Gain (dB) coefficient byte[15:8]      |
| 0x23 | DRC_MIN_GAIN_BYTT4[7:0]           | 0x00 | DRC Minimum Gain (dB) coefficient byte[7:0]       |
| 0x24 | DRC_ATTACK_TC_BYT1[7:0]           | 0x67 | DRC Attack Time Constant coefficient byte[31:24]  |
| 0x25 | DRC_ATTACK_TC_BYT2[7:0]           | 0xED | DRC Attack Time Constant coefficient byte[23:16]  |
| 0x26 | DRC_ATTACK_TC_BYTT3[7:0]          | 0x87 | DRC Attack Time Constant coefficient byte[15:8]   |
| 0x27 | DRC_ATTACK_TC_BYTT4[7:0]          | 0xBB | DRC Attack Time Constant coefficient byte[7:0]    |
| 0x28 | DRC_RELEASE_TC_BYT1[7:0]          | 0x7E | DRC Release Time Constant coefficient byte[31:24] |
| 0x29 | DRC_RELEASE_TC_BYT2[7:0]          | 0xAC | DRC Release Time Constant coefficient byte[23:16] |
| 0x2A | DRC_RELEASE_TC_BYTT3[7:0]         | 0x70 | DRC Release Time Constant coefficient byte[15:8]  |
| 0x2B | DRC_RELEASE_TC_BYTT4[7:0]         | 0x34 | DRC Release Time Constant coefficient byte[7:0]   |
| 0x2C | DRC_RELEASE_HOLD_COUNT_BYT1[7:0]  | 0x00 | DRC Release Hold Count coefficient byte[31:24]    |
| 0x2D | DRC_RELEASE_HOLD_COUNT_BYT2[7:0]  | 0x00 | DRC Release Hold Count coefficient byte[23:16]    |
| 0x2E | DRC_RELEASE_HOLD_COUNT_BYTT3[7:0] | 0x04 | DRC Release Hold Count coefficient byte[15:8]     |
| 0x2F | DRC_RELEASE_HOLD_COUNT_BYTT4[7:0] | 0xB0 | DRC Release Hold Count coefficient byte[7:0]      |
| 0x30 | DRC_RELEASE_HYST_BYT1[7:0]        | 0x00 | DRC Release Hysteresis coefficient byte[31:24]    |
| 0x31 | DRC_RELEASE_HYST_BYT2[7:0]        | 0x00 | DRC Release Hysteresis coefficient byte[23:16]    |
| 0x32 | DRC_RELEASE_HYST_BYTT3[7:0]       | 0x0C | DRC Release Hysteresis coefficient byte[15:8]     |
| 0x33 | DRC_RELEASE_HYST_BYTT4[7:0]       | 0x00 | DRC Release Hysteresis coefficient byte[7:0]      |
| 0x34 | DRC_INV_RATIO_BYT1[7:0]           | 0xF8 | DRC Ratio coefficient byte[31:24]                 |
| 0x35 | DRC_INV_RATIO_BYT2[7:0]           | 0x00 | DRC Ratio coefficient byte[23:16]                 |
| 0x36 | DRC_INV_RATIO_BYTT3[7:0]          | 0x00 | DRC Ratio coefficient byte[15:8]                  |
| 0x37 | DRC_INV_RATIO_BYTT4[7:0]          | 0x00 | DRC Ratio coefficient byte[7:0]                   |
| 0x38 | DRC_INFLECTION_PT_BYT1[7:0]       | 0xFF | DRC Inflection Point(dB) coefficient byte[31:24]  |
| 0x39 | DRC_INFLECTION_PT_BYT2[7:0]       | 0xFF | DRC Inflection Point(dB) coefficient byte[23:16]  |
| 0x3A | DRC_INFLECTION_PT_BYTT3[7:0]      | 0xA0 | DRC Inflection Point(dB) coefficient byte[15:8]   |
| 0x3B | DRC_INFLECTION_PT_BYTT4[7:0]      | 0x00 | DRC Inflection Point(dB) coefficient byte[7:0]    |
| 0x40 | DAC_ADSR_NOTE_BYT1[7:0]           | 0x00 | ADSR Enable/Disable coefficient byte[31:24]       |

**Table 7-215. Page 28 Programmable Coefficient Registers (continued)**

|      |                                  |      |                                             |
|------|----------------------------------|------|---------------------------------------------|
| 0x41 | DAC_ADSR_NOTE_BYT2[7:0]          | 0x00 | ADSR Enable/Disable coefficient byte[23:16] |
| 0x42 | DAC_ADSR_NOTE_BYT3[7:0]          | 0x00 | ADSR Enable/Disable coefficient byte[15:8]  |
| 0x43 | DAC_ADSR_NOTE_BYT4[7:0]          | 0x00 | ADSR Enable/Disable coefficient byte[7:0]   |
| 0x50 | DAC_ADSR_RESTART_TIMER_BYT1[7:0] | 0x00 | ADSR Restart Count coefficient byte[31:24]  |
| 0x51 | DAC_ADSR_RESTART_TIMER_BYT2[7:0] | 0x00 | ADSR Restart Count coefficient byte[23:16]  |
| 0x52 | DAC_ADSR_RESTART_TIMER_BYT3[7:0] | 0x25 | ADSR Restart Count coefficient byte[15:8]   |
| 0x53 | DAC_ADSR_RESTART_TIMER_BYT4[7:0] | 0x80 | ADSR Restart Count coefficient byte[7:0]    |
| 0x54 | DAC_ADSR_SUSTAIN_TIMER_BYT1[7:0] | 0x00 | ADSR Sustain Count coefficient byte[31:24]  |
| 0x55 | DAC_ADSR_SUSTAIN_TIMER_BYT2[7:0] | 0x00 | ADSR Sustain Count coefficient byte[23:16]  |
| 0x56 | DAC_ADSR_SUSTAIN_TIMER_BYT3[7:0] | 0x03 | ADSR Sustain Count coefficient byte[15:8]   |
| 0x57 | DAC_ADSR_SUSTAIN_TIMER_BYT4[7:0] | 0xC0 | ADSR Sustain Count coefficient byte[7:0]    |
| 0x58 | DAC_ADSR_DELATTACK_BYT1[7:0]     | 0x00 | ADSR Attack Slope coefficient byte[31:24]   |
| 0x59 | DAC_ADSR_DELATTACK_BYT2[7:0]     | 0x44 | ADSR Attack Slope coefficient byte[23:16]   |
| 0x5A | DAC_ADSR_DELATTACK_BYT3[7:0]     | 0x52 | ADSR Attack Slope coefficient byte[15:8]    |
| 0x5B | DAC_ADSR_DELATTACK_BYT4[7:0]     | 0x3F | ADSR Attack Slope coefficient byte[7:0]     |
| 0x5C | DAC_ADSR_DELRELEASE_BYT1[7:0]    | 0xFF | ADSR Release Slope coefficient byte[31:24]  |
| 0x5D | DAC_ADSR_DELRELEASE_BYT2[7:0]    | 0xBB | ADSR Release Slope coefficient byte[23:16]  |
| 0x5E | DAC_ADSR_DELRELEASE_BYT3[7:0]    | 0xAD | ADSR Release Slope coefficient byte[15:8]   |
| 0x5F | DAC_ADSR_DELRELEASE_BYT4[7:0]    | 0xC1 | ADSR Release Slope coefficient byte[7:0]    |
| 0x60 | DAC_ADSR_DELDECAY_BYT1[7:0]      | 0x00 | ADSR Decay Slope coefficient byte[31:24]    |
| 0x61 | DAC_ADSR_DELDECAY_BYT2[7:0]      | 0x00 | ADSR Decay Slope coefficient byte[23:16]    |
| 0x62 | DAC_ADSR_DELDECAY_BYT3[7:0]      | 0x00 | ADSR Decay Slope coefficient byte[15:8]     |
| 0x63 | DAC_ADSR_DELDECAY_BYT4[7:0]      | 0x00 | ADSR Decay Slope coefficient byte[7:0]      |
| 0x64 | DAC_ADSR_SUSLVL_BYT1[7:0]        | 0x40 | ADSR Sustain Level coefficient byte[31:24]  |
| 0x65 | DAC_ADSR_SUSLVL_BYT2[7:0]        | 0x00 | ADSR Sustain Level coefficient byte[23:16]  |
| 0x66 | DAC_ADSR_SUSLVL_BYT3[7:0]        | 0x00 | ADSR Sustain Level coefficient byte[15:8]   |
| 0x67 | DAC_ADSR_SUSLVL_BYT4[7:0]        | 0x00 | ADSR Sustain Level coefficient byte[7:0]    |

## 8 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information


The TAD5112-Q1 is a stereo, low-power audio DAC that supports sample rates of up to 768kHz. The device supports up to 4 channel simultaneous playback which can be configured as a 2 channel differential or psuedo-differential output or up to 4 channel single-ended output with options for headphone and line-out drive capabilities. The device also supports up to 4 channel recording using digital pulse density (PDM) microphones using the multi-function general purpose input/output pins.

Communication to the TAD5112-Q1 for configuration of the control registers is supported using I<sup>2</sup>C or SPI. The device supports a highly flexible, audio serial interface (TDM, I<sup>2</sup>S, and LJ) to transmit audio data seamlessly in the system across devices.

### 8.2 Typical Application

#### 8.2.1 Application

Figure 8-1 shows a typical configuration of the TAD5112-Q1 for an application using two channel line-out operation with an I<sup>2</sup>C control interface and a time-division multiplexing (TDM) audio data target interface.

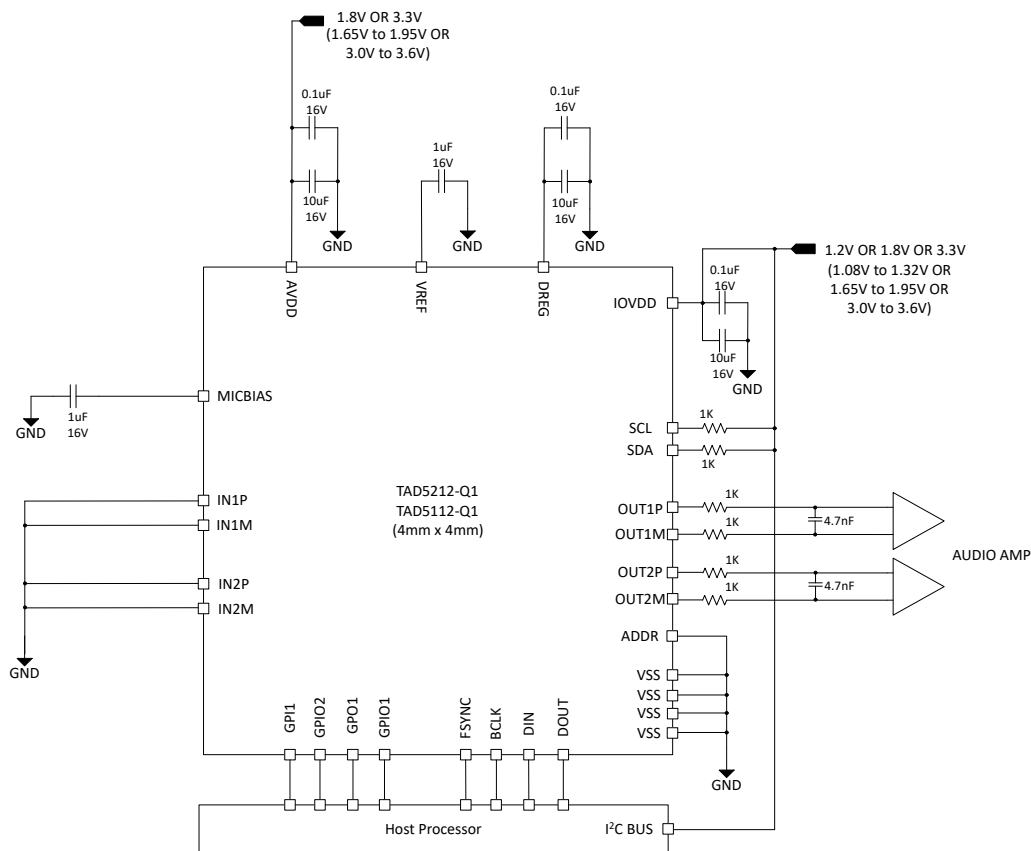

**Figure 8-1. Stereo Lineout Block Diagram**



### 8.2.2 Design Requirements

Table 8-1 lists the design parameters for this application.

**Table 8-1. Design Parameters**

| PARAMETER                          | VALUE                                                                     |
|------------------------------------|---------------------------------------------------------------------------|
| AVDD                               | 1.8V or 3.3V                                                              |
| IOVDD                              | 1.2V or 1.8V or 3.3V                                                      |
| AVDD supply current consumption    | 17mA, with AVDD = 3.3V (MICBIAS off, PLL on, stereo playback, fs = 48kHz) |
| IOVDD supply current consumption   | 0.04mA, with IOVDD = 3.3V                                                 |
| Maximum MICBIAS current            | 5mA                                                                       |
| Load on OUT1M, OUT1P, OUT2M, OUT2P | >600Ω                                                                     |

### 8.2.3 Detailed Design Procedure

This section describes the necessary steps to configure the TAD5112-Q1 for this specific application. The following steps provide a sequence of items that must be executed in the time between powering the device up and reading data from the device or transitioning from one mode to another mode of operation.

1. Apply power to the device:
  - a. Power up the IOVDD and AVDD power supplies
  - b. Wait for at least 2ms to allow the device to initialize the internal registers
  - c. The device now goes into sleep mode (low-power mode < 10μA)
2. Transition from sleep mode to active mode whenever required for the operation:
  - a. Wake up the device by writing to P0\_R2 to disable sleep mode
  - b. Wait for at least 2ms to allow the device to complete the internal wake-up sequence
  - c. Override the default configuration registers or programmable coefficients value as required (this step is optional)
  - d. Enable all desired audio serial interface input/output channels by writing to P0\_R40 to P0\_R47 for DAC
  - e. Power-up the DAC by writing to P0\_R120
  - f. Apply FSYNC and BCLK with the desired output sample rates and the BCLK to FSYNC ratio

This specific step can be done at any point in the sequence after step a.

See the [Section 6.3.2](#) section for supported sample rates and the BCLK to FSYNC ratio.


- g. The device playback data is now received from the host processor using the TDM audio serial data bus and playback data from TDM is now played on the line-out
3. Transition from active mode to sleep mode (again) as required in the system for low-power operation:
    - a. Enter sleep mode by writing to P0\_R2 to enable sleep mode
    - b. Wait at least 10ms (when FSYNC = 48kHz) for the volume to ramp down and for all blocks to power down
    - c. Read P0\_R122 to check the device shutdown and sleep mode status
    - d. If the device P0\_R122\_D[7:5] status bit is 3'b100 then stop FSYNC and BCLK in the system
    - e. The device now goes into sleep mode (low-power mode < 10μA) and retains all register values
  4. Transition from sleep mode to active mode (again) as required for the recording operation:
    - a. Wake up the device by writing to P0\_R2 to disable sleep mode
    - b. Wait at least 2ms to allow the device to complete the internal wake-up sequence
    - c. Apply FSYNC and BCLK with the desired output sample rates and the BCLK to FSYNC ratio
    - d. The device playback data is now received from the host processor using the TDM audio serial data bus and playback data from TDM is now played on the line-out
  5. Repeat the steps as required for different configurations and modes of operation

### 8.2.4 Application Performance Plots


At  $T_A = 25^\circ\text{C}$ , AVDD = 3.3V, IOVDD = 3.3V,  $f_{IN} = 1\text{kHz}$  sinusoidal signal,  $f_S = 48\text{kHz}$ , 32-bit audio data, BCLK =  $256 \times f_S$ , TDM target mode, PLL on, channel gain = 0dB, linear phase interpolation filters, 1200Ω line-out load



in differential configuration, and other default configurations; measured filter free with an audio precision with a 20Hz to 20kHz un-weighted bandwidth, unless otherwise noted

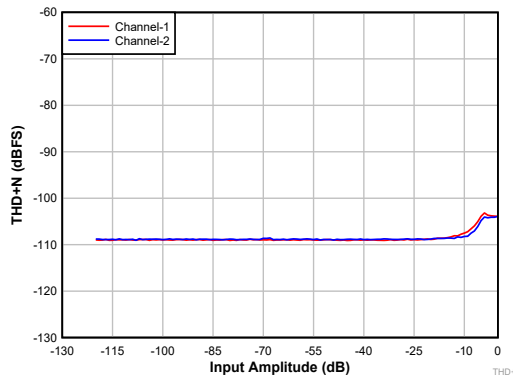

**Figure 8-2. DAC THD+N Level vs Input**

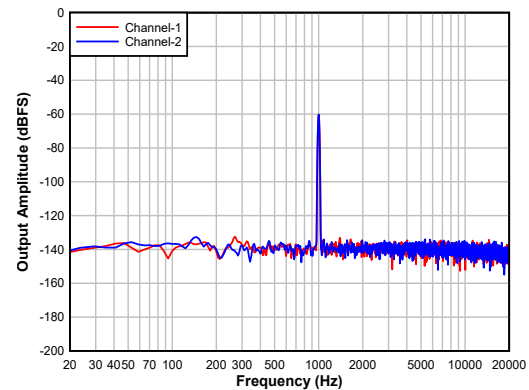

**Figure 8-3. DAC FFT with -60dBFS Input**

### 8.2.5 Example Device Register Configuration Script for EVM Setup

This section provides a typical EVM I<sup>2</sup>C register control script for various applications

#### Stereo differential line output playback

```
# Key: w a0 XX YY ==> write to I2C address 0xa0, to register 0xxx, data 0xYY
# # ==> comment delimiter
#
# The following list gives an example sequence of items that must be executed in the time
# between powering the device up and reading data from the device. Note that there are
# other valid sequences depending on which features are used.
#
# Differential 2-channel Line Out DAC: OUT1P/OUT1M - Ch1, OUT2P/OUT2M - Ch2
# FSYNC = 48 kHz (Output Data Sample Rate), BCLK = 12.288 MHz (BCLK/FSYNC = 256)
# AVDD = 3.3 V; IOVDD = 3.3 V
#####
#
#
# Page 0 Register Writes
w a0 00 00
w a0 01 01 #SW Reset
d 01
# Page 0 Register Writes
w a0 00 00
w a0 02 09 #Exit Sleep Mode with DREG and VREF Enabled
w a0 1a 30 #TDM protocol with 32-bit word length
w a0 64 20 #DAC Channel 1 configured for differential output with 0.6*Vref as common mode
w a0 65 20 #DAC OUT1P configured for line out driver and audio bandwidth
w a0 66 20 #DAC OUT1M configured for line out driver and audio bandwidth
w a0 6b 20 #DAC Channel 2 configured for differential output with 0.6*Vref as common mode
w a0 6c 20 #DAC OUT2P configured for line out driver and audio bandwidth
w a0 6d 20 #DAC OUT2M configured for line out driver and audio bandwidth
w a0 76 0c #Output Channels 1, 2 enabled
w a0 78 40 #DAC Powered Up
# Apply FSYNC = 48 kHz and BCLK = 12.288 MHz and
# Start playback data by host on ASI bus with TDM protocol 32-bits channel wordlength
```

#### Four-channel PDM microphone recording


```
# Key: w a0 XX YY ==> write to I2C address 0xa0, to register 0xxx, data 0xYY
# # ==> comment delimiter
#
# The following list gives an example sequence of items that must be executed in the time
# between powering the device up and reading data from the device. Note that there are
# other valid sequences depending on which features are used.
```

```
#
# GPIO1 - PDMCLK @ 3.072MHz
# PDM Ch1/2 on GPIO2
# PDM Ch3/4 on GPI1
# FSYNC = 48kHz (Output Data Sample Rate), BCLK = 12.288MHz (BCLK/FSYNC = 256)
# AVDD = 3.3V; IOVDD = 3.3V
#####
#
# Page 0 Register Writes
w a0 00 00
w a0 01 01 #SW Reset
d 01
# Page 0 Register Writes
w a0 00 00
w a0 02 09 #Exit Sleep Mode with DREG and VREF Enabled
w a0 0a 41 #Configure GPIO1 as PDMCLK, with active high/active low drive
w a0 35 00 #PDMCLK frequency = 3.072MHz
w a0 0b 10 #Configure GPIO2 as GPI input
w a0 0d 02 #Configure GPI1 as GPI input
w a0 13 cb #Configure Channel1 and Channel2 as PDM; PDM1/2 data in on GPIO2; PDM3/4 data in on GPI1
w a0 1a 30 #TDM protocol with 32-bit word length
w a0 1e 20 #Channel1 data on TDM slot 0
w a0 1f 21 #Channel2 data on TDM slot 1
w a0 20 22 #Channel3 data on TDM slot 2
w a0 21 23 #Channel4 data on TDM slot 3
w a0 76 f0 #Enable input channels 1-4
w a0 78 80 #Power Up ADC path
# Provide BCLK, FSYNC corresponding to 48kSPS, and record with 32-bit TDM bus
```

### 8.3 Power Supply Recommendations

The power-supply sequence between the IOVDD and AVDD rails can be applied in any order. However, only initiate the I<sup>2</sup>C or SPI transactions to initialize the device after all supplies are stable.

For the supply power-up requirement,  $t_1$ ,  $t_2$  must be at least 2ms to allow the device to initialize the internal registers. See the [Section 6.4](#) section for details on how the device operates in various modes after the device power supplies are settled to the recommended operating voltage levels. For the supply power-down requirement,  $t_3$ ,  $t_4$  must be at least 10ms. This timing (as shown in [Figure 8-4](#)) allows the device to ramp down the volume on the playback data, power down the analog and digital blocks, and put the device into shutdown mode. The device can also be immediately put into shutdown mode by ramping down power supplies, but doing so causes an abrupt shutdown.

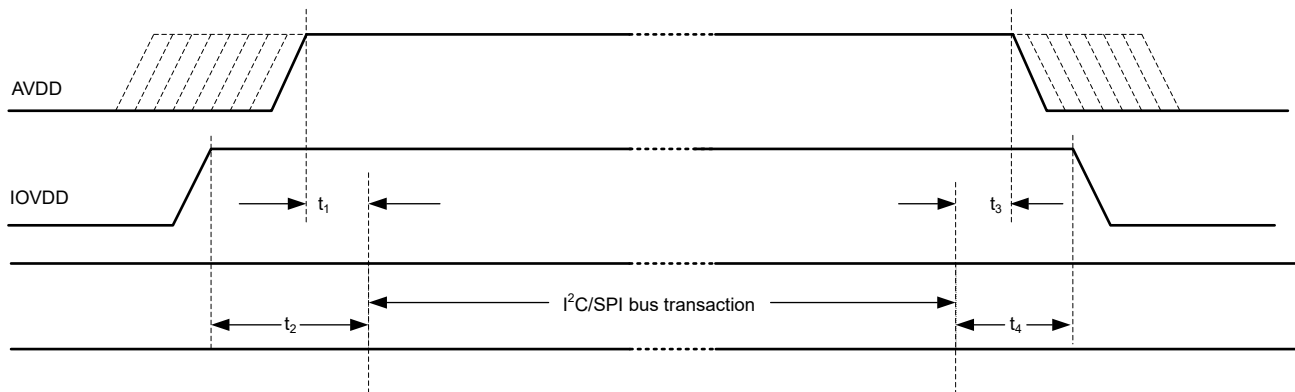

**Figure 8-4. Power-Supply Sequencing Requirement Timing Diagram**

Make sure that the supply ramp rate is slower than 0.1V/ $\mu$ s and that the wait time between a power-down and a power-up event is at least 100ms. For supply ramp rate slower than 0.1V/ms, host device must apply a software reset as first transaction before doing any device configuration. Make sure all digital input pins are at valid input levels and not toggling during supply sequencing.

The TAD5112-Q1 supports a single AVDD supply operation by integrating an on-chip digital regulator, DREG, and an analog regulator. Make sure AVDD\_MODE (P0\_R2\_D[2]) and IOVDD\_IO\_MODE (P0\_R2\_D[1]) registers

are set correctly for AVDD 1.8V operation and for IOVDD 1.8V and 1.2V operation as described in [Section 8.3.1](#) and [Section 8.3.2](#) respectively.

### **8.3.1 AVDD\_MODE for 1.8V Operation**

After the supplies are stable, whenever using AVDD 1.8V operation, always set the AVDD\_MODE (P0\_R2\_D[2]) setting to 1'b1 right after power-up to set the correct analog regulator (AREG) voltage. This setting is not needed when using AVDD 3.3V operation.

### **8.3.2 IOVDD\_IO\_MODE for 1.8V and 1.2V Operation**

After the supplies are stable, the default register configuration of the device has a speed limitation on the maximum clock speed that can be supported for IOVDD = 1.8V or 1.2V at first power up of device with default configurations except for the first write operation. Whenever using IOVDD 1.8V and 1.2V operation, the first operation by user should always be to write the IOVDD\_IO\_MODE (P0\_R2\_D[1]) setting to 1'b1 after power-up or reset, and then there are no speed limitations in subsequent operation of device. This setting is not needed or applicable when using IOVDD 3.3V operation.

## **8.4 Layout**

### **8.4.1 Layout Guidelines**

Each system design and printed circuit board (PCB) layout is unique. The layout must be carefully reviewed in the context of a specific PCB design. However, the following guidelines can optimize the device performance:

- Connect the thermal pad to ground. Use a via pattern to connect the device thermal pad, which is the area directly under the device, to the ground planes. This connection helps dissipate heat from the device.
- Star connect all ground pins to the board ground plane. Use the same ground between VSS pins to avoid any potential voltage difference between them.
- The decoupling capacitors for the power supplies must be placed close to the device pins.
- Route the analog differential audio signals differentially on the PCB for better noise immunity. Avoid crossing digital and analog signals to prevent undesirable crosstalk.
- Avoid running high-frequency clock and control signals near INxx and OUTxx pins where possible.
- The device internal voltage references must be filtered using external capacitors. Place the filter capacitors near the VREF pin for good performance.
- Directly tap the MICBIAS pin to avoid common impedance when routing the biasing or supply traces for multiple microphones to avoid coupling across microphones.
- Provide a direct connection from the VREF and MICBIAS external capacitor ground terminal to VSS.
- Place the MICBIAS capacitor (with low equivalent series resistance) close to the device with minimal trace impedance.
- Use ground planes to provide the lowest impedance for power and signal current between the device and the decoupling capacitors. Treat the area directly under the device as a central ground area for the device, and all device grounds must be connected directly to that area.

### 8.4.2 Layout Example

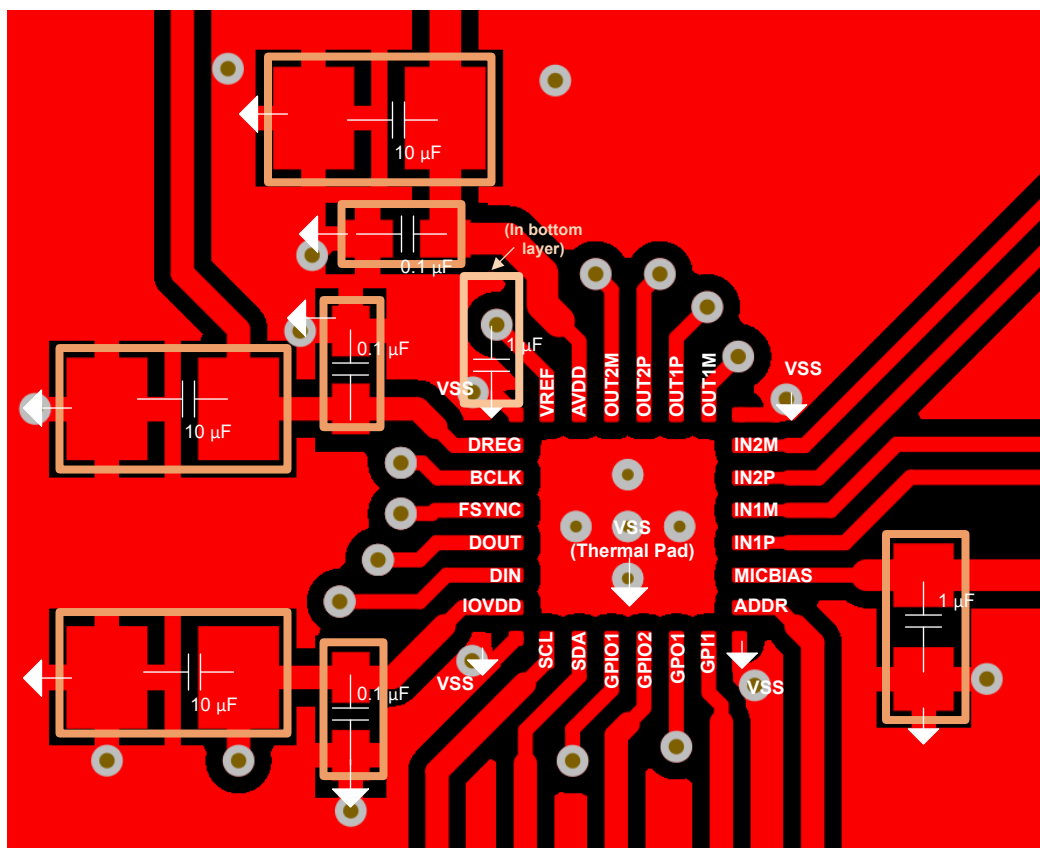


Figure 8-5. Example Layout

## 9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop resources are listed below.

### 9.1 Documentation Support

#### 9.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [TAX5x12EVM-K Evaluation Module User's Guide](#)
- Texas Instruments, [TAX5X1X Synchronous Sample Rate Conversion](#) application report
- Texas Instruments, [Clocking Configuration of Device and Flexible Clocking For TAX5x1x Family](#) application report
- Texas Instruments, [Clock Error Configuration, Detection, and Modes Supported in TAX5x1x Family](#) application report
- Texas Instruments, [TAC5x1x and TAC5x1x-Q1 Programmable Biquad Filters - Configuration and Applications](#) application report
- Texas Instruments, [Tone Generation and Application Modes of TAX5x1x Devices](#) application report
- Texas Instruments, [TAD5x1x Power Consumption Matrix Across Various Usage Scenarios](#) application report
- Texas Instruments, [Output Swings and Common-mode Settings in AC-coupled and DC-coupled DAC](#) application report
- Texas Instruments, [Dynamic Voltage and Temperature Tracking Based Limiter in TAX5XXX-Q1](#) application report
- Texas Instruments, [Inter Chip Limiter Alignment in TAX5xxx-Q1 Devices](#) application report
- Texas Instruments, [Headset Detection for TAX52xx Family](#) application report
- Texas Instruments, [Improving out-of-band noise and click and pop noise in TAD5xx2 devices](#) application report
- Texas Instruments, [Using the TAX5x1x Programmable Digital Channel Mixer](#) application report
- Texas Instruments, [Multiple TAC5x1x Devices With a Shared TDM and I2C/SPI Bus](#) application report
- Texas Instruments, [TAC5212 Integrated Analog Antialiasing Filter and Flexible Digital Filter](#) application report
- Texas Instruments, [TAC5212 Sampling Rates and Programmable Processing Blocks Supported](#) application report
- Texas Instruments, [Audio ADC, DAC, and CODEC for Professional Audio and Music Applications](#) application report

### 9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.3 Support Resources

TI E2E™ [support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.  
All trademarks are the property of their respective owners.

## 9.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 9.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision * (December 2023) to Revision A (March 2025) | Page |
|--------------------------------------------------------------------|------|
| • Updated device status to production data.....                    | 1    |

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number          | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|--------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TAD5112QRGERQ1</a> | Active        | Production           | VQFN (RGE)   24 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TAD5112<br>Q1       |
| TAD5112QRGERQ1.A               | Active        | Production           | VQFN (RGE)   24 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TAD5112<br>Q1       |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TAD5112-Q1 :**


- Catalog : [TAD5112](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product




## TAPE AND REEL INFORMATION

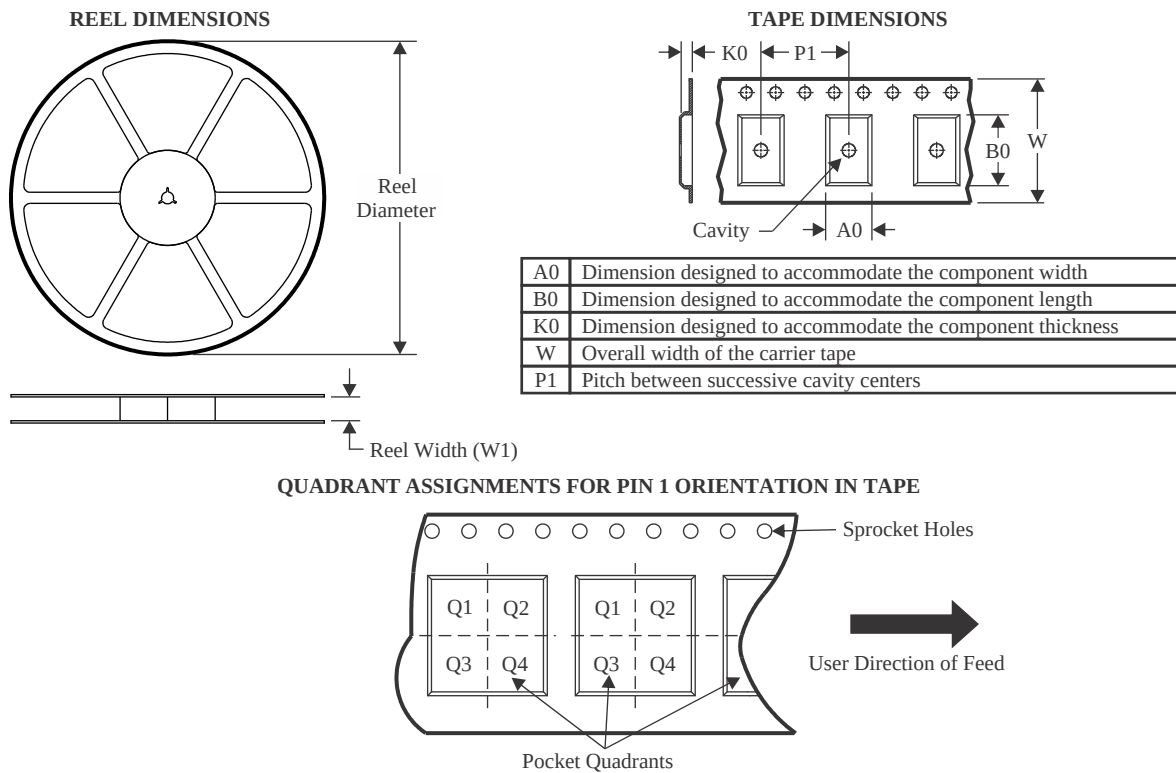

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TAD5112QRGERQ1 | VQFN         | RGE             | 24   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

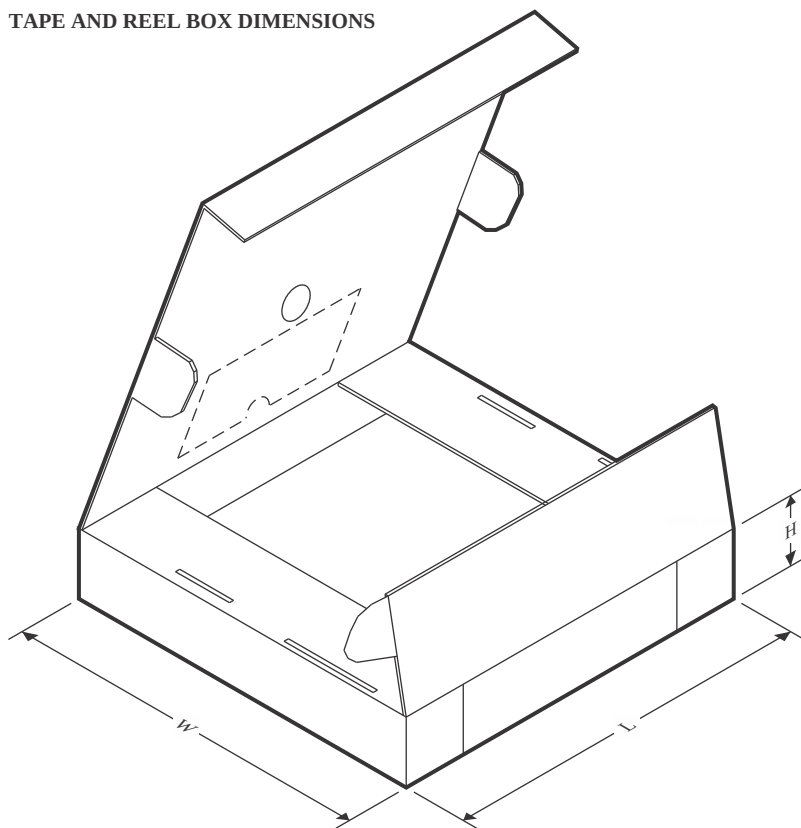

\*All dimensions are nominal


| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TAD5112QRGERQ1 | VQFN         | RGE             | 24   | 3000 | 367.0       | 367.0      | 35.0        |

**RGE 24**

**GENERIC PACKAGE VIEW**


**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

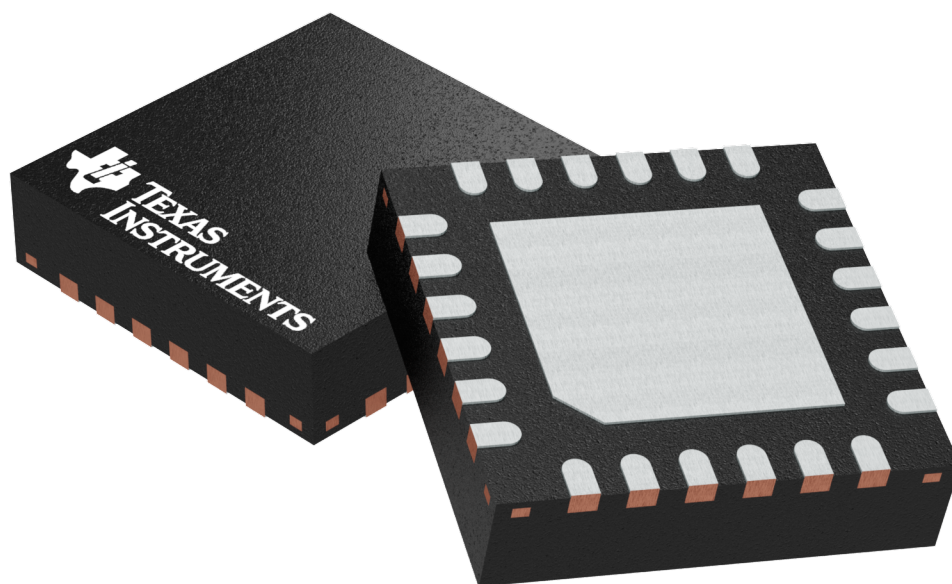

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.


4204104/H

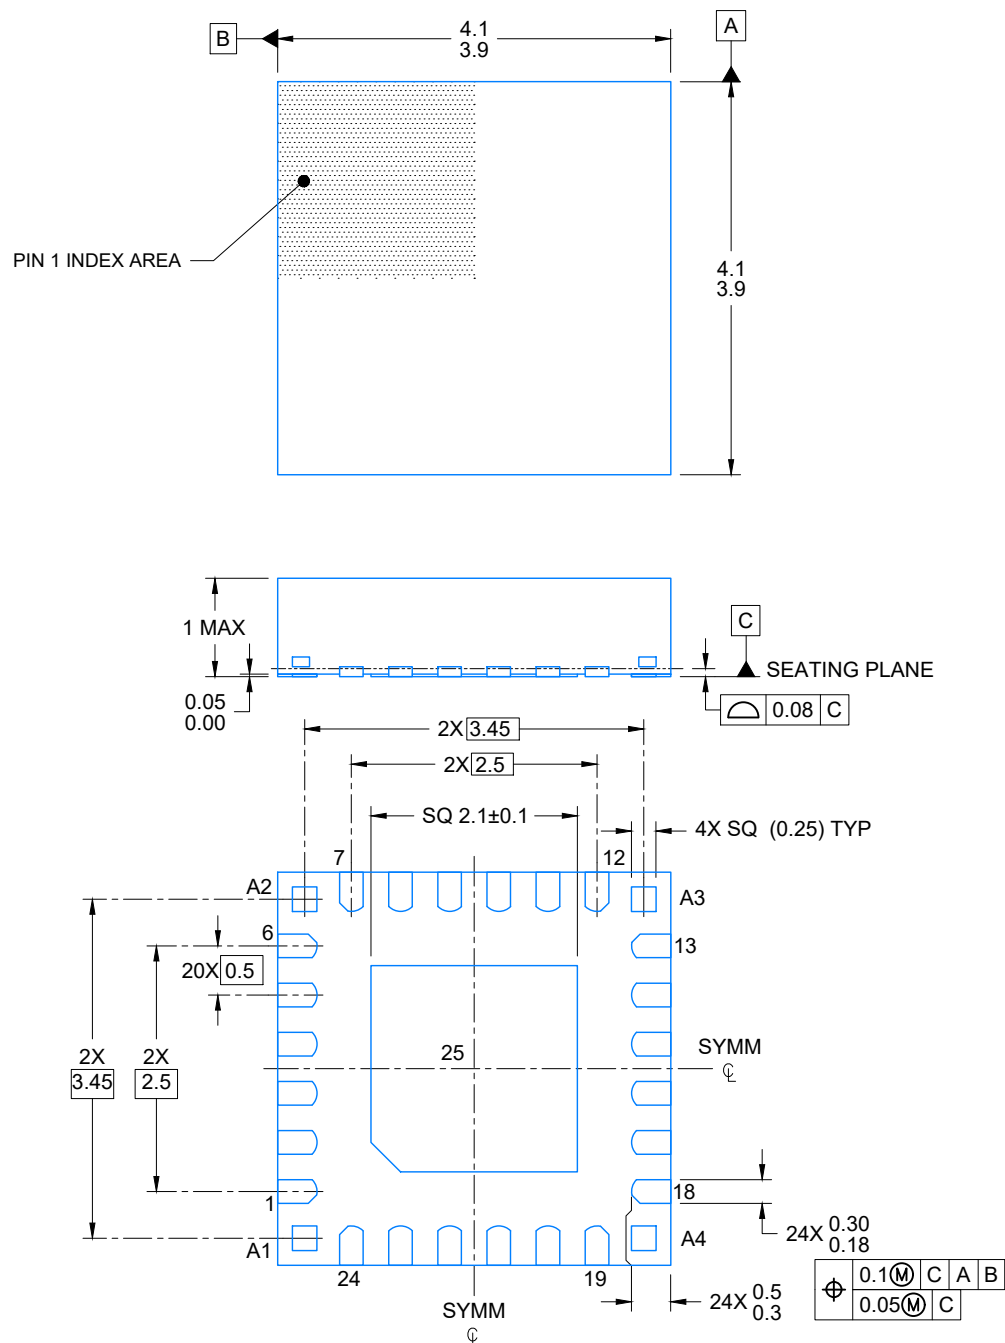

4225246/A 08/2019

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

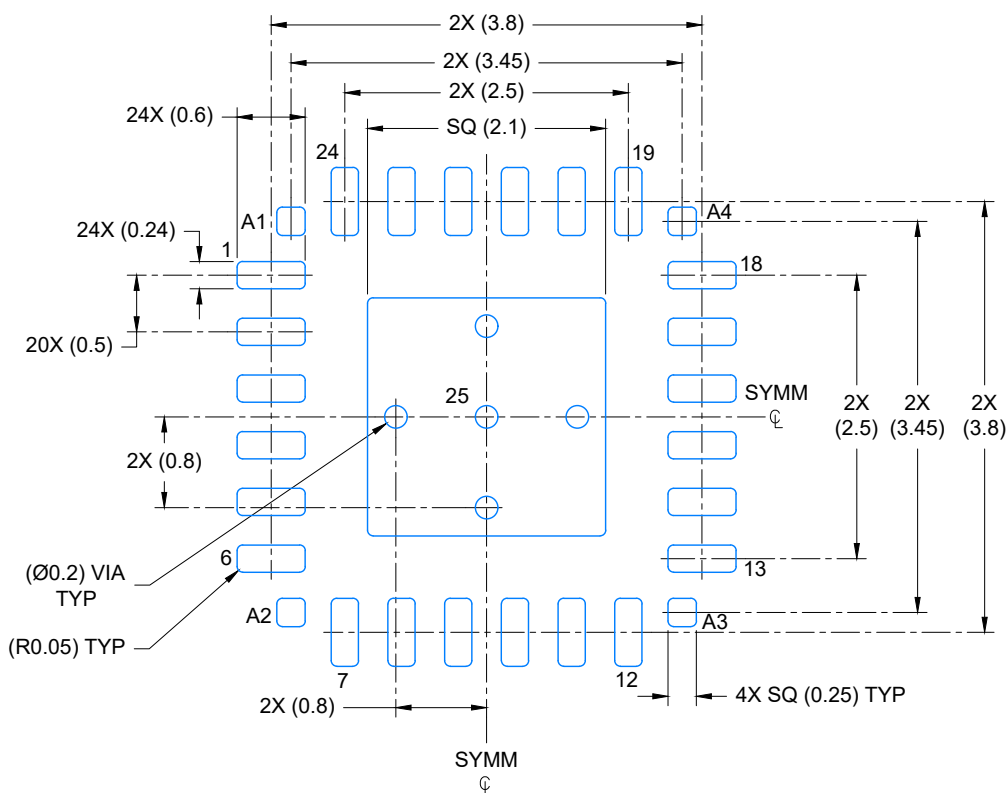

## LAND PATTERN EXAMPLE

EXPOSED METAL SHOWN

SCALE: 15X

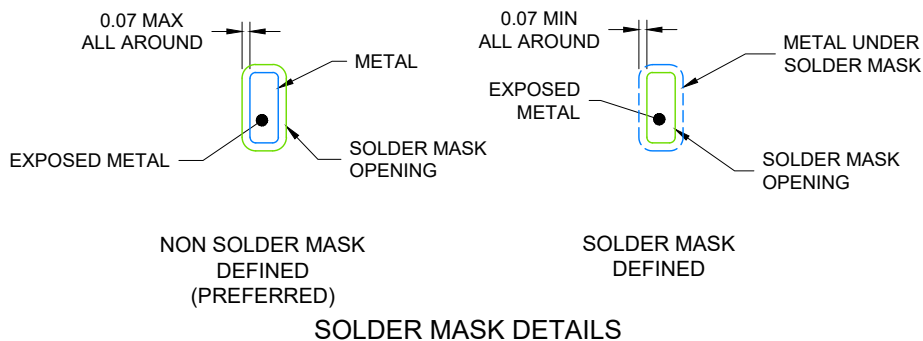

4225246/A 08/2019

## NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

## VQFN - 1 mm max height

Technical drawing of a rectangular plate with dimensions and features. The drawing includes the following dimensions and features:

- Overall width:  $2X$  (3.8)
- Overall height:  $24X$  (0.6)
- Top edge features:
  - Left corner:  $24X$  (0.24)
  - Right corner:  $24X$  (0.24)
- Internal features:
  - Top edge:  $4X$  SQ (0.94)
  - Bottom edge:  $4X$  SQ (0.25) TYP
  - Left edge:  $2X$  (0.57)
  - Right edge:  $2X$  (2.5),  $2X$  (3.45),  $2X$  (3.8)
- Center features:
  - Center:  $25$
  - Center:  $6$
- Labels:
  - A1, A2, A3, A4
  - 1, 7, 12, 13, 18, 19
  - SYMM
  - (R0.05) TYP

EXPOSED PAD  
80% PRINTED COVERAGE BY AREA  
SCALE: 15X



TEXAS  
INSTRUMENTS  
www.ti.com

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025