

LOW-POWER, DUAL-OUTPUT, CURRENT-MODE PWM CONTROLLER

FEATURES

- BiCMOS Version of UC3846 Family
- 1.4-mA Maximum Operating Current
- 100- μ A Maximum Startup Current
- ± 0.5 -A Peak Output Current
- 125-ns Circuit Delay
- Easier Parallelability
- Improved Benefits of Current Mode Control

DESCRIPTION

The UCC3806 family of BiCMOS PWM controllers offers exceptionally improved performance with a familiar architecture. With the same block diagram and pinout of the popular UC3846 series, the UCC3806 line features increased switching frequency capability while greatly reducing the bias current used within the device. With a typical startup current of 50 μ A and a well defined voltage threshold for turn-on, these devices are favored


for applications ranging from off-line power supplies to battery operated portable equipment. Dual high-current, MOSFET driving outputs and a fast current sense loop further enhance device versatility.

All the benefits of current mode control including simpler loop closing, voltage feed-forward, parallelability with current sharing, pulse-by-pulse current limiting, and push/pull symmetry correction are readily achievable with the UCC3806 series.

These devices are available in multiple package options for both through-hole and surface mount applications; and in commercial, industrial, and military temperature ranges.

The UCC1806 is specified for operation from -55°C to 125°C , the UCC2806 is specified for operation from -40°C to 85°C , and the UCC3806 is specified for operation from 0°C to 70°C .

SIMPLIFIED APPLICATION DIAGRAM

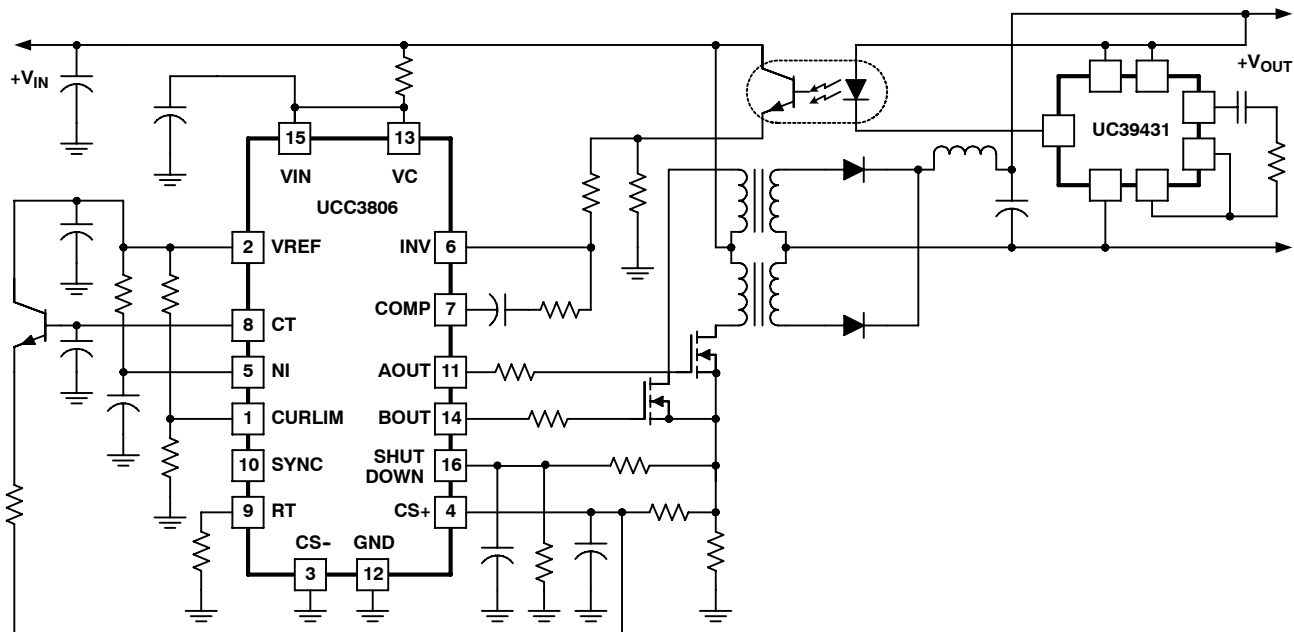

UCC1806
UCC2806
UCC3806

SLUS272F - FEBRUARY 2000 - REVISED AUGUST 2006



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted⁽¹⁾

| | | UCx806 | UNIT |
|--|-----------------------------|---------------------------------|------|
| Supply voltage, V _{IN} | VIN, low impedance | 15 | V |
| Supply current, I _{IN} | VIN, high impedance | 25 | mA |
| Output supply voltage | VC | 18 | V |
| Output current | Continuous source or sink | ± 200 | mA |
| | Gate drive | ± 500 | |
| | SYNC | ± 30 | |
| | COMP | ± 10 to -(self-limiting) | |
| Analog input voltage range | CS-, CS+, NI, INV, SHUTDOWN | -0.3 to (V _{IN} + 0.3) | V |
| Storage temperature, T _{stg} | | -65 to 150 | °C |
| Operating temperature, T _J | | -55 to 150 | °C |
| Lead temperature, T _{sol} , 1,6 mm (1/16 inch) from case for 10 seconds | | 300 | °C |


⁽¹⁾ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. All voltages are with respect to GND. Currents are positive into and negative out of, the specified terminal.

RECOMMENDED OPERATING CONDITIONS


| | | MIN | NOM | MAX | UNIT |
|--|---------|-----|-----|------|------|
| Input voltage, V _{IN} | | 8.0 | | 14.5 | V |
| Operating junction temperature, T _J | UCC1806 | -55 | | 125 | °C |
| | UCC2806 | -40 | | 85 | |
| | UCC3806 | 0 | | 70 | |

PACKAGE DESCRIPTION

**D, DW, J, M, N OR PW PACKAGE
(TOP VIEW)**

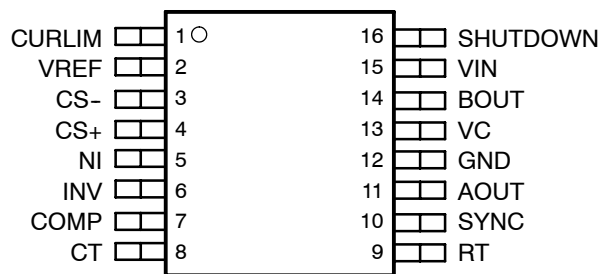

**Q OR L PACKAGE
(TOP VIEW)**

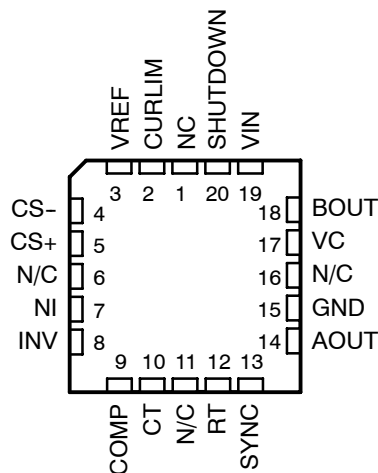

N/C - No connection

ORDERING INFORMATION

| PACKAGED DEVICES | | | | T _A = T _J | | |
|------------------|----------|--------|----------|---------------------------------|----------------|-------------|
| DESIGNATOR | TYPE | OPTION | QUANTITY | - 55°C to 125°C | - 40°C to 85°C | 0°C to 70°C |
| D | SOIC-16 | Tube | 40 | – | UCC2806D | – |
| | | Reeled | 2,500 | – | UCC2806DTR | – |
| DW | SOICW-16 | Tube | 40 | – | UCC2806DW | UCC3806DW |
| | | Reeled | 2,000 | – | UCC2806DWTR | UCC3806DWTR |
| J | CDIP-16 | Tube | 25 | UCC1806J | UCC2806J | UCC3806J |
| L | CLCC-20 | Tube | 55 | UCC1806L | – | – |
| M | SSOP-16 | Reeled | 2,500 | – | UCC2806MTR | – |
| N | PDIP-16 | Tube | 25 | – | UCC2806N | UCC3806N |
| PW | TSSOP-16 | Tube | 90 | – | UCC2806PW | UCC3806PW |
| | | Reeled | 2,000 | – | UCC2806PWTR | UCC3806PWTR |
| Q | PLCC-20 | Tube | 46 | – | UCC2806Q | UCC3806Q |
| | | Reeled | 1,000 | – | UCC2806QTR | UCC3806QTR |

ELECTRICAL CHARACTERISTICS

V_{IN} = 12 V, R_T = 33 kΩ, C_T = 330 pF, C_{BYPASS} on V_{REF} = 0.01 μF, -55°C < T_A < 125°C for the UCC1806, -40°C < T_A < 85°C for the UCC2806, 0°C < T_A < 70°C for the UCC3806, and T_A = T_J (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|----------------------------|--|--|------|------|------|
| REFERENCE | | | | | | |
| V _{REF} | Supply, UVLO, turn-on | UCC1806 | 5.02 | 5.10 | 5.17 | V |
| | | UCC2806 | | | | |
| | | UCC3806 | 5.00 | 5.10 | 5.20 | |
| Load regulation | | 0.2 mA ≤ I _{OUT} ≤ 5 mA | | 3 | 25 | mV |
| Total output variation ⁽¹⁾⁽²⁾ | | Line, load, temperature | -150 | | 150 | |
| Output noise voltage ⁽²⁾ | | 10 Hz ≤ f _{OSC} ≤ 10 kHz, T _J = 25°C | | 70 | | μV |
| Long term stability ⁽²⁾ | | T _A = 125°C, 1000 hours | | 5 | 25 | mV |
| Output short circuit | | | -10 | | -30 | mA |
| OSCILLATOR | | | | | | |
| Initial accuracy | | T _J = 25°C | 42 | 47 | 52 | kHz |
| Temperature stability ⁽²⁾ | | T(min) ≤ T _A ≤ T(max) | | 2% | | |
| Amplitude | | | | 2.35 | | |
| t _{DELAY} | Delay-to-output time, SYNC | UCC1806 | V _{CT} = 0 V, V _{RT} = V _{REF} 0.8 V ≤ V _{SYNC} ≤ 2.0 V | 50 | 125 | ns |
| | | UCC2806 | | | | |
| | | UCC3806 | | | | |

UCC1806
UCC2806
UCC3806

SLUS272F - FEBRUARY 2000 - REVISED AUGUST 2006

ELECTRICAL CHARACTERISTICS

$V_{IN} = 12\text{ V}$, $R_T = 33\text{ k}\Omega$, $C_T = 330\text{ pF}$, C_{BYPASS} on $V_{REF} = 0.01\text{ }\mu\text{F}$, $-55^\circ\text{C} < T_A < 125^\circ\text{C}$ for the UCC1806, $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ for the UCC2806, $0^\circ\text{C} < T_A < 70^\circ\text{C}$ for the UCC3806, and $T_A = T_J$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------------|---|---|------|------|------------|---------------|
| OSCILLATOR (continued) | | | | | | |
| I_{DCHG} | Discharge current | $T_J = 25^\circ\text{C}$, $V_{CT} = 2.0\text{ V}$ | | 2.5 | | mA |
| V_{OL} | Low-level output voltage, SYNC | $I_{OUT} = 1\text{ mA}$ | | | 0.4 | V |
| V_{OH} | High-level output voltage, SYNC | $I_{OUT} = -4\text{ mA}$ | 2.4 | | | |
| V_{IL} | Low-level input voltage, SYNC | $V_{CT} = 0\text{ V}$, $V_{RT} = V_{REF}$ | | | 0.8 | |
| V_{IH} | High-level input voltage, SYNC | $V_{CT} = 0\text{ V}$, $V_{RT} = V_{REF}$ | 2.0 | | | |
| I_{SYNC} | Input current, SYNC | | -1 | | 1 | |
| ERROR AMPLIFIER | | | | | | |
| Input offset voltage | UCC1806 | | | | 5 | mV |
| | UCC2806 | | | | | |
| | UCC3806 | | | | 10 | |
| I_{BIAS} | Input bias current | | | | -1 | μA |
| I_{OFFSET} | Input offset current | | | | 500 | nA |
| CMR | Common mode range ⁽¹⁾ | | 0 | | $V_{IN}-2$ | V |
| A_{VOL} | Open loop gain | $1\text{ V} \leq V_{OUT} \leq 4\text{ V}$ | 80 | 100 | | dB |
| GBW | bandwidth | | 1 | | | MHz |
| I_{COMP_SINK} | Output sink current | $V_{ID} < -20\text{ mV}$, $V_{COMP} = 1\text{ V}$ | 1 | | | mA |
| I_{COMP_SRC} | Output source current | $V_{ID} < 20\text{ mV}$, $V_{COMP} = 3\text{ V}$ | -80 | -120 | | μA |
| V_{COMP_L} | Low-level output voltage | $V_{ID} = -50\text{ mV}$ | | | 0.5 | V |
| V_{COMP_H} | High-level output voltage | $V_{ID} = -50\text{ mV}$ | 4.5 | | | |
| CURRENT SENSE AMPLIFIER | | | | | | |
| A | Amplifier gain ⁽³⁾⁽⁴⁾ | $V_{CS-} = 0\text{ V}$, $V_{CURLIM} = V_{REF}$ | 2.75 | 3.00 | 3.35 | V/V |
| | Maximum differential input signal ($V_{CS+} - V_{CS-}$) | $V_{CURLIM} = V_{NI} = V_{REF}$, $V_{INV} = 0\text{ V}$ | 1.1 | | | V |
| Input offset voltage | UCC1806 | $V_{CURLIM} = 0.5\text{ V}$, $V_{COMP} = \text{OPEN}$ | | 10 | 30 | mV |
| | UCC2806 | | | | | |
| | UCC3806 | $V_{CURLIM} = 0.5\text{ V}$, $V_{COMP} = \text{OPEN}$ | | 10 | 50 | mV |
| CMRR | Common mode rejection ratio | $0\text{ V} \leq V_{CM} \leq (V_{IN} - 3.5\text{ V})$ | 60 | | | dB |
| PSRR | Power supply rejection ratio | | 56 | | | dB |
| I_{BIAS} | Input bias current ⁽³⁾ | $V_{CURLIM} = 0.5\text{ V}$, $V_{COMP} = \text{OPEN}$ | | | -1 | μA |
| | Input offset current ⁽³⁾ | $V_{CURLIM} = 0.5\text{ V}$, $V_{COMP} = \text{OPEN}$ | | | 1 | μA |
| | Delay-to-output time ⁽⁵⁾ | $V_{NI} = V_{REF}$, $V_{INV} = 0\text{ V}$, $V_{CURLIM} = 2.75\text{ V}$, $(V_{CS+} - V_{CS-}) = 0\text{ V to } 1.5\text{ V step}$ | | 125 | 175 | ns |
| CURRENT LIMIT ADJUST | | | | | | |
| | Current limit offset | $V_{CS-} = V_{CS+} = 0\text{ V}$, $V_{COMP} = \text{OPEN}$ | 0.4 | 0.5 | 0.6 | V |
| I_{BIAS} | Input bias current | | | | 1 | μA |
| | Minimum latching current | | 300 | 200 | | |
| | Maximum non-latching current | | | 200 | 80 | |

(1) Line range = 10 V to 15 V, load range = 0.2 mA to 5 mA

(2) Ensured by design. Not production tested.

ELECTRICAL CHARACTERISTICS

$V_{IN} = 12\text{ V}$, $R_T = 33\text{ k}\Omega$, $C_T = 330\text{ pF}$, C_{BYPASS} on $V_{REF} = 0.01\text{ }\mu\text{F}$, -55°C to 125°C for the UCC1806, $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ for the UCC2806, $0^\circ\text{C} < T_A < 70^\circ\text{C}$ for the UCC3806, and $T_A = T_J$ (unless otherwise noted)

| SHUTDOWN TERMINAL | | | | | | | | |
|-----------------------------|----------------------------|----------------------------|--|------|------|----------|------|---------------|
| Threshold voltage | UCC1806 | | 0.94 | 1.00 | 1.06 | V | | |
| | UCC2806 | | | | | | | |
| | UCC3806 | | 0.9 | 1.0 | 1.1 | | | |
| Input voltage range | | | 0 | | | V_{IN} | | |
| t_{DLY} | Delay-to-output time | | $0\text{ V} \leq V_{SHUTDOWN} \leq 1.3\text{ V}$ | | 75 | 150 | ns | |
| OUTPUT | | | | | | | | |
| Output supply voltage | | | 2.5 | | | 15.0 | V | |
| Low-level output voltage | UCC1806 | $I_{SINK} = 20\text{ mA}$ | 100 | | 300 | | | |
| | | UCC2806 | $I_{SINK} = 100\text{ mA}$ | | 0.4 | 1.1 | | |
| | UCC3806 | $I_{SINK} = 20\text{ mA}$ | 100 | | 200 | | | |
| | | $I_{SINK} = 100\text{ mA}$ | 0.4 | | 1.1 | | | |
| High-level output voltage | $I_{SRC} = -20\text{ mA}$ | | 11.6 | 11.9 | | | | |
| | $I_{SRC} = -100\text{ mA}$ | | 11.0 | 11.6 | | | | |
| t_{RISE} | Rise time | | $T_J = 25^\circ\text{C}$, $C_{LOAD} = 1000\text{ pF}$ | | 35 | 65 | ns | |
| t_{FALL} | Fall time | | $T_J = 25^\circ\text{C}$, $C_{LOAD} = 1000\text{ pF}$ | | 35 | 65 | | |
| UNDERVOLTAGE LOCKOUT (UVLO) | | | | | | | | |
| V_{START} | Startup threshold voltage | | 6.5 | | | 7.5 | 8.0 | V |
| | Threshold hysteresis | | 0.75 | | | | | V |
| I_{START} | Startup current | | $V_{IN} < V_{START}$ | | | 50 | 100 | μA |
| I | Operating supply current | | | | | 1.0 | 1.4 | mA |
| | V_{IN} shunt voltage | | $I_{VIN} = 10\text{ mA}$ | | | 15.0 | 17.5 | |

- (1) Line range = 10 V to 15 V, load range = 0.2 mA to 5 mA
- (2) Ensured by design. Not production tested.
- (3) Parameters measured at trip point of latch with $V_{NI} = V_{REF}$, $V_{INV} = 0\text{V}$.
- (4) Amplifier gain defined as: $G = \Delta \text{change at COMP} / \Delta \text{change forced at CS+}$ delta voltage at $\text{CS+} = 0$ to 1V
- (5) Current-sense amplifier output is slew rate limited to provide noise immunity.

THERMAL RESISTANCE TABLE

| PACKAGE DESIGNATOR | PACKAGE TYPE | θ_{JC} ($^\circ\text{C/W}$) | θ_{JA} ($^\circ\text{C/W}$) |
|--------------------|--------------|--------------------------------------|--------------------------------------|
| D | SOIC-16 | 35 | 50 to 120 ⁽¹⁾ |
| DW | SOICW-16 | 27 | 50 to 100 ⁽¹⁾ |
| J | CDIP-16 | 28 | 80 to 120 |
| L | CLCC-20 | 20 | 70 to 80 |
| M | SSOP-16 | 38 | 144 to 172 ⁽²⁾ |
| N | PDIP-16 | 45 | 90 ⁽¹⁾ |
| PW | TSSOP-16 | 15 | 123 to 147 ⁽²⁾ |
| Q | PLCC-20 | 34 | 43 to 75 ⁽¹⁾ |

- (1) Specified θ_{JA} (junction to ambient) is for devices mounted to 5 in² FR4 PC board with one ounce copper where noted. When resistance range is given, lower values are for 5 in² aluminum PC board. Test PWB was 0.062 in thick and typically used 0.635 mm trace widths for power packages and 1.3 mm trace widths for non-power packages with a 100x100 mil probe land area at the end of each trace.
- (2) Modeled data. If value range given for θ_{JA} , the lower value is for 3x3 inch 1 oz internal copper ground plane, and the higher value is for 1x1 inch ground plane. All model data assumes only one trace for each non-fused lead.

TERMINAL FUNCTIONS

| TERMINAL NAME | PACKAGES | | I/O | DESCRIPTION |
|------------------|-------------------|-----|-----|---|
| | D/DW/J/M /N/PW | L,Q | | |
| AOUT | 11 | 14 | O | High-current gate drive for the external MOSFETs |
| BOUT | 14 | 18 | | |
| COMP | 7 | 9 | O | Output of the error amplifier |
| CS- | 3 | 4 | I | Inverting input of the 3×, differential current sense amplifier |
| CS+ | 4 | 5 | I | Non-inverting input of the 3×, differential current sense amplifier |
| CT | 8 | 10 | I | Oscillator timing capacitor connection point |
| CURLIM | 1 | 2 | I | Programs the primary current limit threshold that determines latching or retry after an overcurrent situation |
| GND | 12 | 15 | - | Reference ground and power ground for all functions of this device |
| INV | 6 | 8 | I | Inverting input of the error amplifier. |
| NI | 5 | 7 | I | Non-inverting input of the error amplifier. |
| RT | 9 | 12 | I | Connection point for the oscillator timing resistor |
| SHUTDOWN | 16 | 20 | I | Provided for enhanced protection. When SHUTDOWN is driven above 1 V, AOUT and BOUT are forced low. |
| SYNC | 10 | 13 | I/O | Allows providing external synchronization with TTL compatible thresholds. |
| VC | 13 | 17 | I | Input supply connection for the FET drive outputs. |
| VIN | 15 | 19 | I | Input supply connection for this device. |
| VREF | 2 | 3 | O | Reference output. |

DETAILED PIN DESCRIPTIONS

AOUT and BOUT: AOUT and BOUT provide alternating high current gate drive for the external MOSFETs. Duty cycle can be varied from 0% to 50% where minimum dead time is a function of CT. Both outputs use MOS transistor switches with inherent anti-parallel body diodes to clamp voltage swings to the supply rails, allowing operation without the use of clamp diodes.

COMP: COMP is the output of the error amplifier and the input of the PWM comparator. The error amplifier is a low output impedance, 2-MHz operational amplifier which allows sinking or sourcing of current at the COMP pin. The error amplifier is internally current limited, so that zero duty cycle can be commanded by externally forcing COMP to GND.

CS-: CS- is the inverting input of the 3× differential current sense amplifier.

CS+: CS+ is the non-inverting input of the 3× differential current sense amplifier.

CT: CT is the oscillator timing capacitor connection point, which is charged by the current set by RT. CT is discharged to GND through a 2.5-mA current sink. This causes a linear discharge of CT to 0 V which then initiates the next switching cycle. Dead time occurs during the discharge of CT, forcing AOUT and BOUT low. Switching frequency (f_s) and dead time (t_D) are approximated by:

$$f_s = \frac{1}{1.96 \times R_T \times C_T + t_D} \quad \text{and} \quad t_D = 956 \times C_T \tag{1}$$

DETAILED PIN DESCRIPTIONS (continued)

CURLIM: CURLIM programs the primary current limit threshold and determines whether the device latches off or retries after an overcurrent condition. When a shutdown signal is generated, a 200- μ A current source to ground pulls down on CURLIM. If the voltage on the pin remains above 350 mV the device remains latched and the power must be cycled to restart. If the voltage on the pin falls below 350 mV, the device attempts a restart. The voltage threshold is typically set by a resistor divider from V_{REF} to ground. To calculate the current limit adjust voltage threshold the following equations can be used.

Current limit adjust latching mode voltage is calculated in equation (2)

$$V = \frac{V_{REF} - (R1 \times 300 \mu A)}{1 + \left(\frac{R1}{R2}\right)} > 350 \text{ mV} \quad (2)$$

Current limit adjust non-latching mode voltage is calculated in equation (3)

$$V = \frac{V_{REF} - (R1 \times 80 \mu A)}{1 + \left(\frac{R1}{R2}\right)} < 350 \text{ mV} \quad (3)$$

where

- R1 is the resistance from the VREF to CURLIM
- R2 is the resistance from CURLIM to GND

GND: GND is the reference ground and power ground for all functions of this part. Bypass and timing capacitors should be connected as close as possible to GND.

RT: RT is the connection point for the oscillator timing resistor. It has a low impedance input and is nominally at 1.25 V. The current through RT is mirrored to the timing capacitor pin, CT. This causes a linear charging of CT from 0 V to 2.35 V. Note that the current mirror is limited to a maximum of 100 μ A so R_T must be greater than 12.5 k Ω .

SYNC: SYNC is a bi-directional pin, allowing or providing external synchronization with TTL compatible thresholds. In a typical application RT is connected through a timing resistor to GND which allows the internal oscillator to free run. In this mode SYNC outputs a TTL compatible pulse during the oscillator dead time (when CT is being discharged). If RT is forced above 4.4 V, SYNC acts as an input with TTL compatible thresholds and the internal oscillator is disabled. When SYNC is high, greater than 2 V the outputs are held active low. When SYNC returns low, the outputs may be high until the on-time is terminated by the normal peak current signal, a fault seen at SHUTDOWN or the next high assertion of SYNC. Multiple UCC3806s can be synchronized by a single master UCC3806 or external clock.

VC: VC is the input supply connection for the FET drive outputs and has an input range from 2.5 V to 15 V. VC should be capacitively bypassed for proper operation.


VIN: VIN is the input supply connection for this device. The UCC1806 has a maximum startup threshold of 8 V and internally limited by means of a 15 V shunt regulator. The shunted supply current must be limited to 25 mA. For proper operation, VIN must be bypassed to GND with at least a 0.01- μ F ceramic capacitor

VREF: VREF is a 5.1 V \pm 1% trimmed reference output with a 5 mA maximum available current. VREF must be bypassed to GND with at least a 0.1- μ F ceramic capacitor for proper operation.


UCC1806
UCC2806
UCC3806

SLUS272F - FEBRUARY 2000 - REVISED AUGUST 2006

FUNCTIONAL BLOCK DIAGRAM

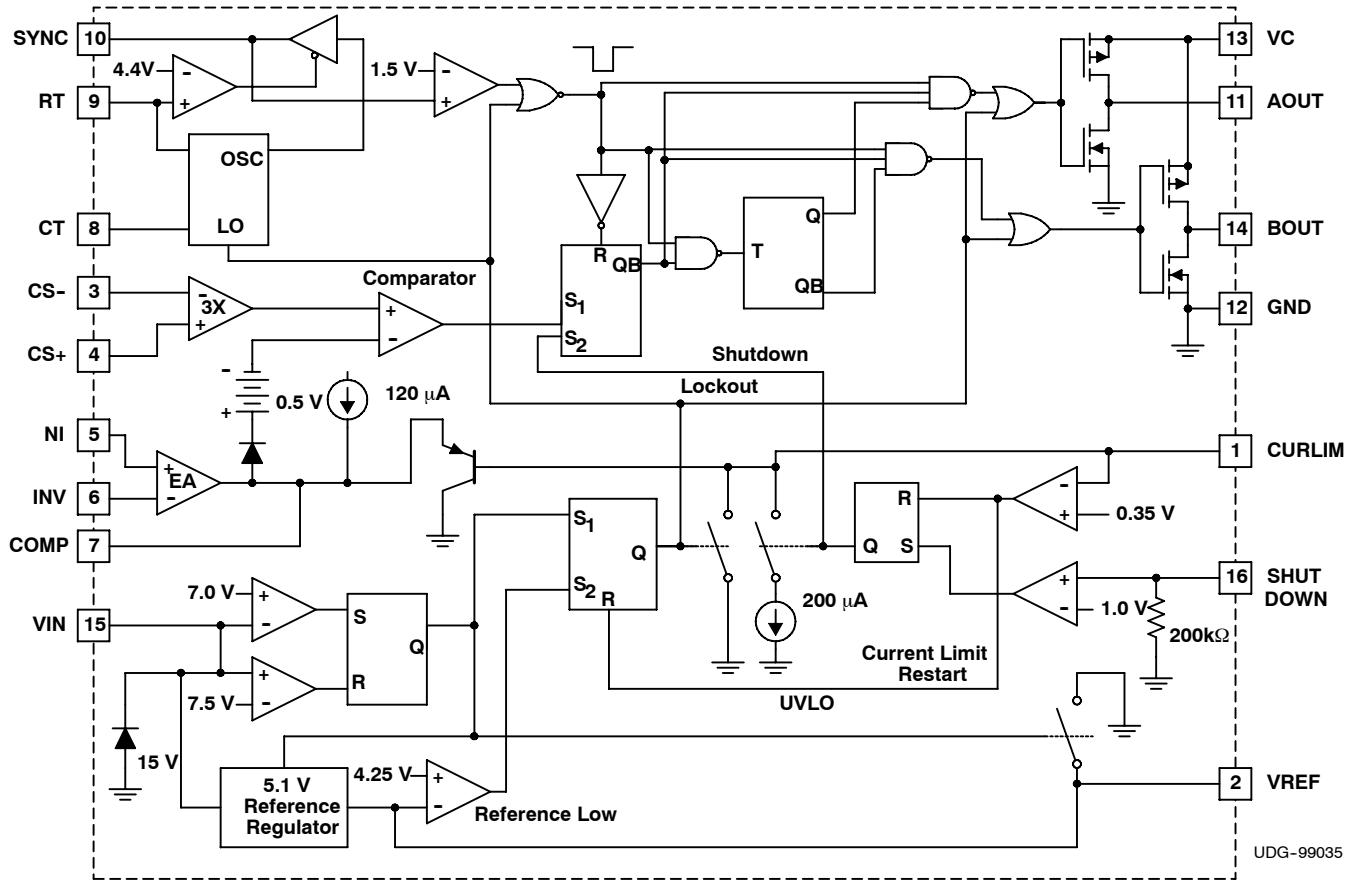

TYPICAL APPLICATION DIAGRAM

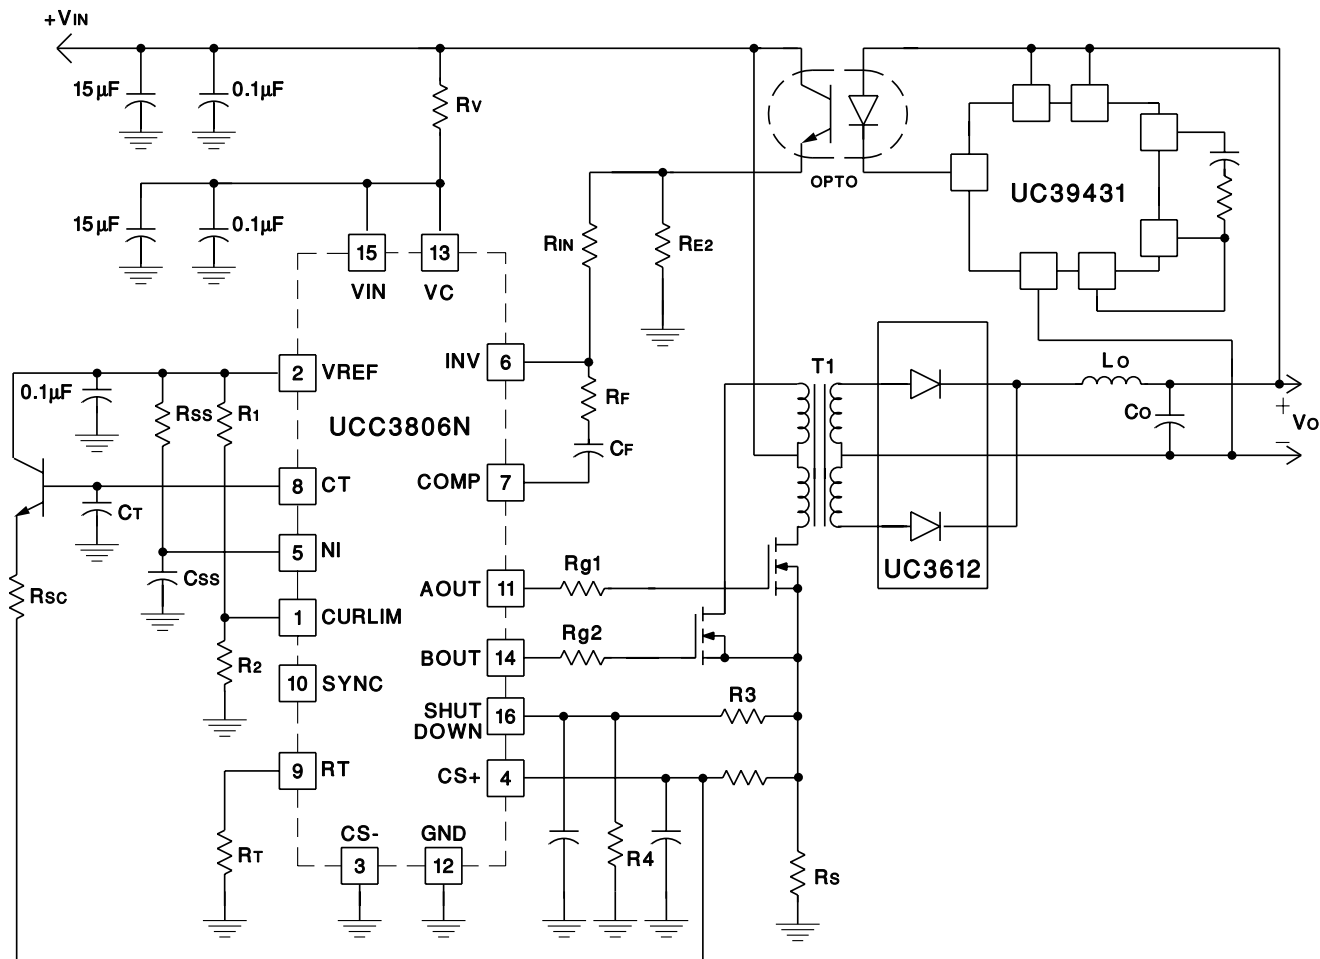

UDG-99036

TYPICAL CHARACTERISTICS

Design equations for oscillator are described in the following equations.

$$f_{OSC} = \frac{1}{t_{RAMP} + t_{FALL}} \tag{4}$$

$$t_{RAMP} = 1.92 \times R_T \times C_T \tag{5}$$

$$t_{FALL} = \frac{2.4 \times C_T}{\left(0.002 - \left(\frac{1.25}{R_T}\right)\right)} \tag{6}$$

$$t_{DEAD} = t_{FALL} \tag{7}$$

TYPICAL CHARACTERISTICS

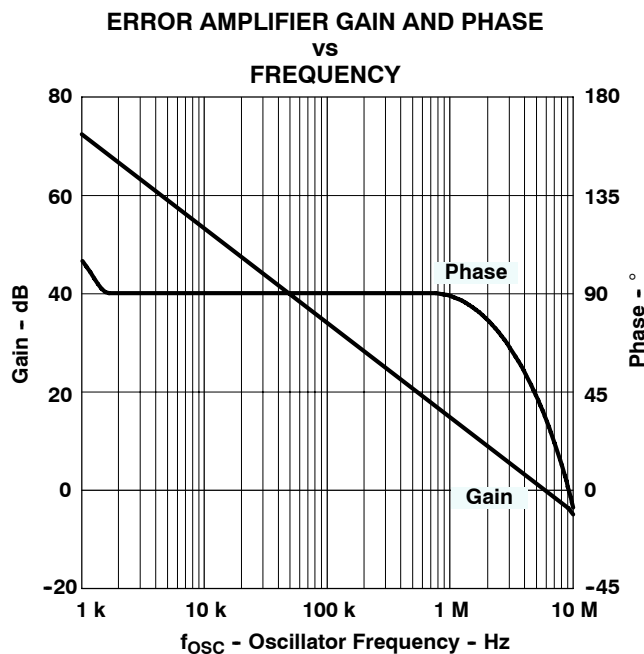


Figure 1.


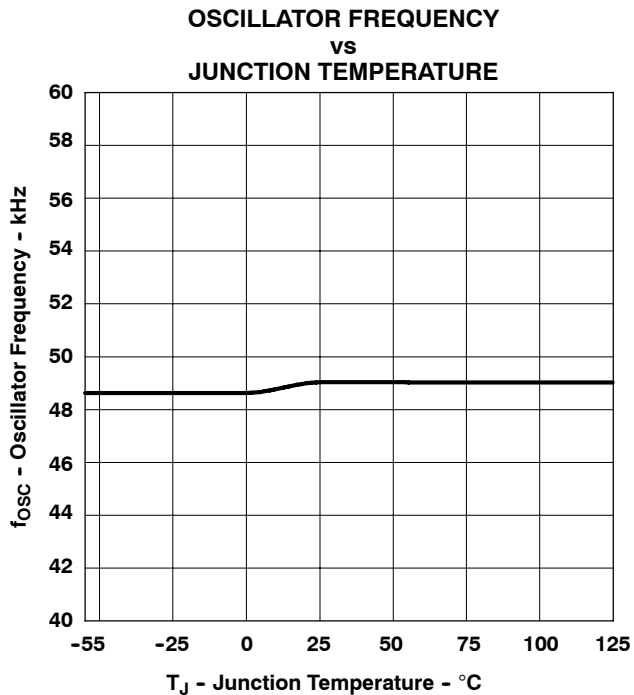


Figure 2.

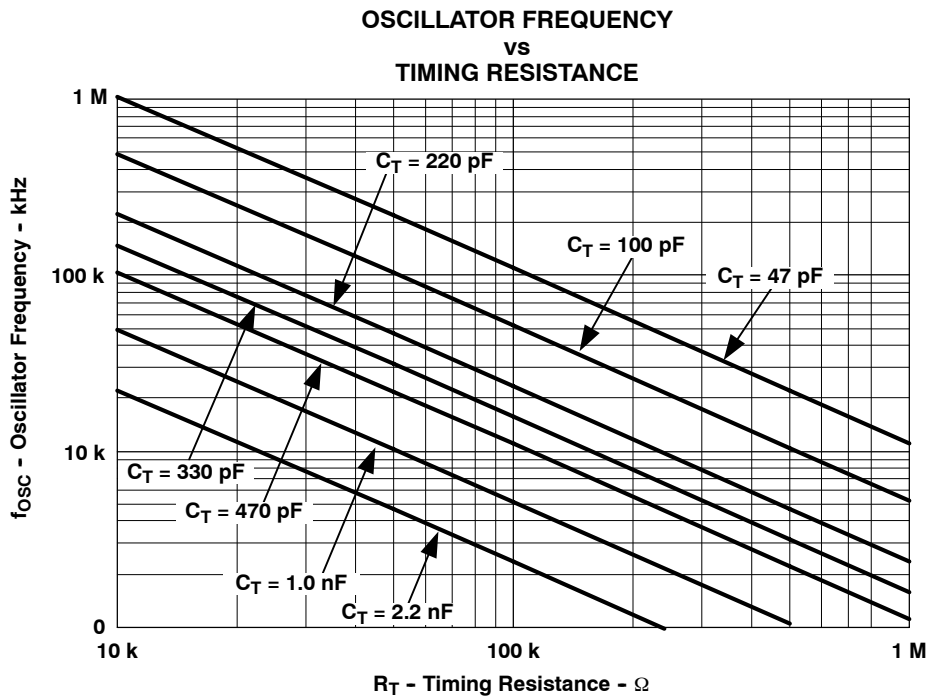

REVISION HISTORY

| DATE | REVISION | DESCRIPTION |
|---------|-------------------|---|
| 3/11/05 | SLUS272D (Rev. D) | Updated Equation 2 and 3 to remove x3 factor. |
| 5/3/05 | SLUS272E (Rev. E) | Adjusted the factors of the switching frequency, Equation 1 and modified the typical discharge current from 2.0 mA to 2.5 mA. |

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|---------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| 5962-9457501MEA | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| 5962-9457501Q2A | ACTIVE | LCCC | FK | 20 | 1 | TBD | POST-PLATE | N / A for Pkg Type |
| UCC1806J | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UCC1806J883B | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UCC1806L | ACTIVE | LCCC | FK | 20 | 1 | TBD | POST-PLATE | N / A for Pkg Type |
| UCC1806L883B | ACTIVE | LCCC | FK | 20 | 1 | TBD | POST-PLATE | N / A for Pkg Type |
| UCC2806D | ACTIVE | SOIC | D | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DG4 | ACTIVE | SOIC | D | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DTR | ACTIVE | SOIC | D | 16 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DTRG4 | ACTIVE | SOIC | D | 16 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DWG4 | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DWTR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806DWTRG4 | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806J | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UCC2806M | ACTIVE | SSOP/ QSOP | DBQ | 16 | 75 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806MG4 | ACTIVE | SSOP/ QSOP | DBQ | 16 | 75 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806MTR | ACTIVE | SSOP/ QSOP | DBQ | 16 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806MTRG4 | ACTIVE | SSOP/ QSOP | DBQ | 16 | 2500 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806N | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UCC2806NG4 | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UCC2806PW | ACTIVE | TSSOP | PW | 16 | 90 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806PWG4 | ACTIVE | TSSOP | PW | 16 | 90 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806PWTR | ACTIVE | TSSOP | PW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806PWTRG4 | ACTIVE | TSSOP | PW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC2806Q | ACTIVE | PLCC | FN | 20 | 46 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |
| UCC2806QG3 | ACTIVE | PLCC | FN | 20 | 46 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |
| UCC3806DW | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| | | | | | | no Sb/Br) | | |
| UCC3806DWG4 | ACTIVE | SOIC | DW | 16 | 40 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC3806DWTR | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC3806DWTRG4 | ACTIVE | SOIC | DW | 16 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC3806J | ACTIVE | CDIP | J | 16 | 1 | TBD | A42 | N / A for Pkg Type |
| UCC3806N | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UCC3806NG4 | ACTIVE | PDIP | N | 16 | 25 | Green (RoHS & no Sb/Br) | CU NIPDAU | N / A for Pkg Type |
| UCC3806PW | ACTIVE | TSSOP | PW | 16 | 90 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC3806PWG4 | ACTIVE | TSSOP | PW | 16 | 90 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| UCC3806Q | ACTIVE | PLCC | FN | 20 | 46 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |
| UCC3806QG3 | ACTIVE | PLCC | FN | 20 | 46 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |
| UCC3806QTR | ACTIVE | PLCC | FN | 20 | 1000 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |
| UCC3806QTRG3 | ACTIVE | PLCC | FN | 20 | 1000 | Green (RoHS & no Sb/Br) | CU SN | Level-2-260C-1 YEAR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF UCC1806, UCC2806, UCC2806M, UCC3806, UCC3806M :

- Space: [UCC1806-SP](#)

NOTE: Qualified Version Definitions:

- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|---------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|--|
| 5962-9457501MEA | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962-9457501ME A UCC1806J/883B |
| 5962-9457501Q2A | NRND | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962- 9457501Q2A UCC1806L/ 883B |
| 5962-9457501V2A | Active | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962- 9457501V2A UCC1806L QMLV |
| 5962-9457501V2A.A | Active | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962- 9457501V2A UCC1806L QMLV |
| 5962-9457501VEA | Active | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962-9457501VE A UCC1806JQMLV |
| 5962-9457501VEA.A | Active | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962-9457501VE A UCC1806JQMLV |
| UCC1806J | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | UCC1806J |
| UCC1806J.A | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | UCC1806J |
| UCC1806J883B | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962-9457501ME A UCC1806J/883B |
| UCC1806J883B.A | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962-9457501ME A UCC1806J/883B |
| UCC1806L | NRND | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | UCC1806L |
| UCC1806L.A | NRND | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | UCC1806L |
| UCC1806L883B | NRND | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962- 9457501Q2A UCC1806L/ 883B |

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-----------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|--|
| UCC1806L883B.A | NRND | Production | LCCC (FK) 20 | 55 TUBE | No | SNPB | N/A for Pkg Type | -55 to 125 | 5962- 9457501Q2A UCC1806L/ 883B |
| UCC2806D | Active | Production | SOIC (D) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806D |
| UCC2806D.A | Active | Production | SOIC (D) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806D |
| UCC2806DTR | NRND | Production | SOIC (D) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806D |
| UCC2806DTR.A | NRND | Production | SOIC (D) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806D |
| UCC2806DW | NRND | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806DW |
| UCC2806DW.A | NRND | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806DW |
| UCC2806DWG4 | NRND | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806DW |
| UCC2806DWTR | NRND | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806DW |
| UCC2806DWTR.A | NRND | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806DW |
| UCC2806J | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -40 to 85 | UCC2806J |
| UCC2806J.A | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | -40 to 85 | UCC2806J |
| UCC2806M | Active | Production | SSOP (DBQ) 16 | 75 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806M |
| UCC2806M.A | Active | Production | SSOP (DBQ) 16 | 75 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806M |
| UCC2806MTR | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806M |
| UCC2806MTR.A | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UCC2806M |
| UCC2806N | Active | Production | PDIP (N) 16 | 25 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 85 | UCC2806N |
| UCC2806N.A | Active | Production | PDIP (N) 16 | 25 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 85 | UCC2806N |
| UCC2806PW | NRND | Production | TSSOP (PW) 16 | 90 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 2806 |
| UCC2806PW.A | NRND | Production | TSSOP (PW) 16 | 90 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 2806 |
| UCC2806PWTR | NRND | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 2806 |
| UCC2806PWTR.A | NRND | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 2806 |
| UCC2806PWTRG4 | NRND | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 2806 |
| UCC3806DW | NRND | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UCC3806DW |
| UCC3806DW.A | NRND | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UCC3806DW |
| UCC3806DWG4 | NRND | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UCC3806DW |
| UCC3806DWTR | NRND | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UCC3806DW |
| UCC3806DWTR.A | NRND | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UCC3806DW |

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|---------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| UCC3806J | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | 0 to 70 | UCC3806J |
| UCC3806J.A | NRND | Production | CDIP (J) 16 | 25 TUBE | No | SNPB | N/A for Pkg Type | 0 to 70 | UCC3806J |
| UCC3806N | NRND | Production | PDIP (N) 16 | 25 TUBE | Yes | NIPDAU | N/A for Pkg Type | 0 to 70 | UCC3806N |
| UCC3806N.A | NRND | Production | PDIP (N) 16 | 25 TUBE | Yes | NIPDAU | N/A for Pkg Type | 0 to 70 | UCC3806N |
| UCC3806NG4 | NRND | Production | PDIP (N) 16 | 25 TUBE | Yes | NIPDAU | N/A for Pkg Type | 0 to 70 | UCC3806N |
| UCC3806PW | Active | Production | TSSOP (PW) 16 | 90 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | - | 3806 |
| UCC3806PW.A | Active | Production | TSSOP (PW) 16 | 90 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | 3806 |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF UCC1806, UCC1806-SP, UCC2806, UCC2806M, UCC3806, UCC3806M :

- Catalog : [UCC3806](#), [UCC1806](#), [UCC2806](#), [UCC3806M](#), [UCC3806](#)
- Military : [UCC2806M](#), [UCC1806](#), [UCC1806](#)
- Space : [UCC1806-SP](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications
- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| UCC2806DTR | SOIC | D | 16 | 2500 | 330.0 | 16.4 | 6.5 | 10.3 | 2.1 | 8.0 | 16.0 | Q1 |
| UCC2806DWTR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| UCC2806MTR | SSOP | DBQ | 16 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| UCC2806PWTR | TSSOP | PW | 16 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| UCC3806DWTR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| UCC2806DTR | SOIC | D | 16 | 2500 | 353.0 | 353.0 | 32.0 |
| UCC2806DWTR | SOIC | DW | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| UCC2806MTR | SSOP | DBQ | 16 | 2500 | 353.0 | 353.0 | 32.0 |
| UCC2806PWTR | TSSOP | PW | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| UCC3806DWTR | SOIC | DW | 16 | 2000 | 353.0 | 353.0 | 32.0 |

TUBE


*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-------------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 5962-9457501Q2A | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| 5962-9457501V2A | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| 5962-9457501V2A.A | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| UCC1806L | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| UCC1806L.A | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| UCC1806L883B | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| UCC1806L883B.A | FK | LCCC | 20 | 55 | 506.98 | 12.06 | 2030 | NA |
| UCC2806D | D | SOIC | 16 | 40 | 506.6 | 8 | 3940 | 4.32 |
| UCC2806D.A | D | SOIC | 16 | 40 | 506.6 | 8 | 3940 | 4.32 |
| UCC2806DW | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UCC2806DW.A | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UCC2806DWG4 | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UCC2806M | DBQ | SSOP | 16 | 75 | 506.6 | 8 | 3940 | 4.32 |
| UCC2806M.A | DBQ | SSOP | 16 | 75 | 506.6 | 8 | 3940 | 4.32 |
| UCC2806N | N | PDIP | 16 | 25 | 506 | 13.97 | 11230 | 4.32 |
| UCC2806N.A | N | PDIP | 16 | 25 | 506 | 13.97 | 11230 | 4.32 |
| UCC2806PW | PW | TSSOP | 16 | 90 | 508 | 8.5 | 3250 | 2.8 |
| UCC2806PW.A | PW | TSSOP | 16 | 90 | 508 | 8.5 | 3250 | 2.8 |
| UCC3806DW | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UCC3806DW.A | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UCC3806DWG4 | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UCC3806N | N | PDIP | 16 | 25 | 506 | 13.97 | 11230 | 4.32 |
| UCC3806N.A | N | PDIP | 16 | 25 | 506 | 13.97 | 11230 | 4.32 |
| UCC3806NG4 | N | PDIP | 16 | 25 | 506 | 13.97 | 11230 | 4.32 |
| UCC3806PW | PW | TSSOP | 16 | 90 | 508 | 8.5 | 3250 | 2.8 |
| UCC3806PW.A | PW | TSSOP | 16 | 90 | 508 | 8.5 | 3250 | 2.8 |

GENERIC PACKAGE VIEW


DW 16

SOIC - 2.65 mm max height

7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

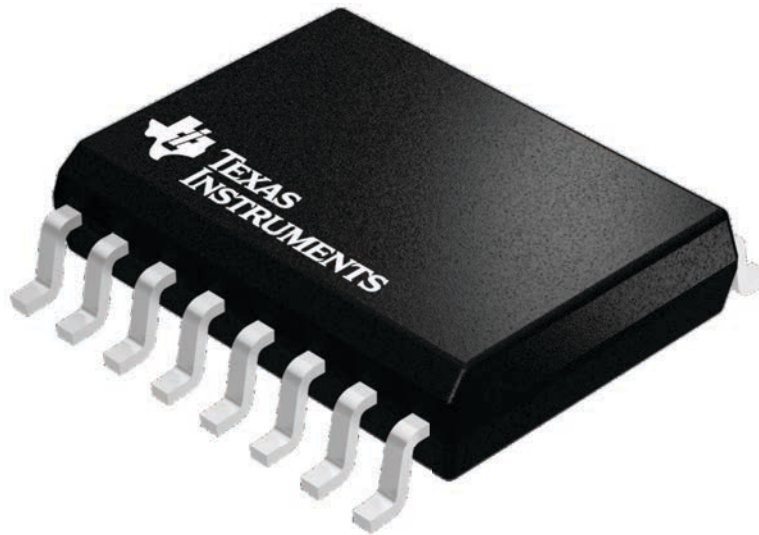


4224780/A



DW0016A

PACKAGE OUTLINE SOIC - 2.65 mm max height

SOIC

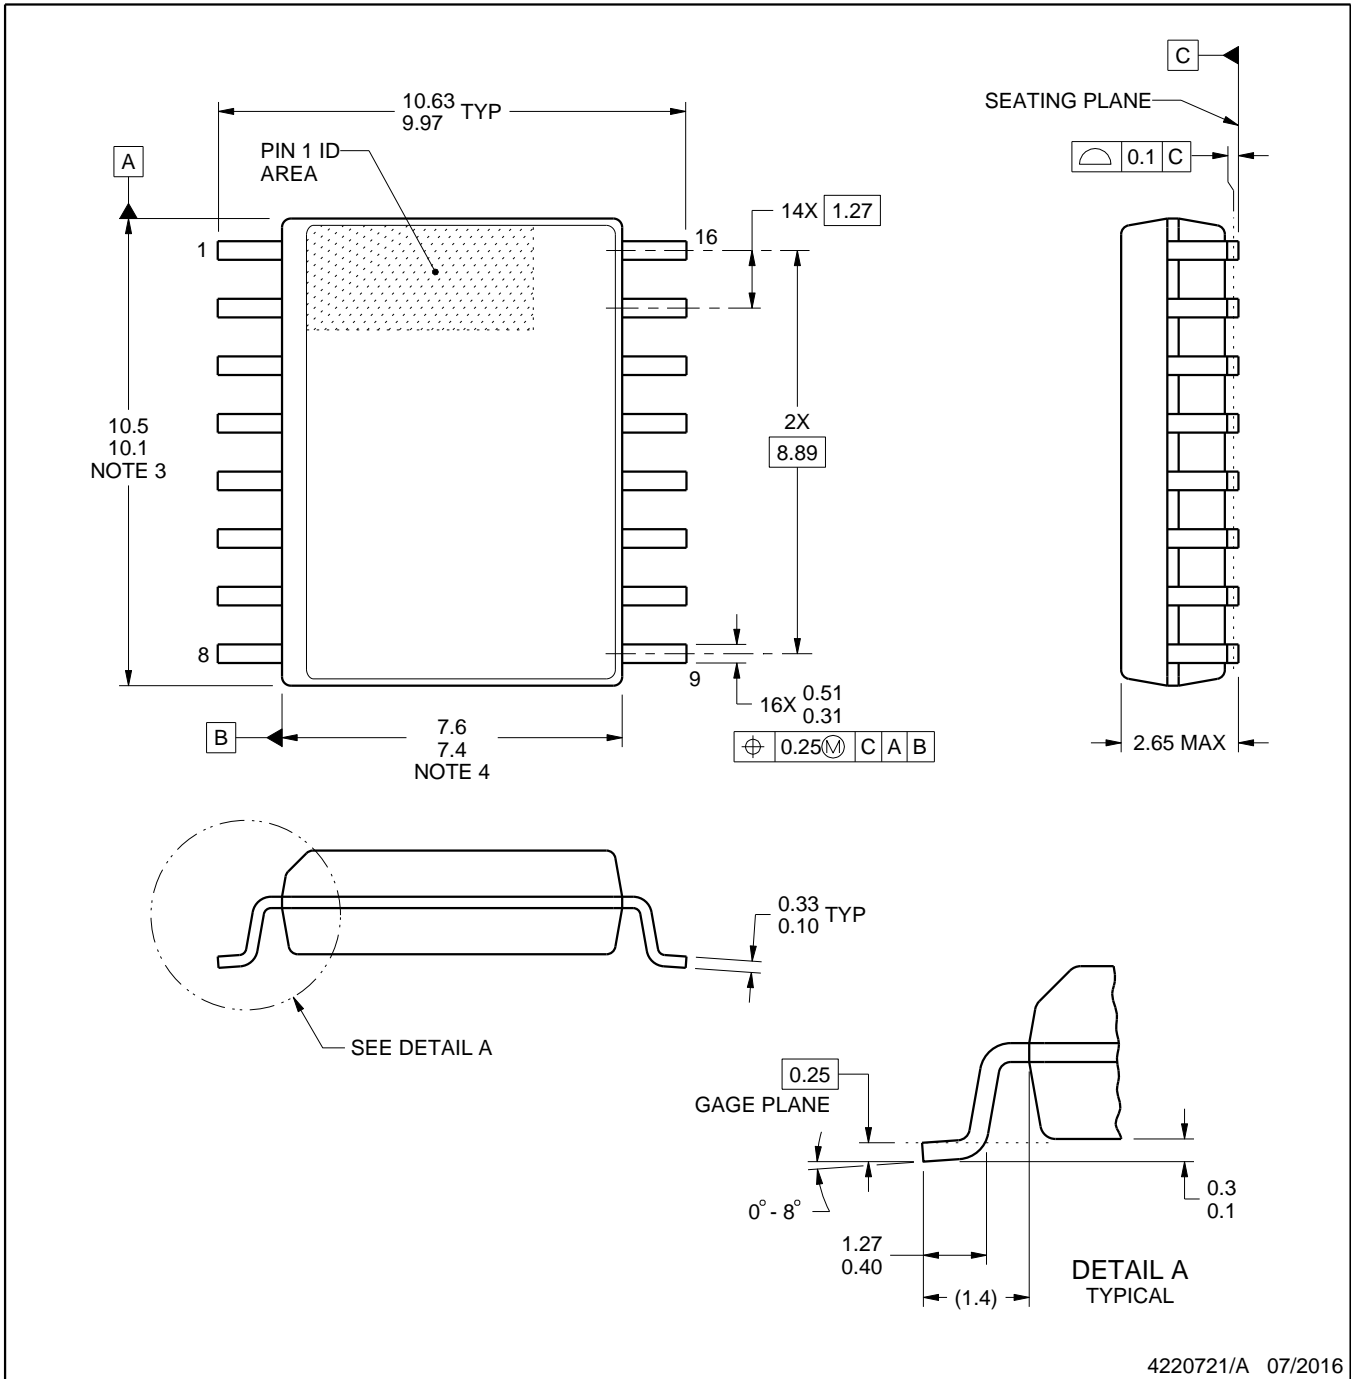

4220721/A 07/2016

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
5. Reference JEDEC registration MS-013.

EXAMPLE BOARD LAYOUT

DW0016A

SOIC - 2.65 mm max height

SOIC

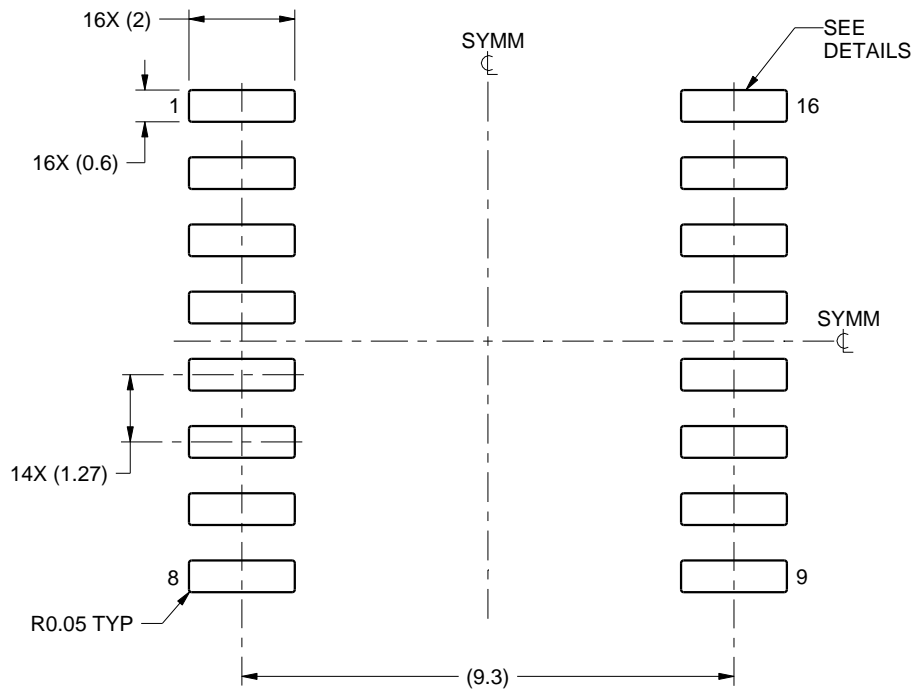

LAND PATTERN EXAMPLE
SCALE:7X



SOLDER MASK DETAILS

4220721/A 07/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DW0016A

SOIC - 2.65 mm max height

SOIC

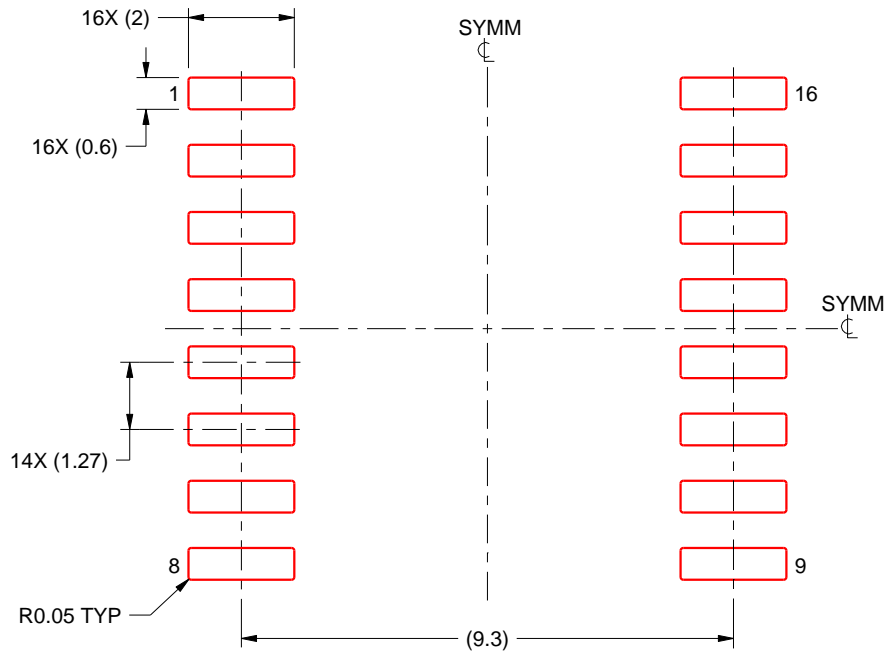

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:7X

4220721/A 07/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW

FK 20

LCCC - 2.03 mm max height

8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.



4229370VA\

J (R-GDIP-T**)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE




| DIM \ PINS ** | 14 | 16 | 18 | 20 |
|---------------|------------------------|------------------------|------------------------|------------------------|
| A | 0.300 (7,62) BSC | 0.300 (7,62) BSC | 0.300 (7,62) BSC | 0.300 (7,62) BSC |
| B MAX | 0.785 (19,94) | .840 (21,34) | 0.960 (24,38) | 1.060 (26,92) |
| B MIN | — | — | — | — |
| C MAX | 0.300 (7,62) | 0.300 (7,62) | 0.310 (7,87) | 0.300 (7,62) |
| C MIN | 0.245 (6,22) | 0.245 (6,22) | 0.220 (5,59) | 0.245 (6,22) |



4040083/F 03/03

- NOTES:
- All linear dimensions are in inches (millimeters).
 - This drawing is subject to change without notice.
 - This package is hermetically sealed with a ceramic lid using glass frit.
 - Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
 - Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

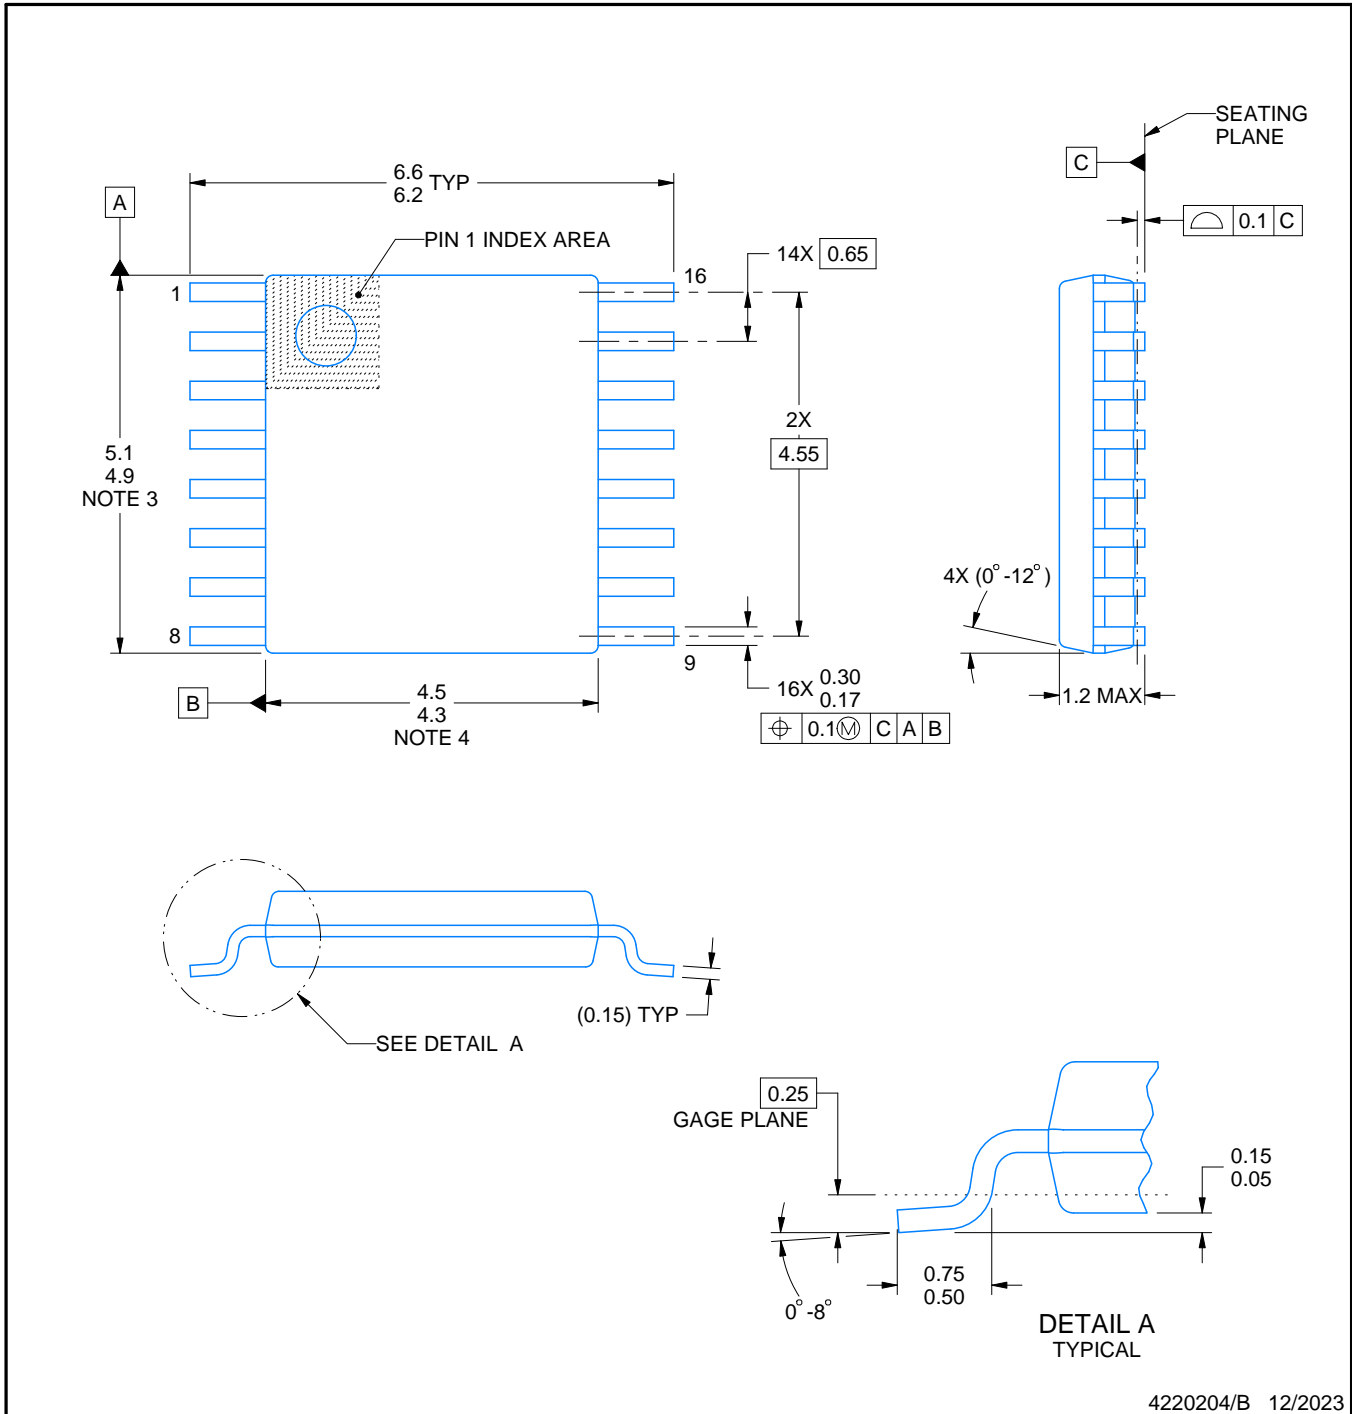

4220204/B 12/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



4220204/B 12/2023

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE




SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.




DBQ0016A

PACKAGE OUTLINE

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

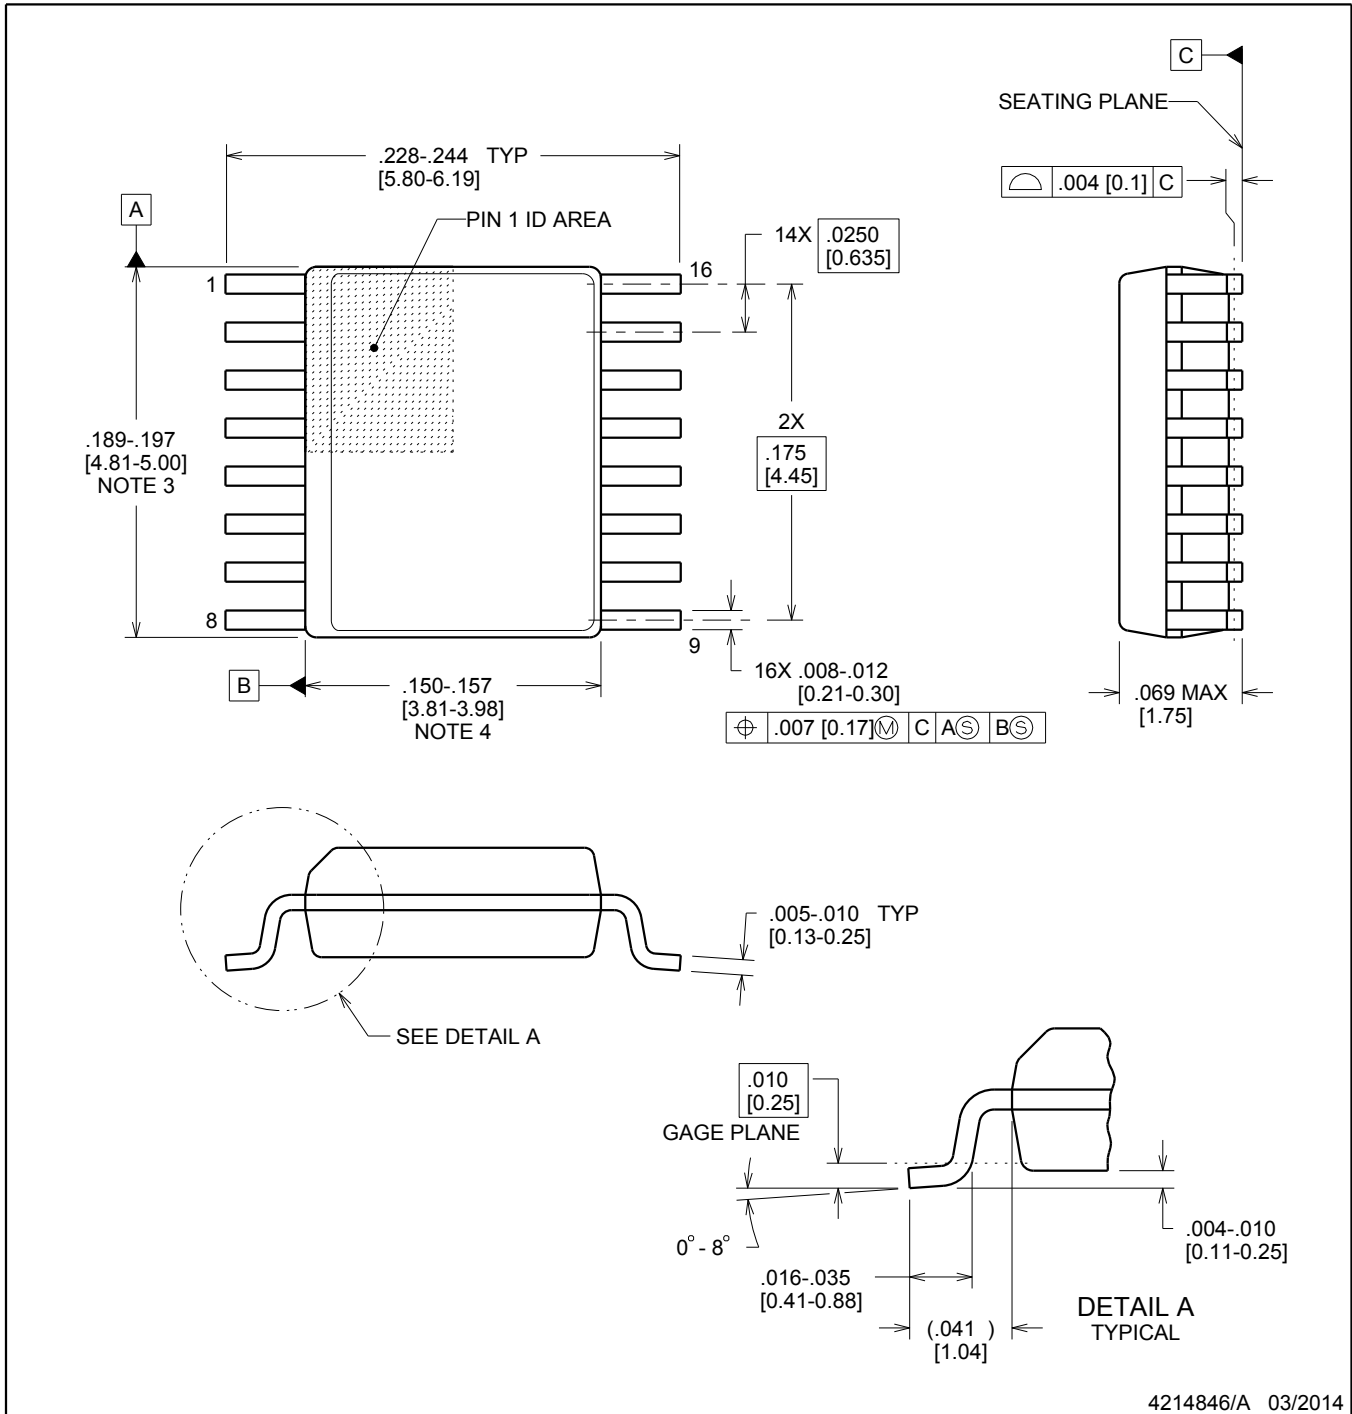

4214846/A 03/2014

NOTES:


1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 inch, per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MO-137, variation AB.

EXAMPLE BOARD LAYOUT


DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

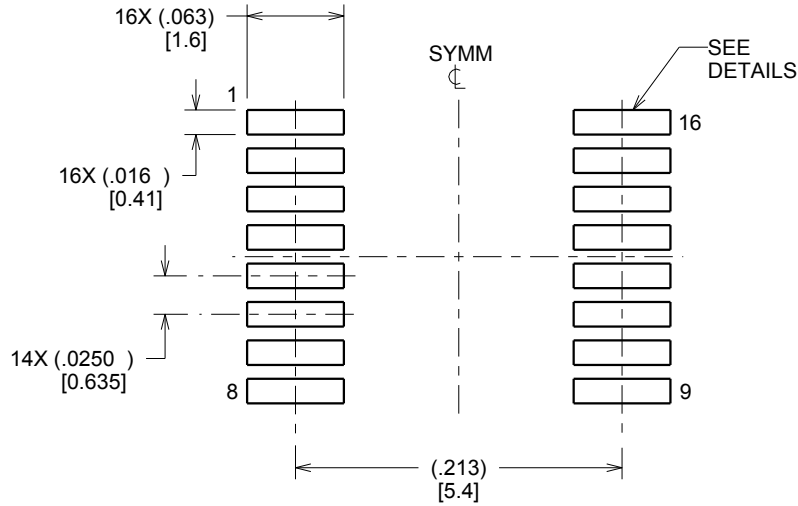

LAND PATTERN EXAMPLE
SCALE:8X

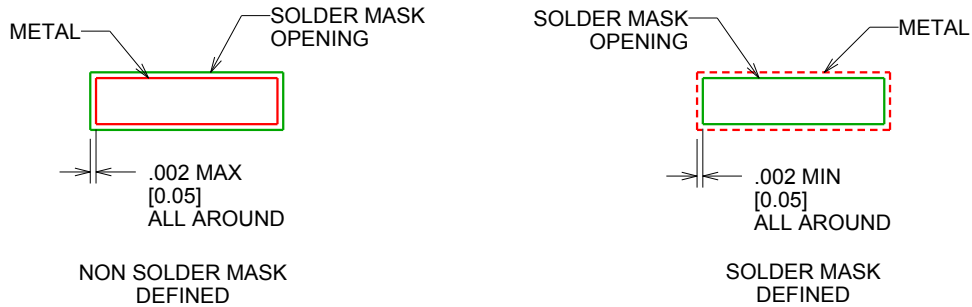

SOLDER MASK DETAILS

4214846/A 03/2014

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

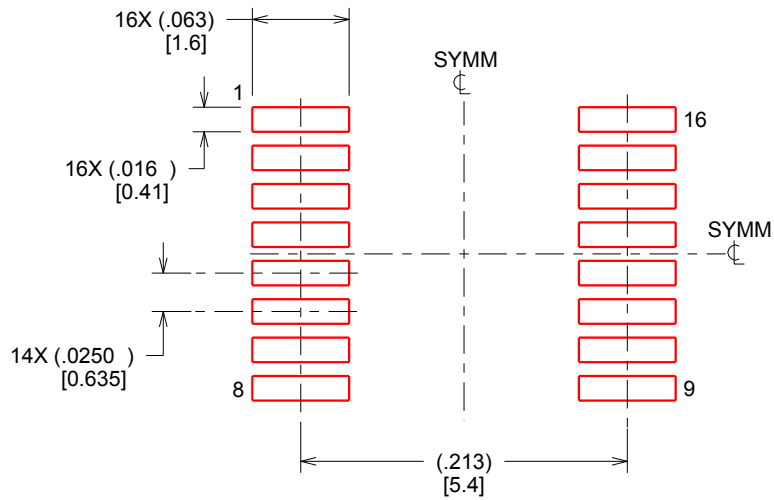

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.127 MM] THICK STENCIL
SCALE:8X

4214846/A 03/2014

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
 - D. The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AC.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025