

Understanding quality levels for high reliability-rated components



TI offers designers the ability to have confidence in their designs for applications such as personal electronics, automobiles, avionics systems, munitions and satellites. Supporting these applications requires different levels of quality and reliability, which TI provides through:

- Commercial off-the-shelf (COTS) products.
- The Automotive Electronics Council (AEC) Q100 automotive standard.
- Enhanced Products (ruggedized COTS and the Aerospace Qualified Electronic Component [AQEC] standard).
- Qualified Manufacturers List (QML) Class Q (Military Performance Specification [MIL-PRF] 38535).
- QML Class V (space-grade, radiation-tolerant MIL-PRF 38535).



HiRel Enhanced Products

Enhanced Products are the answer for avionics and defense designers who need a higher level of quality and reliability than COTS products provide. TI worked with key avionics and defense designers to produce a level of plastic-encapsulated microcircuits (PEMs) that would be reliable in critical applications yet low-cost enough for wide use. Enhanced Products are certified to meet Government Electronics and Information Technology Association (GEIA)-STD-0002-1 for AQEC, as well as meeting the qualification and processing requirements of MIL-PRF 38535 for QML Class N components. Enhanced Products mitigate the


risks that the avionics and defense markets face with COTS integrated circuits (ICs) by:

- Ensuring a single controlled baseline flow.
- Extending temperature ranges from -55°C to 125°C .
- Ensuring no tin content $>97\%$.
- Using only gold bond wires.
- Performing extended highly accelerated stress testing (HAST).
- Using rugged material sets.
- Offering an extended obsolescence policy.

In addition, each Enhanced Product is documented in a Defense Logistics Agency (DLA) vendor item drawing (VID) to eliminate the need for an original equipment manufacturer (OEM) to create a custom drawing for procurement.

Let's describe the features in Enhanced Products further.

- A single controlled baseline flow: COTS and Q100 products often have multiple fabrication facilities, assembly sites or test sites to allow for high-volume production and redundancy. Each unique flow has slight differences that can cause issues in HiRel application field use. Because of this, each individual Enhanced Product goes through one fabrication facility, one assembly site and one test site, and uses one material set. Thus, every reel of product designers receive will have as little variation as possible reel to reel. This is particularly important in the avionics or defense industries, which perform additional testing or qualification at the lot or reel level. An Enhanced Product requires only one test instead of one for each reel.
- Extended temperature ranges: Most Enhanced Products are qualified from -55°C to 125°C, extending from COTS products' 0°C to 70°C or -40° to 85°C. This is especially useful for avionics designers designing systems for the exterior of an aircraft, or defense applications with temperature-cycling requirements. Temperature cycling for Enhanced Products happens during qualification, with a temperature range from -65°C to 150°C for 500 cycles.
- No high tin content: TI guarantees that Enhanced Products' tin content will not be greater than 97%, extending to tin-silver-copper (SAC) solder at exactly 97%. When tin is subjected to large amounts of stress, it can crystallize and create a tendril that can cause electric shorts. Enhanced Products continue to use tin-lead solder balls on ball-grid array (BGA) packages, although the rest of the COTS and Q100 world have moved to high-tin-content SAC solders. Enhanced Products also use nickel-palladium-gold when possible for leaded parts, which allows Restriction of Hazardous Substances qualification on those devices.
- Gold bond wires: Due to cost optimization, COTS and Q100 products are moving toward copper bond wires across the industry. Although copper bond wire has been proven acceptable in commercial and automotive applications, the aerospace and defense industries have identified some risks to using copper bond wire in high-stress environments. The use of only gold bond wire in Enhanced Products mitigates these risks:
 - Bond integrity: copper bonding to aluminum requires much tighter process controls and environments, meaning a higher risk of issues.
 - Sporadic defective-parts-per-million (DPPM)-level corrosion caused by mold compound interaction.
 - Bond wire neck breaks during temperature cycling: The coefficient of thermal expansion (CTE) of copper is higher than gold, resulting in a higher failure rate in the presence of delamination compared to gold.
- Extended HAST: HAST evaluates moisture sensitivity and capability for long-term storage. This is often a necessary trait in defense environments because assembled equipment remains in long-term storage but must function when needed. Enhanced Products receive 250 hours of HAST testing during qualification, which is more than automotive Q100 (196 hours) and COTS products (96 hours). This gives defense designers confidence in the device functioning when required.
- Rugged material sets: Enhanced Products will use the best available material set from the selected controlled baseline, a roughened leadframe, improved mold compound (encapsulation) and mount compound (die attach). This is different from COTS products, which will generally have a material set based on cost.
- Extended obsolescence policy: TI provides a process change notification (PCN) for Enhanced Products through an electronic system, with a 180-day notification before implementing a change, one year for order placement and six months for delivery. A published TI PCN is automatically picked up by Government Industry Data Exchange Program (GIDEP) systems. This differs from COTS products, which offer a 90-day notification.

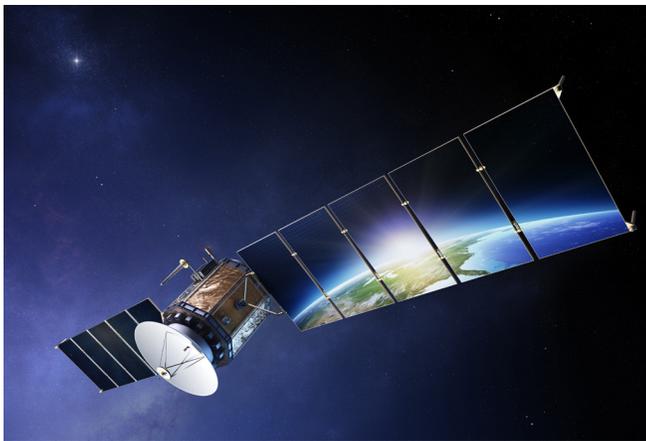

QML Class V (space grade)

TI offers the largest selection of radiation hardness assured (RHA) and radiation-tolerant products for space flight. With a proven legacy of more than 60 years in the space market supporting countless space programs both domestically and internationally, TI is a trusted partner. We focus on radiation assurance and best-in-class size, weight and power (SWaP) to enable leading-edge designs.

The breadth of TI's space portfolio provides a full signal-chain solution, including the smallest radiation-hardened point-of-load power solutions, best-in-class sensor products and some of the world's highest-performance data converters. TI space products include [MIL-PRF-38535 QML Class V](#) and RHA components. These devices are typically supported with total ionizing dose (TID) and single-event effect (SEE) test reports to address potential product degradation in a space environment. The test results for these devices are available at www.ti.com/radiation. All processing, screening and quality conformance inspection (QCI) is performed in compliance with the test methods of MIL-STD-883, Microcircuits Test Method Standard, with exceptions as allowed by Paragraph 1.1 of MIL-PRF-38535. Standard microcircuit drawings (SMDs) are located under Technical Documents in each QML Class V product folder on TI.com or the [DLA website](#).

TI provides in-depth lot documentation with each QML Class V shipment. For detailed information, see [TI's QML Lot Documents](#).

Certificate of Conformance to Defense Logistics Agency (DLA) SMD include:

- Processing Conformance Report (PCR) summarizing:
 - Assembly Lot Traceability.
 - Wafer Lot Traceability.
 - 100% Screens Performed.
 - Quality Conformance Inspection Group A.
 - Quality Conformance Inspection Group B (Generic).
 - Quality Conformance Inspection Group C (Generic).
 - Quality Conformance Inspection Wafer Lot Acceptance Testing.
- Quality Conformance Inspection Group B (Generic) Lot Test Summary Report.
- Quality Conformance Inspection Group D (Generic) Lot Test Summary Report.
- Quality Conformance Inspection Wafer Lot Acceptance/Life Test Report.
- Quality Conformance Inspection Group E Lot Test Summary Report for RHA devices, with a detailed Radiation Lot Acceptance Test (RLAT) Report available for electronic download.

For detailed information about TI's QML Class V flow and optimizations, see the [Simple QMLV/QMLQ Test Flow Matrix](#).

Space Enhanced Product

Much like the defense industry moved from QML Class Q ceramic devices to PEMs like Enhanced Products, the space industry is beginning the same shift from QML Class V for Low Earth Orbit (LEO) missions with short mission life, and requirements for small size. However there are unique challenges with the space environment that are different from the military environment: radiation requirements, thermal cycling, and outgassing. TI has addressed this with a new line of rigorously developed products, Space Enhanced Products (SEP).

Space-EP devices offer the following advantages over standard catalog products:

- Controlled baseline with one wafer fab, one assembly site, one material set.
- Optimized material set with die attach, mold compound, leadframe, and bond wire all selected to maximize reliability.

- No high tin (>97% Sn) construction including terminations (SnAgCu solderballs and Matte-Sn plating) or internal package components (die bumps or substrate plating).
- No copper bond wire. Product is either flipchip mounted (no bond wire) or uses gold bond wire.
- Additional assembly processing including 100% temperature cycle or 100% single-pass reflow simulation in lieu of temperature cycle.
- Characterization over target temperature range (-55°C to +125°C).

In addition Space-EP offers the following beyond commercial, Q-100, and standard EP product:

- Parametric testing is standard at both room and high temperatures with guardbands to assure datasheet limits at cold temperature.
- Assembly lot acceptance including x-ray sampling and CSAM sampling.
- Wafer lot acceptance using MIL-PRF-38535 QML Class V as baseline.
- Radiation Lot Acceptance Testing (Group E) to 20krad TID for each wafer lot per MIL-STD-883.
- SEL Characterization to 43 MeV-cm²/mg.
- Outgassing qualification for each product per ASTM E-595.
- Qualification to SMC-S-011.

Space applications require known radiation performance. Not only are TI Space-EP products characterized for total dose and single event radiation performance, but in many cases different wafer fabrication processes or alternate die designs are used to achieve specified levels of radiation tolerance. This is further ensured with a radiation lot acceptance test (RLAT or Group E) performed on each Space-EP wafer lot.

An OEM may be tempted to characterize one lot of product and then assume that subsequent material will perform the same. This is not always true. Depending on the process technology, some devices exhibit a significant wafer lot to wafer lot variation and, in some cases, a wafer to wafer variation. Since traceability of COTS material is only to the wafer lot level, it creates a substantial risk to the OEM.

Texas Instruments Space-EP provide a very cost effective means of mitigating the risks associated with using commercial off-the-shelf plastic encapsulated microcircuits. TI's approach, combining the best of the Enhanced Product methodology and Class V-like wafer processing, ensures a product that meets published

specifications in critical space and launch vehicle applications, while providing small size and reduced system cost.



QML Class Q (military-grade) and high-temperature products

TI is committed to a long-term continuous supply of hermetically sealed QML Class Q components for harsh environments. TI's QML products have a 60-plus-year history of longevity, reliability and wide availability. TI follows Joint Electron Device Engineering Council (JEDEC) standards for obsolescence on military-grade products, and is committed to non-obsolescence for convenience.

TI partners with an authorized aftermarket distributor to maintain a limited stock of obsolete devices for the aerospace and defense markets. TI also has the ability to reactivate obsolete devices on a limited basis. Contact your TI representative to inquire about the potential availability or reactivation of obsolete material.

TI also offers a wide selection of high-temperature products, up to 210°C, to support the petroleum exploration and production industry, as well as avionics OEMs. TI offers three types of packages to support the different application and size requirements of high-temperature electronics: ceramic packaging for 210°C, known good die (KGD) for 210°C and plastic packaging for 150°C to 175°C.

TI high-temperature ceramic and KGD parts are characterized for operation over an extended temperature range of -55°C to 210°C, and have a high-temperature operating life of 1,000 hours. In a number of cases the die is modified by TI (for example, removing thermal shutdown features) to enable extended operation. TI uses a different package material set than commercial/industrial devices to improve reliability and survivability at high temperatures for our PEMs -55°C to 175°C devices.

	Commercial	AEC-Q100	EP	QMLQ	Space EP	QMLV QMLV	QMLV-RHA
Packaging	Plastic	Plastic	Plastic	Ceramic	Plastic	Ceramic	Ceramic
Single Controlled Baseline	No	No	Yes	Yes	Yes	Yes	Yes
Bond Wires	Au/Cu	Au/Cu	Au	Al	Au	Al	Al
Can be Pure Tin (Sn)	Yes	Yes	No	No	No	No	No
Production Burn-in	No	No	No	✓	No	Yes	Yes
Radiation Tested	No	No	No	No	Yes	Yes	Yes
Radiation Assured	No	No	No	No	Yes	No	Yes
Typical Temperature Range	-40°C - 85°C	-40°C - 125°C	-55°C - 125°C*	-55°C - 125°C	-55°C - 125°C*	-55°C - 125°C	-55°C - 125°C
Extra Qualification and Process Monitors	None	X-Ray & Reflow, Outlier Control	Extended HAST, X-ray & Reflow, Outlier	MIL-PRF-38535 Group A,B,C,D	MIL-PRF-38535 "like" A, D, E	MIL-PRF-38535 Group A, B, C, D	MIL-PRF-38535 Group A, B, C, D, E
Life Test Per Wafer Lot	No	No	No	No	No	Yes	Yes
Description	Tailored for high-volume commercial applications and flexible supply	High reliability for automotive applications with flexible supply. Packages can use matte Sn and Cu bond wires.	Controlled baseline ensures more homogenous performance across lots. No Sn or Cu bond wire permitted. Uses increased reliability material set/homogeneous performance across lots. No Sn or Cu bond wire permitted. Uses increased reliability material set	Ceramic military grade parts released to a MIL spec. Intended for extreme environments and long term dormant storage	Space grade parts meant for low orbit missions. Screening for TID (Radiation Assured) High-reliability material set, similar to EP	Space grade parts release to a MIL spec. Meant for long lifetime, high reliability missions	Same as QMLV but additional lot testing and screening for TID (Radiation Assured)

TI Worldwide Technical Support

Internet

TI Semiconductor Product Information Center Home Page

support.ti.com

TI E2E™ Community Home Page

e2e.ti.com

Product Information Centers

Americas	Phone	+1(512) 434-1560
Brazil	Phone	0800-891-2616
Mexico	Phone	0800-670-7544
	Fax	+1(972) 927-6377
	Internet/Email	support.ti.com/sc/pic/americas.htm

Europe, Middle East, and Africa

Phone	
European Free Call	00800-ASK-TEXAS (00800 275 83927)
International	+49 (0) 8161 80 2121
Russian Support	+7 (4) 95 98 10 701

Note: The European Free Call (Toll Free) number is not active in all countries. If you have technical difficulty calling the free call number, please use the international number above.

Fax	+(49) (0) 8161 80 2045
Internet	www.ti.com/asktexas
Direct Email	asktexas@ti.com

Japan

Phone	Domestic	0120-92-3326
Fax	International	+81-3-3344-5317
	Domestic	0120-81-0036
Internet/Email	International	support.ti.com/sc/pic/japan.htm
	Domestic	www.tij.co.jp/pic

Asia

Phone	
International	+91-80-41381665
Domestic	Toll-Free Number
Note: Toll-free numbers do not support mobile and IP phones.	
Australia	1-800-999-084
China	800-820-8682
Hong Kong	800-96-5941
India	1-800-425-7888
Indonesia	001-803-8861-1006
Korea	080-551-2804
Malaysia	1-800-80-3973
New Zealand	0800-446-934
Philippines	1-800-765-7404
Singapore	800-886-1028
Taiwan	0800-006800

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

B090712

The platform bar and E2E are trademarks of Texas Instruments. All other trademarks are the property of their respective owners.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated