TEXAS INSTRUMENTS
TCA6408A-Q1
SCPS234A – SEPTEMBER 2016 – REVISED FEBRUARY 2023

TCA6408A-Q1 Low-Voltage 8-Bit I²C and SMBus I/O Expander With Interrupt Output

1 Features

- AEC-Q100 qualified for automotive applications
  - Temperature grade 1: –40°C to +125°C, T_A
- Functional Safety-Capable
  - Documentation available to aid functional safety system design
- I²C to parallel port expander
- Operating power-supply voltage range of 1.65 V to 3.6 V
- Allows bidirectional voltage-level translation and GPIO expansion between 1.8-, 2.5-, and 3.3-V I²C bus and P-ports
- Low standby current consumption
- 400-kHz Fast I²C Bus
- Hardware address pin allows Two TCA6408A-Q1 devices on the same I²C/SMBus bus
- Active-low reset ($\overline{\text{RESET}}$) input
- Open-drain active-low interrupt ($\overline{\text{INT}}$) output
- Input and output configuration register
- Polarity inversion register
- Internal power-on reset
- Power up with all channels configured as inputs
- No glitch on power up
- Noise filter on SCL and SDA inputs
- Latched outputs with high-current drive maximum capability for directly driving LEDs
- Latch-up performance meets 100 mA per AEC Q100-004
- Schmitt-Trigger action allows slow input transition and better switching noise immunity at the SCL and SDA inputs
- ESD protection
  - 2000-V Human body model (Q100-002)
  - 1000-V Charged-device model (Q100-011)

2 Applications

- Automotive Infotainment
- Advanced drive assistance systems (ADAS)
- Automotive body electronics
- HEV, EV, and power train
- Industrial, factory, and building automation
- Test & measurement
- EPOS

3 Description


The TCA6408A-Q1 is a 16-pin device that provides 8-bits of general purpose parallel input and output (I/O) expansion for the two-line bidirectional I²C bus (or SMBus) protocol. This device can operate with a power supply voltage ranging from 1.65 V to 3.6 V on both the I²C bus side (V_{CCI}) and on the P-port side (V_{CCP}). This allows the TCA6408A-Q1 to interface with next-generation microprocessors and microcontrollers on the SDA/SCL side, where supply levels are dropping down to conserve power. In contrast to the dropping power supplies of microprocessors and microcontrollers, some PCB components such as LEDs remain at a higher power supply.

The device supports both 100-kHz (Standard-mode) and 400-kHz (Fast-mode) clock frequencies. I/O expanders such as the TCA6408A-Q1 provide a simple solution when additional I/Os are needed for switches, sensors, push-buttons, LEDs, fans, and so forth.

Package Information

PART NUMBER	PACKAGE(1)	BODY SIZE (NOM)
TCA6408A-Q1	TSSOP (16)	5.00 mm × 4.40 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

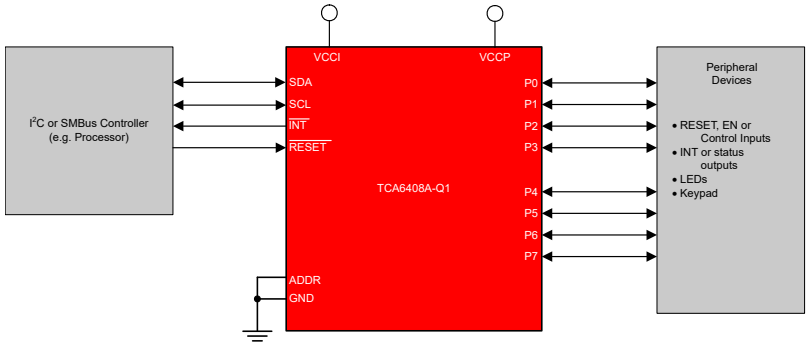

Simplified Schematic

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features....1
2 Applications....1
3 Description....1
4 Revision History....2
5 Pin Configuration and Functions....3
6 Specifications....4
6.1 Absolute Maximum Ratings....4
6.2 ESD Ratings....4
6.3 Recommended Operating Conditions....4
6.4 Thermal Information....5
6.5 Electrical Characteristics....5
6.6 I²C Interface Timing Requirements....6
6.7 Reset Timing Requirements....7
6.8 Switching Characteristics....8
6.9 Typical Characteristics....9
7 Parameter Measurement Information....12
8 Detailed Description....16
8.1 Overview....16
8.2 Functional Block Diagrams....17
8.3 Feature Description....19
8.4 Device Functional Modes....20
8.5 Programming....20
8.6 Register Map....24
9 Application and Implementation....26
9.1 Application Information....26
9.2 Typical Application....27
9.3 Power Supply Recommendations....30
9.4 Layout....31
10 Device and Documentation Support....33
10.1 Receiving Notification of Documentation Updates....33
10.2 Trademarks....33
10.3 Electrostatic Discharge Caution....33
10.4 Glossary....33
11 Support Resources....33
12 Mechanical, Packaging, and Orderable Information....33

4 Revision History

Changes from Revision * (September 2016) to Revision A (February 2023)	Page
• Changed all instances of legacy terminology to controller and target where I²C is mentioned	1
• Added Feature: AEC-Q100 qualified for automotive applications	1
• Added the HBM and CDM ESD classification levels	4
• Added paragraph: "Ramping up the device V_{CCP}" to *Power-On Reset Requirements*	30

Copyright © 2023 Texas Instruments Incorporated

5 Pin Configuration and Functions

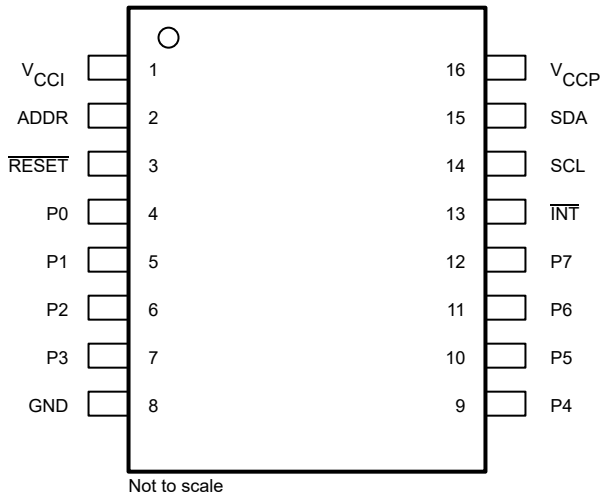


Figure 5-1. PW Package, 16-Pin TSSOP (Top View)

Table 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
ADDR	2	I	Address input. Connect directly to V_{CCP} or ground
GND	8	—	Ground
$\overline{INT}$	13	O	Interrupt output. Connect to V_{CCI} through a pull-up resistor
P0	4	I/O	P-port input-output (push-pull design structure). At power on, P0 is configured as an input
P1	5	I/O	P-port input-output (push-pull design structure). At power on, P1 is configured as an input
P2	6	I/O	P-port input-output (push-pull design structure). At power on, P2 is configured as an input
P3	7	I/O	P-port input-output (push-pull design structure). At power on, P3 is configured as an input
P4	9	I/O	P-port input-output (push-pull design structure). At power on, P4 is configured as an input
P5	10	I/O	P-port input-output (push-pull design structure). At power on, P5 is configured as an input
P6	11	I/O	P-port input-output (push-pull design structure). At power on, P6 is configured as an input
P7	12	I/O	P-port input-output (push-pull design structure). At power on, P7 is configured as an input
$\overline{RESET}$	3	I	Active-low reset input. Connect to V_{CCI} through a pull-up resistor, if no active connection is used
SCL	14	I	Serial clock bus. Connect to V_{CCI} through a pull-up resistor
SDA	15	I/O	Serial data bus. Connect to V_{CCI} through a pull-up resistor
V_{CCI}	1	—	Supply voltage of I^2C bus. Connect directly to the V_{CC} of the external I^2C controller. Provides voltage level translation
V_{CCP}	16	—	Supply voltage of TCA6408A-Q1 for P-ports

Copyright © 2023 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (see (1))

				MIN	MAX	UNIT
V_{CCI}	Supply voltage for I^2C pins			–0.5	3.6	V
V_{CCP}	Supply voltage for P-ports			–0.5	3.6	V
V_I	Input voltage(2)			–0.5	3.6	V
V_O	Output voltage(2)			–0.5	3.6	V
I_{IK}	Input clamp current	ADDR, $\overline{RESET}$, SCL	$V_I < 0$		±20	mA
I_{OK}	Output clamp current	$\overline{INT}$	$V_O < 0$		±20	mA
I_{IOK}	Input/output clamp current	P-port	$V_O < 0$ or $V_O > V_{CCP}$		±20	mA
		SDA	$V_O < 0$ or $V_O > V_{CCI}$		±20	
I_{OL}	Continuous output low current	P-port	V_O = 0 to V_{CCP}		50	mA
	Continuous output low current	SDA, $\overline{INT}$	V_O = 0 to V_{CCI}		25	
I_{OH}	Continuous output high current	P-port	V_O = 0 to V_{CCP}		50	mA
I_{CC}	Continuous current through GND				200	mA
	Continuous current through V_{CCP}				160	
	Continuous current through V_{CCI}				10	
$T_{j(MAX)}$	Maximum junction temperature				135	°C
T_{stg}	Storage temperature			–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per AEC Q100-002(1) HBM ESD classification level 1C	±2000	V
		Charged-device model (CDM), per AEC Q100-011 CDM ESD classification level C6	±1000	

(1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_{CCI} (1)	Supply voltage for I^2C pins	SCL, SDA, $\overline{INT}$	1.65	3.6	V
V_{CCP}	Supply voltage for P-ports	P-ports, ADDR, $\overline{RESET}$	1.65	3.6	V
V_{IH}	High-level input voltage	SCL, SDA	0.7 × V_{CCI}	V_{CCI}	V
		$\overline{RESET}$	0.7 × V_{CCI}	3.6	
		ADDR, P7–P0	0.7 × V_{CCP}	3.6	
V_{IL}	Low-level input voltage	SCL, SDA, $\overline{RESET}$	–0.5	0.3 × V_{CCI}	V
		ADDR, P7–P0	–0.5	0.3 × V_{CCP}	
I_{OH}	High-level output current	P00-P07		10	mA

Copyright © 2023 Texas Instruments Incorporated

6.3 Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)

				MIN	MAX	UNIT
I_{OL} (2)	Low-level output current	P00-P07	T_j = 65°C		25	mA
			T_j = 85°C		18	
			T_j = 105°C		9	
			T_j = 125°C		4.5	
			T_j = 135°C		3.5	
		$\overline{INT}$, SDA	T_j = 85°C		6	
			T_j = 105°C		3	
			T_j = 125°C		1.8	
			T_j = 135°C		1.5	
T_A	Operating free-air temperature			–40	125	°C

(1) For voltages applied above V_{CCI}, and increase in I_{CC} will result.
(2) The values shown apply to specific junction temperature. See the *Section 9.2.1.1* section on how to calculate the junction temperature.

6.4 Thermal Information

THERMAL METRIC(1)		TCA6408A-Q1 PW (TSSOP) 16 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	122	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	56.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	67.1	°C/W
ψ_{JT}	Junction-to-top characterization parameter	10.8	°C/W
ψ_{JB}	Junction-to-board characterization parameter	66.5	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

6.5 Electrical Characteristics

over recommended operating free-air temperature range, V_{CCI} = 1.65 V to 3.6 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	V_{CCP}	MIN	TYP(1)	MAX	UNIT
V_{IK}	Input diode clamp voltage	I_I = –18 mA	1.65 V to 3.6 V	–1.2			V
V_{PORR}	Power-on reset voltage, V_{CCP} rising(2)	V_I = V_{CCP} or GND, I_O = 0	1.65 V to 3.6 V		1.2	1.5	V
V_{PORF}	Power-on reset voltage, V_{CCP} falling(2)	V_I = V_{CCP} or GND, I_O = 0	1.65 V to 3.6 V	0.6	1		V
V_{OH}	P-port high-level output voltage	I_{OH} = –8 mA	1.65 V	1.2			V
			2.3 V	1.8			
			3 V	2.6			
			3.6 V	3.3			
		I_{OH} = –10 mA	1.65 V	1.0			
			2.3 V	1.7			
			3 V	2.5			
			3.6 V	3.2			

Copyright © 2023 Texas Instruments Incorporated

6.5 Electrical Characteristics (continued)

over recommended operating free-air temperature range, V_{CCI} = 1.65 V to 3.6 V (unless otherwise noted)

PARAMETER			TEST CONDITIONS	V_{CCP}	MIN	TYP(1)	MAX	UNIT
V_{OL}	P-port low-level output voltage		I_{OL} = 8 mA	1.65 V			0.45	V
				2.3 V			0.25	
				3 V			0.25	
				3.6 V			0.23	
			I_{OL} = 10 mA	1.65 V			0.6	
				2.3 V			0.3	
				3 V			0.25	
				3.6 V			0.23	
I_{OL}	SDA		V_{OL} = 0.4 V	1.65 V to 3.6 V	3			mA
	$\overline{INT}$				3	15		
I_I	SCL, SDA, $\overline{RESET}$		$V_I = V_{CCI}$ or GND	1.65 V to 3.6 V			±0.1	µA
	ADDR		$V_I = V_{CCP}$ or GND				±0.1	
I_{IH}	P-port		$V_I = V_{CCP}$	1.65 V to 3.6 V			1	µA
I_{IL}	P-port		V_I = GND	1.65 V to 3.6 V			1	µA
I_{CC} (I_{CCI} + I_{CCP})	Operating mode	SDA, P-port, ADDR, $\overline{RESET}$	$V_I = V_{CC}$ or GND, I/O = inputs, f_{SCL} = 400 kHz, No load	2.3 V to 3.6 V		9	36	µA
				1.65 V to 2.3 V		5	33	
	Standby mode	SCL, SDA, P-port, ADDR, $\overline{RESET}$	$V_I = V_{CC}$ or GND, I/O = inputs, f_{SCL} = 0 kHz, No load	2.3 V to 3.6 V		1.2	10	
				1.65 V to 2.3 V		0.6	7	
ΔI_{CCI}	Additional current in standby mode	SCL, SDA	One input at V_{CCI} – 0.6 V, Other inputs at V_{CCI} or GND	1.65 V to 3.6 V		6	10	µA
		$\overline{RESET}$	$\overline{RESET}$ at V_{CCI} – 0.6 V, Other inputs at V_{CCI} or GND			6	55	
ΔI_{CCP}		P-port, ADDR	One input at V_{CCP} – 0.6 V, Other inputs at V_{CCP} or GND	1.65 V to 3.6 V		6	80	µA
C_i	SCL		$V_I = V_{CCI}$ or GND	1.65 V to 3.6 V		7	9	pF
C_{io}	SDA		$V_{IO} = V_{CCI}$ or GND	1.65 V to 3.6 V		8	10.5	pF
	P-port		$V_{IO} = V_{CCP}$ or GND			7	8	

(1) All typical values are at nominal supply voltage (1.8-V, 2.5-V, or 3.3-V V_{CC}) and T_A = 25°C.
(2) When power (from 0 V) is applied to V_{CCP}, an internal power-on reset holds the TCA6408A-Q1 in a reset condition until V_{CCP} has reached V_{PORR}. At that time, the reset condition is released, and the TCA6408A-Q1 registers and I²C/SMBus state machine initialize to their default states. After that, V_{CCP} must be lowered to below V_{PORF} and back up to the operating voltage for a power-reset cycle.

6.6 I²C Interface Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 7-1)

		MIN	MAX	UNIT
I²C BUS—STANDARD MODE				
f_{scl}	I²C clock frequency	0	100	kHz
t_{sch}	I²C clock high time	4		µs
t_{scl}	I²C clock low time	4.7		µs
t_{sp}	I²C spike time	0	50	ns
t_{sds}	I²C serial data setup time	250		ns
t_{sdh}	I²C serial data hold time	0		ns
t_{icr}	I²C input rise time		1000	ns
t_{icf}	I²C input fall time		300	ns

Copyright © 2023 Texas Instruments Incorporated

6.6 I²C Interface Timing Requirements (continued)

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 7-1)

		MIN	MAX	UNIT
t_{ocf}	I²C output fall time, 10-pF to 400-pF bus		300	ns
t_{buf}	I²C bus free time between Stop and Start	4.7		µs
t_{sts}	I²C Start or repeater Start condition setup time	4.7		µs
t_{sth}	I²C Start or repeater Start condition hold time	4		µs
t_{sps}	I²C Stop condition setup time	4		µs
$t_{vd(data)}$	Valid data time, SCL low to SDA output valid		1	µs
$t_{vd(ack)}$	Valid data time of ACK condition, ACK signal from SCL low to SDA (out) low		1	µs
I²C BUS—FAST MODE				
f_{scl}	I²C clock frequency	0	400	kHz
t_{sch}	I²C clock high time	0.6		µs
t_{scl}	I²C clock low time	1.3		µs
t_{sp}	I²C spike time	0	50	ns
t_{sds}	I²C serial data setup time	100		ns
t_{sdh}	I²C serial data hold time	0		ns
t_{icr}	I²C input rise time	20	300	ns
t_{icf}	I²C input fall time	20 x (Vcc/ 5.5 V)	300	ns
t_{ocf}	I²C output fall time, 10-pF to 400-pF bus	20 x (Vcc/ 5.5 V)	300	ns
t_{buf}	I²C bus free time between Stop and Start	1.3		µs
t_{sts}	I²C Start or repeater Start condition setup time	0.6		µs
t_{sth}	I²C Start or repeater Start condition hold time	0.6		µs
t_{sps}	I²C Stop condition setup time	0.6		µs
$t_{vd(data)}$	Valid data time, SCL low to SDA output valid		1	µs
$t_{vd(ack)}$	Valid data time of ACK condition, ACK signal from SCL low to SDA (out) low		1	µs

6.7 Reset Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 7-4)

		MIN	MAX	UNIT
I²C BUS—STANDARD and FAST MODE				
t_W	Reset pulse duration	40		ns
t_{REC}	Reset recovery time	0		ns
t_{RESET}	Time to reset	600		ns

Copyright © 2023 Texas Instruments Incorporated

6.8 Switching Characteristics

over recommended operating free-air temperature range, $C_L \leq 100$ pF (unless otherwise noted) (see Figure 7-1)

PARAMETER		FROM (INPUT)	TO (OUTPUT)	MIN	MAX	UNIT
I²C BUS—STANDARD and FAST MODE						
t_{iv}	Interrupt valid time	P-Port	$\overline{INT}$		4	µs
t_{ir}	Interrupt reset delay time	SCL	$\overline{INT}$		4	µs
t_{pv}	Output data valid	SCL	P7–P0		400	ns
t_{ps}	Input data setup time	P-Port	SCL	0		ns
t_{ph}	Input data hold time	P-Port	SCL	300		ns

Copyright © 2023 Texas Instruments Incorporated

6.9 Typical Characteristics

T_A = 25°C (unless otherwise noted)

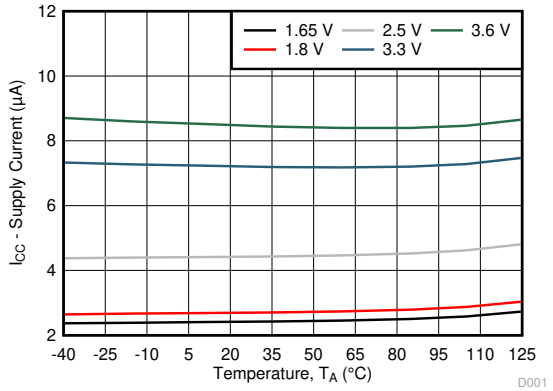


Figure 6-1. Supply Current vs Temperature

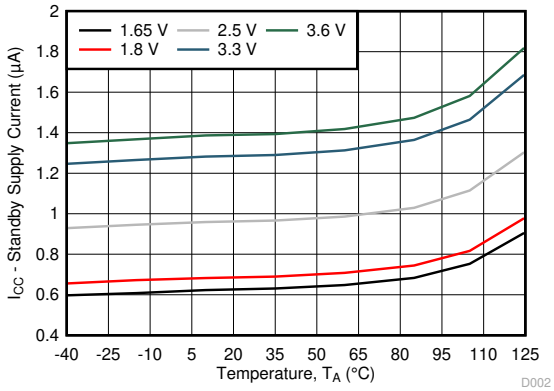


Figure 6-2. Standby Supply Current vs Temperature

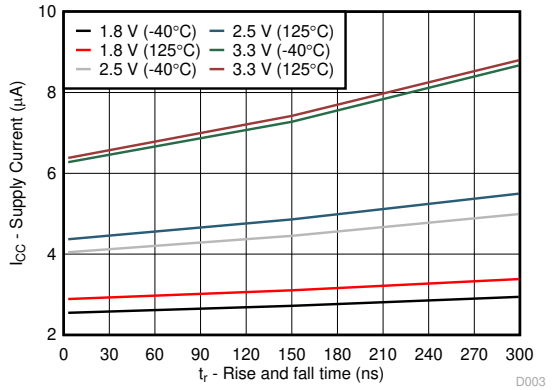


Figure 6-3. Supply Current vs Rise and Fall Times (t_r)

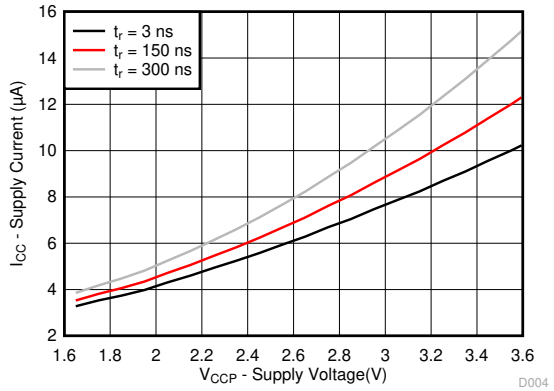


Figure 6-4. Supply Current vs Supply Voltage

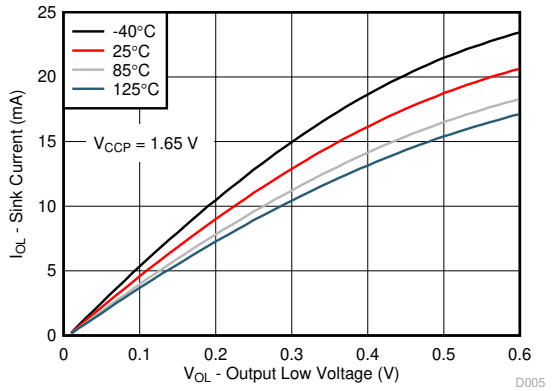


Figure 6-5. I/O Sink Current vs Output Low Voltage (V_{CCP} = 1.65 V)

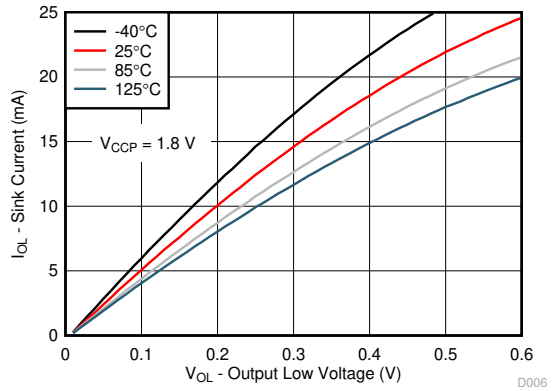


Figure 6-6. I/O Sink Current vs Output Low Voltage (V_{CCP} = 1.8 V)

Copyright © 2023 Texas Instruments Incorporated

6.9 Typical Characteristics (continued)

T_A = 25°C (unless otherwise noted)

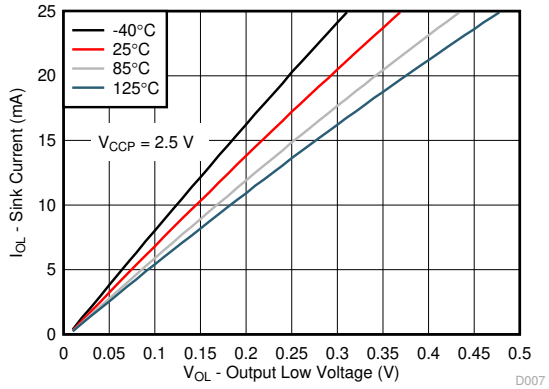


Figure 6-7. I/O Sink Current vs Output Low Voltage (V_{CCP} = 2.5 V)

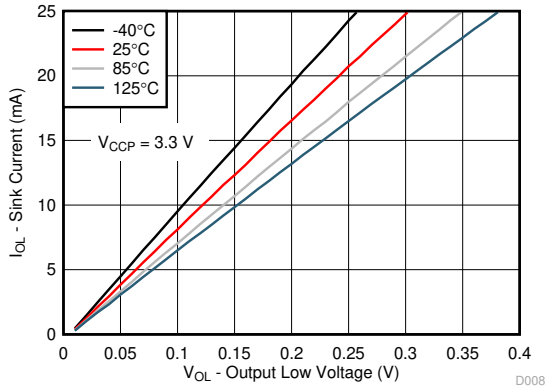


Figure 6-8. I/O Sink Current vs Output Low Voltage (V_{CCP} = 3.3 V)

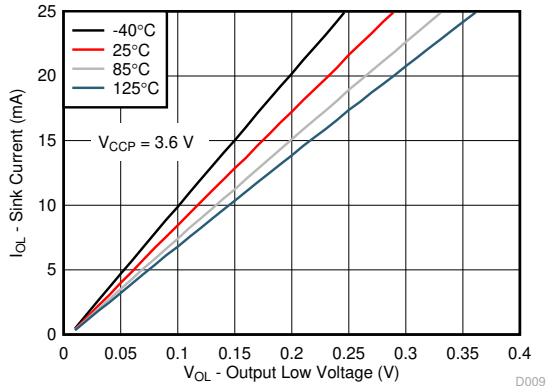


Figure 6-9. I/O Sink Current vs Temperature (V_{CCP} = 3.6 V)

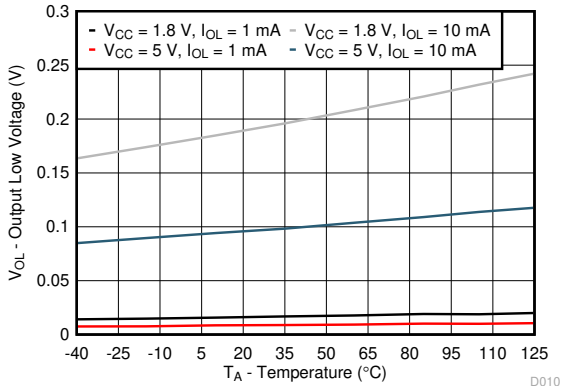


Figure 6-10. I/O Low Voltage vs Temperature

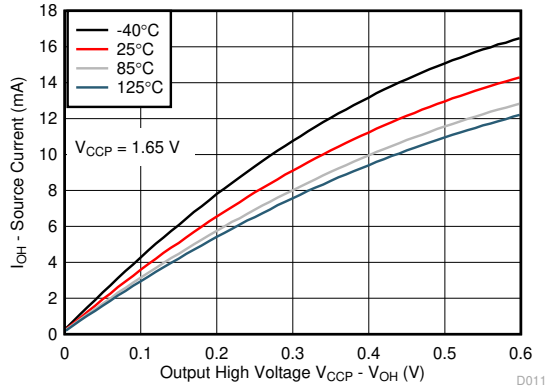


Figure 6-11. I/O Source Current vs Output High Voltage (V_{CCP} = 1.65 V)

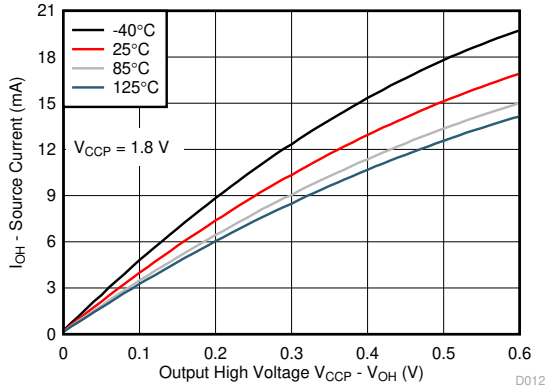


Figure 6-12. I/O Source Current vs Output High Voltage (V_{CCP} = 1.8 V)

Copyright © 2023 Texas Instruments Incorporated

6.9 Typical Characteristics (continued)

T_A = 25°C (unless otherwise noted)

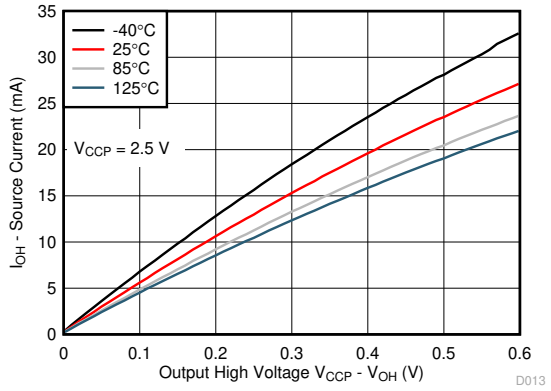


Figure 6-13. I/O Source Current vs Output High Voltage (V_{CCP} = 2.5 V)

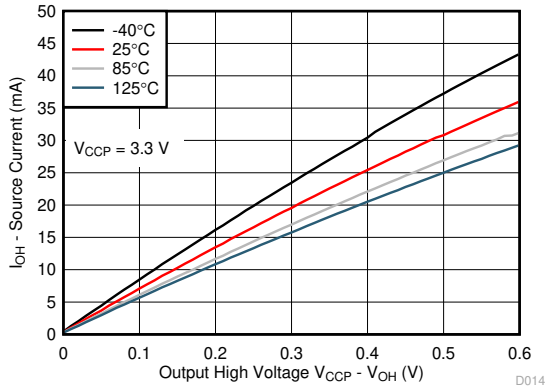


Figure 6-14. I/O Source Current vs Output High Voltage (V_{CCP} = 3.3 V)

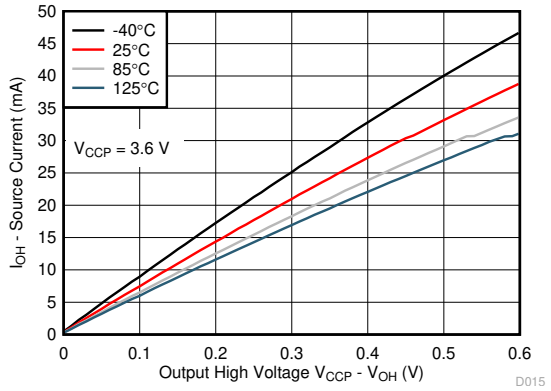


Figure 6-15. I/O Source Current vs Output High Voltage (V_{CCP} = 3.6 V)



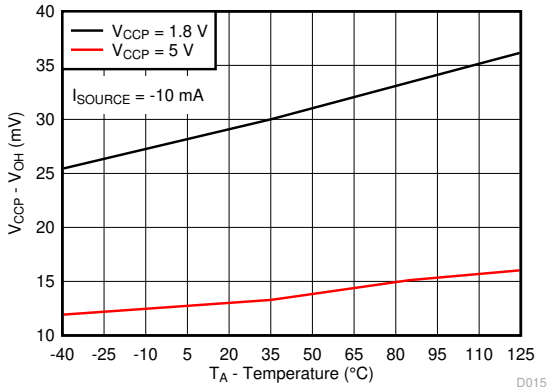


Figure 6-16. I/O High Voltage vs Temperature

7 Parameter Measurement Information



SDA LOAD CONFIGURATION

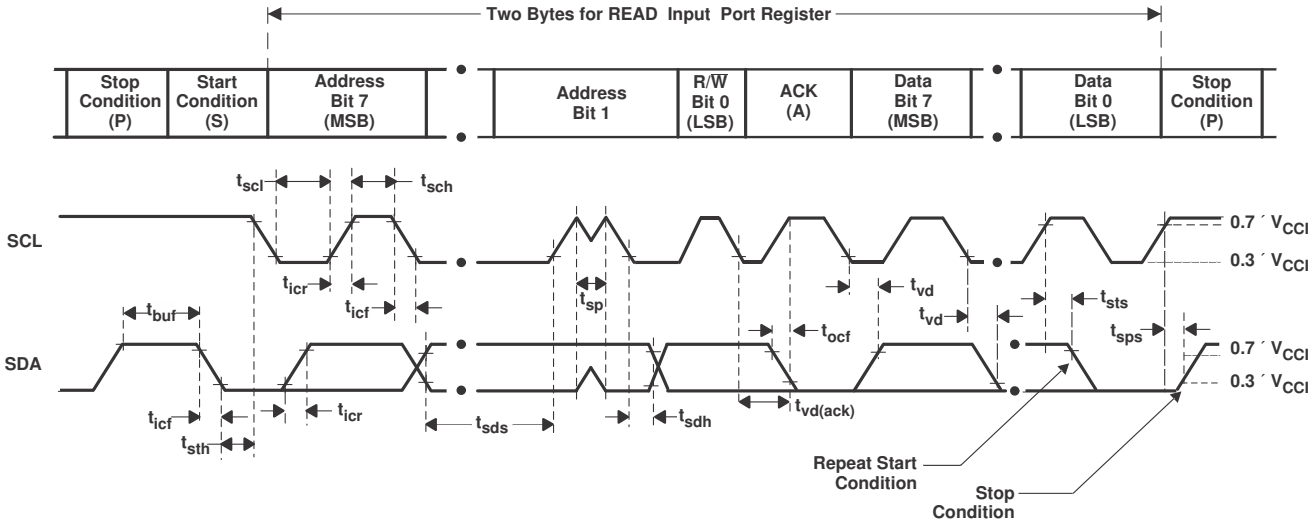

VOLTAGE WAVEFORMS


BYTE	DESCRIPTION
1	I^2C address
2	Input register port data

A. C_L includes probe and jig capacitance. t_{ocf} is measured with C_L of 10 pF or 400 pF.


B. All inputs are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r/t_f ≤ 30 ns.

Figure 7-1. I^2C Interface Load Circuit and Voltage Waveforms

Copyright © 2023 Texas Instruments Incorporated



INTERRUPT LOAD CONFIGURATION

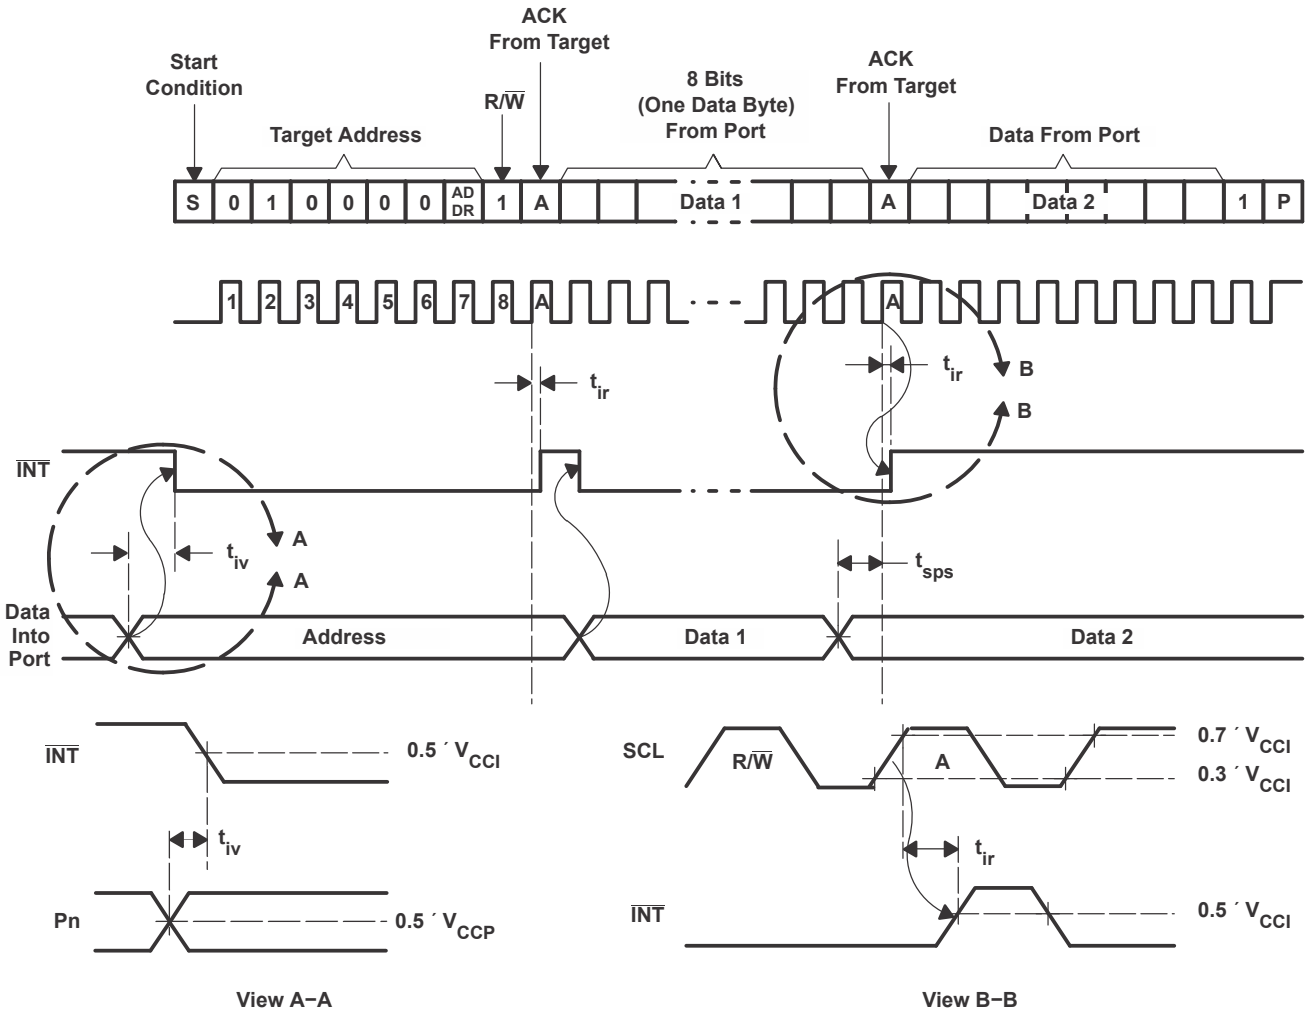


A. C_L includes probe and jig capacitance.


B. All inputs are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r/t_f ≤ 30 ns.

Figure 7-2. Interrupt Load Circuit and Voltage Waveforms


Copyright © 2023 Texas Instruments Incorporated

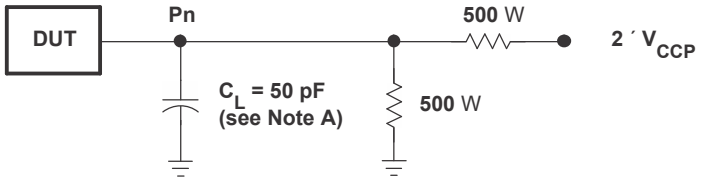

P-PORT LOAD CONFIGURATION

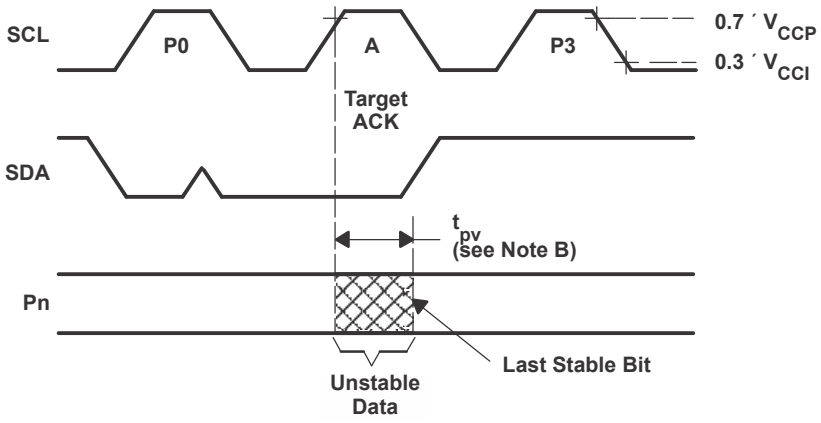

WRITE MODE (R/$\overline{W}$ = 0)

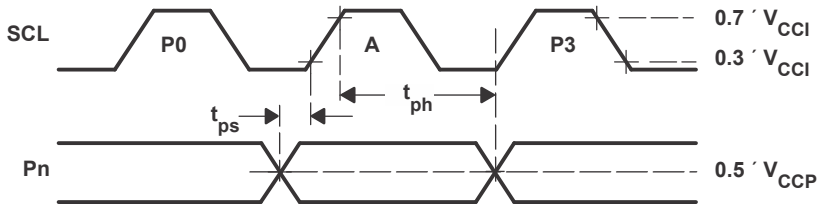


READ MODE (R/$\overline{W}$ = 1)

A. C_L includes probe and jig capacitance.
B. t_{pv} is measured from 0.7 × V_{CC} on SCL to 50% I/O (Pn) output.
C. All inputs are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r/t_f ≤ 30 ns.
D. The outputs are measured one at a time, with one transition per measurement.

Figure 7-3. P-Port Load Circuit and Timing Waveforms

Copyright © 2023 Texas Instruments Incorporated

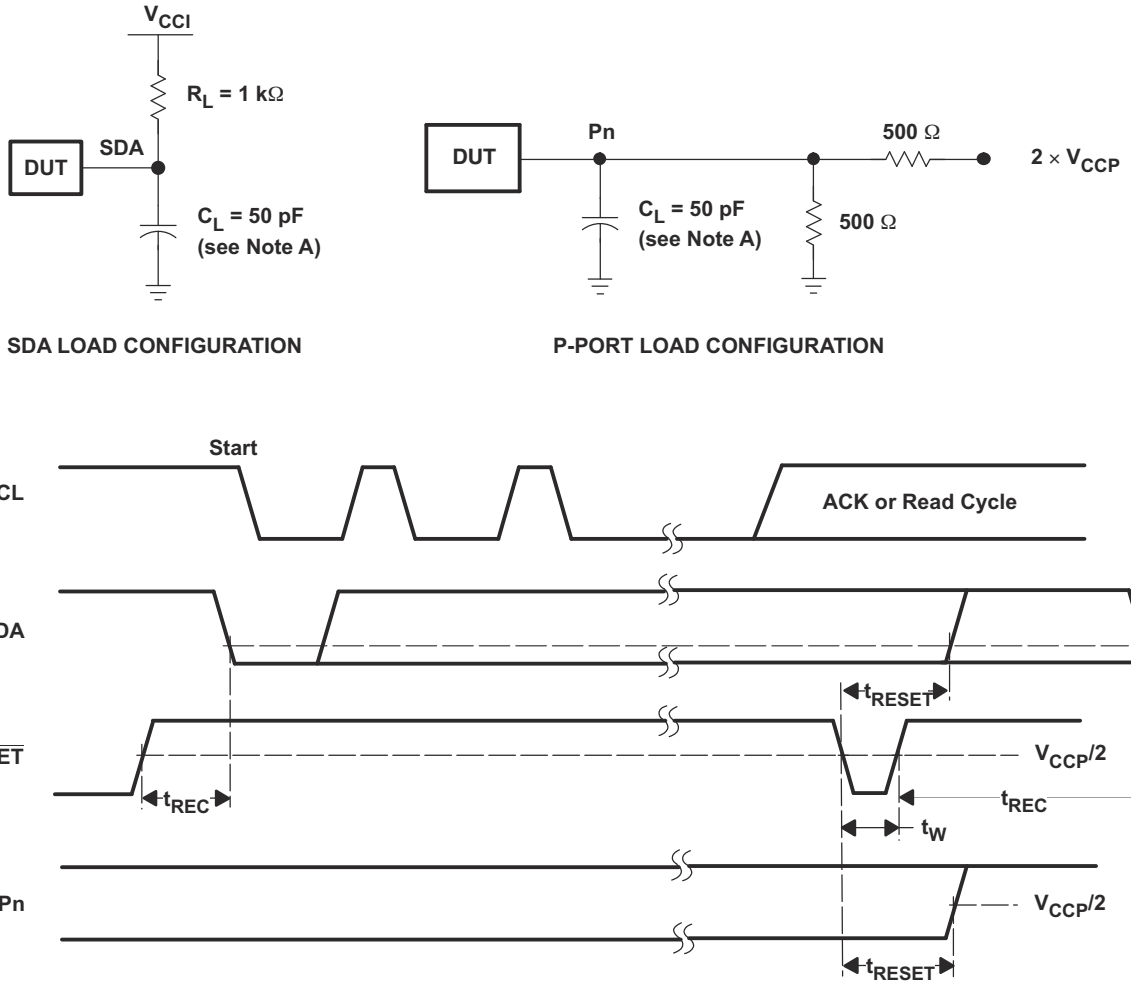

A. C_L includes probe and jig capacitance.
B. All inputs are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r/t_f ≤ 30 ns.
C. The outputs are measured one at a time, with one transition per measurement.
D. I/Os are configured as inputs.

Figure 7-4. Reset Load Circuits and Voltage Waveforms

8 Detailed Description

8.1 Overview

The bidirectional voltage-level translation in the TCA6408A-Q1 is provided through V_{CCI}. V_{CCI} must be connected to the V_{CC} of the external SCL/SDA lines. This indicates the V_{CC} level of the I^2C bus to the TCA6408A-Q1. The voltage level on the P-port of the TCA6408A-Q1 is determined by V_{CCP}.

The TCA6408A-Q1 consists of one 8-bit Configuration (input or output selection), Input, Output, and Polarity Inversion (active high) Register. At power on, the I/Os are configured as inputs. However, the system controller can enable the I/Os as either inputs or outputs by writing to the I/O configuration bits. The data for each input or output is kept in the corresponding Input or Output Register. The polarity of the Input Port Register can be inverted with the Polarity Inversion Register. All registers can be read by the system controller.

The system controller can reset the TCA6408A-Q1 in the event of a timeout or other improper operation by asserting a low in the $\overline{\text{RESET}}$ input. The power-on reset puts the registers in their default state and initializes the I^2C/SMBus state machine. The $\overline{\text{RESET}}$ pin causes the same reset/initialization to occur without depowering the part.

The TCA6408A-Q1 open-drain interrupt ($\overline{\text{INT}}$) output is activated when any input state differs from its corresponding Input Port Register state and is used to indicate to the system controller that an input state has changed.


$\overline{\text{INT}}$ can be connected to the interrupt input of a microcontroller. By sending an interrupt signal on this line, the remote I/O can inform the microcontroller if there is incoming data on its ports without having to communicate via the I^2C bus. Thus, the TCA6408A-Q1 can remain a simple target device.

The device P-port outputs have high-current sink capabilities for directly driving LEDs while consuming low device current.

One hardware pin (ADDR) can be used to program and vary the fixed I^2C address and allow up to two devices to share the same I^2C bus or SMBus.

Copyright © 2023 Texas Instruments Incorporated

8.2 Functional Block Diagrams

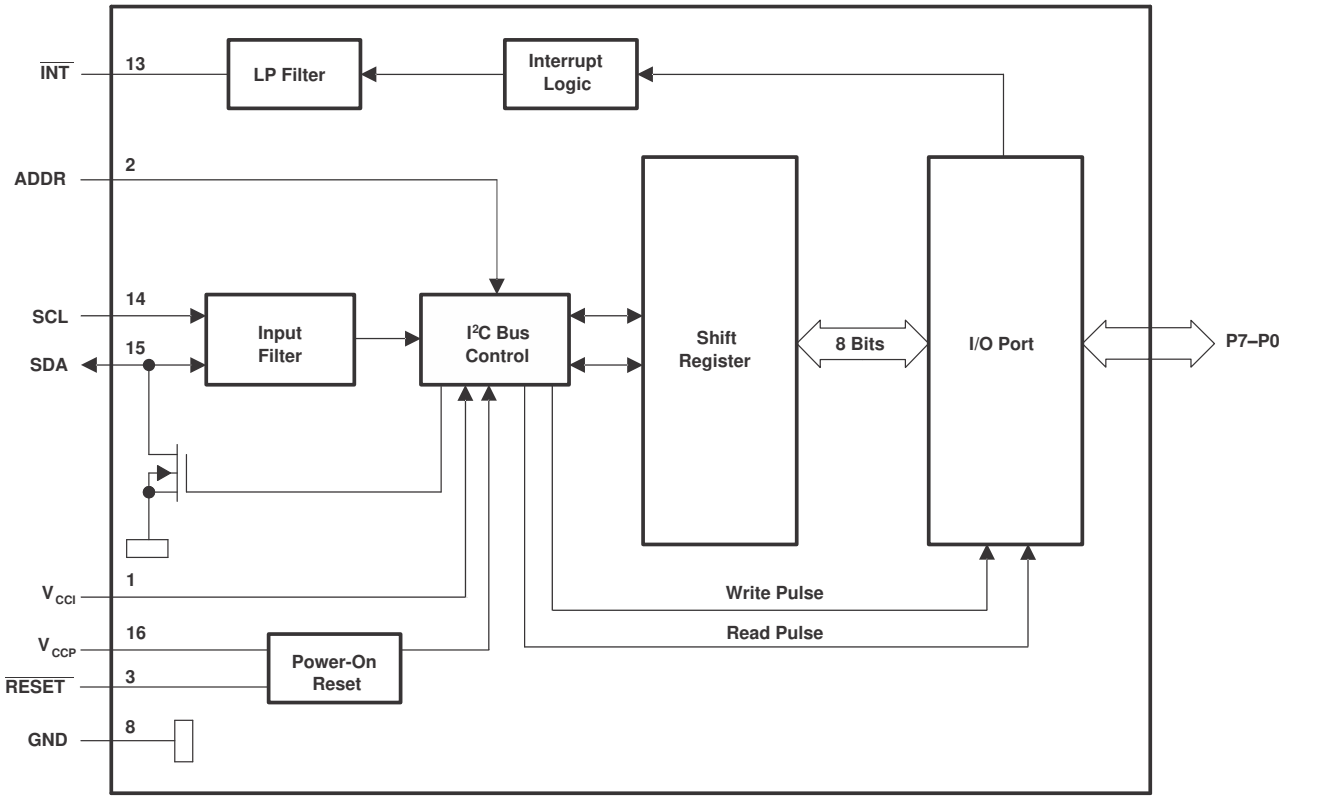


Copyright © 2016, Texas Instruments Incorporated

All pin numbers shown are for the PW package.

All I/Os are set to inputs at reset.

Figure 8-1. Logic Diagram (Positive Logic)

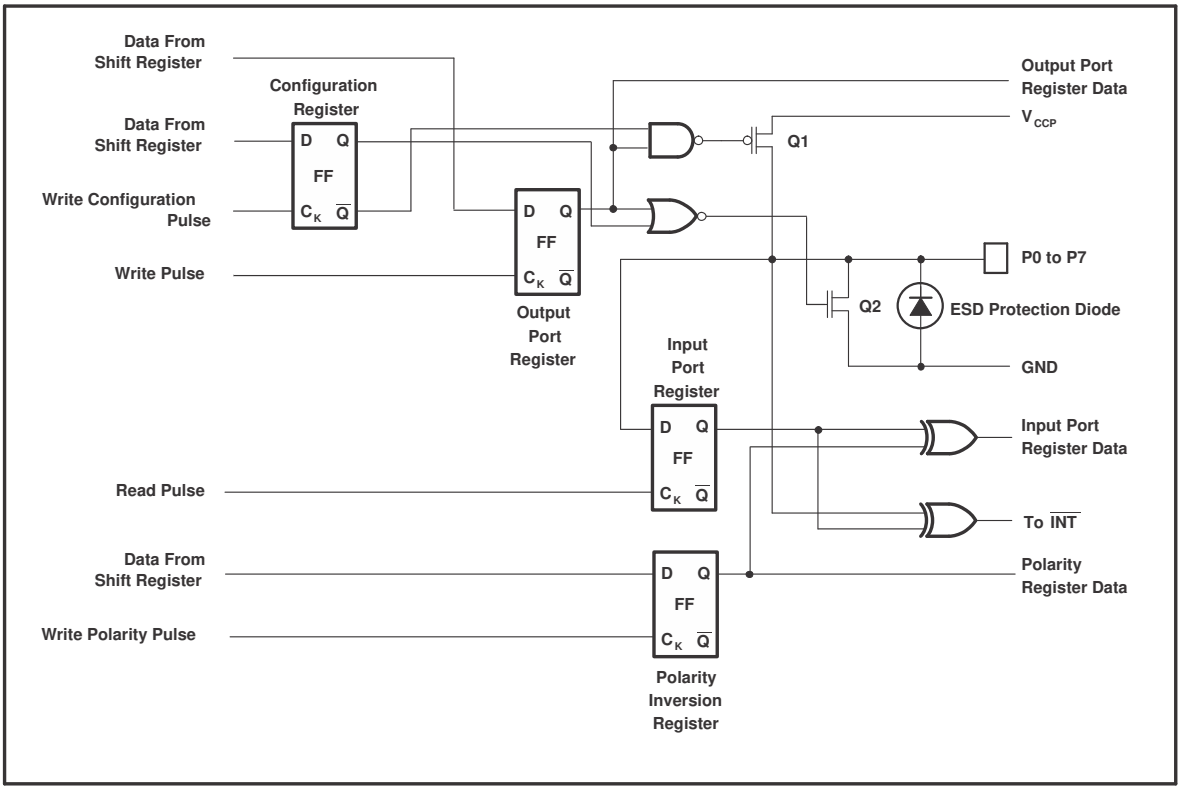

Copyright © 2016, Texas Instruments Incorporated

On power up or reset, all registers return to default values.

Figure 8-2. Simplified Schematic of P0 to P7

8.3 Feature Description

8.3.1 Voltage Translation

Table 8-1 shows some common supply voltage options for voltage translation between the I^2C bus and the P-ports of the TCA6408A-Q1.

Table 8-1. Voltage Translation

V_{CCI} (SCL AND SDA OF I^2C CONTROLLER) (V)	V_{CCP} (P-PORT) (V)
1.8	1.8
1.8	2.5
1.8	3.3
2.5	1.8
2.5	2.5
2.5	3.3
3.3	1.8
3.3	2.5
3.3	3.3

8.3.2 I/O Port

When an I/O is configured as an input, FETs Q1 and Q2 are off, which creates a high-impedance input. The input voltage may be raised above V_{CC} to a maximum of 3.6 V.

If the I/O is configured as an output, Q1 or Q2 is enabled, depending on the state of the output port register. In this case, there are low-impedance paths between the I/O pin and either V_{CC} or GND. The external voltage applied to this I/O pin must not exceed the recommended levels for proper operation.

8.3.3 Interrupt Output ($\overline{INT}$)

An interrupt is generated by any rising or falling edge of the port inputs in the input mode. After time t_{iv}, the signal $\overline{INT}$ is valid. Resetting the interrupt circuit is achieved when data on the port is changed to the original setting or when data is read from the port that generated the interrupt. Resetting occurs in the read mode at the acknowledge (ACK) or not acknowledge (NACK) bit after the rising edge of the SCL signal. Interrupts that occur during the ACK or NACK clock pulse can be lost (or be very short) due to the resetting of the interrupt during this pulse. Each change of the I/Os after resetting is detected and is transmitted as $\overline{INT}$.

Reading from or writing to another device does not affect the interrupt circuit, and a pin configured as an output cannot cause an interrupt. Changing an I/O from an output to an input may cause a false interrupt to occur if the state of the pin does not match the contents of the Input Port register.

The $\overline{INT}$ output has an open-drain structure and requires pull-up resistor to V_{CCP} or V_{CCI}, depending on the application. $\overline{INT}$ must be connected to the voltage source of the device that requires the interrupt information.

8.3.4 Reset Input ($\overline{RESET}$)

The $\overline{RESET}$ input can be asserted to initialize the system while keeping the V_{CCP} at its operating level. A reset can be accomplished by holding the $\overline{RESET}$ pin low for a minimum of t_W. The TCA6408A-Q1 registers and I^2C/SMBus state machine are changed to their default state when $\overline{RESET}$ is low (0). When $\overline{RESET}$ is high (1), the I/O levels at the P-port can be changed externally or through the controller. This input requires a pull-up resistor to V_{CCI}, if no active connection is used. It is not recommended to assert the $\overline{RESET}$ pin during communication with the TCA6408A-Q1. Assertion of $\overline{RESET}$ during communication can result in data corruption.

Copyright © 2023 Texas Instruments Incorporated

8.4 Device Functional Modes

8.4.1 Power-On Reset (POR)

When power (from 0 V) is applied to V_{CCP}, an internal power-on reset holds the TCA6408A-Q1 in a reset condition until V_{CCP} has reached V_{PORR}. At that time, the reset condition is released, and the TCA6408A-Q1 registers and I^2C/SMBus state machine initialize to their default states. After that, V_{CCP} must be lowered to below V_{PORF} and back up to the operating voltage for a power-reset cycle.

8.4.2 Powered-Up

When power has been applied to both V_{CCP} and V_{CCI} and a POR has taken place, the device is in a functioning mode. The device is always ready to receive new requests via the I^2C bus.

8.5 Programming

8.5.1 I^2C Interface

The TCA6408A-Q1 has a standard bidirectional I^2C interface that is controlled by a controller device in order to be configured or read the status of this device. Each target on the I^2C bus has a specific device address to differentiate between other target devices that are on the same I^2C bus. Many target devices require configuration upon startup to set the behavior of the device. This is typically done when the controller accesses internal register maps of the target, which have unique register addresses. A device can have one or multiple registers where data is stored, written, or read.

The physical I^2C interface consists of the serial clock (SCL) and serial data (SDA) lines. Both SDA and SCL lines must be connected to V_{CC} through a pull-up resistor. The size of the pull-up resistor is determined by the amount of capacitance on the I^2C lines. (For further details, see the application report, *I^2C Pull-up Resistor Calculation* (SLVA689)). Data transfer may be initiated only when the bus is idle. A bus is considered idle if both SDA and SCL lines are high after a STOP condition. See Figure 8-3 and Figure 8-4.

The following is the general procedure for a controller to access a target device:

1. If a controller wants to send data to a target:
   - Controller-transmitter sends a START condition and addresses the target-receiver.
   - Controller-transmitter sends data to target-receiver.
   - Controller-transmitter terminates the transfer with a STOP condition.
2. If a controller wants to receive or read data from a target:
   - Controller-receiver sends a START condition and addresses the target-transmitter.
   - Controller-receiver sends the requested register to read to target-transmitter.
   - Controller-receiver receives data from the target-transmitter.
   - Controller-receiver terminates the transfer with a STOP condition.

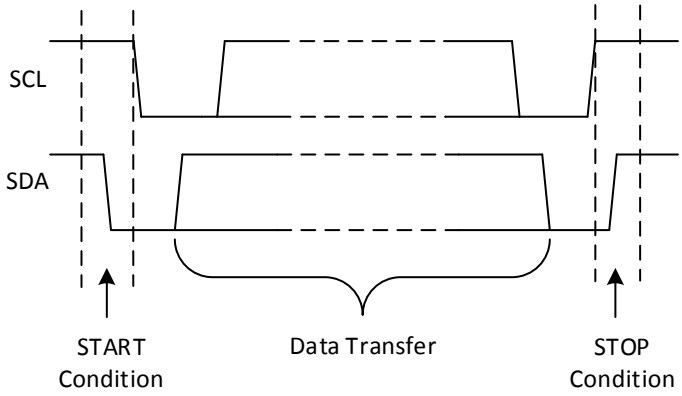


Figure 8-3. Definition of Start and Stop Conditions

Copyright © 2023 Texas Instruments Incorporated

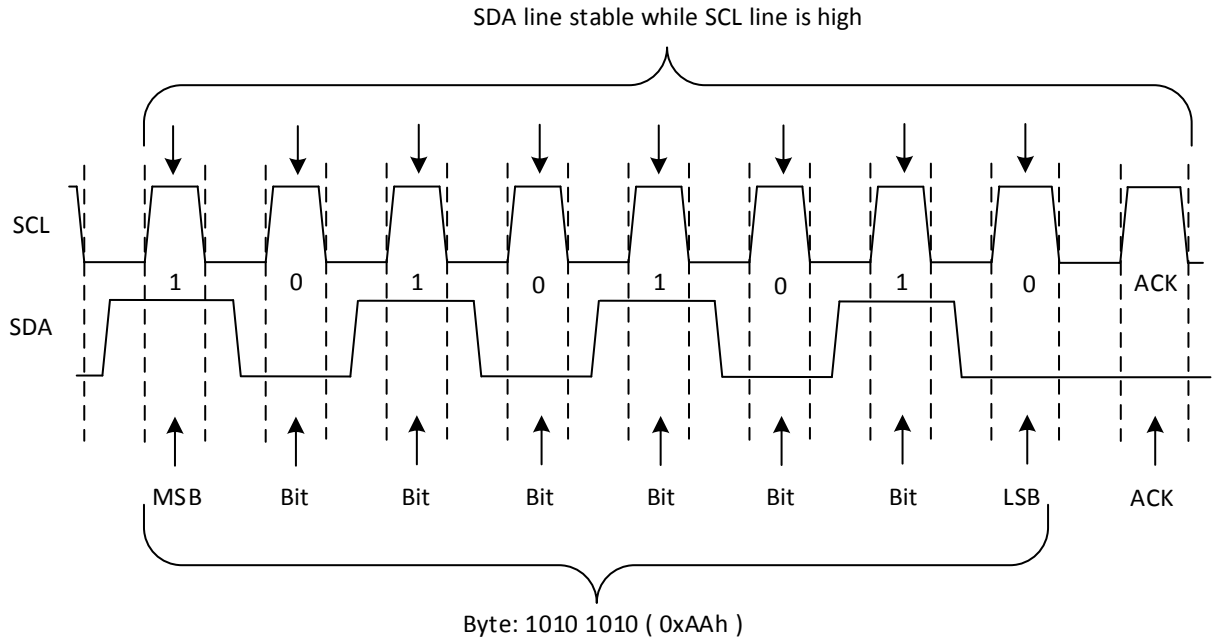


Figure 8-4. Bit Transfer

Table 8-2 shows the interface definition for the TCA6408A-Q1 device.

Table 8-2. Interface Definition

BYTE	BIT							
	7 (MSB)	6	5	4	3	2	1	0 (LSB)
I^2C target address	L	H	L	L	L	L	ADDR	R/ $\overline{W}$
I/O data bus	P7	P6	P5	P4	P3	P2	P1	P0

8.5.2 Bus Transactions

Data must be sent to and received from the target devices, and this is accomplished by reading from or writing to registers in the target device.

Registers are locations in the memory of the target which contain information, whether it be the configuration information or some sampled data to send back to the controller. The controller must write information to these registers in order to instruct the target device to perform a task.

While it is common to have registers in I^2C targets, note that not all target devices will have registers. Some devices are simple and contain only 1 register, which may be written to directly by sending the register data immediately after the target address, instead of addressing a register. An example of a single-register device is an 8-bit I^2C switch, which is controlled via I^2C commands. Since it has 1 bit to enable or disable a channel, there is only 1 register needed, and the controller merely writes the register data after the target address, skipping the register number.

8.5.2.1 Writes

To write on the I^2C bus, the controller sends a START condition on the bus with the address of the target, as well as the last bit (the R/ $\overline{W}$ bit) set to 0, which signifies a write. After the target sends the acknowledge bit, the controller then sends the register address of the register to which it wishes to write. The target will acknowledge again, letting the controller know it is ready. After this, the controller starts sending the register data to the target until the controller has sent all the data necessary (which is sometimes only a single byte), and the controller terminates the transmission with a STOP condition.

Figure 8-5 and Figure 8-6 show an example of writing a single byte to a target register.

Copyright © 2023 Texas Instruments Incorporated

Controller controls SDA line

Target controls SDA line

Write to one register in a device

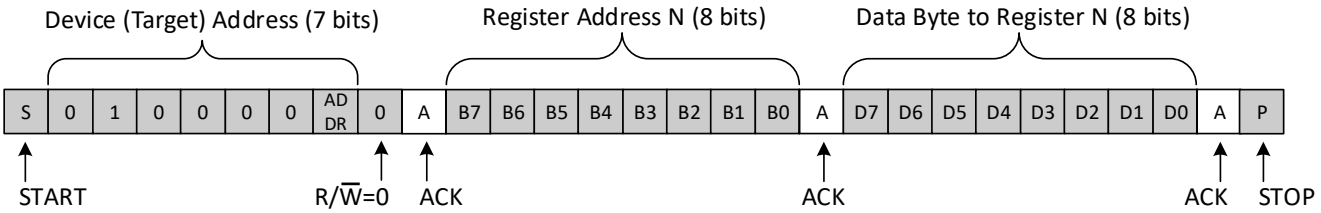


Figure 8-5. Write to Register

Controller controls SDA line

Target controls SDA line

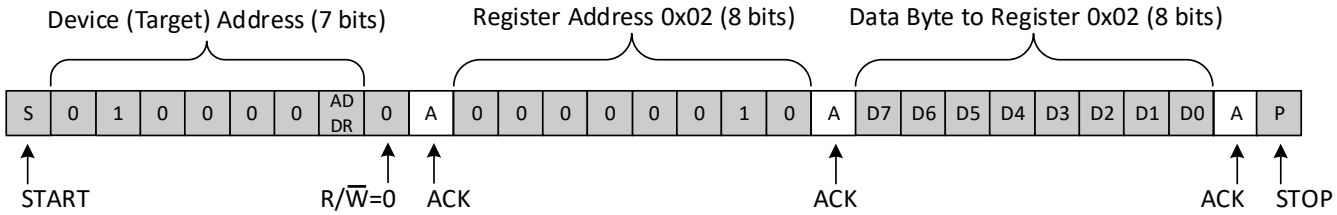


Figure 8-6. Write to the Polarity Inversion Register

Copyright © 2023 Texas Instruments Incorporated

8.5.2.2 Reads

Reading from a target is very similar to writing, but requires some additional steps. In order to read from a target, the controller must first instruct the target which register it wishes to read from. This is done by the controller starting off the transmission in a similar fashion as the write, by sending the address with the R/ $\overline{W}$ bit equal to 0 (signifying a write), followed by the register address it wishes to read from. When the target acknowledges this register address, the controller sends a START condition again, followed by the target address with the R/ $\overline{W}$ bit set to 1 (signifying a read). This time, the target acknowledges the read request, and the controller releases the SDA bus but continues supplying the clock to the target. During this part of the transaction, the controller becomes the controller-receiver, and the target becomes the target-transmitter.

The controller continues to send out the clock pulses, but releases the SDA line so that the target can transmit data. At the end of every byte of data, the controller sends an ACK to the target, letting the target know that it is ready for more data. When the controller has received the number of bytes it is expecting, it sends a NACK, signaling to the target to halt communications and release the bus. The controller follows this up with a STOP condition.

Read transactions that are performed without writing to the address of the device and simply supply the command byte will result in a NACK.

Figure 8-7 and Figure 8-8 show an example of reading a single byte from a target register.


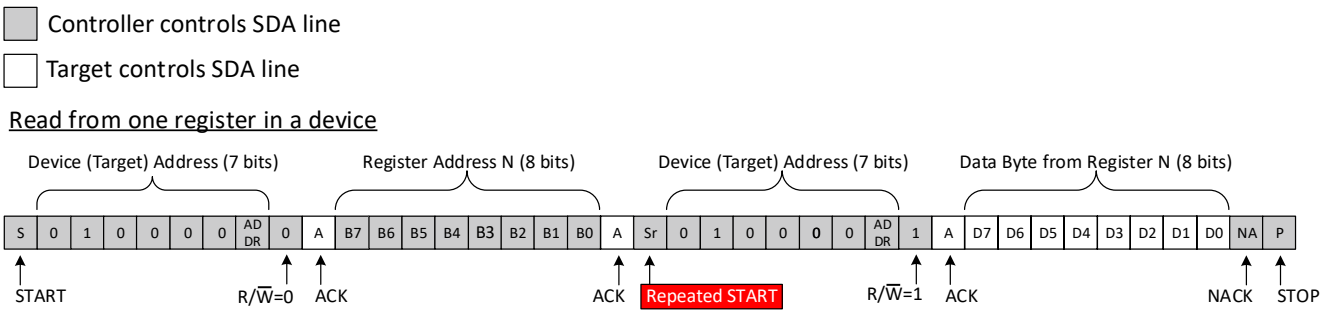


Figure 8-7. Read from Register

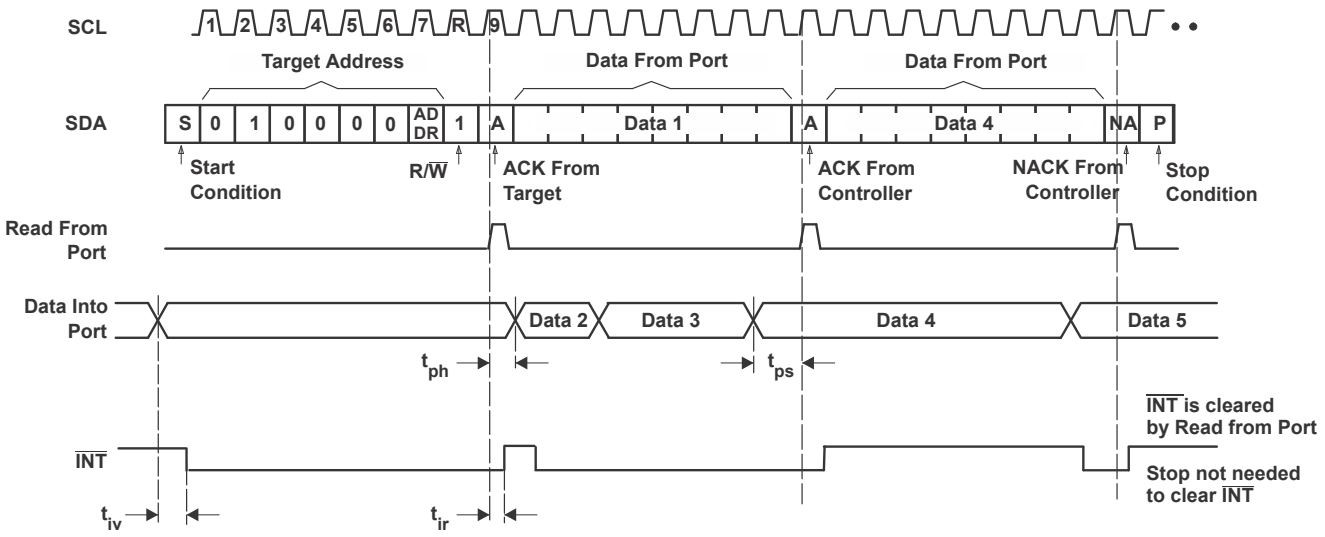

A. Transfer of data can be stopped at any time by a Stop condition. When this occurs, data present at the latest acknowledge phase is valid (output mode). It is assumed that the command byte previously has been set to 00 (read Input Port Register).

B. This figure eliminates the command byte transfer, a restart, and target address call between the initial target address call and actual data transfer from P-port (see Figure 8-7).

Figure 8-8. Read from Input Port Register

Copyright © 2023 Texas Instruments Incorporated

8.6 Register Map

8.6.1 Device Address

The address of the TCA6408A-Q1 is shown in Figure 8-9.




Figure 8-9. TCA6408A-Q1 Address

Table 8-3 shows the TCA6408A-Q1 address reference.

Table 8-3. Address Reference

ADDR	I²C BUS TARGET ADDRESS
L	32 (decimal), 20 (hexadecimal)
H	33 (decimal), 21 (hexadecimal)

The last bit of the target address defines the operation (read or write) to be performed. A high (1) selects a read operation, while a low (0) selects a write operation.

8.6.2 Control Register and Command Byte

Following the successful acknowledgment of the address byte, the bus controller sends a command byte (see Table 8-4), which is stored in the Control Register in the TCA6408A-Q1. Two bits of this data byte state both the operation (read or write) and the internal registers (Input, Output, Polarity Inversion, or Configuration) that is affected. This register can be written or read through the I²C bus. The command byte is sent only during a write transmission. See Figure 8-10.

B7	B6	B5	B4	B3	B2	B1	B0

Figure 8-10. Control Register Bits

Table 8-4. Command Byte

CONTROL REGISTER BITS								COMMAND BYTE (HEX)	REGISTER	PROTOCOL	POWER-UP DEFAULT
B7	B6	B5	B4	B3	B2	B1	B0				
0	0	0	0	0	0	0	0	00	Input Port	Read byte	xxxx xxxx
0	0	0	0	0	0	0	1	01	Output Port	Read/write byte	1111 1111
0	0	0	0	0	0	1	0	02	Polarity Inversion	Read/write byte	0000 0000
0	0	0	0	0	0	1	1	03	Configuration	Read/write byte	1111 1111

Copyright © 2023 Texas Instruments Incorporated

8.6.3 Register Descriptions

The Input Port Register (register 0) reflects the incoming logic levels of the pins, regardless of whether the pin is defined as an input or an output by the Configuration Register. They act only on read operation. Writes to this register have no effect. The default value (X) is determined by the externally applied logic level. Before a read operation, a write transmission is sent with the command byte to indicate to the I^2C device that the Input Port Register will be accessed next. See Table 8-5.

Table 8-5. Register 0 (Input Port Register)

BIT	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
DEFAULT	X	X	X	X	X	X	X	X

The Output Port Register (register 1) shows the outgoing logic levels of the pins defined as outputs by the Configuration Register. Bit values in this register have no effect on pins defined as inputs. In turn, reads from this register reflect the value that is in the flip-flop controlling the output selection, not the actual pin value. See Table 8-6.

Table 8-6. Register 1 (Output Port Register)

BIT	O-7	O-6	O-5	O-4	O-3	O-2	O-1	O-0
DEFAULT	1	1	1	1	1	1	1	1

The Polarity Inversion Register (register 2) allows polarity inversion of pins defined as inputs by the Configuration Register. If a bit in this register is set (written with 1), the polarity of the corresponding port pin is inverted. If a bit in this register is cleared (written with a 0), the original polarity of the corresponding port pin is retained. See Table 8-7.

Table 8-7. Register 2 (Polarity Inversion Register)

BIT	N-7	N-6	N-5	N-4	N-3	N-2	N-1	N-0
DEFAULT	0	0	0	0	0	0	0	0

The Configuration Register (register 3) configures the direction of the I/O pins. If a bit in this register is set to 1, the corresponding port pin is enabled as an input with a high-impedance output driver. If a bit in this register is cleared to 0, the corresponding port pin is enabled as an output. See Table 8-8.

Table 8-8. Register 3 (Configuration Register)

BIT	C-7	C-6	C-5	C-4	C-3	C-2	C-1	C-0
DEFAULT	1	1	1	1	1	1	1	1

Copyright © 2023 Texas Instruments Incorporated

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information


Applications of the TCA6408A-Q1 has this device connected as a target to an I^2C controller (processor), and the I^2C bus may contain any number of other target devices. The TCA6408A-Q1 is in a remote location from the controller, placed close to the GPIOs to which the controller needs to monitor or control.

A typical application of the TCA6408A-Q1 operates with a lower voltage on the controller side (V_{CCI}), and a higher voltage on the P-port side (V_{CCP}). The P-ports can be configured as outputs connected to inputs of devices such as enable, reset, power select, the gate of a switch, and LEDs. The P-ports can also be configured as inputs to receive data from interrupts, alarms, status outputs, or push buttons.

Copyright © 2023 Texas Instruments Incorporated

9.2 Typical Application

Figure 9-1 shows an application in which the TCA6408A-Q1 can be used.

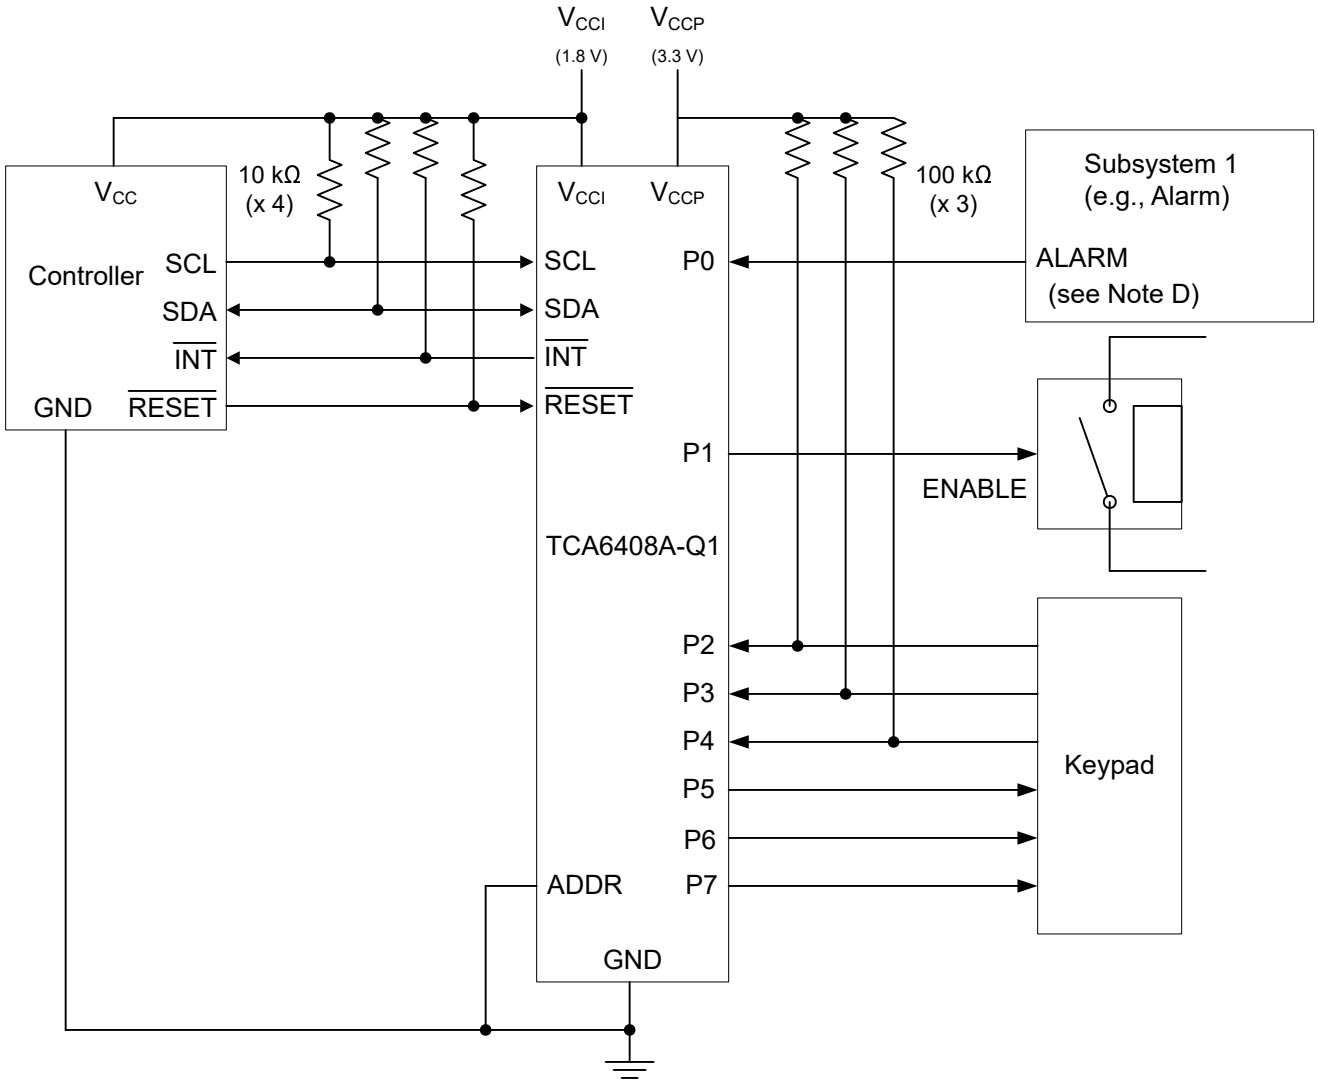

A. Device address configured as 0100000 for this example.
B. P0 and P2–P4 are configured as inputs.
C. P1 and P5–P7 are configured as outputs.
D. Resistors are required for inputs (on P-port) that may float. If a driver to an input will never let the input float, a resistor is not needed. Outputs (in the P-port) do not need pull-up resistors.

Figure 9-1. Typical Application Schematic

9.2.1 Design Requirements

9.2.1.1 Calculating Junction Temperature and Power Dissipation

When designing with the TCA6408A-Q1, it is important that the *Section 6.3* not be violated. Many of the parameters of this device are rated based on junction temperature. So junction temperature must be calculated in order to verify that safe operation of the device is met. The basic equation for junction temperature is shown in Equation 1.

$$T_j = T_A + (\theta_{JA} \times P_d) \quad (1)$$

Copyright © 2023 Texas Instruments Incorporated

θ_{JA} is the standard junction to ambient thermal resistance measurement of the package, as seen in *Section 6.4* table. P_d is the total power dissipation of the device, and the approximation is shown in Equation 2.

$$P_d \approx \left(I_{CC_STATIC} \times V_{CC}\right) + \sum P_{d_PORT_L} + \sum P_{d_PORT_H} \quad (2)$$

Equation 2 is the approximation of power dissipation in the device. The equation is the static power plus the summation of power dissipated by each port (with a different equation based on if the port is outputting high, or outputting low. If the port is set as an input, then power dissipation is the input leakage of the pin multiplied by the voltage on the pin). Note that this ignores power dissipation in the $\overline{INT}$ and SDA pins, assuming these transients to be small. They can easily be included in the power dissipation calculation by using Equation 3 to calculate the power dissipation in $\overline{INT}$ or SDA while they are pulling low, and this gives maximum power dissipation.

$$P_{d_PORT_L} = \left(I_{OL} \times V_{OL}\right) \quad (3)$$

Equation 3 shows the power dissipation for a single port which is set to output low. The power dissipated by the port is the V_{OL} of the port multiplied by the current it is sinking.

$$P_{d_PORT_H} = \left(I_{OH} \times \left(V_{CC} - V_{OH}\right)\right) \quad (4)$$

Equation 4 shows the power dissipation for a single port which is set to output high. The power dissipated by the port is the current sourced by the port multiplied by the voltage drop across the device (difference between V_{CC} and the output voltage).

9.2.1.2 Minimizing I_{CC} When I/O is Used to Control LEDs

When the I/Os are used to control LEDs, normally they are connected to V_{CC} through a resistor as shown in Figure 9-1. The LED acts as a diode, so when the LED is off, the I/O V_{IN} is about 1.2 V less than V_{CC}. The ΔI_{CC} parameter in the *Section 6.5* table shows how I_{CC} increases as V_{IN} becomes lower than V_{CC}. Designs that must minimize current consumption, such as battery power applications, must consider maintaining the I/O pins greater than or equal to V_{CC} when the LED is off.

Figure 9-2 shows a high-value resistor in parallel with the LED. Figure 9-3 shows V_{CC} less than the LED supply voltage by at least 1.2 V. Both of these methods maintain the I/O V_{IN} at or above V_{CC} and prevent additional supply current consumption when the LED is off.




Figure 9-2. High-Value Resistor in Parallel With LED

Copyright © 2023 Texas Instruments Incorporated




Figure 9-3. Device Supplied by a Low Voltage

9.2.2 Detailed Design Procedure

The pull-up resistors, R_P, for the SCL and SDA lines need to be selected appropriately and take into consideration the total capacitance of all targets on the I^2C bus. The minimum pull-up resistance is a function of V_{CC}, $V_{OL,(max)}$, and I_{OL} as shown in Equation 5.


$$R_{p(min)} = \frac{V_{CC} - V_{OL(max)}}{I_{OL}} \quad (5)$$

The maximum pull-up resistance is a function of the maximum rise time, t_r (300 ns for fast-mode operation, f_{SCL} = 400 kHz) and bus capacitance, C_b as shown in Equation 6.

$$R_{p(max)} = \frac{t_r}{0.8473 \times C_b} \quad (6)$$


The maximum bus capacitance for an I^2C bus must not exceed 400 pF for standard-mode or fast-mode operation. The bus capacitance can be approximated by adding the capacitance of the TCA6408A-Q1, C_i for SCL or C_{IO} for SDA, the capacitance of wires, connections, traces, and the capacitance of additional targets on the bus.

9.2.3 Application Curves

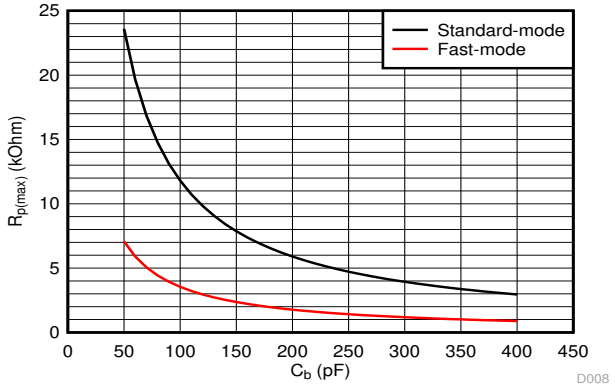

Standard-mode: f_{SCL}= 100 kHz, t_r = 1 µs
Fast-mode: f_{SCL}= 400 kHz, t_r= 300 ns_b

Figure 9-4. Maximum Pull-Up Resistance ($R_{p(max)}$) vs Bus Capacitance (C)

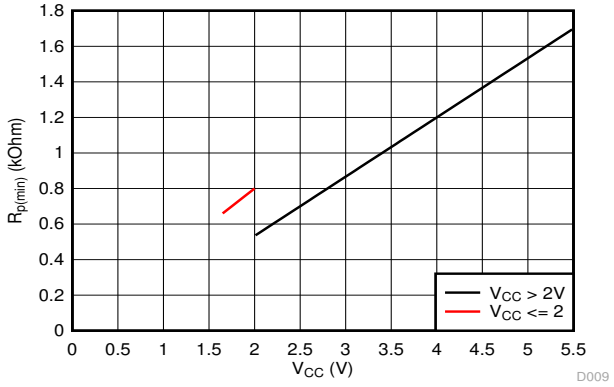

V_{OL} = 0.2 × V_{CC}, I_{OL} = 2 mA when V_{CC} ≤ 2 V
V_{OL} = 0.4 V, I_{OL} = 3 mA when V_{CC} > 2 V

Figure 9-5. Minimum Pull-Up Resistance ($R_{p(min)}$) vs Pull-Up Reference Voltage (V_{CCI})

Copyright © 2023 Texas Instruments Incorporated

9.3 Power Supply Recommendations

9.3.1 Power-On Reset Requirements

In the event of a glitch or data corruption, TCA6408A-Q1 can be reset to its default conditions by using the power-on reset feature. Power-on reset requires that the device go through a power cycle to be completely reset. This reset also happens when the device is powered on for the first time in an application.

Ramping up the device V_{CCP} before V_{CCI} is recommended to prevent SDA from potentially being stuck LOW.

The two types of power-on reset are shown in Figure 9-6 and Figure 9-7.

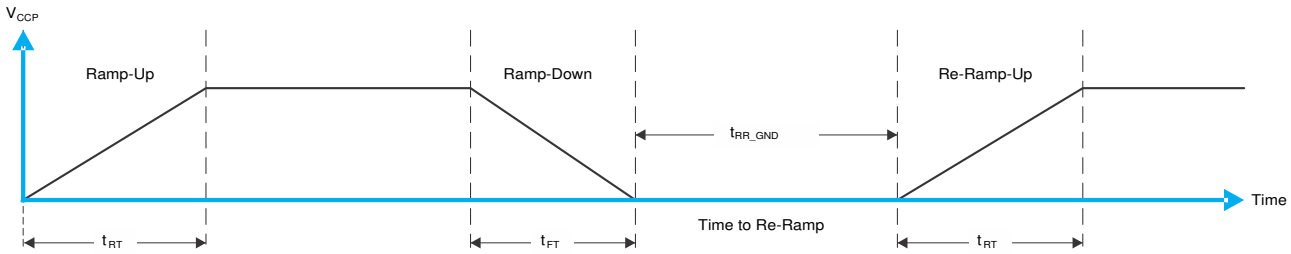


Figure 9-6. V_{CCP} is Lowered Below 0.2 V and then Ramped Up to V_{CCP}

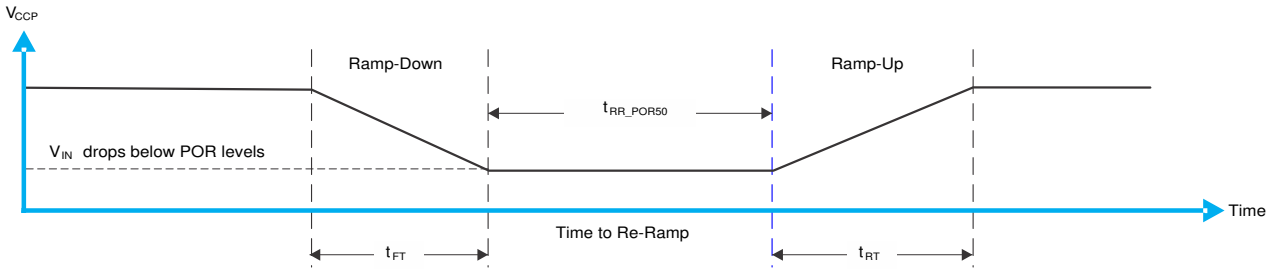


Figure 9-7. V_{CCP} is Lowered Below the POR Threshold, then Ramped Back Up to V_{CCP}

Table 9-1 specifies the performance of the power-on reset feature for TCA6408A-Q1 for both types of power-on reset.

Table 9-1. Recommended Supply Sequencing and Ramp Rates at T_A = 25°C(1)

PARAMETER			MIN	TYP	MAX	UNIT
t_{FT}	Fall rate	See Figure 9-6	0.1		2000	ms
t_{RT}	Rise rate	See Figure 9-6	0.1		2000	ms
t_{RR_GND}	Time to re-ramp (when V_{CCP} drops to GND)	See Figure 9-6	1			µs
t_{RR_POR50}	Time to re-ramp (when V_{CCP} drops to V_{POR_MIN} – 50 mV)	See Figure 9-7	1			µs
V_{CCP_GH}	Level that V_{CCP} can glitch down from V_{CCP}, but not cause a functional disruption when t_{VCCP_GW} = 1 µs	See Figure 9-8			1.2	V
V_{CCP_MV}	The minimum voltage that VCC can glitch down to without causing a reset (V_{CC_GH} must not be violated)	See Figure 9-8	1.5			V
t_{VCCP_GW}	Glitch width that does not cause a functional disruption when t_{VCCP_GH} = 0.5 × V_{CCx}	See Figure 9-8			10	µs
V_{PORF}	Voltage trip point of POR on falling V_{CCP}		0.6	1		V
V_{PORR}	Voltage trip point of POR on rising V_{CCP}			1.2	1.5	V

(1) Not tested. Specified by design.

Copyright © 2023 Texas Instruments Incorporated

Glitches in the power supply can also affect the power-on reset performance of this device. The glitch width (t_{VCCP_GW}) and height (V_{CCP_GH}) are dependent on each other. The bypass capacitance, source impedance, and device impedance are factors that affect power-on reset performance. Figure 9-8 and Table 9-1 provide more information on how to measure these specifications.

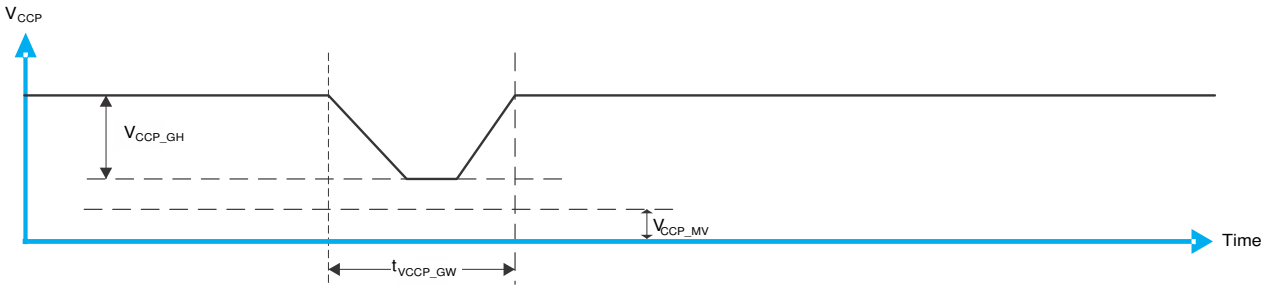


Figure 9-8. Glitch Width and Glitch Height

V_{POR} is critical to the power-on reset. V_{PORR} / V_{PORF} is the voltage level at which the reset condition is released/ asserted and all the registers and the I^2C/SMBus state machine are initialized to the default states (upon a release of a reset condition). The voltage that the device has a reset condition asserted or released differs based on whether V_{CCP} is being lowered to or from 0. Figure 9-9 and Table 9-1 provide more details on this specification.

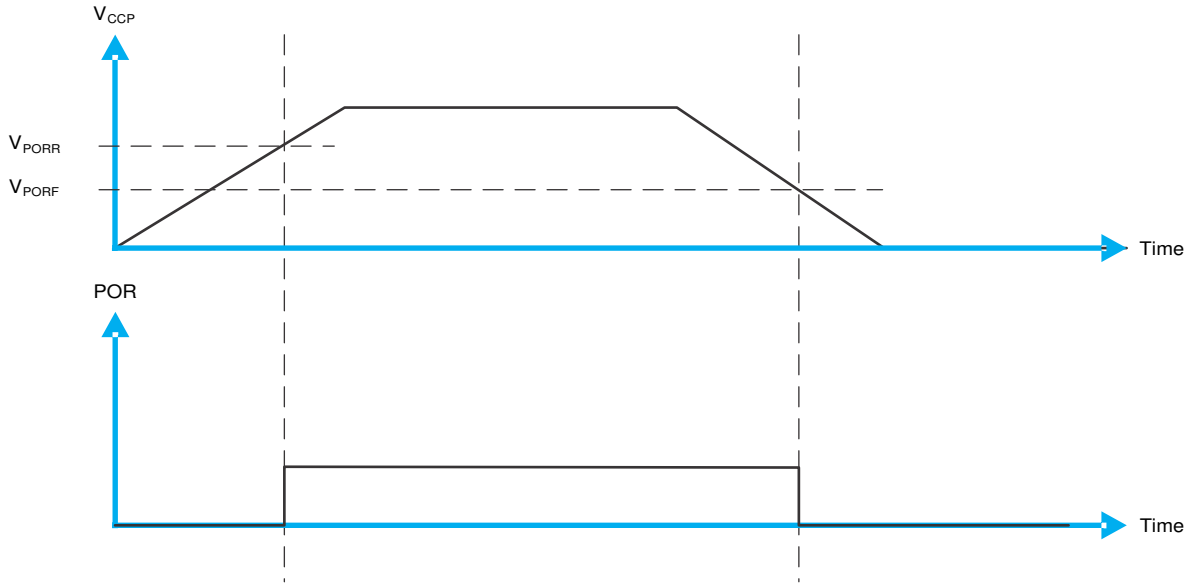


Figure 9-9. Power On Reset

9.4 Layout

9.4.1 Layout Guidelines

For printed circuit board (PCB) layout of the TCA6408A-Q1, common PCB layout practices must be followed, but additional concerns related to high-speed data transfer such as matched impedances and differential pairs are not a concern for I^2C signal speeds.

In all PCB layouts, it is a best practice to avoid right angles in signal traces, to fan out signal traces away from each other upon leaving the vicinity of an integrated circuit (IC), and to use thicker trace widths to carry higher amounts of current that commonly pass through power and ground traces. By-pass and de-coupling capacitors are commonly used to control the voltage on the V_{CCI} and V_{CCP} pins, using a larger capacitor to provide

Copyright © 2023 Texas Instruments Incorporated

additional power in the event of a short power supply glitch and a smaller capacitor to filter out high-frequency ripple. These capacitors must be placed as close to the TCA6408A-Q1 as possible. These best practices are shown in *Section 9.4.2*.

For the layout example provided in *Section 9.4.2*, it is possible to fabricate a PCB with only 2 layers by using the top layer for signal routing and the bottom layer as a split plane for power (V_{CCI} and V_{CCP}) and ground (GND). However, a 4-layer board is preferable for boards with higher density signal routing. On a 4-layer PCB, it is common to route signals on the top and bottom layer, dedicate one internal layer to a ground plane, and dedicate the other internal layer to a power plane. In a board layout using planes or split planes for power and ground, vias are placed directly next to the surface mount component pad which needs to attach to V_{CCI}, V_{CCP}, or GND and the via is connected electrically to the internal layer or the other side of the board. Vias are also used when a signal trace needs to be routed to the opposite side of the board, but this technique is not demonstrated in *Section 9.4.2*.

9.4.2 Layout Example

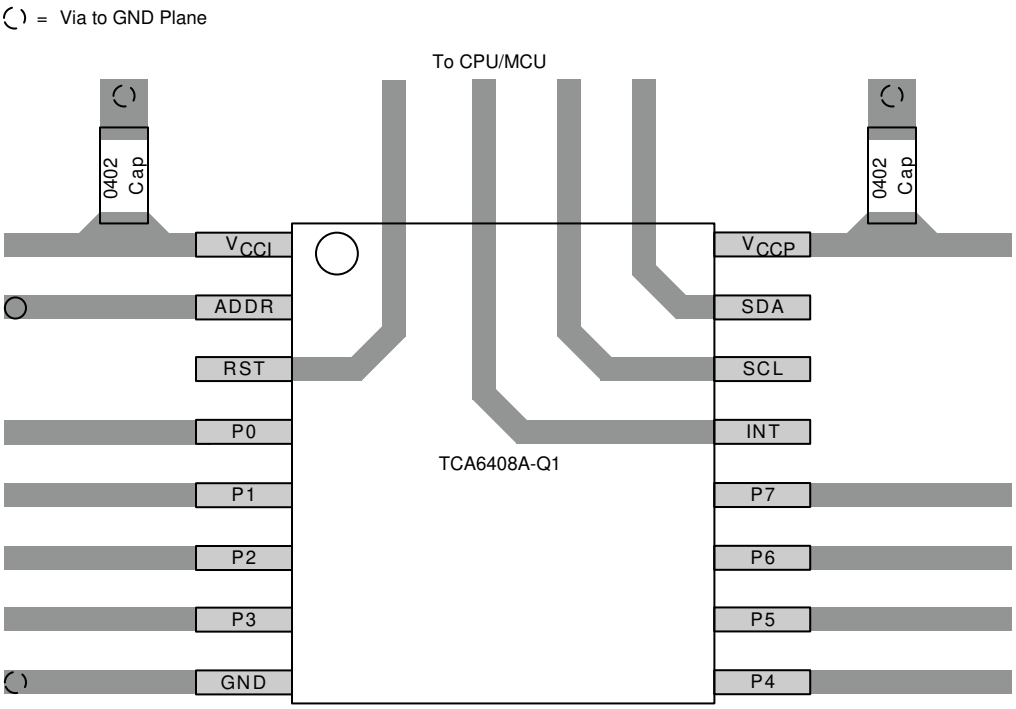


Figure 9-10. Example Layout (PW Package)

Copyright © 2023 Texas Instruments Incorporated

10 Device and Documentation Support

10.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.2 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

10.3 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.4 Glossary

TI Glossary	This glossary lists and explains terms, acronyms, and definitions.

11 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TCA6408AQPWRQ1	Active	Production	TSSOP (PW) | 16	2000 | LARGE T&R	Yes	NIPDAU | SN	Level-1-260C-UNLIM	-40 to 125	6408AQ
TCA6408AQPWRQ1.A	Active	Production	TSSOP (PW) | 16	2000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	6408AQ
TCA6408AQPWRQ1.B	Active	Production	TSSOP (PW) | 16	2000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	6408AQ

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TCA6408A-Q1 :


- Catalog : TCA6408A

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

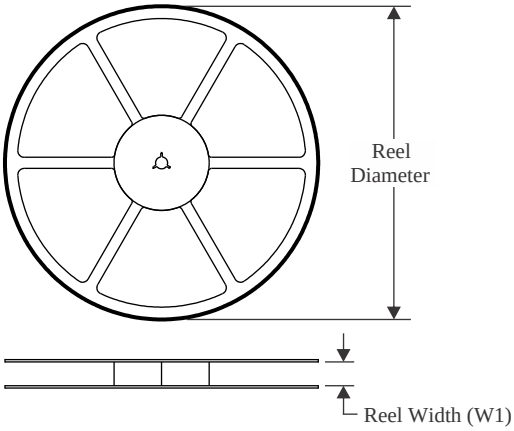


TAPE DIMENSIONS

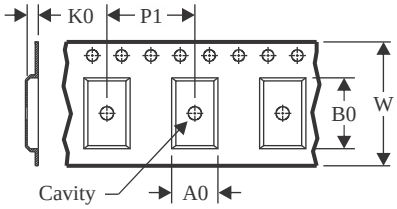

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

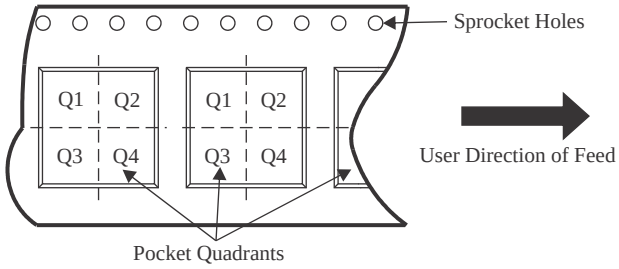

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TCA6408AQPWRQ1	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

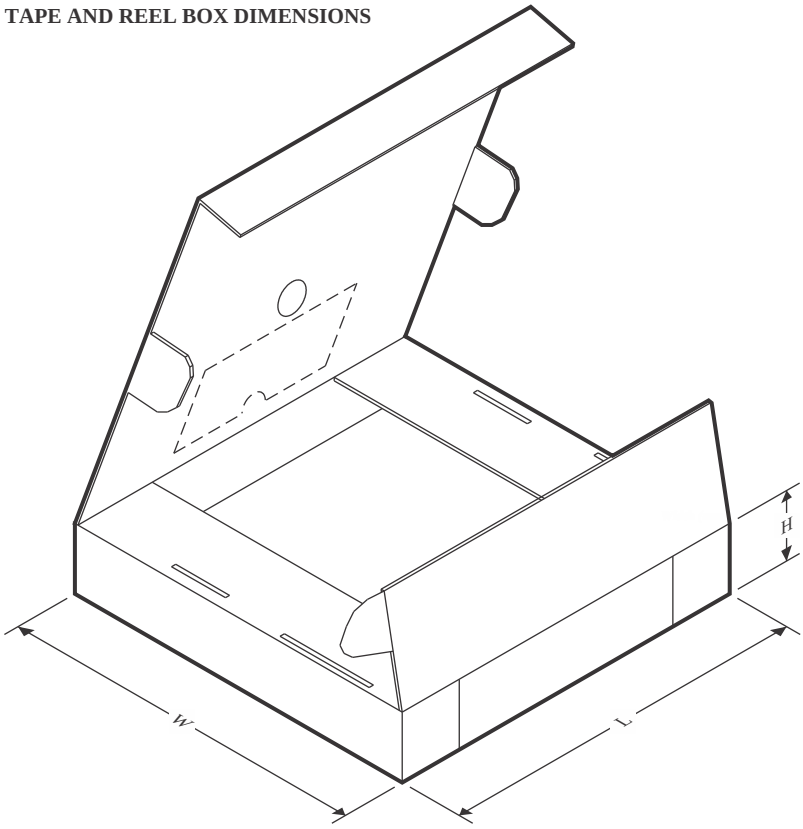

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TCA6408AQPWRQ1	TSSOP	PW	16	2000	353.0	353.0	32.0

PACKAGE OUTLINE

PW0016A


TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

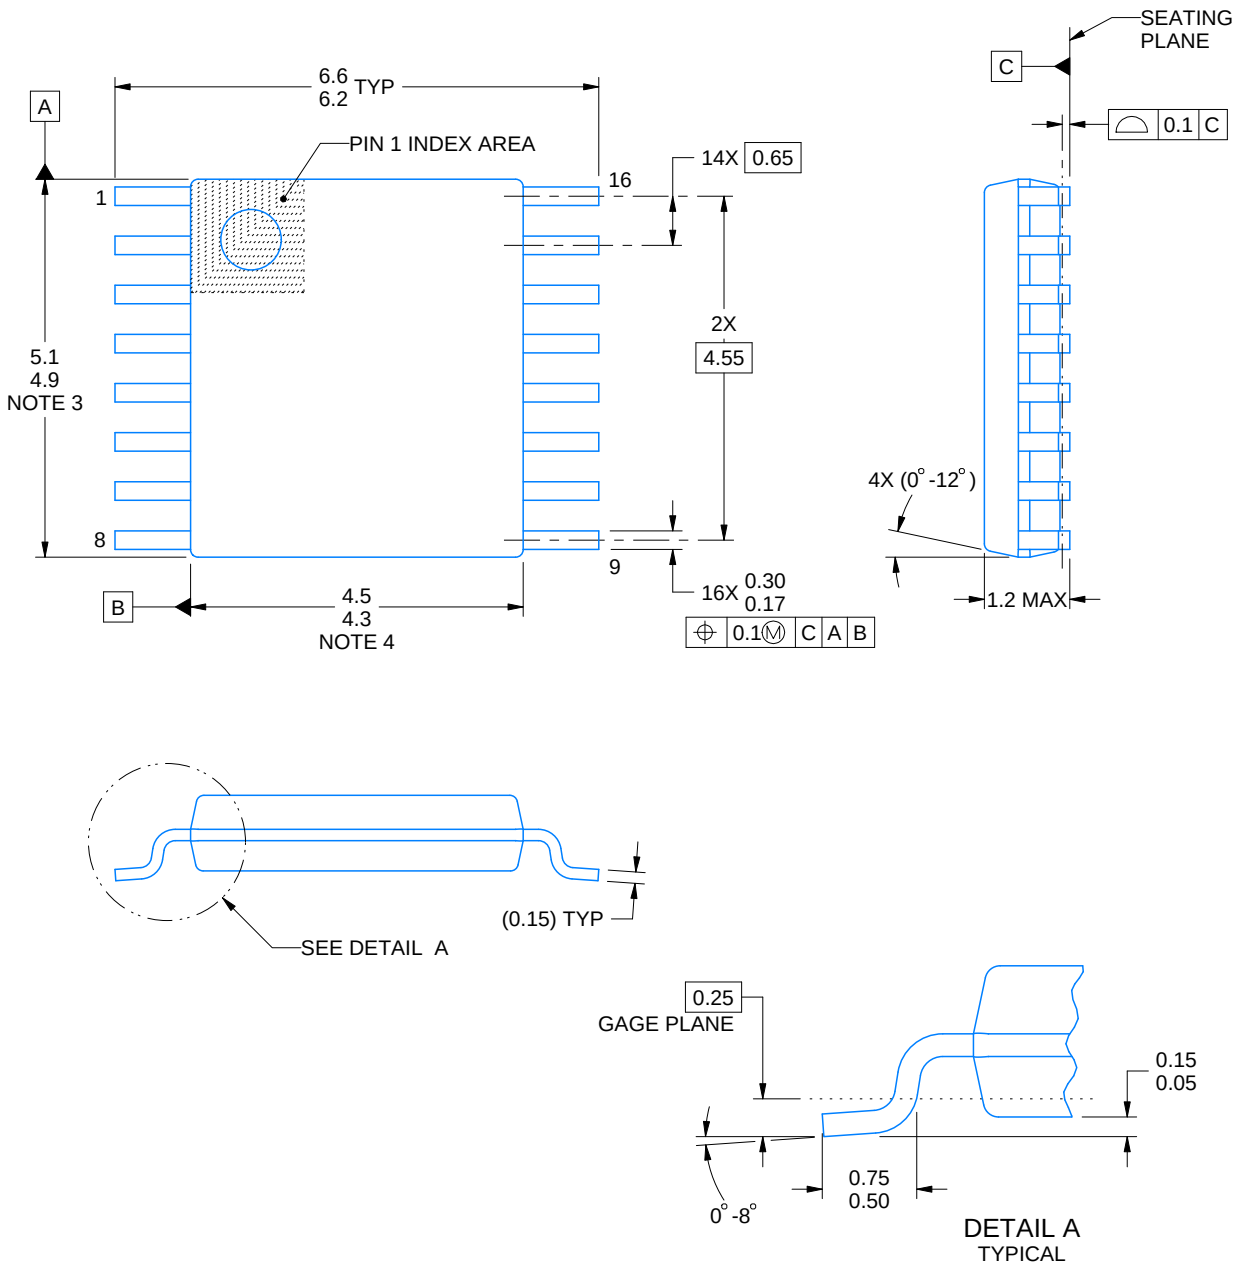

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

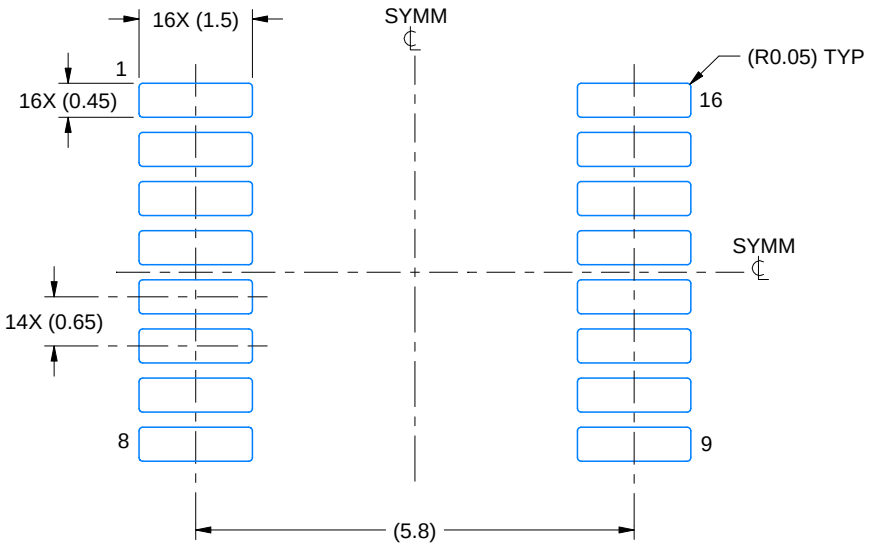

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X




SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

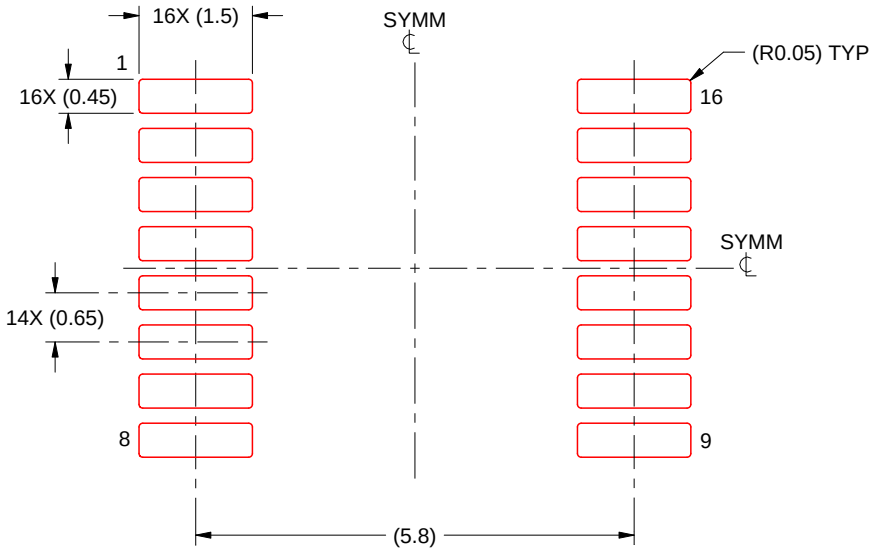

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025