

## CMOS, Rail-to-Rail, I/O OPERATIONAL AMPLIFIERS

### FEATURES

- RAIL-TO-RAIL INPUT AND OUTPUT
- WIDE SUPPLY RANGE:  
Single Supply: 4V to 12V  
Dual Supplies:  $\pm 2$  to  $\pm 6$
- LOW QUIESCENT CURRENT: 160 $\mu$ A
- FULL-SCALE CMRR: 90dB
- LOW OFFSET: 160 $\mu$ V
- HIGH SPEED:  
OPA703: 1MHz, 0.6V/ $\mu$ s  
OPA704: 3MHz, 3V/ $\mu$ s
- *Micro*SIZE PACKAGES:  
SOT23-5, MSOP-8, TSSOP-14
- LOW INPUT BIAS CURRENT: 1pA

### APPLICATIONS


- AUTOMOTIVE APPLICATIONS:  
Audio, Sensor Applications, Security Systems
- PORTABLE EQUIPMENT
- ACTIVE FILTERS
- TRANSDUCER AMPLIFIER
- TEST EQUIPMENT
- DATA ACQUISITION

### DESCRIPTION

The OPA703 and OPA704 series op amps are optimized for applications requiring rail-to-rail input and output swing. Single, dual, and quad versions are offered in a variety of packages. While the quiescent current is less than 200 $\mu$ A per amplifier, the OPA703 still offers excellent dynamic performance (1MHz GBW and 0.6V/ $\mu$ s SR) and unity-gain stability. The OPA704 is optimized for gains of 5 or greater and provides 3MHz GBW and 3V/ $\mu$ s slew rate.

The OPA703 and OPA704 series are fully specified and guaranteed over the supply range of  $\pm 2$ V to  $\pm 6$ V. Input swing extends 300mV beyond the rail and the output swings to within 40mV of the rail.

The single versions (OPA703 and OPA704) are available in the *Micro*SIZE SOT23-5 and in the standard SO-8 surface-mount, as well as the DIP-8 packages. Dual versions (OPA2703 and OPA2704) are available in the MSOP-8, SO-8, and DIP-8 packages. The quad OPA4703 and OPA4704 are available in the TSSOP-14 and SO-14 packages. All are specified for operation from  $-40^{\circ}$ C to  $+85^{\circ}$ C.

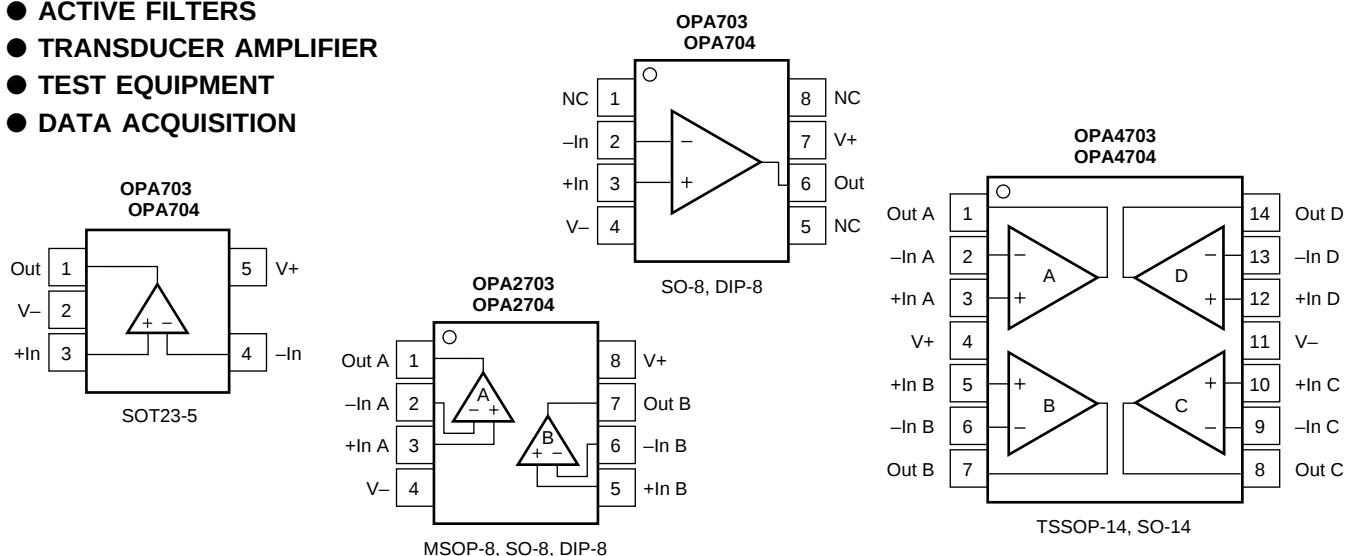

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|                                                      |                          |
|------------------------------------------------------|--------------------------|
| Supply Voltage, V+ to V-.....                        | 13.2V                    |
| Signal Input Terminals, Voltage <sup>(2)</sup> ..... | (V-) -0.3V to (V+) +0.3V |
| Current <sup>(2)</sup> .....                         | 10mA                     |
| Output Short-Circuit <sup>(3)</sup> .....            | Continuous               |
| Operating Temperature .....                          | -55°C to +125°C          |
| Storage Temperature .....                            | -65°C to +150°C          |
| Junction Temperature.....                            | +150°C                   |
| Lead Temperature (soldering, 10s).....               | +300°C                   |

NOTES: (1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. (2) Input terminals are diode-clamped to the power supply rails. Input signals that can swing more than 0.3V beyond the supply rails should be current-limited to 10mA or less. (3) Short-circuit to ground, one amplifier per package.



## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## PACKAGE/ORDERING INFORMATION

| PRODUCT   | DESCRIPTION        | MINIMUM RECOMMENDED GAIN | PACKAGE  | PACKAGE DRAWING NUMBER | PACKAGE MARKING | ORDERING NUMBER <sup>(1)</sup> | TRANSPORT MEDIA        |
|-----------|--------------------|--------------------------|----------|------------------------|-----------------|--------------------------------|------------------------|
| OPA703NA  | Single, GBW = 1MHz | 1                        | SOT23-5  | 331                    | A03             | OPA703NA/250                   | Tape and Reel          |
| OPA703UA  | Single, GBW = 1MHz | 1                        | SO-8     | 182                    | OPA703UA        | OPA703NA/3K<br>OPA703UA        | Tape and Reel<br>Rails |
| OPA703PA  | Single, GBW = 1MHz | 1                        | DIP-8    | 006                    | OPA703PA        | OPA703UA/2K5<br>OPA703PA       | Tape and Reel<br>Rails |
| OPA2703EA | Dual, GBW = 1MHz   | 1                        | MSOP-8   | 337                    | B03             | OPA2703EA/250                  | Tape and Reel          |
| OPA2703UA | Dual, GBW = 1MHz   | 1                        | SO-8     | 182                    | OPA2703UA       | OPA2703EA/2K5<br>OPA2703UA     | Tape and Reel<br>Rails |
| OPA2703PA | Dual, GBW = 1MHz   | 1                        | DIP-8    | 006                    | OPA2703PA       | OPA2703UA/2K5<br>OPA2703PA     | Tape and Reel<br>Rails |
| OPA4703EA | Quad, GBW = 1MHz   | 1                        | TSSOP-14 | 357                    | OPA4703EA       | OPA4703EA/250                  | Tape and Reel          |
| OPA4703UA | Quad, GBW = 1MHz   | 1                        | SO-14    | 235                    | OPA4703UA       | OPA4703EA/2K5<br>OPA4703UA     | Tape and Reel<br>Rails |
| OPA4703PA | Quad, GBW = 1MHz   | 1                        | SO-14    | 235                    | OPA4703UA       | OPA4703UA/2K5                  | Tape and Reel          |
| OPA704NA  | Single, GBW = 5MHz | 5                        | SOT23-5  | 331                    | A04             | OPA704NA/250                   | Tape and Reel          |
| OPA704UA  | Single, GBW = 5MHz | 5                        | SO-8     | 182                    | OPA704UA        | OPA704NA/3K<br>OPA704UA        | Tape and Reel<br>Rails |
| OPA704PA  | Single, GBW = 5MHz | 5                        | DIP-8    | 006                    | OPA704PA        | OPA704UA/2K5<br>OPA704PA       | Tape and Reel<br>Rails |
| OPA2704EA | Dual, GBW = 5MHz   | 5                        | MSOP-8   | 337                    | B04             | OPA2703EA/250                  | Tape and Reel          |
| OPA2704UA | Dual, GBW = 5MHz   | 5                        | SO-8     | 182                    | OPA2704UA       | OPA2703EA/2K5<br>OPA2704UA     | Tape and Reel<br>Rails |
| OPA2704PA | Dual, GBW = 5MHz   | 5                        | DIP-8    | 006                    | OPA2704PA       | OPA2704UA/2K5<br>OPA2704PA     | Tape and Reel<br>Rails |
| OPA4704EA | Quad, GBW = 5MHz   | 5                        | TSSOP-14 | 357                    | OPA4704EA       | OPA4704EA/250                  | Tape and Reel          |
| OPA4704UA | Quad, GBW = 5MHz   | 5                        | SO-14    | 235                    | OPA4704UA       | OPA4704EA/2K5<br>OPA4704UA     | Tape and Reel<br>Rails |
| OPA4704PA | Quad, GBW = 5MHz   | 5                        | SO-14    | 235                    | OPA4704UA       | OPA4704UA/2K5                  | Tape and Reel          |

NOTE: (1) Models with a slash (/) are available only in Tape and Reel in the quantities indicated (e.g., /3K indicates 3000 devices per reel). Ordering 3000 pieces of "OPA703NA/3K" will get a single 3000-piece Tape and Reel.

# OPA703 ELECTRICAL CHARACTERISTICS: $V_S = 4V$ to $12V$

**Boldface** limits apply over the specified temperature range,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$

At  $T_A = +25^{\circ}C$ ,  $R_L = 20k\Omega$  connected to  $V_S/2$  and  $V_{OUT} = V_S/2$ , unless otherwise noted.

| PARAMETER                                                                                                                                                                                                                              | CONDITION                                                                                                                                                                                                                                                                                                                     | OPA703NA, UA, PA<br>OPA2703EA, UA, PA<br>OPA4703EA, UA |                                                             |                                               | UNITS                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                               | MIN                                                    | TYP                                                         | MAX                                           |                                                                                                                                                                  |
| <b>OFFSET VOLTAGE</b><br>Input Offset Voltage<br><b>Drift</b><br>vs Power Supply<br><b>Over Temperature</b><br>Channel Separation, dc<br>$f = 1kHz$                                                                                    | $V_{OS}$<br>$dV_{OS}/dT$<br>PSRR<br>$V_S = \pm 5V, V_{CM} = 0V$<br>$T_A = -40^{\circ}C$ to $+85^{\circ}C$<br>$V_S = \pm 2V$ to $\pm 6V, V_{CM} = 0V$<br>$V_S = \pm 2V$ to $\pm 6V, V_{CM} = 0V$<br>$R_L = 20k\Omega$                                                                                                          |                                                        | $\pm 160$<br>$\pm 4$<br>20<br>1<br>98                       | $\pm 750$<br><br>100<br><b>200</b>            | $\mu V$<br>$\mu V/^{\circ}C$<br>$\mu V/V$<br>$\mu V/V$<br>$\mu V/V$<br>dB                                                                                        |
| <b>INPUT VOLTAGE RANGE</b><br>Common-Mode Voltage Range<br>Common-Mode Rejection Ratio<br><b>over Temperature</b><br><b>over Temperature</b>                                                                                           | $V_{CM}$<br>CMRR<br>$V_S = \pm 5V, (V-) - 0.3V < V_{CM} < (V+) + 0.3V$<br>$V_S = \pm 5V, (V-) < V_{CM} < (V+)$<br>$V_S = \pm 5V, (V-) - 0.3V < V_{CM} < (V+) - 2V$<br>$V_S = \pm 5V, (V-) < V_{CM} < (V+) - 2V$                                                                                                               | $(V-) - 0.3$<br>70<br><b>68</b><br>80<br><b>74</b>     | 90<br><br>96                                                | $(V+) + 0.3$                                  | V<br>dB<br><b>dB</b><br>dB<br><b>dB</b>                                                                                                                          |
| <b>INPUT BIAS CURRENT</b><br>Input Bias Current<br>Input Offset Current                                                                                                                                                                | $I_B$<br>$I_{OS}$<br>$V_S = \pm 5V, V_{CM} = 0V$<br>$V_S = \pm 5V, V_{CM} = 0V$                                                                                                                                                                                                                                               |                                                        | $\pm 1$<br>$\pm 0.5$                                        | $\pm 10$<br>$\pm 10$                          | pA<br>pA                                                                                                                                                         |
| <b>INPUT IMPEDANCE</b><br>Differential<br>Common-Mode                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                               |                                                        | $4 \cdot 10^9 \parallel 4$<br>$5 \cdot 10^{12} \parallel 4$ |                                               | $\Omega \parallel pF$<br>$\Omega \parallel pF$                                                                                                                   |
| <b>NOISE</b><br>Input Voltage Noise, $f = 0.1Hz$ to $10Hz$<br>Input Voltage Noise Density, $f = 1kHz$<br>Current Noise Density, $f = 1kHz$                                                                                             | $e_n$<br>$i_n$<br>$V_S = \pm 5V, V_{CM} = 0V$<br>$V_S = \pm 5V, V_{CM} = 0V$<br>$V_S = \pm 5V, V_{CM} = 0V$                                                                                                                                                                                                                   |                                                        | 6<br>45<br>2.5                                              |                                               | $\mu Vp-p$<br>$nV/\sqrt{Hz}$<br>$fA/\sqrt{Hz}$                                                                                                                   |
| <b>OPEN-LOOP GAIN</b><br>Open-Loop Voltage Gain<br><b>over Temperature</b><br><b>over Temperature</b>                                                                                                                                  | $A_{OL}$<br>$R_L = 100k\Omega, (V-)+0.1V < V_O < (V+)-0.1V$<br>$R_L = 20k\Omega, (V-)+0.075V < V_O < (V+)-0.075V$<br><b><math>R_L = 20k\Omega, (V-)+0.075V &lt; V_O &lt; (V+)-0.075V</math></b><br>$R_L = 5k\Omega, (V-)+0.15V < V_O < (V+)-0.15V$<br><b><math>R_L = 5k\Omega, (V-)+0.15V &lt; V_O &lt; (V+)-0.15V</math></b> | 100<br><br><b>96</b><br>100<br><b>96</b>               | 120<br>110<br><br>110                                       |                                               | dB<br>dB<br><b>dB</b><br>dB<br><b>dB</b>                                                                                                                         |
| <b>OUTPUT</b><br>Voltage Output Swing from Rail<br><b>over Temperature</b><br><b>over Temperature</b><br>Output Current<br>Short-Circuit Current<br>Capacitive Load Drive                                                              | $I_{OUT}$<br>$I_{SC}$<br>$C_{LOAD}$<br>$R_L = 100k\Omega, A_{OL} > 80dB$<br>$R_L = 20k\Omega, A_{OL} > 100dB$<br><b><math>R_L = 20k\Omega, A_{OL} &gt; 96dB</math></b><br>$R_L = 5k\Omega, A_{OL} > 100dB$<br><b><math>R_L = 5k\Omega, A_{OL} &gt; 96dB</math></b><br>$ V_S - V_{OUT}  < 1V$                                  |                                                        | 40<br><br>$\pm 10$<br>$\pm 40$                              | 75<br><b>75</b><br>150<br><b>150</b>          | mV<br>mV<br><b>mV</b><br>mV<br><b>mV</b><br>mA<br>mA                                                                                                             |
| See Typical Performance Curves                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                               |                                                        |                                                             |                                               |                                                                                                                                                                  |
| <b>FREQUENCY RESPONSE</b><br>Gain-Bandwidth Product<br>Slew Rate<br>Settling Time, 0.1%<br>0.01%<br>Overload Recovery Time<br>Total Harmonic Distortion + Noise                                                                        | GBW<br>SR<br>$t_S$<br>$t_S$<br>THD+N<br>$C_L = 100pF$<br>$G = +1$<br>$V_S = \pm 5V, G = +1$<br>$V_S = \pm 5V, 5V$ Step, $G = +1$<br>$V_S = \pm 5V, 5V$ Step, $G = +1$<br>$V_{IN} \cdot \text{Gain} = V_S$<br>$V_S = \pm 5V, V_O = 3Vp-p, G = +1, f = 1kHz$                                                                    |                                                        | 1<br>0.6<br>15<br>20<br>3<br>0.02                           |                                               | MHz<br>V/ $\mu s$<br>$\mu s$<br>$\mu s$<br>$\mu s$<br>%                                                                                                          |
| <b>POWER SUPPLY</b><br>Specified Voltage Range, Single Supply<br>Specified Voltage Range, Dual Supplies<br>Operating Voltage Range<br>Quiescent Current (per amplifier)<br><b>over Temperature</b>                                     | $V_S$<br>$V_S$<br>$I_Q$<br>$I_Q = 0$                                                                                                                                                                                                                                                                                          | 4<br>$\pm 2$                                           | 3.6 to 12<br>160                                            | 12<br>$\pm 6$<br><br><b>200</b><br><b>300</b> | V<br>V<br>V<br>$\mu A$<br>$\mu A$                                                                                                                                |
| <b>TEMPERATURE RANGE</b><br>Specified Range<br>Operating Range<br>Storage Range<br>Thermal Resistance<br>SOT23-5 Surface-Mount<br>MSOP-8 Surface-Mount<br>TSSOP-14 Surface-Mount<br>SO-8 Surface Mount<br>SO-14 Surface Mount<br>DIP-8 | $\theta_{JA}$                                                                                                                                                                                                                                                                                                                 | -40<br>-55<br>-65                                      |                                                             | 85<br>125<br>150                              | $^{\circ}C$<br>$^{\circ}C$<br>$^{\circ}C$<br>$^{\circ}C/W$<br>$^{\circ}C/W$<br>$^{\circ}C/W$<br>$^{\circ}C/W$<br>$^{\circ}C/W$<br>$^{\circ}C/W$<br>$^{\circ}C/W$ |

# OPA704 ELECTRICAL CHARACTERISTICS: $V_S = 4V$ to $12V$







**Boldface** limits apply over the specified temperature range,  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

At  $T_A = +25^{\circ}\text{C}$ ,  $R_L = 20\text{k}\Omega$  connected to  $V_S/2$  and  $V_{OUT} = V_S/2$ , unless otherwise noted.

| PARAMETER                                                                                                                                                                                                                              | CONDITION                                                                                                                                                                                                                                                                                                                                                                                                               | OPA704NA, UA, PA<br>OPA2704EA, UA, PA<br>OPA4704EA, UA |                                                             |                                               | UNITS                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                         | MIN                                                    | TYP                                                         | MAX                                           |                                                                                                                                                                                                                                                                                         |
| <b>OFFSET VOLTAGE</b><br>Input Offset Voltage<br><b>Drift</b><br>vs Power Supply<br><b>Over Temperature</b><br>Channel Separation, dc<br>$f = 1\text{kHz}$                                                                             | $V_{OS}$<br>$dV_{OS}/dT$<br>PSRR<br>$V_S = \pm 5V$ , $V_{CM} = 0V$<br>$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$<br>$V_S = \pm 2V$ to $\pm 6V$ , $V_{CM} = 0V$<br>$V_S = \pm 2V$ to $\pm 6V$ , $V_{CM} = 0V$<br>$R_L = 20\text{k}\Omega$                                                                                                                                                                      |                                                        | $\pm 160$<br>$\pm 4$<br>20<br>1<br>98                       | $\pm 750$<br><br>100<br><b>200</b>            | $\mu\text{V}$<br>$\mu\text{V}/^{\circ}\text{C}$<br>$\mu\text{V}/\text{V}$<br>$\mu\text{V}/\text{V}$<br>$\mu\text{V}/\text{V}$<br>dB                                                                                                                                                     |
| <b>INPUT VOLTAGE RANGE</b><br>Common-Mode Voltage Range<br>Common-Mode Rejection Ratio<br><b>over Temperature</b><br><b>over Temperature</b>                                                                                           | $V_{CM}$<br>CMRR<br>$V_S = \pm 5V$ , $(V-) - 0.3V < V_{CM} < (V+) + 0.3V$<br>$V_S = \pm 5V$ , $(V-) < V_{CM} < (V+)$<br>$V_S = \pm 5V$ , $(V-) - 0.3V < V_{CM} < (V+) - 2V$<br>$V_S = \pm 5V$ , $(V-) < V_{CM} < (V+) - 2V$                                                                                                                                                                                             | $(V-) - 0.3$<br>70<br><b>68</b><br>80<br><b>74</b>     | 90<br><br>96                                                | $(V+) + 0.3$                                  | V<br>dB<br>dB<br>dB<br>dB                                                                                                                                                                                                                                                               |
| <b>INPUT BIAS CURRENT</b><br>Input Bias Current<br>Input Offset Current                                                                                                                                                                | $I_B$<br>$I_{OS}$<br>$V_S = \pm 5V$ , $V_{CM} = 0V$<br>$V_S = \pm 5V$ , $V_{CM} = 0V$                                                                                                                                                                                                                                                                                                                                   |                                                        | $\pm 1$<br>$\pm 0.5$                                        | $\pm 10$<br>$\pm 10$                          | pA<br>pA                                                                                                                                                                                                                                                                                |
| <b>INPUT IMPEDANCE</b><br>Differential<br>Common-Mode                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                        | $4 \cdot 10^9 \parallel 4$<br>$5 \cdot 10^{12} \parallel 4$ |                                               | $\Omega \parallel \text{pF}$<br>$\Omega \parallel \text{pF}$                                                                                                                                                                                                                            |
| <b>NOISE</b><br>Input Voltage Noise, $f = 0.1\text{Hz}$ to $10\text{Hz}$<br>Input Voltage Noise Density, $f = 1\text{kHz}$<br>Current Noise Density, $f = 1\text{kHz}$                                                                 | $e_n$<br>$i_n$<br>$V_S = \pm 5V$ , $V_{CM} = 0V$<br>$V_S = \pm 5V$ , $V_{CM} = 0V$<br>$V_S = \pm 5V$ , $V_{CM} = 0V$                                                                                                                                                                                                                                                                                                    |                                                        | 6<br>45<br>2.5                                              |                                               | $\mu\text{Vp-p}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\text{fA}/\sqrt{\text{Hz}}$                                                                                                                                                                                                        |
| <b>OPEN-LOOP GAIN</b><br>Open-Loop Voltage Gain<br><b>over Temperature</b><br><b>over Temperature</b>                                                                                                                                  | $A_{OL}$<br>$R_L = 100\text{k}\Omega$ , $(V-) + 0.1V < V_O < (V+) - 0.1V$<br>$R_L = 20\text{k}\Omega$ , $(V-) + 0.075V < V_O < (V+) - 0.075V$<br><b><math>R_L = 20\text{k}\Omega</math>, <math>(V-) + 0.075V &lt; V_O &lt; (V+) - 0.075V</math></b><br>$R_L = 5\text{k}\Omega$ , $(V-) + 0.15V < V_O < (V+) - 0.15V$<br><b><math>R_L = 5\text{k}\Omega</math>, <math>(V-) + 0.15V &lt; V_O &lt; (V+) - 0.15V</math></b> | 100<br><br><b>96</b><br>100<br><b>96</b>               | 120<br>110<br><br>110                                       |                                               | dB<br>dB<br>dB<br>dB<br>dB                                                                                                                                                                                                                                                              |
| <b>OUTPUT</b><br>Voltage Output Swing from Rail<br><b>over Temperature</b><br><b>over Temperature</b><br>Output Current<br>Short-Circuit Current<br>Capacitive Load Drive                                                              | $I_{OUT}$<br>$I_{SC}$<br>$C_{LOAD}$<br>$R_L = 100\text{k}\Omega$ , $A_{OL} > 80\text{dB}$<br>$R_L = 20\text{k}\Omega$ , $A_{OL} > 100\text{dB}$<br><b><math>R_L = 20\text{k}\Omega</math>, <math>A_{OL} &gt; 96\text{dB}</math></b><br>$R_L = 5\text{k}\Omega$ , $A_{OL} > 100\text{dB}$<br><b><math>R_L = 5\text{k}\Omega</math>, <math>A_{OL} &gt; 96\text{dB}</math></b><br>$ V_S - V_{OUT}  < 1V$                   |                                                        | 40<br><br>$\pm 10$<br>$\pm 40$                              | 75<br><b>75</b><br>150<br><b>150</b>          | mV<br>mV<br>mV<br>mV<br>mA<br>mA                                                                                                                                                                                                                                                        |
| <b>FREQUENCY RESPONSE</b><br>Gain-Bandwidth Product<br>Slew Rate<br>Settling Time, 0.1%<br>0.01%<br>Overload Recovery Time<br>Total Harmonic Distortion + Noise                                                                        | GBW<br>SR<br>$t_S$<br>$t_S$<br>THD+N<br>$C_L = 100\text{pF}$<br>$G = +5$<br>$V_S = \pm 5V$ , $G = +5$<br>$V_S = \pm 5V$ , 5V Step, $G = +5$<br>$V_S = \pm 5V$ , 5V Step, $G = +5$<br>$V_{IN} \cdot \text{Gain} = V_S$<br>$V_S = \pm 5V$ , $V_O = 3V_{p-p}$ , $G = +5$ , $f = 1\text{kHz}$                                                                                                                               |                                                        | 3<br>3<br>18<br>21<br>0.6<br>0.025                          |                                               | MHz<br>V/ $\mu\text{s}$<br>$\mu\text{s}$<br>$\mu\text{s}$<br>$\mu\text{s}$<br>%                                                                                                                                                                                                         |
| <b>POWER SUPPLY</b><br>Specified Voltage Range, Single Supply<br>Specified Voltage Range, Dual Supplies<br>Operating Voltage Range<br>Quiescent Current (per amplifier)<br><b>over Temperature</b>                                     | $V_S$<br>$V_S$<br>$I_Q$<br>$I_Q = 0$                                                                                                                                                                                                                                                                                                                                                                                    | 4<br>$\pm 2$                                           | 3.6 to 12<br>160                                            | 12<br>$\pm 6$<br><br><b>200</b><br><b>300</b> | V<br>V<br>V<br>$\mu\text{A}$<br>$\mu\text{A}$                                                                                                                                                                                                                                           |
| <b>TEMPERATURE RANGE</b><br>Specified Range<br>Operating Range<br>Storage Range<br>Thermal Resistance<br>SOT23-5 Surface-Mount<br>MSOP-8 Surface-Mount<br>TSSOP-14 Surface-Mount<br>SO-8 Surface Mount<br>SO-14 Surface Mount<br>DIP-8 | $\theta_{JA}$                                                                                                                                                                                                                                                                                                                                                                                                           | -40<br>-55<br>-65                                      |                                                             | 85<br>125<br>150                              | $^{\circ}\text{C}$<br>$^{\circ}\text{C}$<br>$^{\circ}\text{C}$<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$<br>$^{\circ}\text{C}/\text{W}$ |







# TYPICAL CHARACTERISTICS

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ , and  $R_L = 20\text{k}\Omega$ , unless otherwise noted.

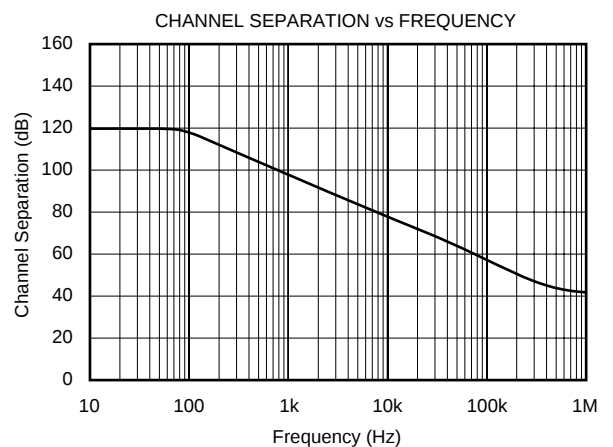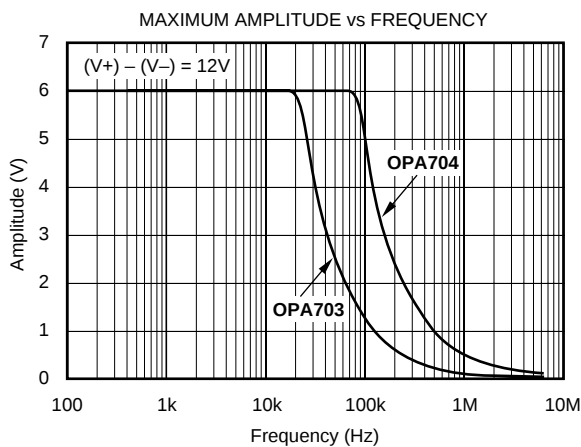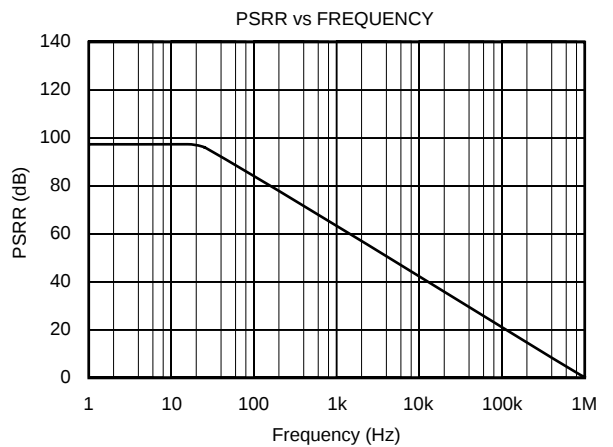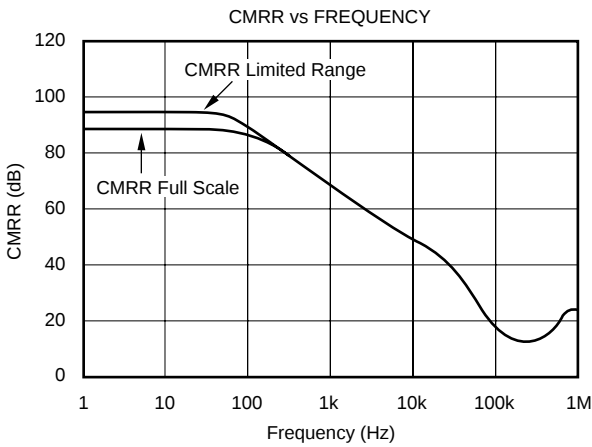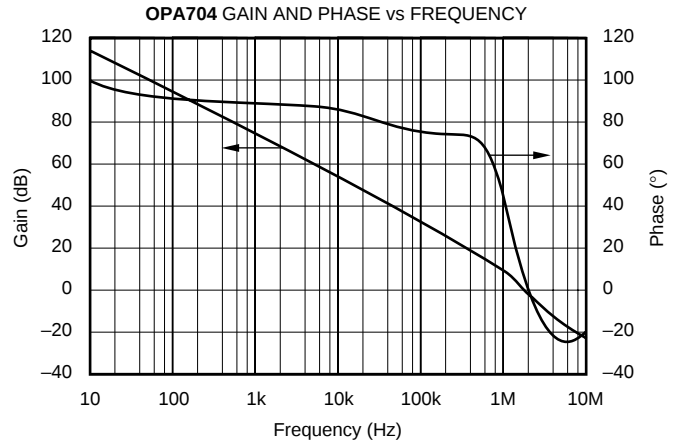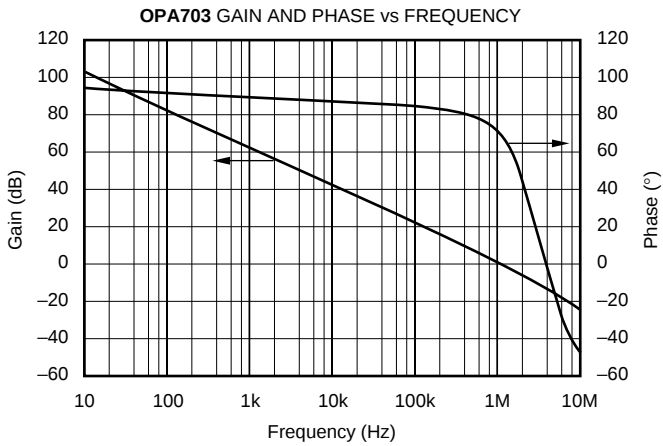







# TYPICAL CHARACTERISTICS (Cont.)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ , and  $R_L = 20\text{k}\Omega$ , unless otherwise noted.

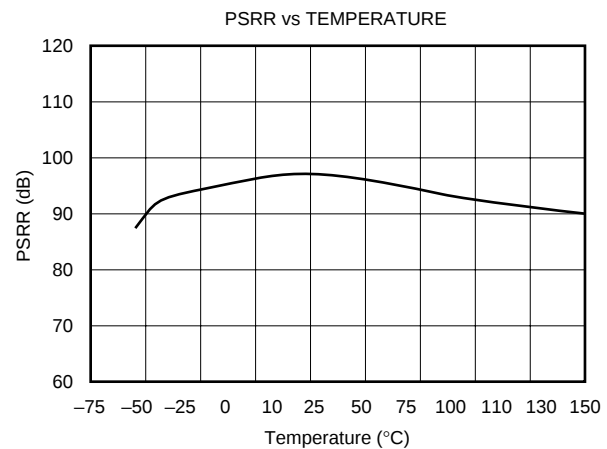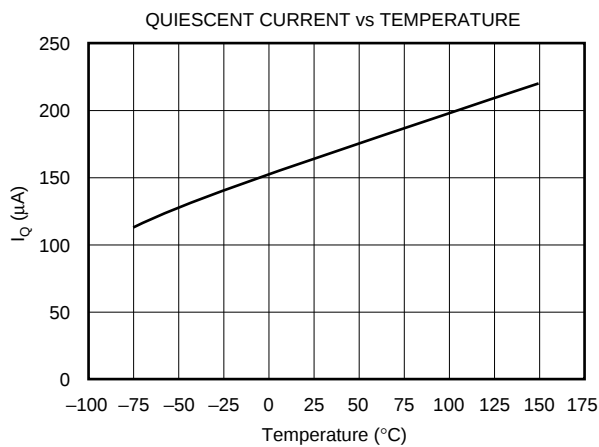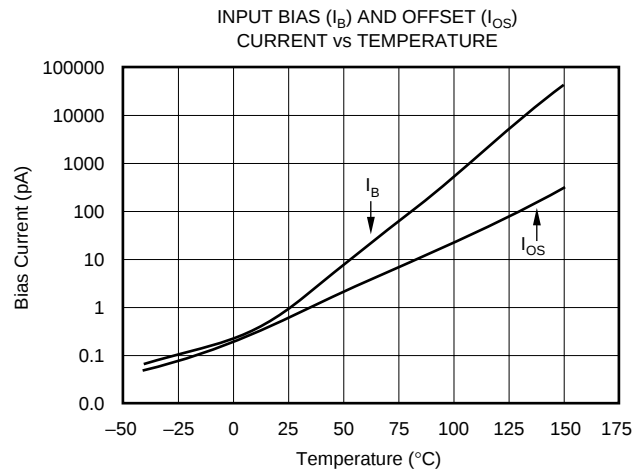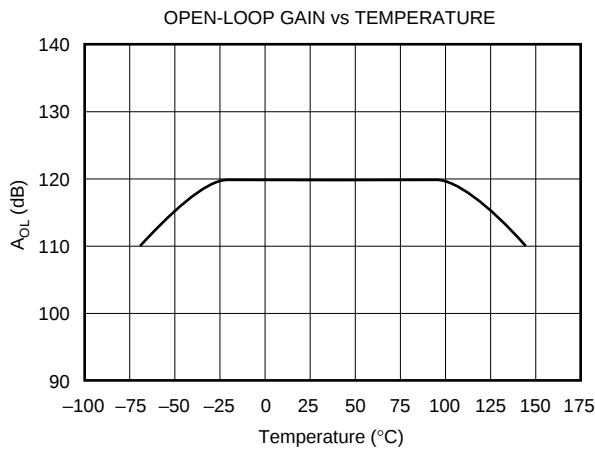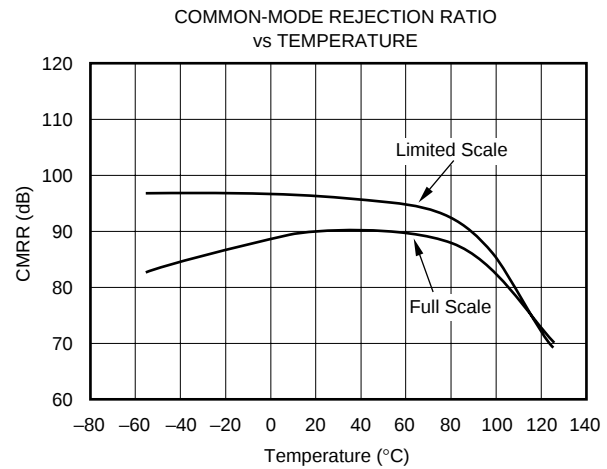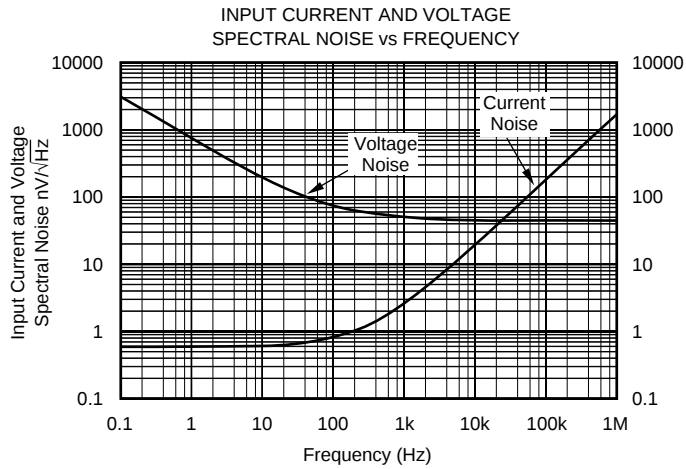







# TYPICAL CHARACTERISTICS (Cont.)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ , and  $R_L = 20\text{k}\Omega$ , unless otherwise noted.

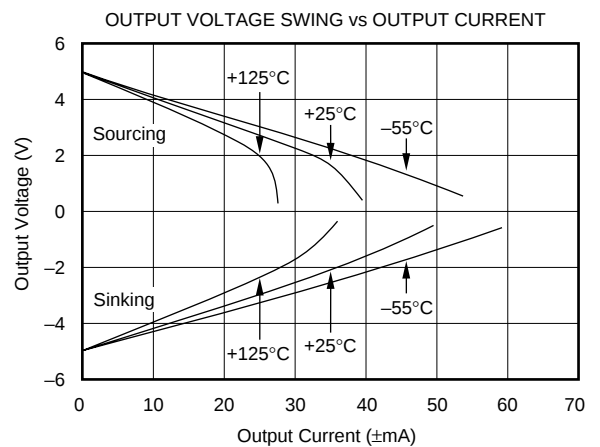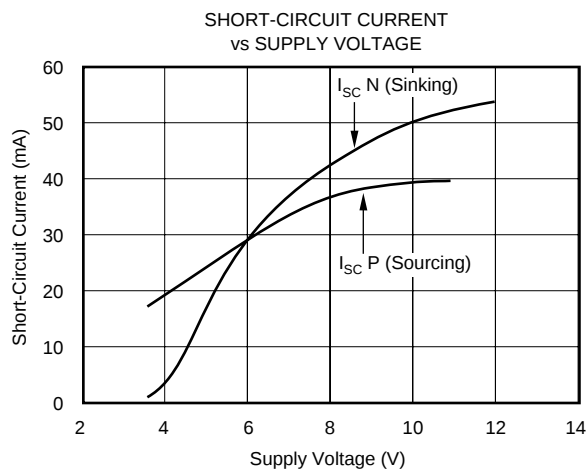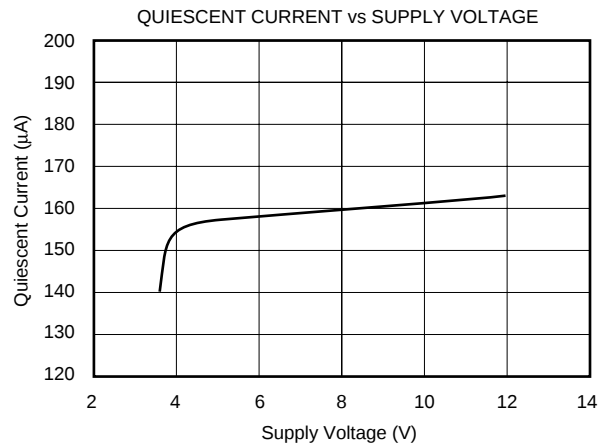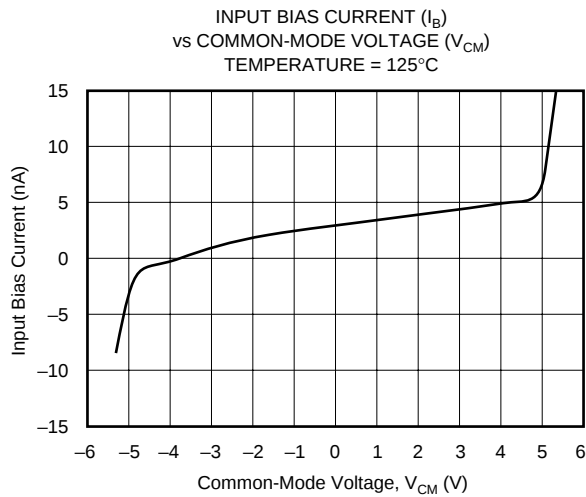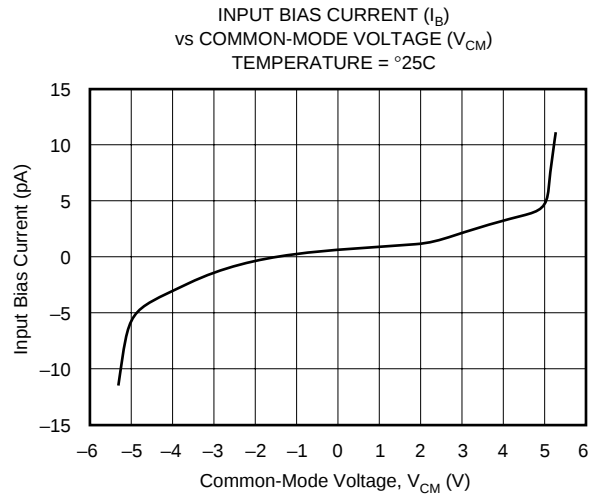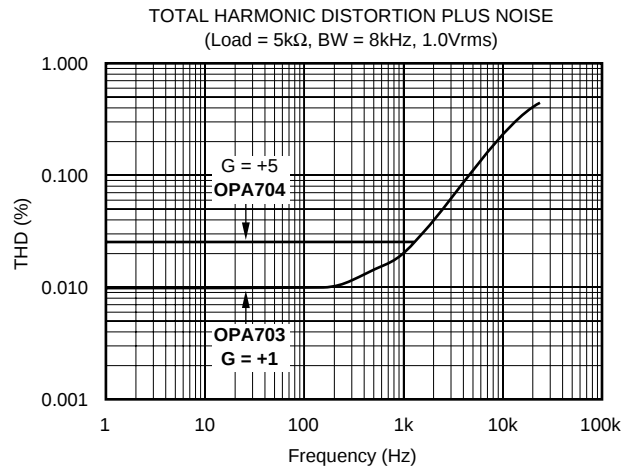

# TYPICAL CHARACTERISTICS (Cont.)


At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ , and  $R_L = 20\text{k}\Omega$ , unless otherwise noted.

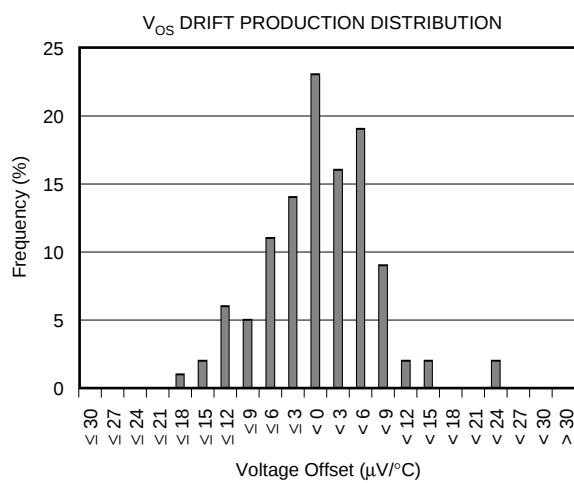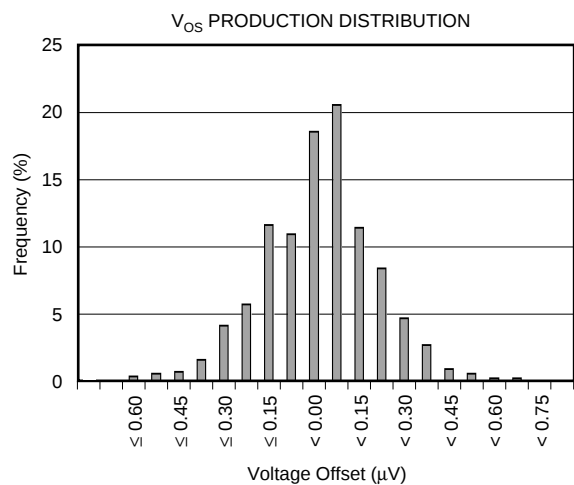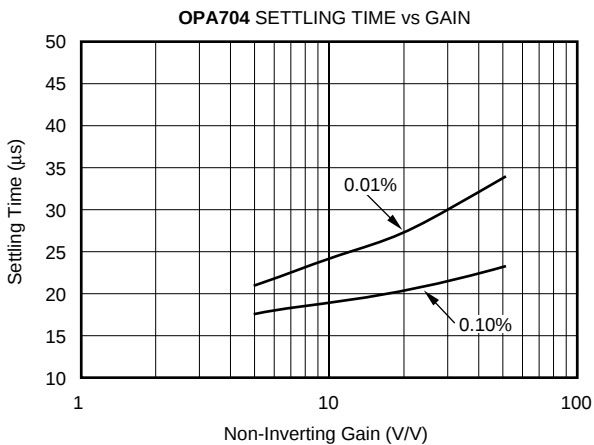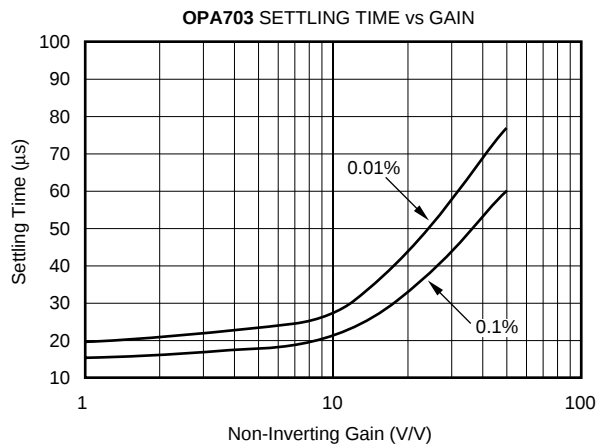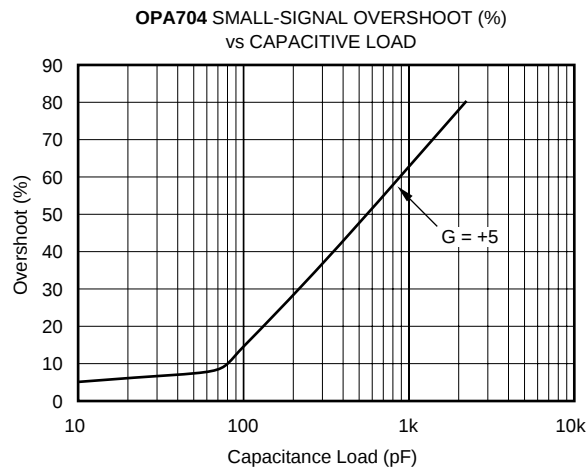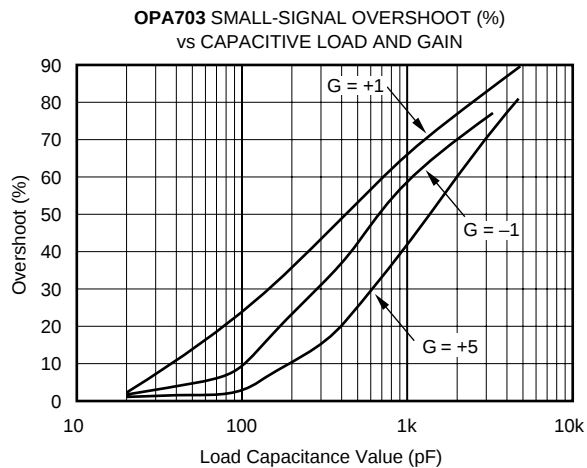


# TYPICAL CHARACTERISTICS (Cont.)

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ , and  $R_L = 20\text{k}\Omega$ , unless otherwise noted.


**OPA703 SMALL SIGNAL STEP RESPONSE**  
( $G = +1\text{V/V}$ ,  $R_L = 20\text{k}\Omega$ ,  $C_L = 100\text{pF}$ )

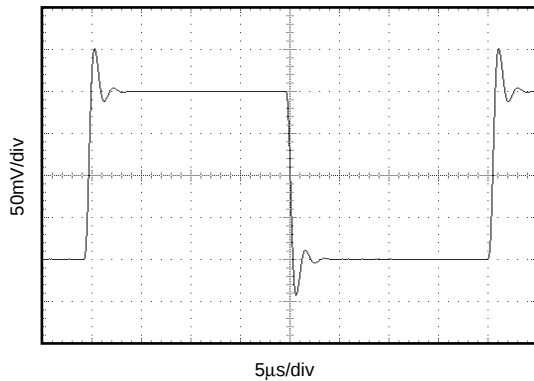


**OPA704 SMALL SIGNAL STEP RESPONSE**  
( $G = +5\text{V/V}$ ,  $C_F = 3\text{pF}$ ,  $R_F = 100\text{k}\Omega$ ,  
 $C_L = 100\text{pF}$ ,  $R_L = 20\text{k}\Omega$ )

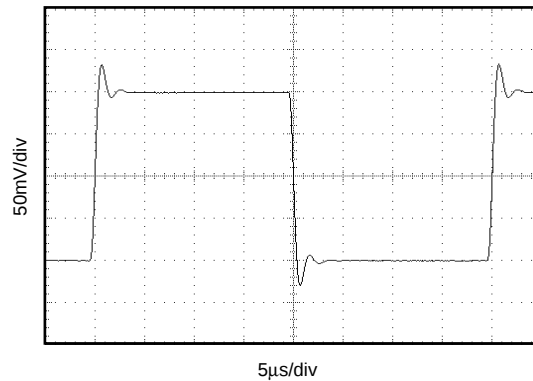

**OPA703 LARGE SIGNAL STEP RESPONSE**  
( $G = +1\text{V/V}$ ,  $R_L = 20\text{k}\Omega$ ,  $C_L = 100\text{pF}$ )

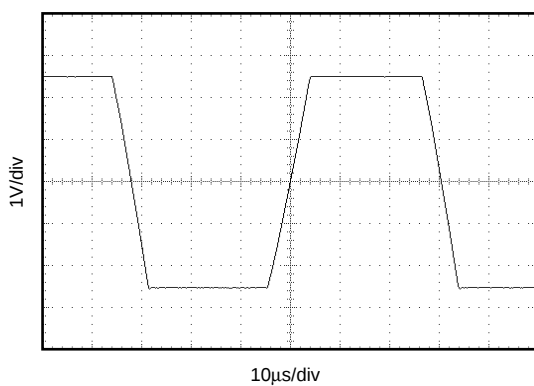

**OPA704 LARGE SIGNAL STEP RESPONSE**  
( $G = +5\text{V/V}$ ,  $R_L = 20\text{k}\Omega$ ,  $C_F = 3\text{pF}$ ,  $C_L = 100\text{pF}$ )

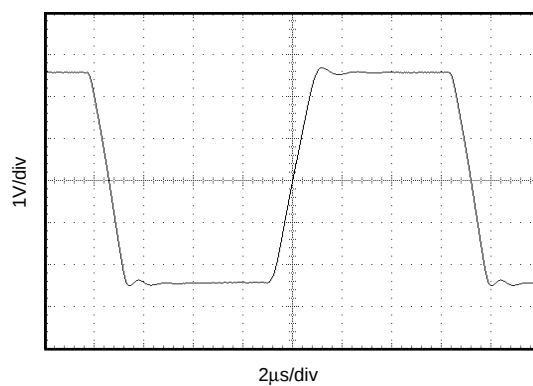

## APPLICATIONS INFORMATION

OPA703 and OPA704 series op amps can operate on 160 $\mu$ A quiescent current from a single (or split) supply in the range of 4V to 12V ( $\pm 2$ V to  $\pm 6$ V), making them highly versatile and easy to use. The OPA703 is unity-gain stable and offers 1MHz bandwidth and 0.6V/ $\mu$ s slew rate. The OPA704 is optimized for gains of 5 or greater with a 3MHz bandwidth and 3V/ $\mu$ s slew rate.

Rail-to-rail input and output swing helps maintain dynamic range, especially in low supply applications. Figure 1 shows the input and output waveforms for the OPA703 in unity-gain configuration. Operation is from a  $\pm 5$ V supply with a 100k $\Omega$  load connected to  $V_S/2$ . The input is a 10Vp-p sinusoid. Output voltage is approximately 10Vp-p.

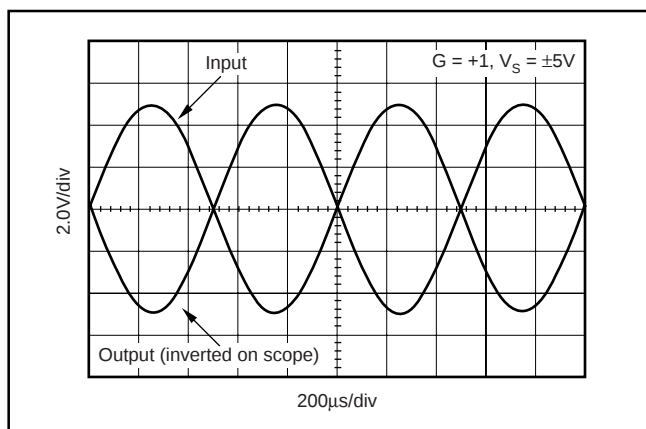


FIGURE 1. Rail-to-Rail Input and Output.

Power-supply pins should be bypassed with 1000pF ceramic capacitors in parallel with 1 $\mu$ F tantalum capacitors.

## OPERATING VOLTAGE

OPA703 and OPA704 series op amps are fully specified and guaranteed from +4V to +12V over a temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . Parameters that vary significantly with operating voltages or temperature are shown in the Typical Performance Curves.

## RAIL-TO-RAIL INPUT

The input common-mode voltage range of the OPA703 series extends 300mV beyond the supply rails at room temperature. This is achieved with a complementary input stage—an N-channel input differential pair in parallel with a P-channel differential pair, as shown in Figure 2. The N-channel pair is active for input voltages close to the positive rail, typically  $(V+) - 2.0$ V to 300mV above the positive supply, while the P-channel pair is on for inputs from 300mV below the negative supply to approximately  $(V+) - 1.5$ V. There is a small transition region, typically  $(V+) - 2.0$ V to  $(V+) - 1.5$ V, in which both pairs are on. This 500mV transition region can vary  $\pm 100$ mV with process variation. Thus, the transition region (both stages on) can range from  $(V+) - 2.1$ V to  $(V+) - 1.4$ V on the low end, up to  $(V+) - 1.9$ V to  $(V+) - 1.6$ V on the high end. Within the 500mV transition region PSRR, CMRR, offset voltage, and offset drift, and THD may vary compared to operation outside this region.

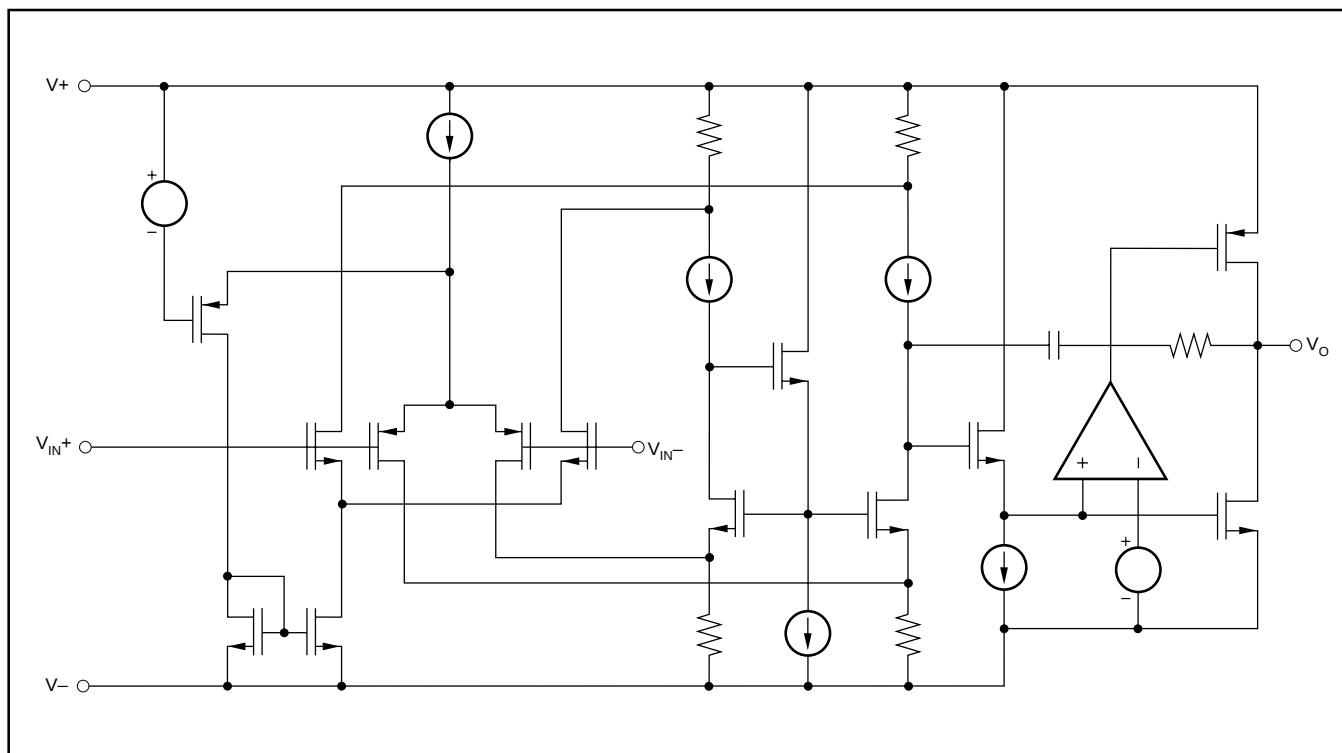


FIGURE 2. Simplified Schematic.

## INPUT VOLTAGE

Device inputs are protected by ESD diodes that will conduct if the input voltages exceed the power supplies by more than approximately 300mV. Momentary voltages greater than 300mV beyond the power supply can be tolerated if the current is limited to 10mA. This is easily accomplished with an input resistor, as shown in Figure 3. Many input signals are inherently current-limited to less than 10mA; therefore, a limiting resistor is not always required. The OPA703 features no phase inversion when the inputs extend beyond supplies if the input current is limited, as seen in Figure 4.

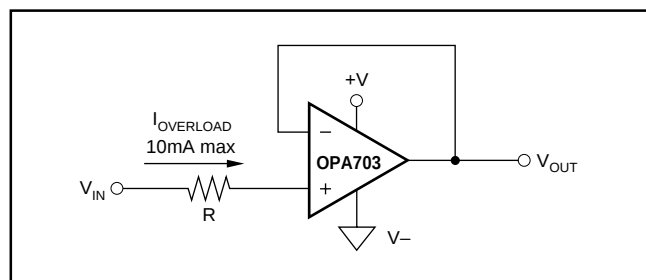


FIGURE 3. Input Current Protection for Voltages Exceeding the Supply Voltage.

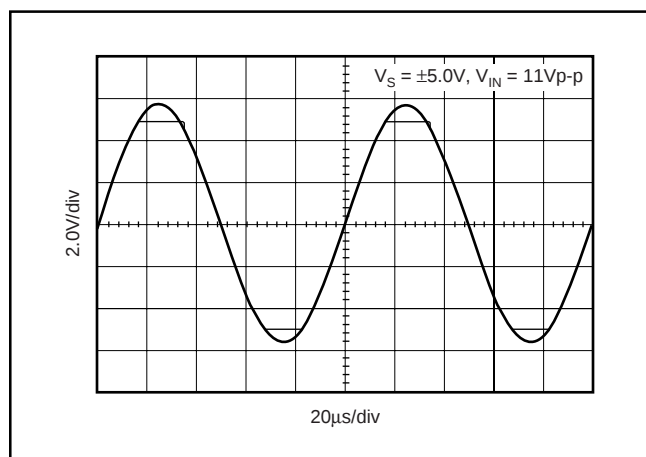


FIGURE 4. OPA703—No Phase Inversion with Inputs Greater than the Power-Supply Voltage.

## RAIL-TO-RAIL OUTPUT

A class AB output stage with common-source transistors is used to achieve rail-to-rail output. This output stage is capable of driving 1kΩ loads connected to any point between V+ and ground. For light resistive loads (> 100kΩ), the output voltage can swing to 40mV from the supply rail. With moderate resistive loads (20kΩ), the output can swing to within 75mV from the supply rails while maintaining high open-loop gain (see the typical performance curve “Output Voltage Swing vs Output Current”).

## CAPACITIVE LOAD AND STABILITY

The OPA703 and OPA704 series op amps can drive up to 1000pF pure capacitive load. Increasing the gain enhances the amplifier’s ability to drive greater capacitive loads (see the typical performance curve “Small Signal Overshoot vs Capacitive Load”).

One method of improving capacitive load drive in the unity-gain configuration is to insert a 10Ω to 20Ω resistor inside the feedback loop, as shown in Figure 5. This reduces ringing with large capacitive loads while maintaining DC accuracy.

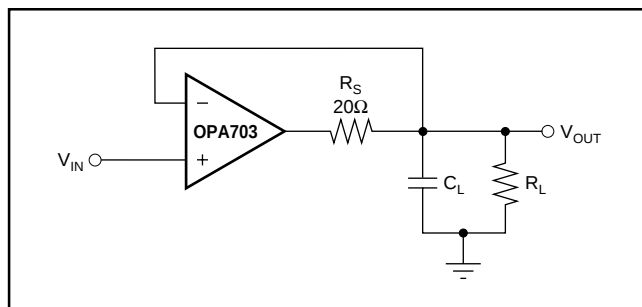





FIGURE 5. Series Resistor in Unity-Gain Buffer Configuration Improves Capacitive Load Drive.

## APPLICATION CIRCUITS

Figure 6 shows a G = 5 non-inverting amplifier implemented with the OPA703 and OPA704 op amps. It demonstrates the increased speed characteristics (bandwidth, slew rate and settling time) that can be achieved with the OPA704 family when used in gains of five or greater. Some optimization of feedback capacitor value may be required to achieve best dynamic response. Circuits with closed-loop gains of less than five should use the OPA703 family for good stability and capacitive load drive. The OPA703 can be used in gains greater than five, but will not provide the increased speed benefits of the OPA704 family.

The OPA703 series op amps are optimized for driving medium-speed sampling data converters. The OPA703 op amps buffer the converter’s input capacitance and resulting charge injection while providing signal gain.

Figure 7 shows the OPA2703 in a dual-supply buffered reference configuration for the DAC7644. The DAC7644 is a 16-bit, low-power, quad-voltage output converter. Small size makes the combination ideal for automatic test equipment, data acquisition systems, and other low-power space-limited applications.

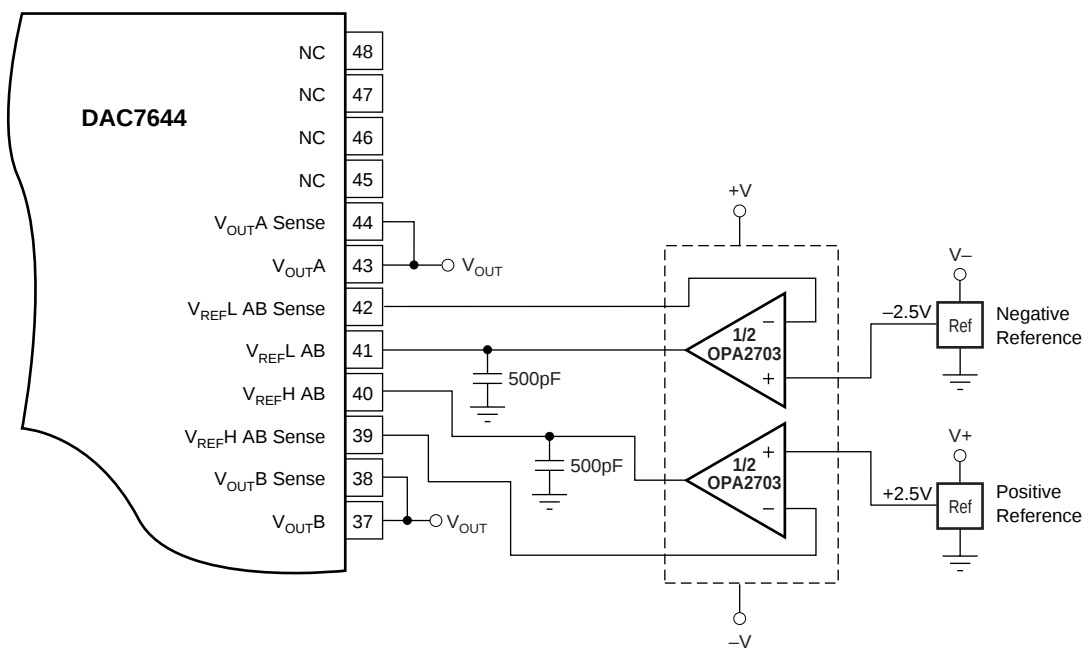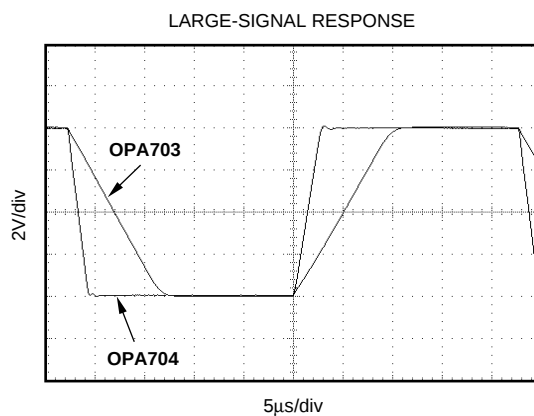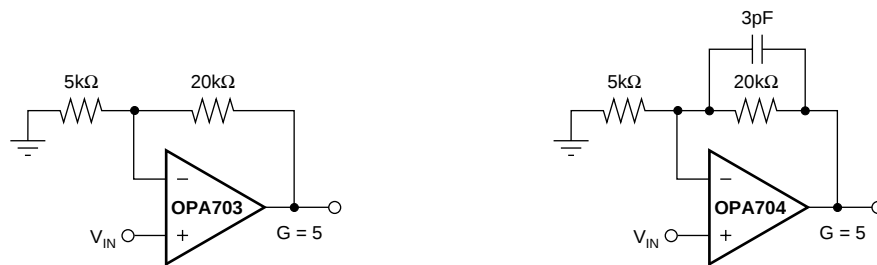

**PACKAGING INFORMATION**

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">OPA2703EA/250</a> | Active        | Production           | VSSOP (DGK)   8 | 250   SMALL T&R       | Yes         | Call TI   Nipdauag                   | Level-2-260C-1 YEAR               | -40 to 85    | B03                 |
| OPA2703EA/250.B               | Active        | Production           | VSSOP (DGK)   8 | 250   SMALL T&R       | Yes         | Call TI                              | Level-2-260C-1 YEAR               | -40 to 85    | B03                 |
| <a href="#">OPA2703EA/2K5</a> | Active        | Production           | VSSOP (DGK)   8 | 2500   LARGE T&R      | Yes         | Call TI   Nipdauag                   | Level-2-260C-1 YEAR               | -40 to 85    | B03                 |
| OPA2703EA/2K5.B               | Active        | Production           | VSSOP (DGK)   8 | 2500   LARGE T&R      | Yes         | Call TI                              | Level-2-260C-1 YEAR               | -40 to 85    | B03                 |
| <a href="#">OPA2703UA</a>     | Last Time Buy | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| OPA2703UA.B                   | Last Time Buy | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| <a href="#">OPA2703UA/2K5</a> | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| OPA2703UA/2K5.B               | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| OPA2703UA/2K5G4               | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| OPA2703UAG4                   | Active        | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| OPA2703UAG4.B                 | Active        | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2703UA       |
| <a href="#">OPA2704EA/250</a> | Active        | Production           | VSSOP (DGK)   8 | 250   SMALL T&R       | Yes         | Call TI   Nipdauag                   | Level-2-260C-1 YEAR               | -40 to 85    | B04                 |
| OPA2704EA/250.B               | Active        | Production           | VSSOP (DGK)   8 | 250   SMALL T&R       | Yes         | Call TI                              | Level-2-260C-1 YEAR               | -40 to 85    | B04                 |
| <a href="#">OPA2704UA</a>     | Last Time Buy | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2704UA       |
| OPA2704UA.B                   | Last Time Buy | Production           | SOIC (D)   8    | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2704UA       |
| <a href="#">OPA2704UA/2K5</a> | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2704UA       |
| OPA2704UA/2K5.B               | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>2704UA       |
| <a href="#">OPA4703EA/250</a> | Active        | Production           | TSSOP (PW)   14 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |
| OPA4703EA/250.B               | Active        | Production           | TSSOP (PW)   14 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| OPA4703EA/250G4               | Active        | Production           | TSSOP (PW)   14  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |
| OPA4703EA/250G4.B             | Active        | Production           | TSSOP (PW)   14  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |
| <a href="#">OPA4703EA/2K5</a> | Active        | Production           | TSSOP (PW)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |
| OPA4703EA/2K5.B               | Active        | Production           | TSSOP (PW)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |
| OPA4703EA/2K5G4               | Active        | Production           | TSSOP (PW)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4703EA       |
| <a href="#">OPA4703UA</a>     | Active        | Production           | SOIC (D)   14    | 50   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA4703UA           |
| OPA4703UA.B                   | Active        | Production           | SOIC (D)   14    | 50   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA4703UA           |
| <a href="#">OPA4704EA/250</a> | Active        | Production           | TSSOP (PW)   14  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4704EA       |
| OPA4704EA/250.B               | Active        | Production           | TSSOP (PW)   14  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4704EA       |
| OPA4704EA/250G4               | Active        | Production           | TSSOP (PW)   14  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4704EA       |
| OPA4704EA/250G4.B             | Active        | Production           | TSSOP (PW)   14  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4704EA       |
| <a href="#">OPA4704EA/2K5</a> | Active        | Production           | TSSOP (PW)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4704EA       |
| OPA4704EA/2K5.B               | Active        | Production           | TSSOP (PW)   14  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA<br>4704EA       |
| <a href="#">OPA4704UA</a>     | Active        | Production           | SOIC (D)   14    | 50   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA4704UA           |
| OPA4704UA.B                   | Active        | Production           | SOIC (D)   14    | 50   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA4704UA           |
| <a href="#">OPA703NA/250</a>  | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A03                 |
| OPA703NA/250.B                | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A03                 |
| OPA703NA/250G4                | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A03                 |
| <a href="#">OPA703NA/3K</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A03                 |
| OPA703NA/3K.B                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A03                 |
| OPA703NA/3KG4                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A03                 |
| <a href="#">OPA703PA</a>      | Active        | Production           | PDIP (P)   8     | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -40 to 85    | OPA703PA            |
| OPA703PA.B                    | Active        | Production           | PDIP (P)   8     | 50   TUBE             | Yes         | NIPDAU                               | N/A for Pkg Type                  | -40 to 85    | OPA703PA            |

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">OPA703UA</a>     | Last Time Buy | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 703UA           |
| OPA703UA.B                   | Last Time Buy | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 703UA           |
| <a href="#">OPA703UA/2K5</a> | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 703UA           |
| OPA703UA/2K5.B               | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 703UA           |
| <a href="#">OPA704NA/250</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A04                 |
| OPA704NA/250.B               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A04                 |
| OPA704NA/250G4               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A04                 |
| <a href="#">OPA704NA/3K</a>  | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A04                 |
| OPA704NA/3K.B                | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A04                 |
| OPA704NA/3KG4                | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | A04                 |
| <a href="#">OPA704UA</a>     | Last Time Buy | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 704UA           |
| OPA704UA.B                   | Last Time Buy | Production           | SOIC (D)   8     | 75   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 704UA           |
| <a href="#">OPA704UA/2K5</a> | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 704UA           |
| OPA704UA/2K5.B               | Active        | Production           | SOIC (D)   8     | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | OPA 704UA           |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

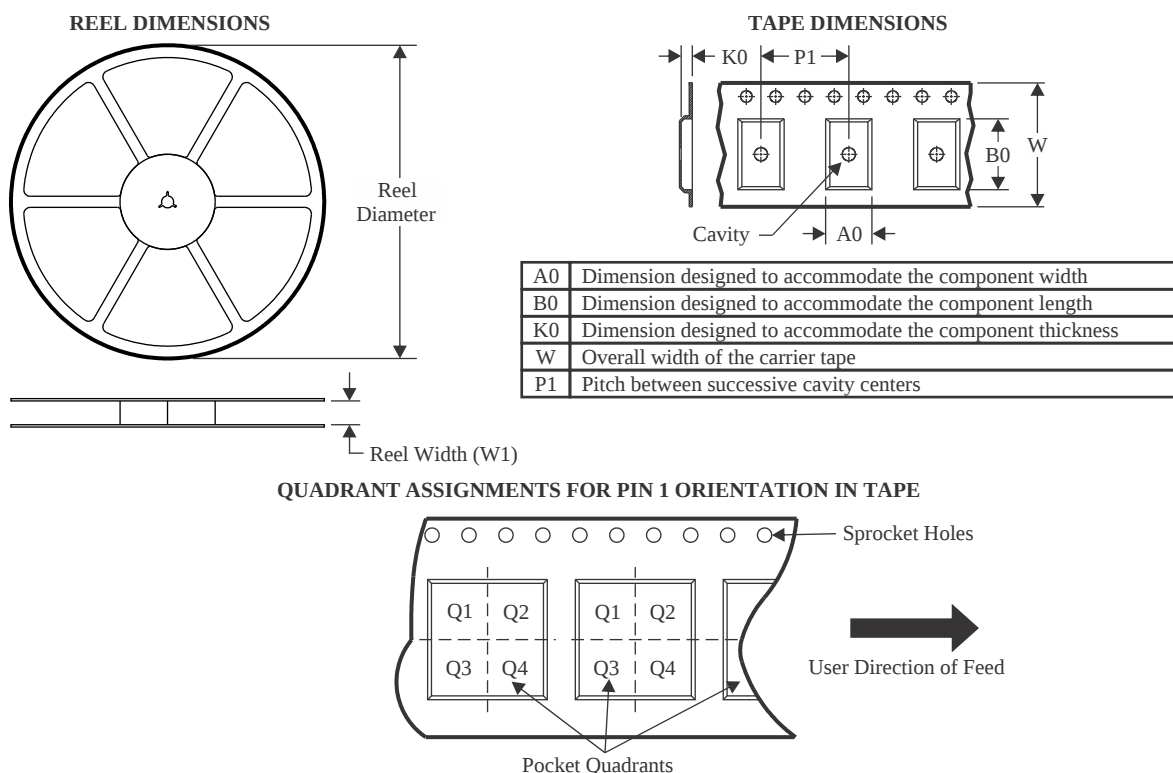

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| OPA2703EA/250   | VSSOP        | DGK             | 8    | 250  | 180.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2703EA/2K5   | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2703UA/2K5   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| OPA2704EA/250   | VSSOP        | DGK             | 8    | 250  | 180.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2704UA/2K5   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| OPA4703EA/250   | TSSOP        | PW              | 14   | 250  | 180.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA4703EA/250G4 | TSSOP        | PW              | 14   | 250  | 180.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA4703EA/2K5   | TSSOP        | PW              | 14   | 2500 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA4704EA/250   | TSSOP        | PW              | 14   | 250  | 180.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA4704EA/250G4 | TSSOP        | PW              | 14   | 250  | 180.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA4704EA/2K5   | TSSOP        | PW              | 14   | 2500 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA703NA/250    | SOT-23       | DBV             | 5    | 250  | 178.0              | 8.4                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| OPA703NA/3K     | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| OPA703UA/2K5    | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| OPA704NA/250    | SOT-23       | DBV             | 5    | 250  | 178.0              | 8.4                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| OPA704NA/3K     | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |

---

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| OPA704UA/2K5 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| OPA2703EA/250   | VSSOP        | DGK             | 8    | 250  | 213.0       | 191.0      | 35.0        |
| OPA2703EA/2K5   | VSSOP        | DGK             | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| OPA2703UA/2K5   | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| OPA2704EA/250   | VSSOP        | DGK             | 8    | 250  | 213.0       | 191.0      | 35.0        |
| OPA2704UA/2K5   | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| OPA4703EA/250   | TSSOP        | PW              | 14   | 250  | 213.0       | 191.0      | 35.0        |
| OPA4703EA/250G4 | TSSOP        | PW              | 14   | 250  | 213.0       | 191.0      | 35.0        |
| OPA4703EA/2K5   | TSSOP        | PW              | 14   | 2500 | 353.0       | 353.0      | 32.0        |
| OPA4704EA/250   | TSSOP        | PW              | 14   | 250  | 213.0       | 191.0      | 35.0        |
| OPA4704EA/250G4 | TSSOP        | PW              | 14   | 250  | 213.0       | 191.0      | 35.0        |
| OPA4704EA/2K5   | TSSOP        | PW              | 14   | 2500 | 353.0       | 353.0      | 32.0        |
| OPA703NA/250    | SOT-23       | DBV             | 5    | 250  | 565.0       | 140.0      | 75.0        |
| OPA703NA/3K     | SOT-23       | DBV             | 5    | 3000 | 565.0       | 140.0      | 75.0        |
| OPA703UA/2K5    | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| OPA704NA/250    | SOT-23       | DBV             | 5    | 250  | 565.0       | 140.0      | 75.0        |
| OPA704NA/3K     | SOT-23       | DBV             | 5    | 3000 | 565.0       | 140.0      | 75.0        |
| OPA704UA/2K5    | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |

## TUBE

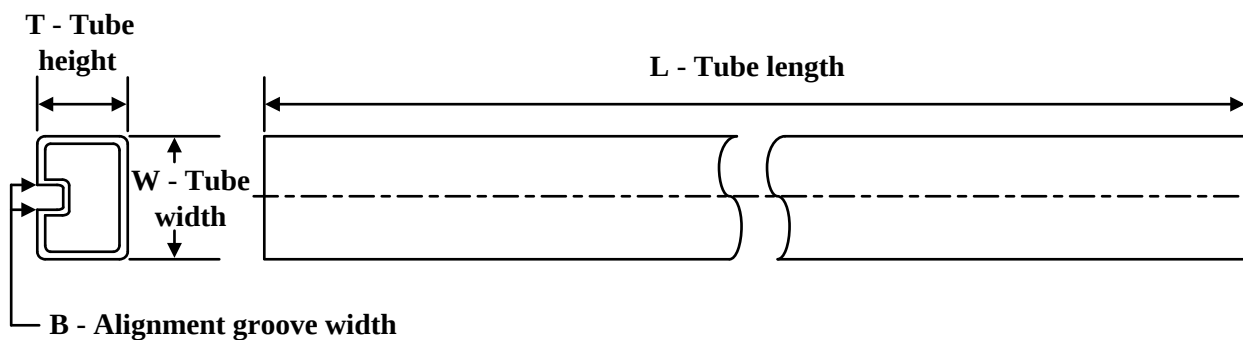

\*All dimensions are nominal

| Device        | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|---------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| OPA2703UA     | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA2703UA.B   | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA2703UAG4   | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA2703UAG4.B | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA2704UA     | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA2704UA.B   | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA4703UA     | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| OPA4703UA.B   | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| OPA4704UA     | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| OPA4704UA.B   | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| OPA703PA      | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| OPA703PA.B    | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| OPA703UA      | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA703UA.B    | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA704UA      | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA704UA.B    | D            | SOIC         | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |

**D0014A****PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

**NOTES:**

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

# EXAMPLE BOARD LAYOUT

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
SCALE:8X



SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



## PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT


D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X

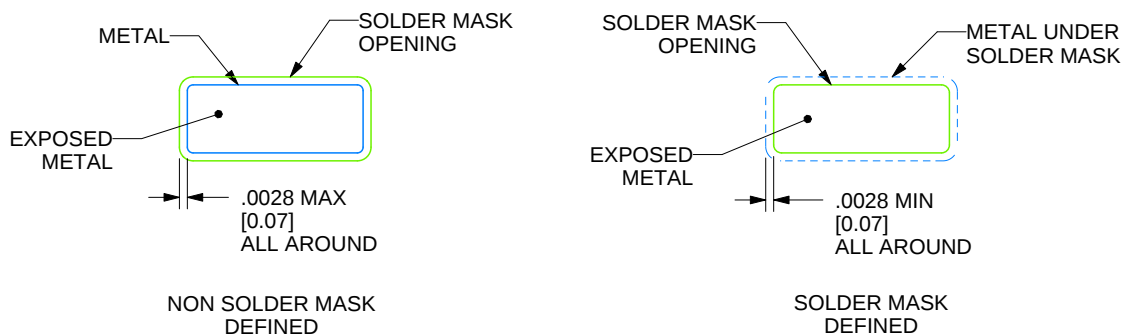

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)



8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

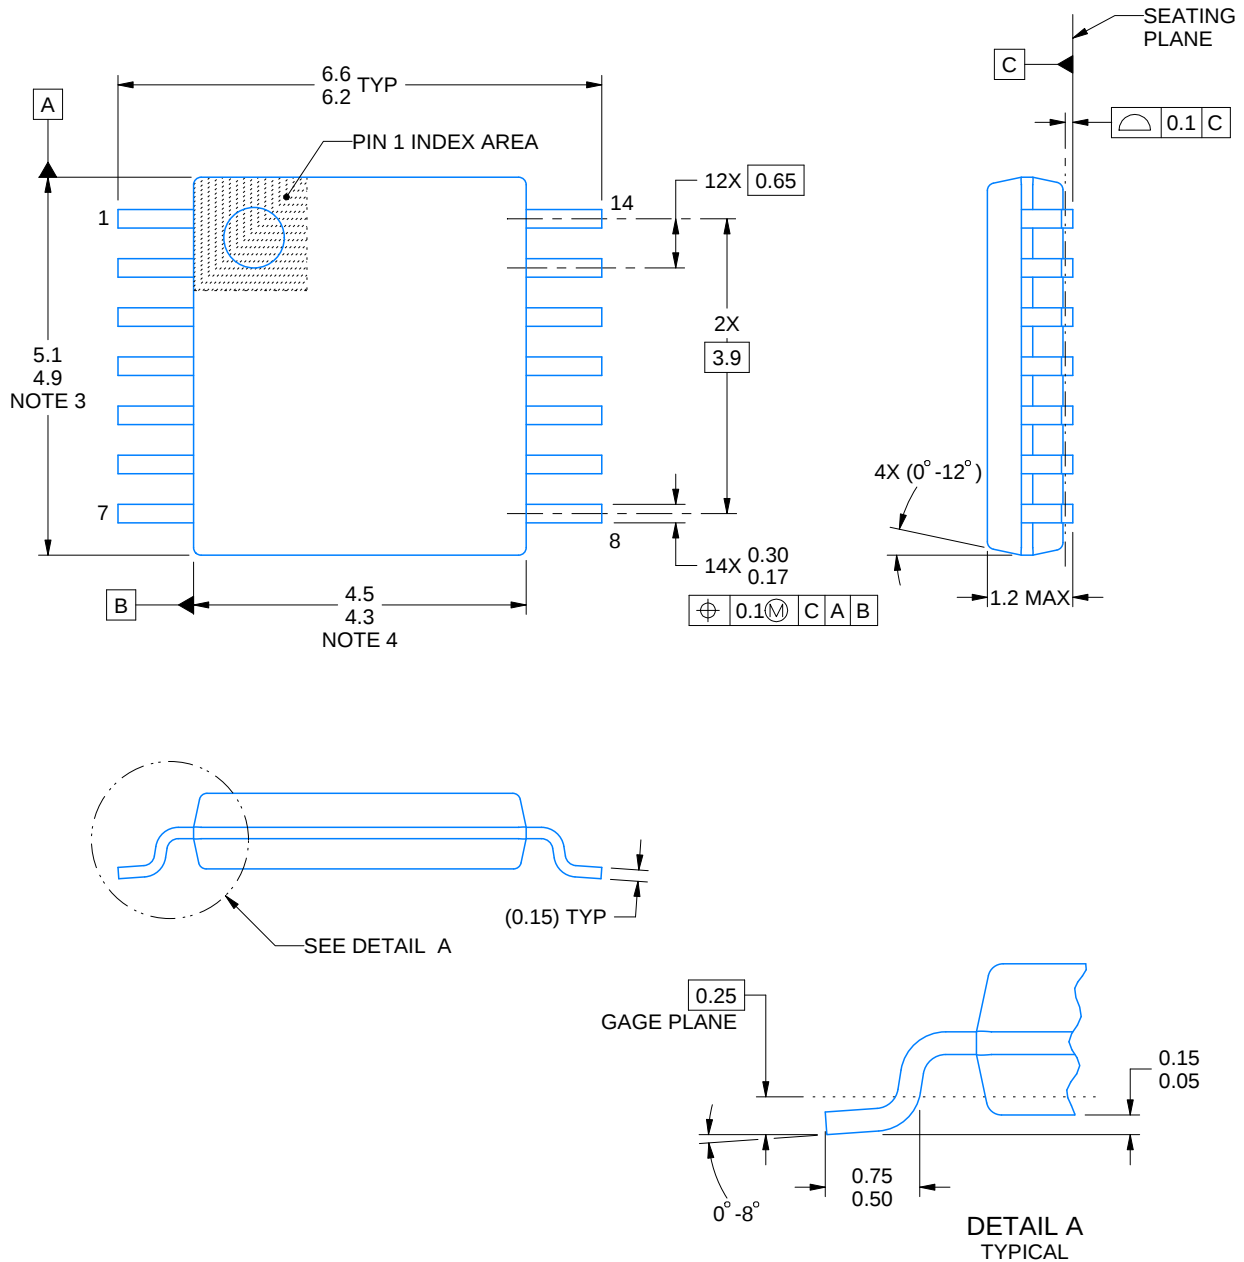

4220202/B 12/2023

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X



SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



## SOT-23 - 1.45 mm max height

## SMALL OUTLINE TRANSISTOR



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

# EXAMPLE BOARD LAYOUT

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X



SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

DGK0008A



# PACKAGE OUTLINE

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



4214862/A 04/2023

## NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT

DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

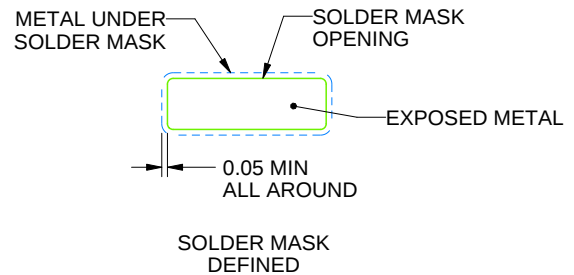

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

## EXAMPLE STENCIL DESIGN

DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025