

AM69 Processor Starter Kit

TABLE OF CONTENTS


PAGE	CONTENTS
01	TABLE OF CONTENTS
02	REVISION HISTORY
03	SYSTEM BLOCK DIAGRAM
04	3-Phase DUAL PMIC PDN-0B DIAGRAM
05	Power Flow Diagram
06	I2C Tree
07	I2C TABLE
08	GPIO MAPPING TABLE
09	SOC : CSI & DSI INTERFACE
10	SOC : SERDES0 INTERFACE
11	SOC : SERDES1 INTERFACE
12	SoC: LPDDR4 - DDR0
13	SoC: LPDDR4 - DDR2
14	SoC: LPDDR4 - DDR1
15	SoC: LPDDR4 - DDR3
16	SOC: OSPI FLASH
17	SOC: MCU & MAIN GENERAL IO, OSC CLKs
18	SOC: GENERAL IO
19	SOC: MCU RGMII / MMC[0:1] / ADC
20	SOC: DEBUG and XDS110 MUX
21	SOC: USB2.0
22	SOC: ANALOG POWER 1
23	SOC: IO POWER 2
24	SOC : DIGITAL POWER 3
25	SOC: GROUND
26	RESET BUTTONS
27	CPLD
28	Board ID EEPROM & 40 Pin EXP Header
29	eMMC FLASH
30	Micro SD CARD INTERFACE
31	USB3.0 HUB

PAGE	CONTENTS
32	USB 3.0 TYPE-A CONNECTORS - 1
33	USB 3.0 TYPE-A CONNECTORS - 2
34	USB 3.0 TYPE C INTERFACE
35	PCIe_M.2_INTERFACE(M Key)
36	PCIe_M.2_INTERFACE(E Key)
37	PCIe x4 Card Slot
38	MCU GB ETHERNET
39	CSI MUX - DATA
40	CSI2 EXPANSION CONNECTOR
41	CSI2 FPC CAMERA CONNECTORS
42	DISPLAY PORT INTERFACE
43	DVI/HDMI TRANSMITTER
44	ENET EXPANSION CONNECTOR
45	CAN TRANSCEIVERS #2-MAIN DOMAIN
46	QUAD PORT CONSOLE
47	XDS110 DEBUGGER
48	TEST AUTOMATION HEADER
49	Power Input
50	POWER SUPPLY #1
51	POWER SUPPLY #2
52	POWER SUPPLY #3
53	HCPS A - VDD CPU
54	HCPS A - VDD CORE
55	SOC PMIC
56	SOC LDO's
57	SOC CURRENT SENSE RESISTORS
58	CURRENT MONITORS - INA226
59	CURRENT MONITORS - INA231
60	PMIC SUPPORT CIRCUIT
61	SERDES CLOCK GENERATOR
62	SK NOTES & ACCESSORIES

REVISION HISTORY

REV #	DATE	DESCRIPTION OF CHANGES	AUTHOR	REVIEWED BY	APPROVED BY
E2	21 OCT 2022	Taken AM69 SK Rev E1 design as reference and Added CDCI6214 clock generators for PCIe devices	Mistral Design Team		
	2 NOV 2022	1. Replaced U113 with clock buffer CDCDB400 as a clock source for PCIe M key and E key. 2. Updated U50 connection to provide resistor mux for CDCI1_OE2/OE3 and CDCI1_OE1/OE4 signals from U112	Mistral Design Team		
E2A	23 FEB 2023	Added ECN information for TIVA automation rework.	Mistral Design Team		
E2B	16 MAR 2023	1. Mounted R439,R444,R448,R454,R460,R467,R473. 2. Replaced U76, U78 with BSZ019N03LSATMA1 3. Replaced L1 and L6 with XAL7070-122MEC	Mistral Design Team		

SYSTEM BLOCK DIAGRAM

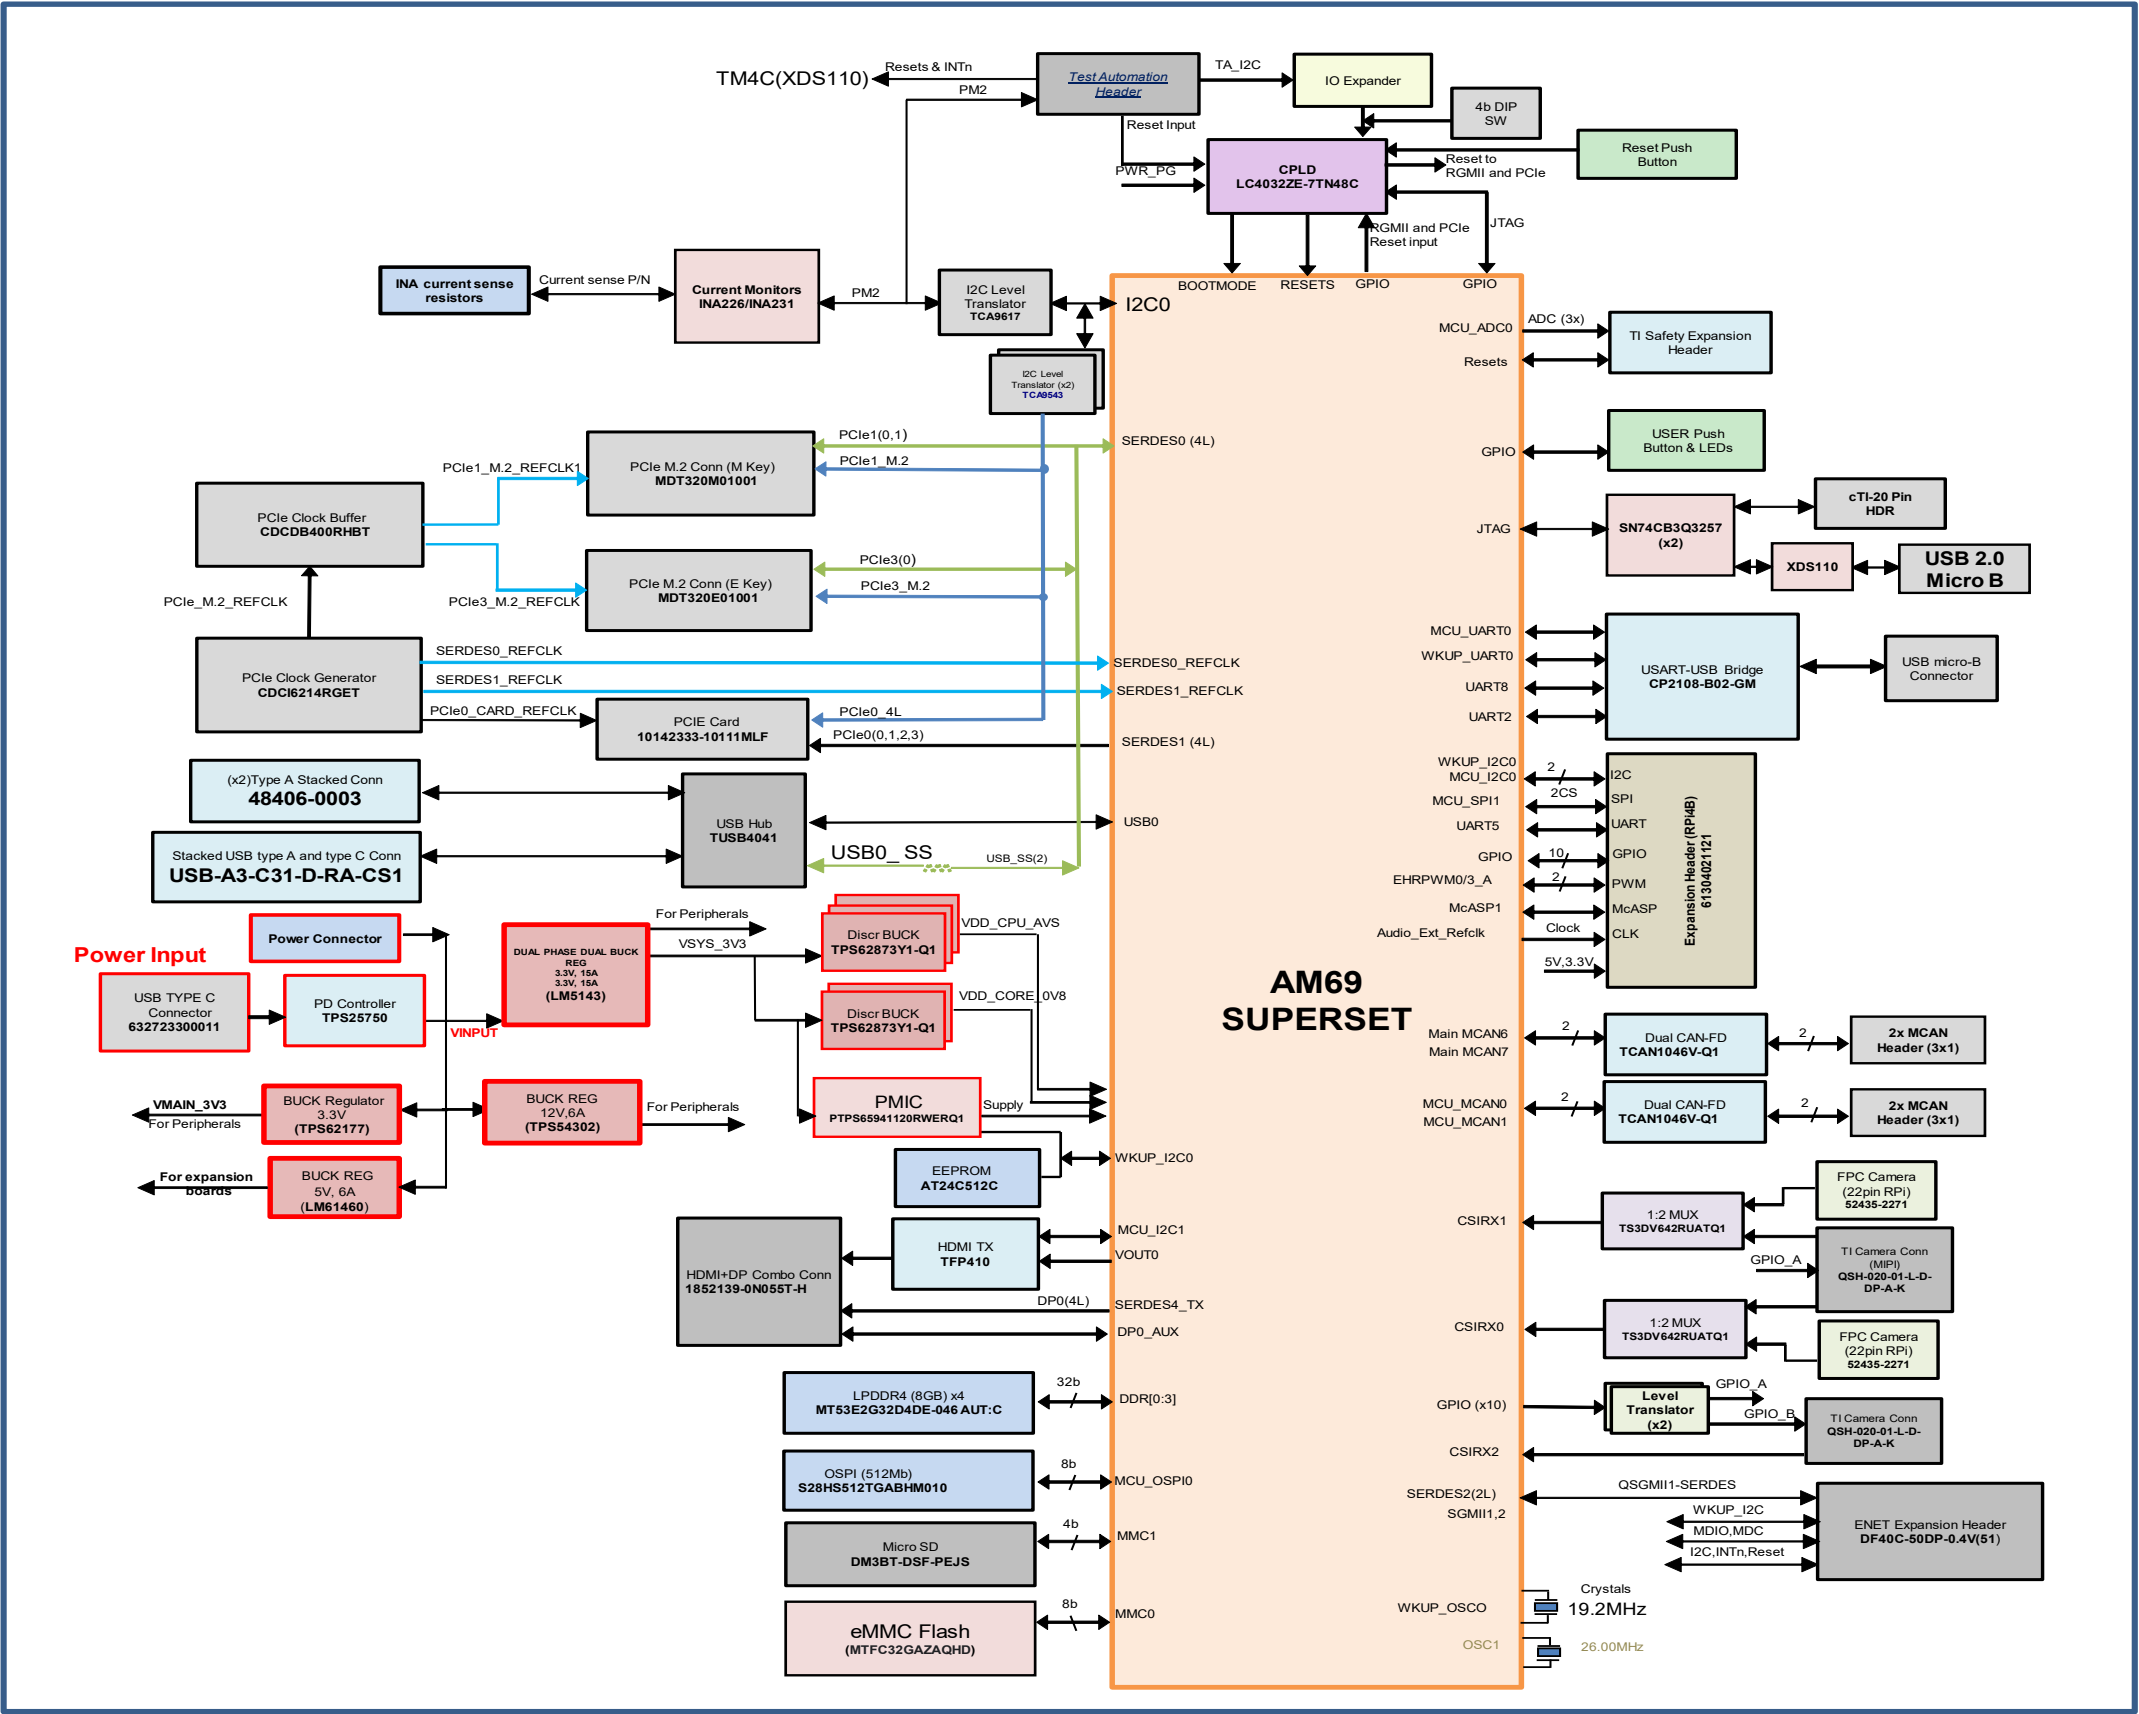

PDN Recommended for New Designs

Leo PMIC-A, PN TP56594133ARWERQ1 (11 PN ID = 1, MP Buck Rails = 3, PG2.0 NVMIID = 13 rev 2)
HCPS-A & B, Tulip PN TP562873Y1QWXRQ1 (15A PN ID = 3, Jacinto7 Family ID = Y1)
Safety Voltage Supervisor, PN TP538900604RTERQ1 (OTP ID = 004 = new common PN for use with Jacinto7 J78454 PDN-3A scheme)

Features Supported (EVM Max Features):

- SoC performance: Max 2.0GHz clock with SERDES interfaces operational
- a. Not a Functional Safety capable sys
b. Grouped Main & MCU power rails (no supply FFI)
- 4x SDRAMs: 32Gb, 4-Die, 32b, 4266MTs, LPDDR4 mode
- Boot & Mass Flash: Octal SPI or Hyperflash & eMMC, UFS
- Signaling Levels: MCU & Main Dual VIO

J78454 EVM Leo + 2x High-Current Pwr Stages(HCPS) PDN-3H.1


(All SoC PN variants: TDA4AP/VP/AH/VH)
(Power Rail & GPIO Mapping Overview)

PDN-3H.1 History

V0.6 10/05/2022

- Initial capture J78454 EVM Single Leo Dual HCPS PDN-3H.1 derived from PDN-3H v0.6 with following changes:
- Removed In-line Voltage FET to reduce cost & area
 - Removed Safety Voltage Supervisor
 - Removed Load Switch supplying VDD_IO_3V3 to SoC and updated Note 2.
 - Add SEL_V3V3 control signal to PMIC's GPIO6 from SoC GPIO to provision LDO2 to supply dual VIO for SD card HSD-I operation

Legend:

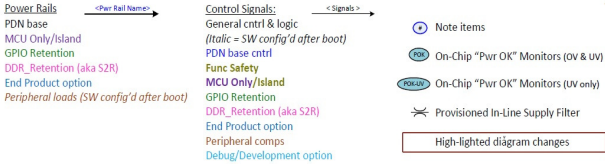

- Notes:
- An end product's Functional Safety desired ASIL target may require monitoring key "safety critical" power rails (i.e. VSYS_V3V3 input, key SoC supplies) that could cause severe system failures. This classification depends on the end product use case & what SoC resources a customer is using that are considered to be safety-related. SoC has internal OV & UV monitoring for key SoC MCU & Main voltage domains. The status is reported by SoC's Power OK (POK) status bits. Optional SoC voltage monitoring inputs (i.e. VMON0n, IR_VEXTn) can be used to extend SoC's OV/UV monitoring to a few board level power rails if desired (i.e. load switch Vs = VDD_IO_3V3). The following SoC Main & SDRAM domains are classified as non-critical & do not require direct monitoring: VDDSHVS (SD Card), VPP_CORE, VPP_MCU, VDDA_3P3_USB & VDD1_LPDDR4_V1B.
 - Load Switches (LdSw) in-line with VSYS_V3V3 can be optional to be removed to reduce PCB area & BOM cost depending upon an end product's system operation & desired features.
A) No latent fault protection is desired that could isolate any or all 3.3V SoC input supplies from a 1st power stage fault resulting in damage to SoC.
B) No system low power modes of operation (i.e. MCU Only, DDR Retention or GPIO Retention) are desired.
C) Full SoC PDN system power up & down sequences can be synchronized with enabling & disabling of the 1st power stage supplying VSYS_V3V3 input.
D) Enabling & disabling of SoC PDN must be executed with 1st power stage to avoid partially powering SoC for extended time periods that can negatively impact POH reliability.
Reasons to use 3.3V load switches on 3.3V power rails:
A) Latent fault protection from 1st power stage that can avoid damaging SoC is desired.
B) Any one of the possible system low power modes of operation (i.e. MCU Only, DDR Retention or GPIO Retention) is desired.
C) Independent SoC power supply sequencing by PMIC resources ensures correct system start-up & shut-down timing delays per NVM settings.
D) Uncontrolled energizing of 3.3V supplies is not recommended since this will partially power SoC for extended time periods that can negatively impact POH reliability.

- PMIC's GPIO_4 has been provisioned to support multiple interface signals. The PMIC PN default function sets GPIO_4 = DISABLE. WDOG function following NVM initialization. This GPIO_4 default function can be overridden by system SW following SoC boot if another interface signal is needed that is not required for SoC power sequencing.
1. Default: GPIO_4 = DISABLE. WDOG function to operate with EVM's DISABLE_WDOG signal that is latched on rising edge of PMIC's RSTOUT = H_MCU_POR2_V1B at end of power up seq. A logic low enables normal watch dog timer operation while a logic high disables watch dog timer following a power up seq.
2. Option1: After system boot, SW can reassign GPIO_4 to GPIO function to operate with PMIC's MAIN_PWRGRP_IRQn (ICn) (ICn = 0 to 3) signal. System SW must mask GPIO4 before changing GPIO's assigned function. SW must unmask GPI input and select whether the GPI will be either rising or falling edge sensitive. If any Main domain processing supply rail has a fault, the changing logic level on GPIO4 will set internal register bit that is monitored by PMIC's power state machine and cause a transition from Full Active state to MCU Safe state. At the board level, the WDOG_DISABLE & MAIN_PWRGRP_IRQn signals are "time mux'd" onto GPIO4's input pin by using a tri-state buffer with OE control connected to H_MCU_POR2_V1B. This enables WDOG_DISABLE not set GPIO4's logic level during power up seq when H_MCU_POR2_V1B = low since buffer is tri-stated. After power up seq, H_MCU_POR2_V1B = high enabling buffer to drives MAIN_PWRGRP_IRQn logic level into GPIO4 input.
3. Option2: GPIO_4 = WKUP1 function can be selected by SW to operate with SoC's PMIC_PWR_EN1 signal for emulator debug control of PMIC power resources (i.e. enabling VDD_CORE to activate core logic required to support JTAG signaling across the device). Combining board level WDOG_DISABLE & PMIC_POWER_EN1 signals using a resistor network is possible since WDOG_DISABLE pulls logic level high when switch is closed. Afterwards, switch can be opened and PMIC_PWR_EN1 signal will drive GPIO_4.

- GPIO Retention (aka GPIO_RET_IO_RET_IO Wake) low power mode requires:
A) SoC SW executes command sequence that sets key PMIC register bits in order to enter GPIO_RET low power mode of operation and select the desired wake-up destination state (i.e. Full Active or MCU Only).
B) After entering GPIO_RET mode, the following power rails will remain energized & all other SoC MCU & Main supplies will be shut off to minimize power:
1. VDD_GPIORET_WK_OVB supplying MCU's VDD_MCU_WAKE1 for MCU's 0.8V wake-up logic.
2. VDD_GPIORET_IO_V3V3 supplying MCU's VDDSHV0_MCU for MCU's 3.3V IO toggle activity.
C) PDN system exits GPIO_RET state upon receiving logic toggles on SoC's MCU monitored IO signals ref to VDDSHV0_MCU supply. Then H_MCU_WAKE1n (> SoC's Open Drain PMIC_WAKE1n, active low) signal connected to PMIC_GPIO_4 (= WKUP1 default function for Full Active or = WKUP2 for MCU Only destination state) is asserted and PMIC state machine transitions PDN system to desired targeted wake up state.
D) The Open-Drain Buffer SN74VLC1G070R1 (tri-state IO when power is off) connects PMIC_WAKE1n to SoC_PWR_Wkn net at discrete open-drain FET node. It is needed to isolate the SoC output buffer from the always on VCCA_V3V3 used as pull-up supply to prevent current bleeding into SoC during low power modes (MCU Only, DDR_RET) when VDD_GPIORET_V3V3 is typically disabled.

- DDR Retention (aka DDR_RET, Suspend-to-RAM, S2R) low power mode requires:
A) PMIC PN to assign GPIO_6 = Regulator Enable (REGEN) function with an open-drain output buffer type per NVM default settings. The board level net H_DDR_RET_V3V3 signal is pulled up to VDD_CORE_V1B. VDD_RET_V1B is connected to SoC's DDR_RET input. When this input is set high, SoC's EMIF IO buffers are set to high-Z state & set of entering DDR_RET mode.
B) SoC SW executes command sequence that sets key PMIC register bits in order to enter DDR_RET low power mode of operation and select the desired wake-up destination state (i.e. Full Active or MCU Only).
C) After entering DDR_RET mode, the following power rails will remain energized & all other SoC MCU & Main supplies will be shut off to minimize power:
1. VDD_DDR_V3V3 supplying both SoC EMIF & SDRAM IO voltages.
2. VDD1_DDR_V3V3 supplying SDRAM only
D) PDN system exits DDR_RET upon detecting a CAN_WAKE signal edge toggle on PMIC's GPIO_4 = LP_WKUP1 function per NVM settings that initiates exiting DDR_RET mode & restores Full Active processor operation.

- SoC devices come in two types: General Purpose (GP) & High Security (HS). All GP devices can leave the VPP domains unconnected per DM. Pre-programmed HS devices can also leave VPP domains unconnected if no additional EFUSE programming is needed. If customer desires capability for in-field updates, then on-board EFUSE programming will require an additional 1.8V, 150mA LDO. When disabled, this LDO's Vo will need a high impedance output. Recommended PNs: TP573101-EP, Beed 1.8V TP573101-01 or TLV70018-01. The EN_EFUSE_VPP control signal must be sourced from an SoC GPIO for this PDN (due to limited number of PMIC GPIOs). This allows SoC SW to control EFUSE VPP voltage level by enabling & disabling dedicated LDO as needed to program High Security SoC EFuses (see SoC DM for details).

- PDN shows SoC's VDDA_3P3_USB domain supplied from a low noise LDO with a VSYS_V3V3 input as preferred for optimal USB 2.0 data eye mask performance. If USB 2.0 I/F is not used or is only needed for development tasks, then the digital VDD_IO_3V3 rail with in-line supply filter can be used as an alternate supply. Using digital VDD_IO_3V3 rail to support USB 2.0 I/F removes a discrete LDO & VSYS_V3V3 input but could negatively impact data eye performance due to higher supply noise causing data eye mask violations.

- PDN shows SoC's Main domain's VDDSHVS supply being sourced from a dual voltage LDO with a VSYS_V3V3 input as preferred for compliant high-speed SD card operation. If SD card is not used or only standard data rate operation is sufficient, then the digital VDD_IO_3V3 rail with in-line supply filter can be used as an alternate supply. Using digital VDD_IO_3V3 rail to support SD Card operation removes dual voltage, discrete LDO & VSYS_V3V3 input but will restrict data rates to standard 12Mb/s with VIO = 3.3V.

- A discrete FET with low VGS (EVM uses industrial temp grade FET for low Vth) or single channel, voltage translation IC (automotive Q1 grade) can support low Vth needed to ensure a logic high level output will result with an input min 0.76V (5% supply tol). If using SN74AC125-Q1, please add a discrete FETs for an open-drain interface needed to interface with "MAIN_PWRGRP_IRQn" net.
Examples shown below:




- Worst case analysis for very high thermal use cases could result in VCCA_V3V3 load current in 15-18A range. This large load current range could lead to a 60 ~ 72mV voltage drop across Safety FET (then a PMIC NVMSAC09N) for a max RDS(on) = 4mOhm. The TP52265-Q1 load switches have max RDS(on) = 27mOhm with 4A max rating resulting in additional max drop of 108mV. SoC's 3.3V supply tolerance is +/- 5% or 165mV. Total RDS(on) drops across Safety FET & Load Switches range from 168 ~ 180mV which exceed SoC's min voltage limit. For this reason, the Tulip buck input voltage will be moved from VCCA_V3V3 to VSYS_V3V3 since VDD_CPU_AVS & VDD_CORE_OVB rails account for more than 70% of VCCA_V3V3 worst case load currents.

- On V0.6, connect "unconn" VMON0n to existing MCU supplies sourced from PMIC to enable 1 common PN for VVS-A & -B while avoiding false positives on "unconnected" VMON0n.

- An optional "User I/F Push-Button" can be connected to PMIC_GPIO_4 since a PMIC wake-up function & signal is not needed due to removal of all low power mode features. SW must write to PMIC to reassign GPIO_4's function to a GPI if this optional User I/F signal is desired.

Modular PDNs support flexible feature sets		
Feature Removals	Power Resource & Power Rail Removals	New Supply Mappings
HS SoC EFUSE Programming	Discrete LDO VPP_EFUSE_V1B	SoC VPPs ==> No connects
Compliant, USB 2.0 data eye	Discrete LDO VDDA_USB_V3V3	SoC VDDA_3P3_USB ==> filtered VDD_IO_3V3
Compliant, High-Speed SD Card	Discrete LDO VDD_SD_3V3	SoC VDDSHVS ==> VDD_IO_3V3 or VDD_IO_V1B
DDR Retention low power mode	Discrete LDO VDD1_DDR_V1B	LPDDR4: VDD1 ==> VDD_IO_V1B
MCU GPIO Retention low power mode	Discrete LDO VDD_MCU_GPIORET_V1B	Isolated MCU & Main PMIC Schemes: SoC VDD_MCU_WAKE1 ==> VDD_MCU_OVBs Grouped MCU & Main PMIC Schemes: SoC VDD_MCU_WAKE1 ==> VDD_CORE_OVB
	Discrete LDO VDD_MCU_GPIORET_3V3	Isolated MCU & Main PMIC Schemes: SoC VDDSHV0_MCU ==> VDD_MCU_OVB_3V3 or VDD_MCU_OVB_V1B Grouped MCU & Main PMIC Schemes: SoC VDDSHV0_MCU ==> VDD_IO_3P3V3 or VDD_IO_V1B
	Discrete SVS VDD_GPIORET_V1B	PMIC_GPIO_10 pulled-up to VCCA_3V3
Main GPIO Retention low power mode	Discrete LDO VDD_GPIORET_V1B	SoC VDDSHV2 ==> VDD_IO_3V3 or VDD_IO_V1B
	Discrete LDO VDD_GPIORET_3V3	SoC VDDSHV2 ==> VDD_IO_3V3 or VDD_IO_V1B
	Discrete SVS	PMIC_GPIO_10 pulled-up to VCCA_3V3

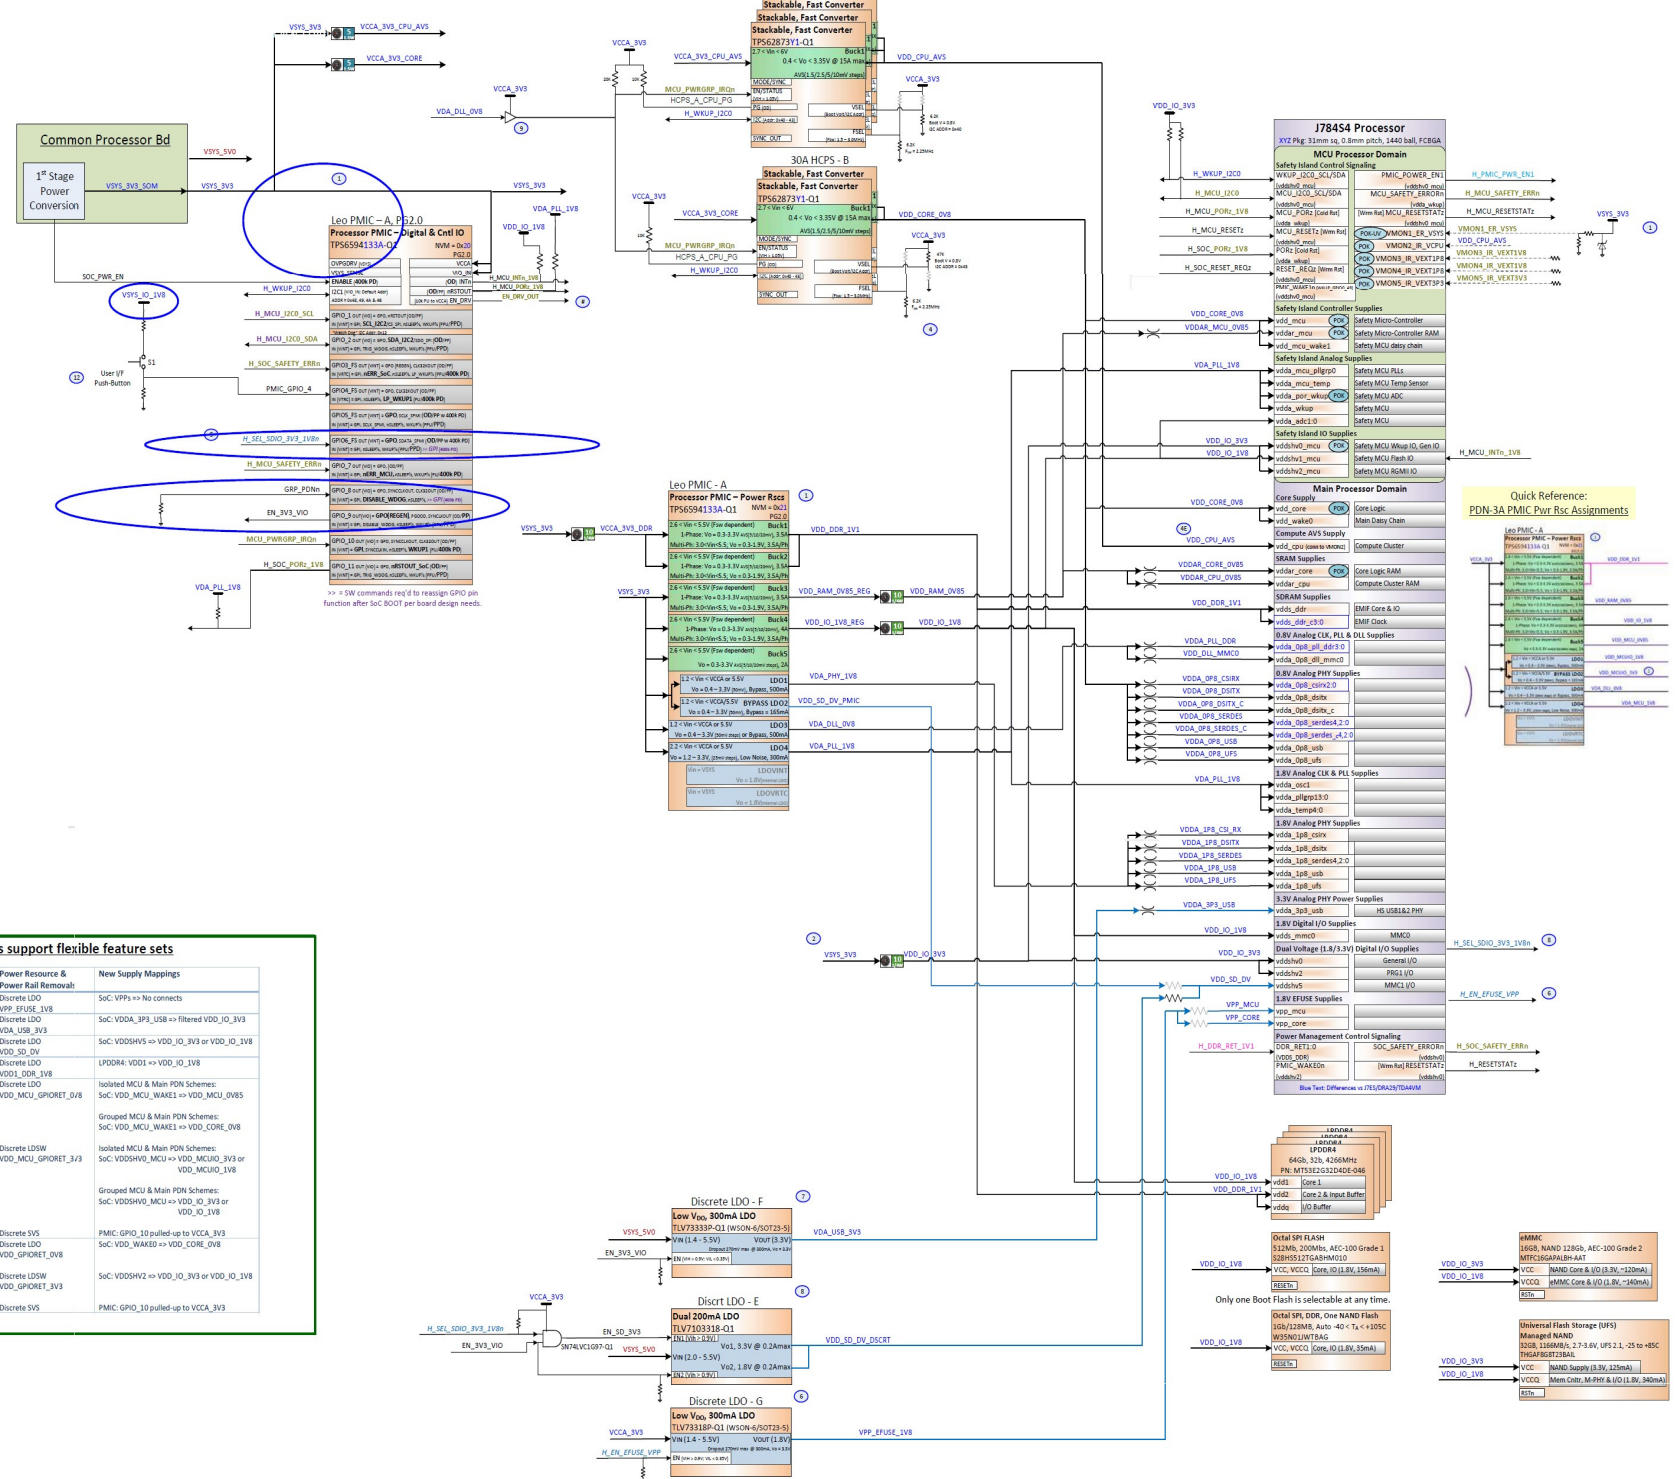

Project :
AM69 Edge AI Kit



Title: SoC EVM PMIC PDN-0.6


Size: PROC154E2B 001 SK AM69

Date: Thursday, March 16, 2023


Sheet 4 of 62

Rev E2B

AM69 SK POWER FLOW DIAGRAM

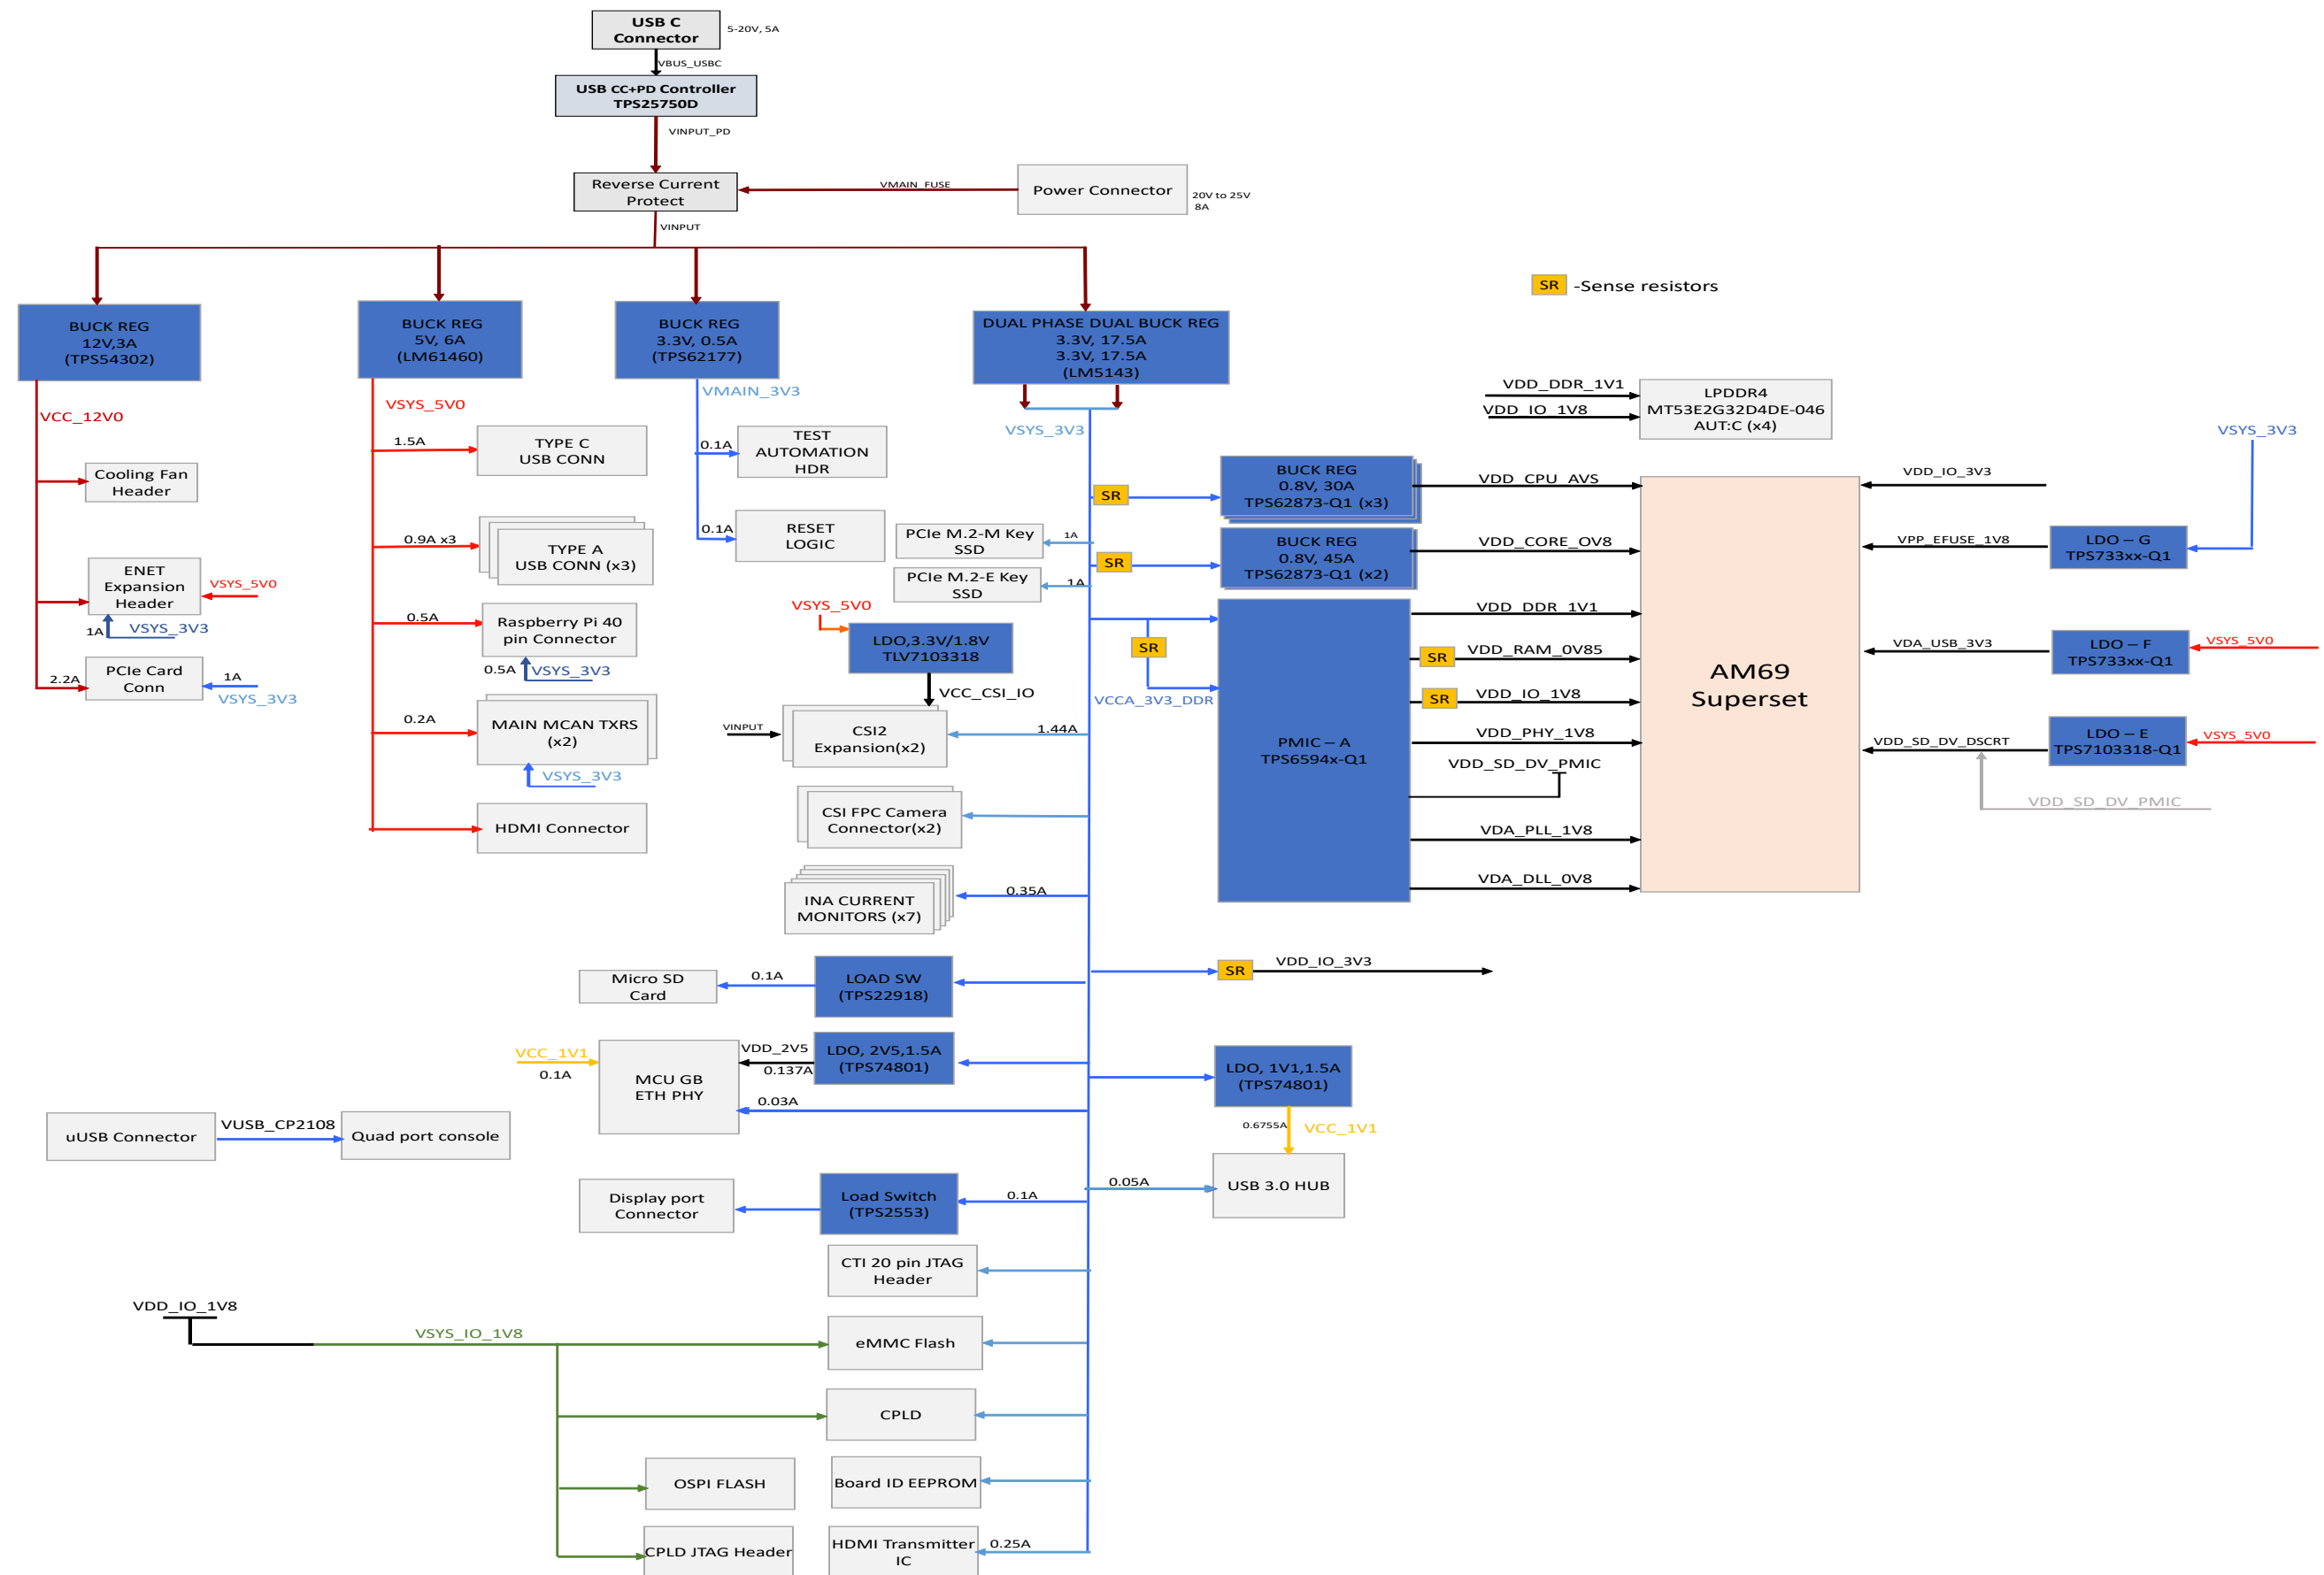

I2C TREE

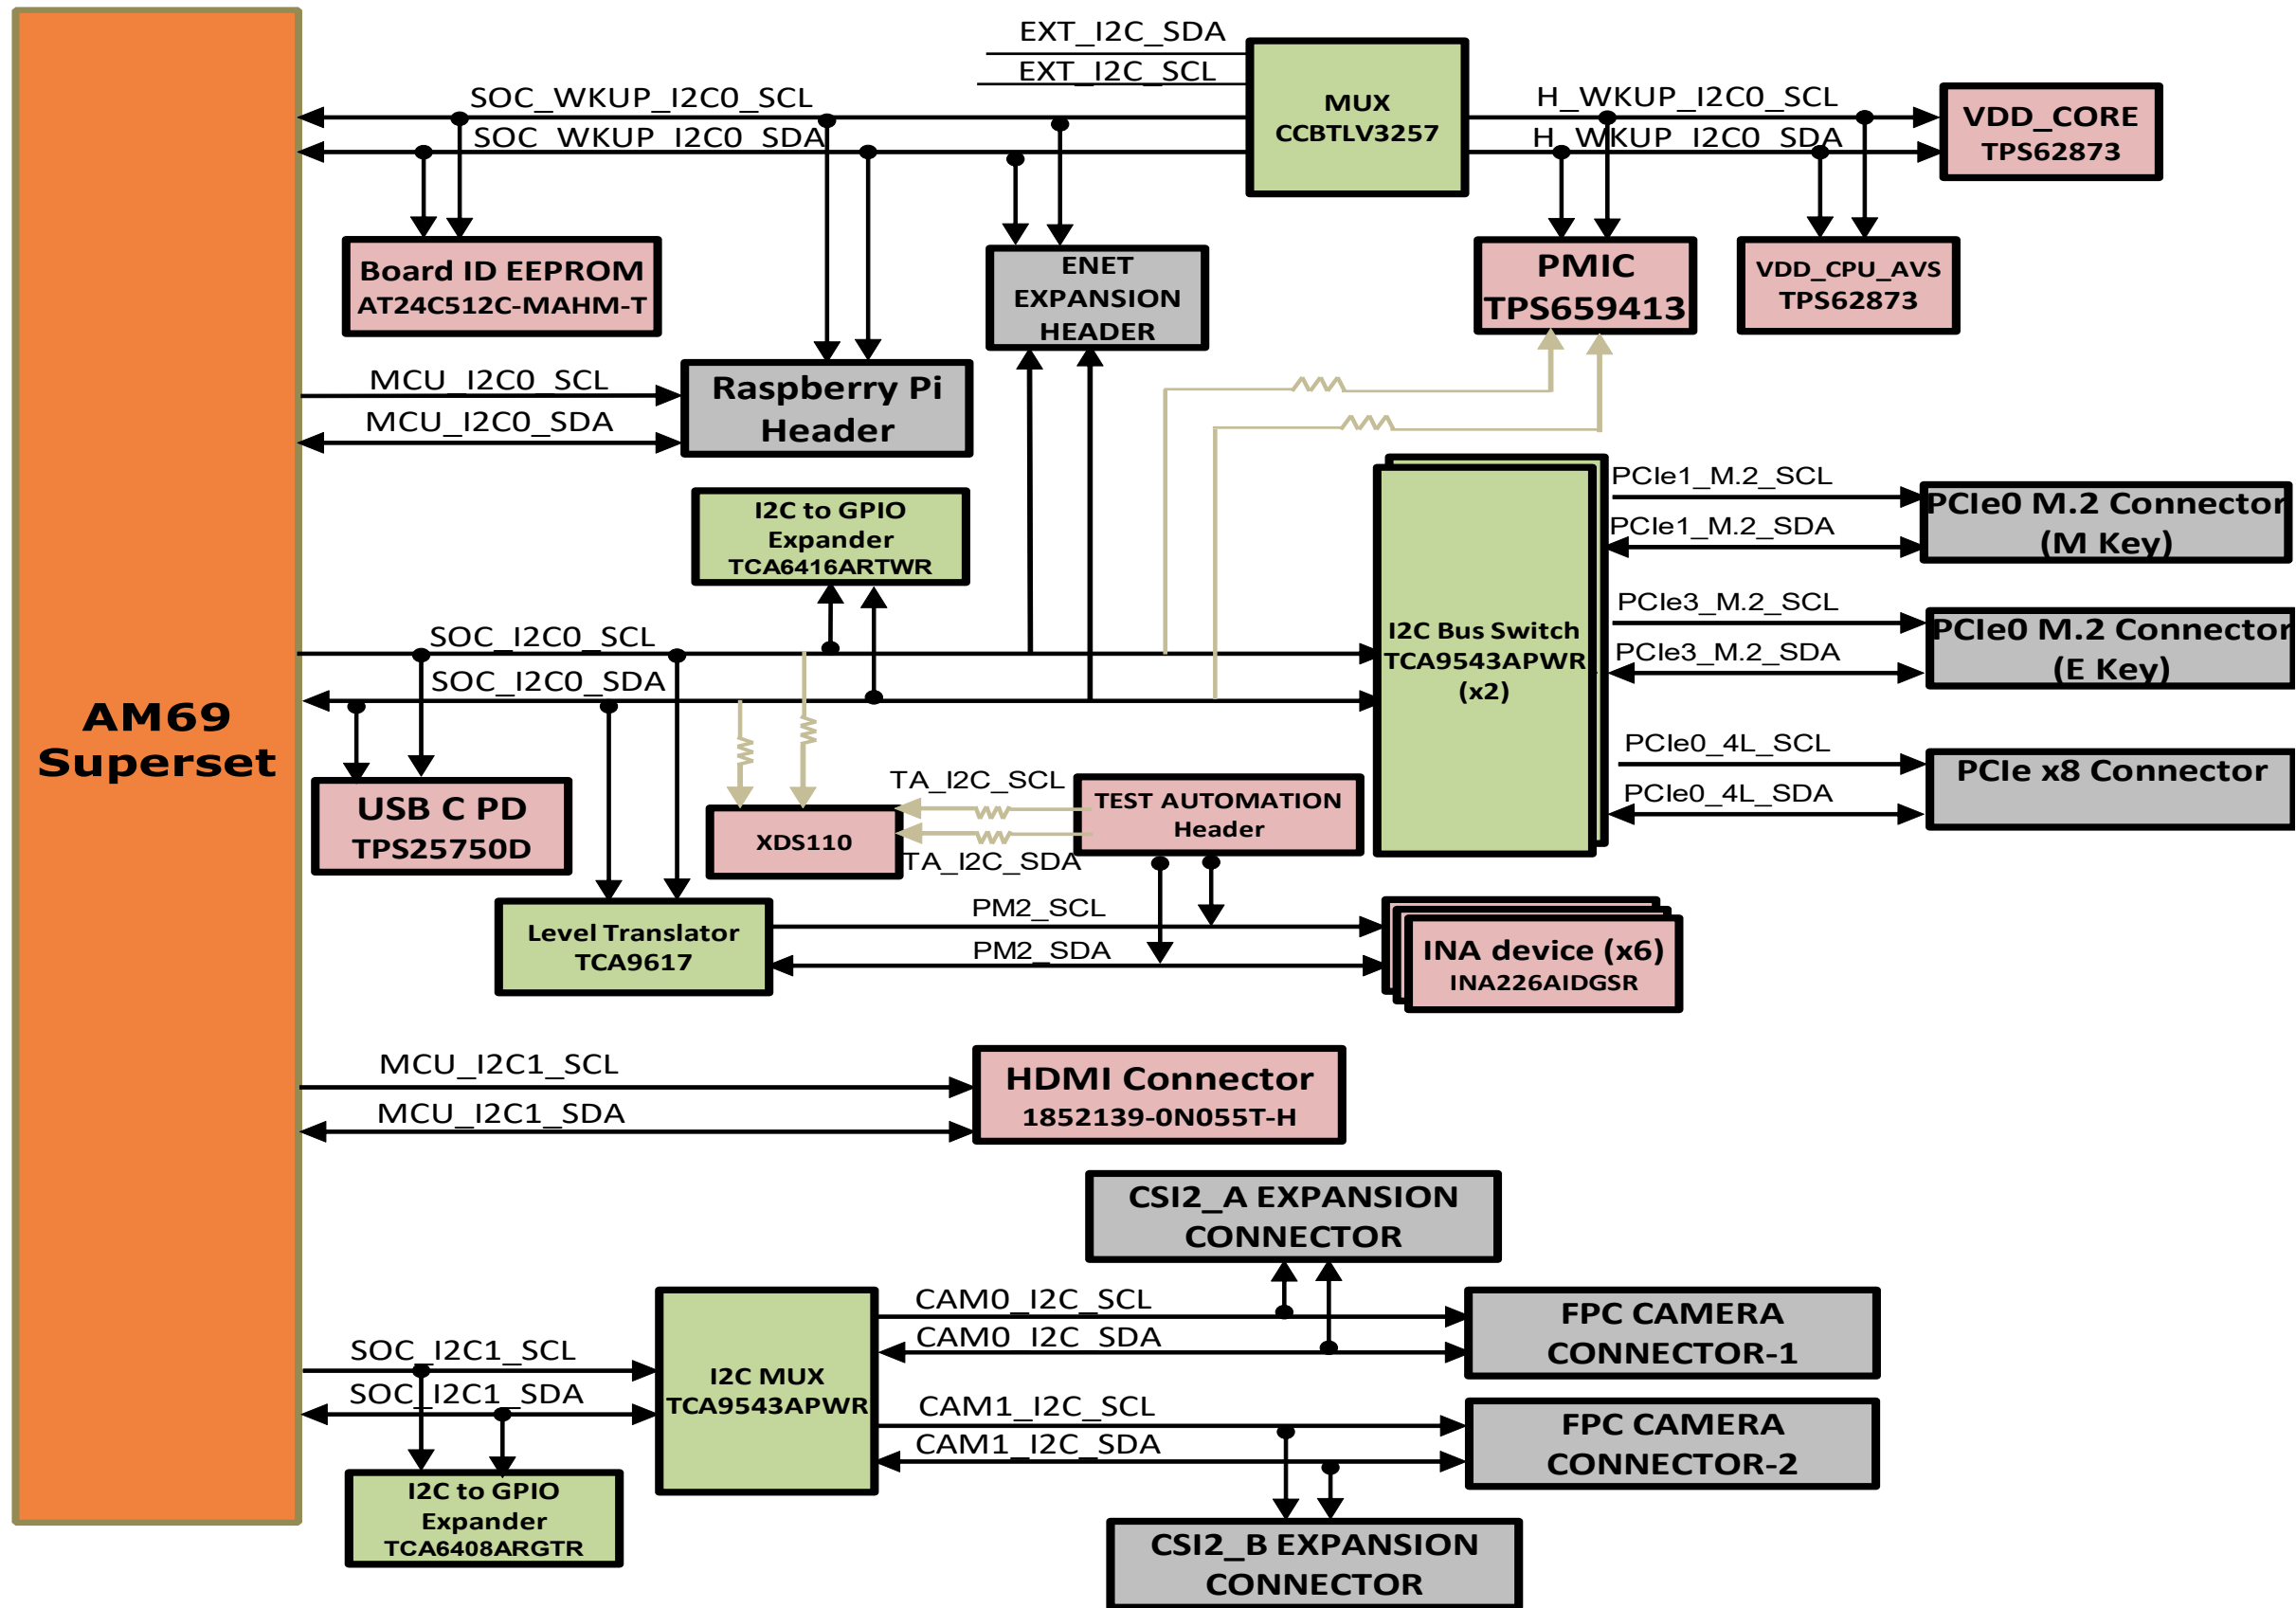



I2C TABLE

AM69 SK I2C Slave Address Table			
SOC I2C Port	Device Description	Part#	I2C Address
WKUP_I2C0	PMIC	TPS6594133ARWERQ1	0x48, 0x49, 0x4A & 0x4B
	VDD_CPU_AVS High-Current Power Stage A	TPS62873Y1QWRXSRQ1	0x40
	VDD_CORE_OV8 High-Current Power Stage B	TPS62873Y1QWRXSRQ1	0x43
	Raspberry Pi Header	61304021121	
	Board ID EEPROM	AT24C512C-MAHM-T	0x51
	ENET Expansion Header	171446-1109	0x57
MCU_I2C0	Raspberry Pi Header	61304021121	
MAIN_I2C0	Test Automation Header	687140183622	
	INA226 device for VCCA_3V3_CORE	INA226AIDGSR	0x45
	INA226 device for VCCA_3V3_CPU_AVS	INA226AIDGSR	0x4F
	INA226 device for VCCA_3V3_DDR	INA226AIDGSR	0x4D
	INA226 device for VDD_RAM_OV85	INA226AIDGSR	0x46
	INA226 device for VDD_IO_3V3	INA226AIDGSR	0x41
	INA226 device for VDD_IO_1V8	INA226AIDGSR	0x40
	PCIe_M.2_Interface M Key	MDT320M01001	
	PCIe_M.2_Interface E Key	MDT320E01001	
	Ext Power Measurement Header	61300311121	
	PCIe Card Slot	10018783-10202TLF	
	USB C PD Controller	TPS25750D	0x20
	Level Translator-1	TCA9543APWR	0x71
	Level Translator-2	TCA9543APWR	0x72
	GPIO Expander	TCA6416ARTWR	0x21
	PMIC	TPS6594133ARWERQ1	
	ENET Expansion Header	171446-1109	0x77
MCU_I2C1	HDMI Connector	1852139-0N055T-H	
MAIN_I2C1	FPC Camera Connector 1	52435-2271	
	FPC Camera Connector 2	52435-2271	
	CSI2_A Expansion Connector	QSH-020-01-L-D-DP-A-K	
	CSI2_B Expansion Connector	QSH-020-01-L-D-DP-A-K	
	GPIO Expander	TCA6408ARGTR	0x21
	Level Translator	TCA9543APWR	0x70


GPIO MAPPING TABLE

GPIO Mapping						
WKUP Domain						
J7AHP Mapping		Net Name	Input/Output	Default	State	Usage
Package Signal Name	GPIO					
MCU_OSPiO_CSn1	WKUP_GPIO0_28	EN_EFUSE_VPP	O	PD	Active High	Enable for VPP_EFUSE_1V8 LDO
MCU_OSPiO_CSn2	WKUP_GPIO0_29	CPLD_TMS/CSiB_EXP_GPIO1	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_CLK	WKUP_GPIO0_31	CPLD_TCK/CSiB_EXP_GPIO2	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_LBCLKO	WKUP_GPIO0_32	CSi_EXP_GPIO_1	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_DQS	WKUP_GPIO0_33	CPLD_TDO/CSiB_EXP_GPIO3	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_D0	WKUP_GPIO0_34	CPLD_TDI/CSiB_EXP_GPIO4	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_D1	WKUP_GPIO0_35	CSi_EXP_GPIO_5	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_D2	WKUP_GPIO0_36	CSi_EXP_GPIO_2	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_D3	WKUP_GPIO0_37	CSi_EXP_GPIO_3	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_CSn0	WKUP_GPIO0_38	CSi_EXP_GPIO_4	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_OSPi1_CSn1	WKUP_GPIO0_39	CSiB_EXP_GPIO5	IO	NA	NA	GPIO signal for CSi2 EXPANSION Connector
MCU_SPiO_CLK	WKUP_GPIO0_54	WKUP_GPIO0_54	O	Bootmode	Active High	Select line for CPLD's Mux
MCU_SPiO_D0	WKUP_GPIO0_55	USER_LED1	O	Bootmode	Active High	User LED
MCU_SPiO_D1	WKUP_GPIO0_69	SYS_MCU_PWRDN	O	Bootmode	Active High	System Power Down ('0' - normal operation '1' - system power down)
MCU_SPiO_CS0	WKUP_GPIO0_70	WKUP_GPIO0_70	IO	NA	NA	GPIO signal for FPC camera Connector
WKUP_GPIO0_10	WKUP_GPIO0_10	HDMI_LS_OE	O	PU	Active High	Level Shifter Output Enable for HDMI
WKUP_GPIO0_14	WKUP_GPIO0_14	HDMI_PDn	O	Bootmode	Active Low	Power Down Signal for HDMI
WKUP_GPIO0_49	WKUP_GPIO0_49	WKUP_GPIO0_49	IO	NA	NA	GPIO signal for 40 pin Expansion Header
PMIC_POWER_EN1	WKUP_GPIO0_88	WKUP_GPIO0_88	IO	NA	NA	GPIO signal for FPC camera Connector
WKUP_GPIO0_56	WKUP_GPIO0_56	WKUP_GPIO0_56	IO	NA	NA	GPIO signal for 40 pin Expansion Header
WKUP_GPIO0_57	WKUP_GPIO0_57	WKUP_GPIO0_57	IO	NA	NA	GPIO signal for 40 pin Expansion Header
MCU_ADC1_AIN0	WKUP_GPIO0_79	SOC_INT1z	I	PU	Active Low	Test Automation INT signal
MCU_ADC1_AIN1	WKUP_GPIO0_80	SOC_INT2z	I	PU	Active Low	Test Automation INT signal
MCU_ADC1_AIN2	WKUP_GPIO0_81	MCU_RGMII_INT#	I	PU	Active Low	Interrupt Signal from RGMII
MCU_ADC1_AIN3	WKUP_GPIO0_82	SOC_WAKE	I	PU	Active High	SOC wake signal from Reset Button
MCU_ADC1_AIN4	WKUP_GPIO0_83	PMIC_INTn	I	PU	Active Low	PMIC interrupt signal
MCU_ADC1_AIN5	WKUP_GPIO0_84	ENET1_EXP_INTB	I	NA	NA	Interrupt Signal from ENET Expansion Header
MCU_ADC1_AIN6	WKUP_GPIO0_85	IO_EXP_I2C0_INTB	O	NA	NA	I2C0 Interrupt Signal to ENET Expansion Header
WKUP_GPIO0_66	WKUP_GPIO0_66	WKUP_GPIO0_66	IO	PU	NA	GPIO signal for 40 pin Expansion Header
WKUP_GPIO0_67	WKUP_GPIO0_67	WKUP_GPIO0_67	IO	NA	NA	GPIO signal for 40 pin Expansion Header
Main Domain						
EXTINTn	GPIO0_0	HDMI_HPD	I	NA	Active High	HDMI hot plug detect signal
MCAN13_TX	GPIO0_3	GPIO0_3	IO	NA	NA	GPIO signal for 40 pin Expansion Header
MCAN13_RX	GPIO0_4	DPO_3V3_EN	O	PD	Active High	Enable signal for Display port Current Limiter
MCAN1_TX	GPIO0_27	GPIO0_27	IO	NA	NA	GPIO signal for 40 pin Expansion Header
MCASP0_AXR8	GPIO0_36	GPIO0_36	IO	NA	NA	GPIO signal for 40 pin Expansion Header
ECAP0_IN_APWM_OUT	GPIO0_49	SEL_SDIO_3V3_1V8n	O	PU	Active Low	One of Enable signal for VDD_SD_DV
GPIO Expander						
Port No	GPIO	I2C	Input/Output	Default	State	Usage
P0	CSi_VIO_SEL	MAIN_I2C1 Address : 0x21 Part No - TCA6408ARGTR	O	PD	Active High	Enable signal for Camera IO supply
P1	CSi_MUX_SEL_2		O	PD	Active High	Select lines for CSi mux
P2	CSi2_RSTz		O	PD	Active Low	Reset signal for CSi Expansion Connector
P3	IO_EXP_CAM0_GPIO1		IO	NA	NA	GPIO signals for FPC Camera Connector
P4	IO_EXP_CAM1_GPIO1		IO	NA	NA	GPIO signals for FPC Camera Connector
P00	BOARDID_EEPROM_WP	MAIN_I2C0 Address : 0x21 Part No - TCA6416ARTWR	O	PD	Active High	Board ID EEPROM Write Protect
P01	CAN_STB		O	PD	Active High	Stand By Input for CAN Transceiver
P02	GPIO_uSD_PWR_EN		O	PU	Active High	One of Enable signal for Micro SD Load Switch
P03	IO_EXP_MCU_RGMII_RST#		O	NA	Active Low	MCU_RGMII Resetz signal to CPLD
P04	IO_EXP_PClE0_4L_PERST#		O	NA	Active Low	PClE 4 lane Resetz signal to CPLD
P05	IO_EXP_PClE1_M.2_RTsz		O	NA	Active Low	PClE M Key Resetz signal to CPLD
P06	IO_EXP_PClE3_M.2_RTsz		O	NA	Active Low	PClE E Key Resetz signal to CPLD
P07	PM_INA_BUS_EN		O	PU	Active High	Enable signal for PM2 I2C lines
P10	ENET1_EXP_PWRDN		O	PU	Active High	Power Down Signal for Enet Expansion Header
P11	EXP1_ENET_RSTz		O	NA	Active Low	Reset Signal for Enet Expansion Header
P12	ENET1_I2CMUX_SEL		O	NA	Active High	I2C mux select Signal for Enet Expansion Header
P13	PClE0_CLKREQ#		I	PU	Active Low	PClE Card Clock request Signal
P14	PClE1_M.2_CLKREQ#		I	PU	Active Low	PClE M Key Clock request Signal
P15	PClE3_M2_CLKREQ#		I	PU	Active Low	PClE E Key Clock request Signal
P16	CDCI1_OE2/OE3		IO	PU	NA	GPIO signal CDCI Clock Generator
P17	CDCI1_OE1/OE4		IO	PU	NA	Output Enable for CDCI Clock Generator
P0	SW_CPLD_CONTROL_IN1	TEST AUTOMATION I2C Address : 0x20 Part No - TCA6408ARGTR	O	NA	NA	CPLD Switch Control Signals for Bootmode Logic
P1	SW_CPLD_CONTROL_IN2		O	NA	NA	CPLD Switch Control Signals for Bootmode Logic
P2	SW_CPLD_CONTROL_IN3		O	NA	NA	CPLD Switch Control Signals for Bootmode Logic
P3	SW_CPLD_CONTROL_IN4		O	NA	NA	CPLD Switch Control Signals for Bootmode Logic


CSI

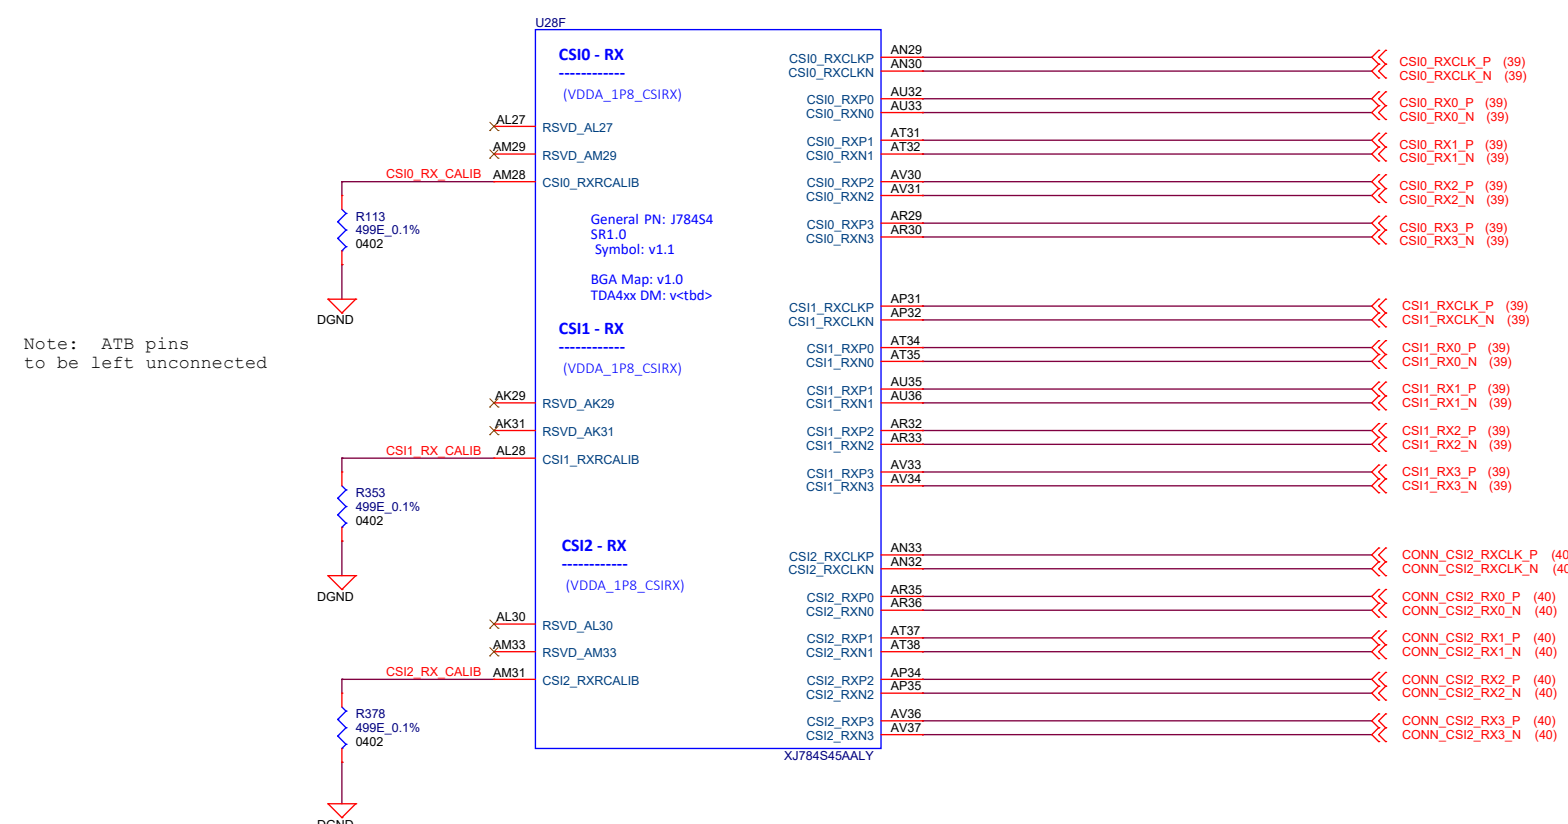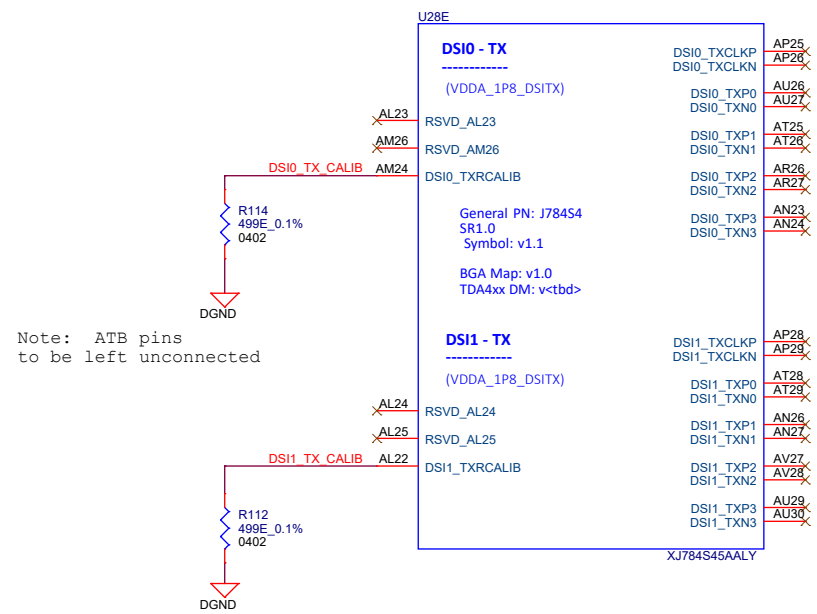

SERDES0



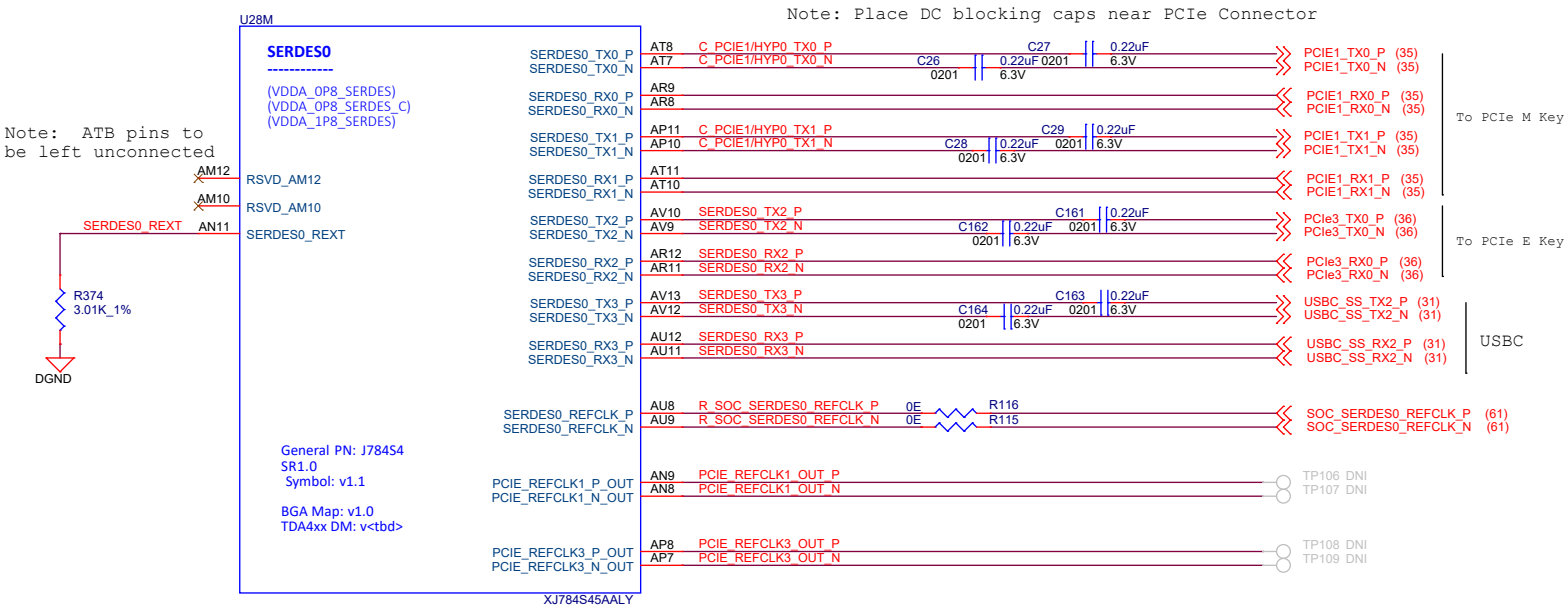


DP_AUX

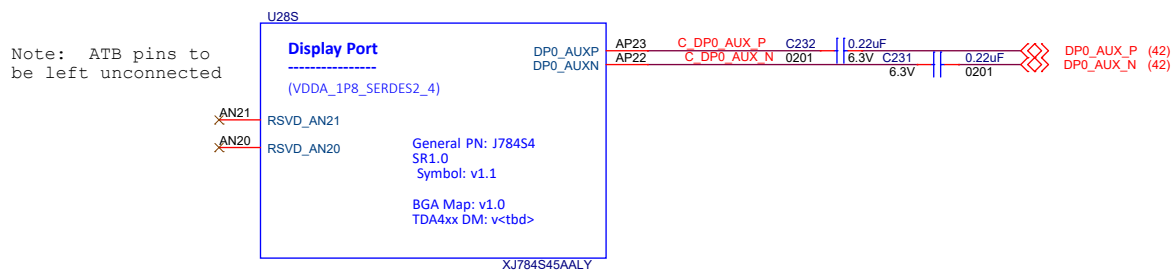




SERDES1

Note: ATB pins to be left unconnected

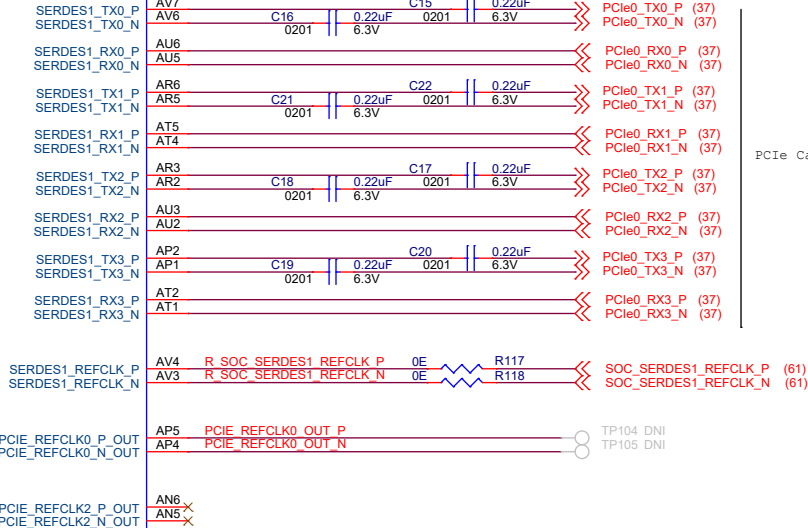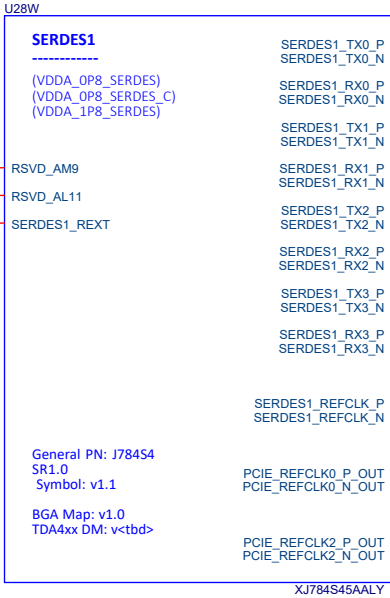




SERDES2

Note: ATB pins to be left unconnected


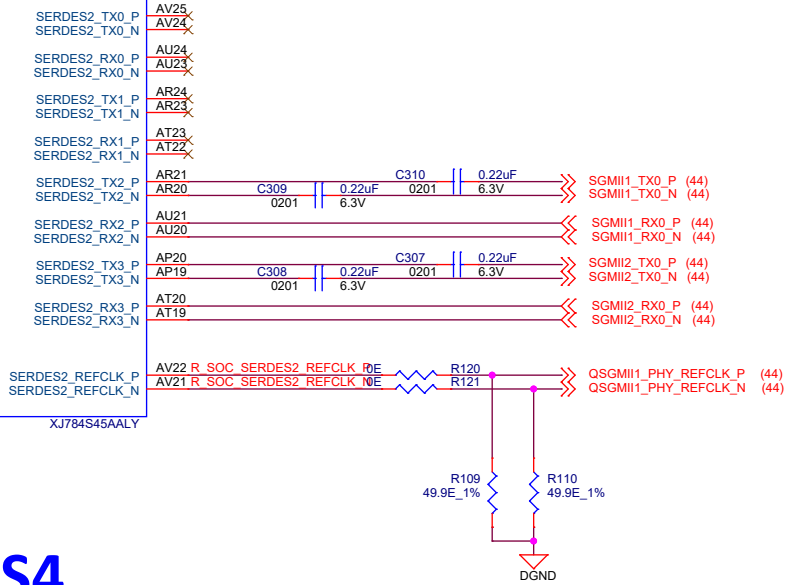
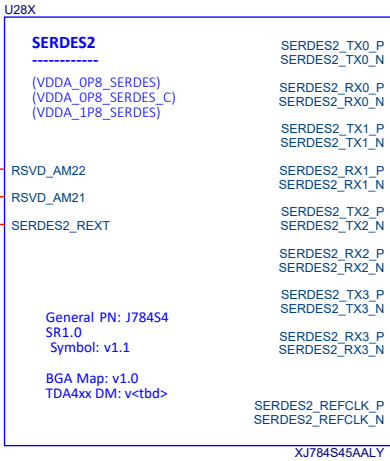



SERDES4


Note: ATB pins to be left unconnected

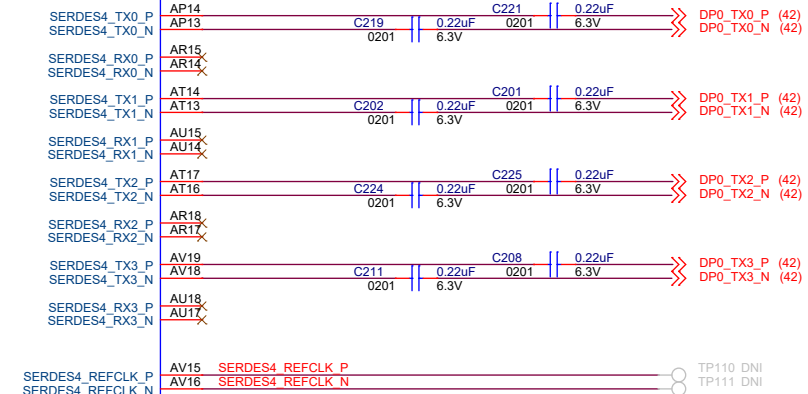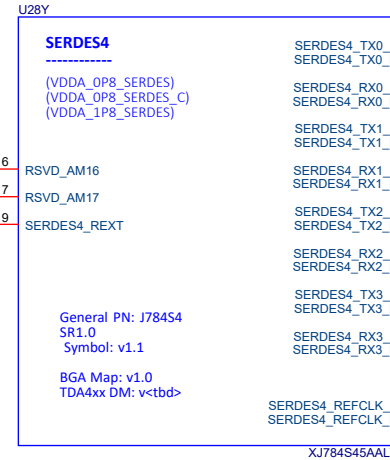





LPDDR4 - DDR0

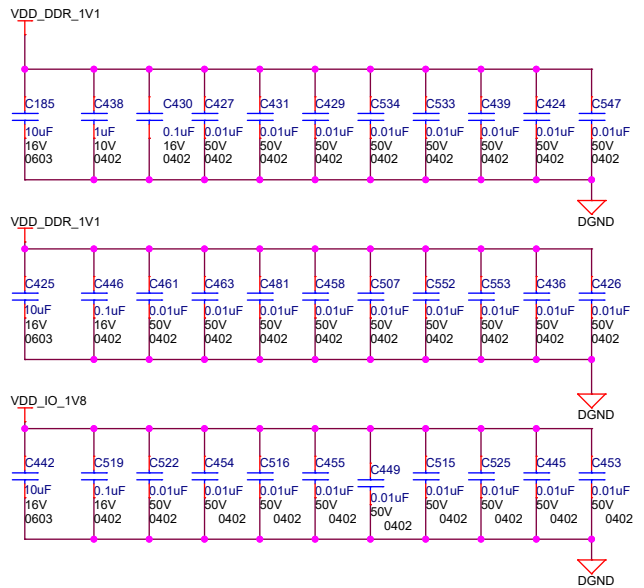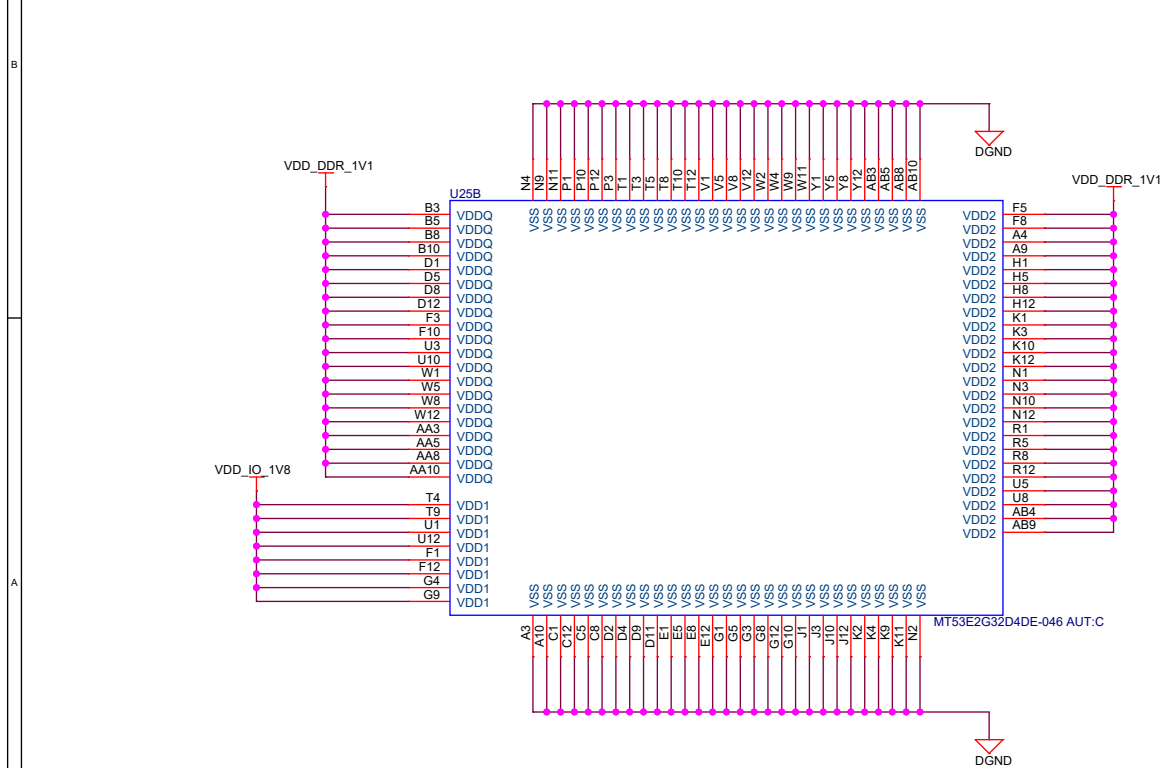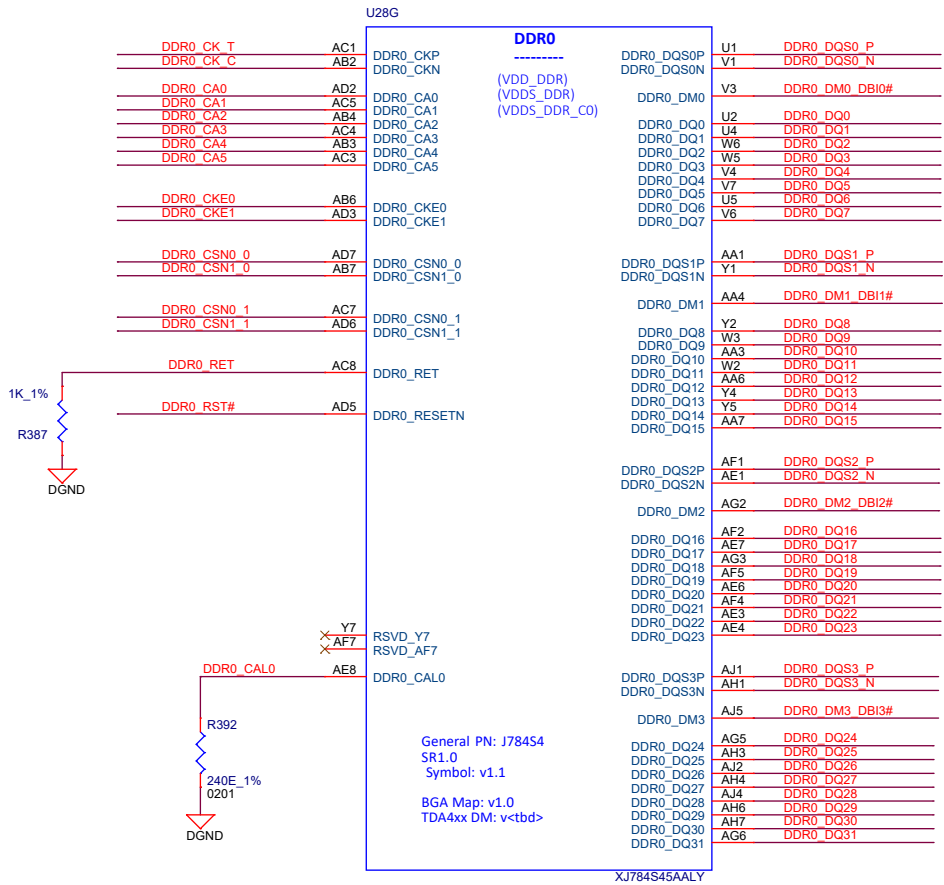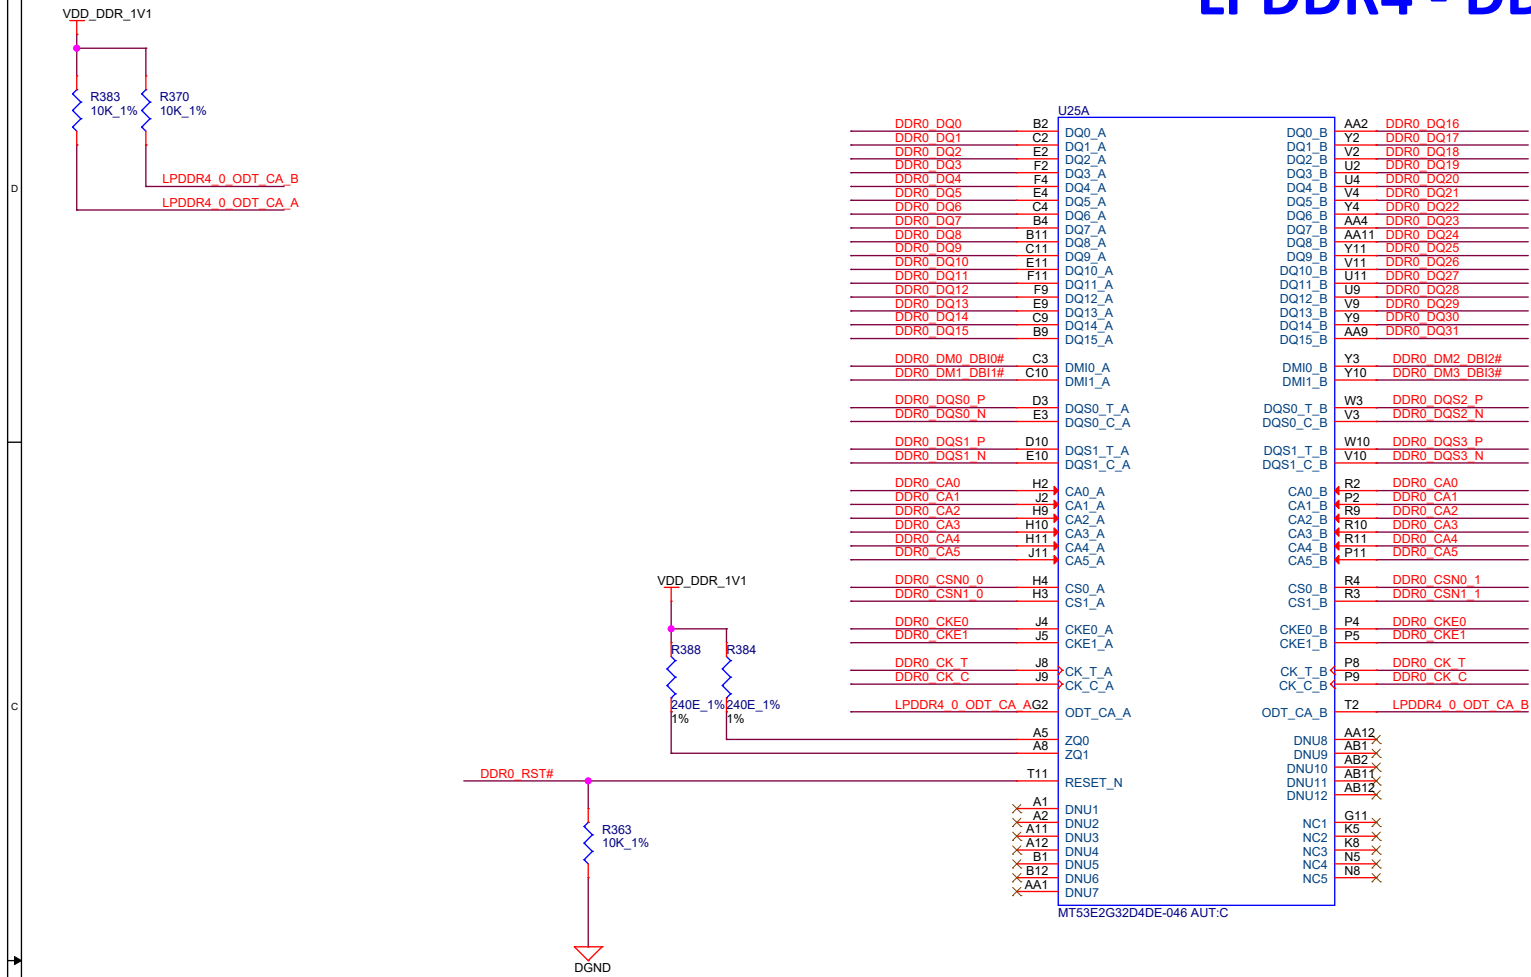




LPDDR4 - DDR1

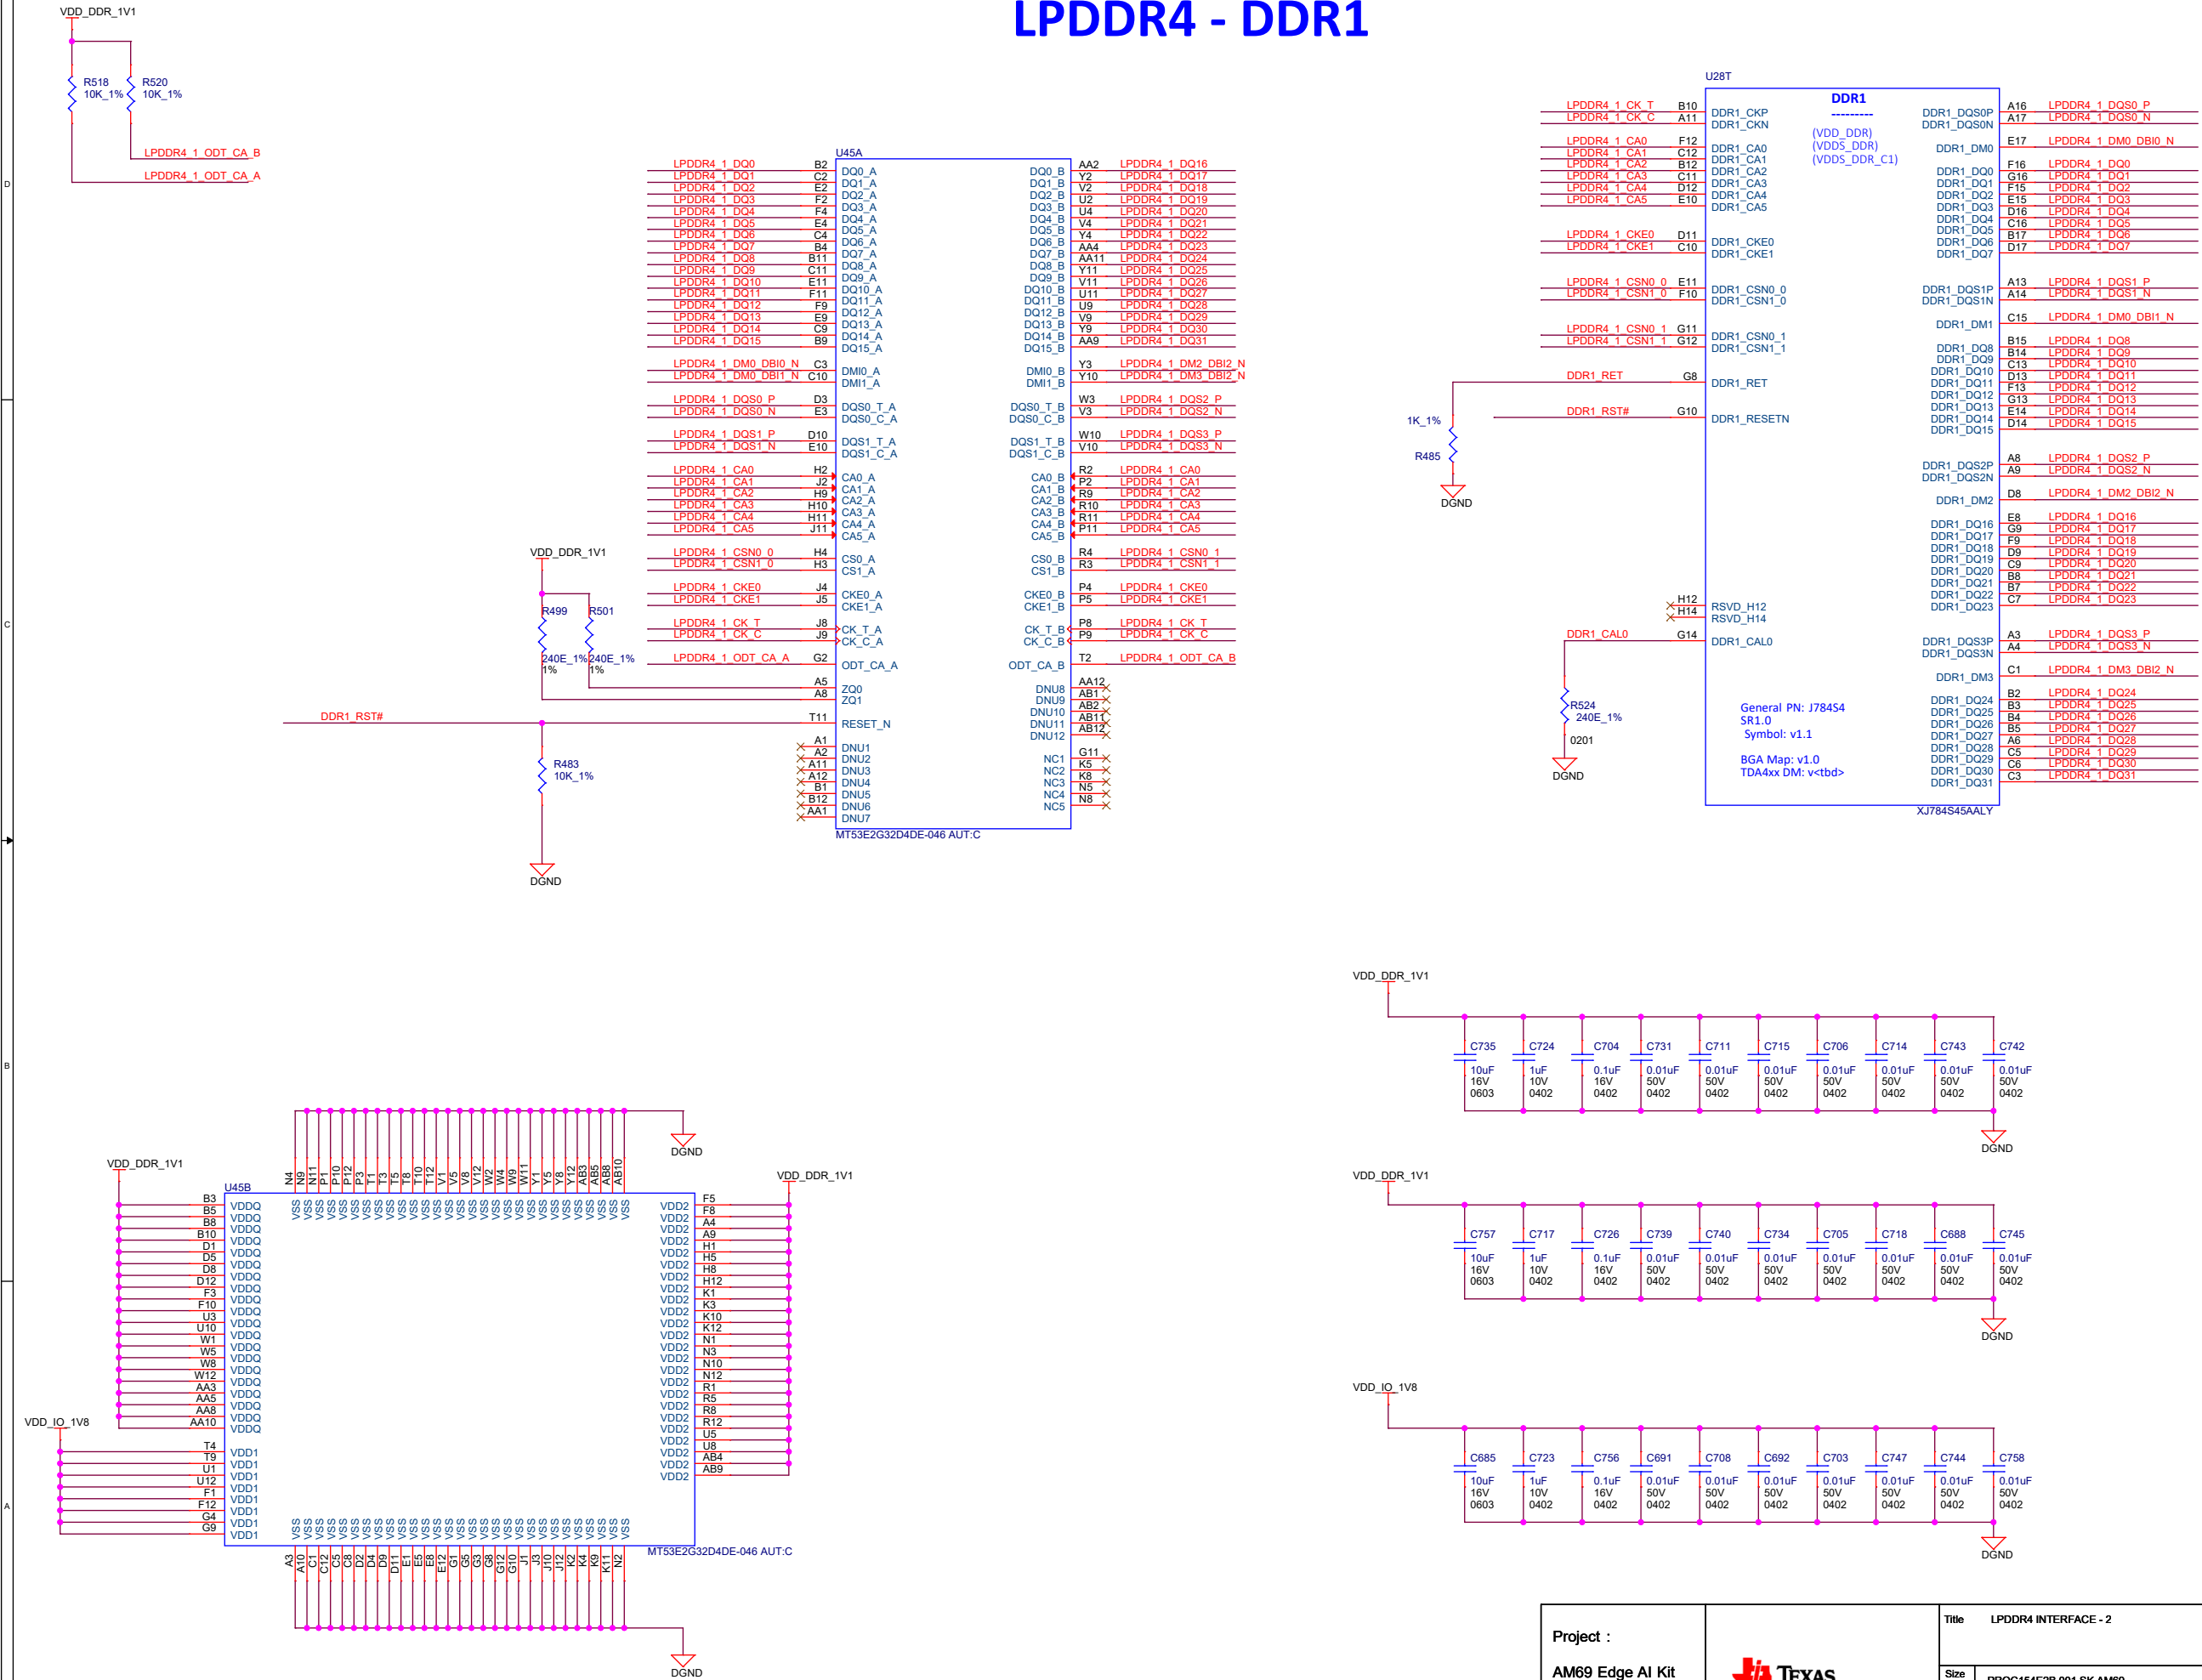

LPDDR4 - DDR2

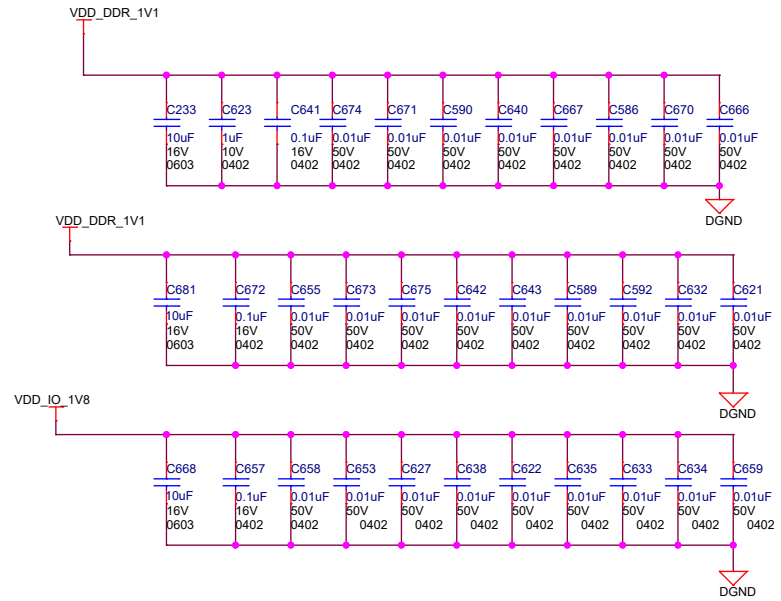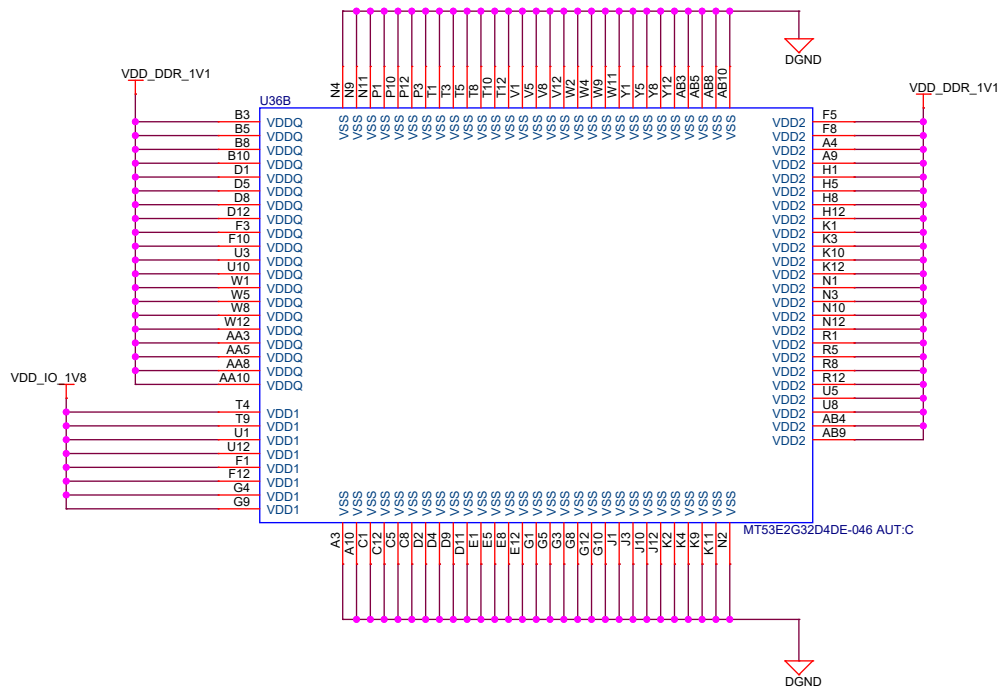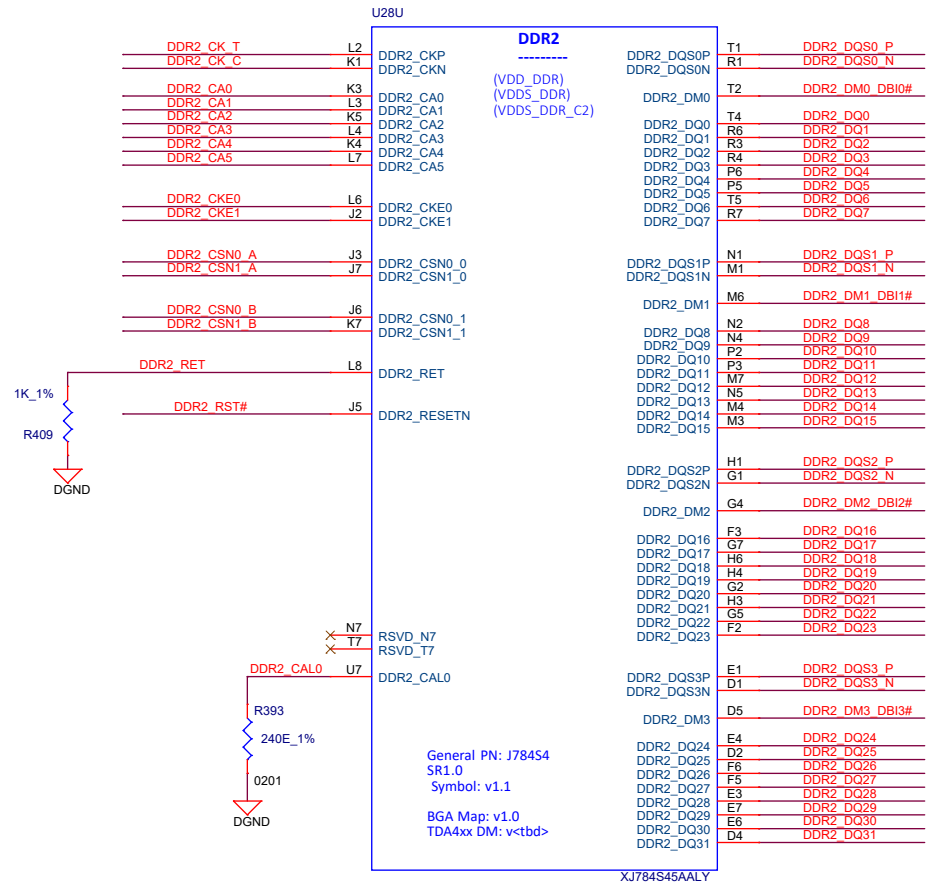
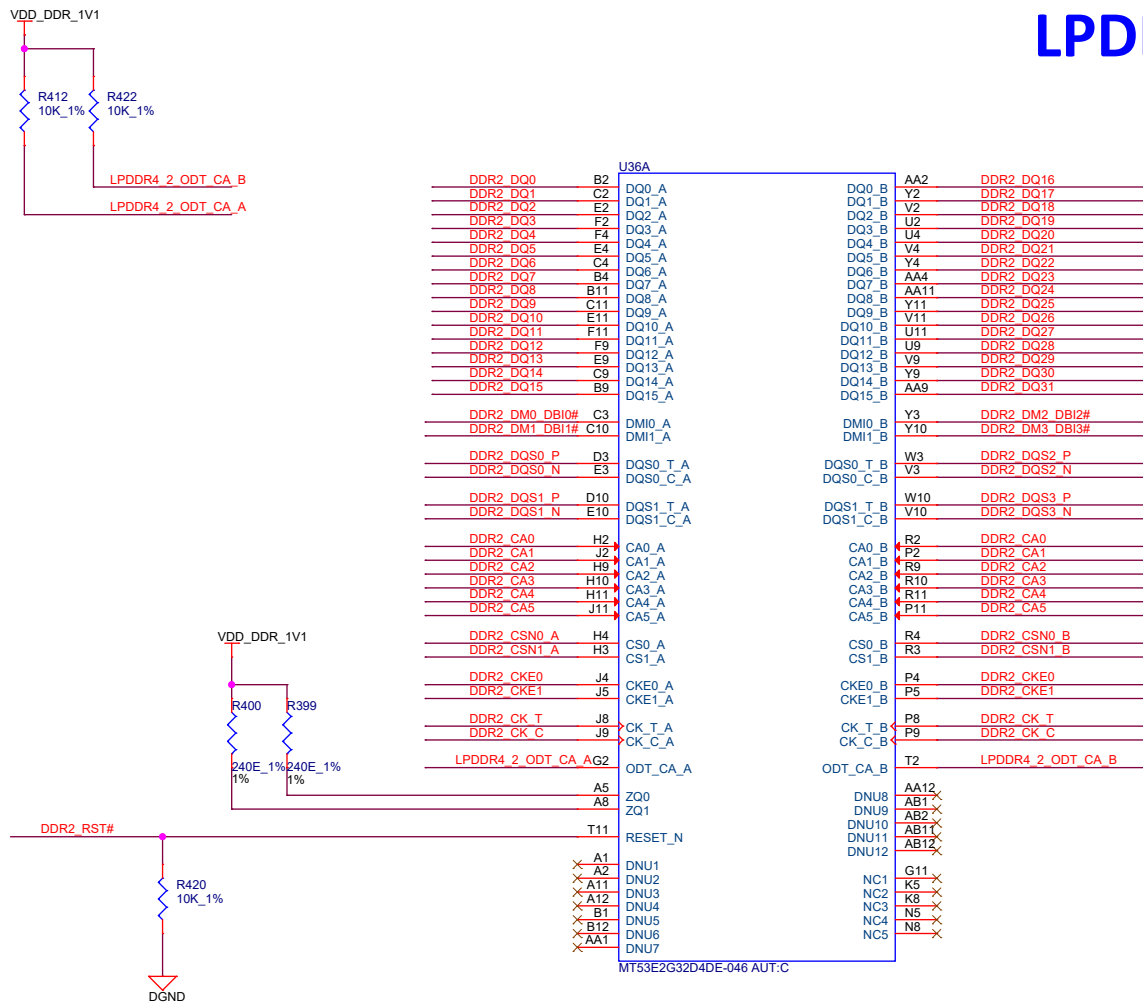


LPDDR4 - DDR3

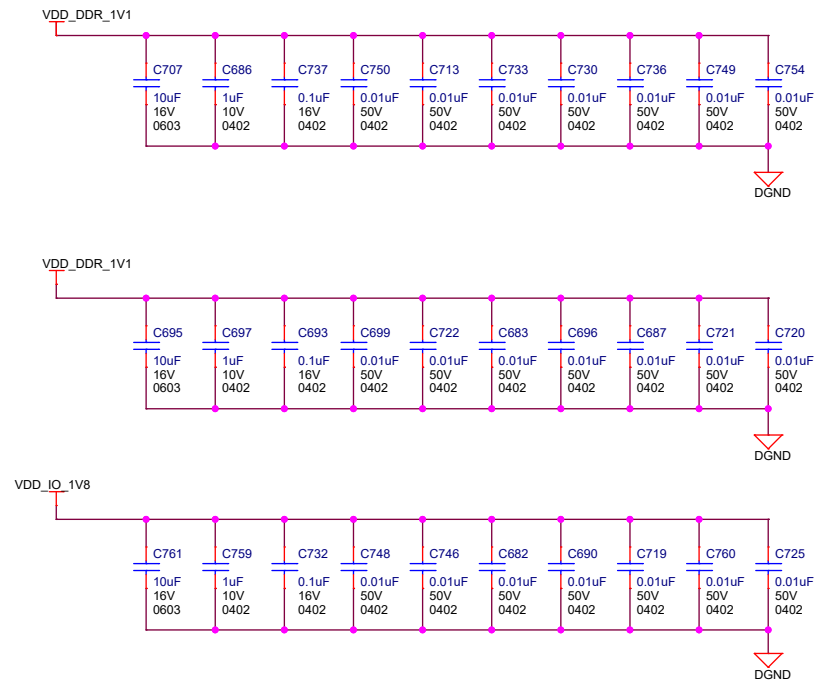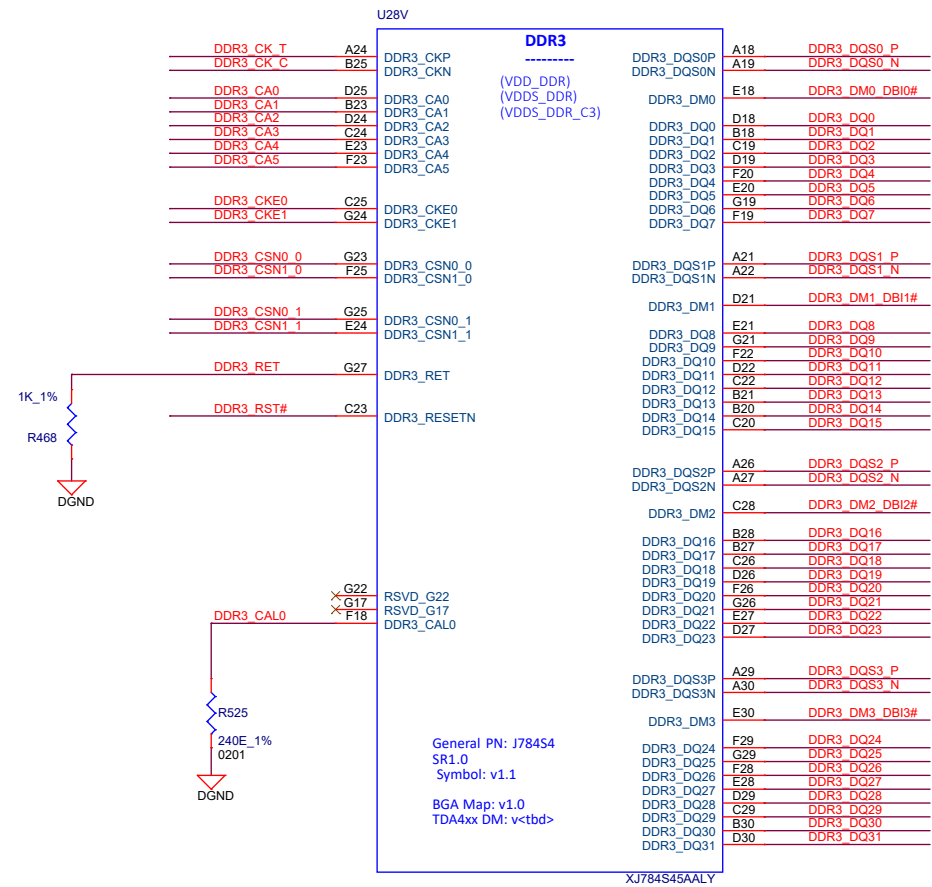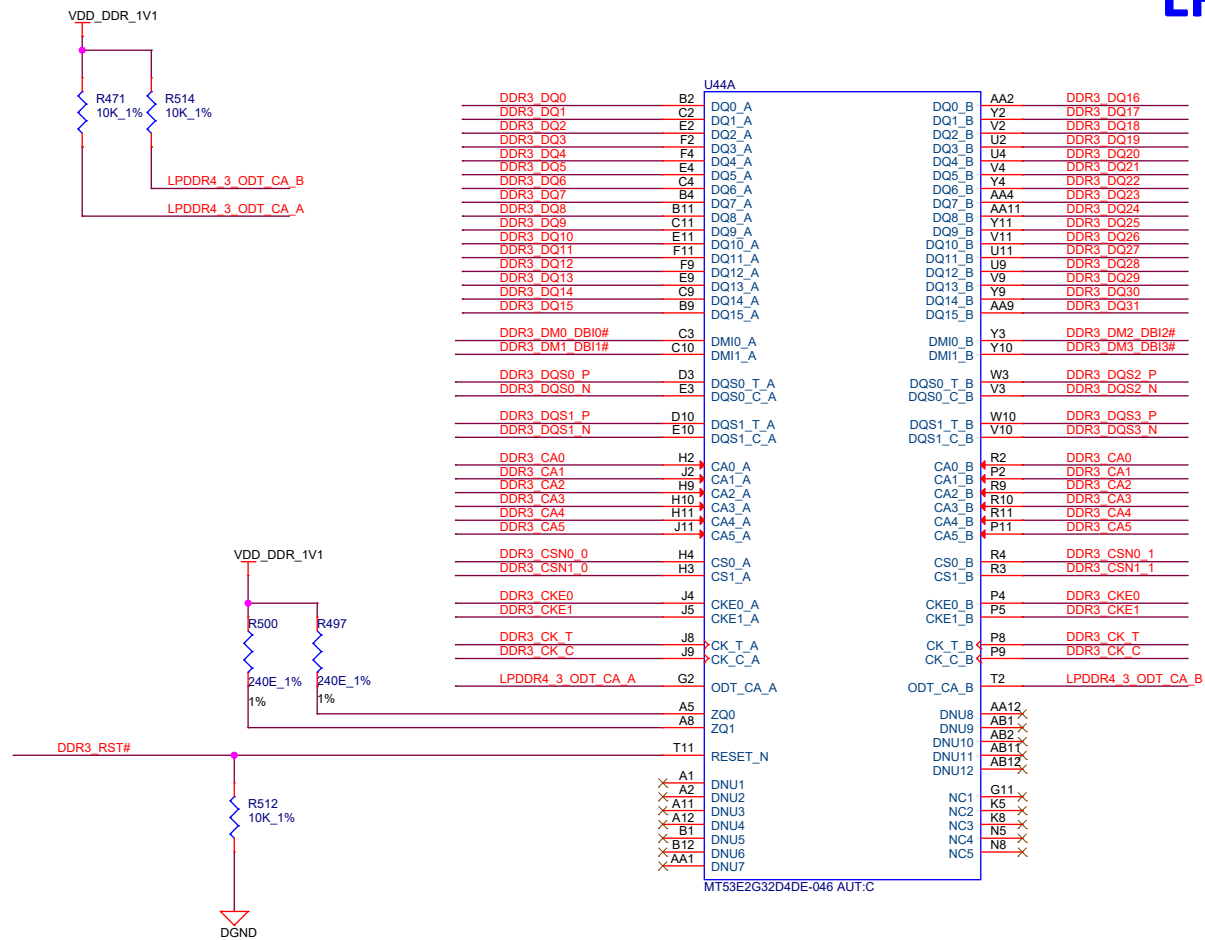


MCU FLASH

OSPI FLASH

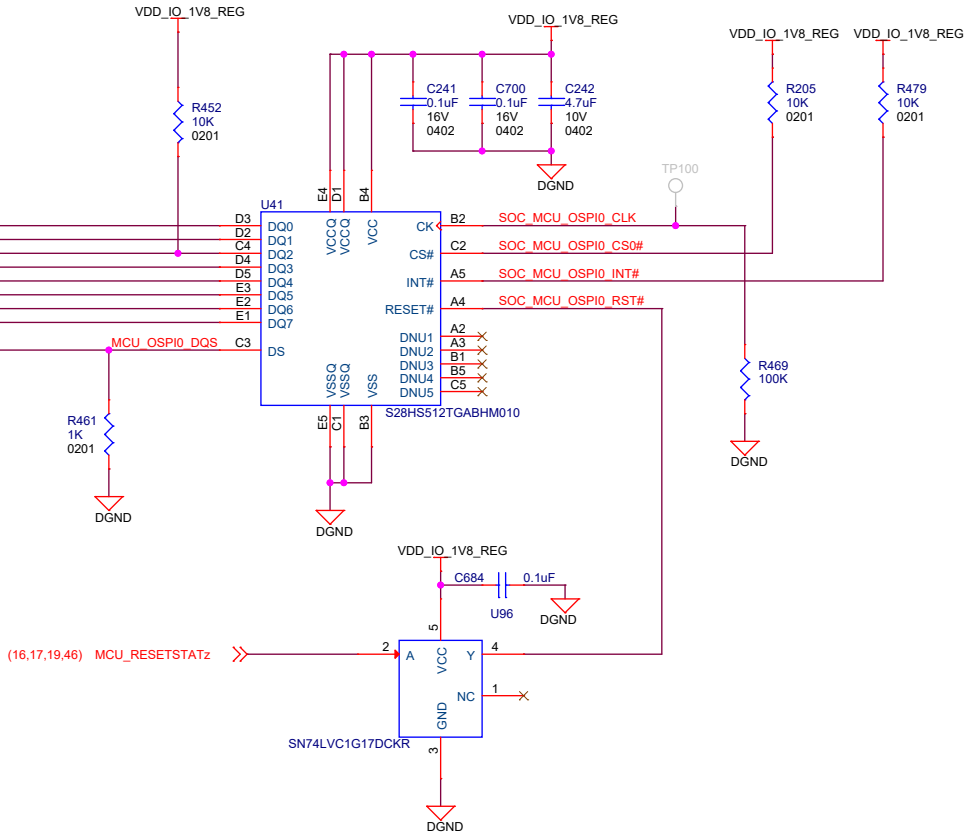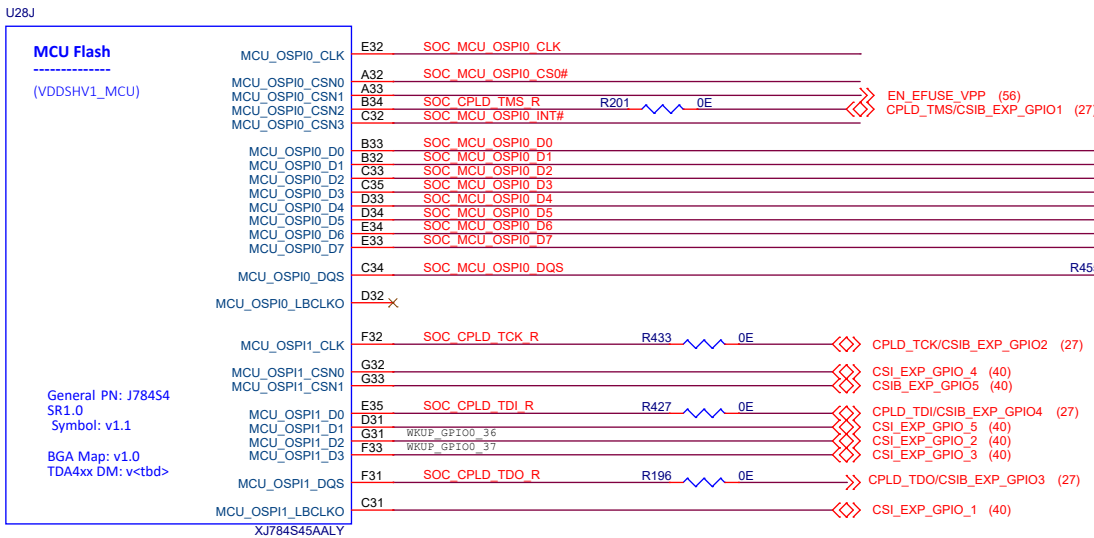


BOOTMODE Control Logic

Note: Logic used to configure BOOTMODE settings during reset. This is four (4) of a total of eighteen (18) boot pins. Specific value is user configured (dip switch).

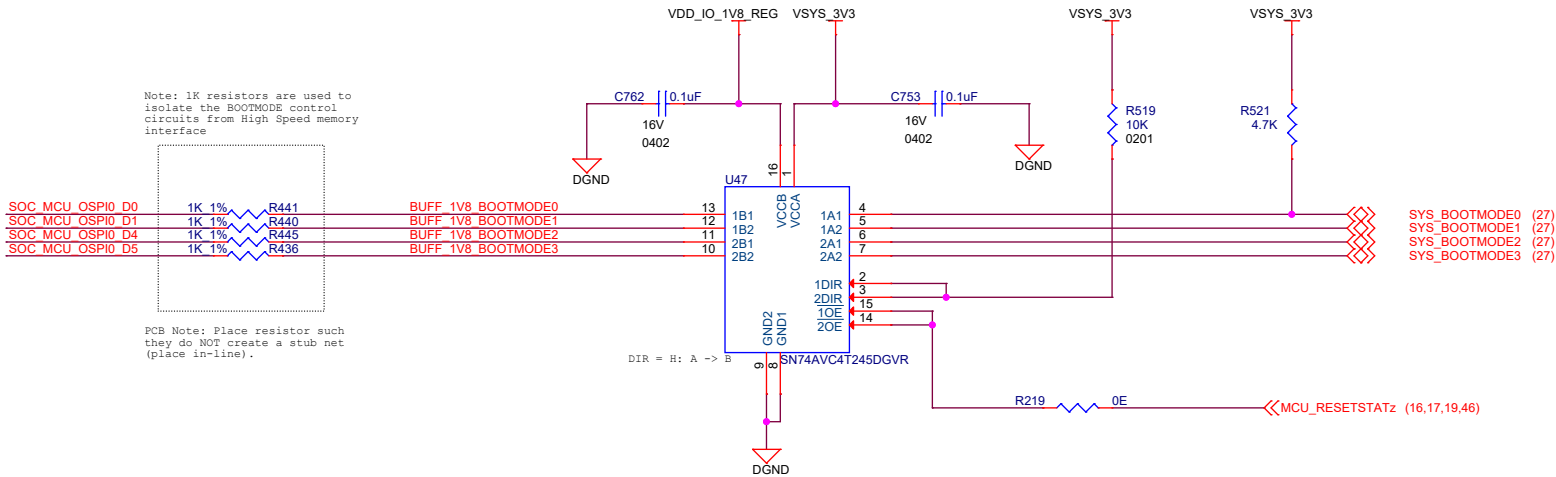


PCB Note: Place resistor such they do NOT create a stub net (Place in-line).


MCU & MAIN GENERAL IO, OSC CLKS

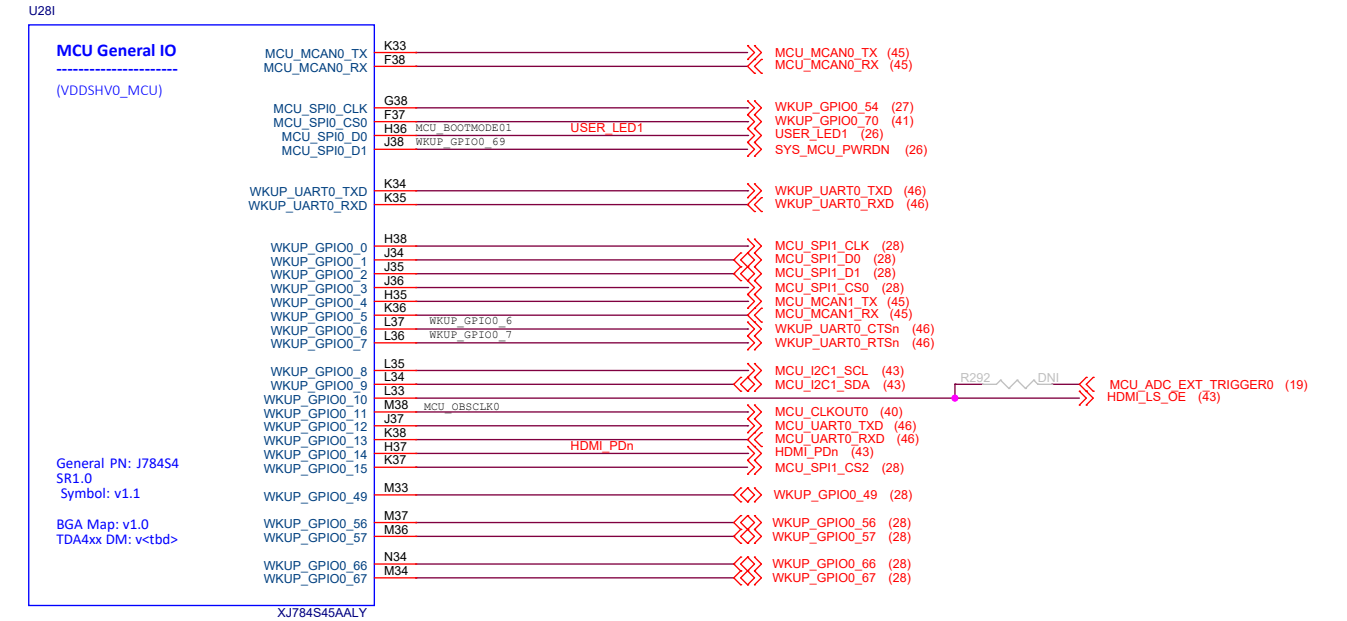


BOOTMODE

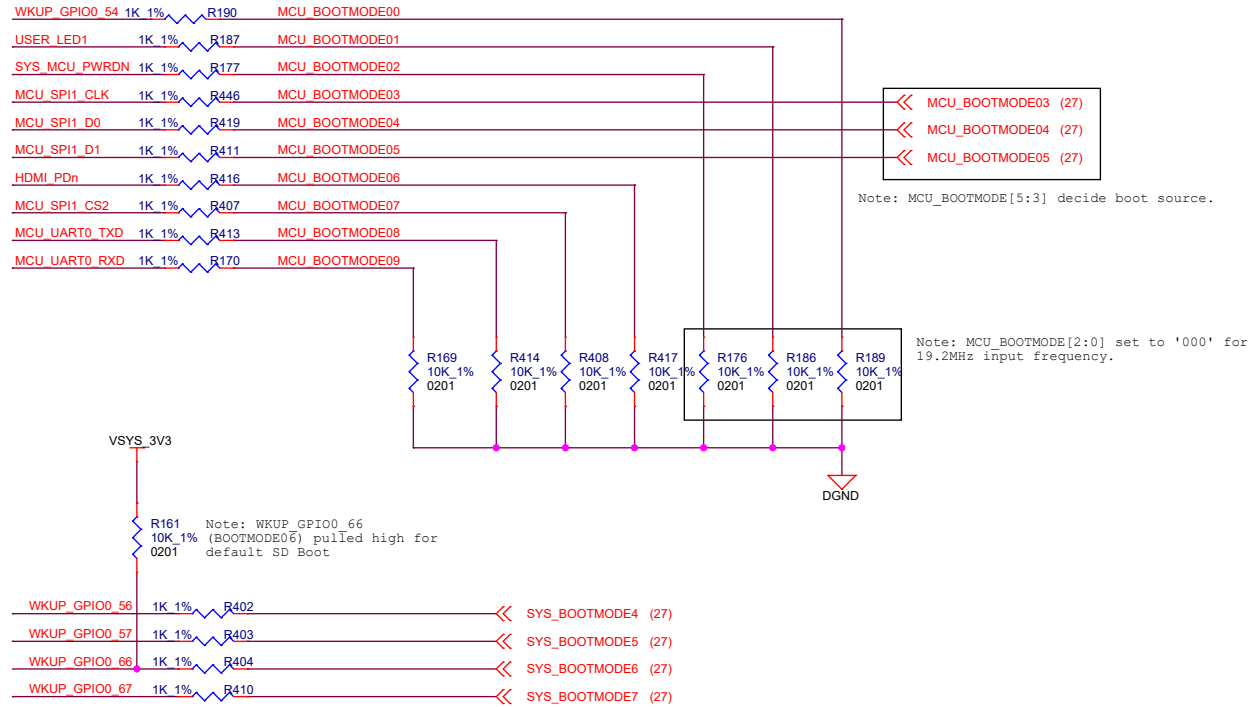


CONTROL & OSC

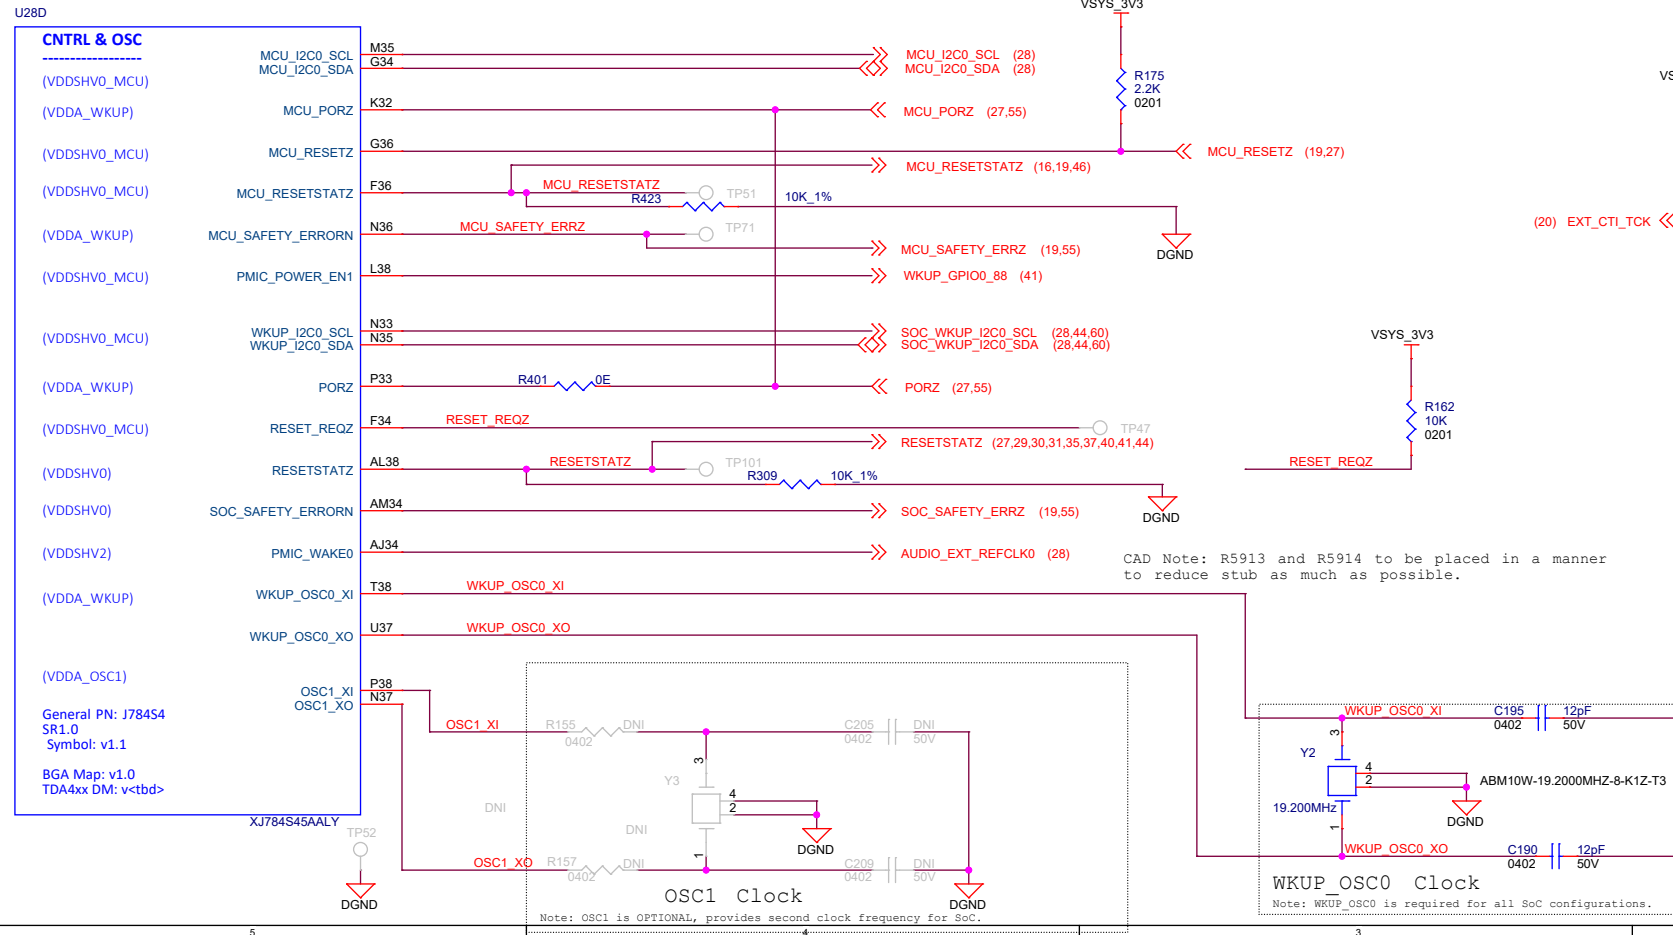

cTI 20PIN JTAG HEADER

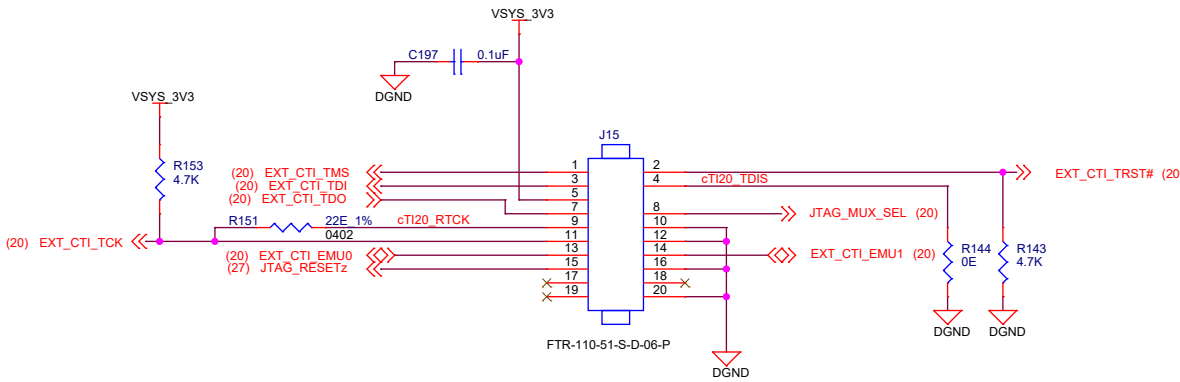


MCU/WKUP I2C Pull-ups

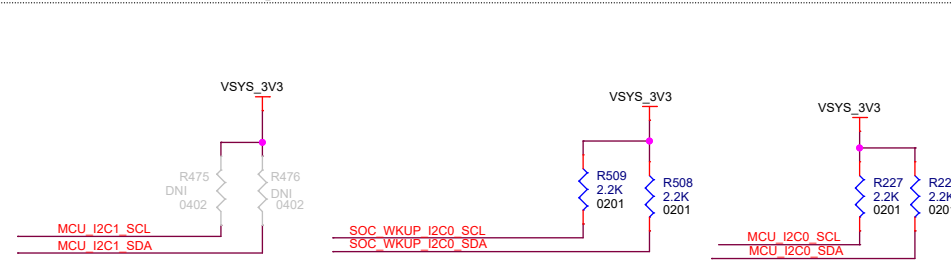


Project : AM69 Edge AI Kit		Title SOC - MCU GENERAL & MAIN GENERAL	
Size C		PROC154E2B 001 SK AM69	Rev E2B
Date: Thursday, March 16, 2023		Sheet 17 of 62	

GENERAL IO

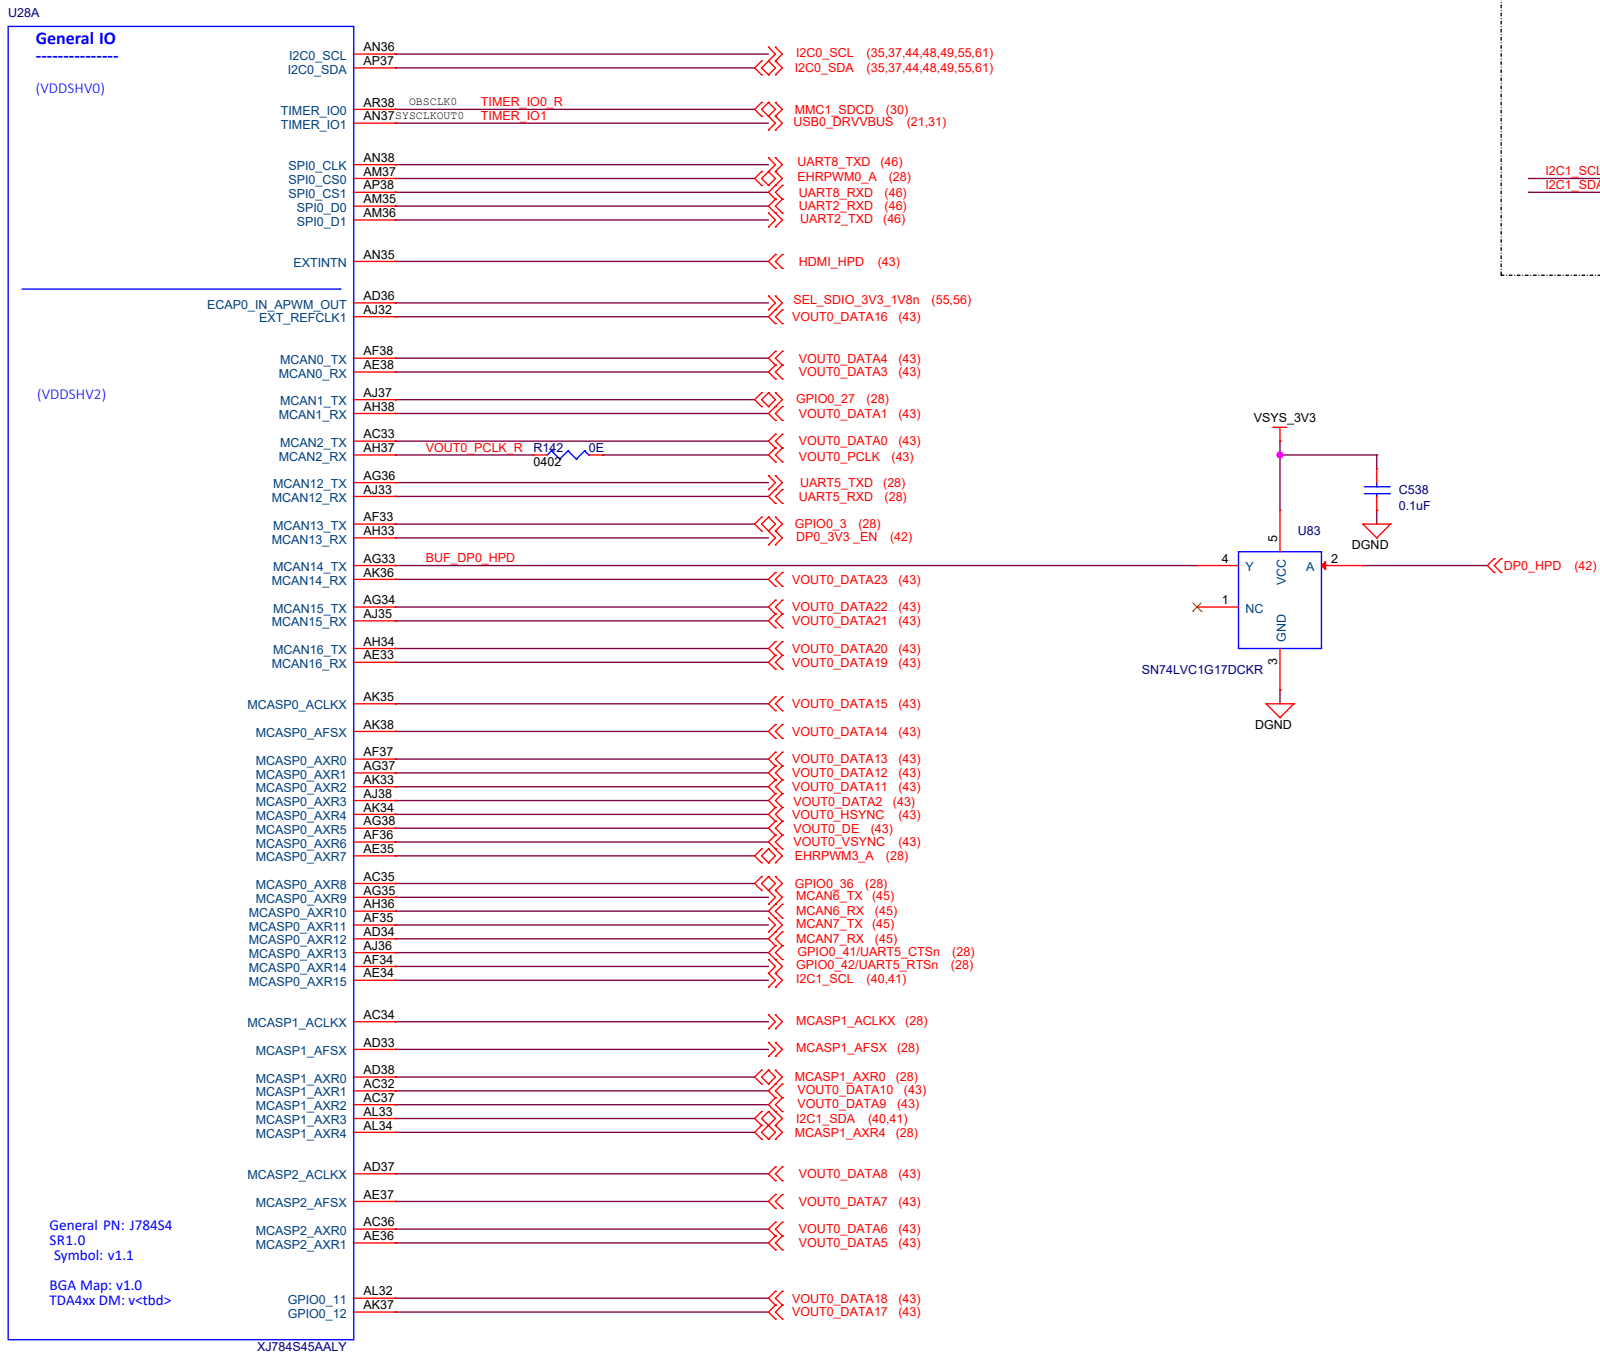

I2C Pull Ups

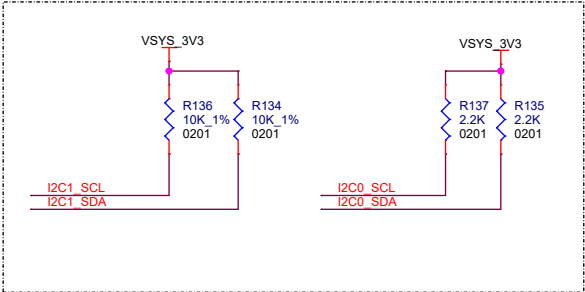

Project :

AM69 Edge AI Kit



Title SOC - MAIN GENERAL

Size C PROC154E2B 001 SK AM69


Date: Thursday, March 16, 2023

Sheet 18 of 62


Rev

E2B

MCU_RGMII

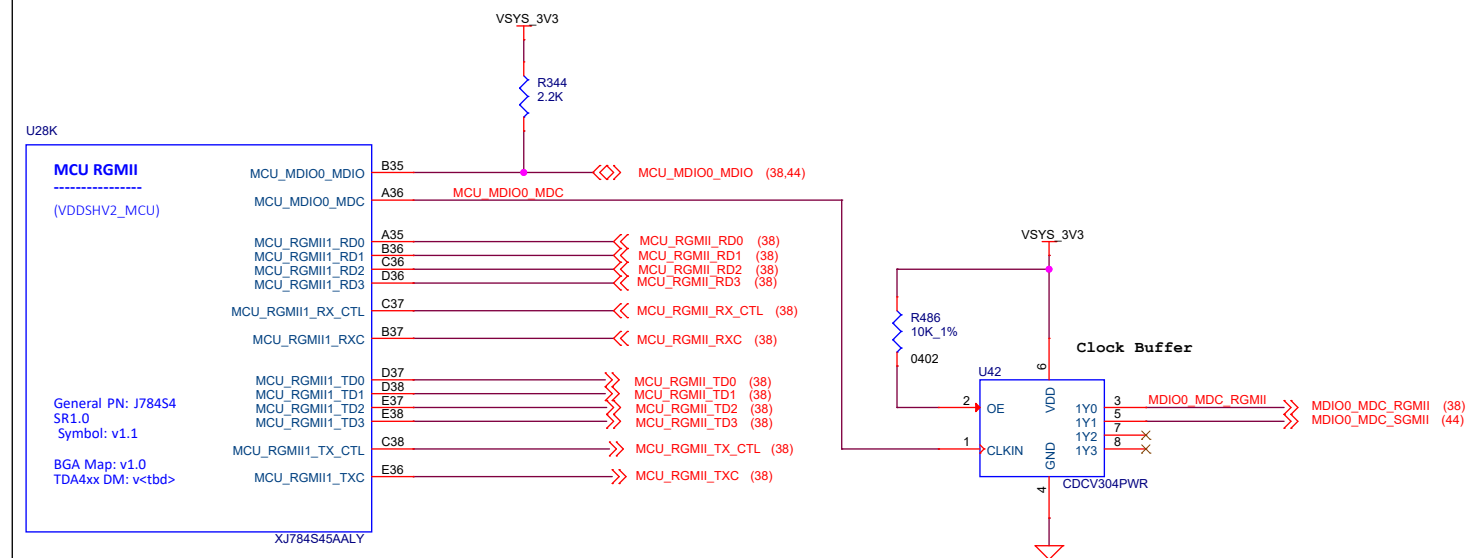

MMC0 and MMC1

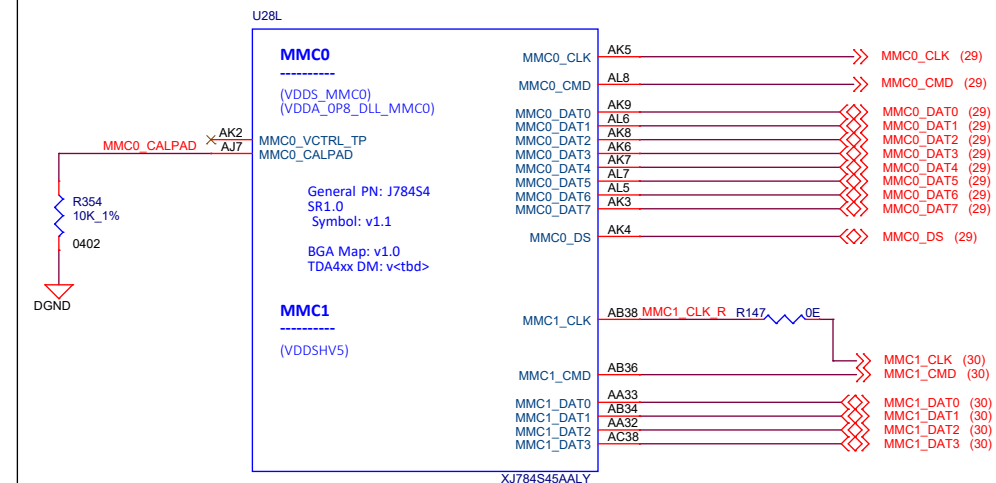


Resistor option to bypass clock buffer.




CAD Note: Place resistors in such a way as to avoid any stubs.

MCU_ADC

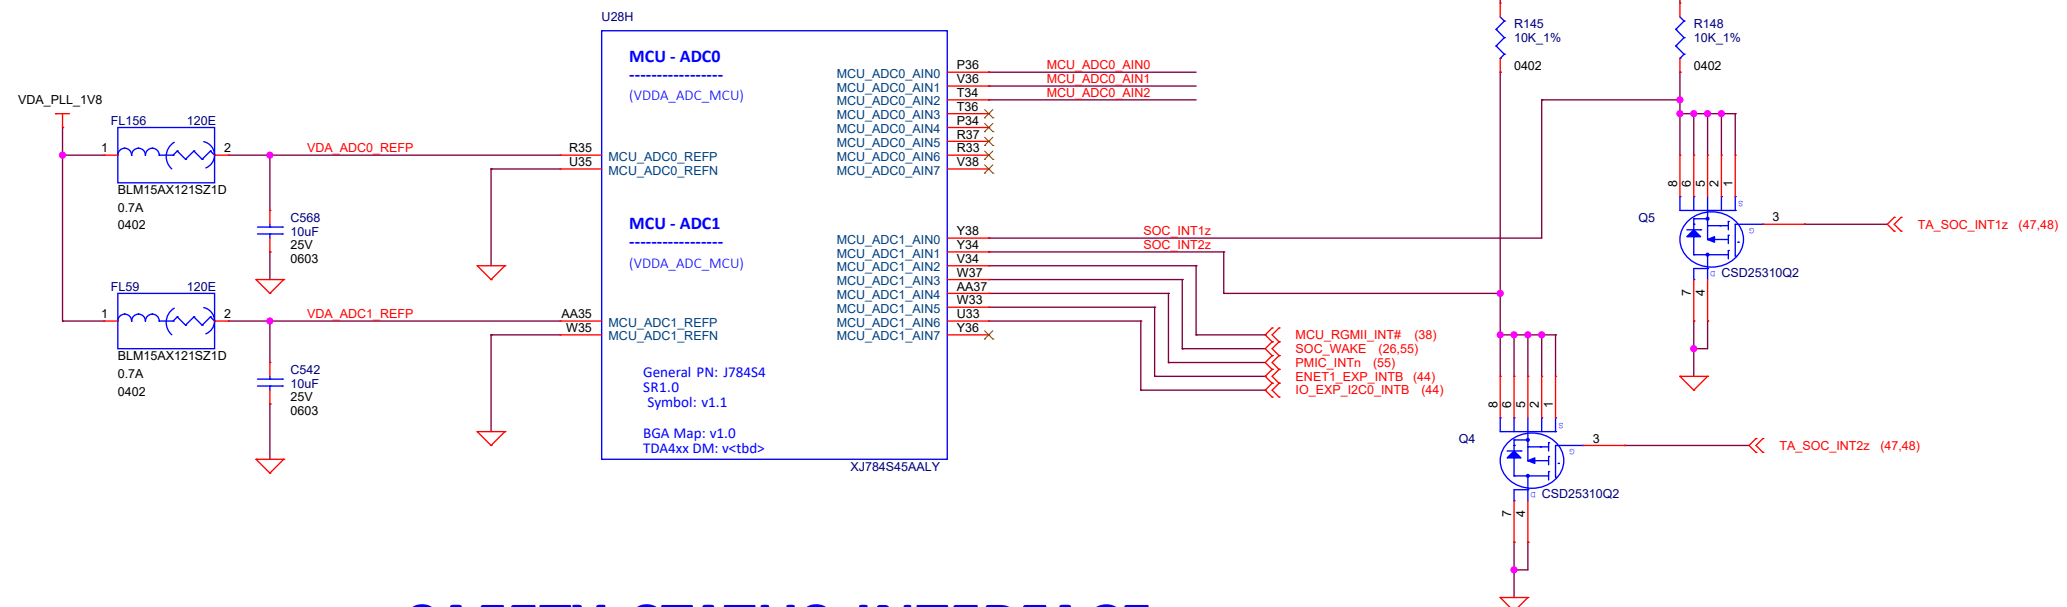

SAFETY STATUS INTERFACE

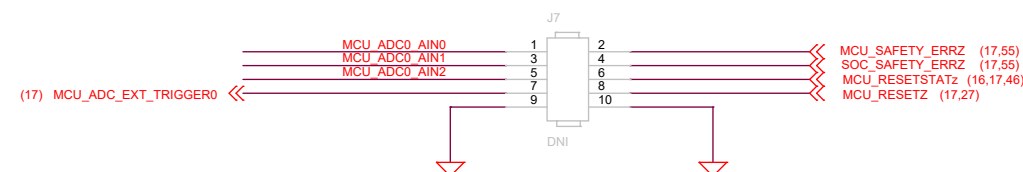

Project :


AM69 Edge AI Kit




Title	SOC - MCU RGMII / MMC[0:1] / MCU ADC
-------	--------------------------------------

Size	PROC154E2B 001 SK AM69	
C		
Date:	Thursday, March 16, 2023	Sheet 19 of 62

SPECIAL, DEBUG & RSVD

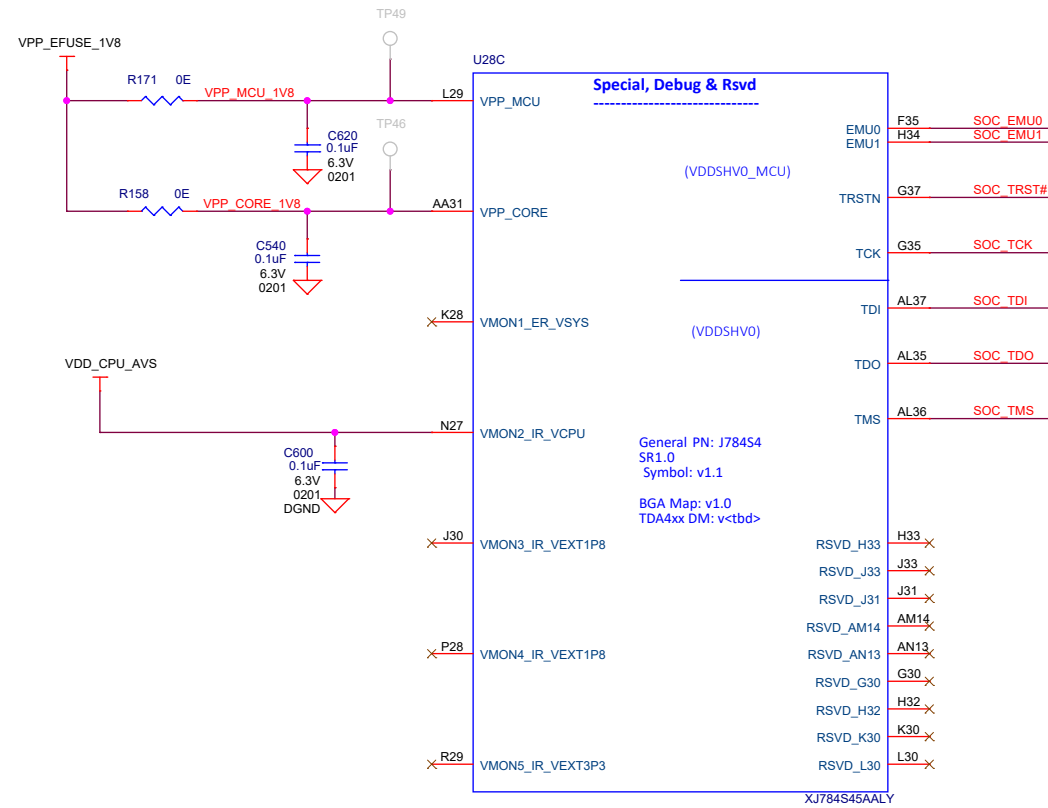

JTAG CONNECTOR AND XDS110 MUX

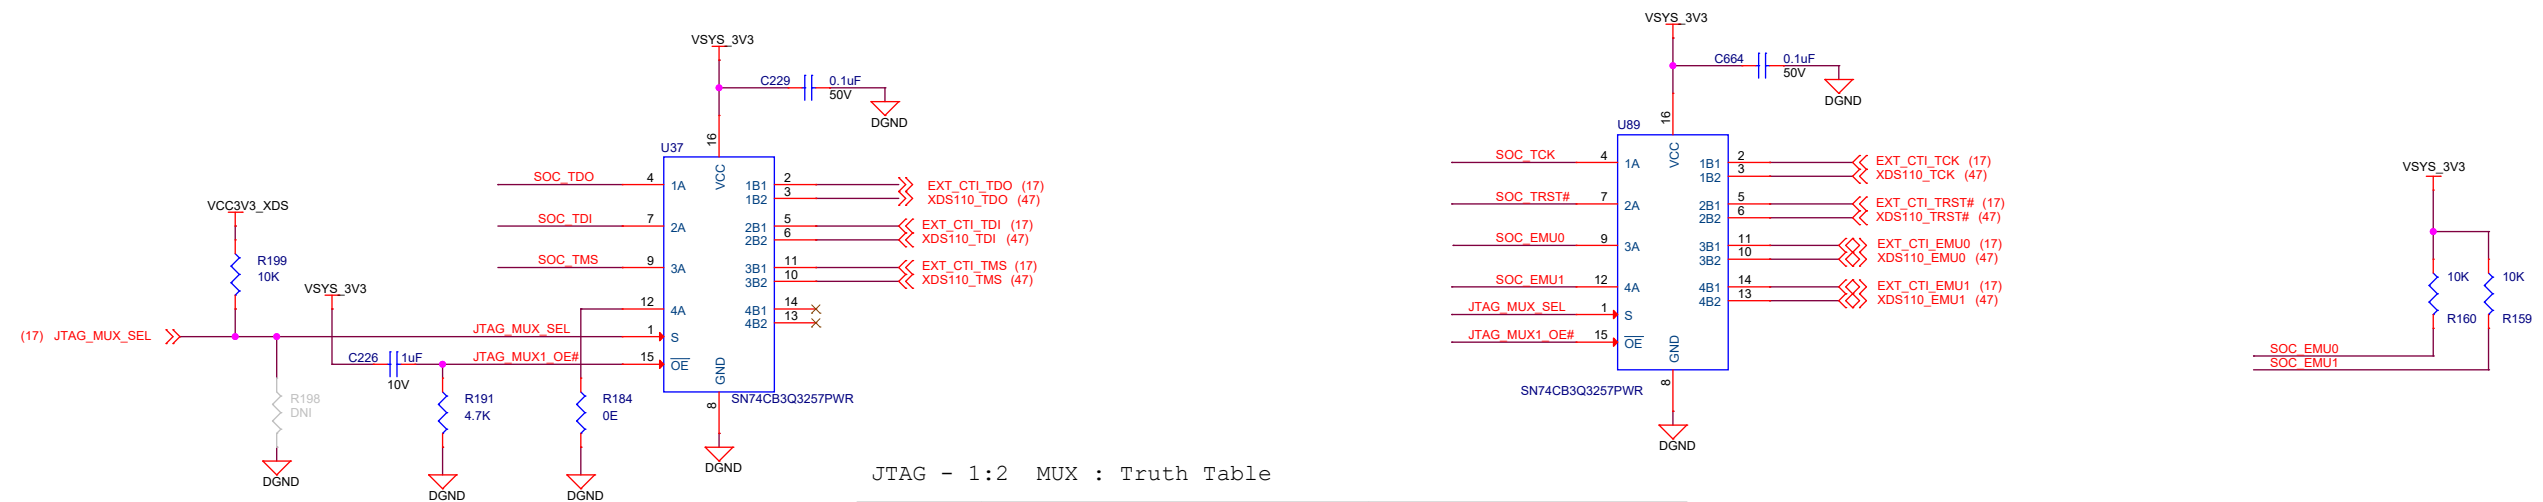


JTAG - 1:2 MUX : Truth Table


MUX_SEL	CONDITION	FUNCTION	
LOW	External Emulator attached & No Power to XDS110	A-->B1 port [EXTERNAL EMU]	(default)
HIGH	No External Emulator attached & XDS110 Powered via USB	A-->B2 port [ON Board EMU]	

USB0 2.0


USB VBUS Resistor divider circuit

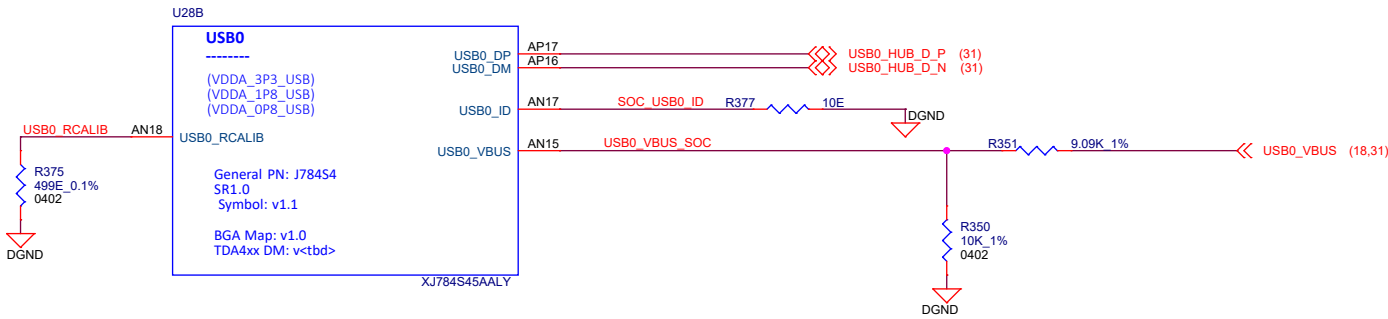


UFS FLASH

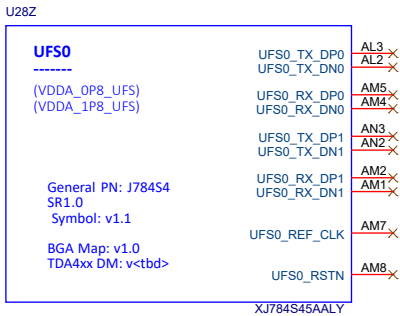

ANALOG POWER 1

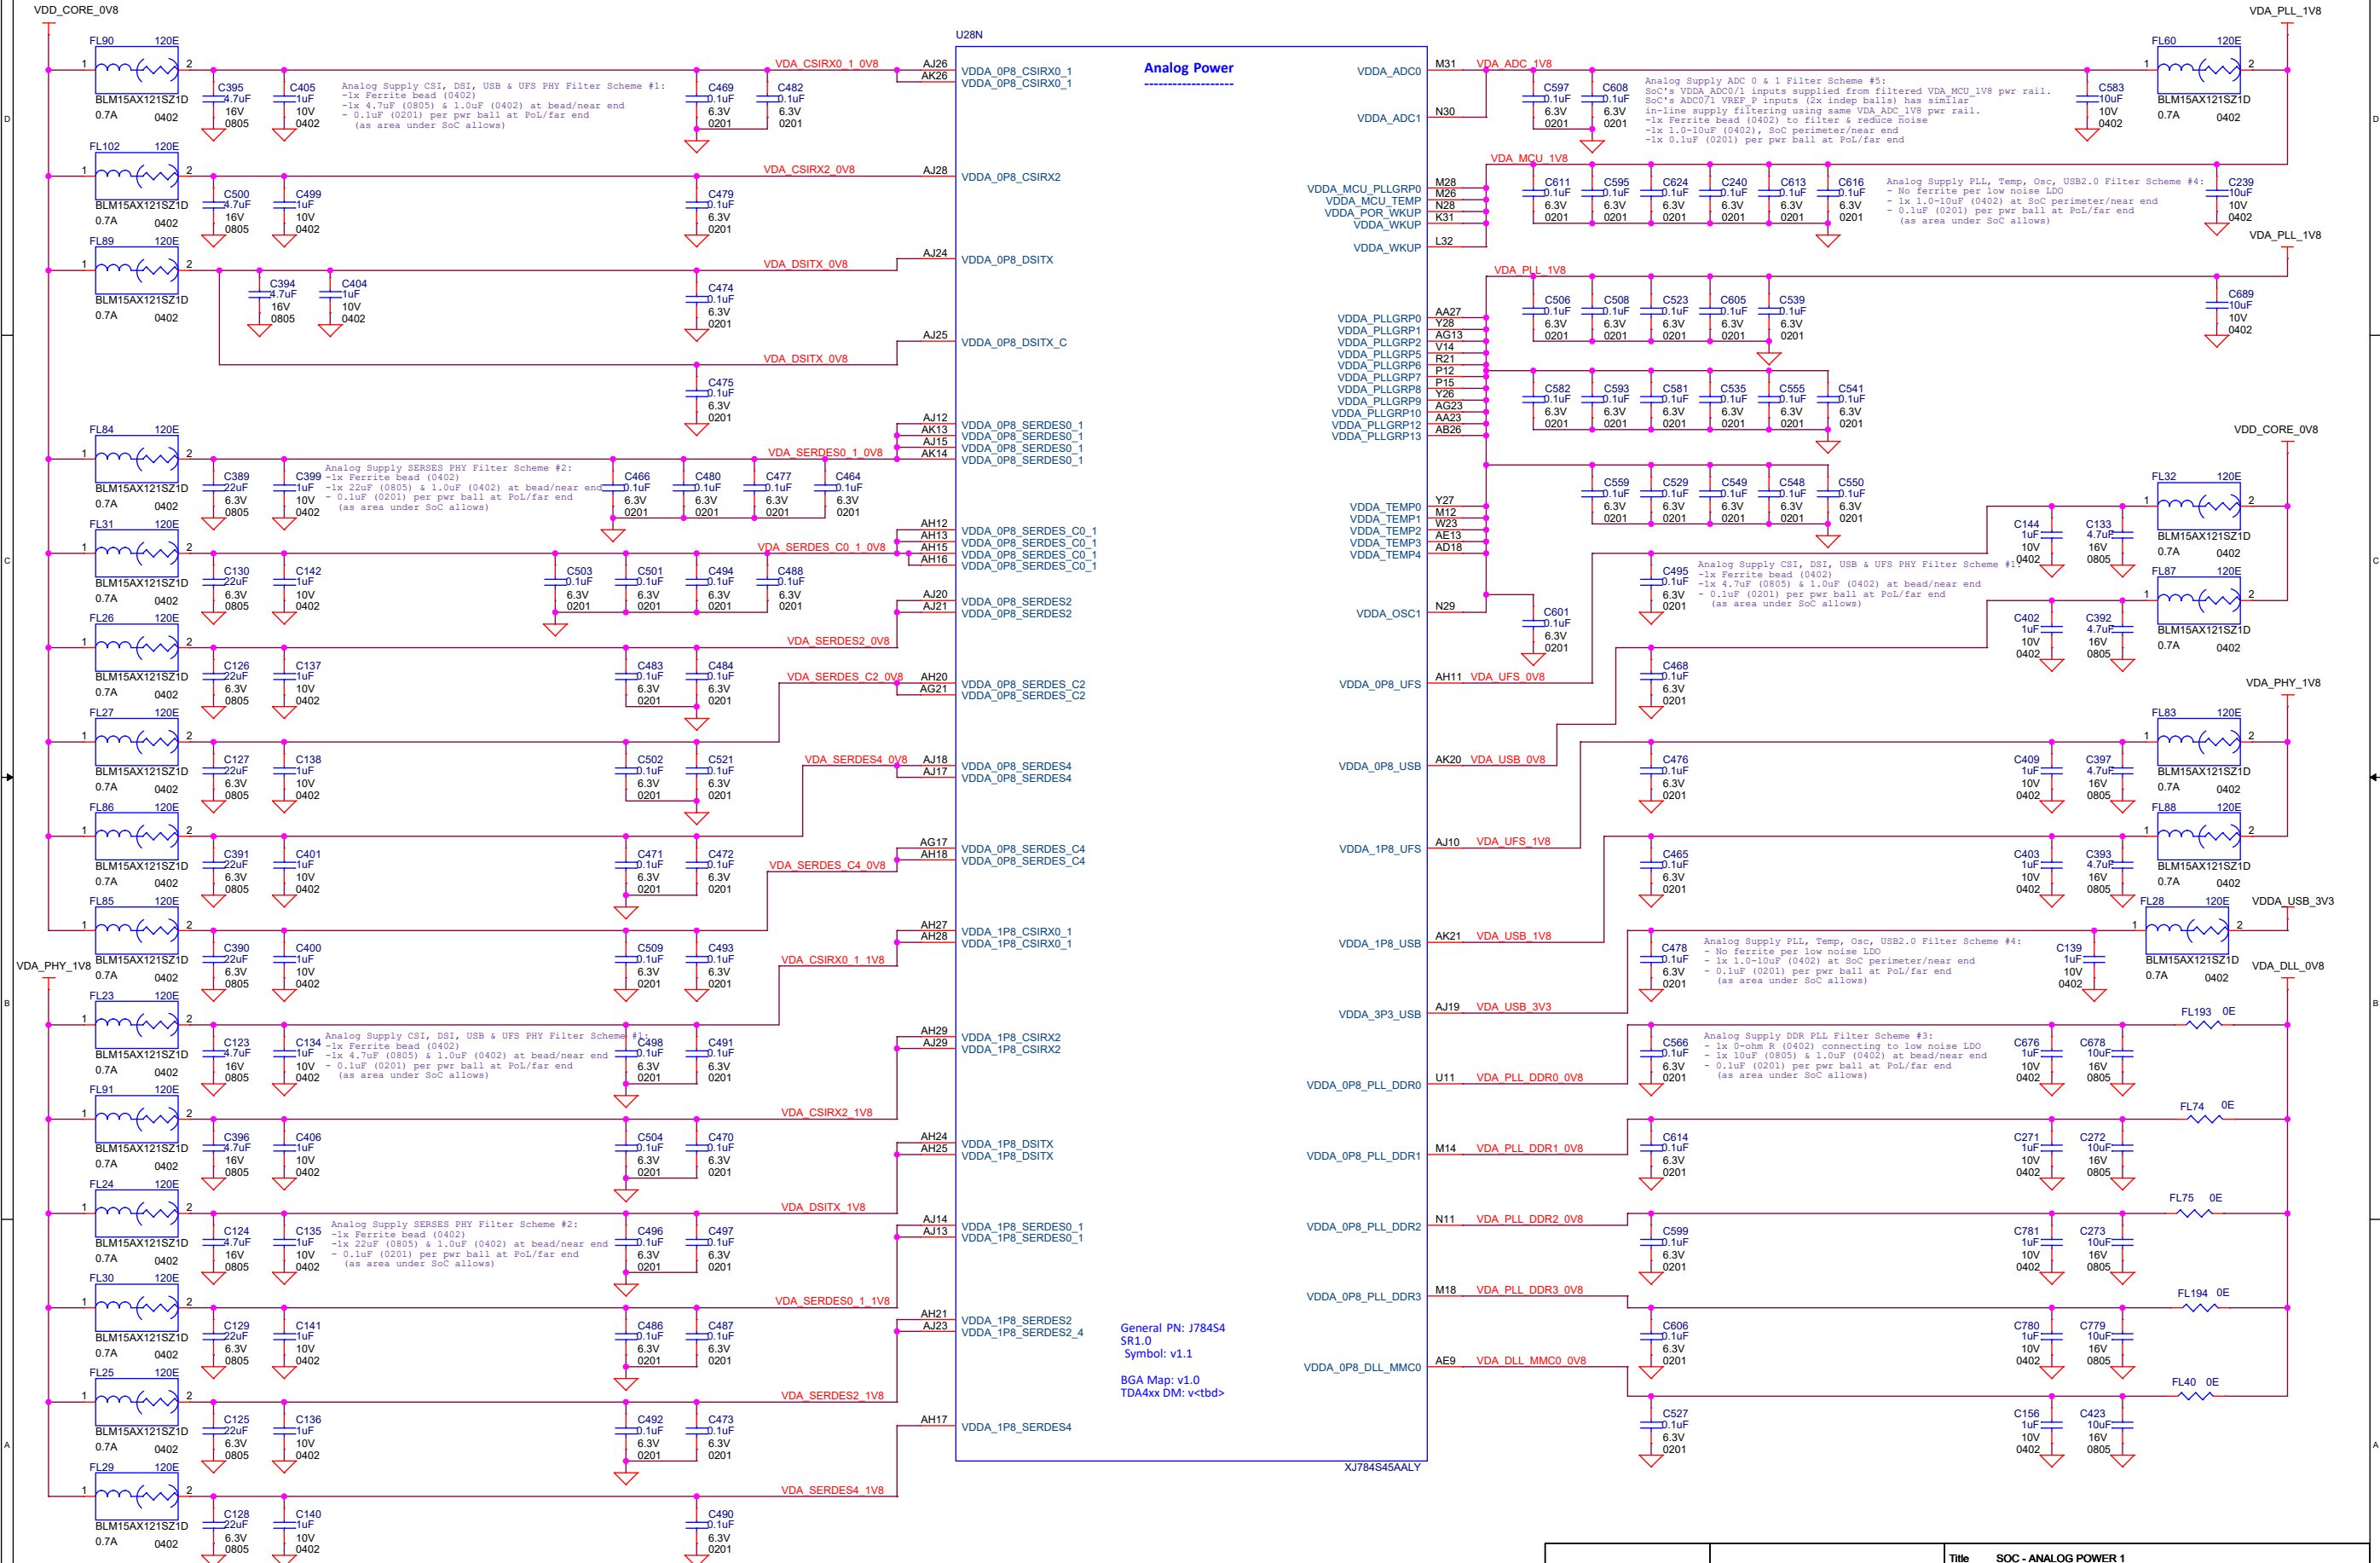

IO POWER 2

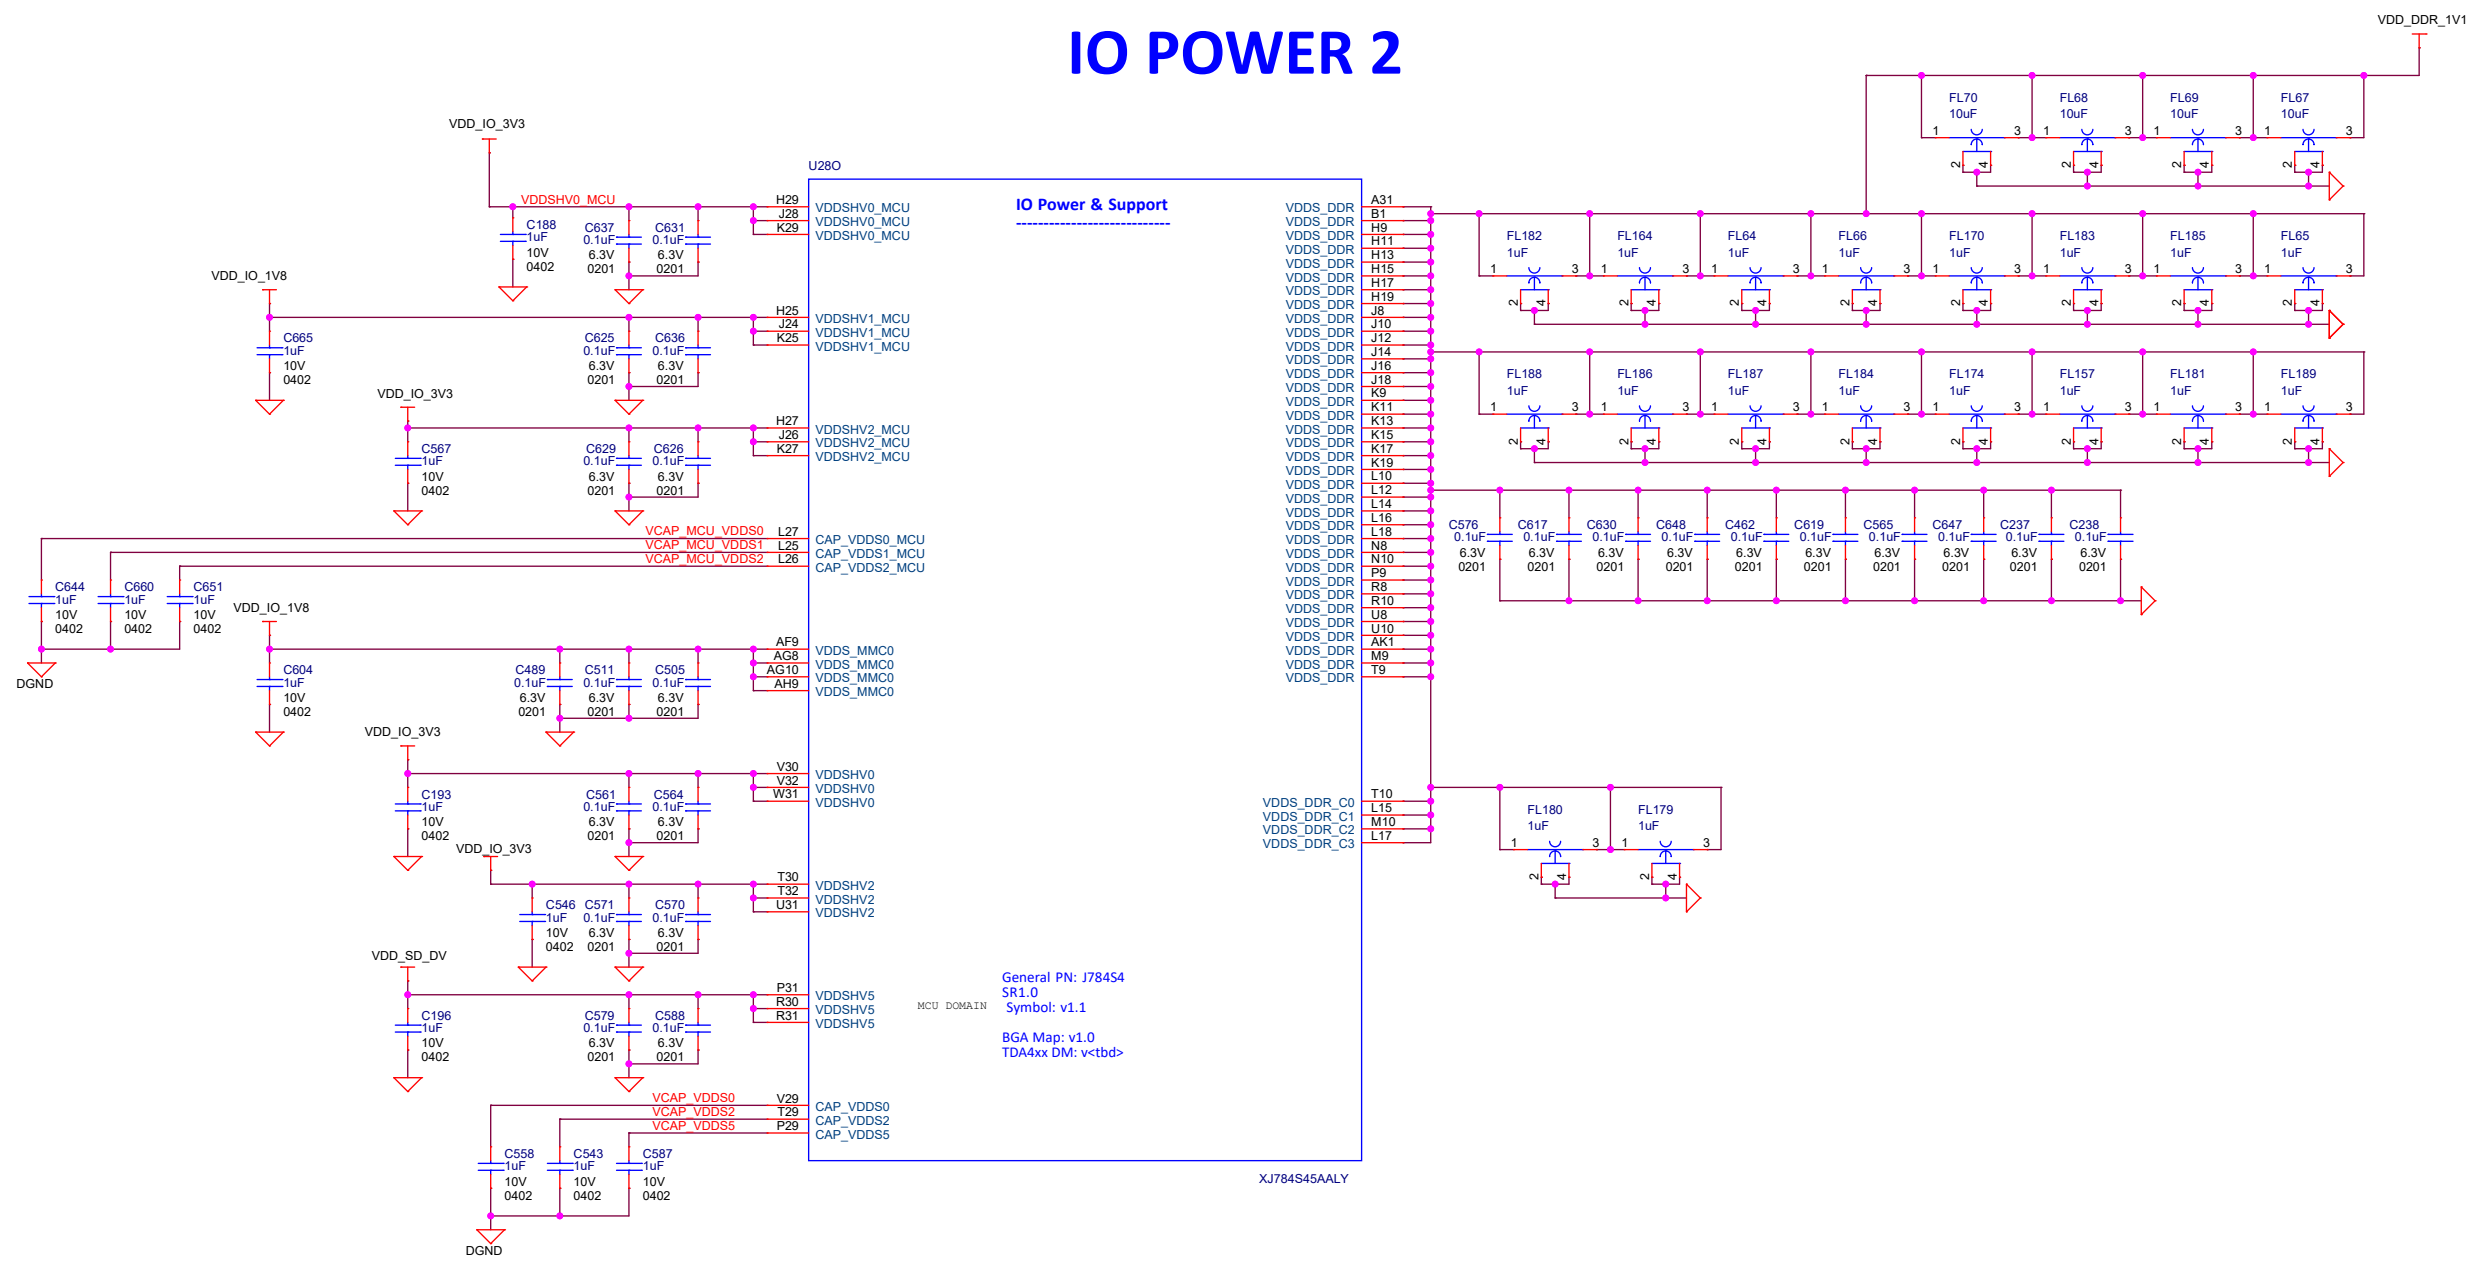


IO Power & Support

General PN: J78454
SR1.0
Symbol: v1.1
BGA Map: v1.0
TDA4xx DM: v<tbd>

XJ784S45AALY

DIGITAL POWER 3

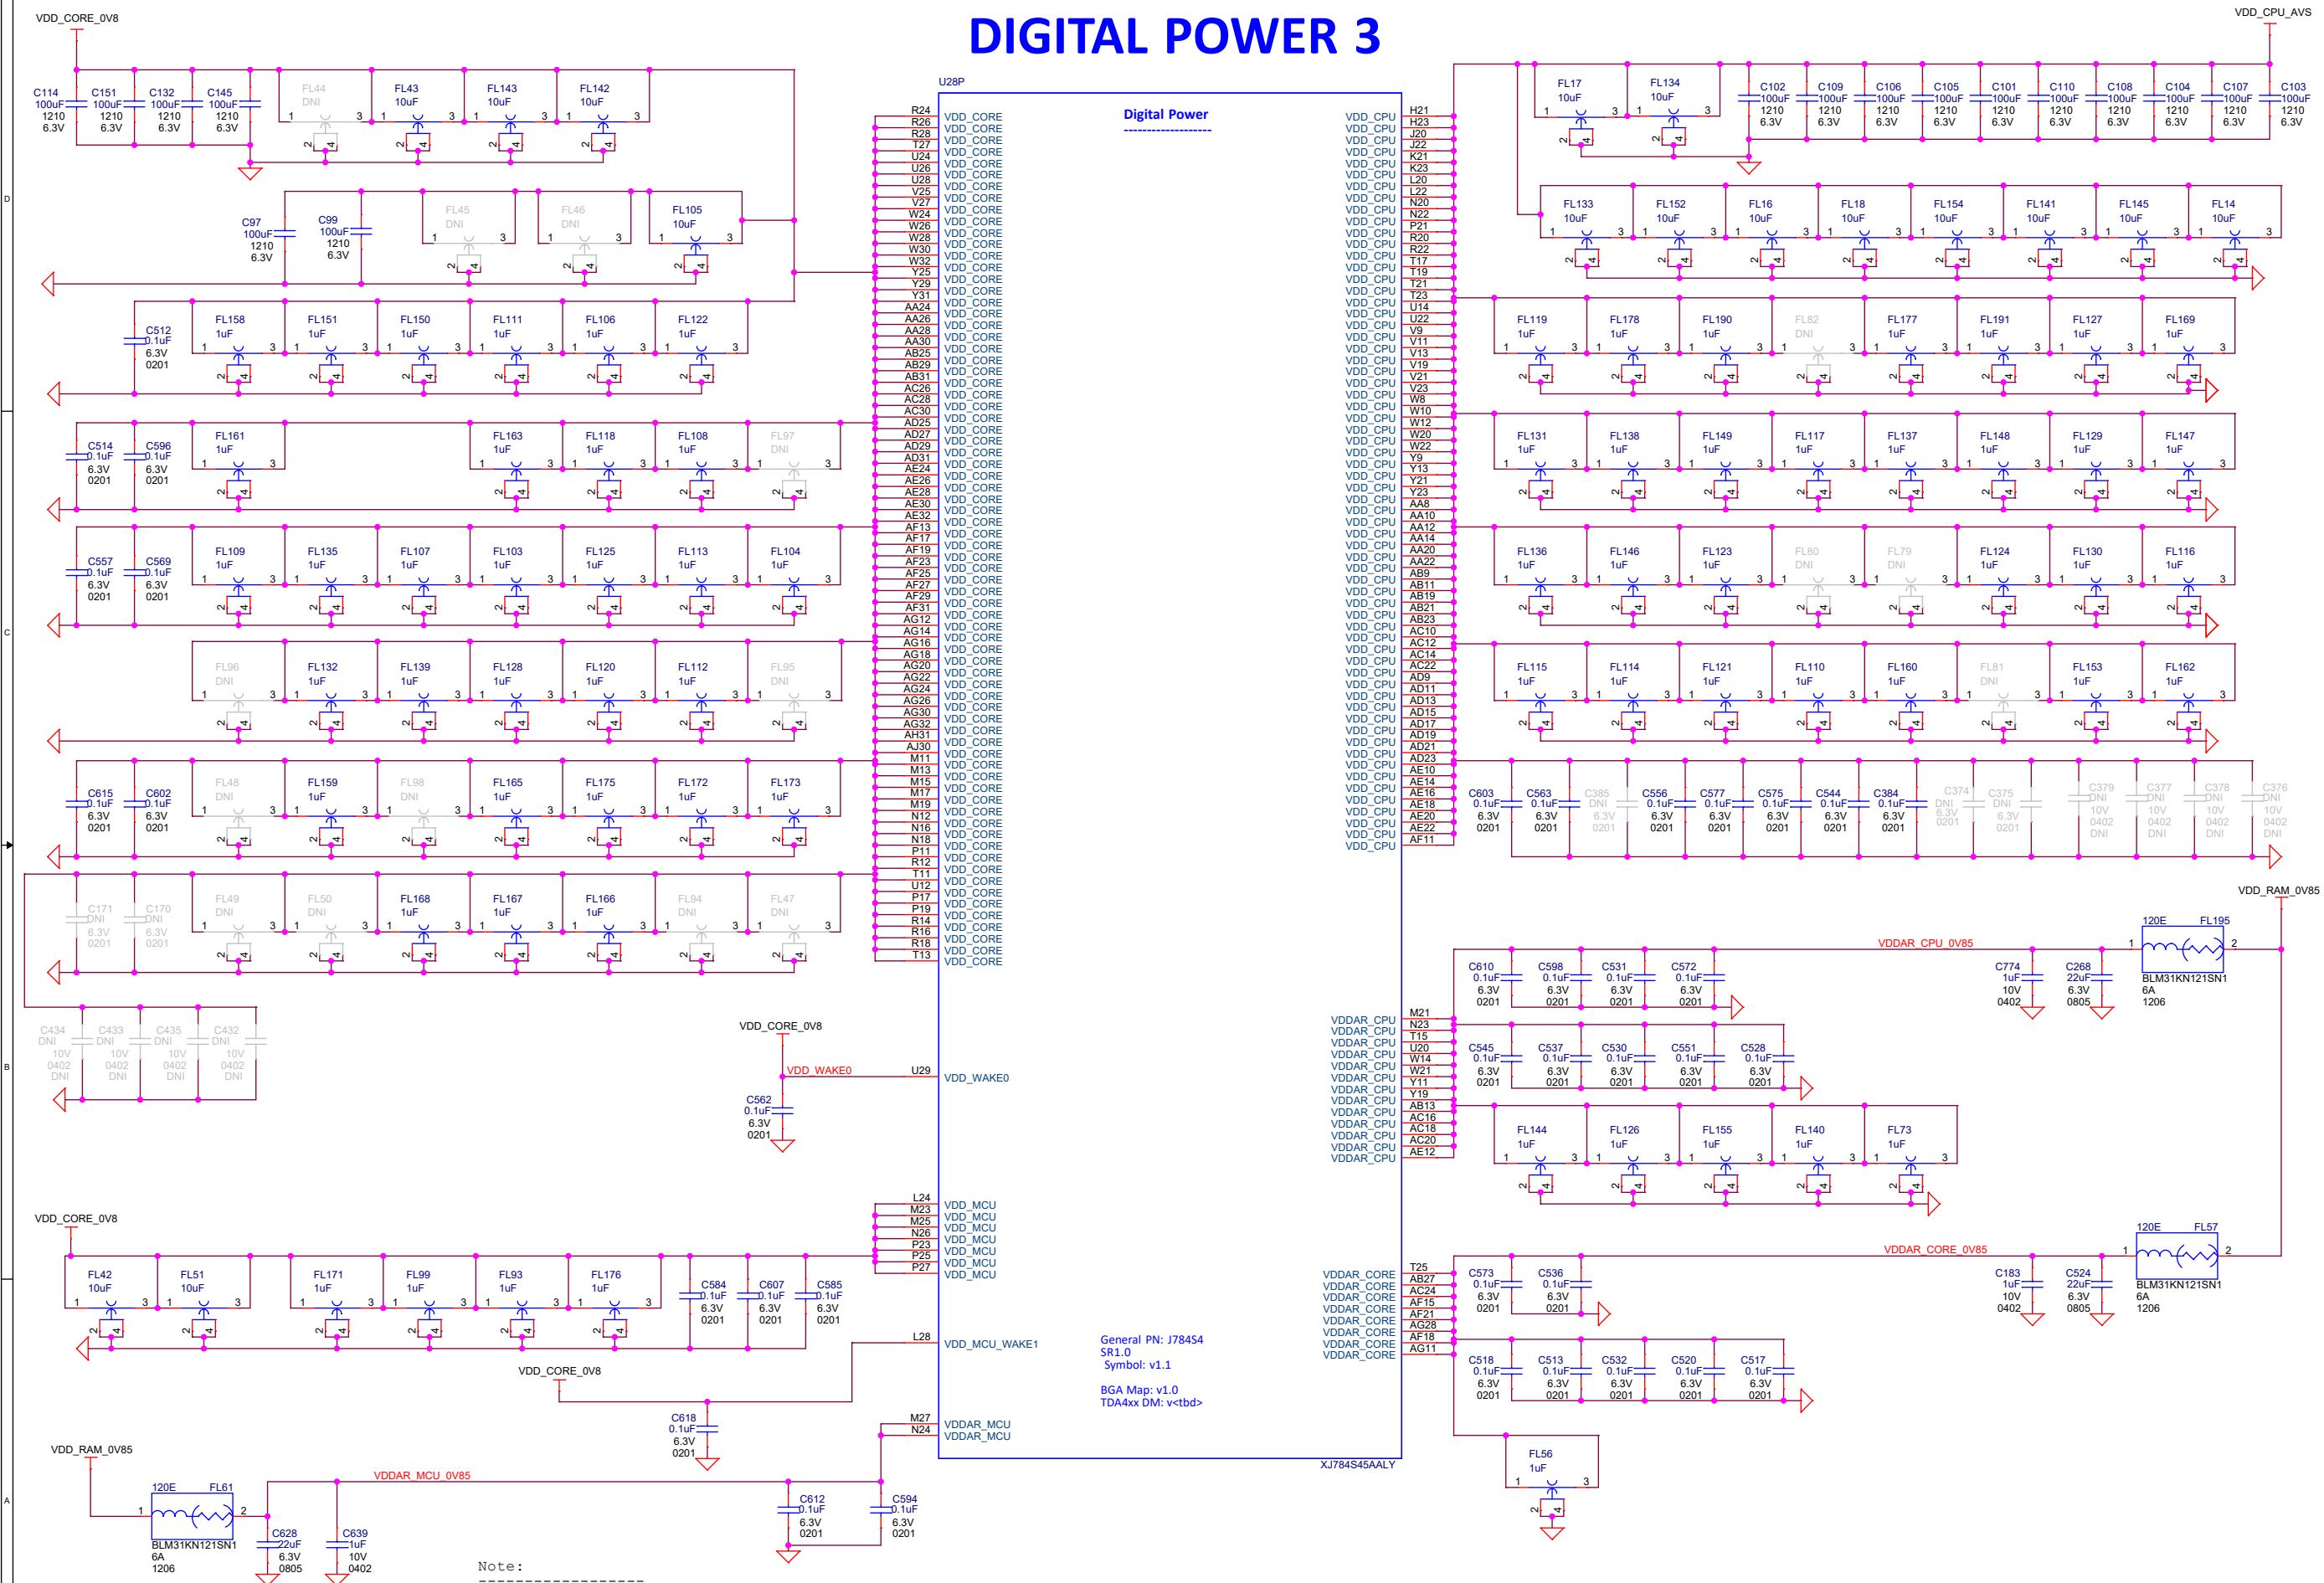


Note:
A few Dcaps shown here have been provisioned on PCB layout underneath SoC at individual power ball vias & around perimeter in case additional high-freq decoupling might be needed.


Some Dcaps may be shown as "Do Not Install" (DNI) components if Power Integrity (PI) simulation results for a particular power rail on this SK PCB design combined with Dcap scheme (value, pkg type, ESL, Loop-Inductance, etc.) results in an impedance response below or equal to the desired target impedance (Zt).

Project : AM69 Edge AI Kit		Title SOC - DIGITAL POWER 3	
Size C	PROC154E2B 001 SK AM69		Rev E2B
	Date: Thursday, March 16, 2023		Sheet 24 of 62


SOC GROUND

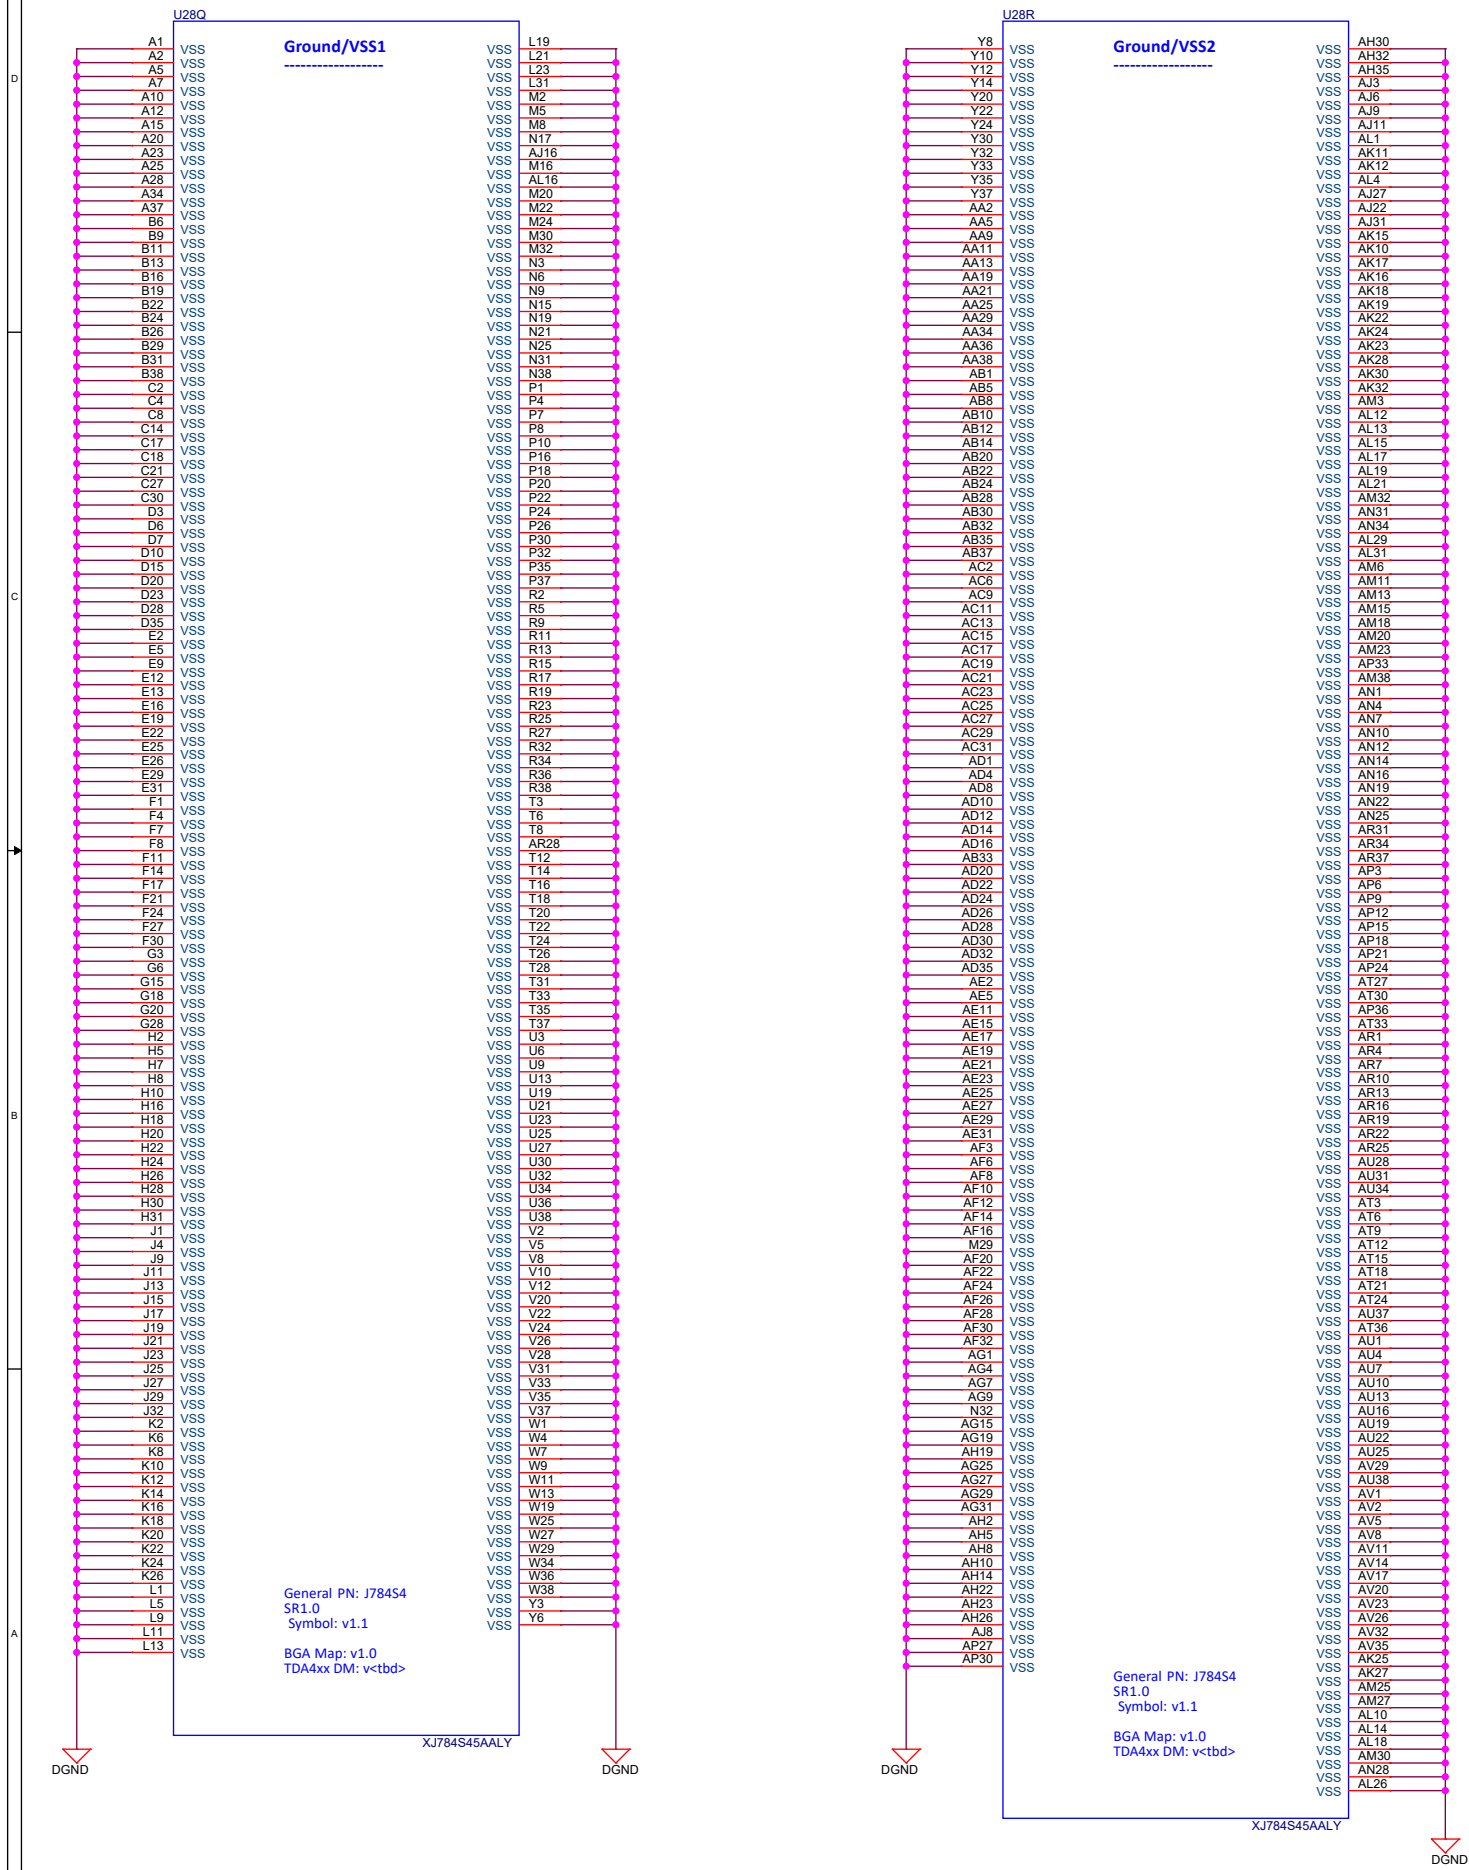


SoC Supply Noise Kelvin Sensing

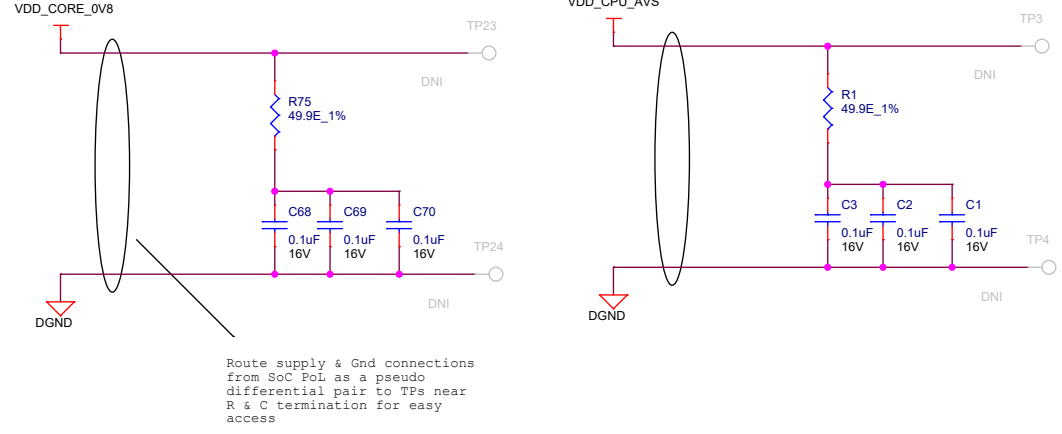

RESET BUTTONS

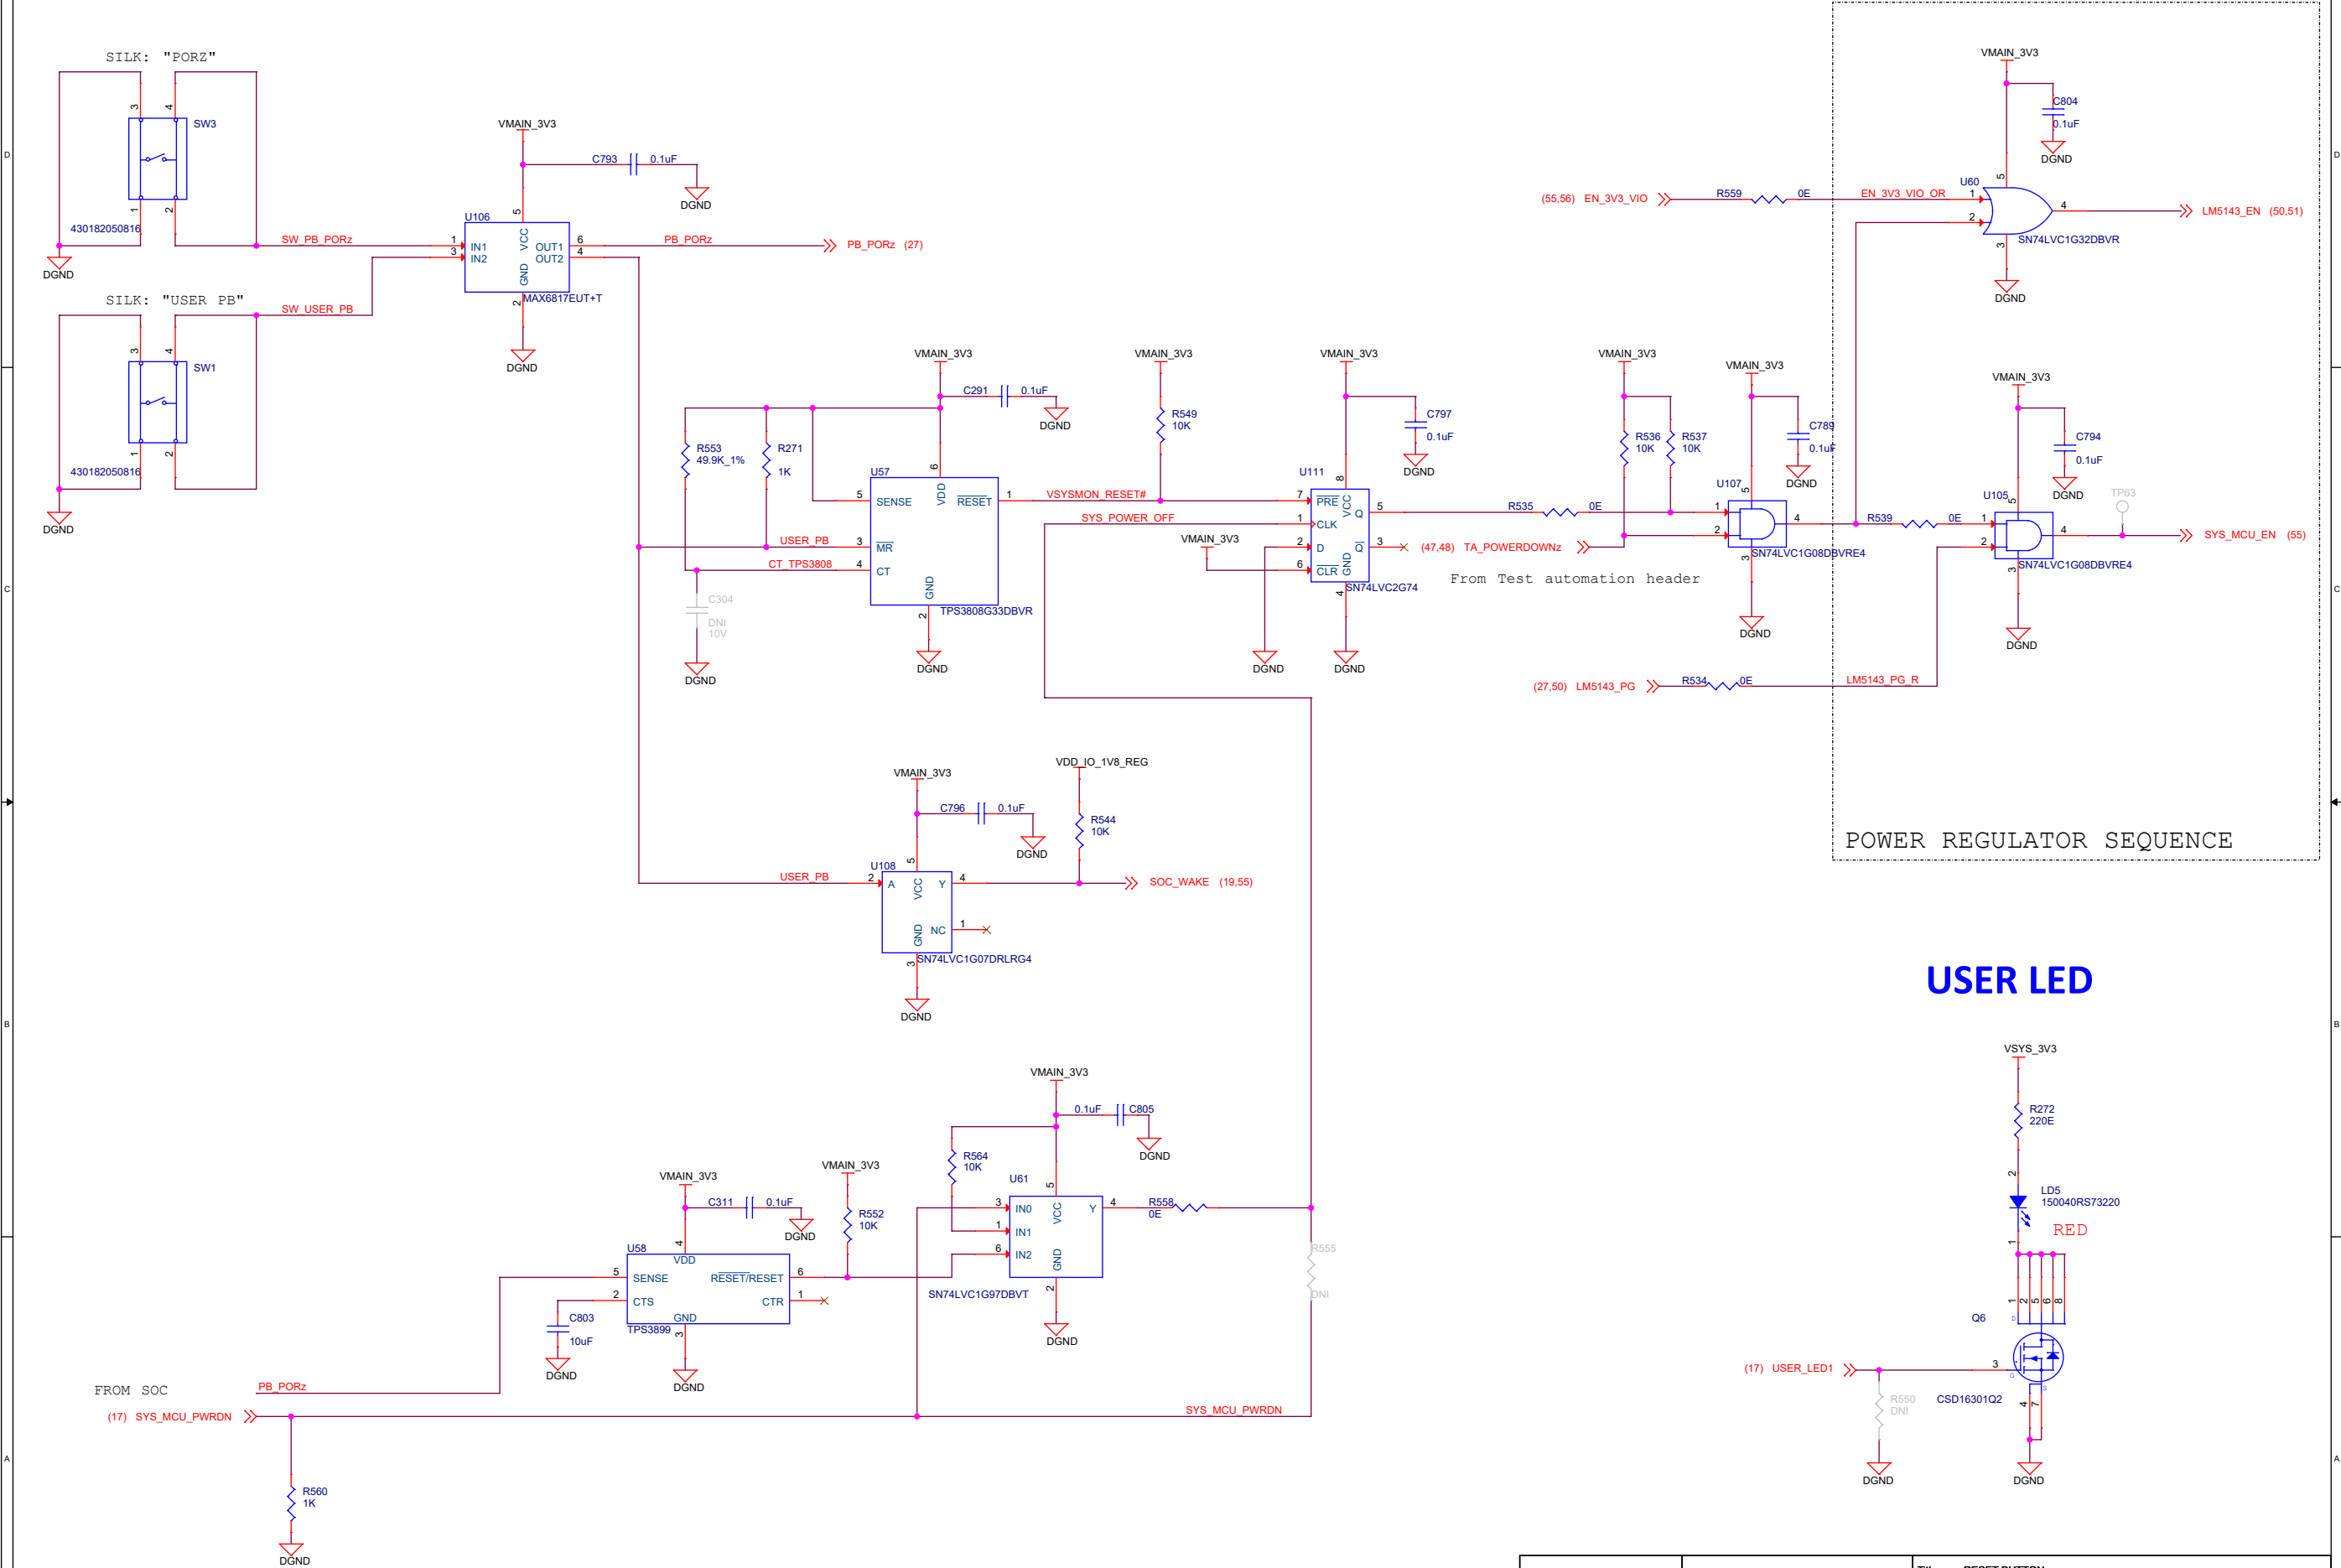




USER LED

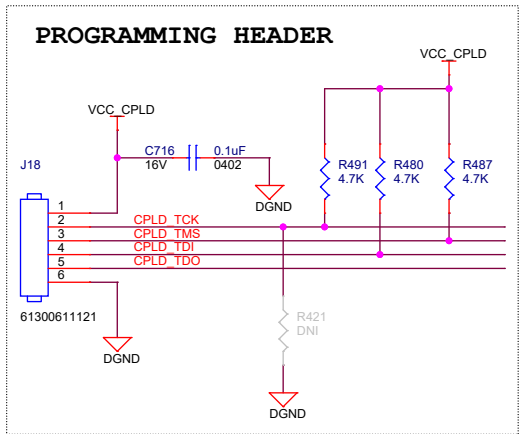

Silk Screen "CPLD JTAG"

Default termination on IOs is Pull down,
when the CPLD is not programmed.


CPLD

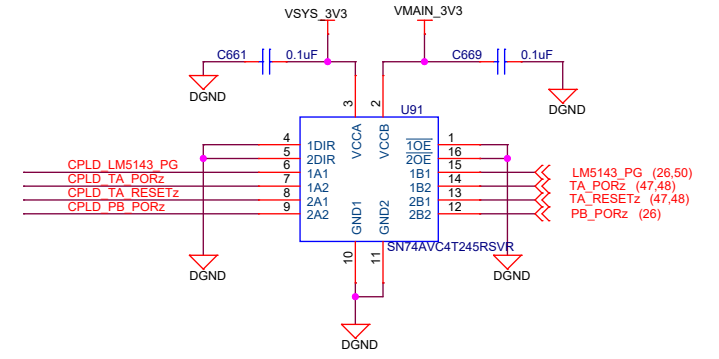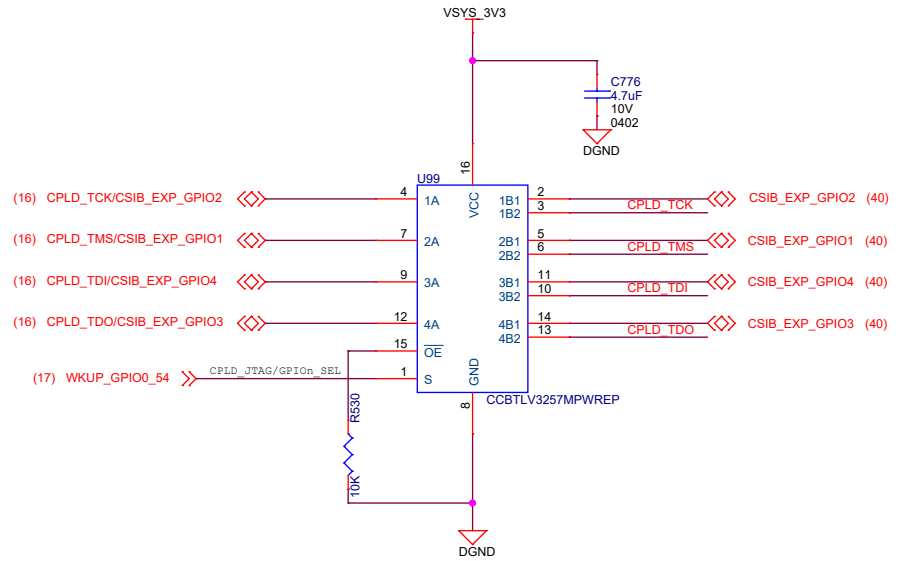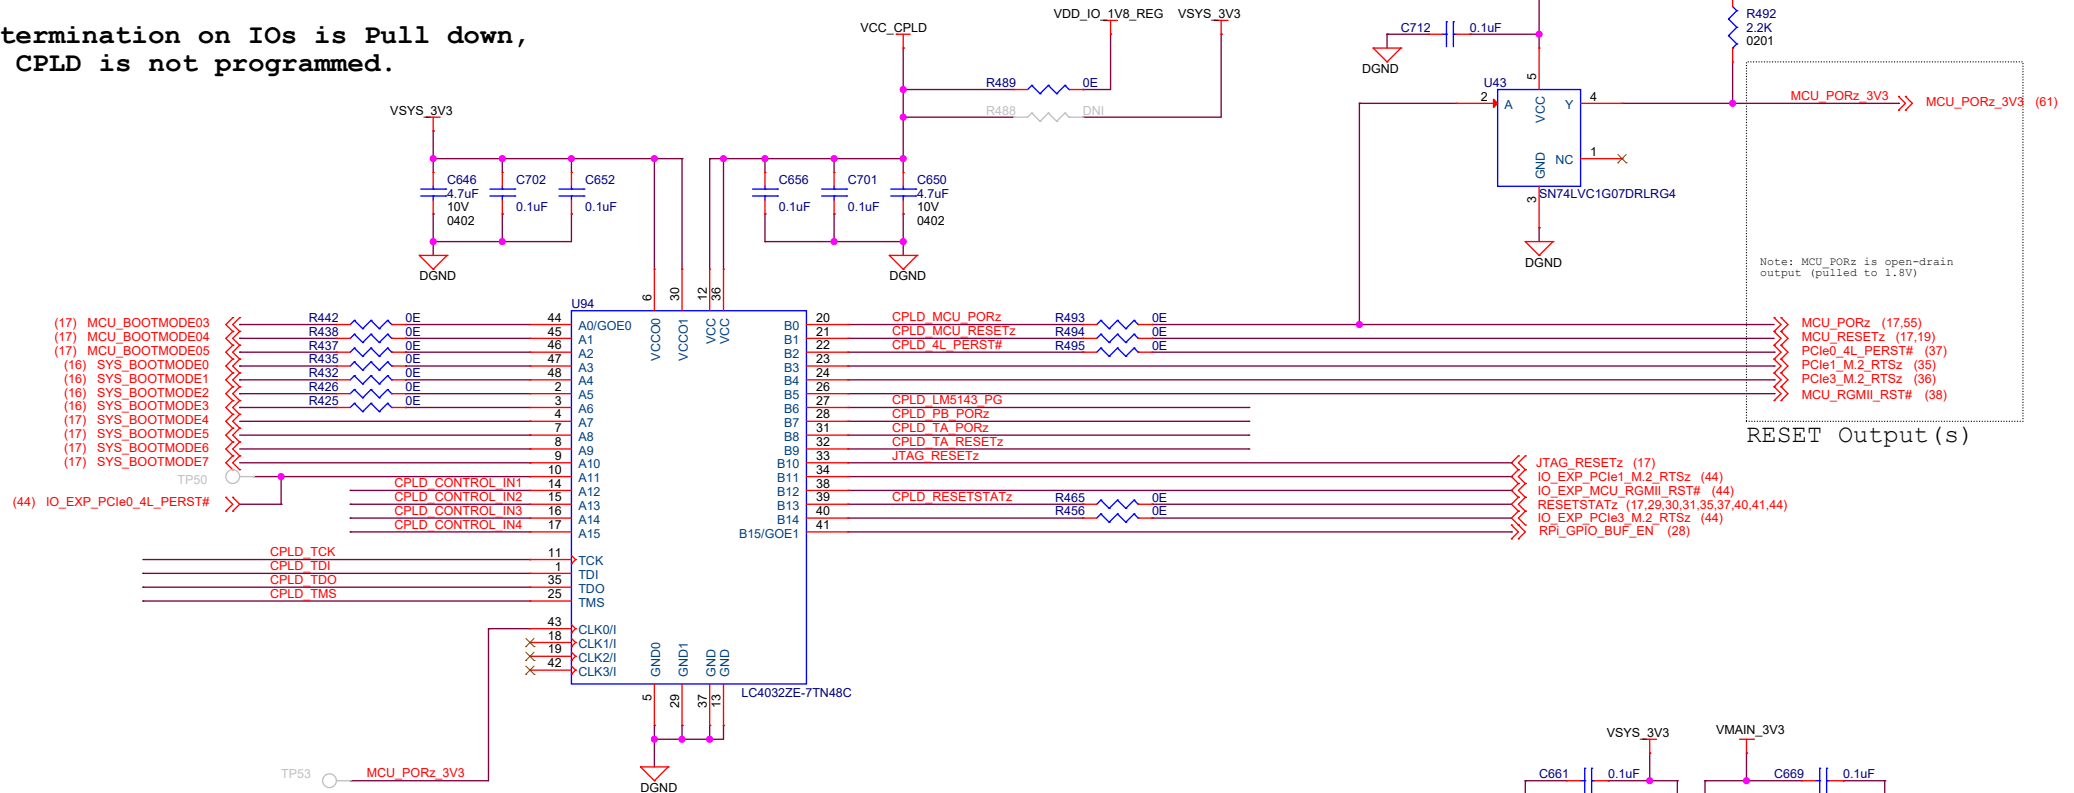


Test Automation BOOTMODE Logic

Note: Test Automation logic to set desired BOOTMODE.


Bootmode Table			
SW2.3	SW2.2	SW2.1	BOOTMODE
0	0	0	SD
0	0	1	NO Boot
0	1	0	USB - 0 (DFU)
0	1	1	USB - 1 (DFU)
1	0	0	xSPI - 1S
1	0	1	UART
1	1	0	PCIe
1	1	1	xSPI SFDP

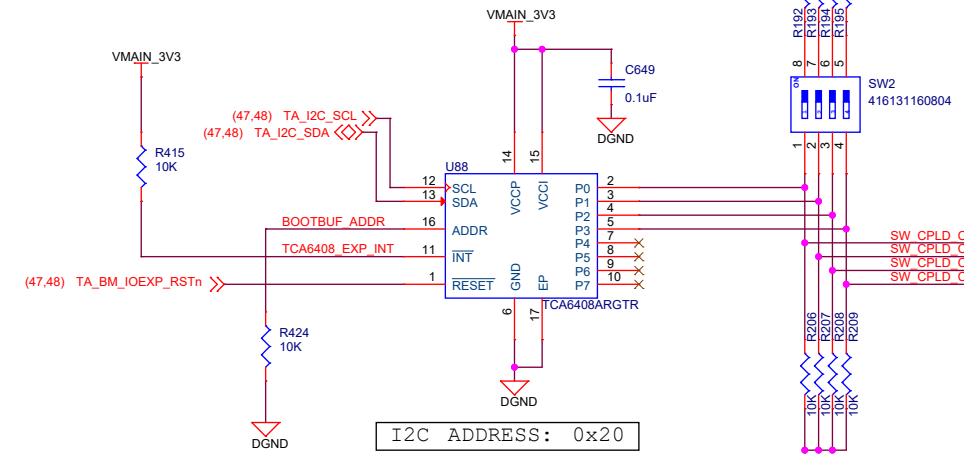


DIR LOW: 1B --> 1A
2B --> 2A

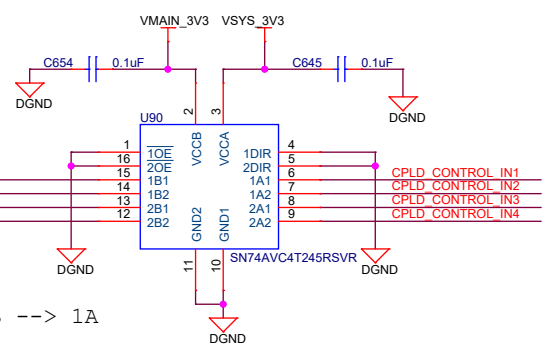

BOARD ID EEPROM

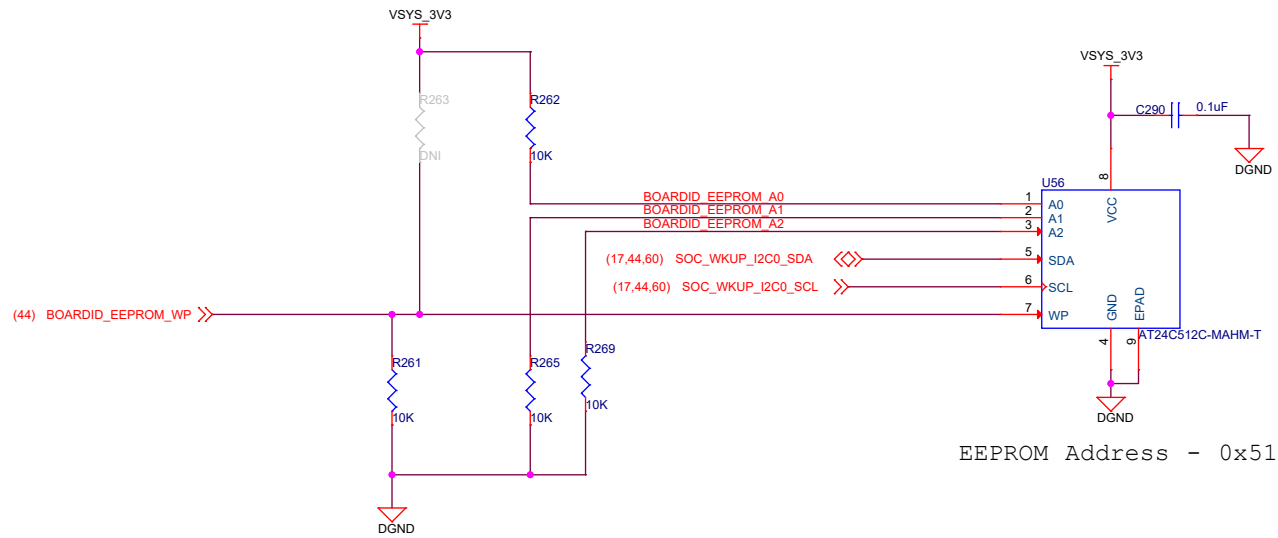


40Pin Expansion Header

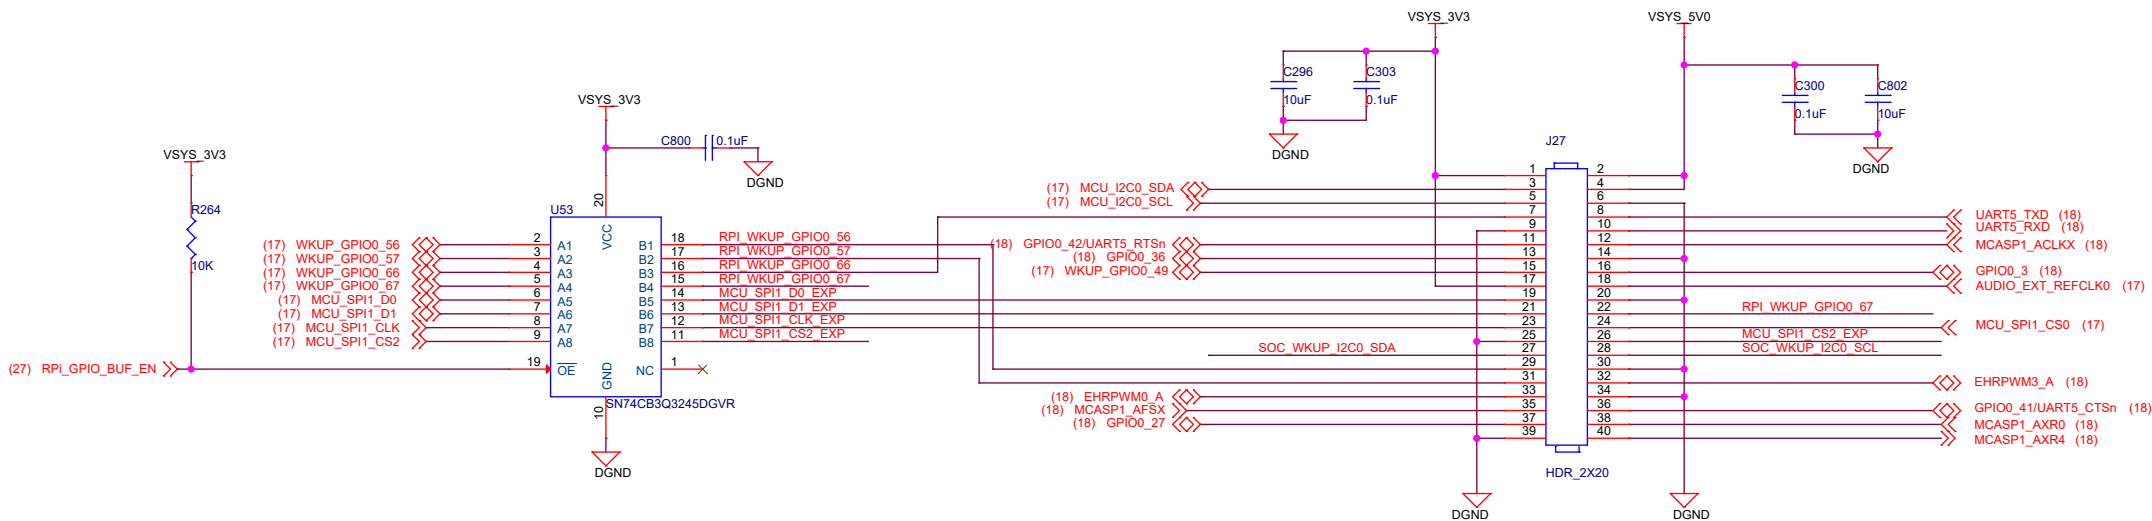


Silk Screen "40p EXP HDR"

eMMC FLASH


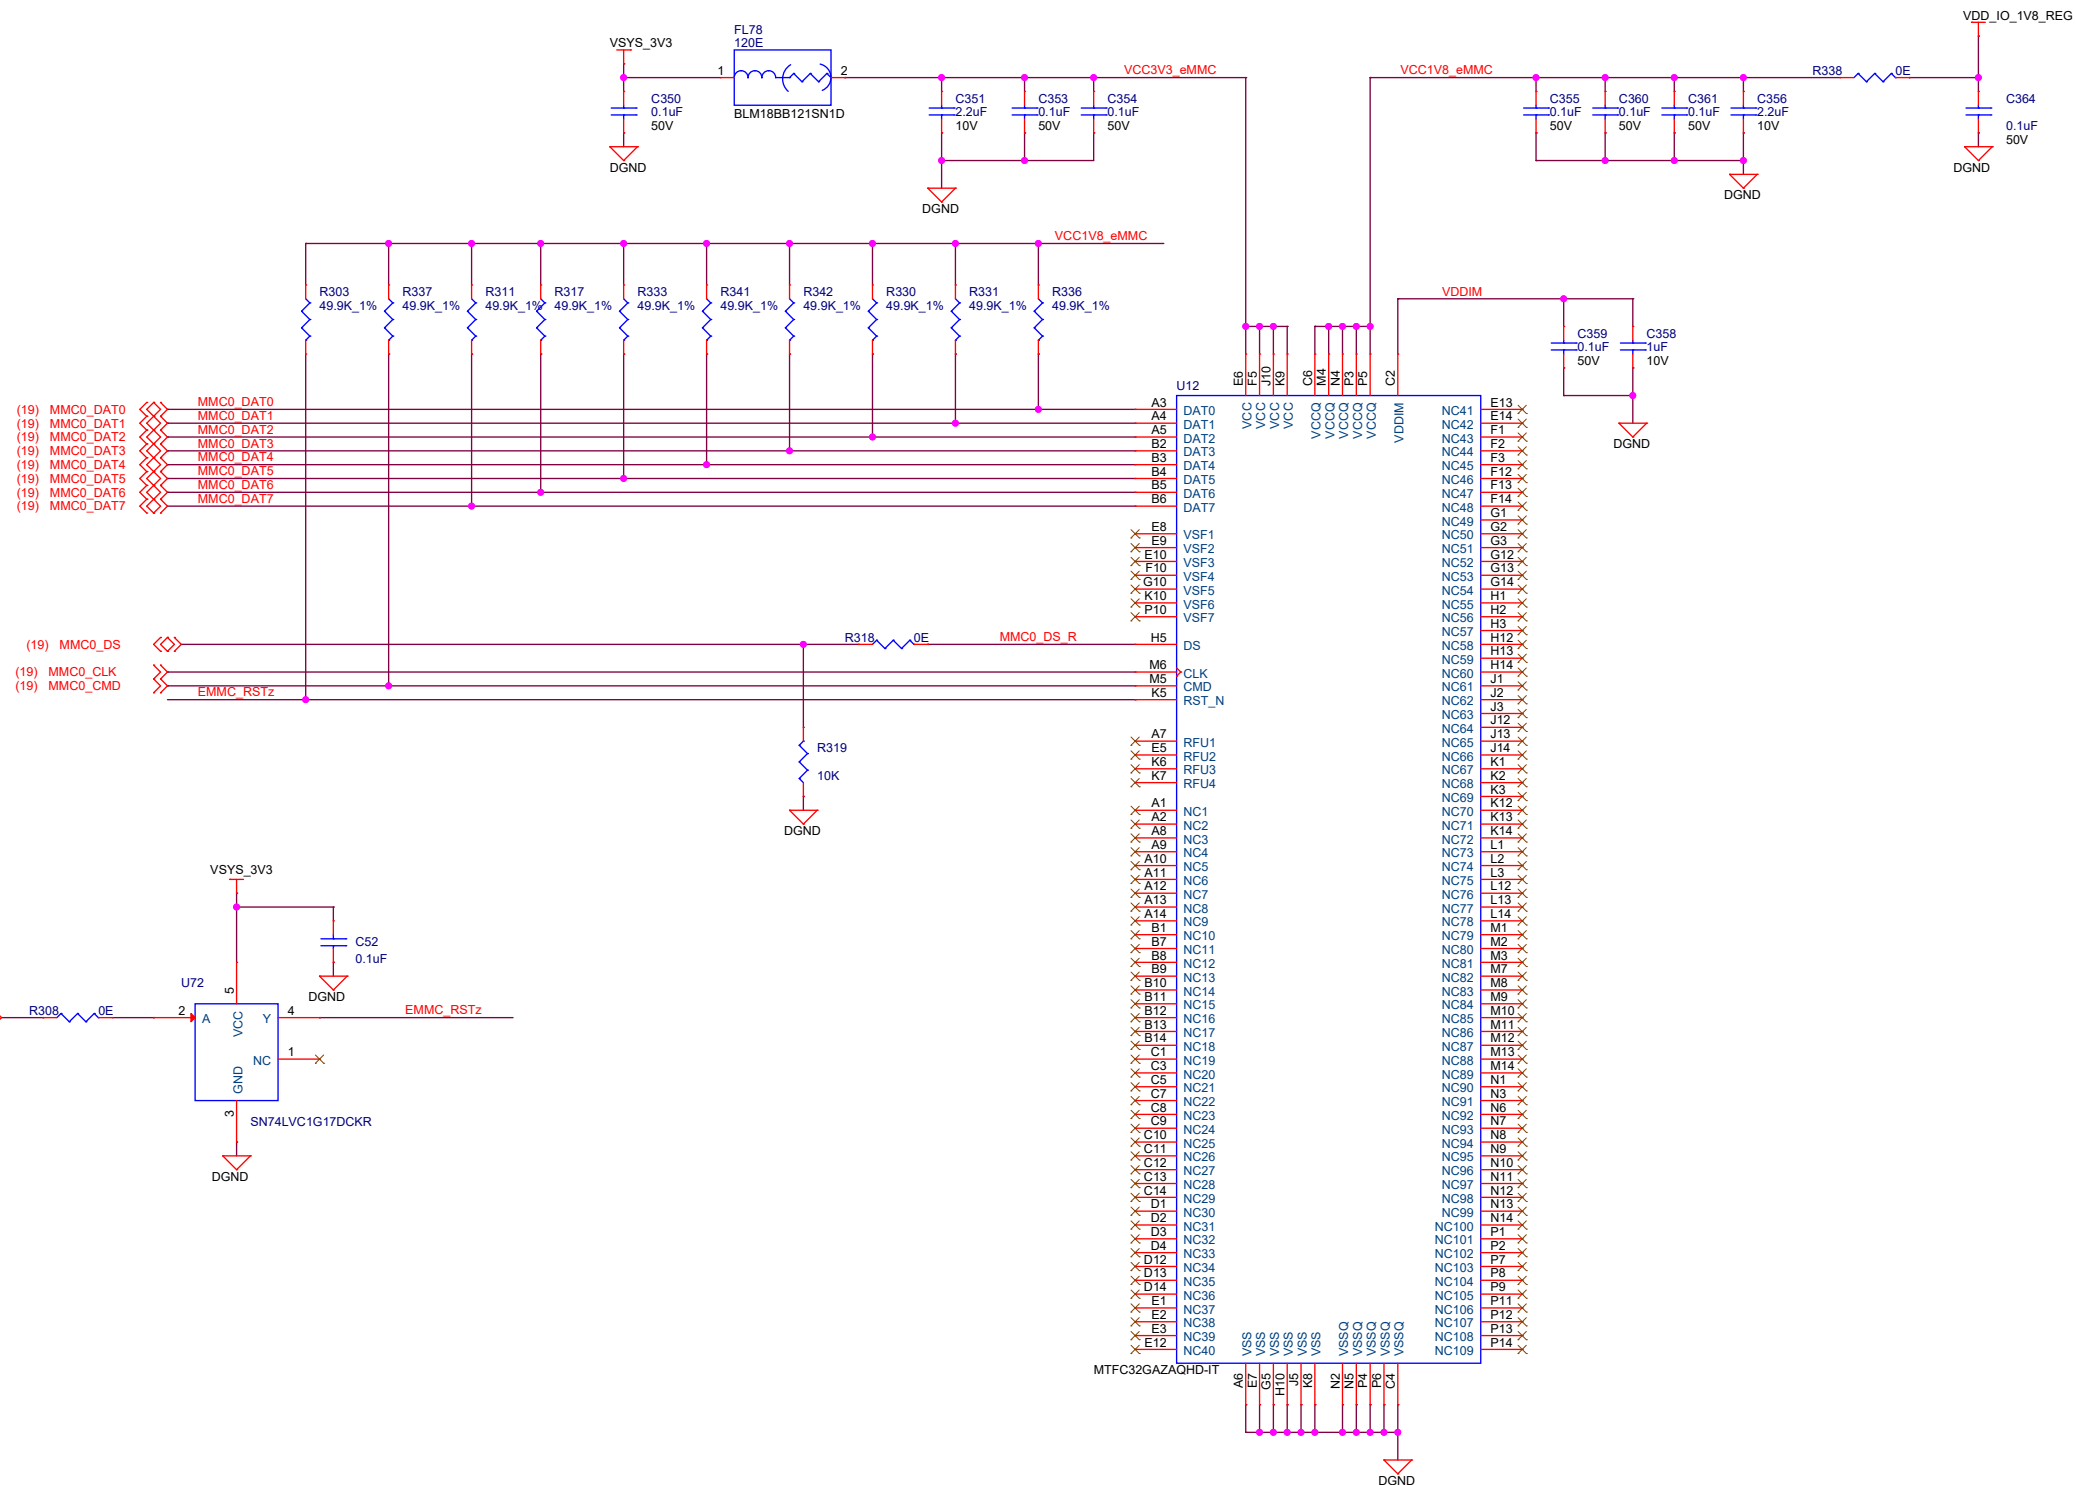


Micro SD CARD INTERFACE

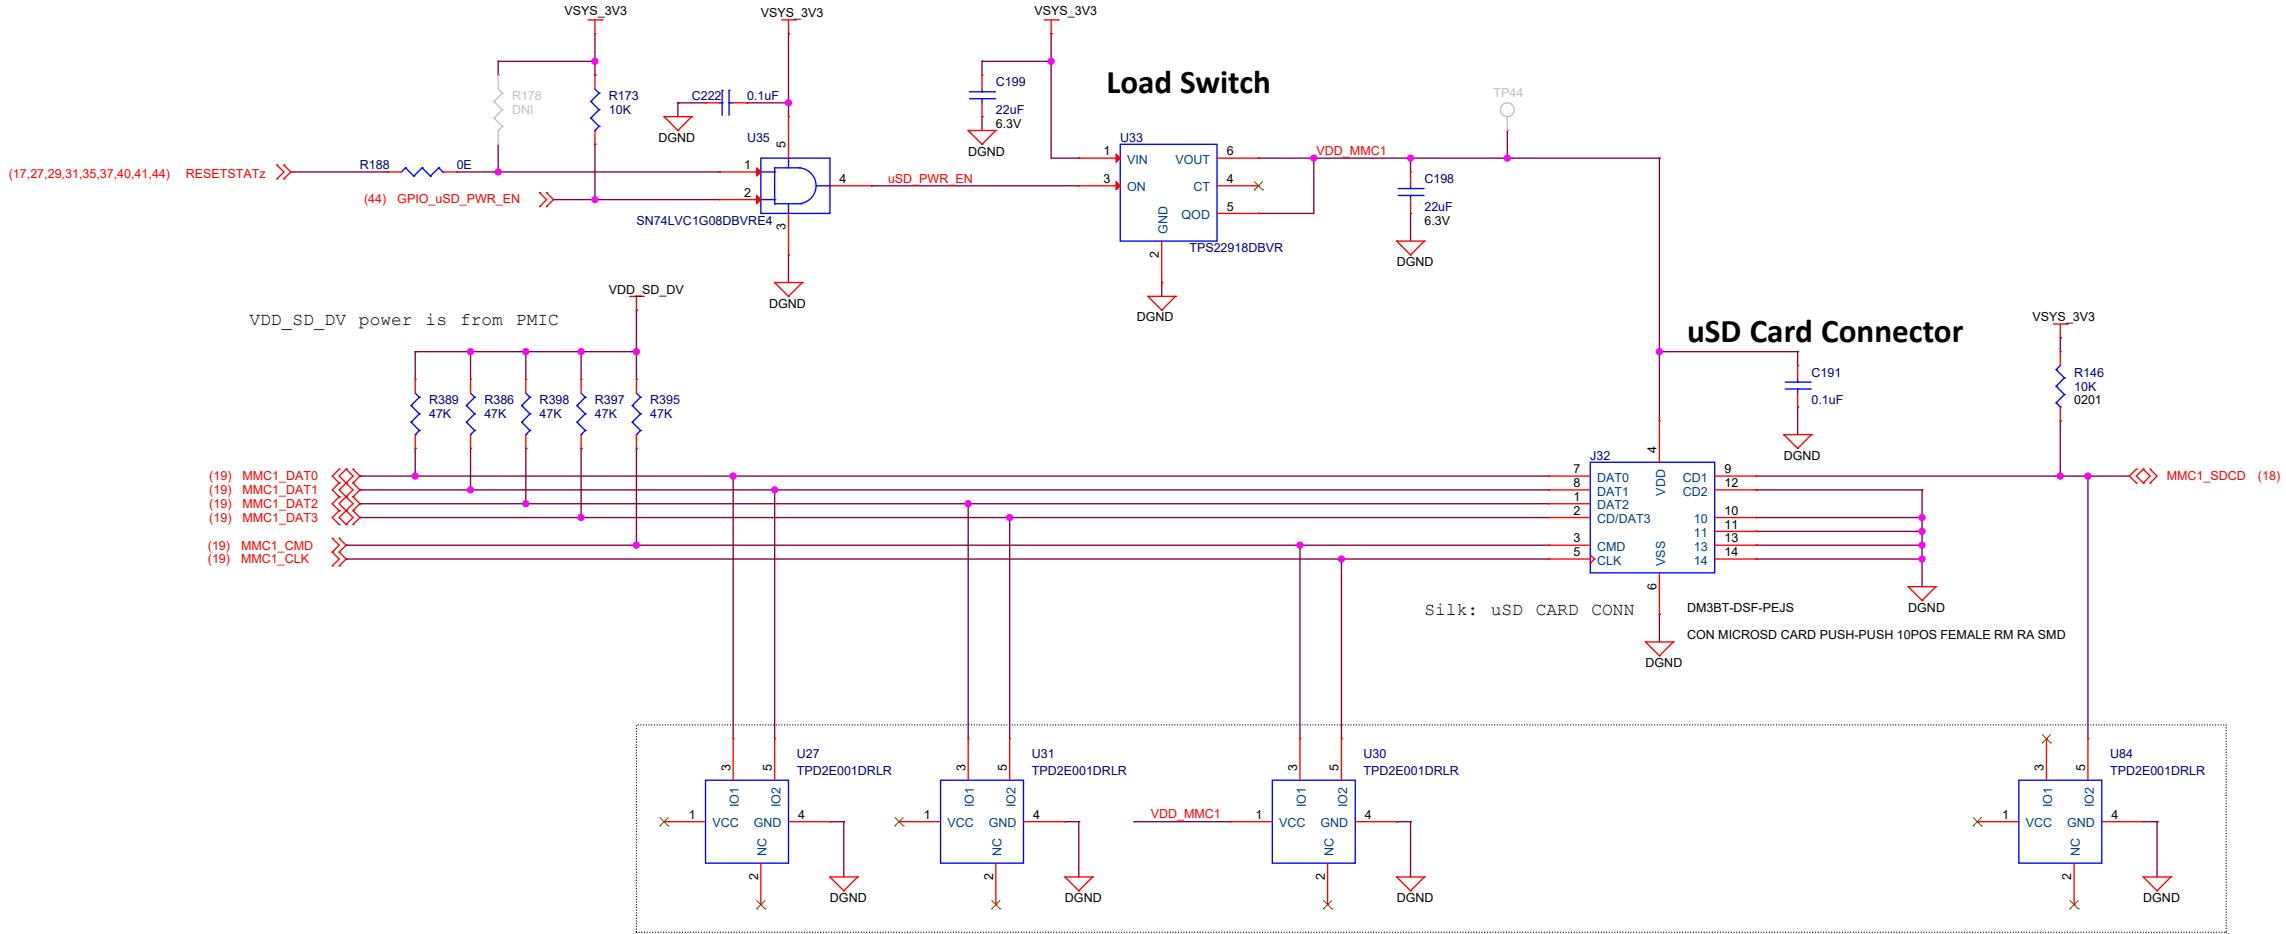

Place near SD Card Connector

USB3.0 HUB

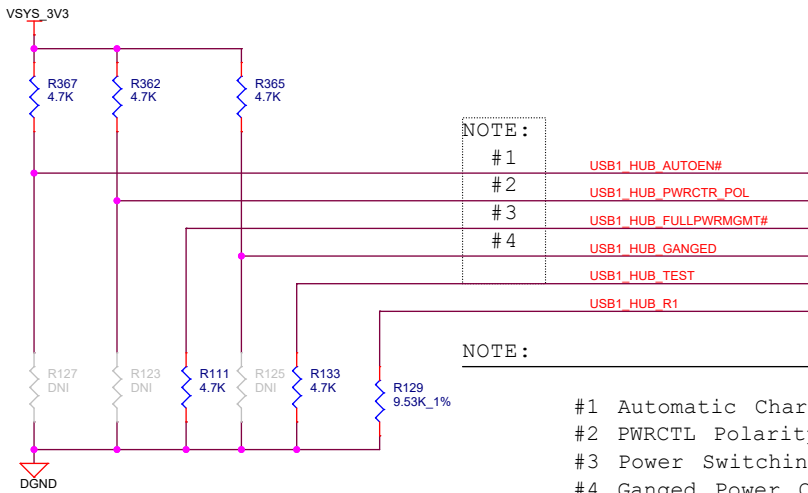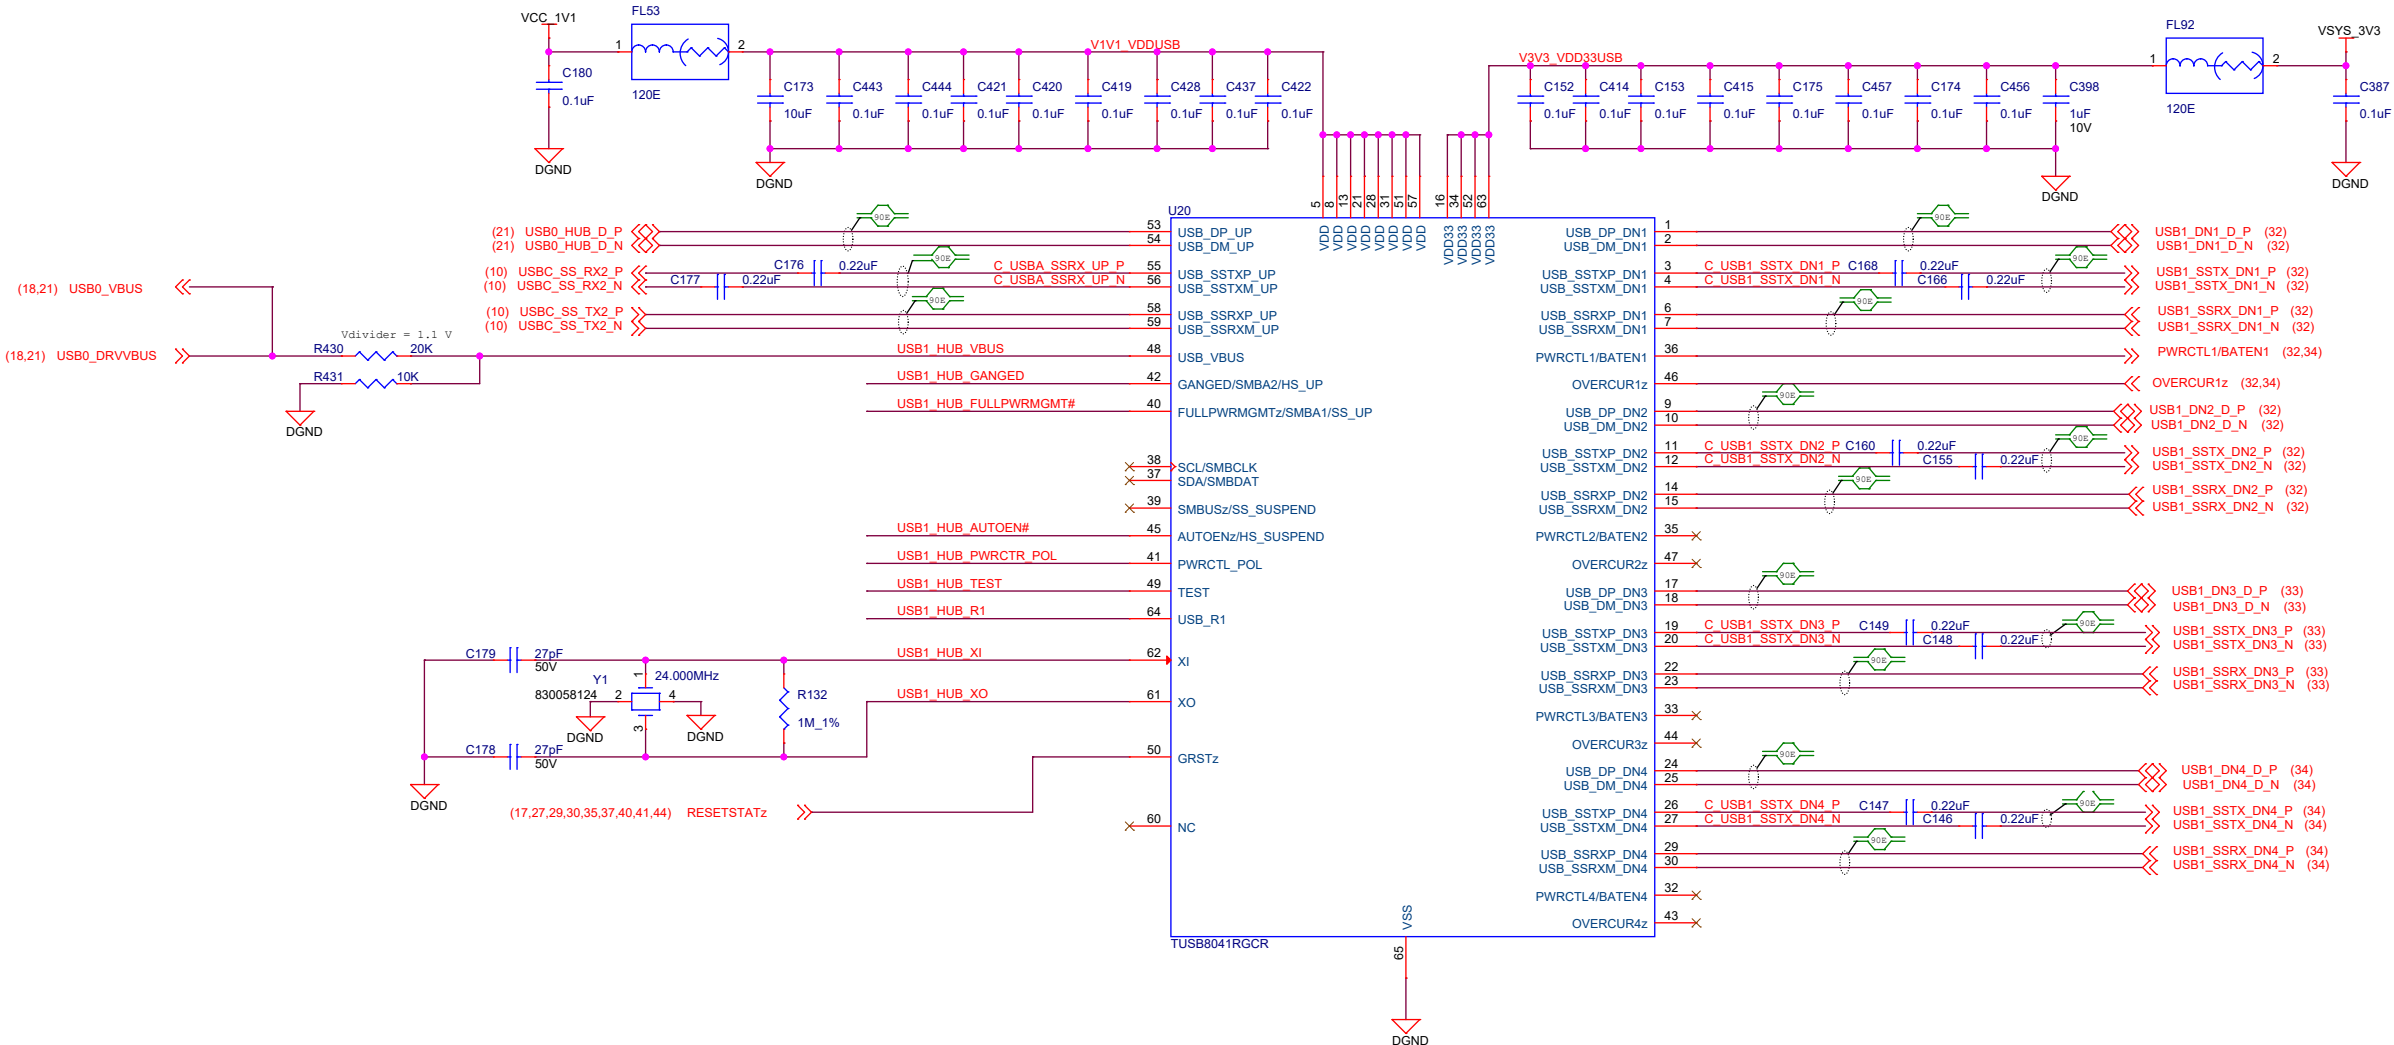

NOTE:


- | | |
|----|-----------------------|
| #1 | USB1_HUB_AUTOEN# |
| #2 | USB1_HUB_PWRCTR_POL |
| #3 | USB1_HUB_FULLPWRMGMT# |
| #4 | USB1_HUB_GANGED |
| | USB1_HUB_TEST |
| | USB1_HUB_R1 |

NOTE:


- ```
#1 Automatic Charge Mode Disabled
#2 PWRCTL Polarity is Active High
#3 Power Switching and Overcurrent Inputs Supported
#4 Ganged Power Control Enabled
```




USB 3.0 TYPE-A CONNECTORS - 1

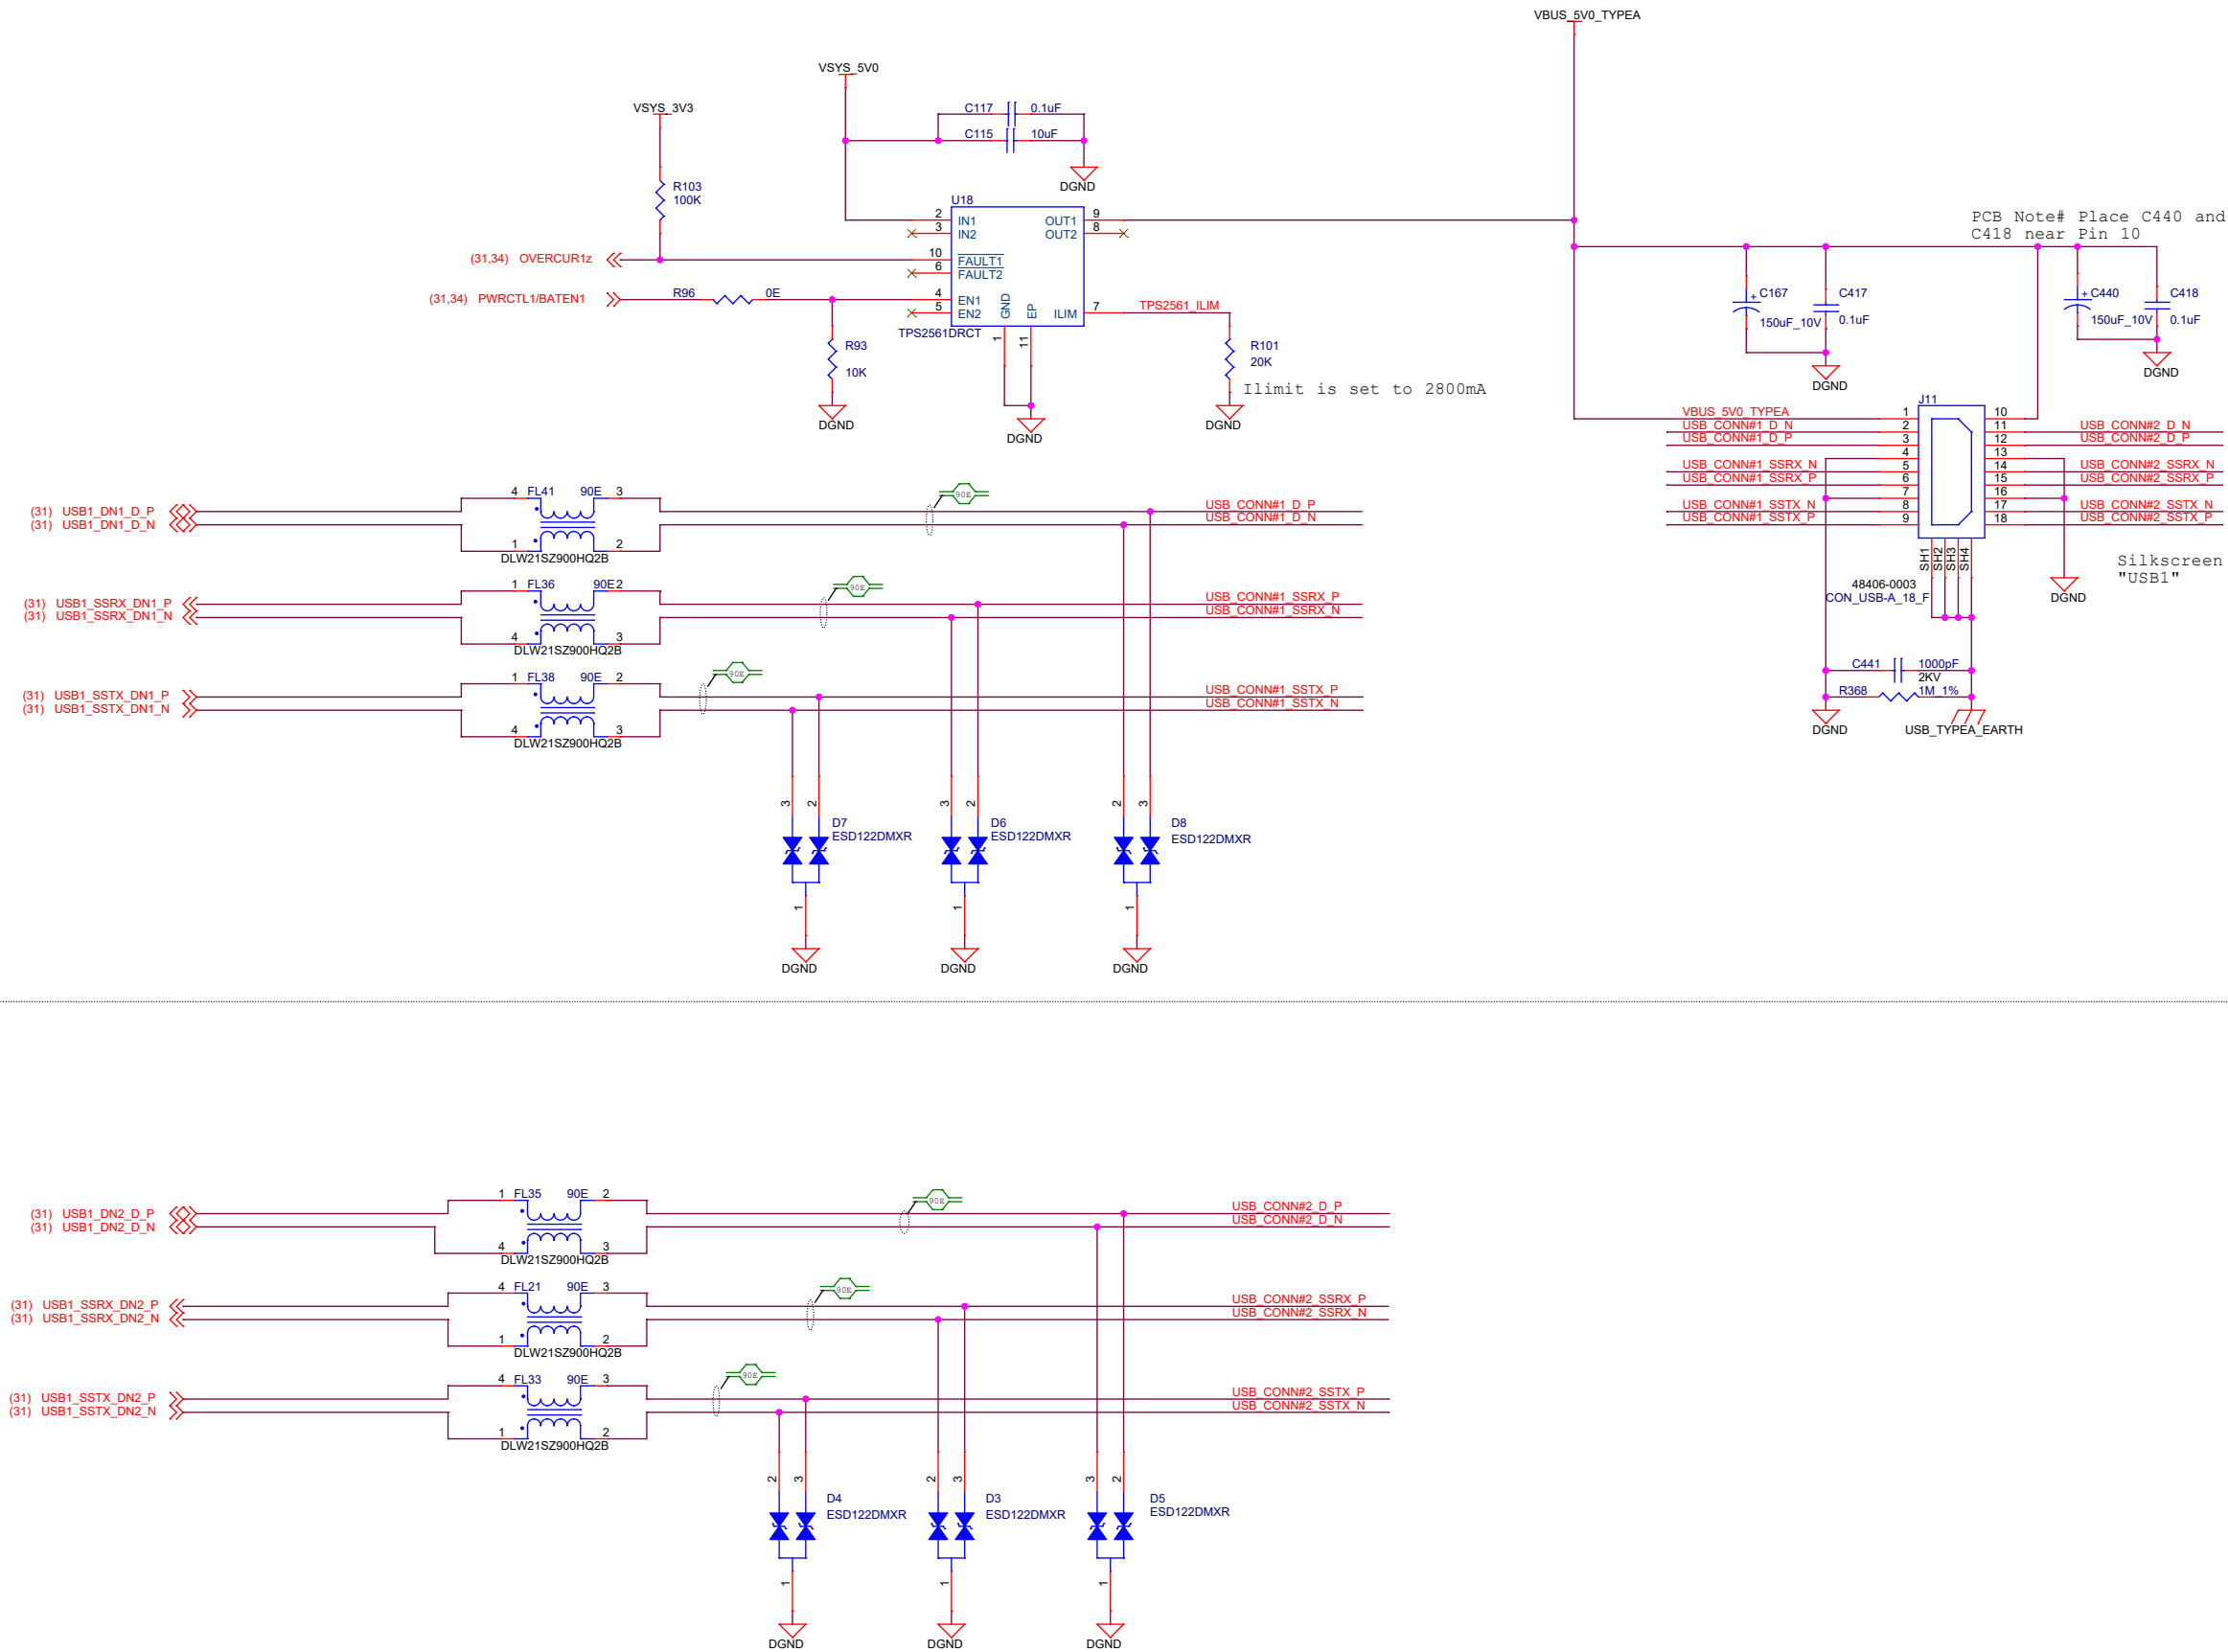



USB 3.0 TYPE-A CONNECTORS - 2

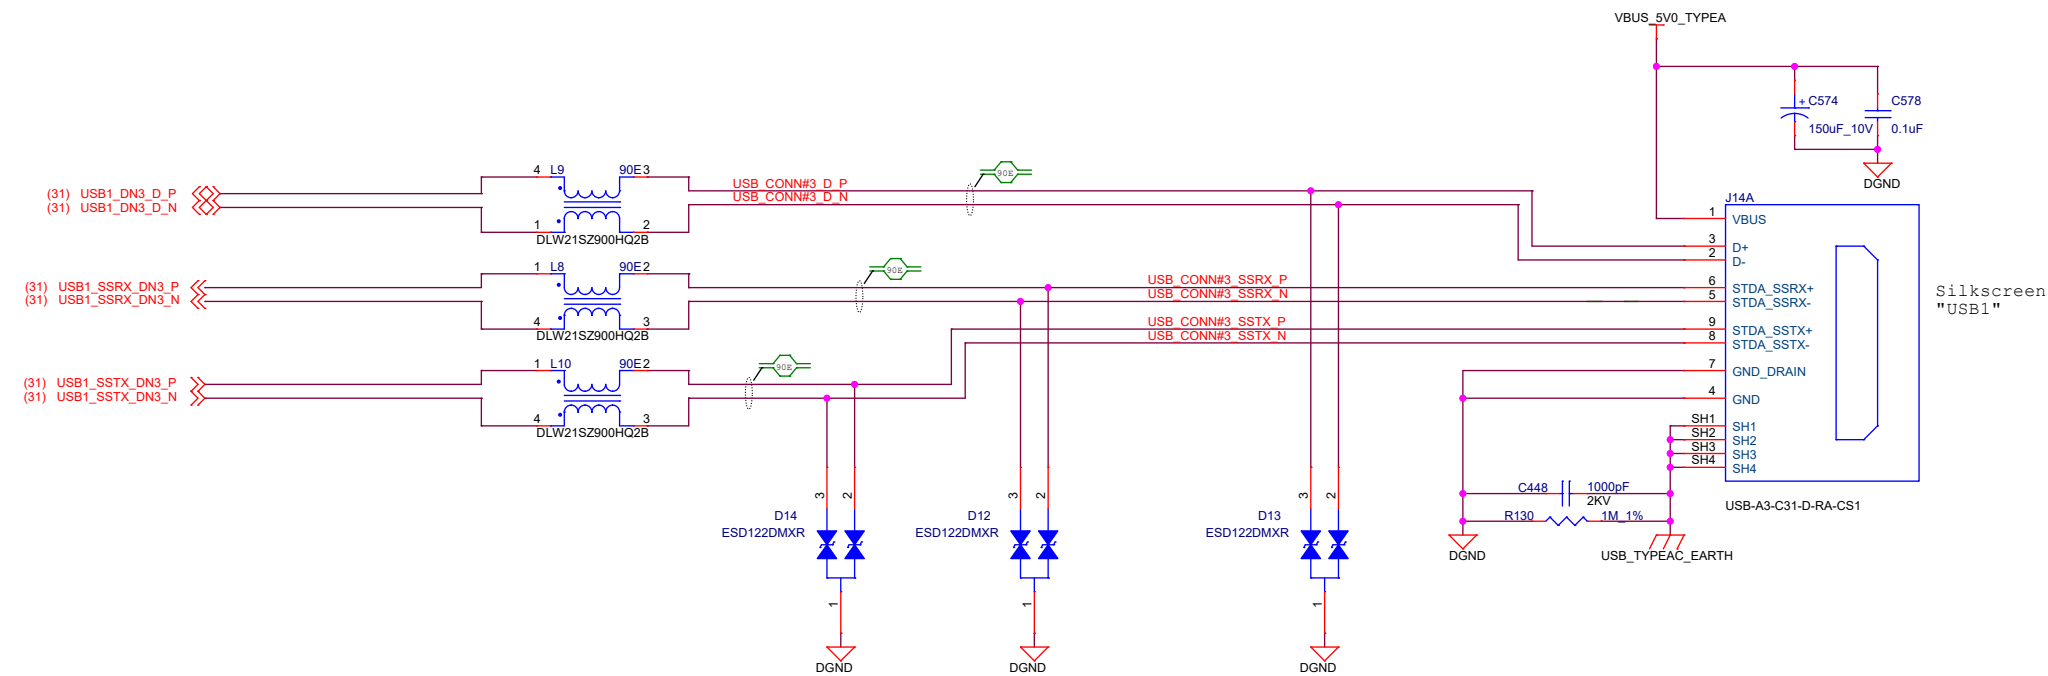

## USB 3.0 TYPE C INTERFACE

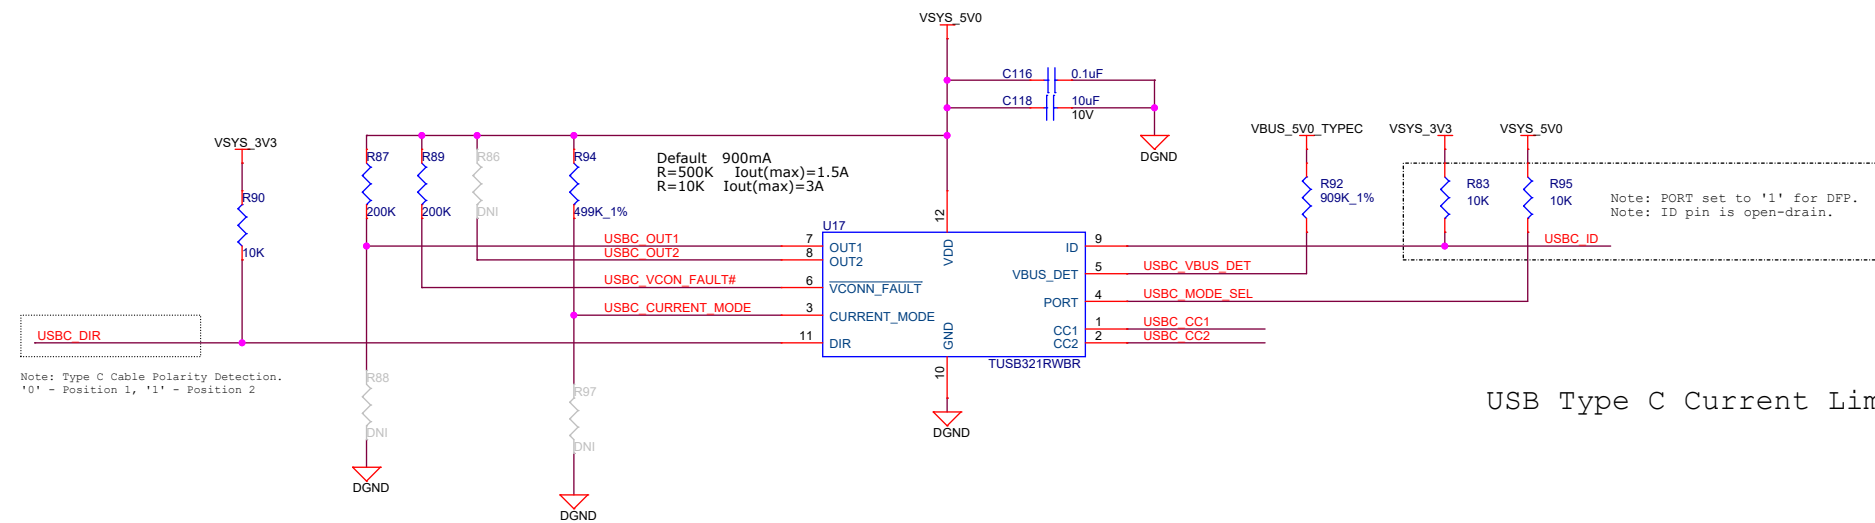


USB Type C Current Limit

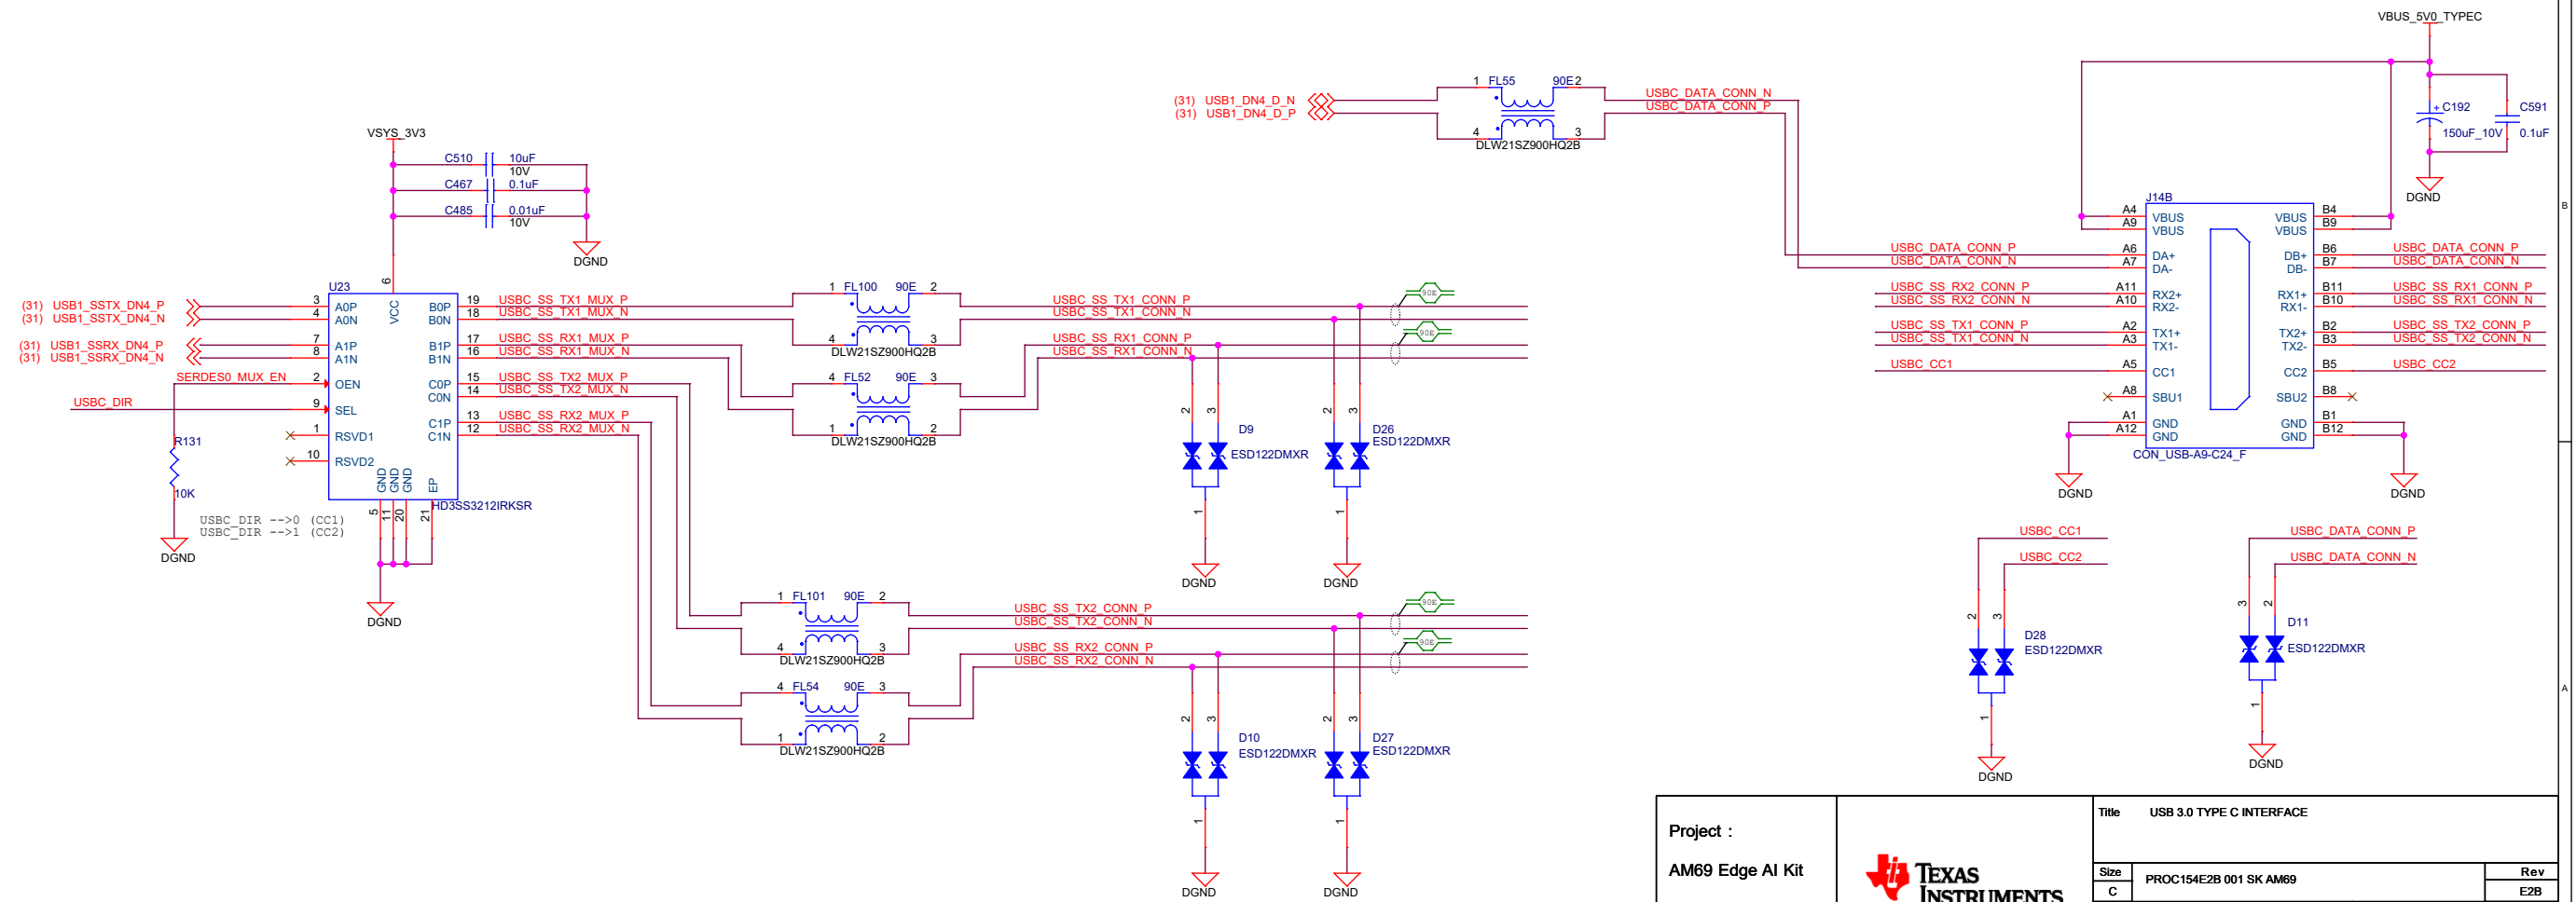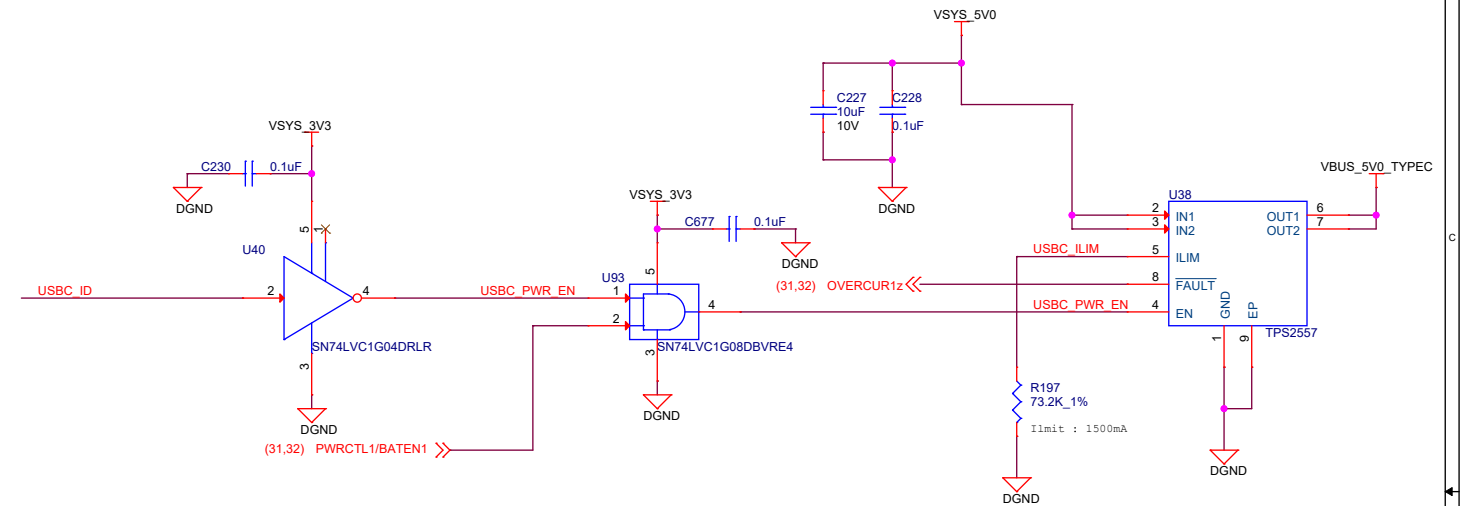


PCIE\_M.2\_INTERFACE SSD


M KEY

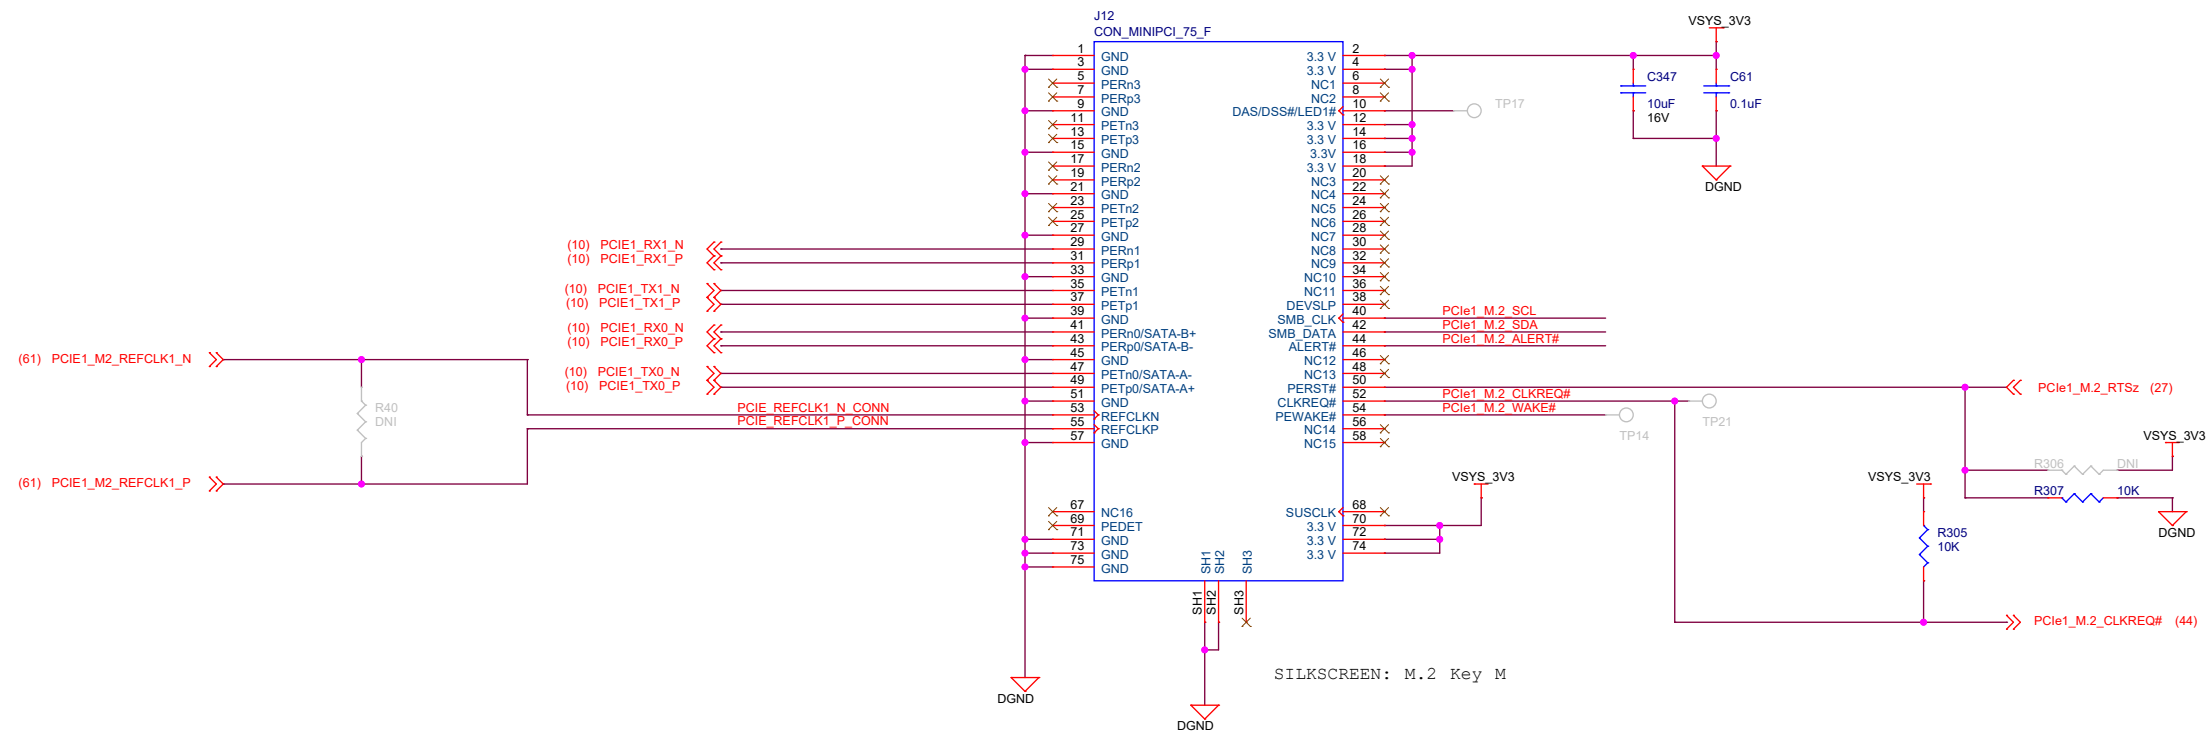

3.3V To 1V8 Level translator

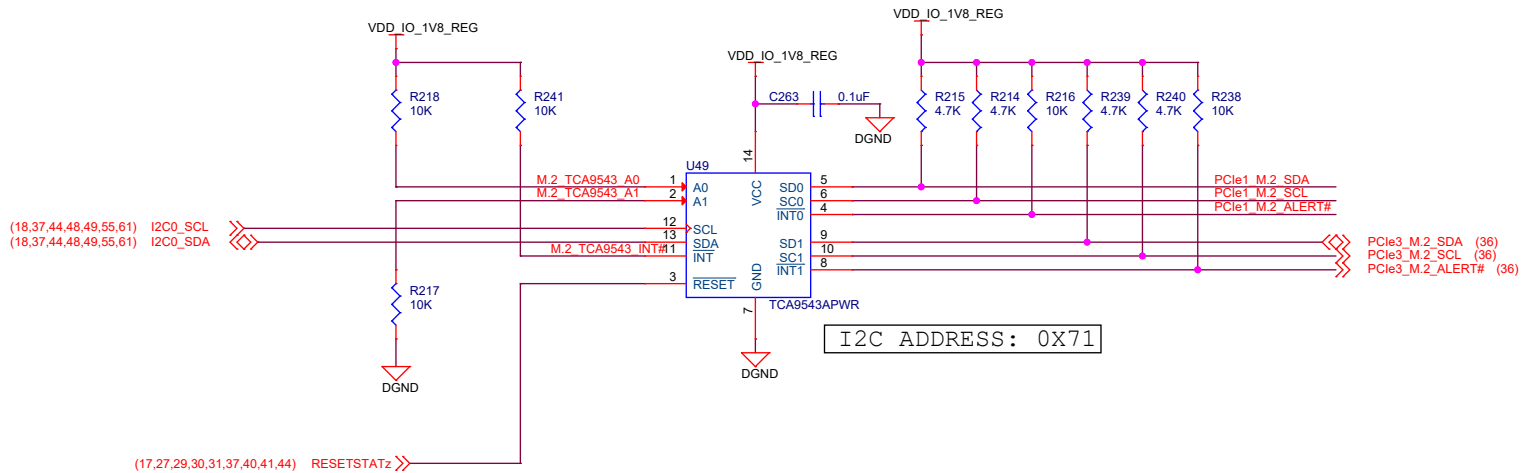




## PCIe\_M.2\_INTERFACE - SDIO

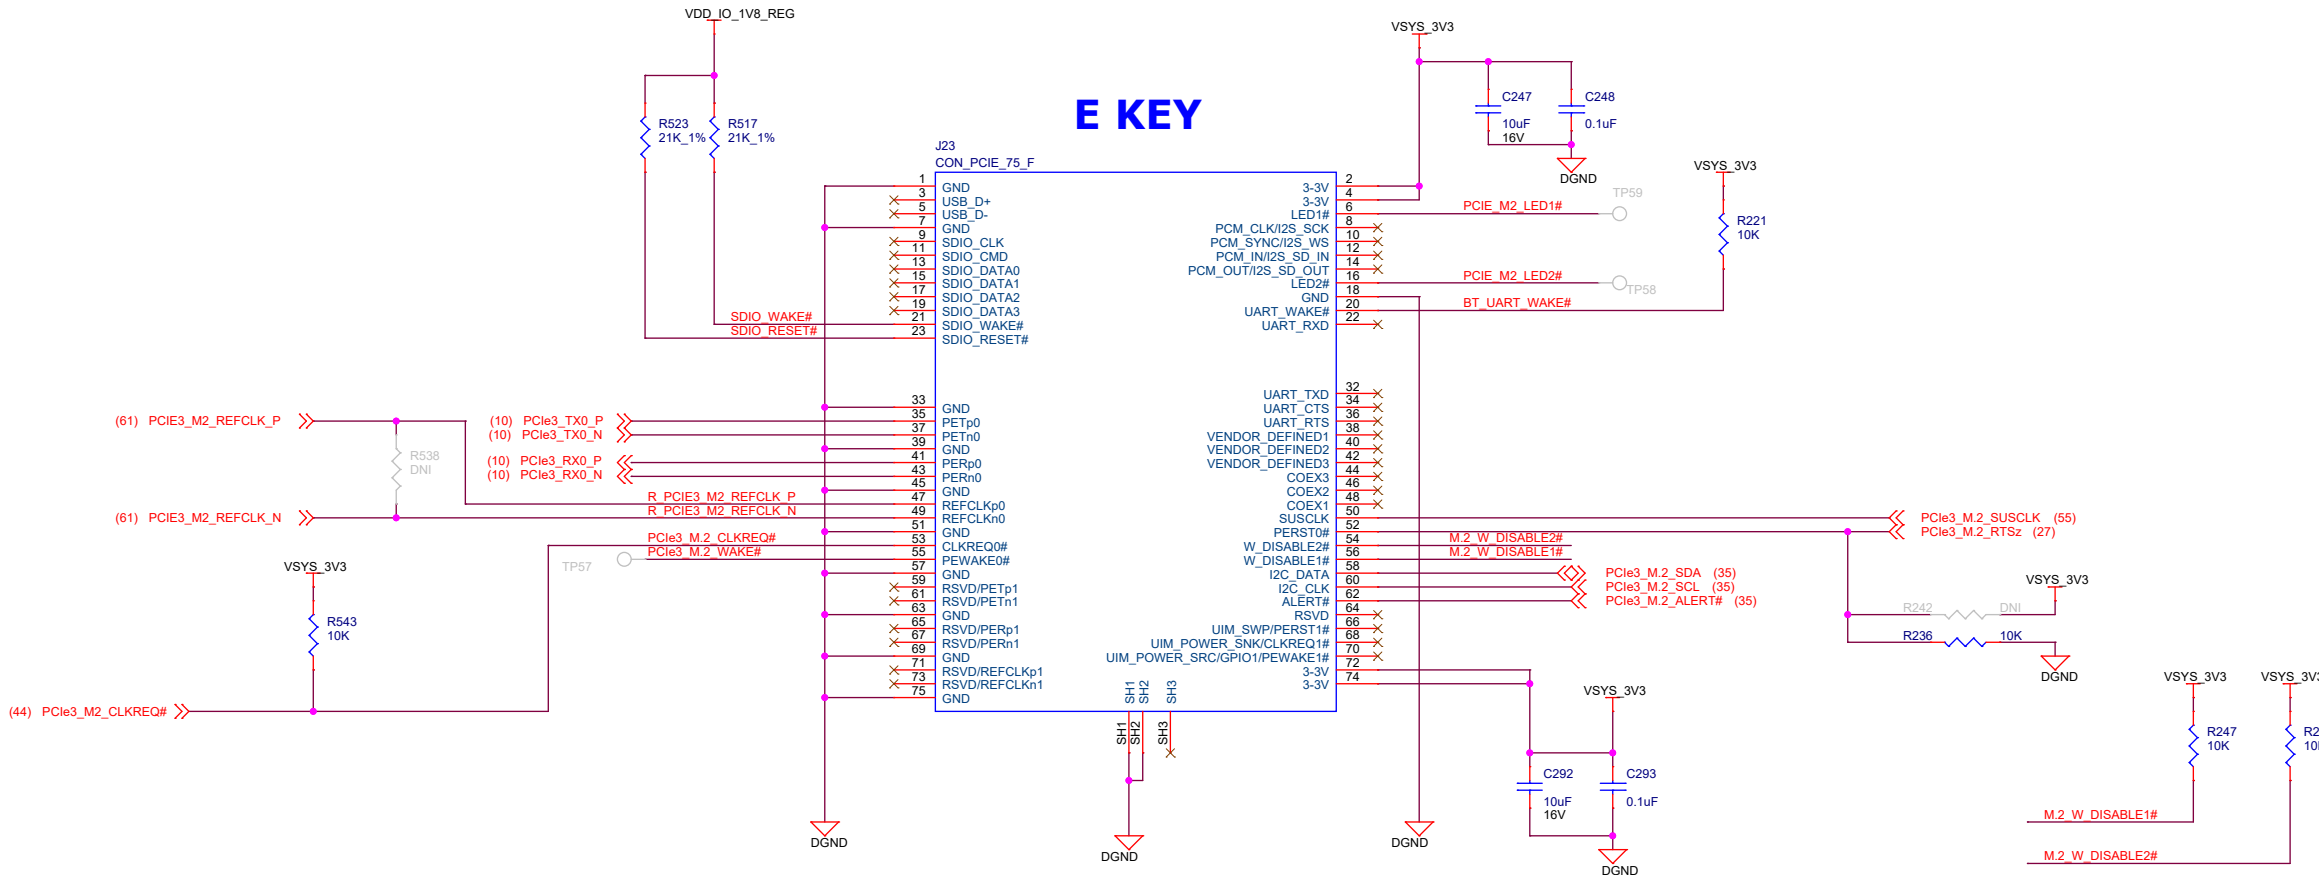


SILKSCREEN: M.2 Key B



PCle Card Slot

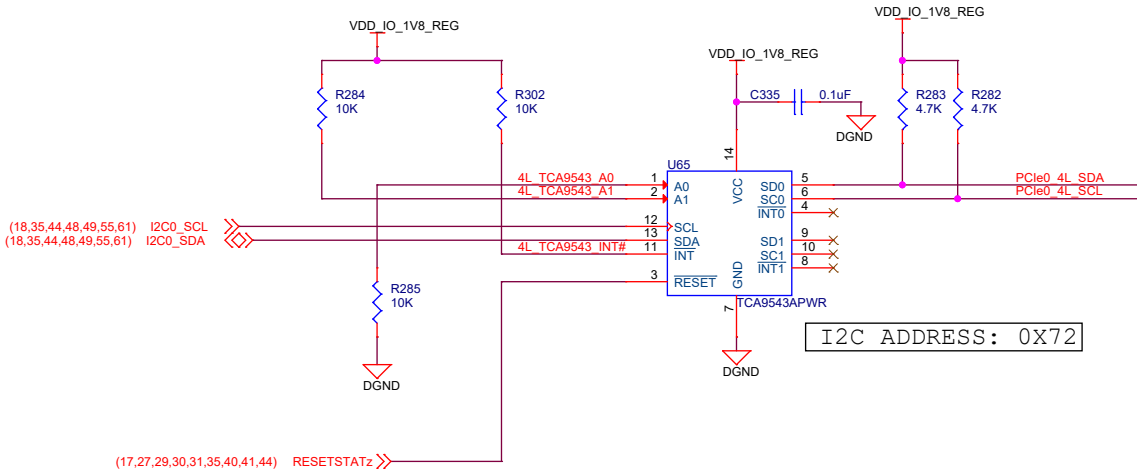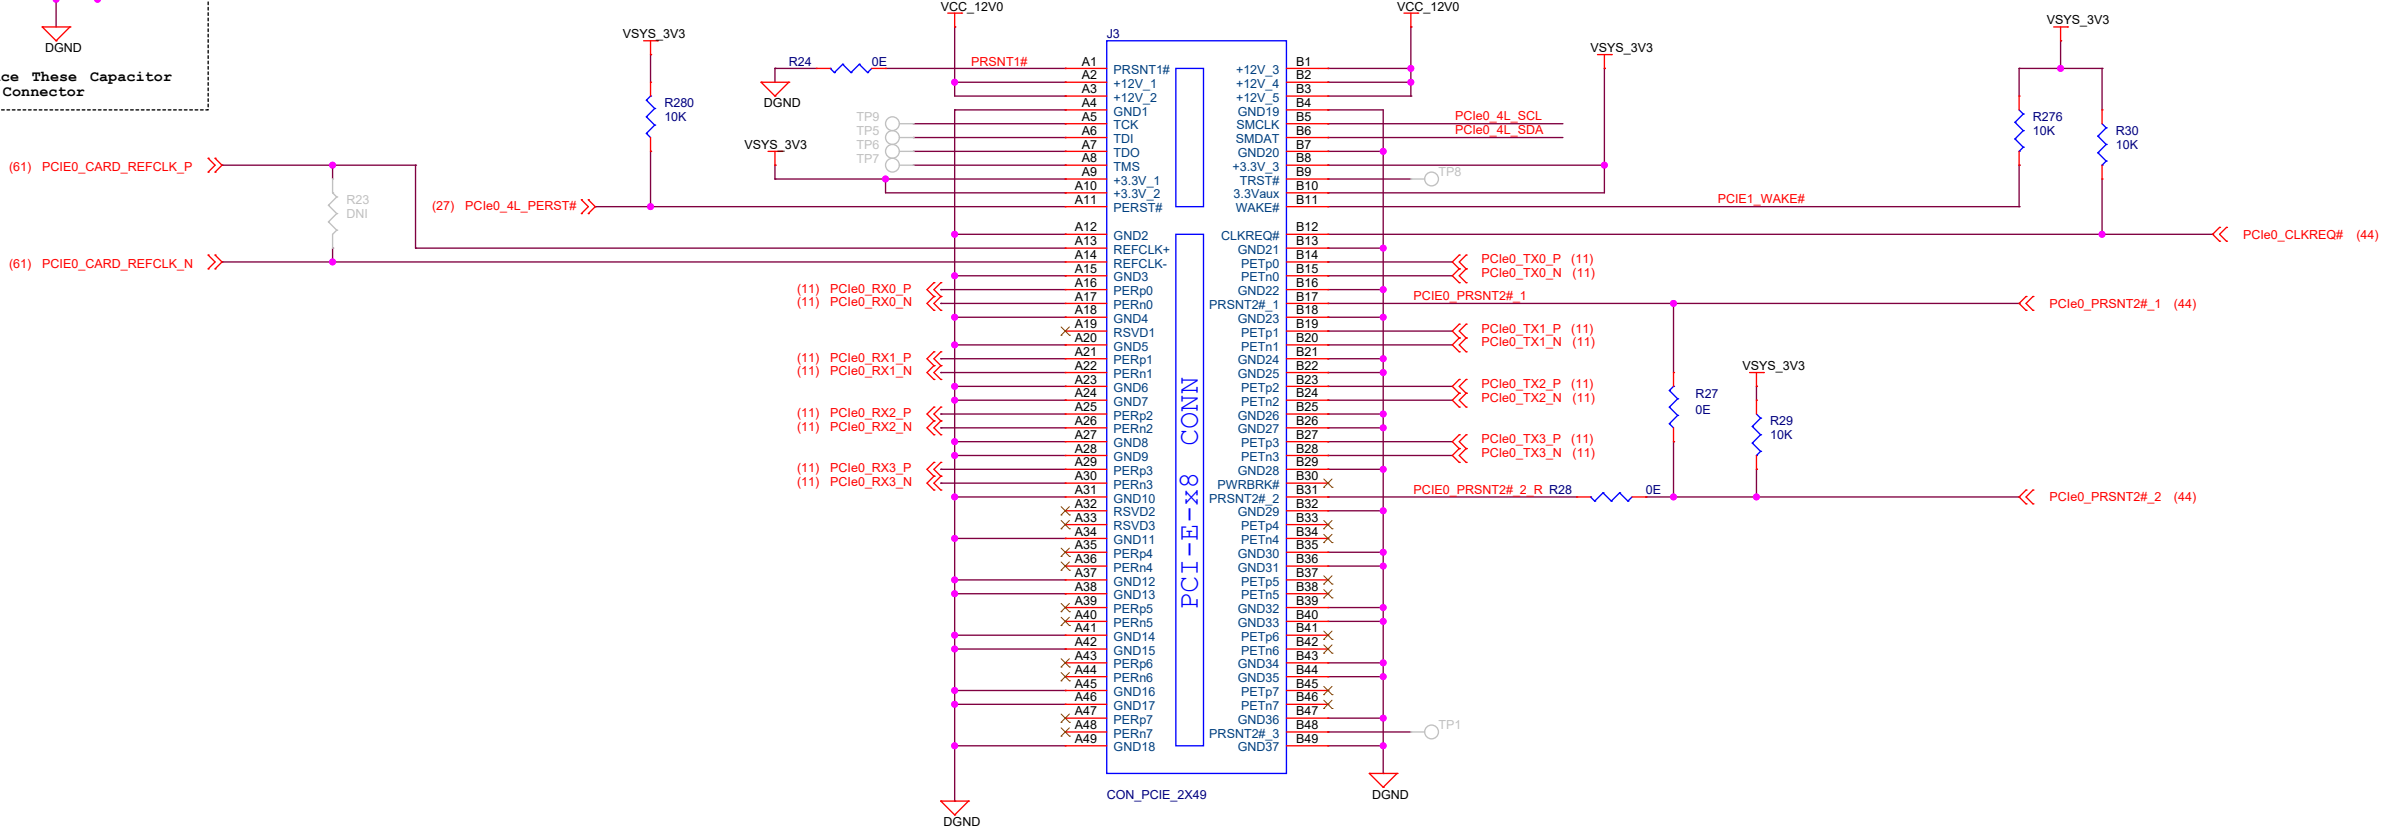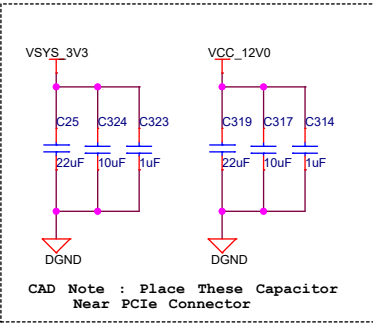


## MCU GB ETHERNET

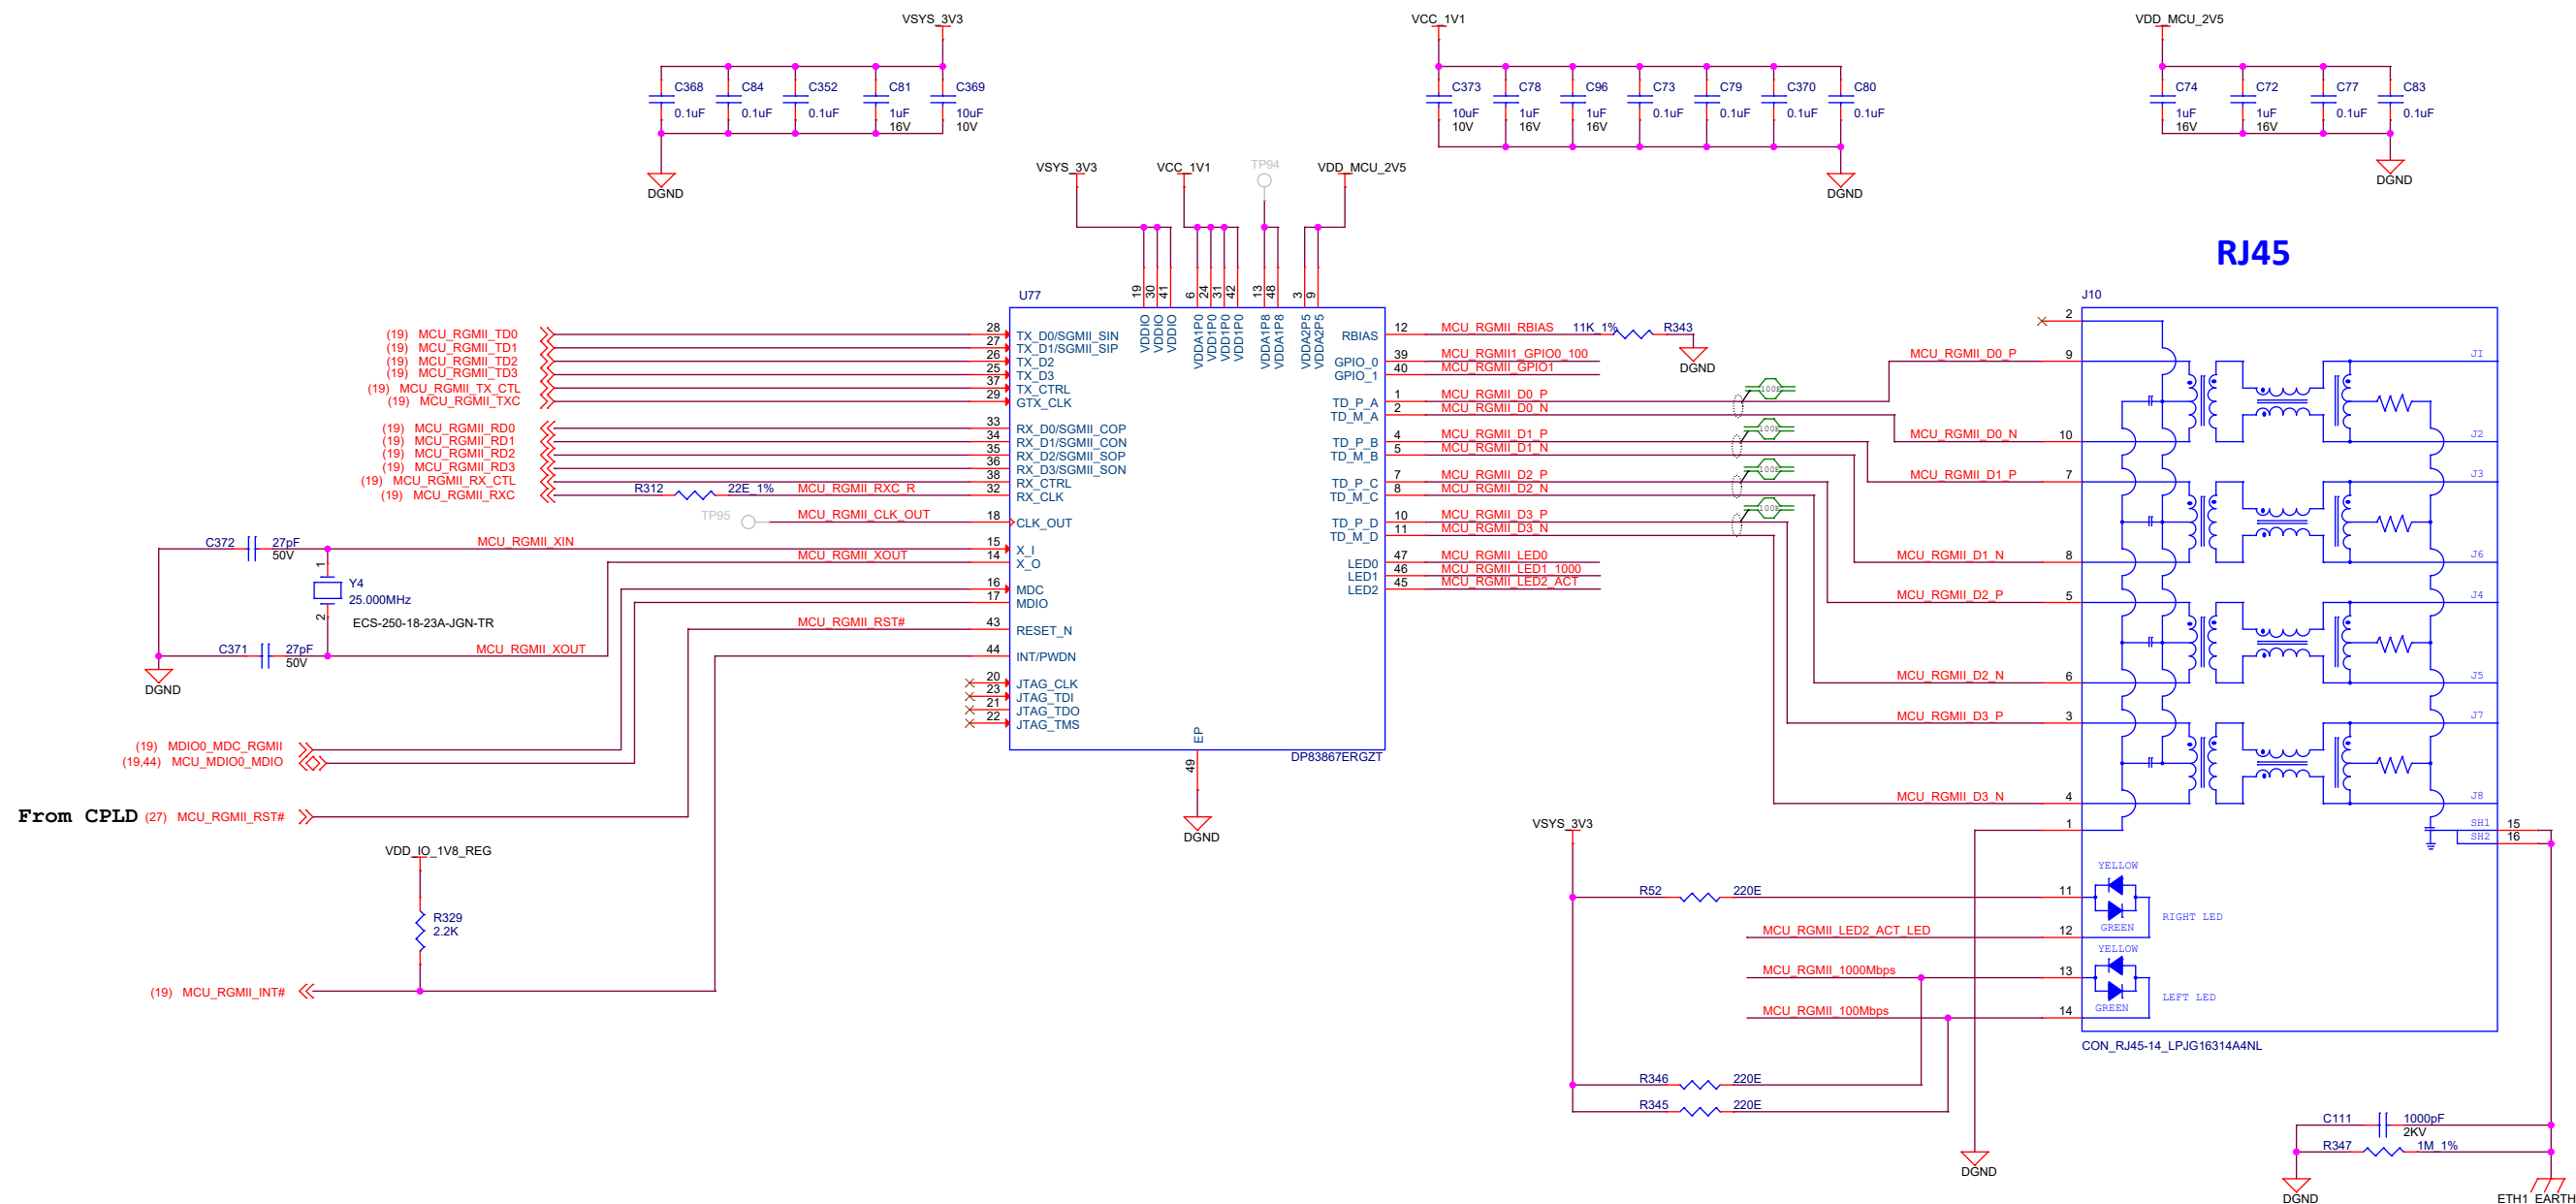

|               |                |
|---------------|----------------|
| RJ45-LED      | FUNCTION       |
| RIGHT - GREEN | ACTIVITY       |
| LEFT - GREEN  | 1000Mbps Speed |
| LEFT - YELLOW | 100Mbps Speed  |

## SPEED AND ACTIVITY LED DRIVERS

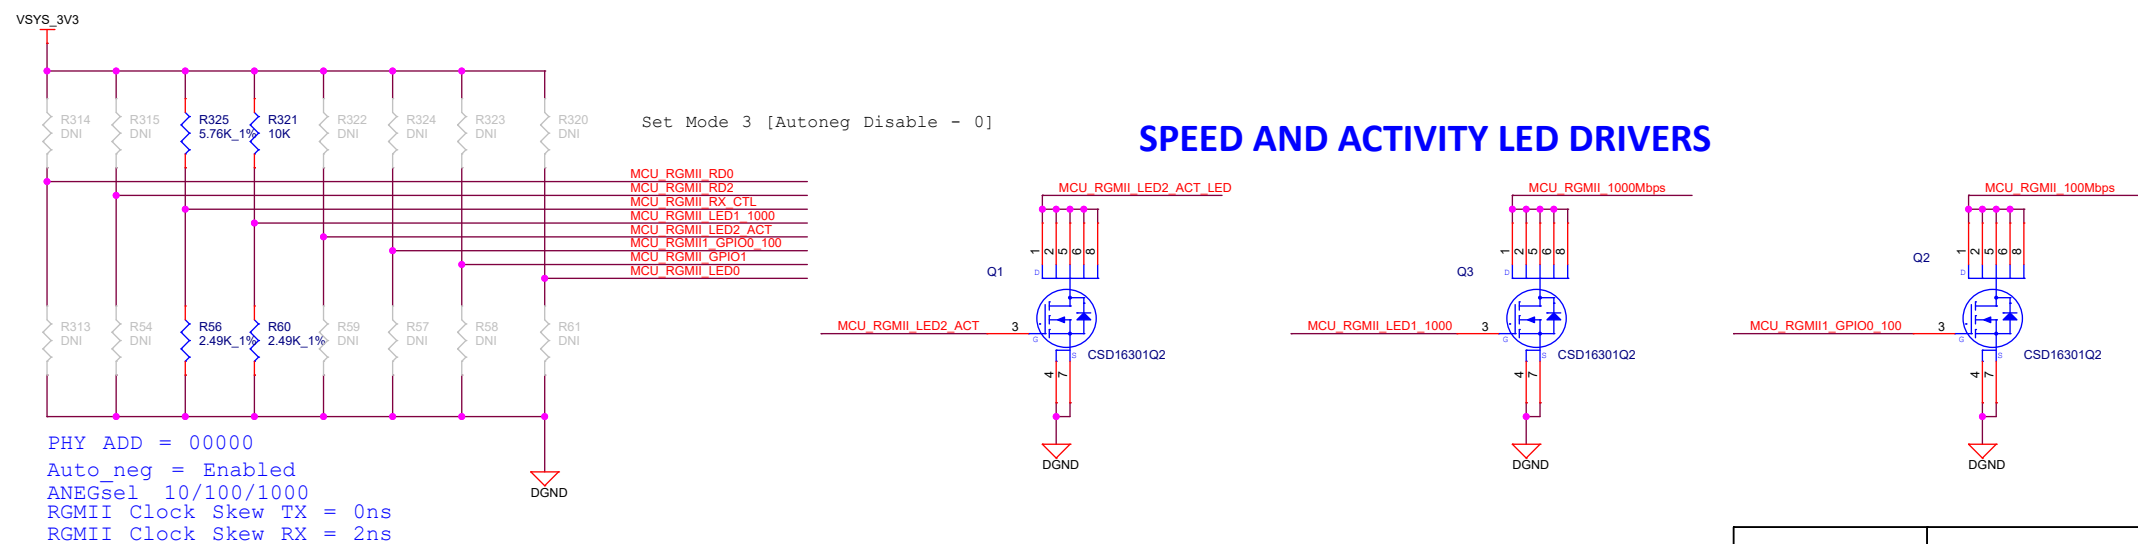

```
LED_2-MODE1 & LED_1-MODE2-TX SKEW=0nS
GPIO0-MODE1 & GPIO1-MODE1-RX SKEW=2nS
```



Project :  
AM69 Edge AI Kit



|       |                 |
|-------|-----------------|
| Title | MCU GB ETHERNET |
|-------|-----------------|



|       |                          |       |          |
|-------|--------------------------|-------|----------|
| Size  | PROC154E2B 001 SK AM69   |       |          |
| C     |                          |       |          |
| Date: | Thursday, March 16, 2023 | Sheet | 38 of 62 |

CSI MUX - DATA

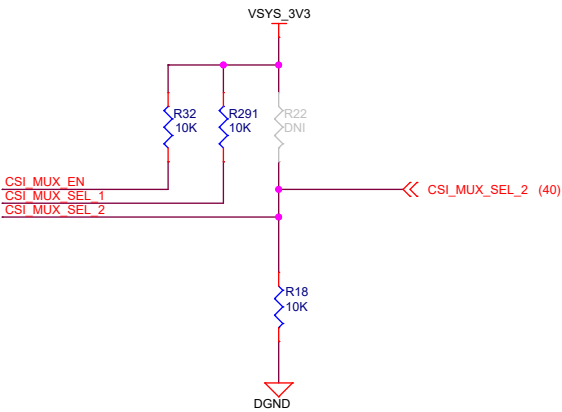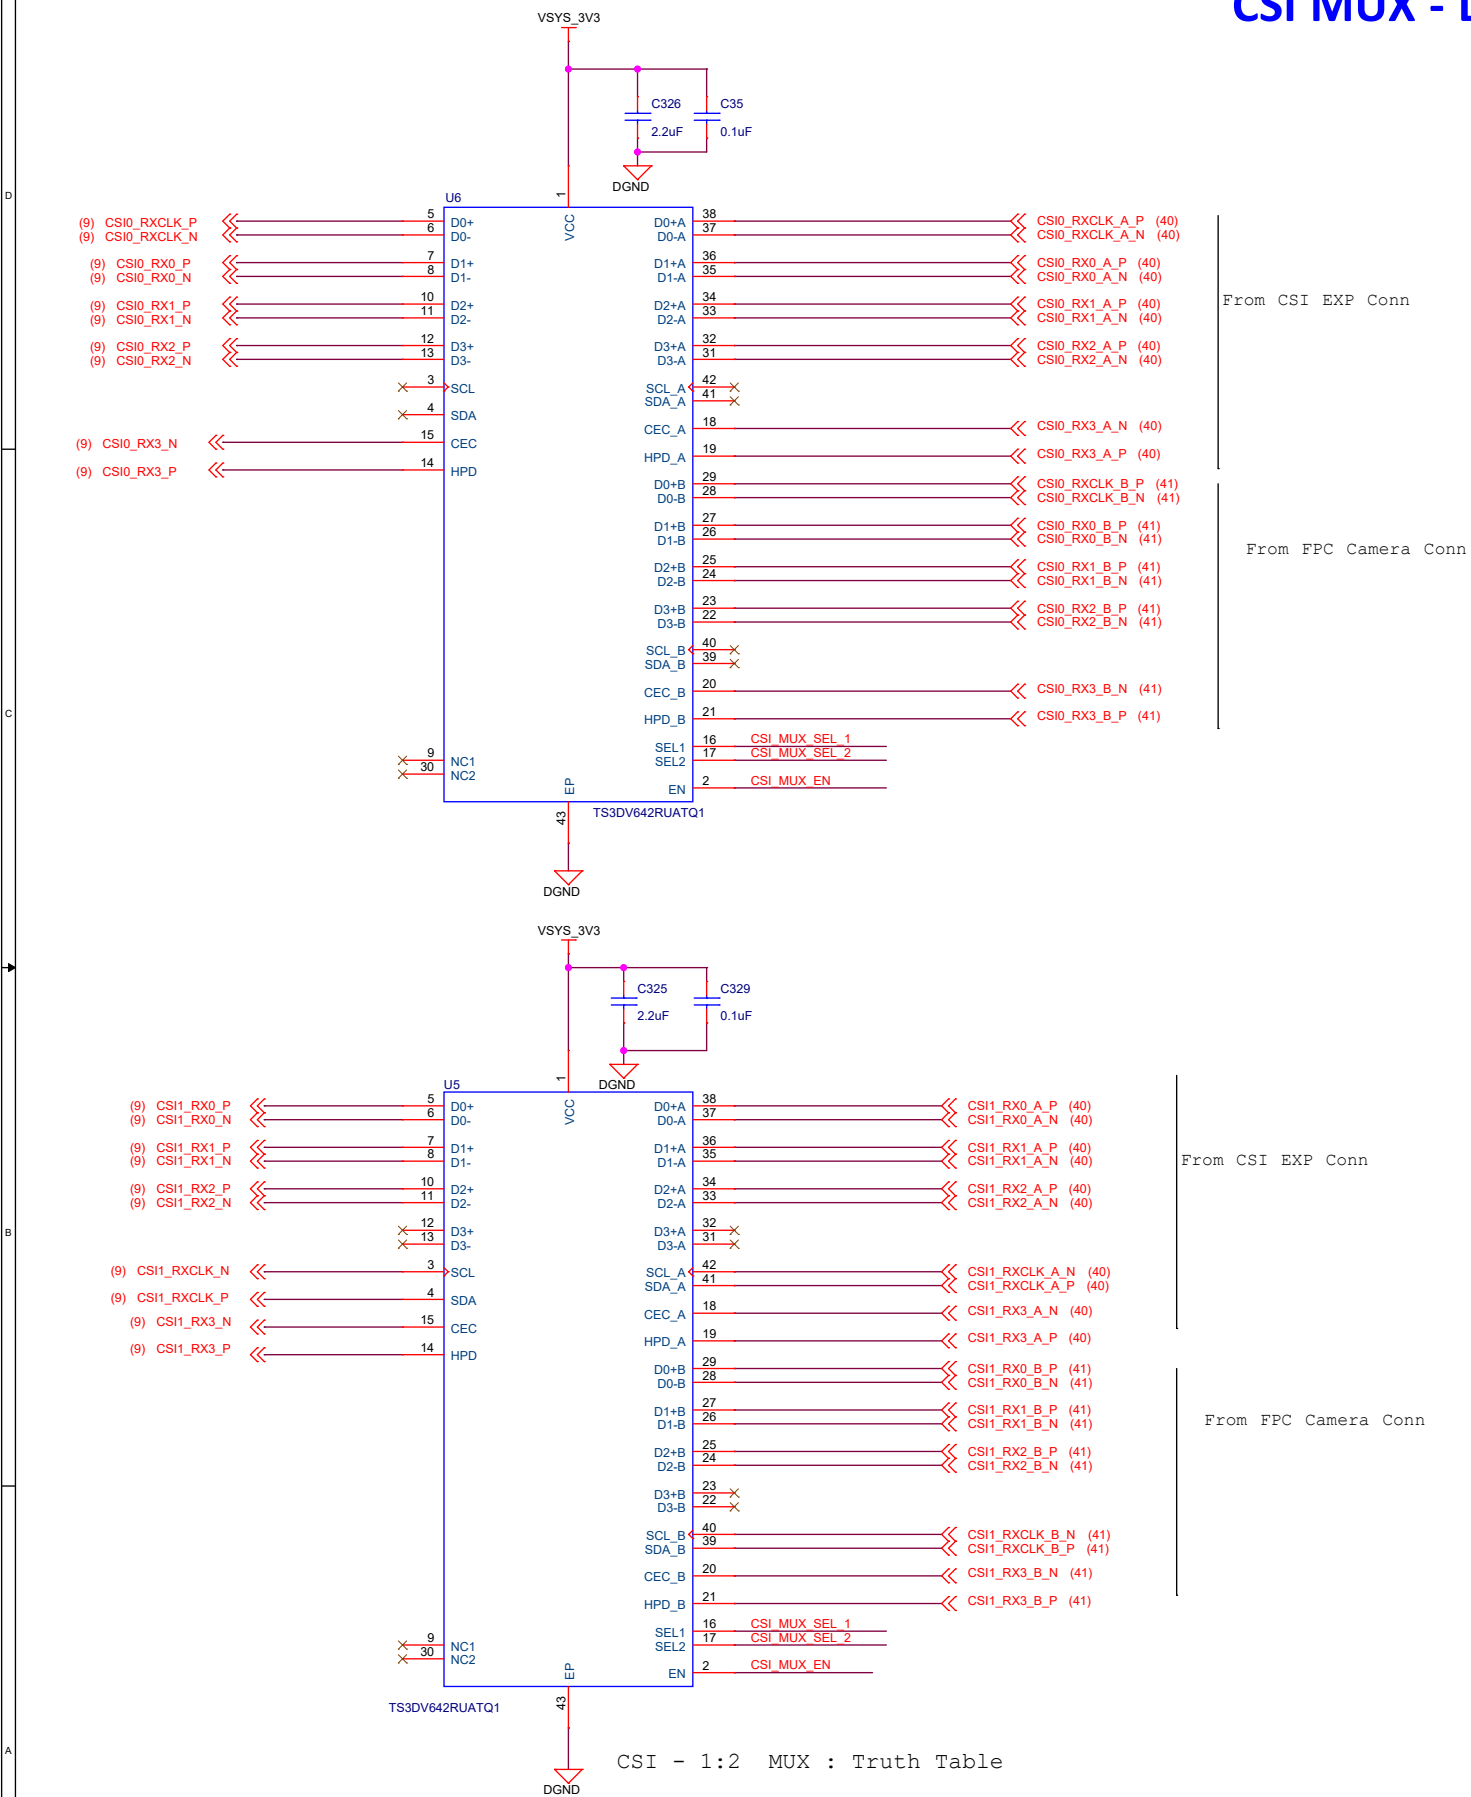


| MUX_SEL_2 | FUNCTION                              |           |
|-----------|---------------------------------------|-----------|
| LOW       | INPUT<-- A Port [CSI2 Connector]      | (default) |
| HIGH      | INPUT<--B port [FPC Camera Connector] |           |

# CSI2 EXPANSION CONNECTOR

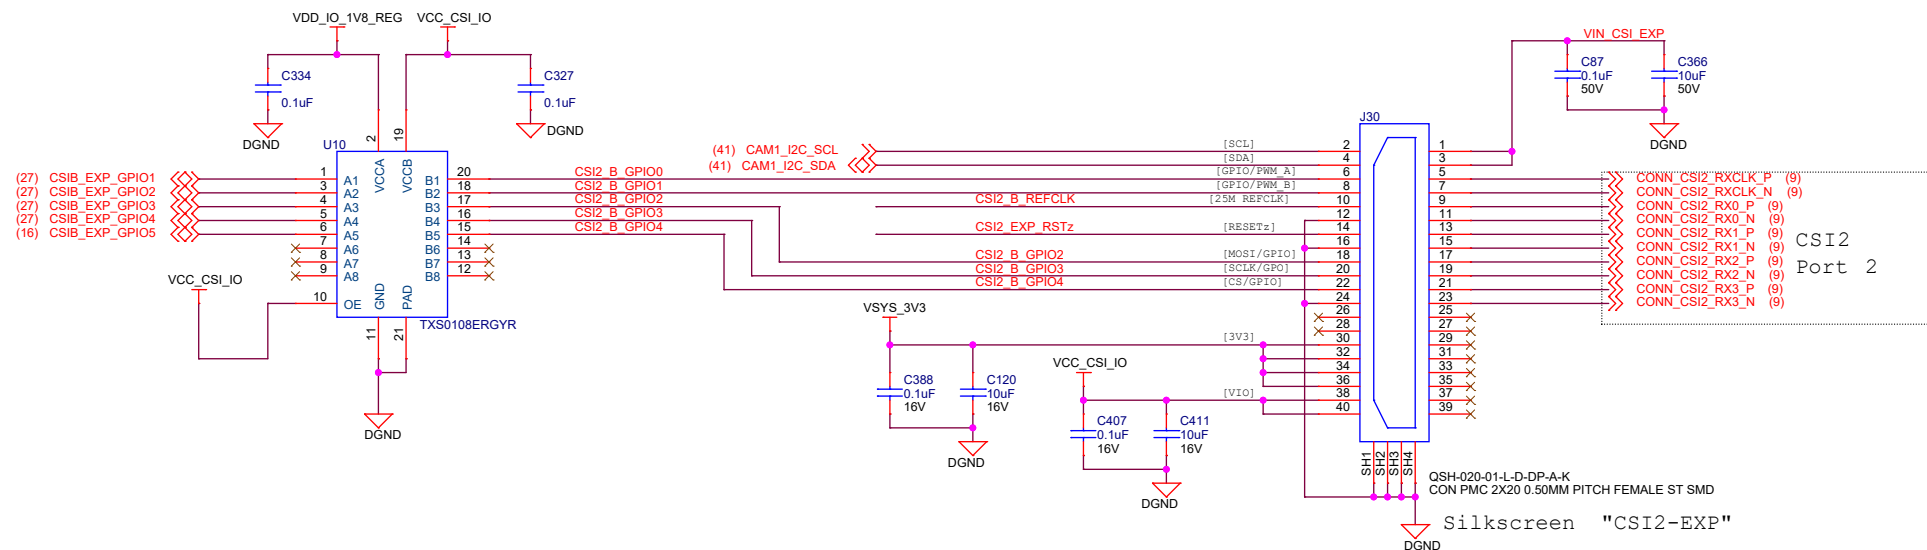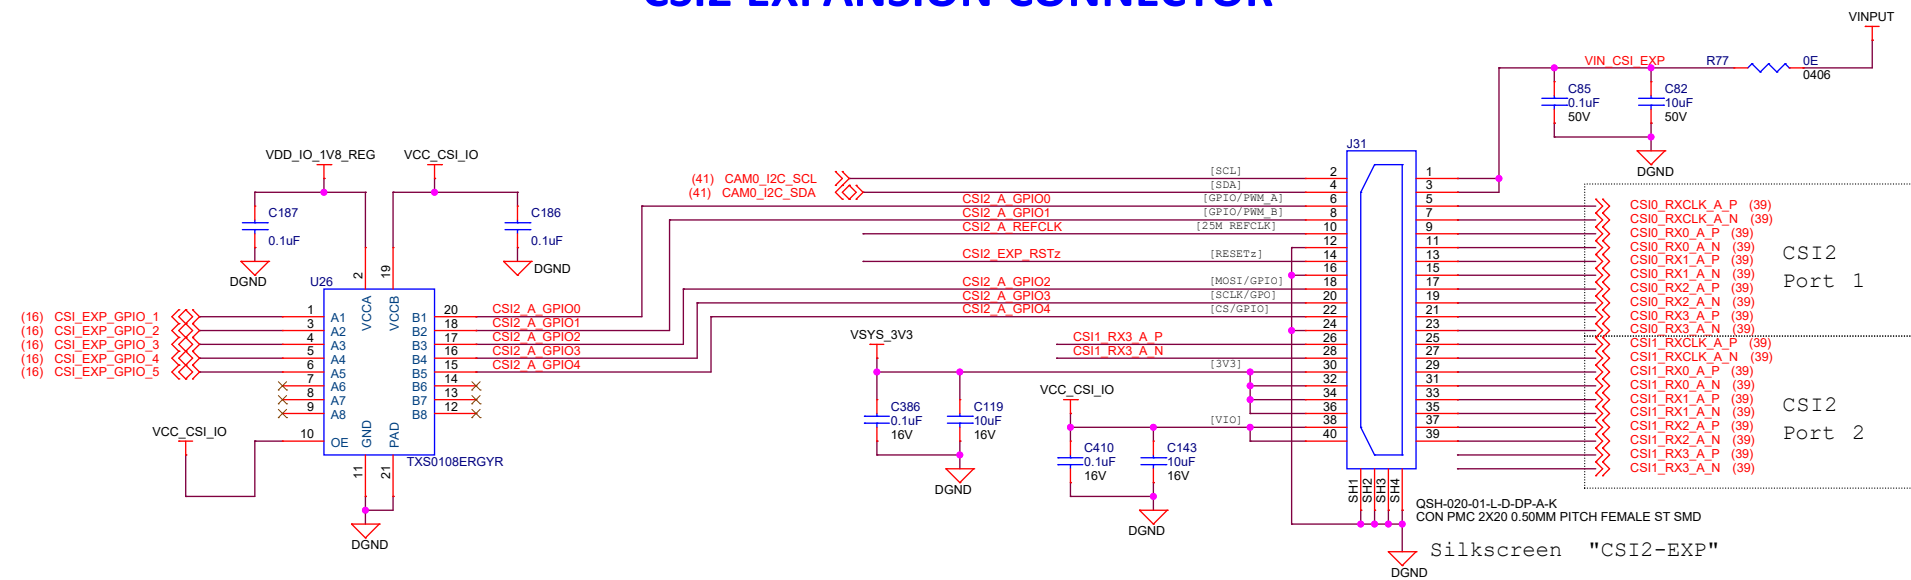

## CSI GPIO EXPANDER

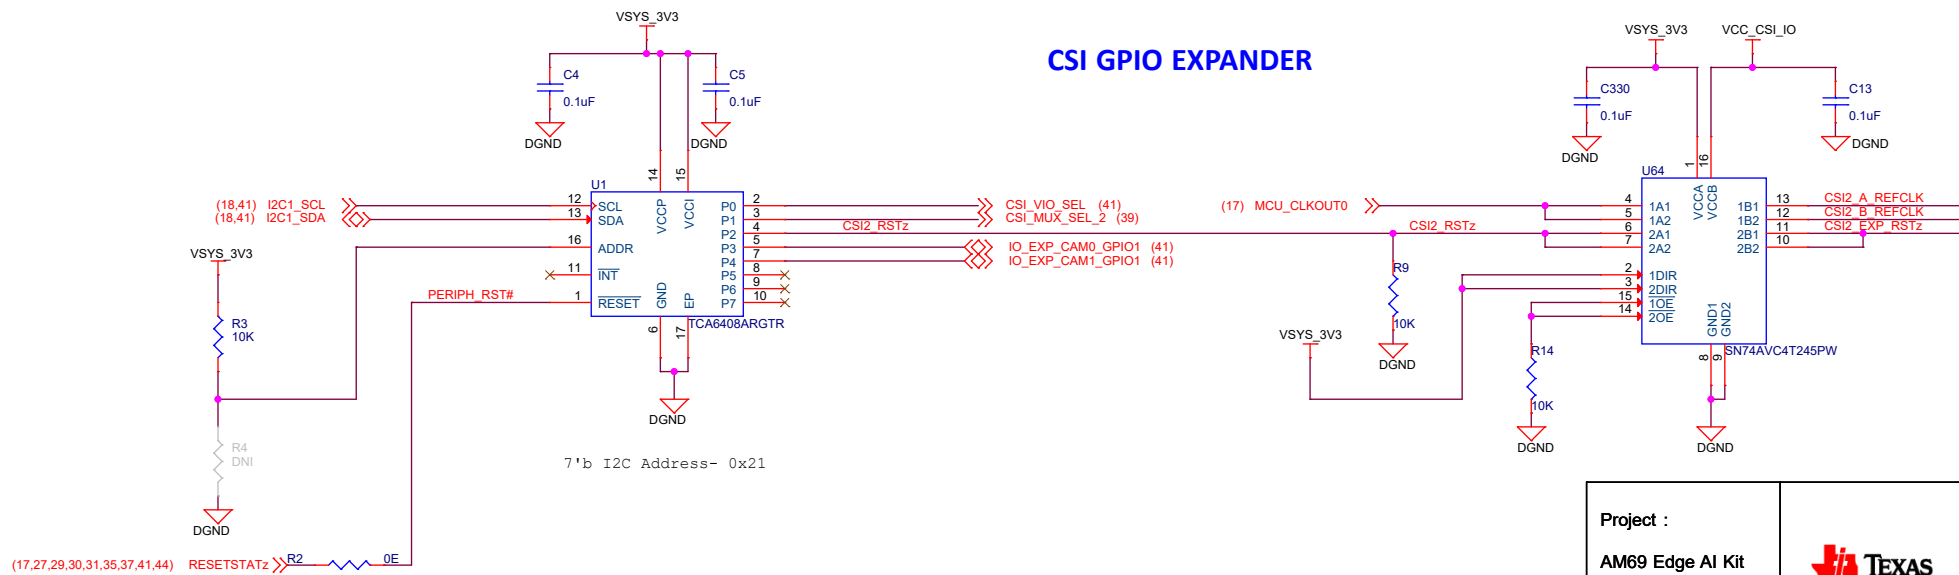

Project :  
AM69 Edge AI Kit



Title CSI2 EXPANSION CONNECTOR

Size C PROC154E2B 001 SK AM69

Date: Thursday, March 16, 2023


Sheet 40 of 62

Rev


E2B

# CSI FPC CAMERA CONNECTORS


## I2C SWITCH

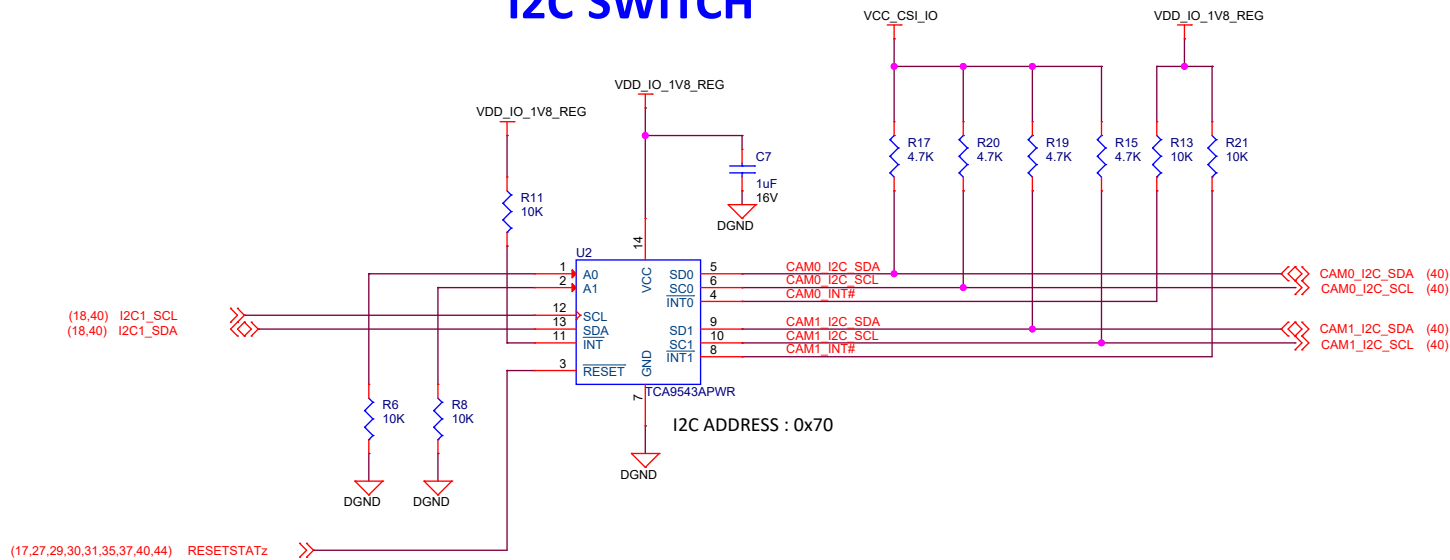

## GPIO LEVEL TRANSLATOR

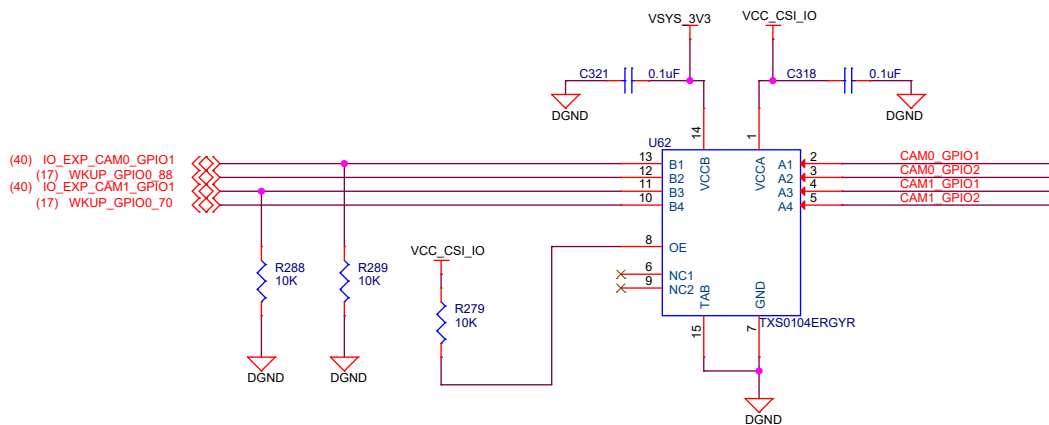


## CAMERA IO SUPPLY

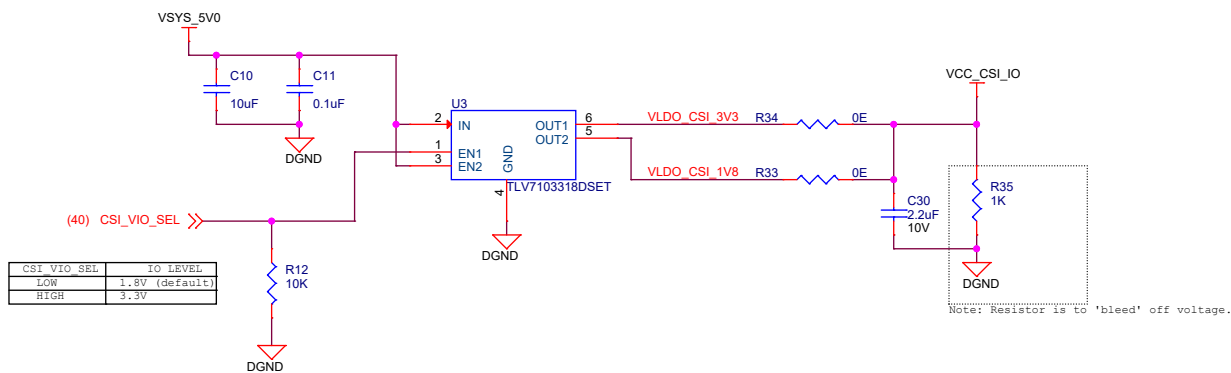


Silk Screen "CAM1"

FPC Camera Connector -1

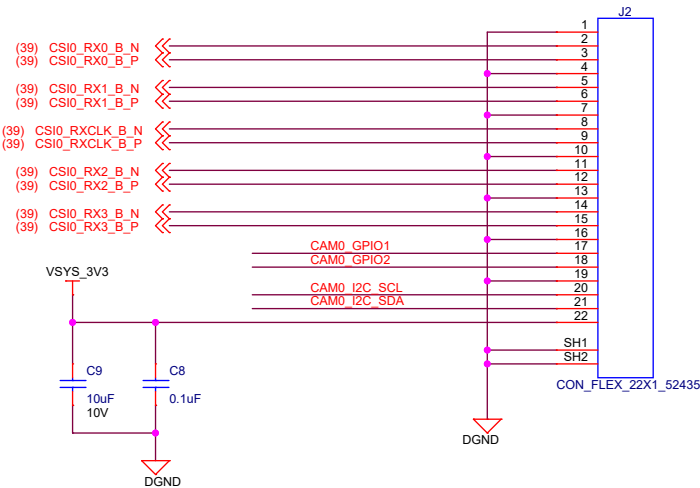


FPC Camera Connector -2

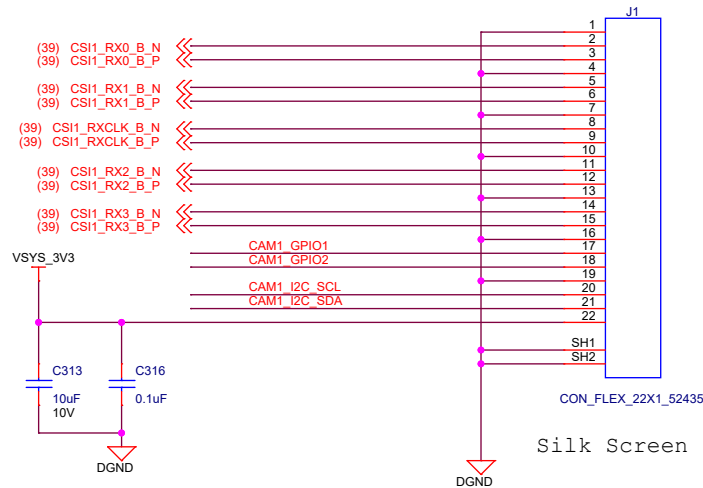

Silk Screen "CAM2"


DISPLAY PORT INTERFACE

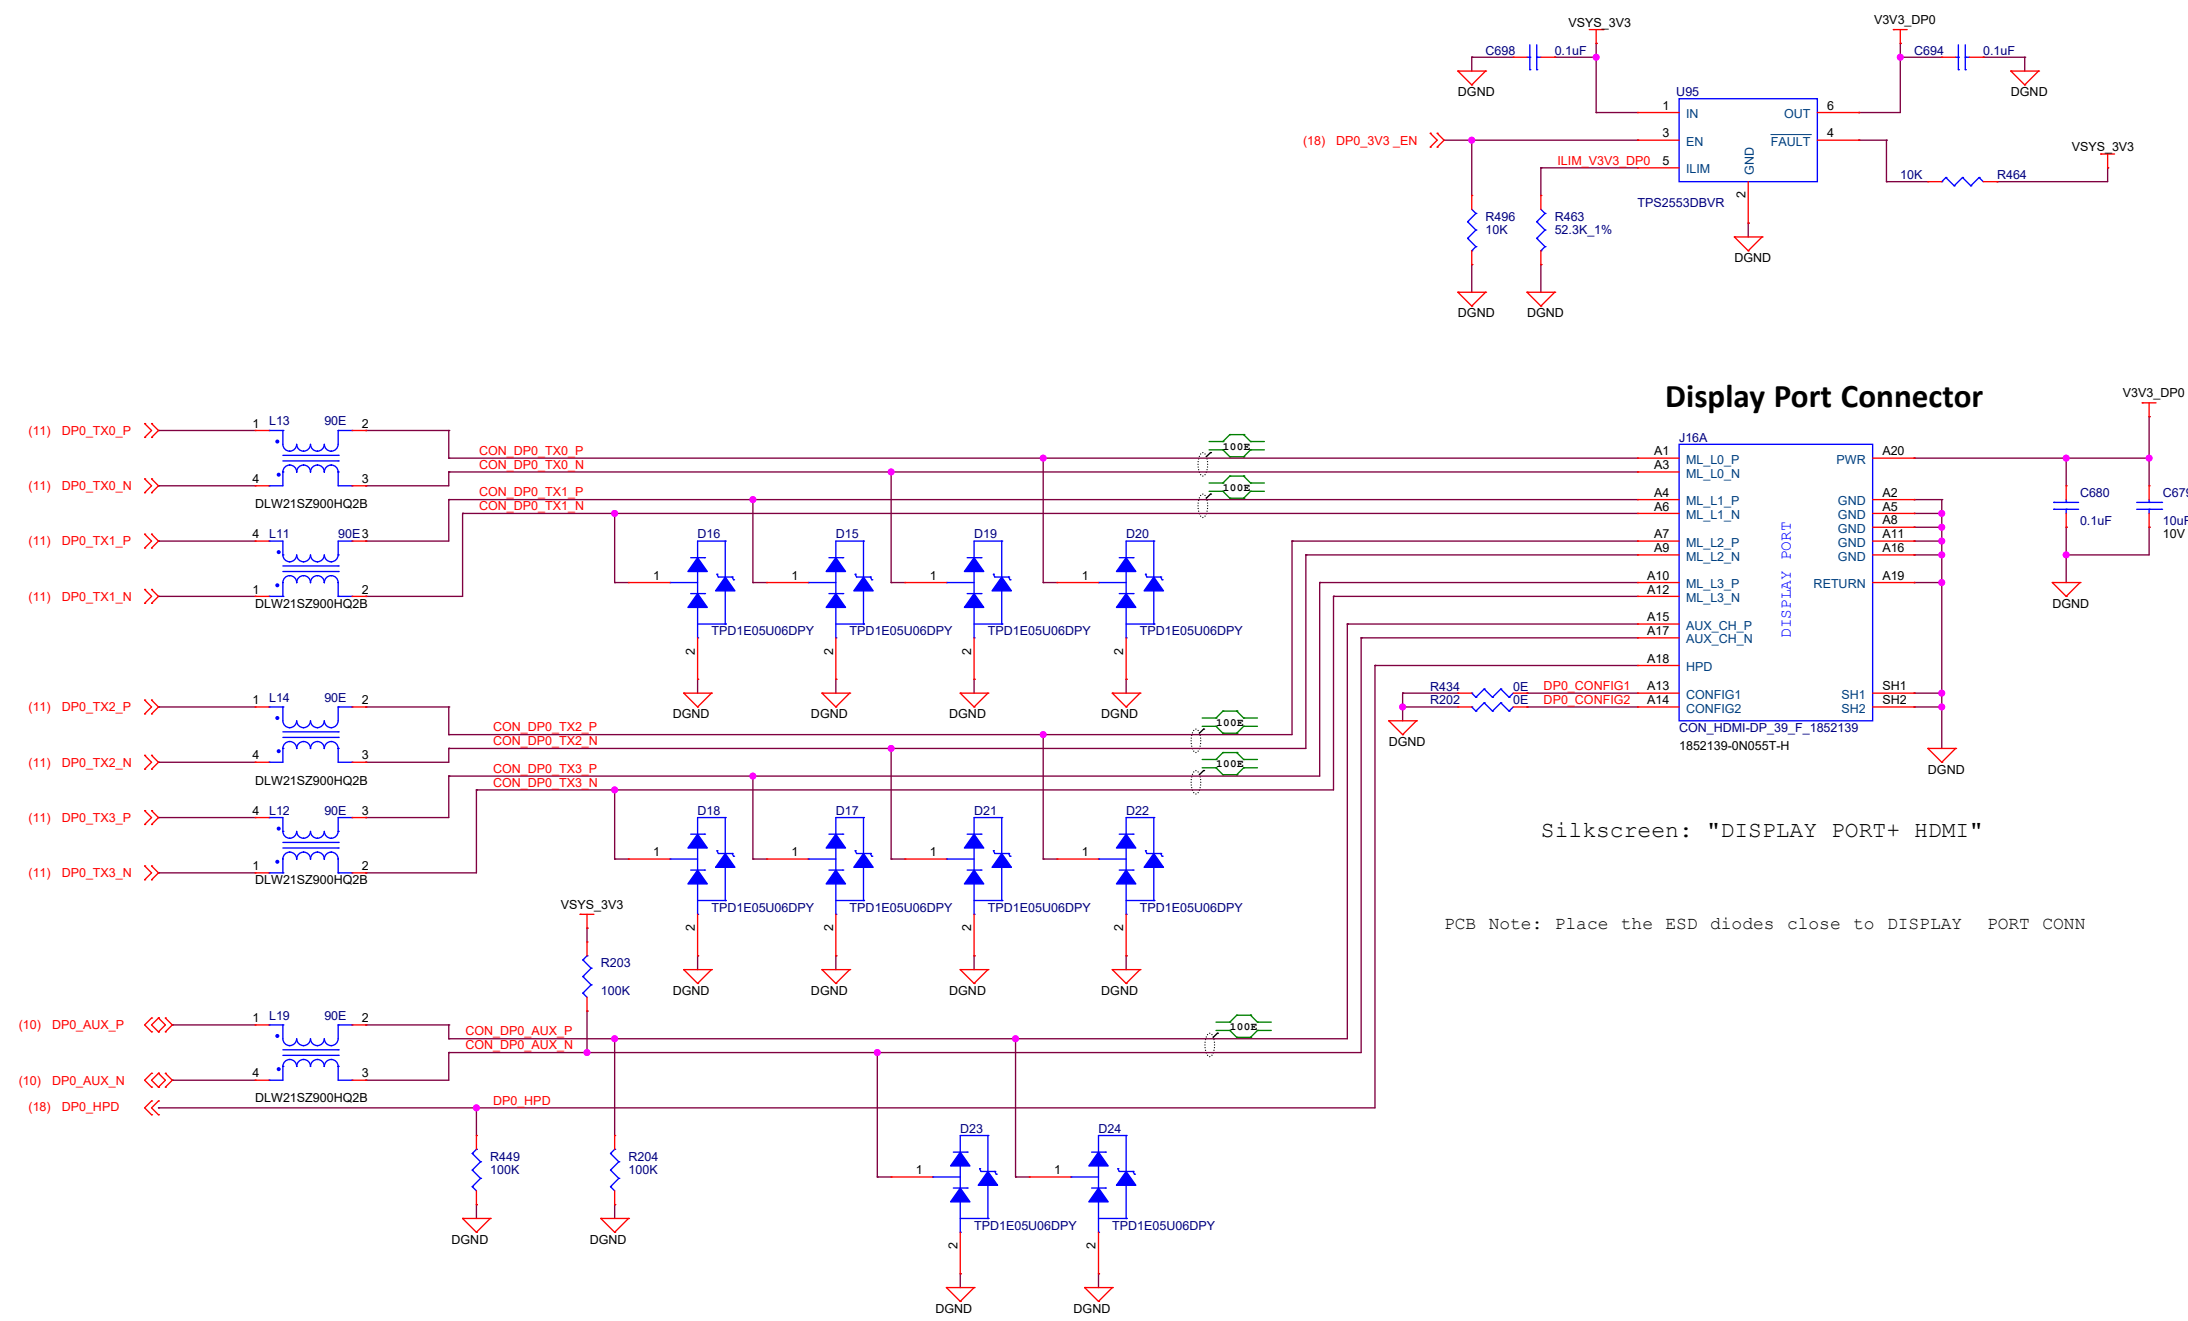

Silkscreen: "DISPLAY PORT+ HDMI"

PCB Note: Place the ESD diodes close to DISPLAY PORT CONN

DVI/HDMI TRANSMITTER

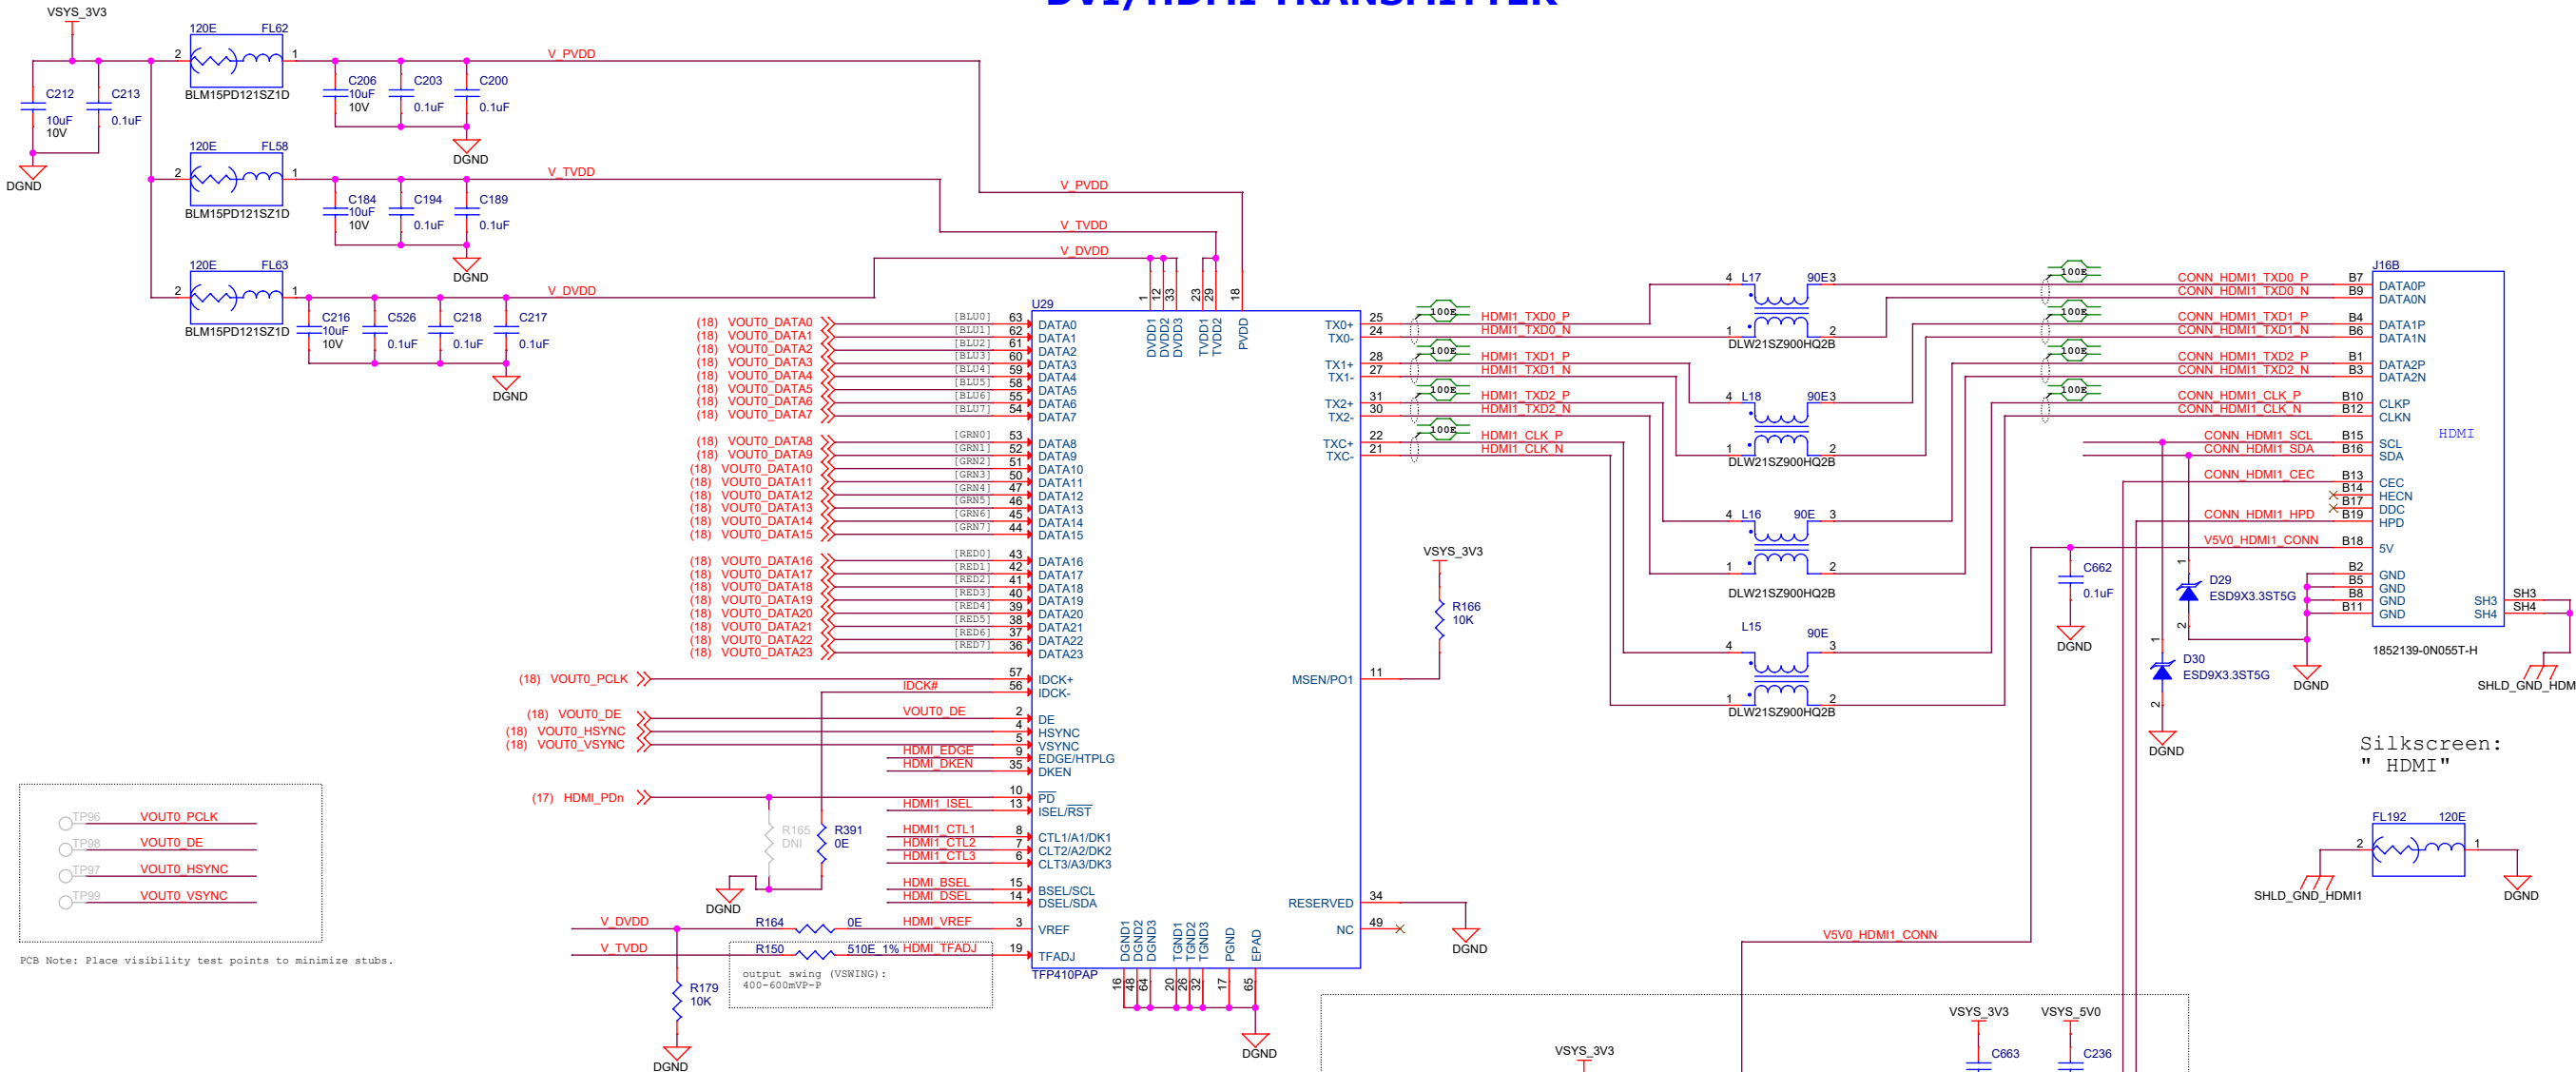


PCB Note: Place visibility test points to minimize stubs.

DVI Configuration Settings


| VREF       | BSEL | EDGE | DSEL | BUS WIDTH | LATCH MODE   | CLOCK MODE | CLOCK EDGE   |
|------------|------|------|------|-----------|--------------|------------|--------------|
| 0.55V-0.9V | 1    | 0    | 0    | 24-bit    | Single-ended | Falling    | Single-ended |
| Default    | 1    | 1    | 0    | 24-bit    | Single-ended | Raising    | Single-ended |

ISEL:- Low (default): I2C interface is disabled and chip configuration is specified by BSEL, DSEL, EDGE, VREF pins



When ISEL: L, DSEL-H- enables de-skew function (default)

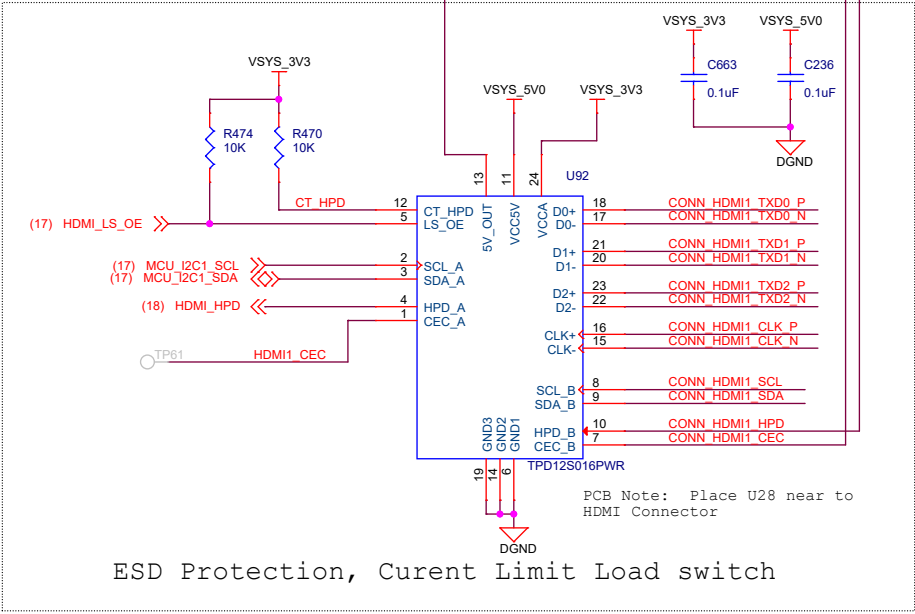


ENET EXPANSION CONNECTOR

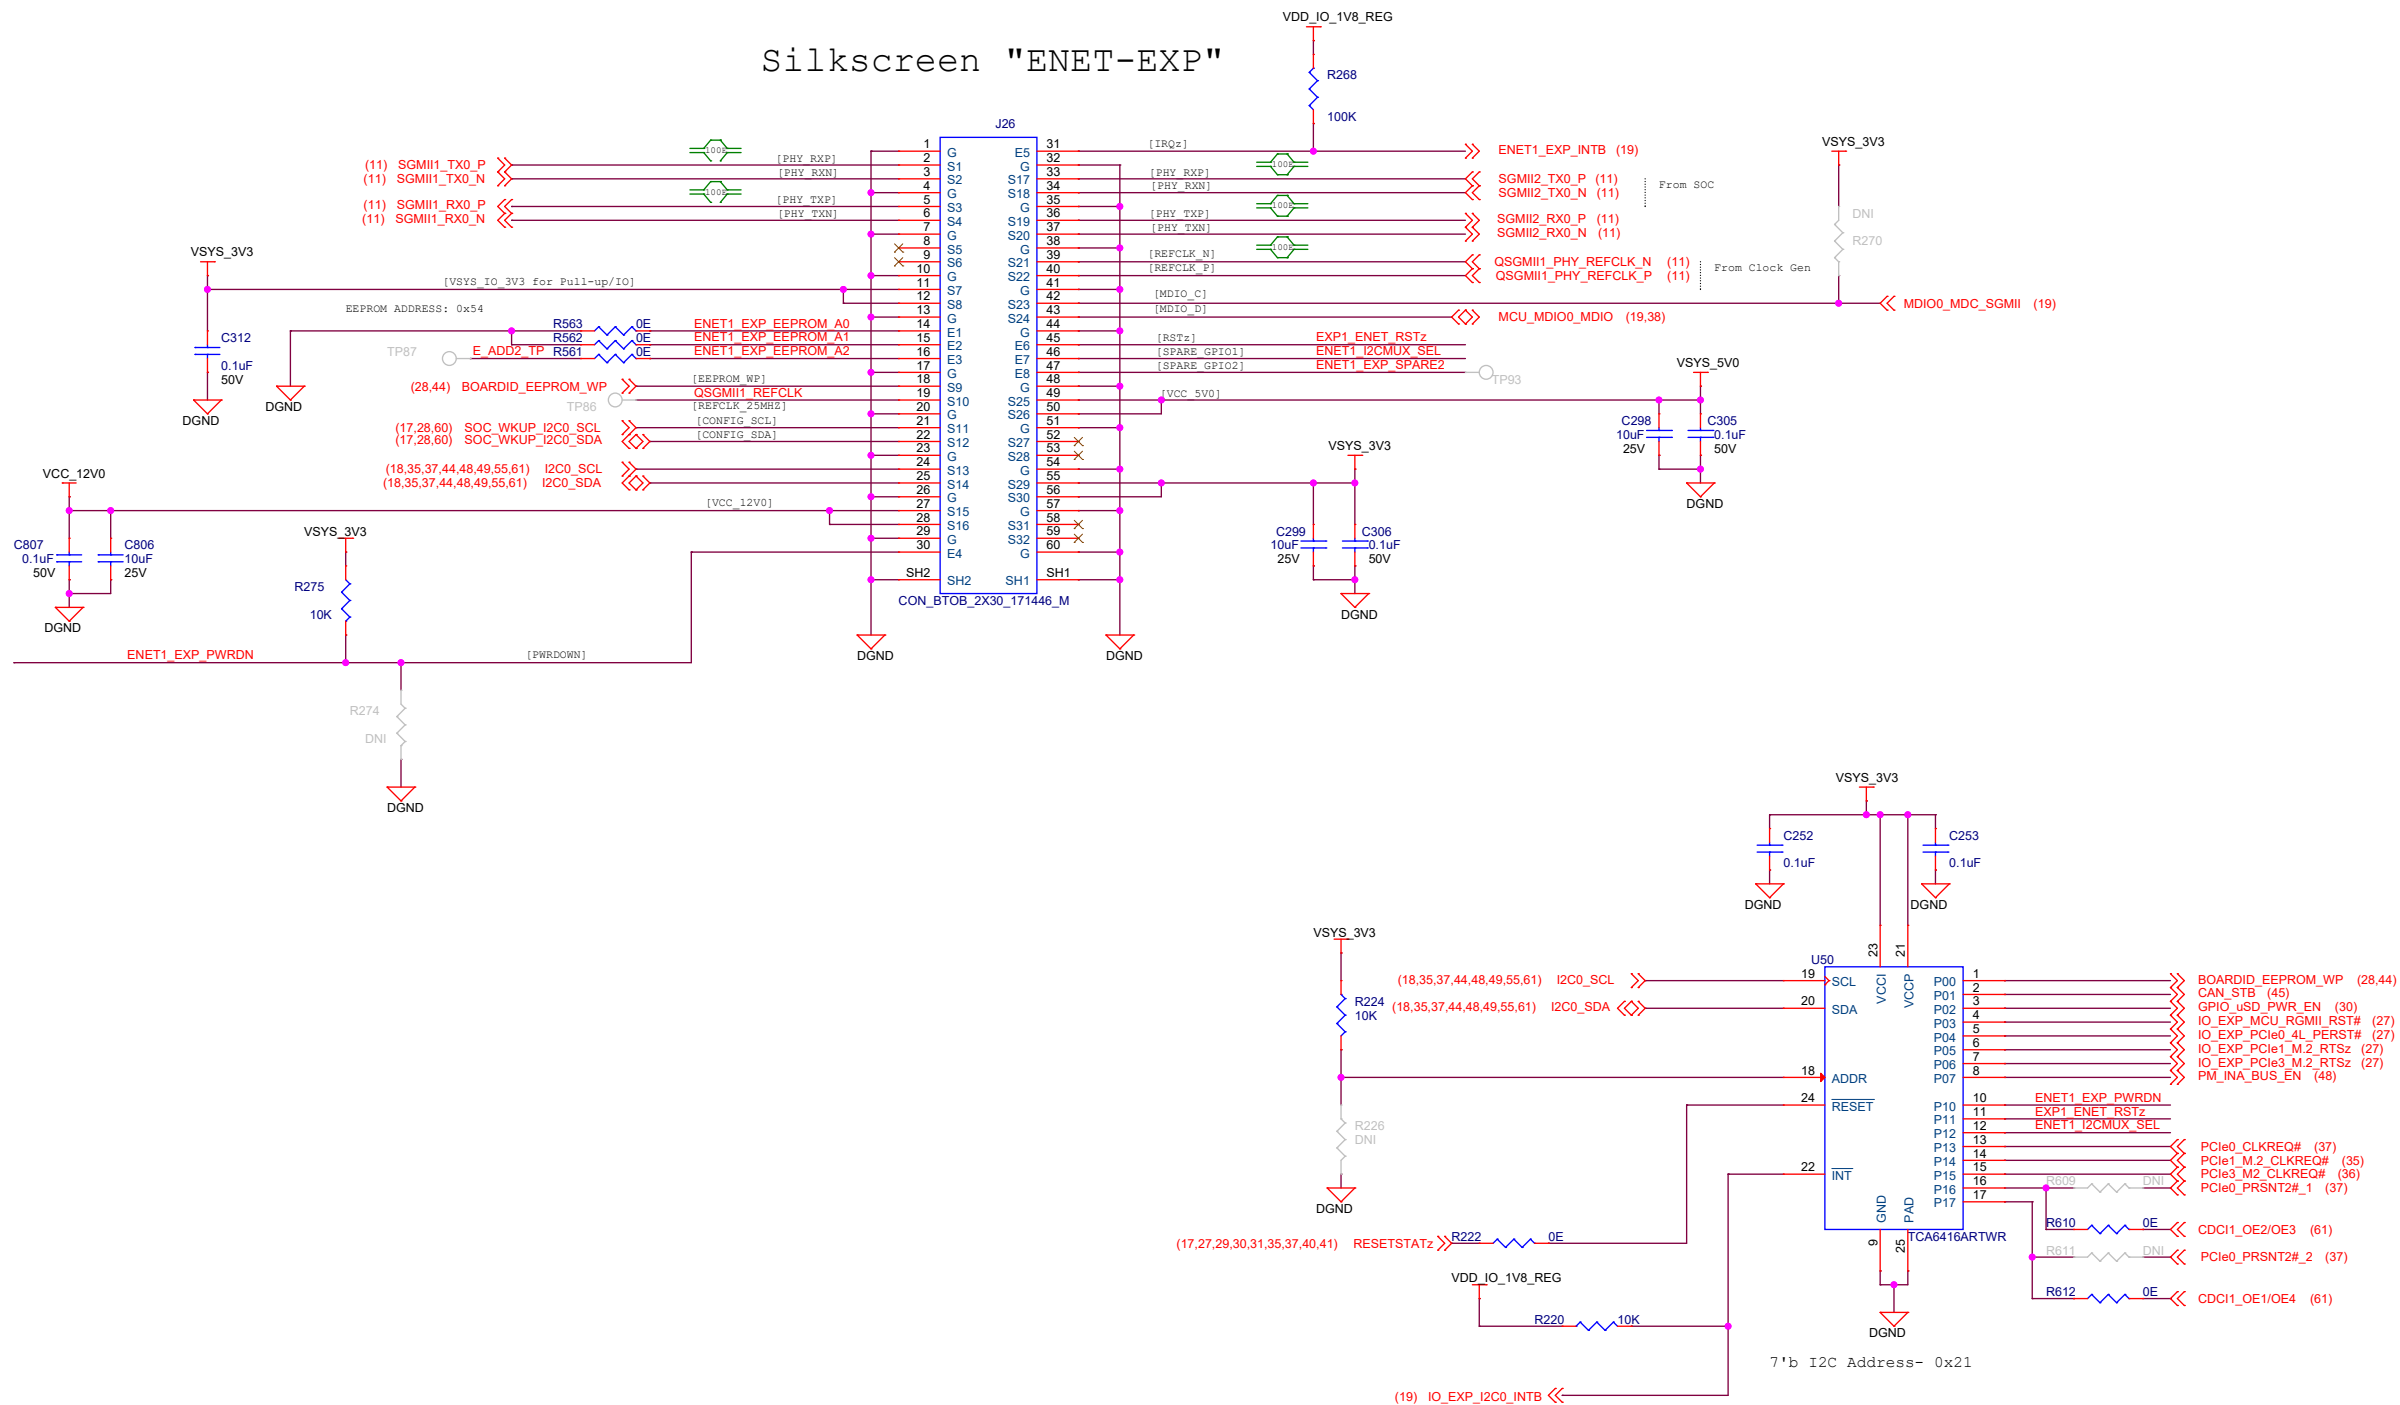


CAN TRANSCEIVERS

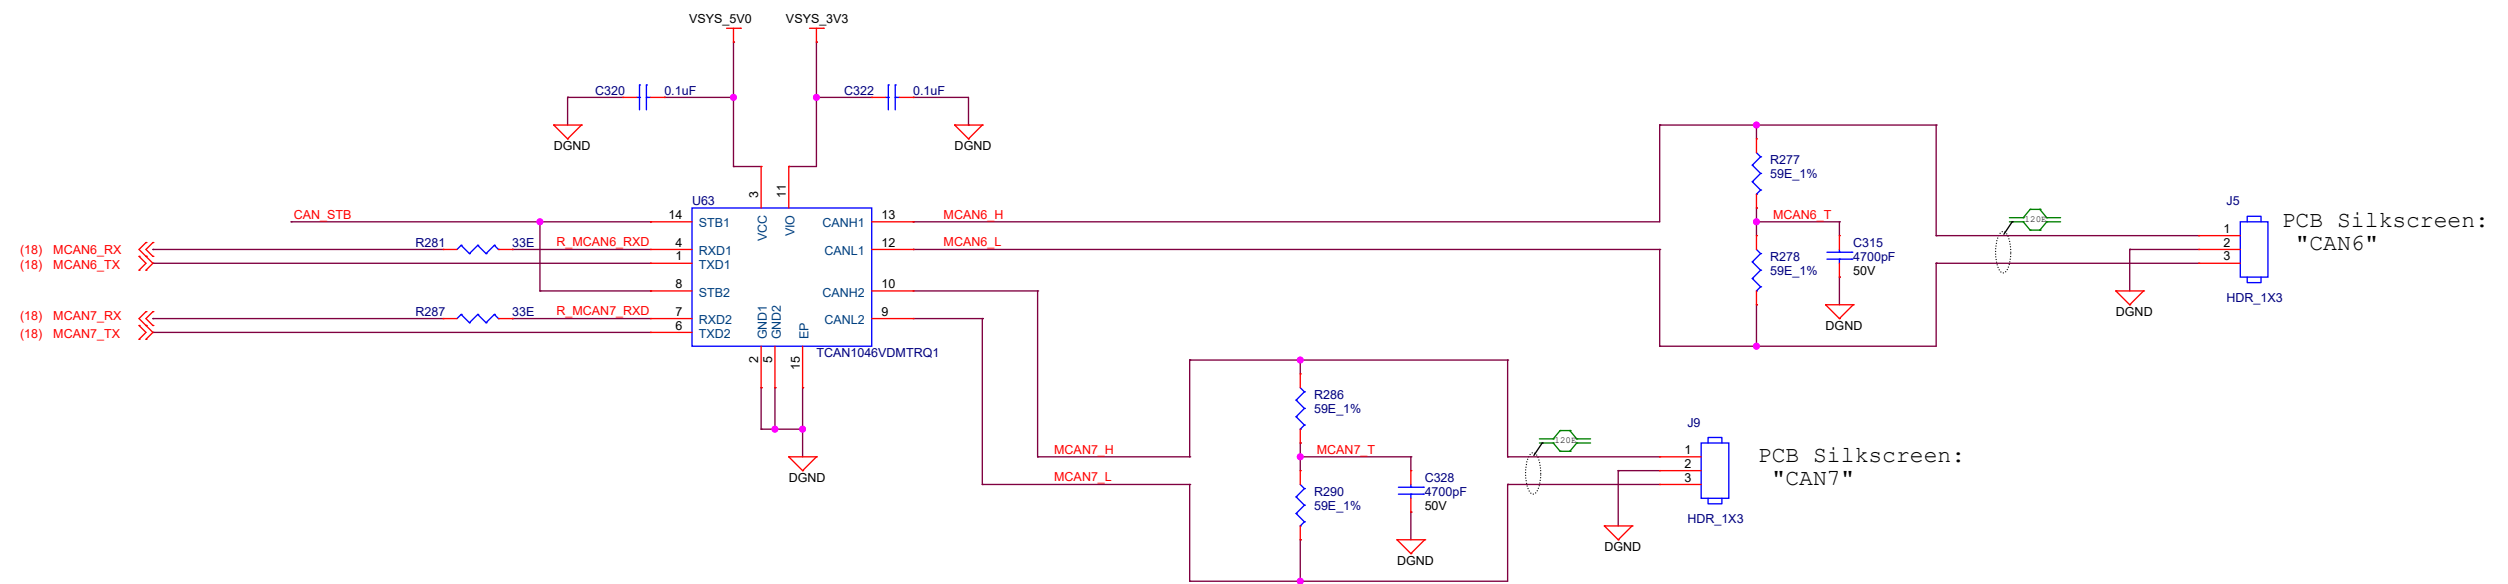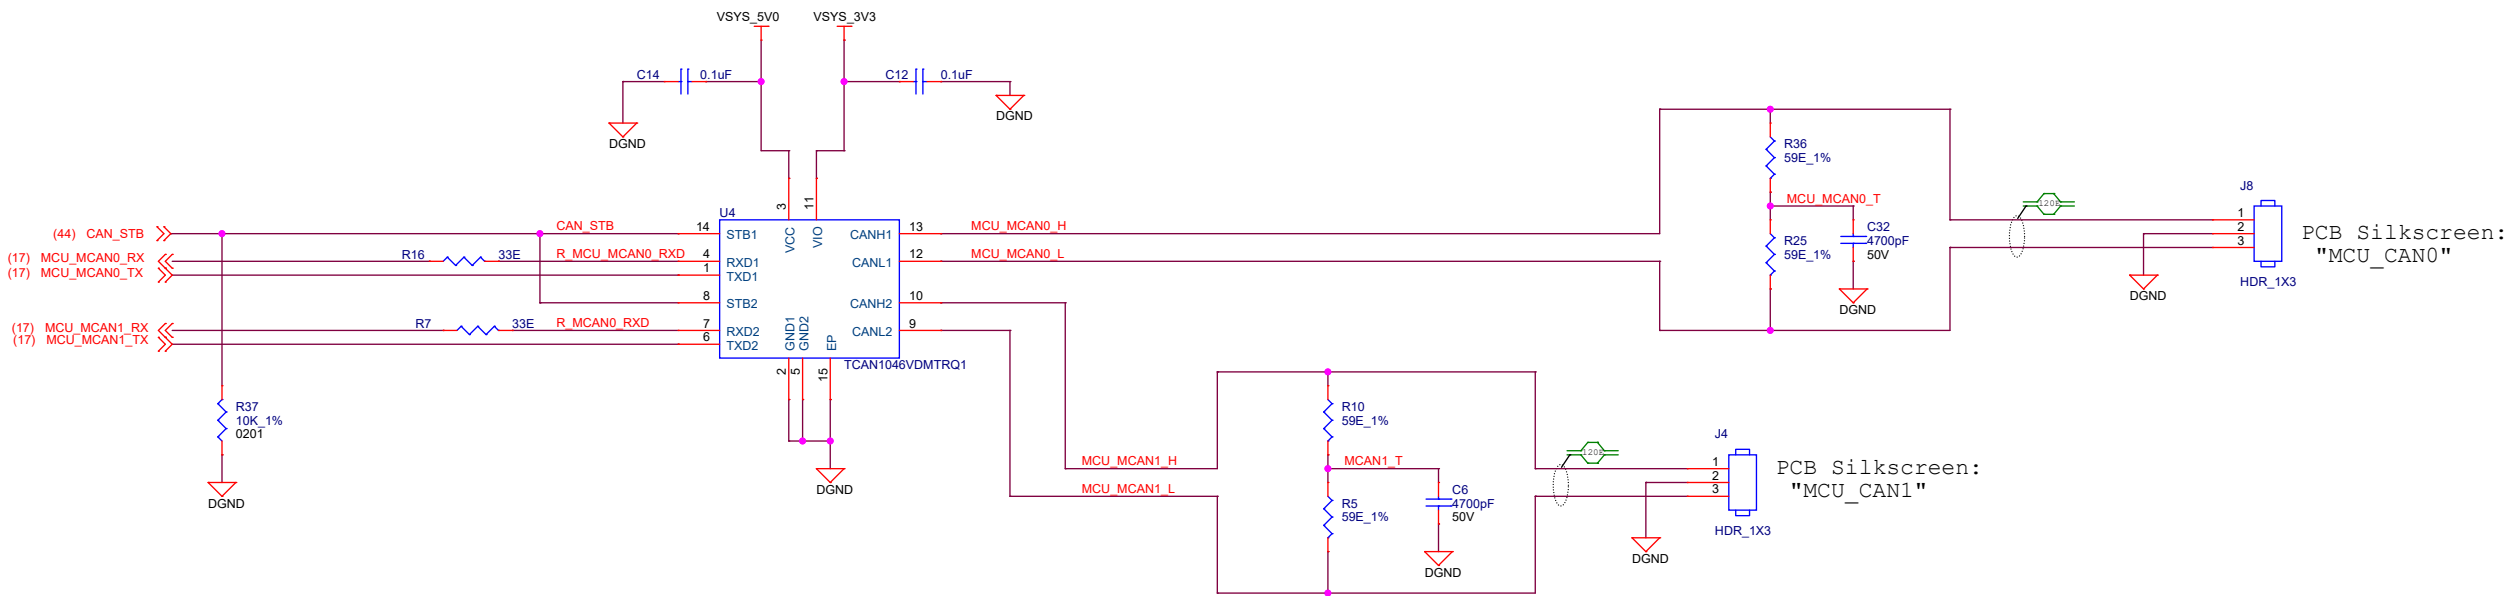


## QUAD PORT CONSOLE



# XDS110 DEBUGGER

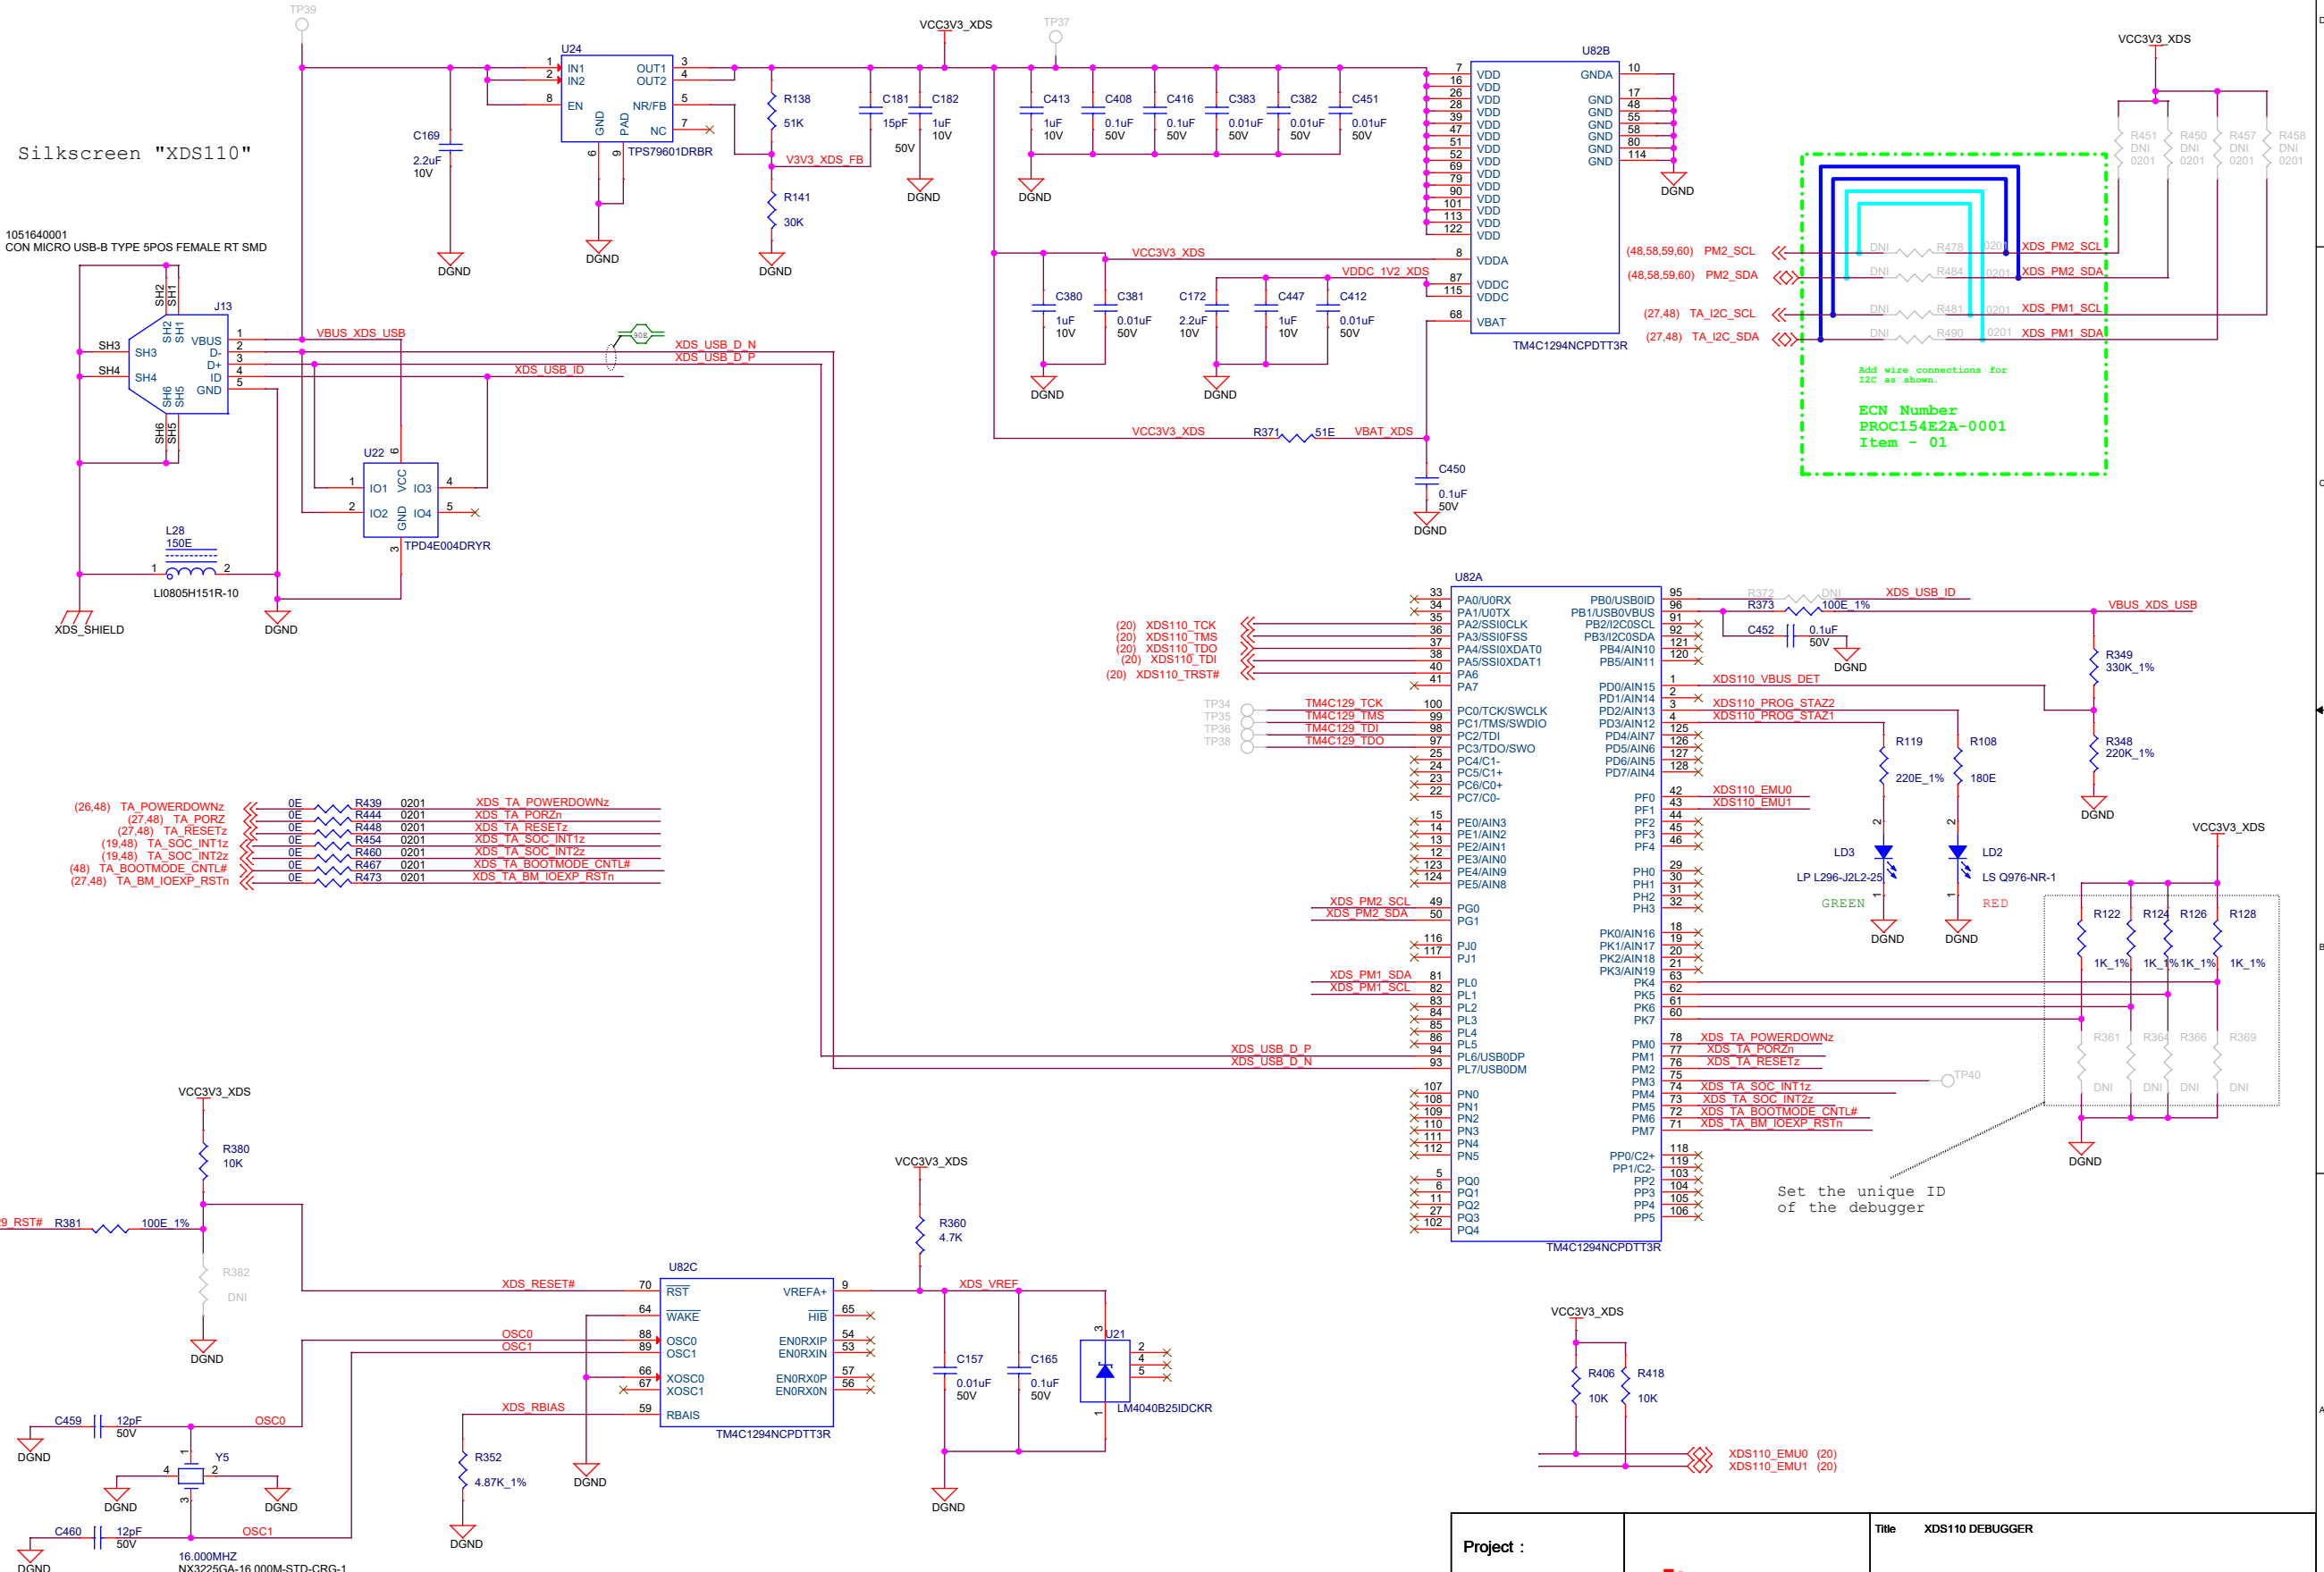

TEST AUTOMATION HEADER

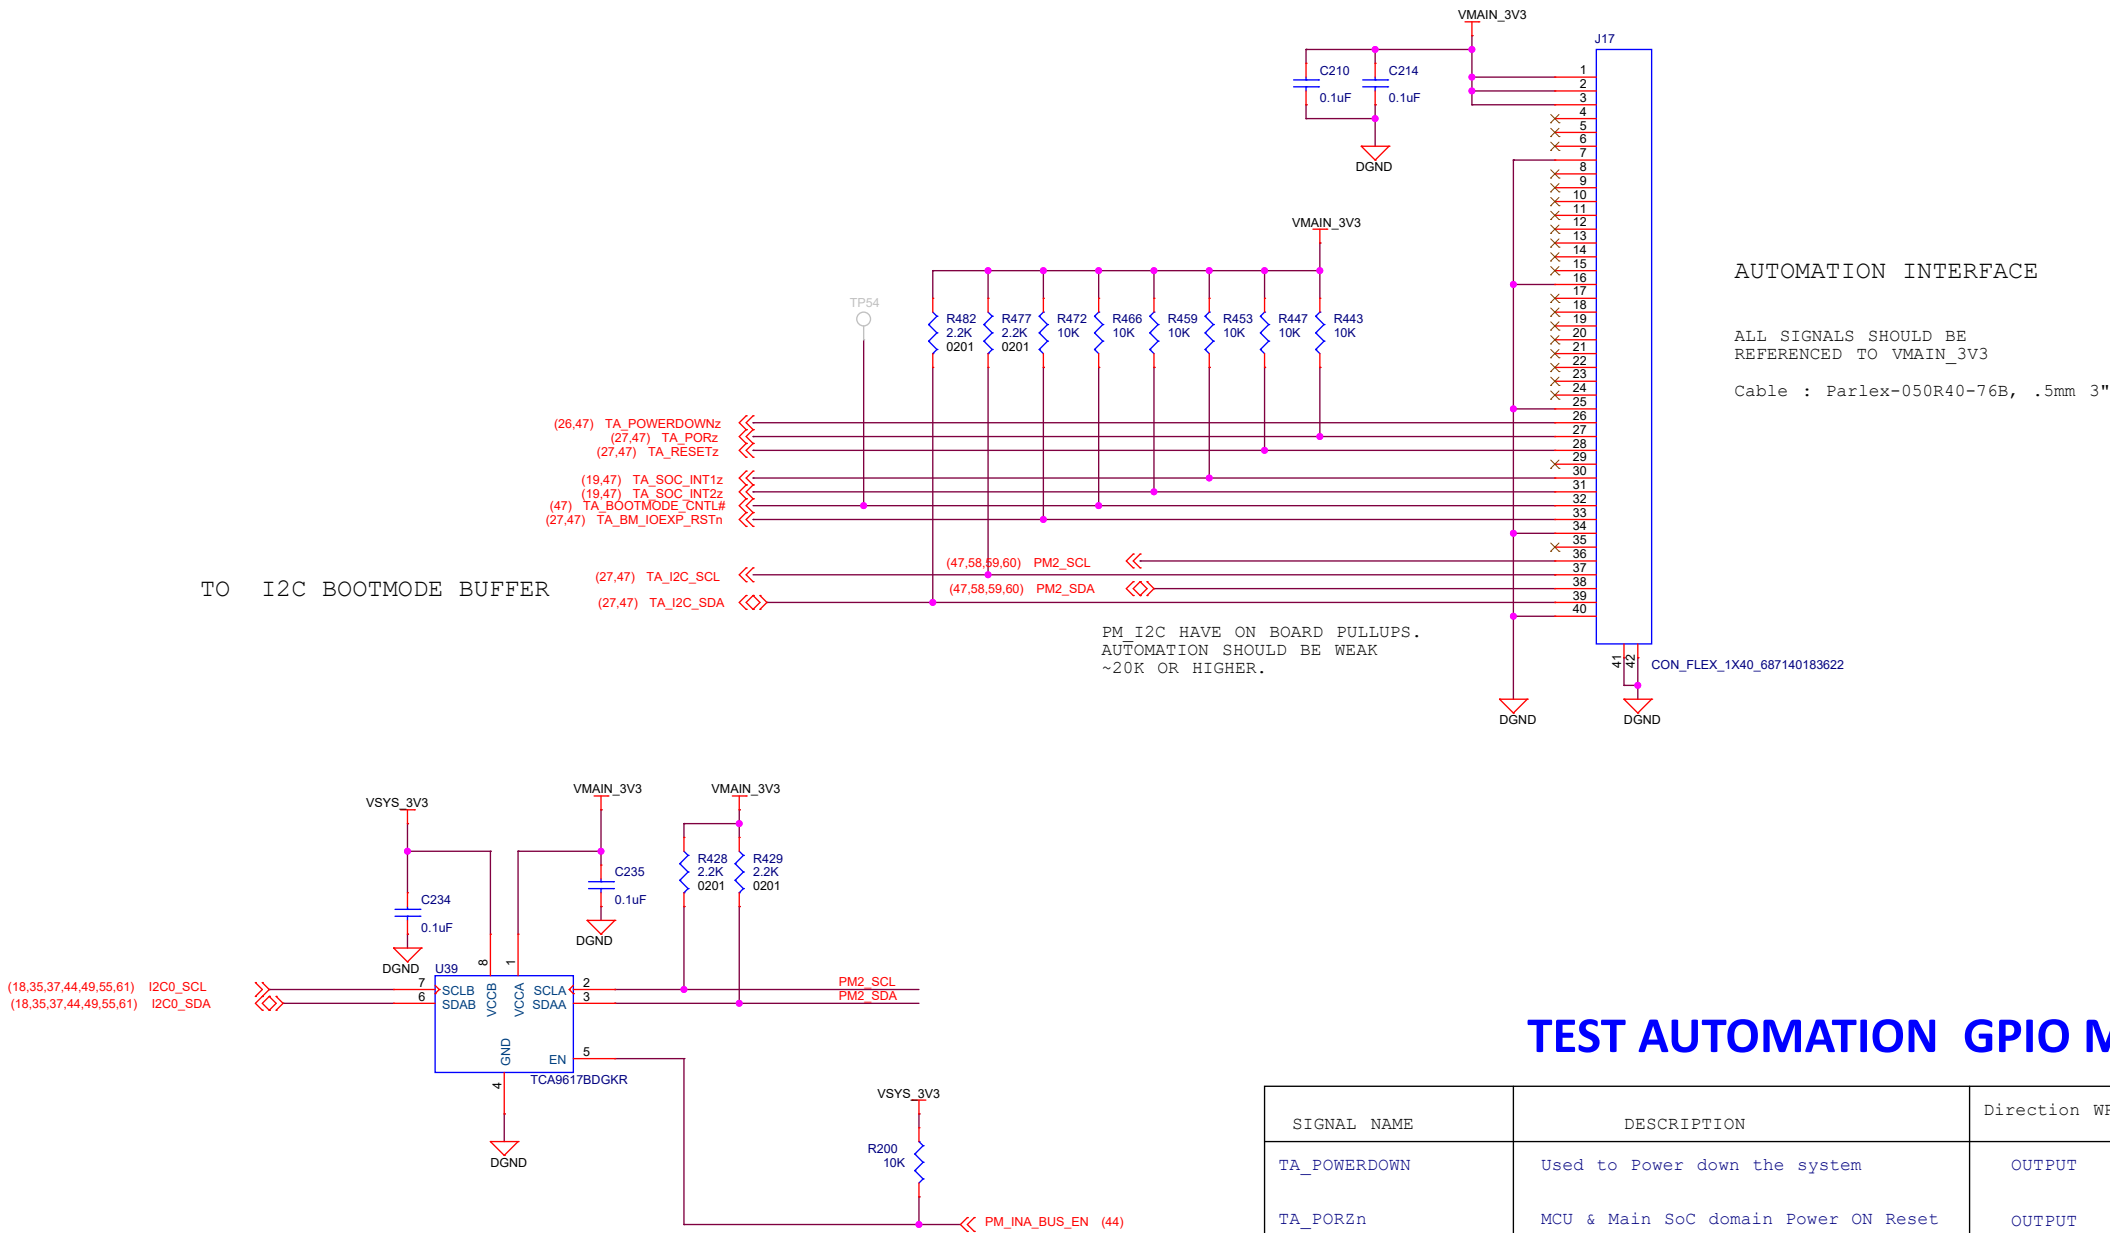


TEST AUTOMATION GPIO MAPPING


| SIGNAL NAME      | DESCRIPTION                            | Direction WRT CTRL | Internal/ External PU/PD states |
|------------------|----------------------------------------|--------------------|---------------------------------|
| TA_POWERDOWN     | Used to Power down the system          | OUTPUT             | External Pullup                 |
| TA_PORZn         | MCU & Main SoC domain Power ON Reset   | OUTPUT             | External Pullup                 |
| TA_RESETz        | SoC Warmreset                          | OUTPUT             | External Pullup                 |
| TA_SOC_INT1z     | Interrupt to SOC                       | OUTPUT             | External Pullup                 |
| TA_SOC_INT2z     | Interrupt to SOC                       | OUTPUT             | External Pullup                 |
| TA_BM_IOEXP_RSTn | Used to Reset the Bootmode IO Expander | OUTPUT             | External Pullup                 |

USB-C Power

EEPROM & PROGRAMMING HEADER

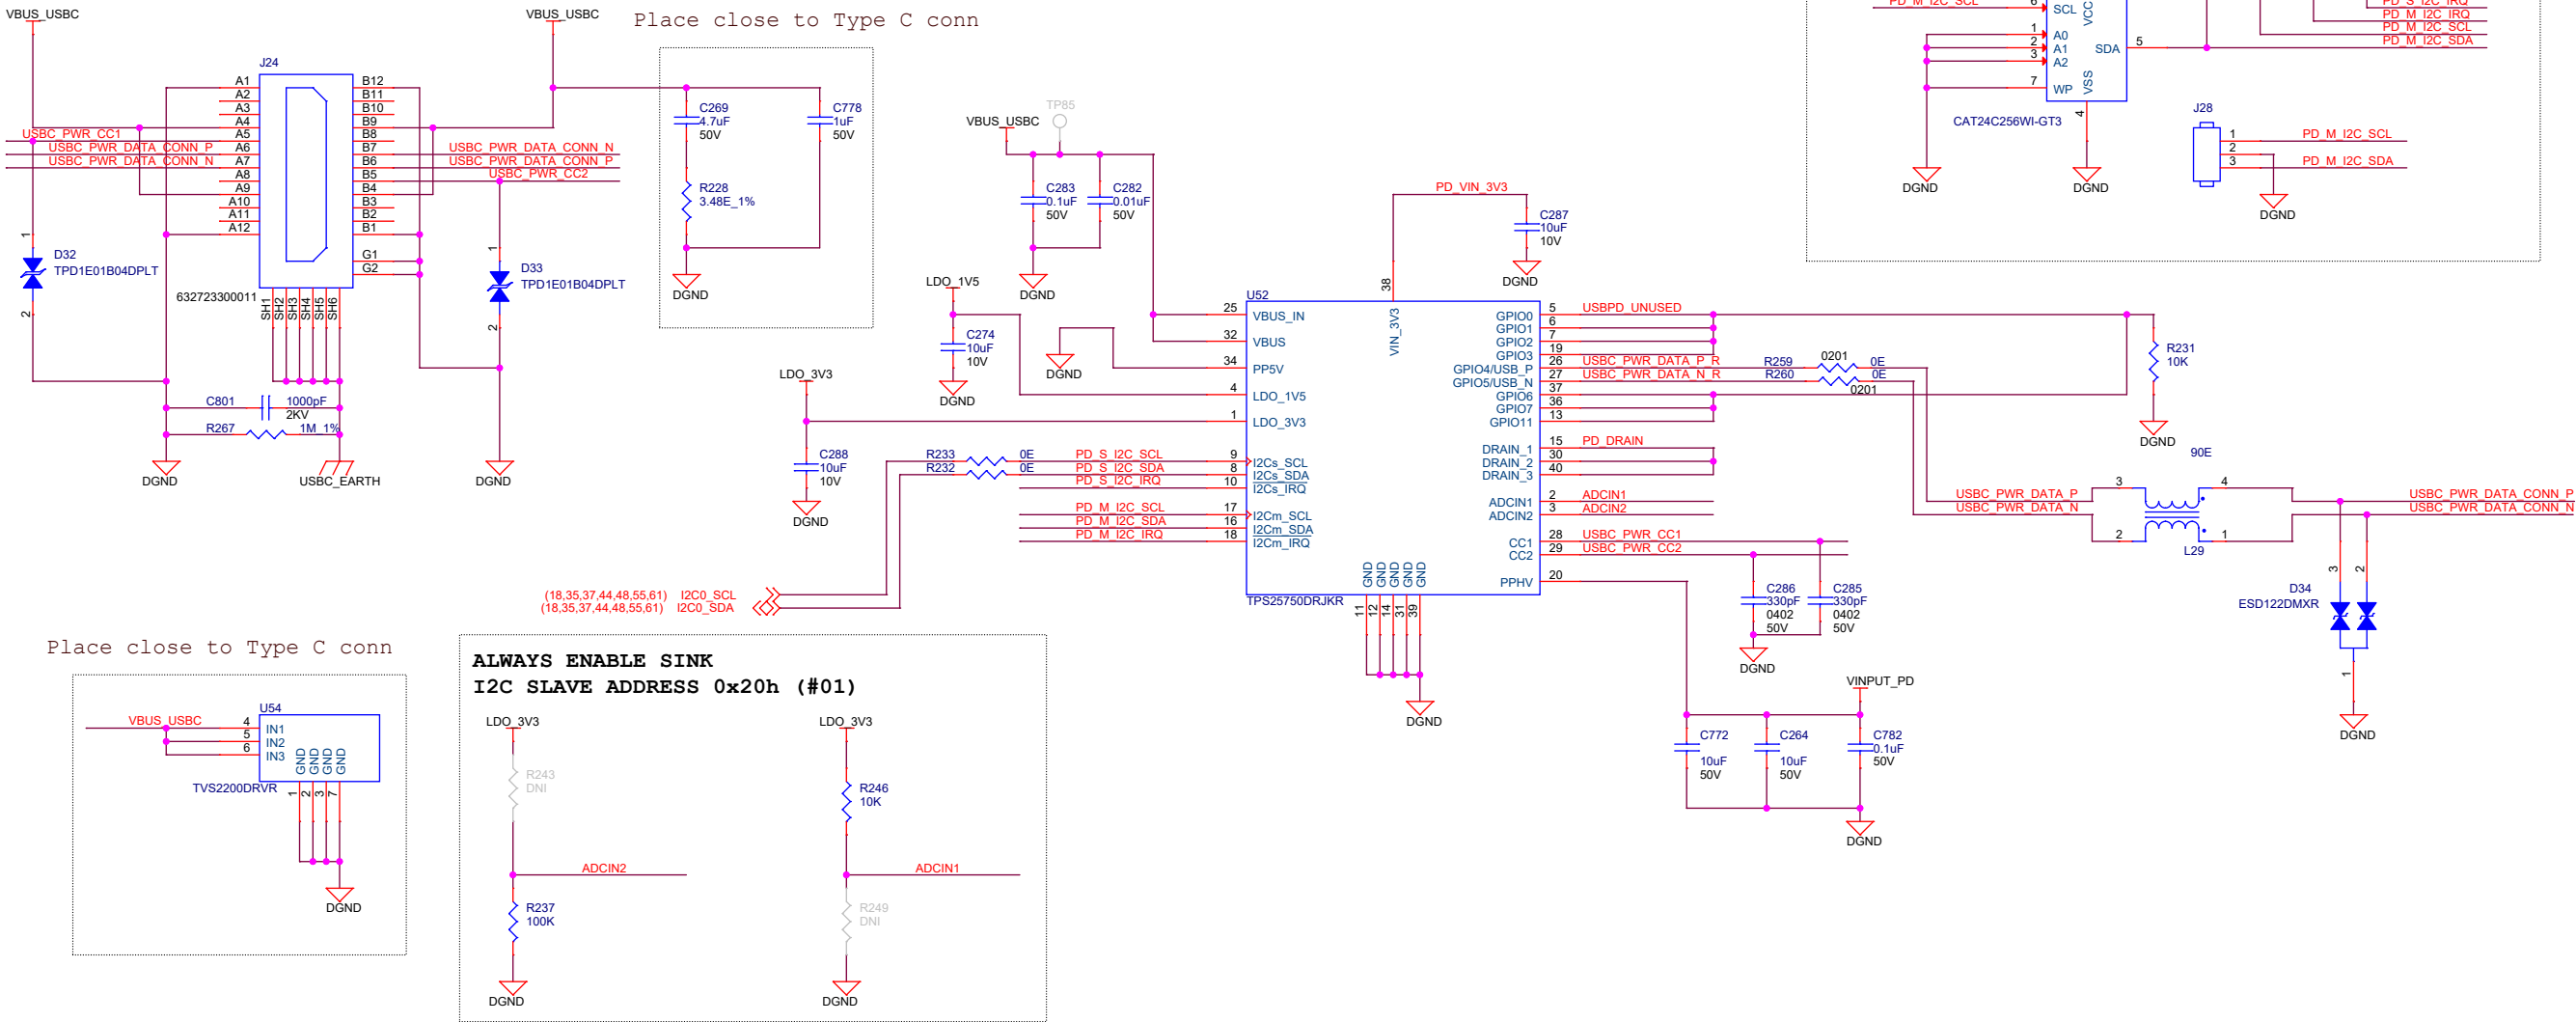


OPTIONAL POWER INPUT

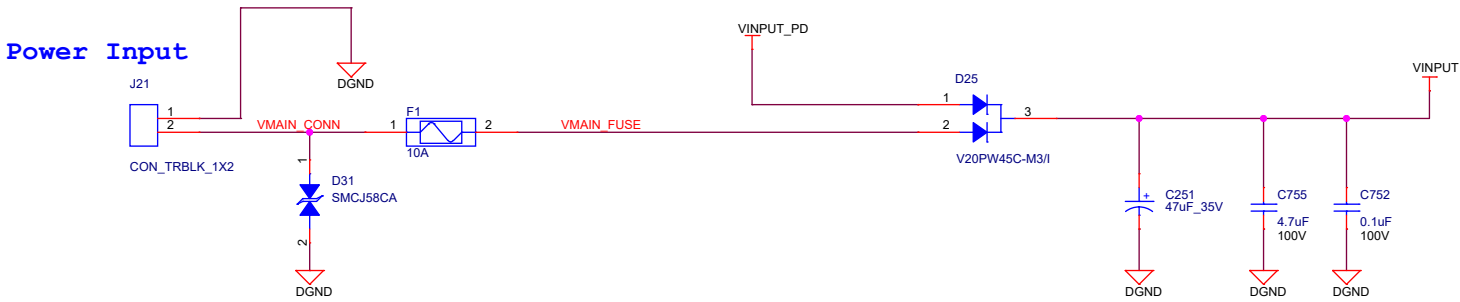

Normal operation Range for VINPUT 20V to 25V.

SILK: POWER IN

Cooling FAN Header

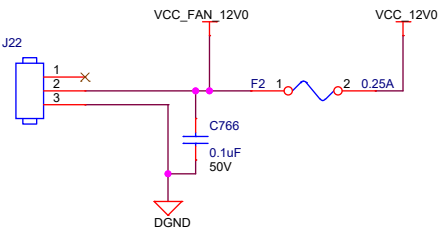


Project :  
AM69 Edge AI Kit



|                   |                          |                |
|-------------------|--------------------------|----------------|
| Title POWER INPUT |                          |                |
| Size              | PROC154E2B 001 SK AM69   | Rev            |
| C                 |                          | E2B            |
| Date:             | Thursday, March 16, 2023 | Sheet 49 of 62 |

POWER SUPPLY #1


TI WEBENCH Simulation Inputs:  
Vin (min) = 15V Vin (max) = 25V  
Vout = 3.3V@30A  
Ta = 25 deg

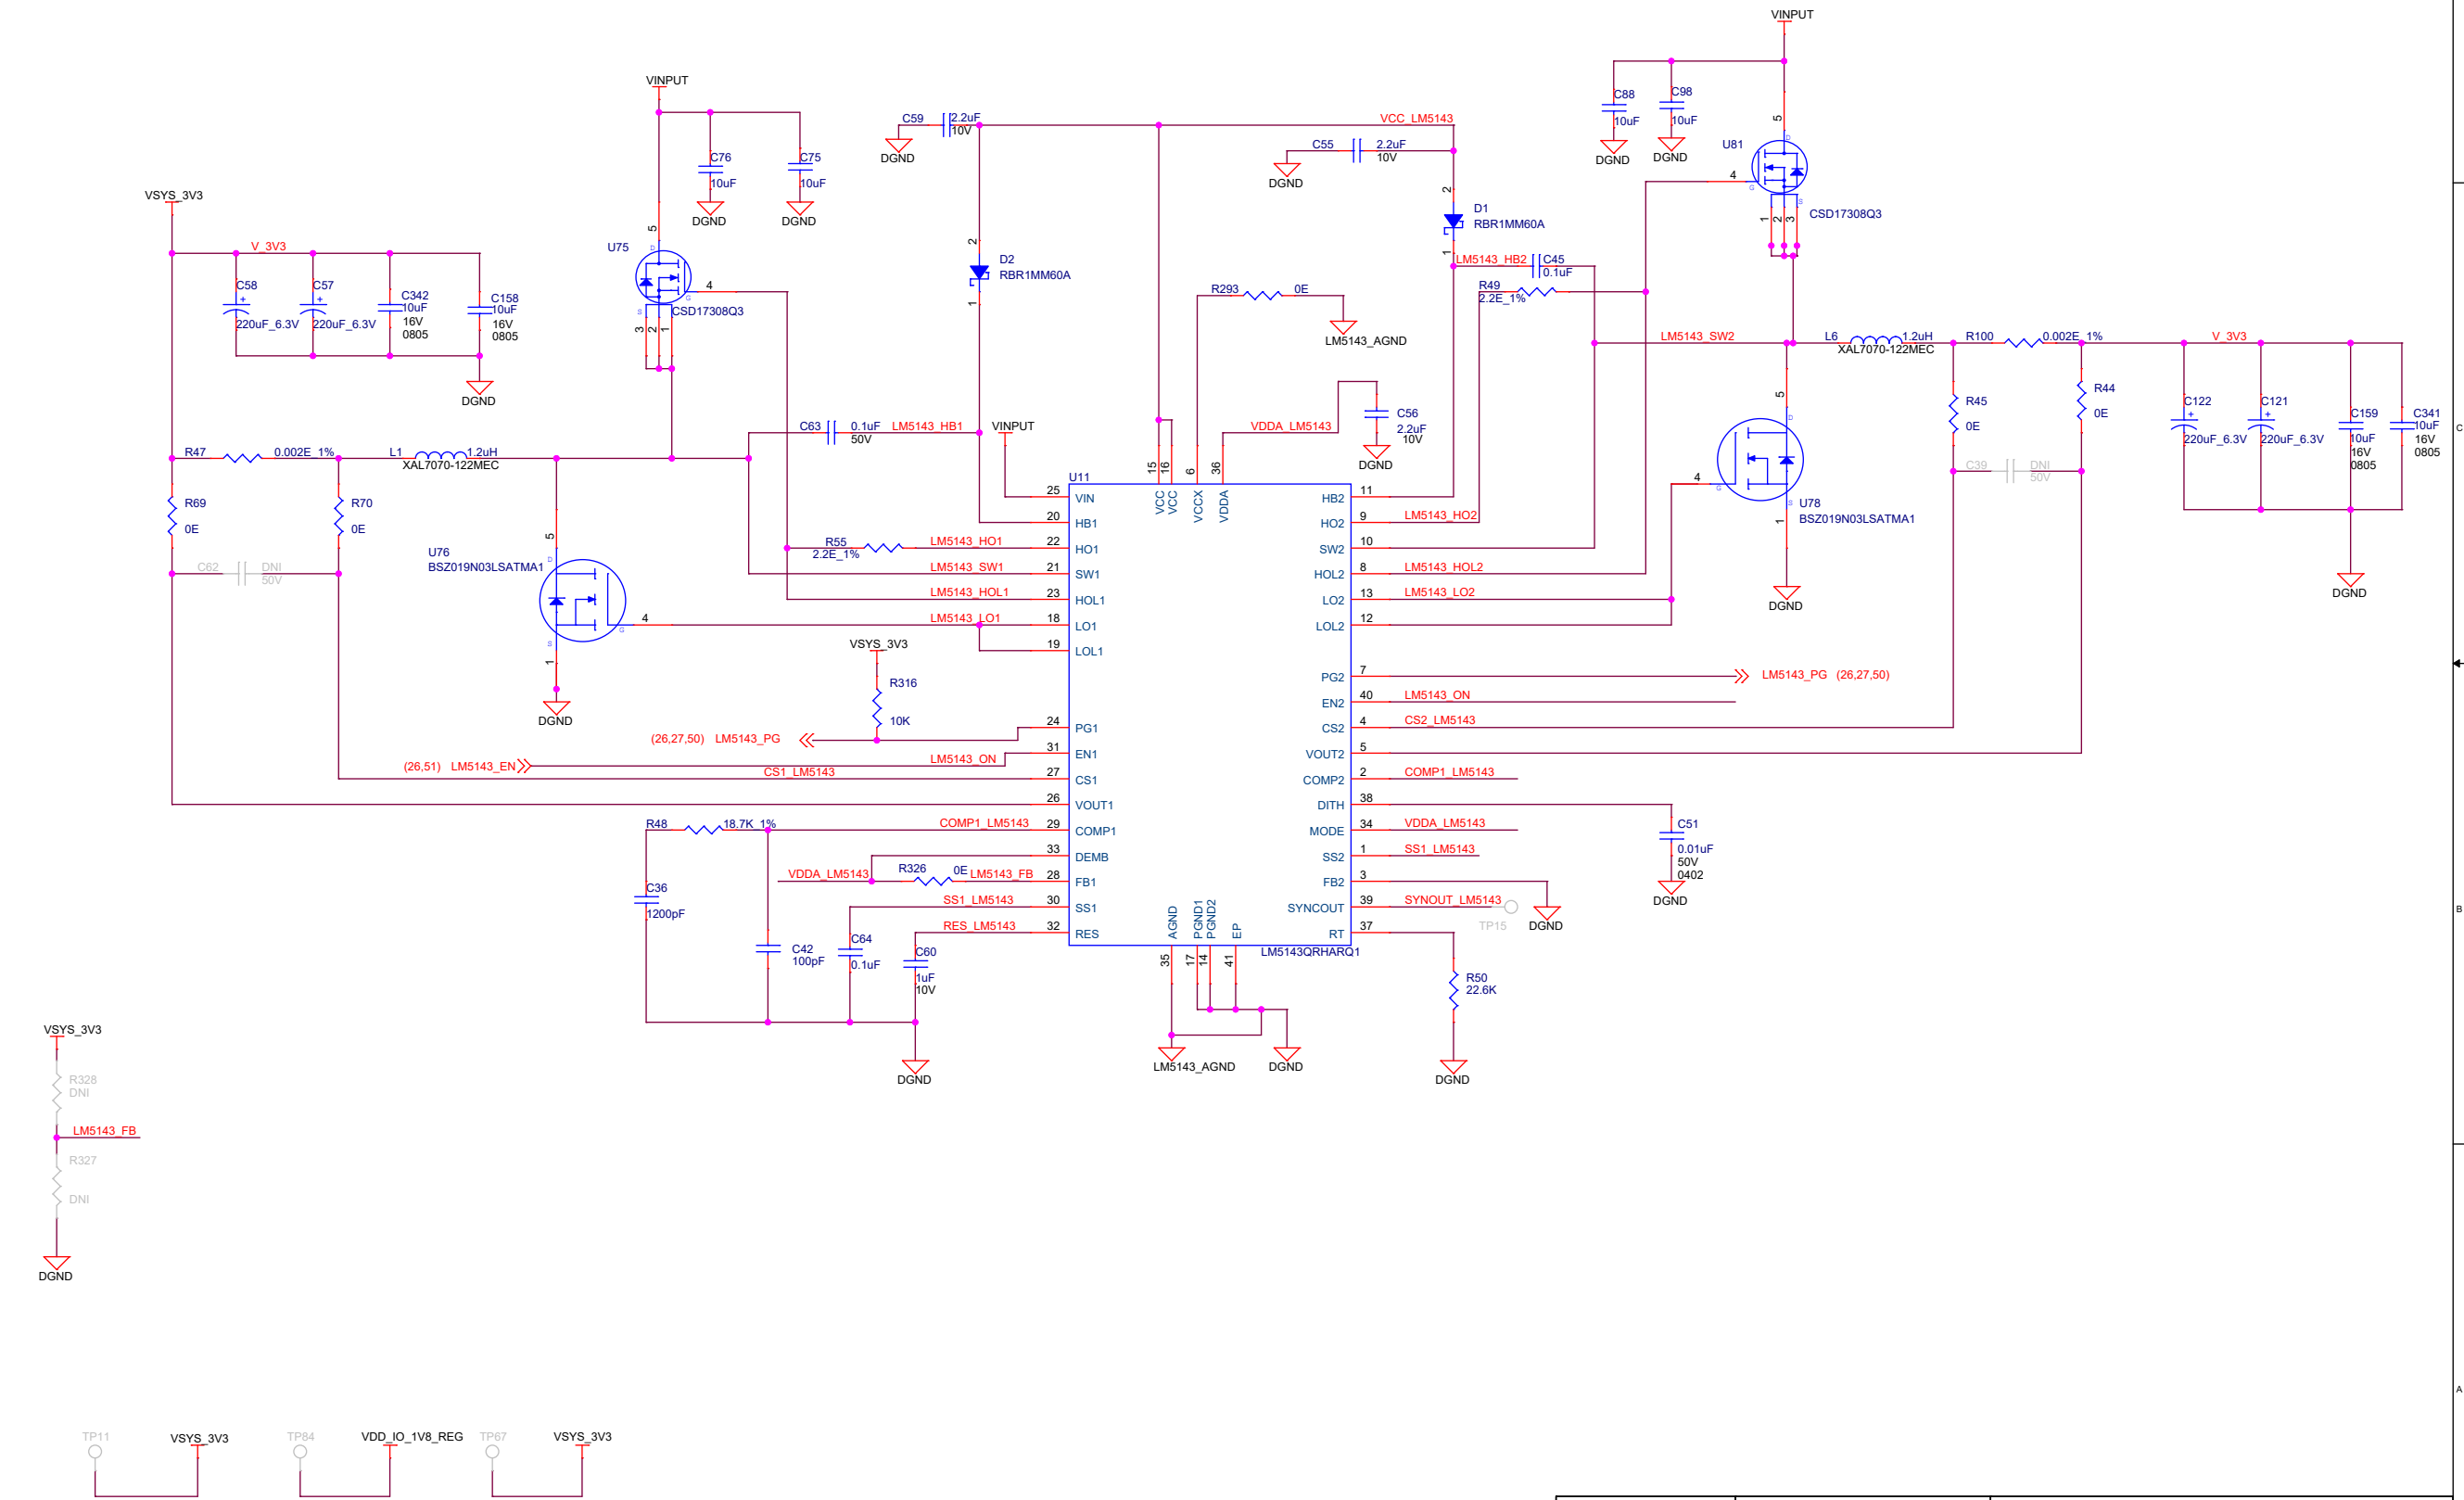

POWER SUPPLY #2


TI WEBENCH Simulation Inputs:  
Vin (min) = 15V Vin (max) = 25V  
Vout = 12V@3A  
Ta = 25 deg

12V GENERATION

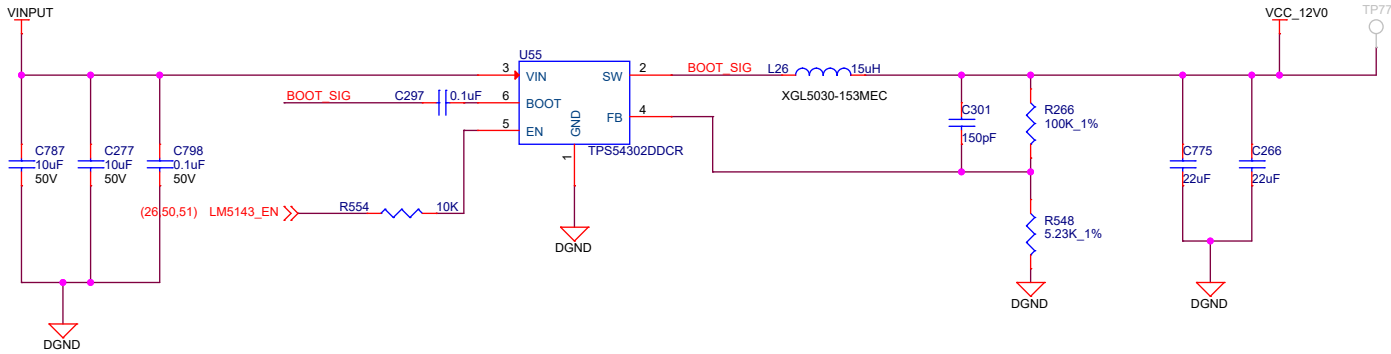

LM61460 5V BUCK REGULATOR  
VinMin = 12V  
VinMax = 25V  
Vout = 5.0V  
Iout = 6A


5V GENERATION

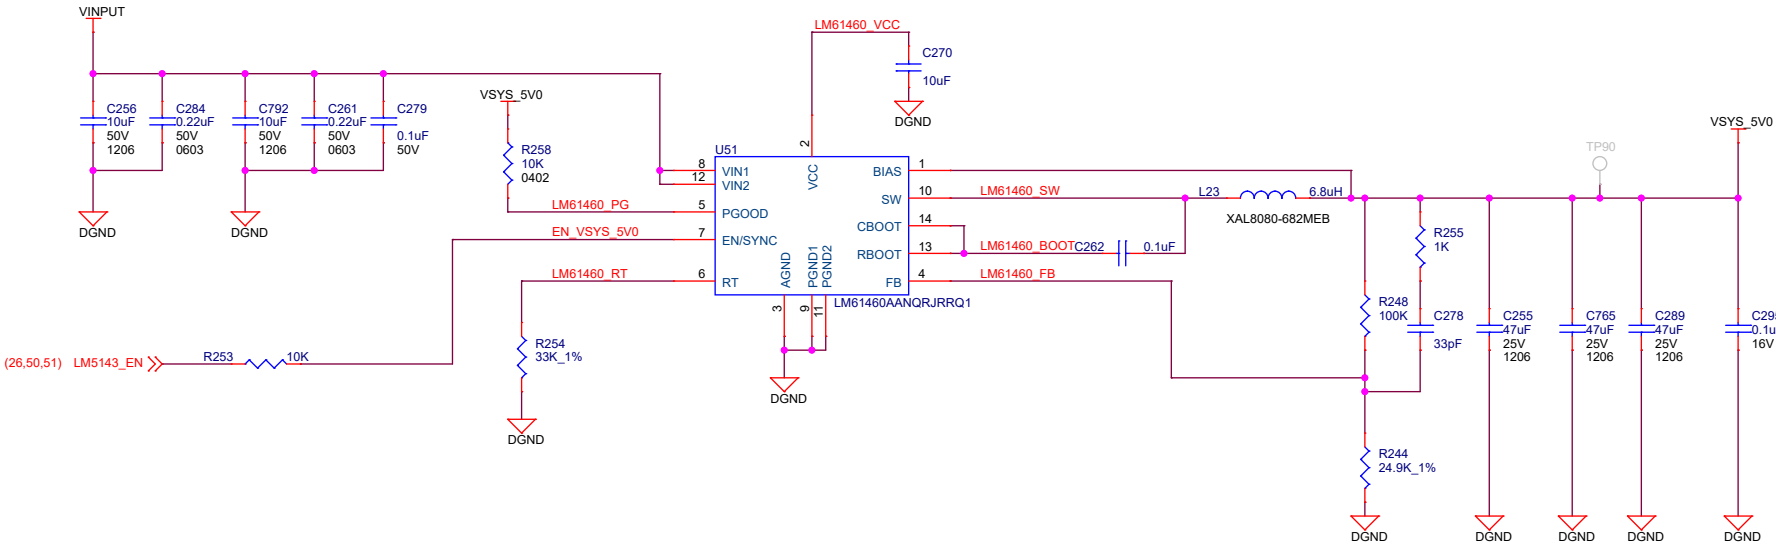

POWER SUPPLY #3


ETHERNET POWER- MCU RGMII

3.3V to 2.5V LDO

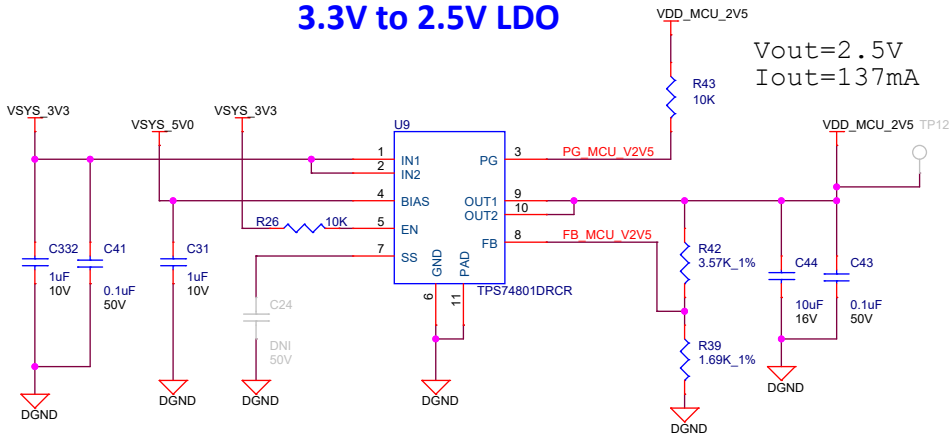


USB HUB POWER & ETHERNET POWER - RGMII1

3.3V to 1.1V LDO

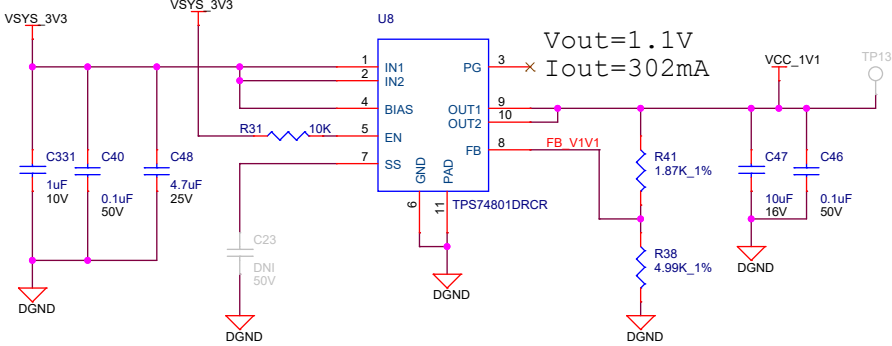


PCB NOTE:Keep 4.7uF capacitor close to BIAS pin


SYSTEM MANAGEMENT 3.3V REGULATOR

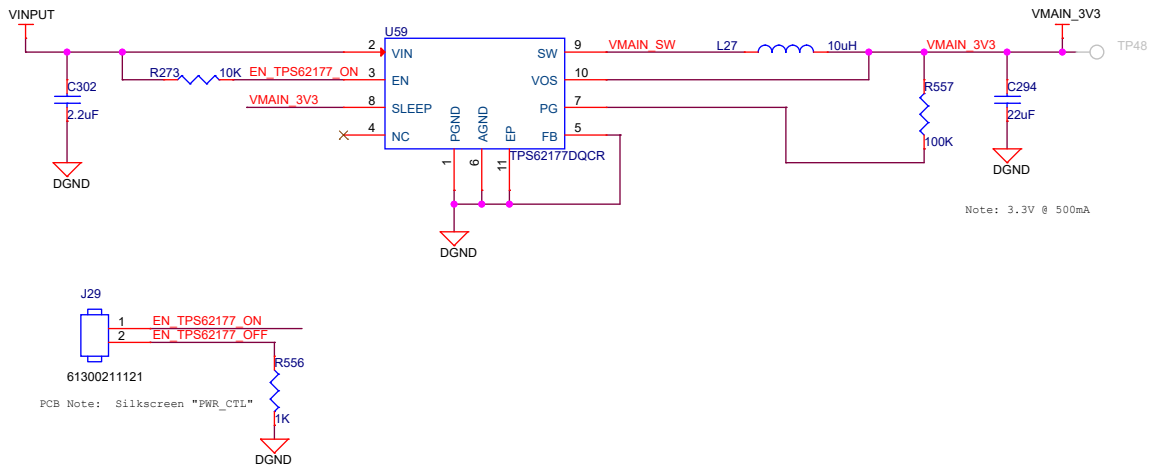

POWER INDICATION LED's



GROUND TEST POINTS

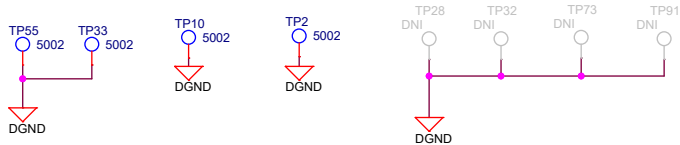


PCB NOTE: Spread the SMD test points Top and Bottom Side of PCB

# VDD\_CPU\_AVS High-Current Power Stage A (HCPS-A)


Note: Via keepout areas need to be applied to positive & negative remote sense traces/nets (i.e. "VDD\_XXX\_HCAPS\_VOSNS"/\_GOSNS") both at the buck & along diff trace routing path between buck "xOSNS" pins to ensure no unwanted power or Gnd connections are made before reaching the desired remote sense location where only 1x power & Gnd connection should be made

Line to Shape keepout needs to be given in layout for VDD\_CPU\_AVS and DGND feedback traces

Buck EN control aligned to VDA\_DLL\_0V8 for power seqs.  
Buck EN is bi-directional pin that both enables and reports status, see DS for details.

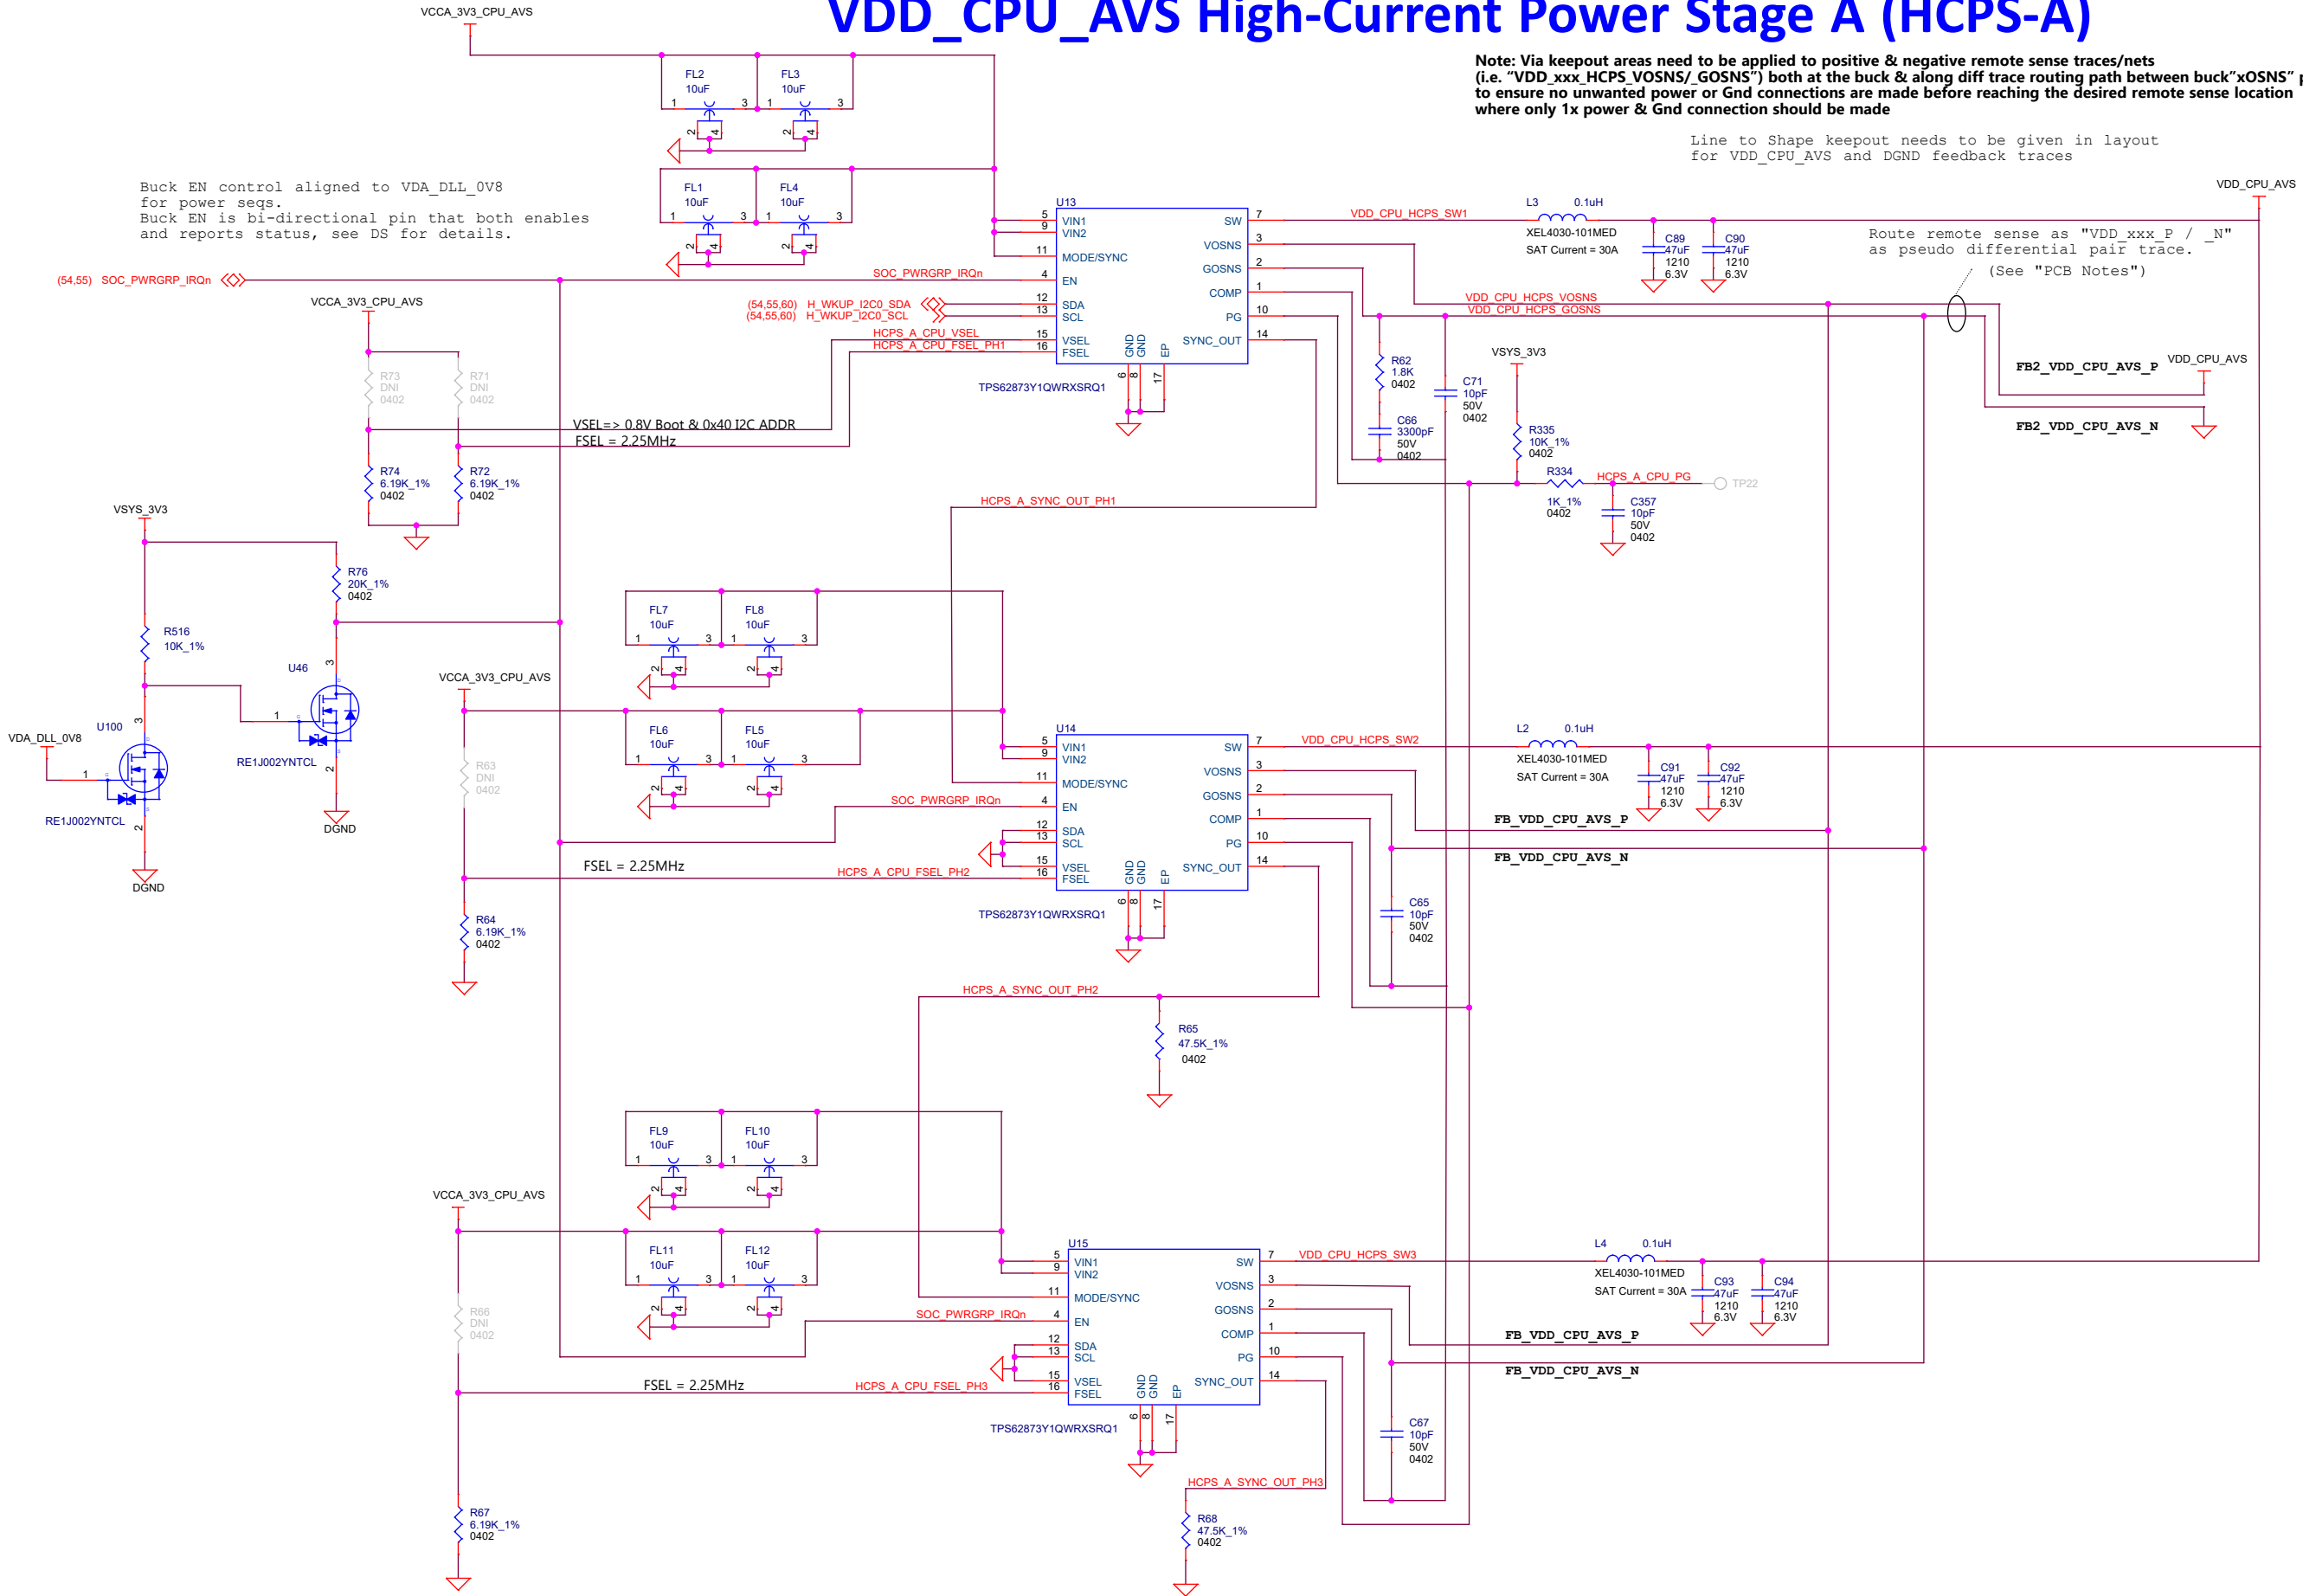

# VDD\_CORE\_0V8 High-Current Power Stage A (HCPS-B)

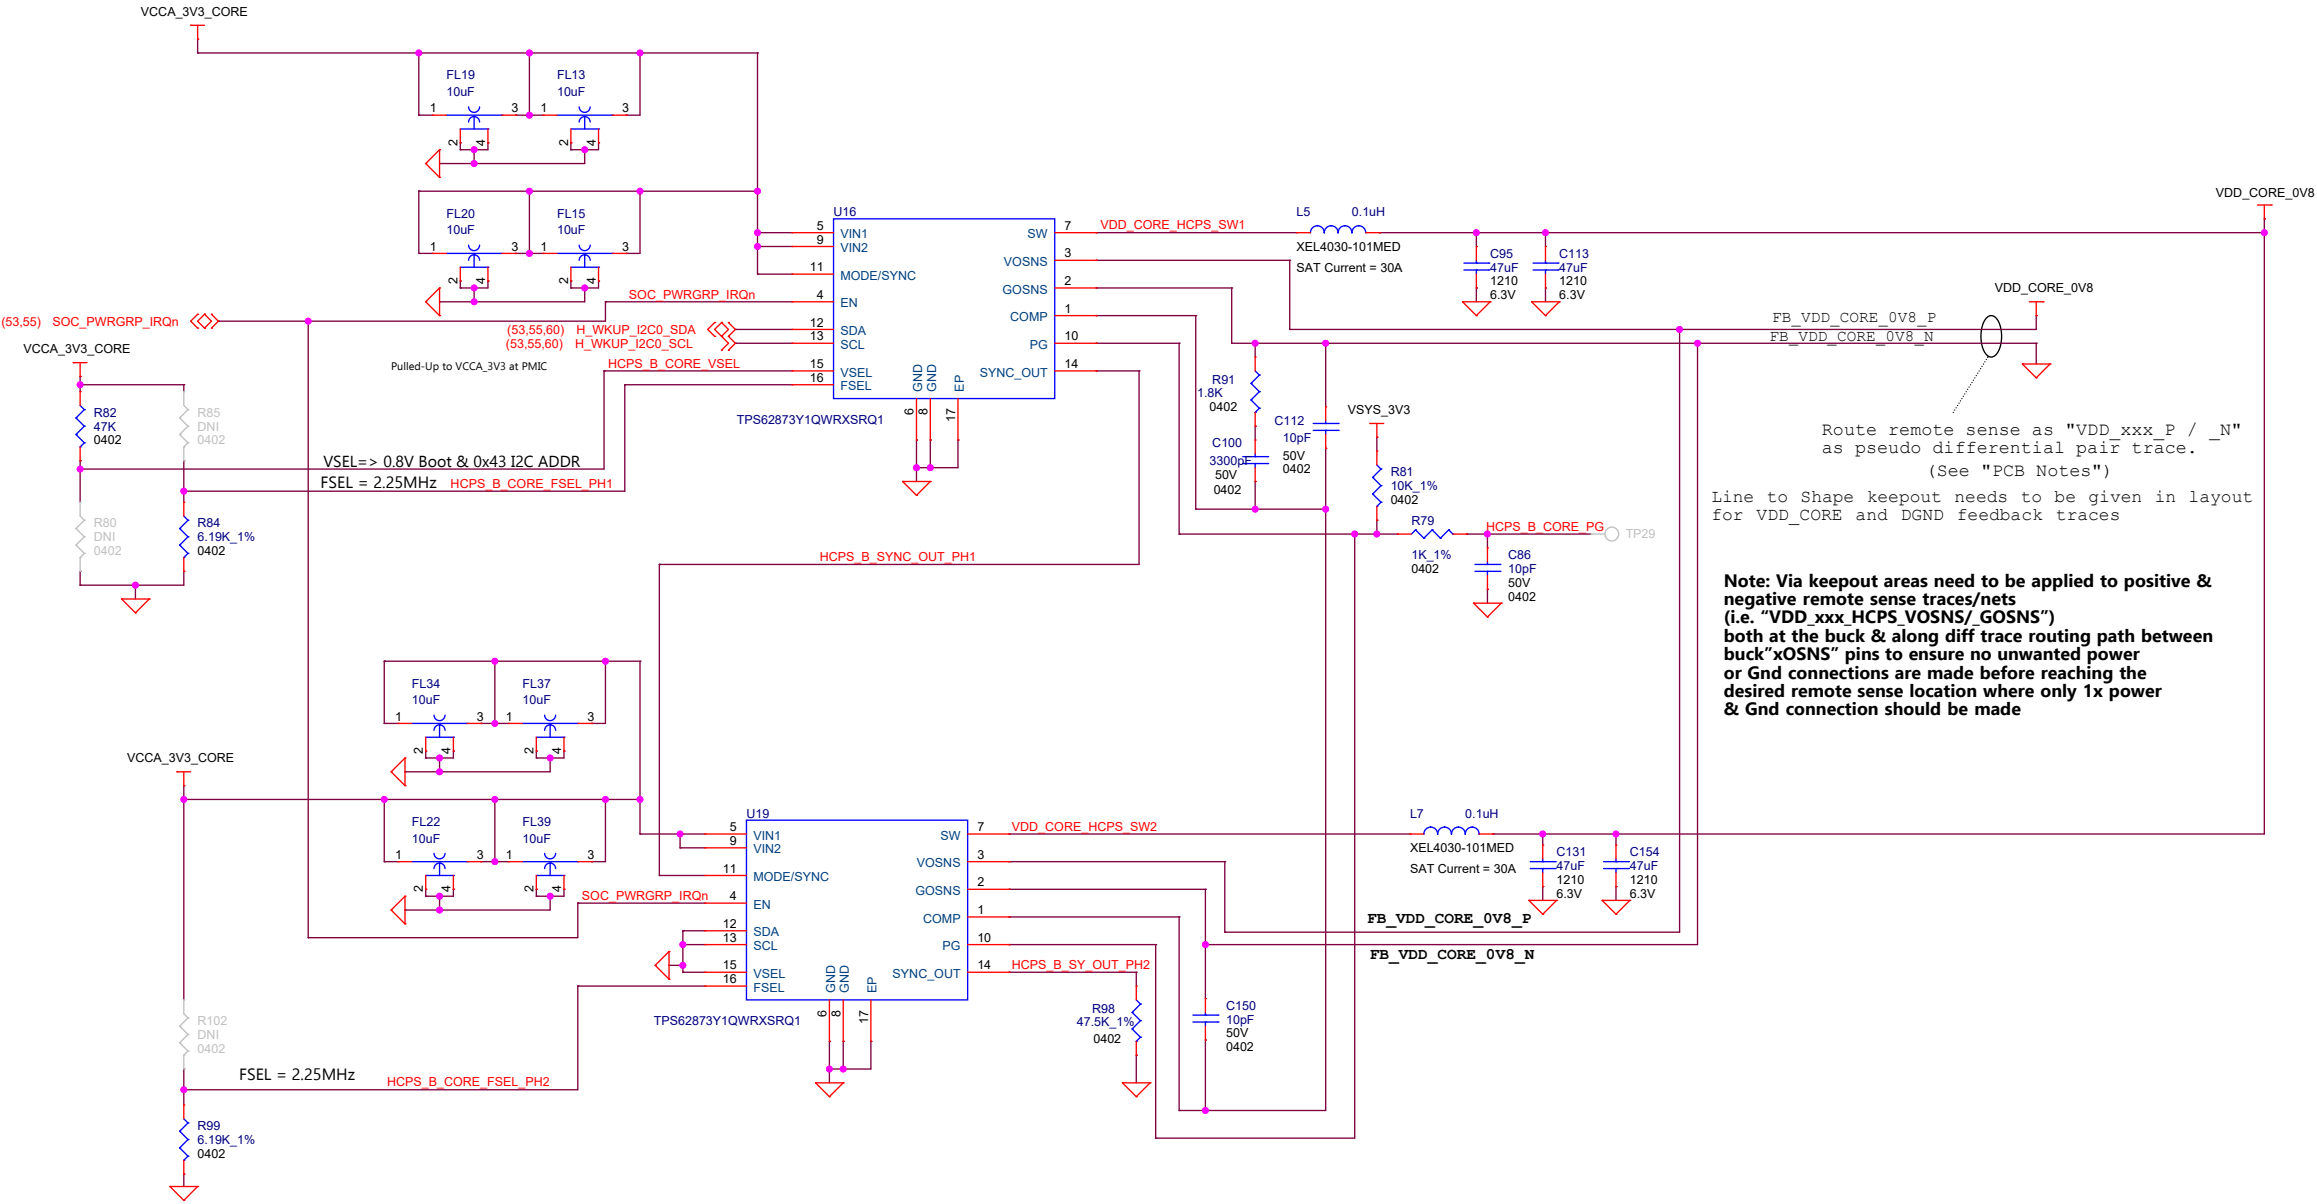

PMIC

"PCB Notes":  
For multi-phase Buck converter configs, route remote sense feedback as follows:  
1. Use pseudo differential pair traces on same layer & next to primarily power plane segment. Avoid routing near to any noisy/switching signals.  
2. Ensure only 2x Point of Load (PoL) vias connect sense trace to Pwr & Gnd planes near the middle of SOC's power ball group.  
3. Ensure only PoL vias connect sense traces to Pwr or Gnd planes. All other vias (at buck component) must have Pwr & Gnd planes isolated.  
4. Trace widths = 4-8mil & separation distance = 8-50mil, try to keep traces near each other as best as possible.

For single-phase Buck converter configs, route remote sense feedback as follows:  
1. Use single-ended traces on same layer & next to primarily power plane segment as best as possible. Avoid routing near to any noisy/switching signals.  
2. Ensure only 1x PoL via connects sense trace to Pwr plane near the middle of SOC's power ball group.  
3. Ensure only PoL vias connect sense traces to Pwr or Gnd planes. All other vias (at buck component) must have Pwr & Gnd planes isolated.  
4. Trace widths = 4-8mil.


Route as Pseudo diff pair traces (See "PCB Notes")

Note: Keepout needs to be provided for the VDD\_DDR\_1V1 and Gnd vias of the feedback pins connecting to the PMIC.

Line to Shape keepout needs to be given in layout for VDD\_DDR\_1V1 and DGND feedback traces







PMIC-A uses default I2C ADDR: 0x48, 0x49, 0x4A & 0x4B

LDOs

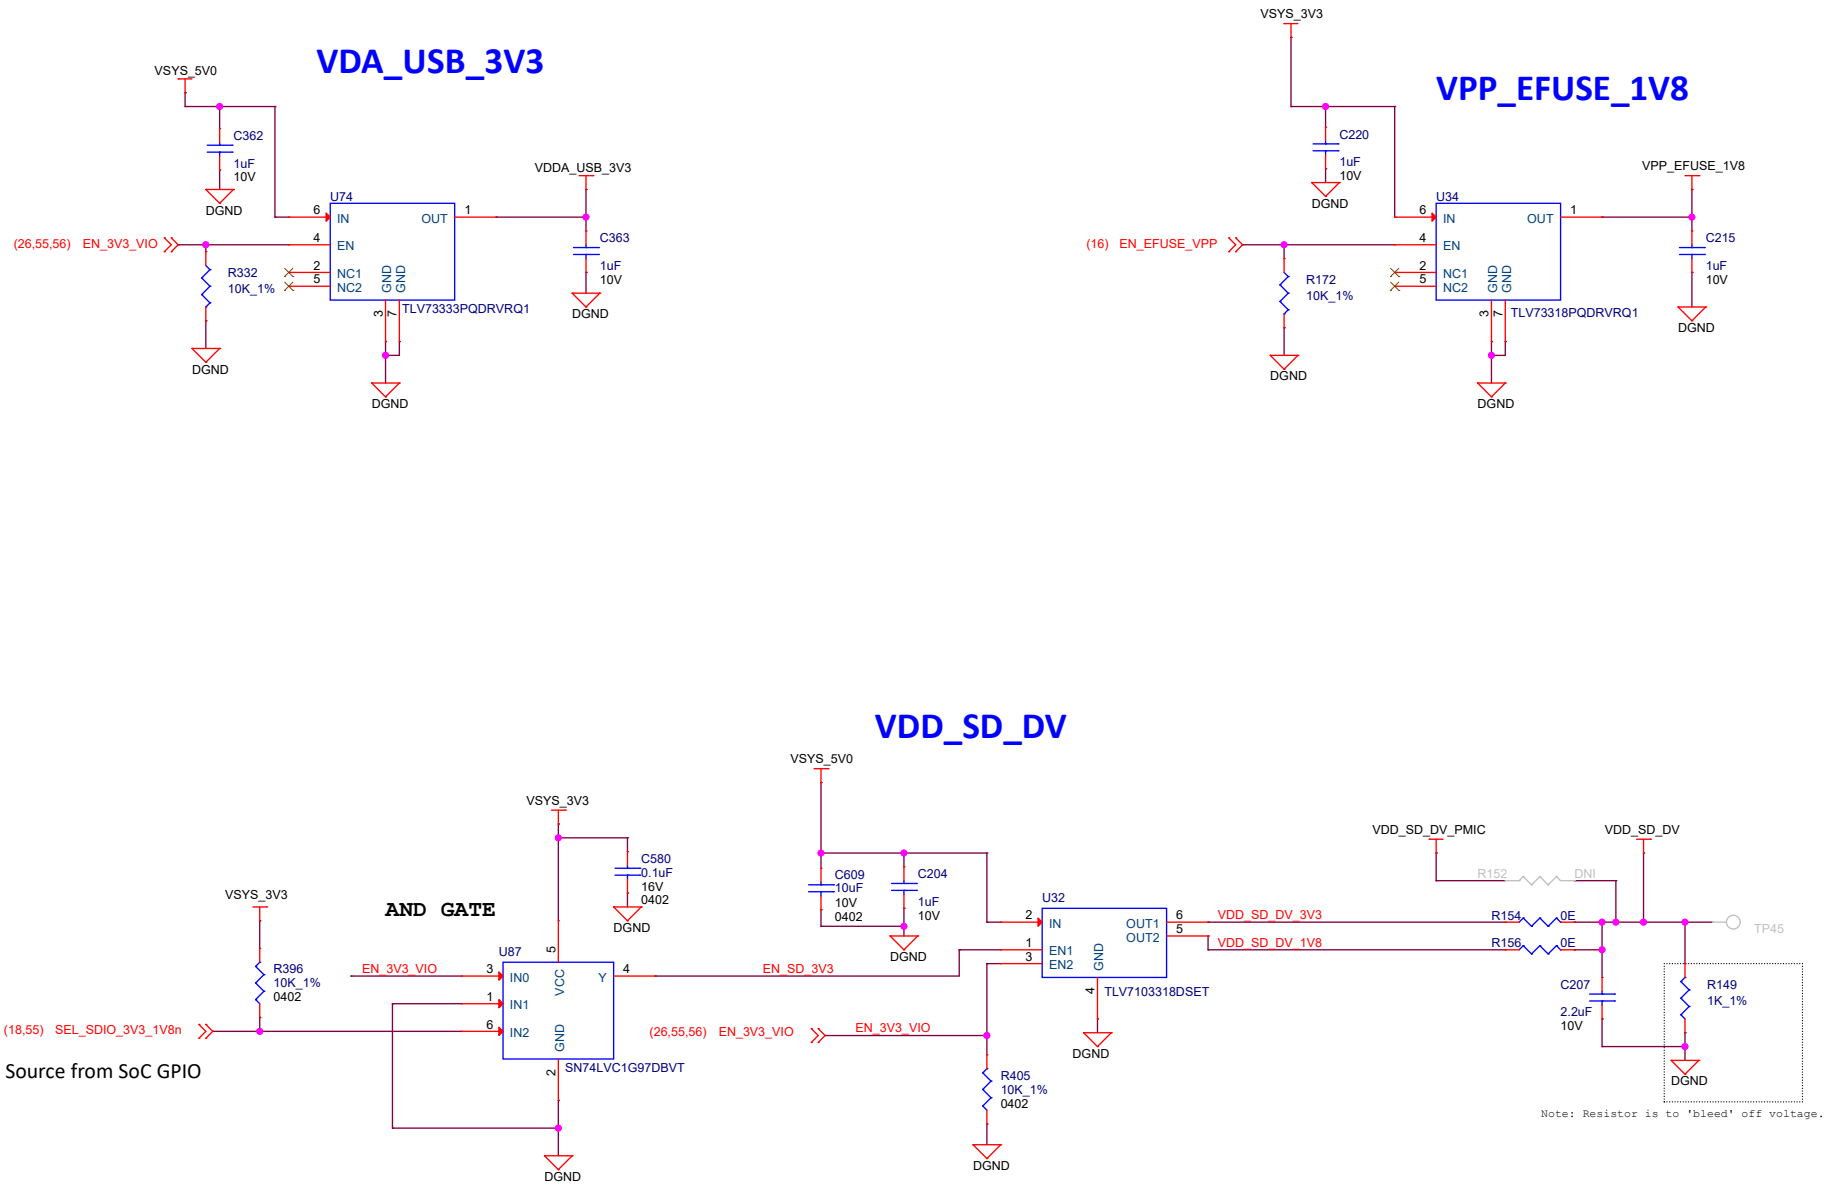


# SOC Current Sense Resistors

## CORE, AVS and DDR input supply sense resistors

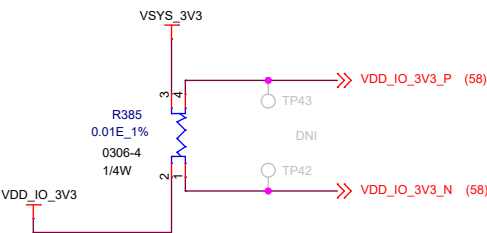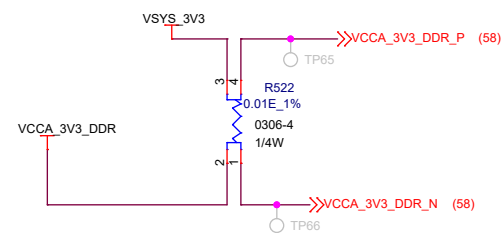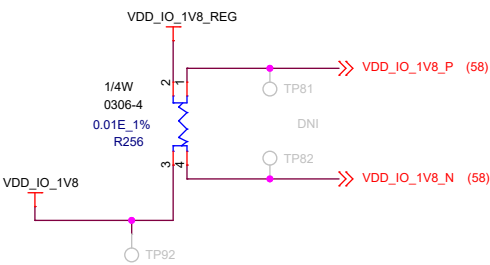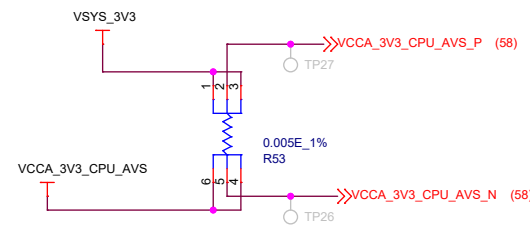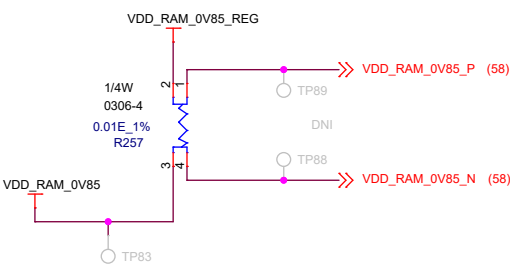
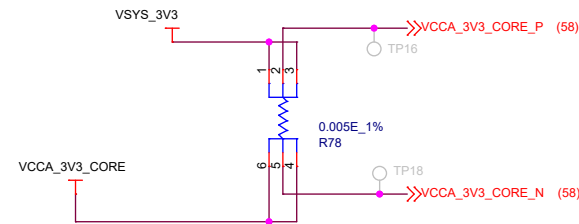


PCB Note: Place all SMT TPs  
on PCB top-side & on top of via at  
Bd-to-Bd connector

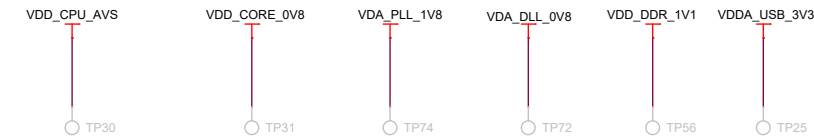







Note: The design supports current/voltage measurements using either INA226 or INA231. The SK will be assembled with either INA226 or INA231, but not both (implemented via dual or stacked PCB footprint). These two INA devices are register compatible- so functionality and performance should not be impacted with either INA

## CURRENT MONITORS - INA226

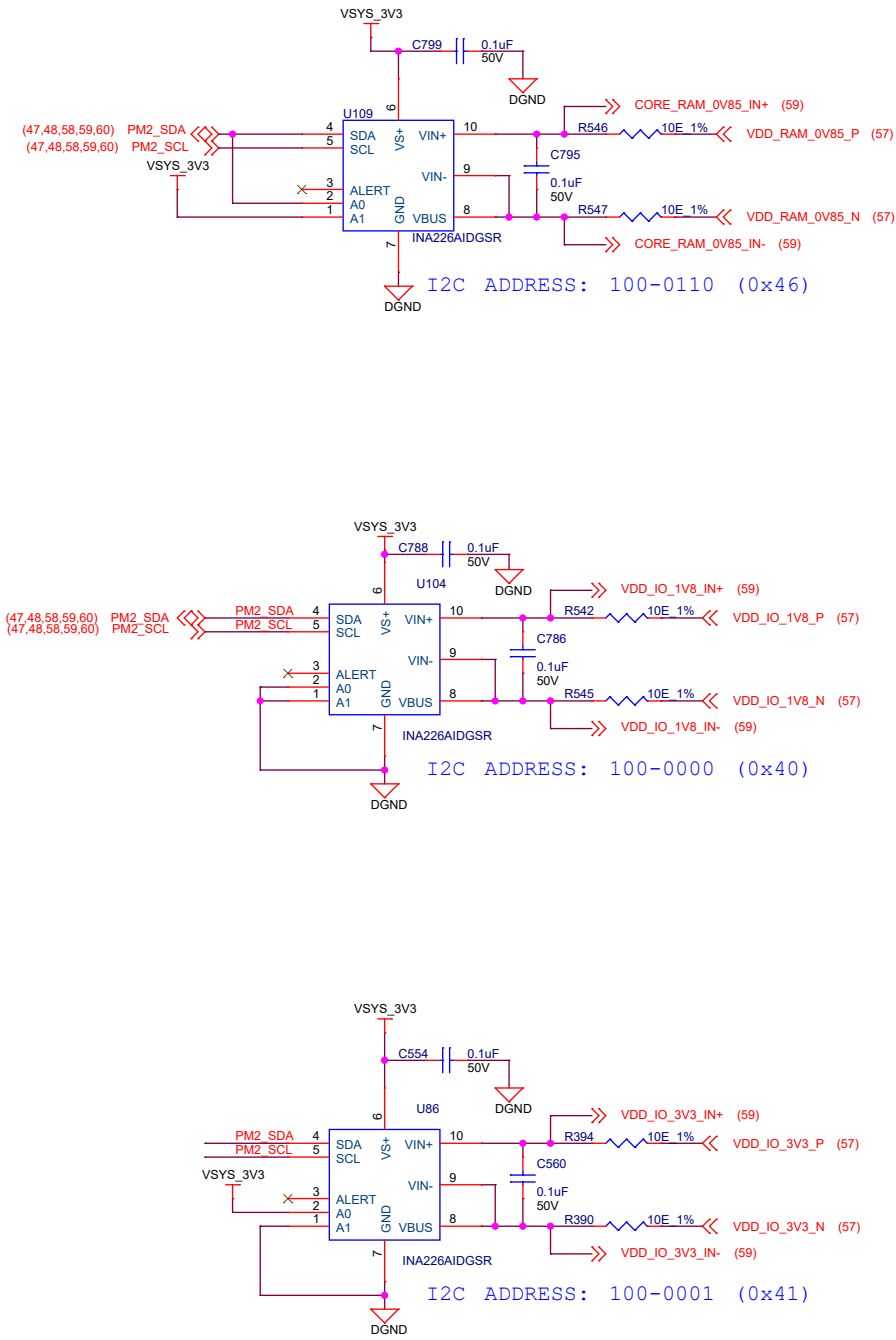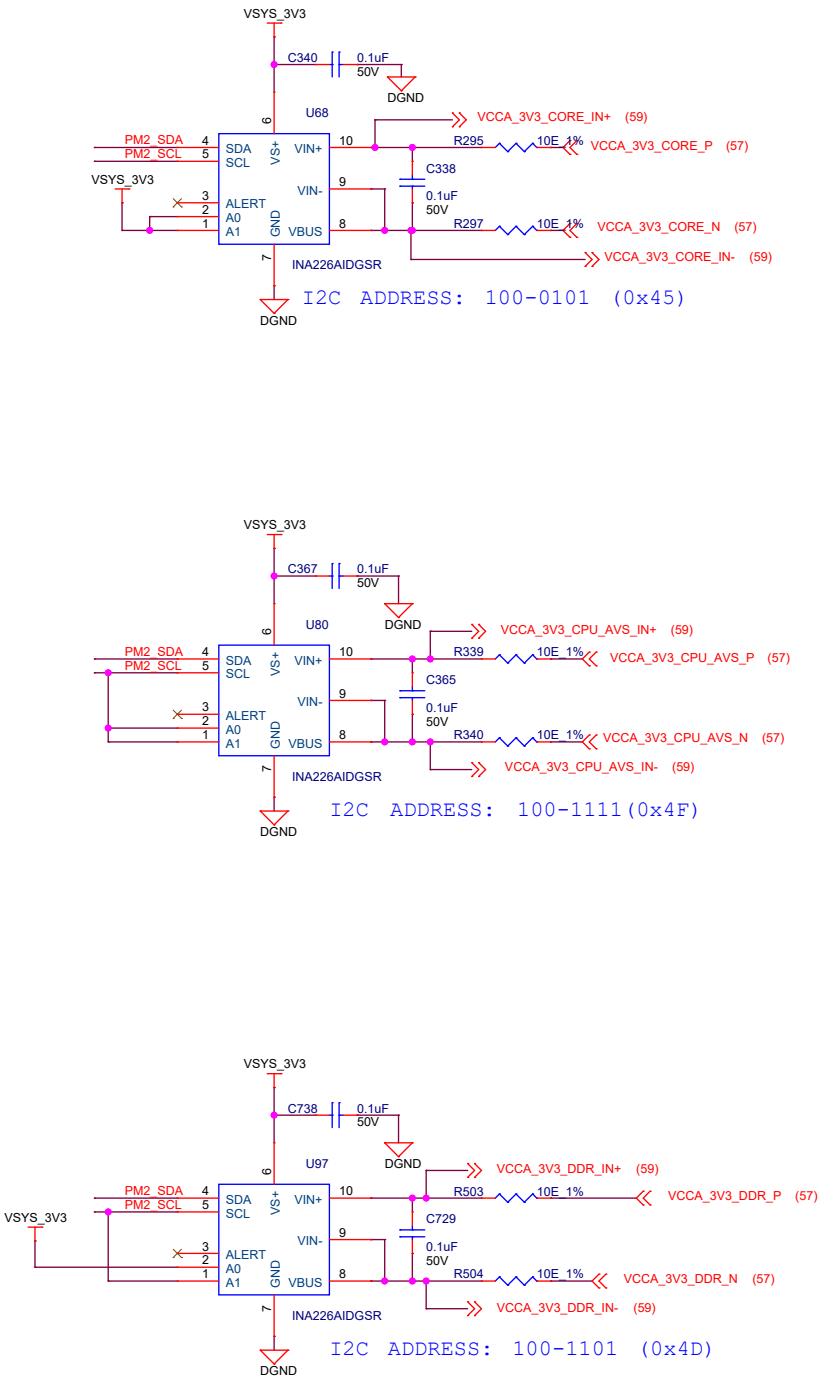


Note: The design supports current/voltage measurements using either INA226 or INA231. The SK will be assembled with either INA226 or INA231, but not both (implemented via dual or stacked PCB footprint). These two INA devices are register compatible- so functionality and performance should not be impacted with either INA


CURRENT MONITORS - INA231

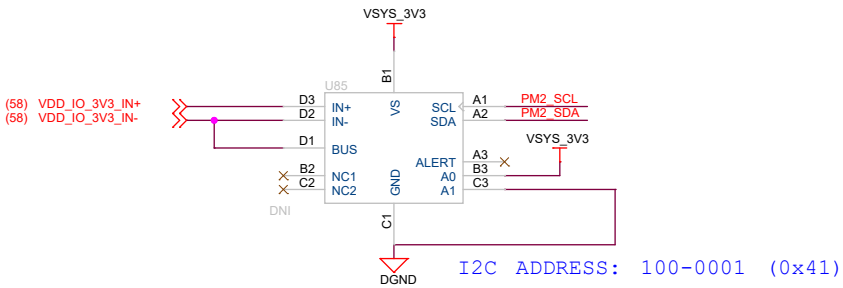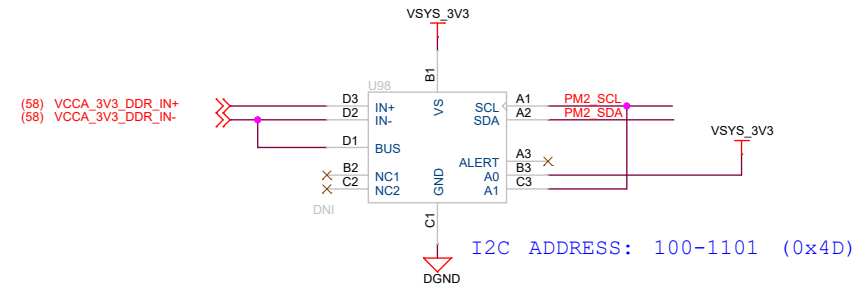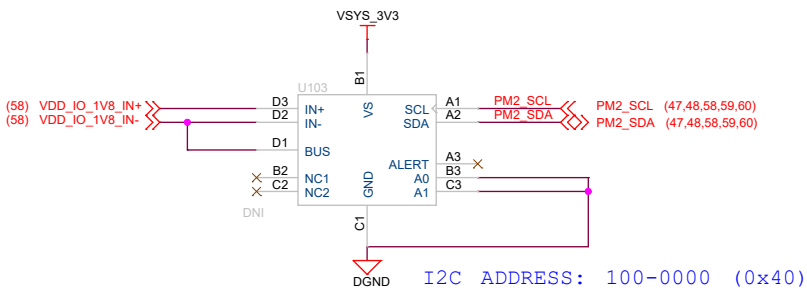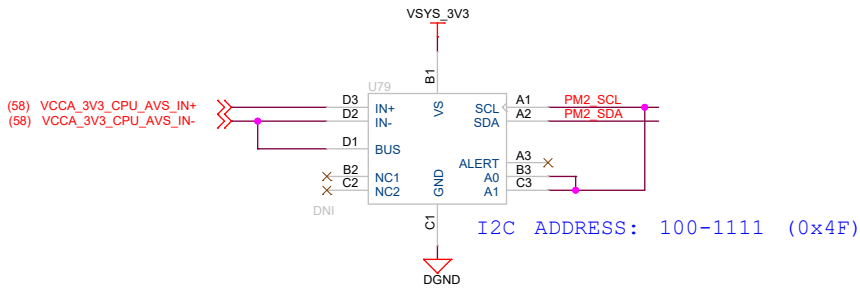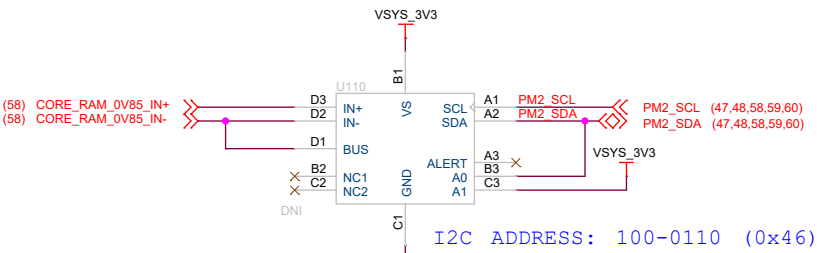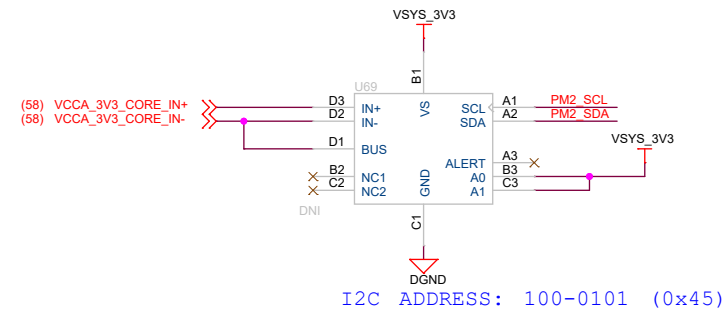


PMIC Support Circuit

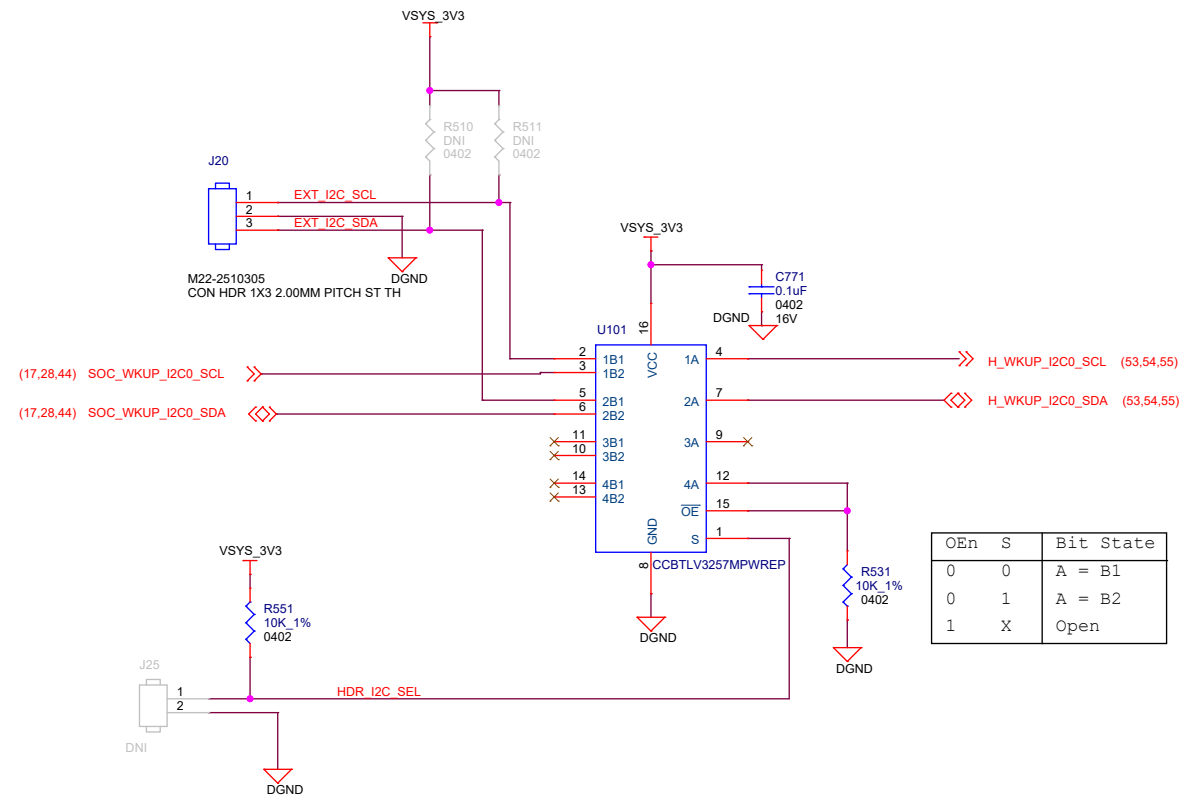

EXT POWER MEASUREMENT

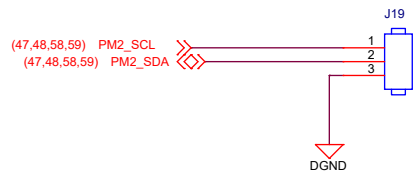

# SERDES CLOCK GENERATORS

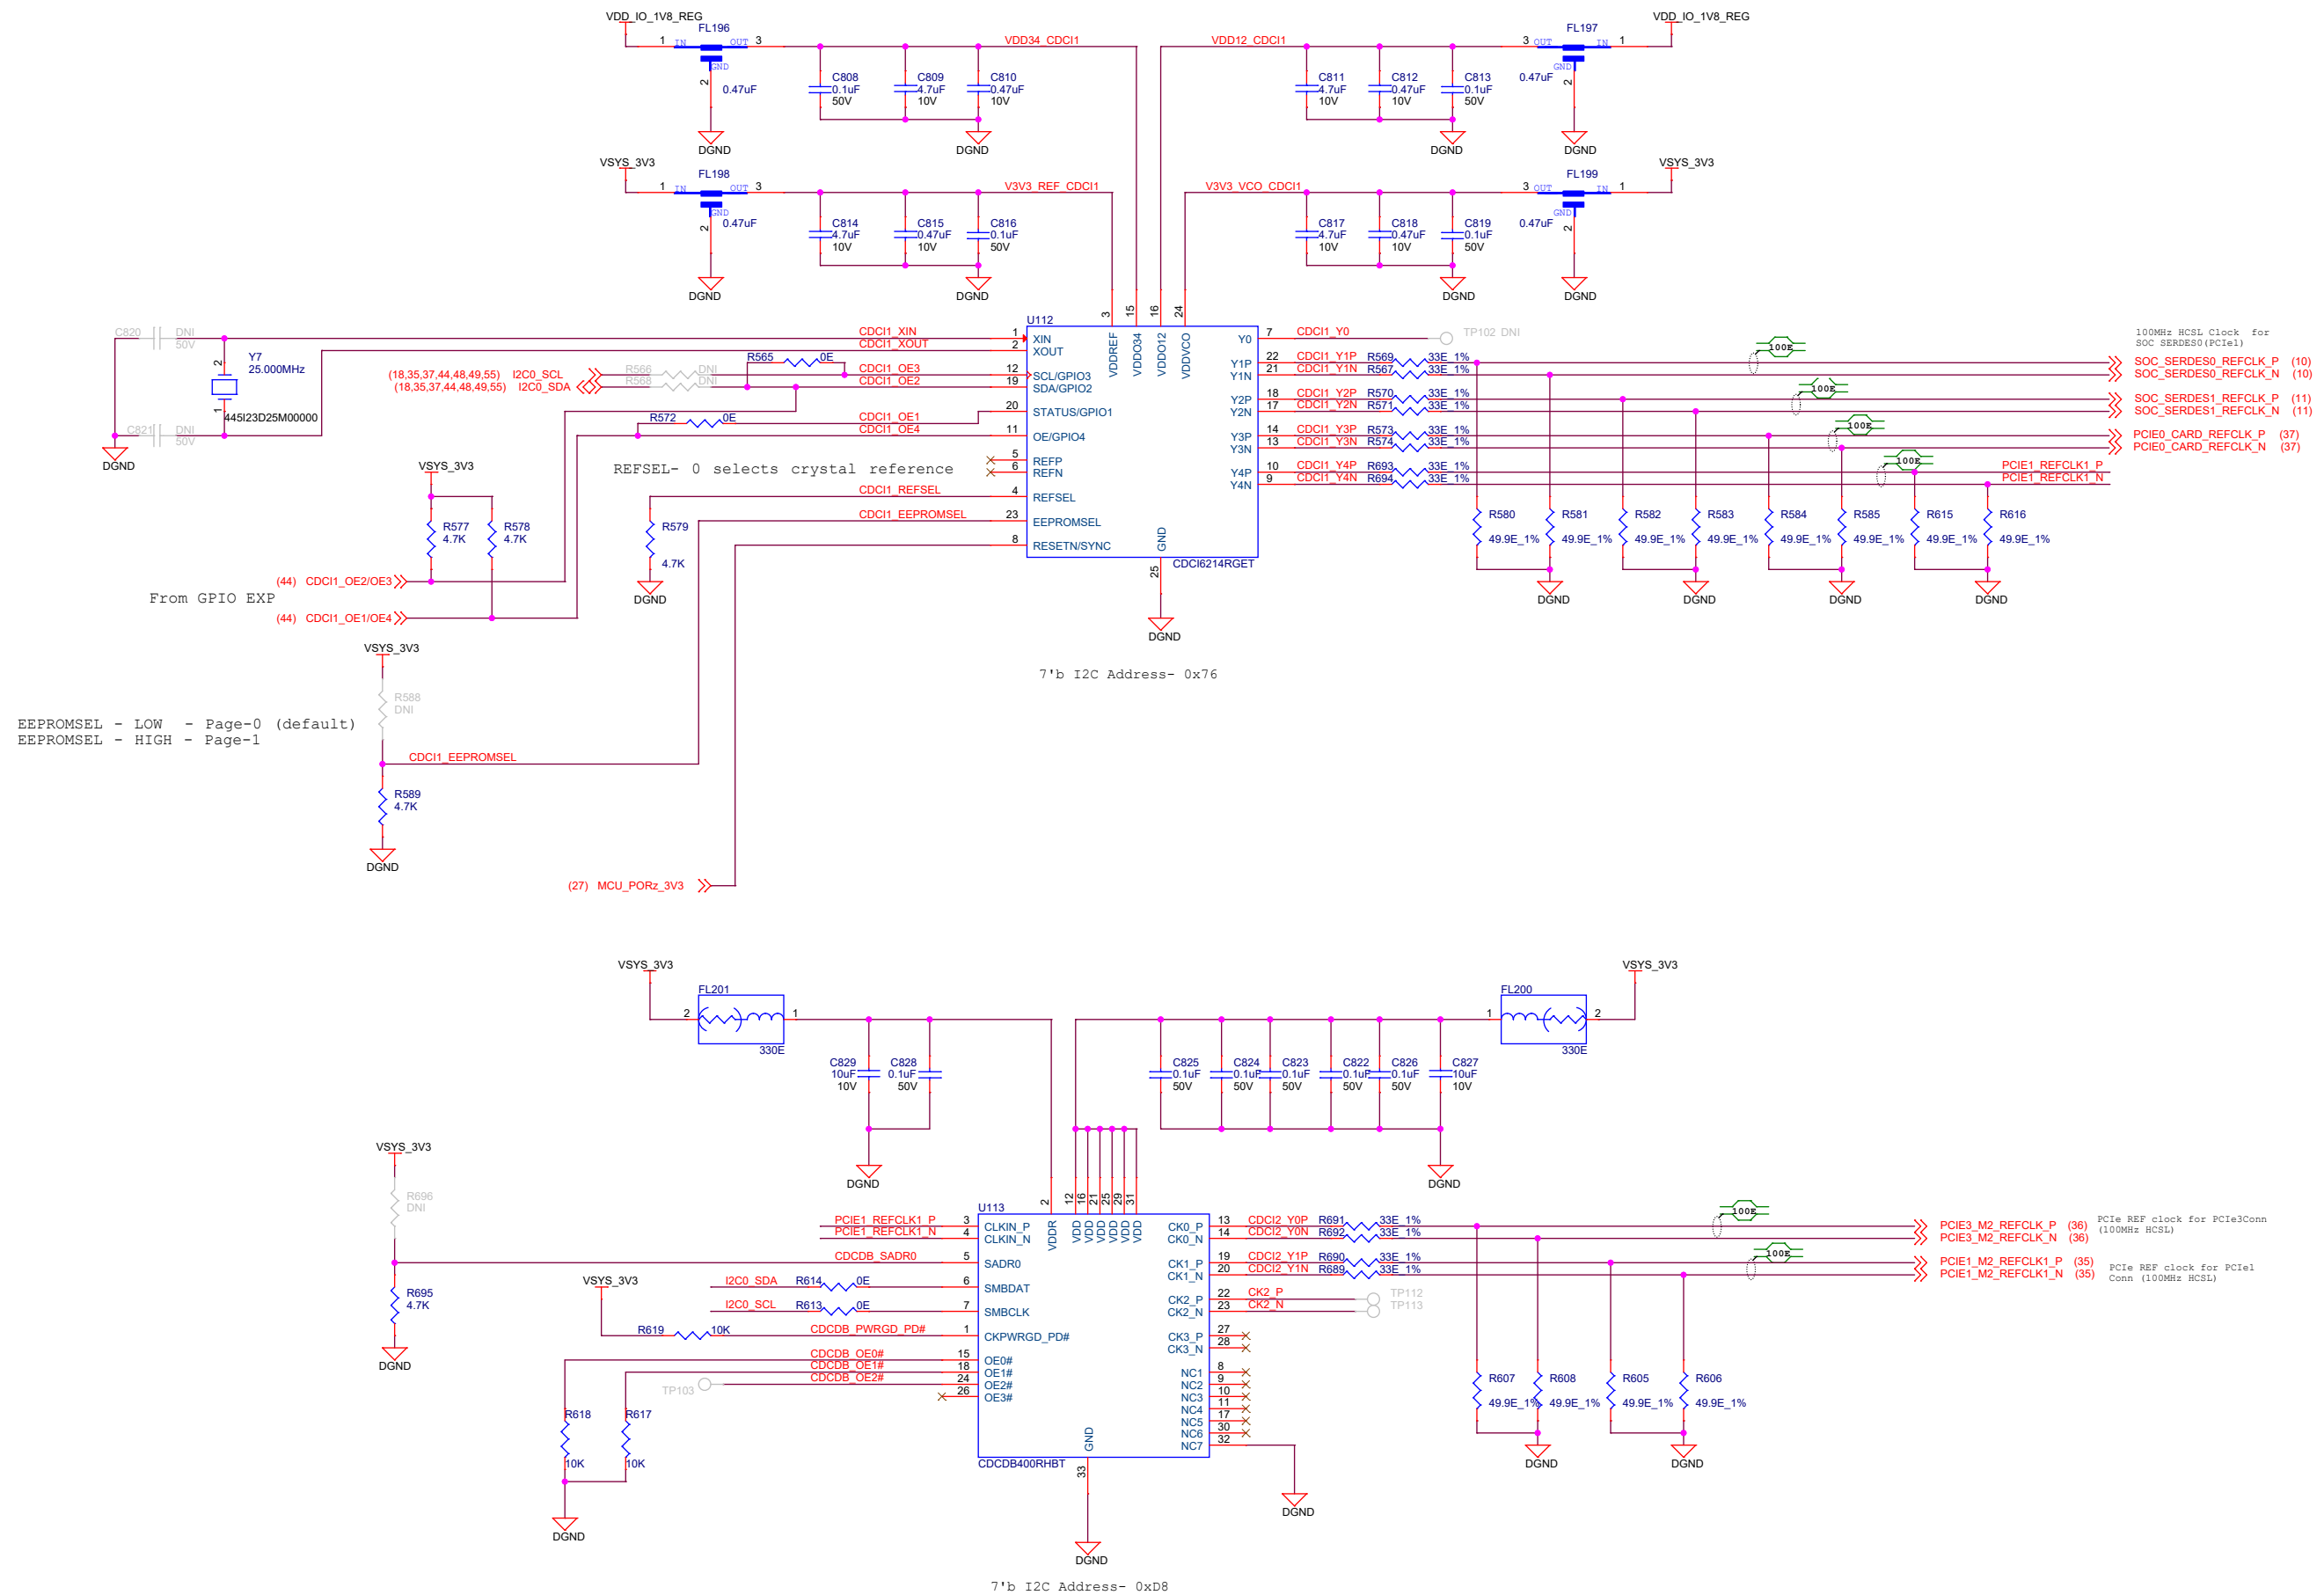

Project :  
AM69 Edge AI Kit



|       |                          |  |  |                         |    |     |    |
|-------|--------------------------|--|--|-------------------------|----|-----|----|
| Title |                          |  |  | SERDES CLOCK GENERATORS |    |     |    |
| Size  | PROC154E2B 001 SK AM69   |  |  |                         |    | Rev |    |
| C     |                          |  |  |                         |    | E2B |    |
| Date: | Thursday, March 16, 2023 |  |  | Sheet                   | 61 | of  | 62 |

NOTES, HW & LABELS

ASSEMBLY NOTES

- 1. All MSL components should be baked as per JEDEC standard.
- 2. PCB should be baked at 120 degree for 8 hours.
- 3. Board assembly must comply with workmanship standards. IPC-A-610 Class 2, unless otherwise specified.
- 4. These assemblies are ESD sensitive, ESD precautions shall be observed.
- 5. These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
- 6. Provide serial numbers to the assembled boards for identification.
- 7. The assembled board are wrapped in ESD Covers(individual) and packed securely before shipment.

LABELS

Board Serial No.



AM6-COMPROCEVM

Assembly Revision.




AM6-COMPROCEVM

SCREWS




STANDOFFs

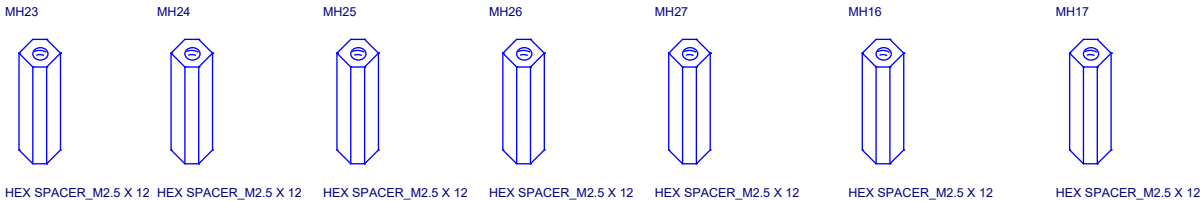


WASHER




FIDUCIALS

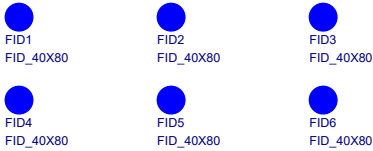


BARE PCB



SCREW & WASHER FOR PCIe M.2

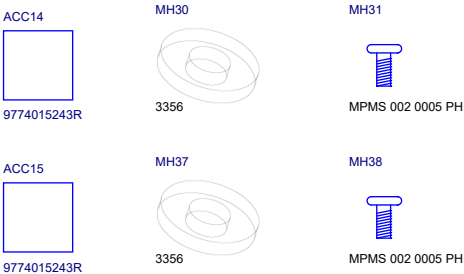

LOGOs




HEAT SINK



FAN



CRIMP PIN



CONN HOUSING



SCREW FOR FAN ASSEMBLY

