

AFEx3902-Q1 Smart Analog Front End (AFE) for Multislope Thermal Foldback and LUT-Based Control With I²C and SPI

1 Features

- AEC-Q100 qualified for automotive applications:
 - Temperature grade 1: -40°C to $+125^{\circ}\text{C}$, T_A
- Multislope thermal foldback
 - 10-bit analog-to-digital converter (ADC) input
 - Digital-to-analog converter (DAC) output
 - 10-bit (AFE53902-Q1)
 - 8-bit (AFE43902-Q1)
 - Pulse Width Modulation (PWM) output with 7-bit duty cycle
 - Standalone operation from nonvolatile memory (NVM)
 - Lock-up table (LUT) based parameter configuration
 - Piecewise-linearizer for thermistor
- Automatically detects I²C or SPI
 - 1.62-V V_{IH} with $V_{DD} = 5.5$ V
- VREF/MODE pin selects between programming and standalone modes
- User-programmable NVM
- Internal, external, or VDD reference
- Wide operating range
 - Power supply: 1.8 V to 5.5 V
- Tiny package: 16-pin WQFN (3 mm × 3 mm)

2 Applications

- [Automotive rear light](#)
- [Automotive headlight](#)

3 Description


The 10-bit AFE53902-Q1 and 8-bit AFE43902-Q1 devices (AFEx3902-Q1) are dual-channel, smart analog front ends (AFE) targeted for multislope thermal foldback of LED lighting. The output of LED lights reduce with an increase in temperature. Multislope thermal foldback helps maintain a steady light output from LEDs, irrespective of temperature change, while limiting the LED temperature to programmed thresholds.

The AFEx3902-Q1 have an ADC for temperature input and a DAC or PWM generator as an output. These devices have an integrated state machine that is preprogrammed as a multislope thermal foldback controller. The AFEx3902-Q1 are an excellent choice for thermal foldback of automotive rear lights and headlights, as well as horticulture lights. The AFEx3902-Q1 work independently from the parameters programmed into the NVM, and thus enable these smart AFEs for *processor-less* applications and design reuse. These devices also automatically detect I²C or SPI, and have an internal reference.

Device Information

| PART NUMBER | RESOLUTION | PACKAGE ⁽¹⁾ |
|-------------|------------|------------------------|
| AFE53902-Q1 | 10-bit | |
| AFE43902-Q1 | 8-bit | RTE (WQFN, 16) |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

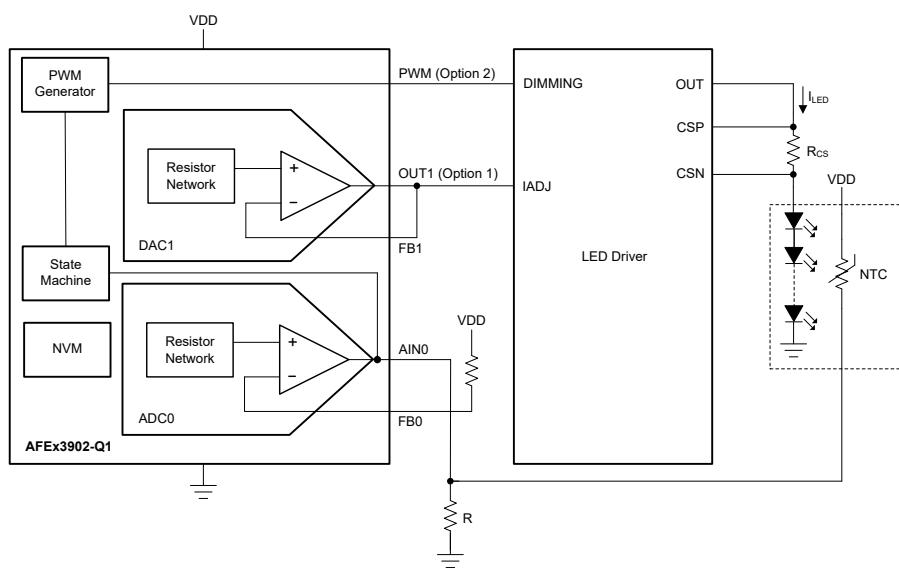

Multislope Thermal Foldback Using AFEx3902-Q1



An **IMPORTANT NOTICE** at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. **PRODUCTION DATA**.

Table of Contents

| | | | |
|---|----------|--|-----------|
| 1 Features | 1 | 6.16 Typical Characteristics: Voltage Output..... | 14 |
| 2 Applications | 1 | 6.17 Typical Characteristics: ADC..... | 19 |
| 3 Description | 1 | 6.18 Typical Characteristics: General..... | 21 |
| 4 Revision History | 2 | 7 Detailed Description | 22 |
| 5 Pin Configuration and Functions | 3 | 7.1 Overview..... | 22 |
| 6 Specifications | 5 | 7.2 Functional Block Diagram..... | 22 |
| 6.1 Absolute Maximum Ratings..... | 5 | 7.3 Feature Description..... | 23 |
| 6.2 ESD Ratings..... | 5 | 7.4 Device Functional Modes..... | 26 |
| 6.3 Recommended Operating Conditions..... | 5 | 7.5 Programming..... | 32 |
| 6.4 Thermal Information..... | 5 | 7.6 Register Maps..... | 38 |
| 6.5 Electrical Characteristics: Voltage Output..... | 6 | 8 Application and Implementation | 47 |
| 6.6 Electrical Characteristics: ADC Input..... | 8 | 8.1 Application Information..... | 47 |
| 6.7 Electrical Characteristics: General..... | 9 | 8.2 Typical Applications..... | 47 |
| 6.8 Timing Requirements: I ² C Standard Mode..... | 10 | 8.3 Power Supply Recommendations..... | 55 |
| 6.9 Timing Requirements: I ² C Fast Mode..... | 10 | 8.4 Layout..... | 55 |
| 6.10 Timing Requirements: I ² C Fast Mode Plus..... | 10 | 9 Device and Documentation Support | 56 |
| 6.11 Timing Requirements: SPI Write Operation..... | 11 | 9.1 Receiving Notification of Documentation Updates..... | 56 |
| 6.12 Timing Requirements: SPI Read and Daisy Chain Operation (FSDO = 0)..... | 11 | 9.2 Support Resources..... | 56 |
| 6.13 Timing Requirements: SPI Read and Daisy Chain Operation (FSDO = 1)..... | 11 | 9.3 Trademarks..... | 56 |
| 6.14 Timing Requirements: PWM Output..... | 12 | 9.4 Electrostatic Discharge Caution..... | 56 |
| 6.15 Timing Diagrams..... | 12 | 9.5 Glossary..... | 56 |
| | | 10 Mechanical, Packaging, and Orderable Information | 56 |

4 Revision History

| DATE | REVISION | NOTES |
|-----------|----------|-----------------|
| June 2023 | * | Initial release |

5 Pin Configuration and Functions

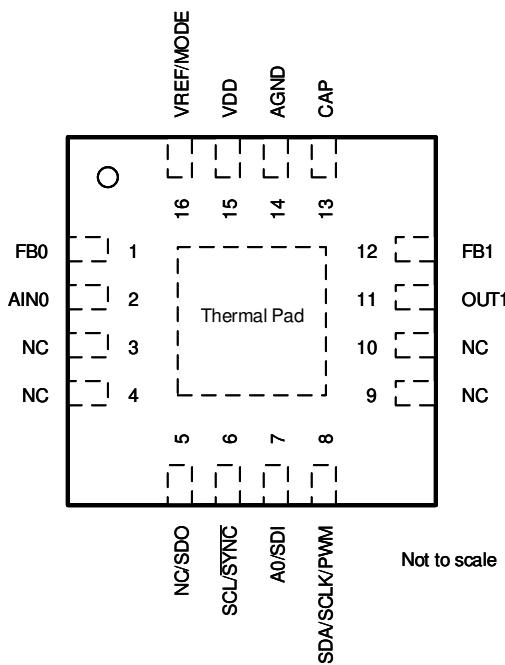


Figure 5-1. RTE Package, 16-pin WQFN (Top View)

Table 5-1. Pin Functions

| PIN | | TYPE | DESCRIPTION |
|-----|--------------|--------------|---|
| NO. | NAME | | |
| 1 | FB0 | Input | Connect this pin to VDD with a pullup resistor. |
| 2 | AIN0 | Input | Analog input for ADC0. |
| 3 | NC | — | Not connected. |
| 4 | NC | — | Not connected. |
| 5 | NC/SDO | Output | This pin is configurable as SDO. In SDO mode, connect this pin to the I/O voltage with an external pullup resistor. |
| 6 | SCL/SYNC | Output | I ² C serial interface clock or SPI chip select input. Connect this pin to the I/O voltage using an external pullup resistor. |
| 7 | A0/SDI | Input | Address configuration input for I ² C or serial data input for SPI. For the A0 function, connect this pin to VDD, AGND, SDA, or SCL for address configuration. For the SDI function, this pin does not need to be pulled up or pulled down. |
| 8 | SDA/SCLK/PWM | Input/Output | Bidirectional I ² C serial data bus or SPI clock input. Connect this pin to the I/O voltage using an external pullup resistor. This pin acts as the PWM output for multislope thermal foldback. Pull the MODE pin high to enable PWM output. |
| 9 | NC | — | Not connected. |
| 10 | NC | — | Not connected. |
| 11 | OUT1 | Output | For voltage output, this pin is the analog output from DAC channel 0. In PWM output mode, keep this pin unconnected. |
| 12 | FB1 | Input | For voltage output, this pin is the voltage feedback input for DAC channel 0. Connect this pin to OUT0 for closed-loop amplifier output. In PWM output mode, keep this pin unconnected. |
| 13 | CAP | Power | External bypass capacitor for the internal LDO. Connect a capacitor (approximately 1.5 μ F) between CAP and AGND. |
| 14 | AGND | Ground | Ground reference point for all circuitry on the device. |
| 15 | VDD | Power | Supply voltage: 1.8 V to 5.5 V |

Table 5-1. Pin Functions (continued)

| PIN | | TYPE | DESCRIPTION |
|----------------|---------------|--------|---|
| NO. | NAME | | |
| 16 | VREF/ MODE | Input | External reference or interface mode select input. Connect a capacitor (approximately 0.1 μ F) between VREF/MODE and AGND. Use a pullup resistor to VDD when the external reference is not used. Make sure that this pin does not ramp up before VDD. In case an external reference is used or when in interface select mode, make sure the reference ramps up after VDD. Pull this pin low to enable I ² C or SPI communication. Pull this pin high to enable PWM output. |
| Thermal Pad | Thermal Pad | Ground | Connect the thermal pad to AGND. |

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT |
|-----------|--|------|----------------|------|
| V_{DD} | Supply voltage, V_{DD} to AGND | -0.3 | 6 | V |
| | Digital inputs to AGND | -0.3 | $V_{DD} + 0.3$ | V |
| | V_{FBX} to AGND | -0.3 | $V_{DD} + 0.3$ | V |
| | V_{OUTX} to AGND | -0.3 | $V_{DD} + 0.3$ | V |
| V_{REF} | External reference, V_{REF} to AGND | -0.3 | $V_{DD} + 0.3$ | V |
| | Current into any pin except the OUTx, VDD, and AGND pins | -10 | 10 | mA |
| T_J | Junction temperature | -40 | 150 | °C |
| T_{stg} | Storage temperature | -65 | 150 | °C |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

6.2 ESD Ratings

| | | | VALUE | UNIT |
|-------------|----------------------------|---|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per AEC Q100-002 ⁽¹⁾ HBM ESD classification level 2 | ±2000 | V |
| | | Charged device model (CDM), per AEC Q100-011 CDM ESD classification level C4B | ±750 | |
| | | All pins | ±500 | |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|-----------|---|------|----------|---------------|------|
| V_{DD} | Positive supply voltage to ground (AGND) | 1.7 | 5.5 | V | |
| V_{REF} | External reference to ground (AGND) | 1.7 | V_{DD} | V | |
| V_{IH} | Digital input high voltage, $1.7 \text{ V} < V_{DD} \leq 5.5 \text{ V}$ | 1.62 | | V | |
| V_{IL} | Digital input low voltage | | 0.4 | V | |
| C_{CAP} | External capacitor on CAP pin | 0.5 | 15 | μF | |
| T_A | Ambient temperature | -40 | 125 | °C | |

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | AFEx3902-Q1 | UNIT |
|-------------------------------|--|-------------|------|
| | | RTE (WQFN) | |
| | | 16 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 49 | °C/W |
| $R_{\theta JC(\text{top})}$ | Junction-to-case (top) thermal resistance | 50 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 24.1 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 1.1 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 24.1 | °C/W |
| $R_{\theta JC(\text{bot})}$ | Junction-to-case (bottom) thermal resistance | 8.7 | °C/W |

- (1) For information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

6.5 Electrical Characteristics: Voltage Output

minimum and maximum specifications at $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ and typical specifications at $T_A = 25^{\circ}\text{C}$, $1.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$, DAC reference tied to VDD, gain = 1 \times , DAC output pin (OUT) loaded with resistive load ($R_L = 5 \text{ k}\Omega$ to AGND) and capacitive load ($C_L = 200 \text{ pF}$ to AGND), and digital inputs at VDD or AGND (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|---|--------------|----------|------|--------------------------------|
| STATIC PERFORMANCE | | | | | | |
| Resolution | AFE53902-Q1 | | 10 | | | Bits |
| | AFE43902-Q1 | | 8 | | | |
| INL | Integral nonlinearity ⁽¹⁾ AFE53902-Q1 | | -1.25 | 1.25 | | LSB |
| | AFE43902-Q1 | | -1 | 1 | | |
| DNL | Differential nonlinearity ⁽¹⁾ | | -1 | 1 | | LSB |
| Zero-code error ⁽²⁾ | Code 0d into DAC, external reference, $V_{DD} = 5.5 \text{ V}$ | | 6 | 12 | | mV |
| | Code 0d into DAC, internal V_{REF} , gain = 4 \times , $V_{DD} = 5.5 \text{ V}$ | | 6 | 15 | | |
| Zero-code error temperature coefficient ⁽²⁾ | | | ± 10 | | | $\mu\text{V}/^{\circ}\text{C}$ |
| Offset error ⁽²⁾ | 1.7 V $\leq V_{DD} < 2.7 \text{ V}$, V_{FB} pin shorted to V_{OUT} , DAC code: 8d for 10-bit resolution, 2d for 8-bit resolution | | -0.75 | 0.3 | 0.75 | %FSR |
| | 2.7 V $\leq V_{DD} \leq 5.5 \text{ V}$, V_{FB} pin shorted to V_{OUT} , DAC code: 8d for 10-bit resolution, 2d for 8-bit resolution | | -0.5 | 0.25 | 0.5 | |
| Offset-error temperature coefficient ⁽²⁾ | V_{FB} pin shorted to V_{OUT} , DAC code: 8d for 10-bit resolution, 2d for 8-bit resolution | | ± 0.0003 | | | %FSR/ $^{\circ}\text{C}$ |
| Gain error ⁽²⁾ | Between end-point codes: 8d to 1016d for 10-bit resolution, 2d to 254d for 8-bit resolution | | -0.5 | 0.25 | 0.5 | %FSR |
| Gain-error temperature coefficient ⁽²⁾ | Between end-point codes: 8d to 1016d for 10-bit resolution, 2d to 254d for 8-bit resolution | | ± 0.0008 | | | %FSR/ $^{\circ}\text{C}$ |
| Full-scale error ⁽²⁾ | 1.7 V $\leq V_{DD} < 2.7 \text{ V}$, DAC at full-scale | | -1 | 1 | | %FSR |
| | 2.7 V $\leq V_{DD} \leq 5.5 \text{ V}$, DAC at full-scale, 10-bit resolution | | -0.6 | 0.6 | | |
| | 2.7 V $\leq V_{DD} \leq 5.5 \text{ V}$, DAC at full-scale, 8-bit resolution | | -0.65 | 0.65 | | |
| Full-scale-error temperature coefficient ⁽²⁾ | DAC at full-scale | | ± 0.0008 | | | %FSR/ $^{\circ}\text{C}$ |
| OUTPUT | | | | | | |
| Output voltage | Reference tied to V_{DD} | | 0 | V_{DD} | | V |
| C_L | Capacitive load ⁽³⁾ | $R_L = \text{infinite}$, phase margin = 30° | | 200 | | pF |
| | | Phase margin = 30° | | 1000 | | |
| Short-circuit current | | $V_{DD} = 1.7 \text{ V}$, full-scale output shorted to AGND or zero-scale output shorted to V_{DD} | | 15 | | mA |
| | | $V_{DD} = 2.7 \text{ V}$, full-scale output shorted to AGND or zero-scale output shorted to V_{DD} | | 50 | | |
| | | $V_{DD} = 5.5 \text{ V}$, full-scale output shorted to AGND or zero-scale output shorted to V_{DD} | | 60 | | |
| Output-voltage headroom ⁽³⁾ | | To V_{DD} , DAC output unloaded, internal reference = 1.21 V, $V_{DD} \geq 1.21 \text{ V} \times \text{gain} + 0.2 \text{ V}$ | | 0.2 | | %FSR |
| | | To V_{DD} and to AGND, DAC output unloaded, external reference at V_{DD} (gain = 1 \times), the V_{REF} pin is not shorted to V_{DD} | | 0.8 | | |
| | | To V_{DD} and to AGND, $I_{LOAD} = 10 \text{ mA}$ at $V_{DD} = 5.5 \text{ V}$, $I_{LOAD} = 3 \text{ mA}$ at $V_{DD} = 2.7 \text{ V}$, $I_{LOAD} = 1 \text{ mA}$ at $V_{DD} = 1.8 \text{ V}$, external reference at V_{DD} (gain = 1 \times), the V_{REF} pin is not shorted to V_{DD} | | 10 | | |

6.5 Electrical Characteristics: Voltage Output (continued)

minimum and maximum specifications at $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ and typical specifications at $T_A = 25^{\circ}\text{C}$, $1.7 \text{ V} \leq V_{\text{DD}} \leq 5.5 \text{ V}$, DAC reference tied to VDD, gain = $1 \times$, DAC output pin (OUT) loaded with resistive load ($R_L = 5 \text{ k}\Omega$ to AGND) and capacitive load ($C_L = 200 \text{ pF}$ to AGND), and digital inputs at VDD or AGND (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------------------|--|---|-----|-------|-----|------------------|
| V_{OUT} dc output impedance | | DAC output enabled and DAC code = midscale, $V_{\text{DD}} = 5.5 \text{ V}$, external reference mode | | 0.007 | | Ω |
| | | DAC output enabled and DAC code = 8d, $V_{\text{DD}} = 5.5 \text{ V}$, external reference mode | | 0.25 | | |
| | | DAC output enabled and DAC code = 1016d, $V_{\text{DD}} = 5.5 \text{ V}$, external reference mode | | 0.25 | | |
| Z_O | V_{FB} dc output impedance ⁽⁴⁾ | DAC output enabled, internal reference (gain = $1.5 \times$ or $2 \times$) or external reference at V_{DD} (gain = $1 \times$), the V_{REF} pin is not shorted to V_{DD} | 400 | 500 | 600 | $\text{k}\Omega$ |
| | | DAC output enabled, internal V_{REF} , gain = $3 \times$ or $4 \times$ | 325 | 400 | 485 | |
| | Power supply rejection ratio (dc) | Internal V_{REF} , gain = $2 \times$, DAC at midscale, $V_{\text{DD}} = 5 \text{ V} \pm 10\%$ | | 0.25 | | mV/V |

DYNAMIC PERFORMANCE

| | | | | |
|-------------------|--|--|------|--------------------------------|
| t_{sett} | Output voltage settling time | 1/4 to 3/4 scale and 3/4 to 1/4 scale settling to 10%FSR, $V_{\text{DD}} = 5.5 \text{ V}$ | 20 | μs |
| | | 1/4 to 3/4 scale and 3/4 to 1/4 scale settling to 10%FSR, $V_{\text{DD}} = 5.5 \text{ V}$, internal V_{REF} , gain = $4 \times$ | 25 | |
| | Slew rate | $V_{\text{DD}} = 5.5 \text{ V}$ | 0.3 | $\text{V}/\mu\text{s}$ |
| | Power-on glitch magnitude | At start-up, DAC output disabled | 75 | mV |
| | | At start-up, DAC output disabled, $R_L = 100 \text{ k}\Omega$ | 200 | |
| | Output-enable glitch magnitude | DAC output disabled to enabled, DAC registers at zero scale, $R_L = 100 \text{ k}\Omega$ | 250 | mV |
| V_n | Output noise voltage (peak to peak) | $f = 0.1 \text{ Hz}$ to 10 Hz , DAC at midscale, $V_{\text{DD}} = 5.5 \text{ V}$ | 50 | μV_{PP} |
| | | Internal V_{REF} , gain = $4 \times$, $f = 0.1 \text{ Hz}$ to 10 Hz , DAC at midscale, $V_{\text{DD}} = 5.5 \text{ V}$ | 90 | |
| | Output noise density | $f = 1 \text{ kHz}$, DAC at midscale, $V_{\text{DD}} = 5.5 \text{ V}$ | 0.35 | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| | | Internal V_{REF} , gain = $4 \times$, $f = 1 \text{ kHz}$, DAC at midscale, $V_{\text{DD}} = 5.5 \text{ V}$ | 0.9 | |
| | Power supply rejection ratio (ac) ⁽⁴⁾ | Internal V_{REF} , gain = $4 \times$, 200-mV 50-Hz or 60-Hz sine wave superimposed on power supply voltage, DAC at midscale | -68 | dB |
| | Code change glitch impulse | $\pm 1 \text{ LSB}$ change around midscale (including feedthrough) | 10 | $\text{nV}\cdot\text{s}$ |
| | Code change glitch impulse magnitude | $\pm 1 \text{ LSB}$ change around midscale (including feedthrough) | 15 | mV |

(1) Measured with DAC output unloaded. For external reference and internal reference $V_{\text{DD}} \geq 1.21 \times \text{gain} + 0.2 \text{ V}$, between end-point codes: 8d to 1016d for 10-bit resolution and 2d to 254d for 8-bit resolution.

(2) Measured with DAC output unloaded.

(3) Specified by design and characterization, not production tested.

(4) Specified with 200-mV headroom with respect to reference value when internal reference is used.

6.6 Electrical Characteristics: ADC Input

minimum and maximum specifications at $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ and typical specifications at $T_A = 25^{\circ}\text{C}$, $1.7 \text{ V} \leq V_{\text{DD}} \leq 5.5 \text{ V}$, DAC reference tied to VDD, gain = $1 \times$, and digital inputs at VDD or AGND (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------------|--|------|------|-----------------|------|
| STATIC PERFORMANCE | | | | | |
| Resolution | | 10 | | | Bits |
| INL | Integral nonlinearity ^{(1) (2)} | -2 | 2 | | LSB |
| DNL | Differential nonlinearity ^{(1) (2)} | -1 | 1 | | LSB |
| Offset error ^{(1) (2) (3)} | $1.7 \text{ V} \leq V_{\text{DD}} < 2.7 \text{ V}$ | -5 | 0 | 5 | mV |
| | $2.7 \text{ V} \leq V_{\text{DD}} \leq 5.5 \text{ V}$ | -5 | 0 | 5 | |
| Gain error ^{(1) (2) (4)} | | -1 | 1 | | %FSR |
| INPUT | | | | | |
| Input voltage range | External $V_{\text{REF}} = V_{\text{DD}}$, V_{FB} attenuation is 1 | 0 | | V_{DD} | V |
| DYNAMIC PERFORMANCE | | | | | |
| Data rate ⁽²⁾ | ADC averaging setting is 4 samples | 1406 | 2008 | | SPS |
| Sampling capacitor | | | 10 | | pF |

- (1) Measured with DAC output unloaded. For external reference and internal reference $V_{\text{DD}} \geq 1.21 \times \text{gain} + 0.2 \text{ V}$, between end-point codes: 8d to 1016d for 10-bit resolution, 2d to 254d for 8-bit resolution.
- (2) Specified by design and characterization, not production tested.
- (3) Measured at DAC at mid-scale, comparator input at Hi-Z, and DAC operating with external reference.

6.7 Electrical Characteristics: General

minimum and maximum specifications at $-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ and typical specifications at $T_A = 25^{\circ}\text{C}$, $1.7 \text{ V} \leq V_{\text{DD}} \leq 5.5 \text{ V}$, DAC reference tied to VDD, gain = $1 \times$, and digital inputs at VDD or AGND (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|---|-----------------|----------------------------|---------------|
| INTERNAL REFERENCE | | | | | |
| Initial accuracy | $T_A = 25^{\circ}\text{C}$ for all measurements | 1.1979 | 1.212 | 1.224 | V |
| Reference output temperature coefficient ^{(1) (2)} | | | 60 | ppm/ $^{\circ}\text{C}$ | |
| EXTERNAL REFERENCE | | | | | |
| External reference input range | | 1.7 | V_{DD} | | V |
| V_{REF} input impedance ^{(1) (3)} | | 192 | | $\text{k}\Omega\text{-ch}$ | |
| EEPROM | | | | | |
| Endurance ⁽¹⁾ | $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ | 20000 | Cycles | | |
| | $T_A = 125^{\circ}\text{C}$ | 1000 | | | |
| Data retention ⁽¹⁾ | | 50 | Years | | |
| EEPROM programming write cycle time ⁽¹⁾ | | 200 | ms | | |
| Device boot-up time ⁽¹⁾ | Time taken from power valid ($V_{\text{DD}} \geq 1.7 \text{ V}$) to output valid state (output state as programmed in EEPROM), 0.5- μF capacitor on the CAP pin | 5 | ms | | |
| DIGITAL INPUTS | | | | | |
| Digital feedthrough | Voltage output mode, DAC output static at midscale, fast mode plus, SCL toggling | 20 | | $\text{nV}\text{-s}$ | |
| Pin capacitance | Per pin | 10 | | pF | |
| POWER | | | | | |
| I_{DD} | Current flowing into VDD | DAC in sleep mode, internal reference powered down, external reference at 5.5 V | 28 | μA | |
| | Current flowing into VDD ⁽¹⁾ | DAC in sleep mode, internal reference enabled, additional current through internal reference | 10 | | |
| | | DAC and ADC channels enabled, internal reference enabled, additional current through internal reference per DAC or ADC channel | 12.5 | $\mu\text{A-ch}$ | |
| | | Normal operation, state-machine enabled | 1.05 | mA | |
| HIGH-IMPEDANCE OUTPUT | | | | | |
| I_{LEAK} | Current flowing into V_{OUTX} and V_{FBX} | DAC in Hi-Z output mode, $1.7 \text{ V} \leq V_{\text{DD}} \leq 5.5 \text{ V}$ | 10 | nA | |
| | | $V_{\text{DD}} = 0 \text{ V}$, $V_{\text{OUT}} \leq 1.5 \text{ V}$, decoupling capacitor between V_{DD} and AGND = 0.1 μF | 200 | | |
| | | $V_{\text{DD}} = 0 \text{ V}$, $1.5 \text{ V} < V_{\text{OUT}} \leq 5.5 \text{ V}$, decoupling capacitor between V_{DD} and AGND = 0.1 μF | 500 | | |
| | | 100 $\text{k}\Omega$ between V_{DD} and AGND, $V_{\text{OUT}} \leq 1.25 \text{ V}$, series resistance of 10 $\text{k}\Omega$ at OUT pin | ± 2 | | μA |

(1) Specified by design and characterization, not production tested.

(2) Measured at -40°C and $+125^{\circ}\text{C}$ and calculated the slope.

(3) Impedances for the DAC channels are connected in parallel.

6.8 Timing Requirements: I²C Standard Mode

all input signals are timed from V_{IL} to 70% of V_{pull-up}, 1.7 V ≤ V_{DD} ≤ 5.5 V, -40°C ≤ T_A ≤ +125°C, and 1.7 V ≤ V_{pull-up} ≤ V_{DD}

| | | MIN | NOM | MAX | UNIT |
|--------------------|--|-----|------|------|------|
| f _{SCLK} | SCL frequency | | | 100 | kHz |
| t _{BUF} | Bus free time between stop and start conditions | | 4.7 | | μs |
| t _{HDSTA} | Hold time after repeated start | | 4 | | μs |
| t _{SUSTA} | Repeated start setup time | | 4.7 | | μs |
| t _{SUSTO} | Stop condition setup time | | 4 | | μs |
| t _{HDDAT} | Data hold time | | 0 | | ns |
| t _{SUDAT} | Data setup time | | 250 | | ns |
| t _{LOW} | SCL clock low period | | 4700 | | ns |
| t _{HIGH} | SCL clock high period | | 4000 | | ns |
| t _F | Clock and data fall time | | | 300 | ns |
| t _R | Clock and data rise time | | | 1000 | ns |
| t _{VDDAT} | Data valid time, R = 360 Ω, C _{trace} = 23 pF, C _{probe} = 10 pF | | | 3.45 | μs |
| t _{VDACK} | Data valid acknowledge time, R = 360 Ω, C _{trace} = 23 pF, C _{probe} = 10 pF | | | 3.45 | μs |

6.9 Timing Requirements: I²C Fast Mode

all input signals are timed from V_{IL} to 70% of V_{pull-up}, 1.7 V ≤ V_{DD} ≤ 5.5 V, -40°C ≤ T_A ≤ +125°C, and 1.7 V ≤ V_{pull-up} ≤ V_{DD}

| | | MIN | NOM | MAX | UNIT |
|--------------------|--|-----|------|-----|------|
| f _{SCLK} | SCL frequency | | | 400 | kHz |
| t _{BUF} | Bus free time between stop and start conditions | | 1.3 | | μs |
| t _{HDSTA} | Hold time after repeated start | | 0.6 | | μs |
| t _{SUSTA} | Repeated start setup time | | 0.6 | | μs |
| t _{SUSTO} | Stop condition setup time | | 0.6 | | μs |
| t _{HDDAT} | Data hold time | | 0 | | ns |
| t _{SUDAT} | Data setup time | | 100 | | ns |
| t _{LOW} | SCL clock low period | | 1300 | | ns |
| t _{HIGH} | SCL clock high period | | 600 | | ns |
| t _F | Clock and data fall time | | | 300 | ns |
| t _R | Clock and data rise time | | | 300 | ns |
| t _{VDDAT} | Data valid time, R = 360 Ω, C _{trace} = 23 pF, C _{probe} = 10 pF | | | 0.9 | μs |
| t _{VDACK} | Data valid acknowledge time, R = 360 Ω, C _{trace} = 23 pF, C _{probe} = 10 pF | | | 0.9 | μs |

6.10 Timing Requirements: I²C Fast Mode Plus

all input signals are timed from V_{IL} to 70% of V_{pull-up}, 1.7 V ≤ V_{DD} ≤ 5.5 V, -40°C ≤ T_A ≤ +125°C, and 1.7 V ≤ V_{pull-up} ≤ V_{DD}

| | | MIN | NOM | MAX | UNIT |
|--------------------|--|-----|------|------|------|
| f _{SCLK} | SCL frequency | | | 1 | MHz |
| t _{BUF} | Bus free time between stop and start conditions | | 0.5 | | μs |
| t _{HDSTA} | Hold time after repeated start | | 0.26 | | μs |
| t _{SUSTA} | Repeated start setup time | | 0.26 | | μs |
| t _{SUSTO} | Stop condition setup time | | 0.26 | | μs |
| t _{HDDAT} | Data hold time | | 0 | | ns |
| t _{SUDAT} | Data setup time | | 50 | | ns |
| t _{LOW} | SCL clock low period | | 0.5 | | μs |
| t _{HIGH} | SCL clock high period | | 0.26 | | μs |
| t _F | Clock and data fall time | | | 120 | ns |
| t _R | Clock and data rise time | | | 120 | ns |
| t _{VDDAT} | Data valid time, R = 360 Ω, C _{trace} = 23 pF, C _{probe} = 10 pF | | | 0.45 | μs |
| t _{VDACK} | Data valid acknowledge time, R = 360 Ω, C _{trace} = 23 pF, C _{probe} = 10 pF | | | 0.45 | μs |

6.11 Timing Requirements: SPI Write Operation

all input signals are specified with $t_r = t_f = 1 \text{ V/ns}$ (10% to 90% of V_{IO}) and timed from a voltage level of $(V_{IL} + V_{IH}) / 2$, $1.7 \text{ V} \leq V_{IO} \leq 5.5 \text{ V}$, $1.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$, and $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$

| | | MIN | NOM | MAX | UNIT |
|----------------|--|-----|-----|-----|------|
| f_{SCLK} | Serial clock frequency | | | 50 | MHz |
| $t_{SCLKHIGH}$ | SCLK high time | 9 | | | ns |
| $t_{SCLKLOW}$ | SCLK low time | 9 | | | ns |
| t_{SDIS} | SDI setup time | 8 | | | ns |
| t_{SDIH} | SDI hold time | 8 | | | ns |
| t_{CSS} | SYNC to SCLK falling edge setup time | 18 | | | ns |
| t_{CSH} | SCLK falling edge to SYNC rising edge | 10 | | | ns |
| t_{CSHIGH} | SYNC high time | 50 | | | ns |
| $t_{DACPWAIT}$ | Sequential DAC update wait time (time between subsequent SYNC rising edges) for same channel | 2 | | | μs |

6.12 Timing Requirements: SPI Read and Daisy Chain Operation (FSDO = 0)

all input signals are specified with $t_r = t_f = 1 \text{ V/ns}$ (10% to 90% of V_{IO}) and timed from a voltage level of $(V_{IL} + V_{IH}) / 2$, $1.7 \text{ V} \leq V_{IO} \leq 5.5 \text{ V}$, $1.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, and $FSDO = 0$

| | | MIN | NOM | MAX | UNIT |
|----------------|--|-----|-----|------|------|
| f_{SCLK} | Serial clock frequency | | | 1.25 | MHz |
| $t_{SCLKHIGH}$ | SCLK high time | 350 | | | ns |
| $t_{SCLKLOW}$ | SCLK low time | 350 | | | ns |
| t_{SDIS} | SDI setup time | 8 | | | ns |
| t_{SDIH} | SDI hold time | 8 | | | ns |
| t_{CSS} | SYNC to SCLK falling edge setup time | 400 | | | ns |
| t_{CSH} | SCLK falling edge to SYNC rising edge | 400 | | | ns |
| t_{CSHIGH} | SYNC high time | 1 | | | μs |
| t_{SDODLY} | SCLK rising edge to SDO falling edge, $I_{OL} \leq 5 \text{ mA}$, $C_L = 20 \text{ pF}$. | | | 300 | ns |

6.13 Timing Requirements: SPI Read and Daisy Chain Operation (FSDO = 1)

all input signals are specified with $t_r = t_f = 1 \text{ V/ns}$ (10% to 90% of V_{IO}) and timed from a voltage level of $(V_{IL} + V_{IH}) / 2$, $1.7 \text{ V} \leq V_{IO} \leq 5.5 \text{ V}$, $1.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, and $FSDO = 1$

| | | MIN | NOM | MAX | UNIT |
|----------------|--|-----|-----|-----|------|
| f_{SCLK} | Serial clock frequency | | | 2.5 | MHz |
| $t_{SCLKHIGH}$ | SCLK high time | 175 | | | ns |
| $t_{SCLKLOW}$ | SCLK low time | 175 | | | ns |
| t_{SDIS} | SDI setup time | 8 | | | ns |
| t_{SDIH} | SDI hold time | 8 | | | ns |
| t_{CSS} | SYNC to SCLK falling edge setup time | 300 | | | ns |
| t_{CSH} | SCLK falling edge to SYNC rising edge | 300 | | | ns |
| t_{CSHIGH} | SYNC high time | 1 | | | μs |
| t_{SDODLY} | SCLK rising edge to SDO falling edge, $I_{OL} \leq 5 \text{ mA}$, $C_L = 20 \text{ pF}$. | | | 300 | ns |


6.14 Timing Requirements: PWM Output

all input signals are timed from V_{IL} to 70% of $V_{pull-up}$, $1.7 \text{ V} \leq V_{DD} \leq 5.5$, $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$, and $1.7 \text{ V} \leq V_{pull-up} \leq V_{DD}$

| | | MIN | NOM | MAX | UNIT |
|---------------|------------------------------|-------|--------|--------|------|
| f_{PWMOUT} | PWM frequency ⁽¹⁾ | 0.218 | 48.828 | 48.828 | kHz |
| t_{PWMOHI} | PWM high time | 1 | 1 | 1 | μs |
| t_{PWMOLO} | PWM low time | 1 | 1 | 1 | μs |
| $t_{PWMODTY}$ | PWM duty cycle | 0.78 | 98.44 | 98.44 | % |

(1) The frequency range does not account for the internal oscillator frequency error.

6.15 Timing Diagrams

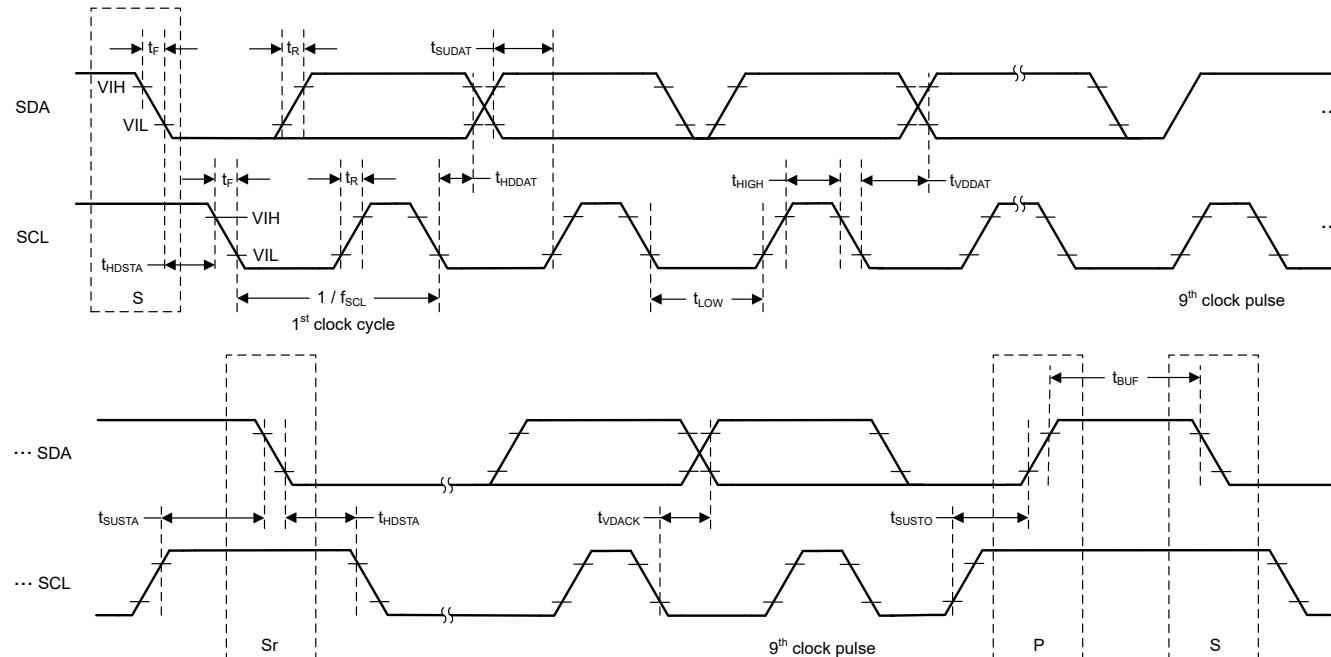

S: Start bit, Sr: Repeated start bit, P: Stop bit

Figure 6-1. I²C Timing Diagram

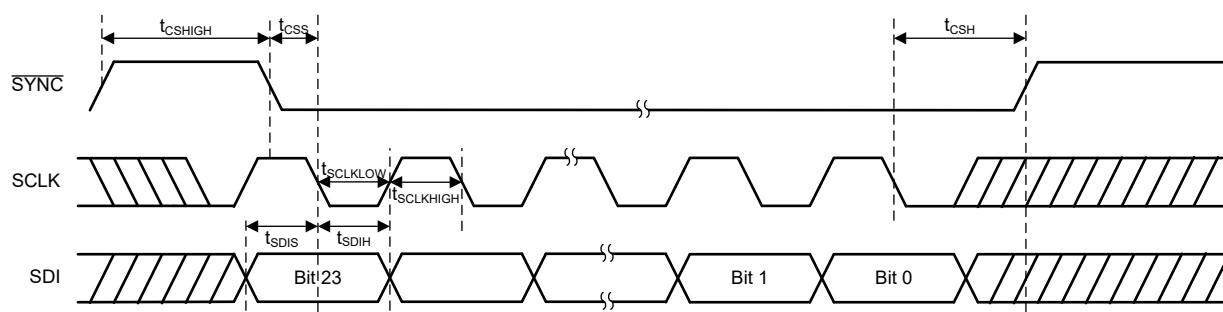


Figure 6-2. SPI Write Timing Diagram

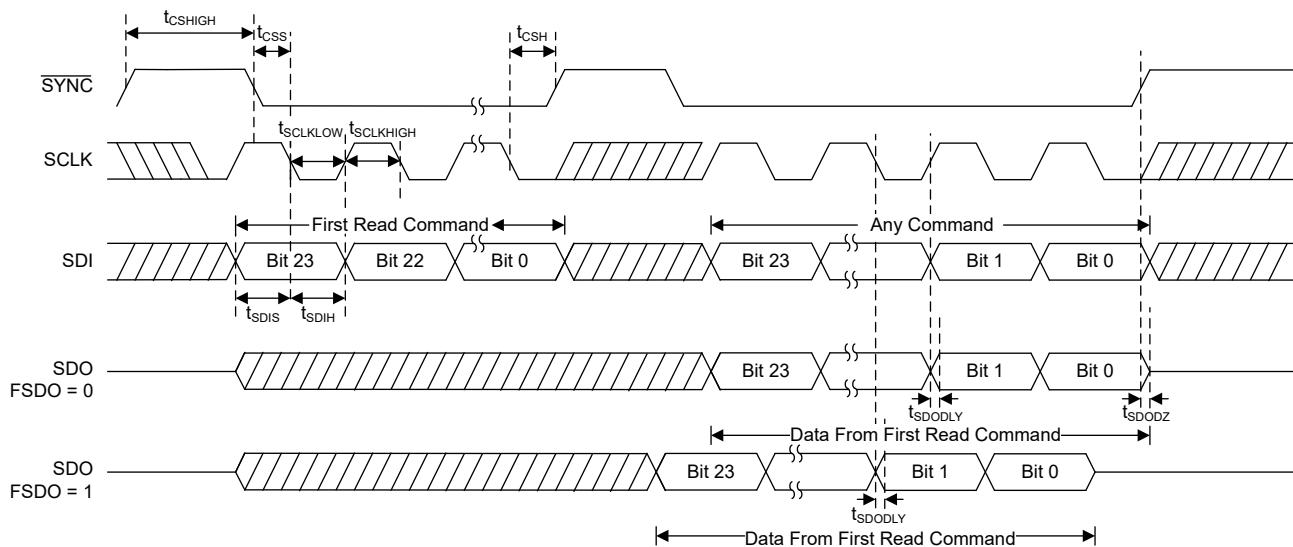


Figure 6-3. SPI Read Timing Diagram

6.16 Typical Characteristics: Voltage Output

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, external reference = 5.5 V , gain = $1 \times$, and DAC outputs unloaded (unless otherwise noted)

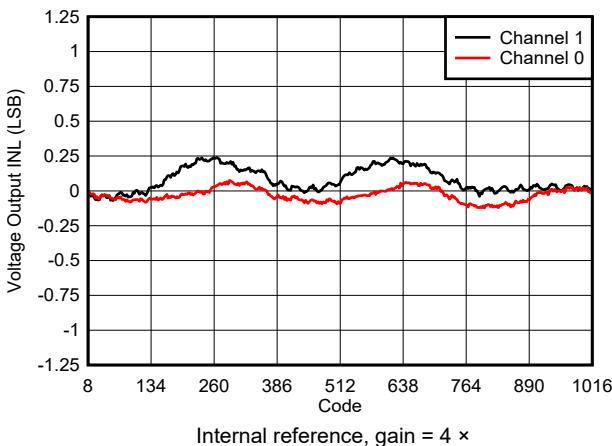


Figure 6-4. Voltage Output INL vs Digital Input Code

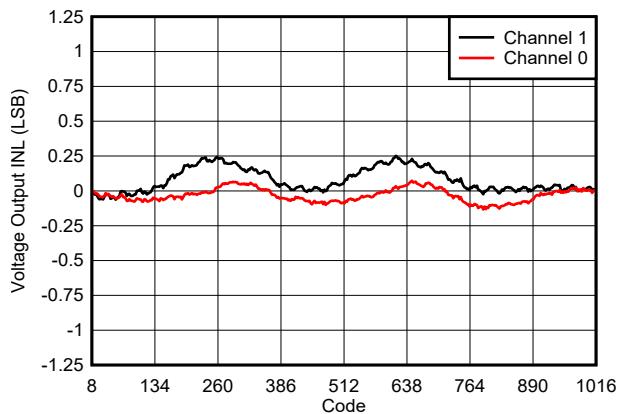


Figure 6-5. Voltage Output INL vs Digital Input Code

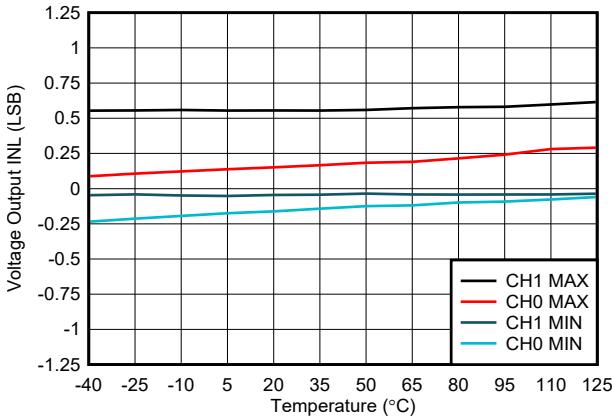


Figure 6-6. Voltage Output INL vs Temperature

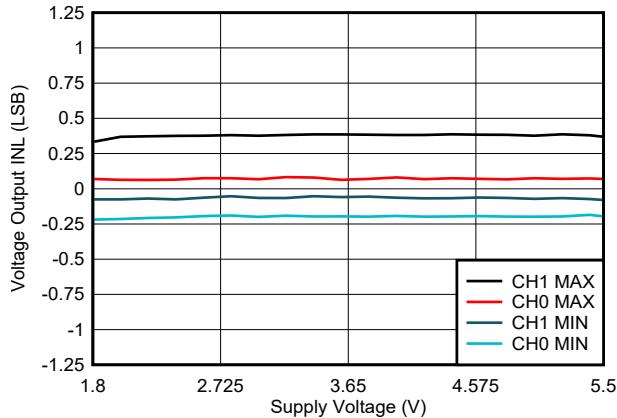


Figure 6-7. Voltage Output INL vs Supply Voltage

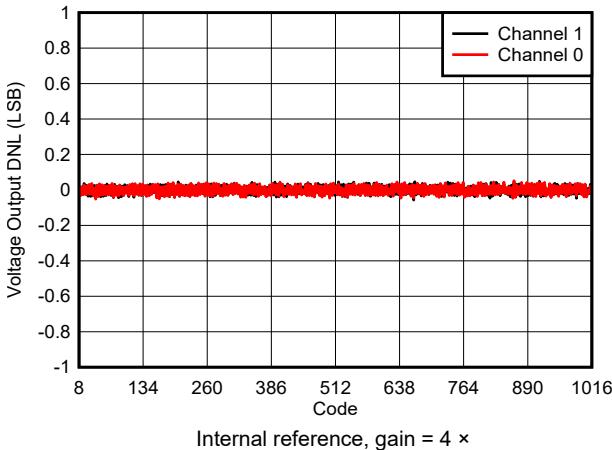


Figure 6-8. Voltage Output DNL vs Digital Input Code

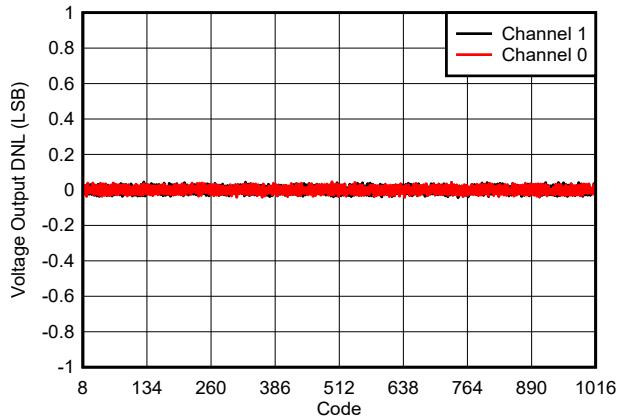


Figure 6-9. Voltage Output DNL vs Digital Input Code

6.16 Typical Characteristics: Voltage Output (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, external reference = 5.5 V , gain = $1 \times$, and DAC outputs unloaded (unless otherwise noted)

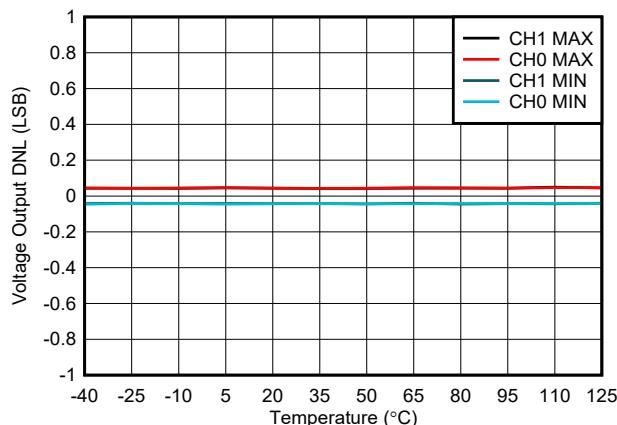


Figure 6-10. Voltage Output DNL vs Temperature

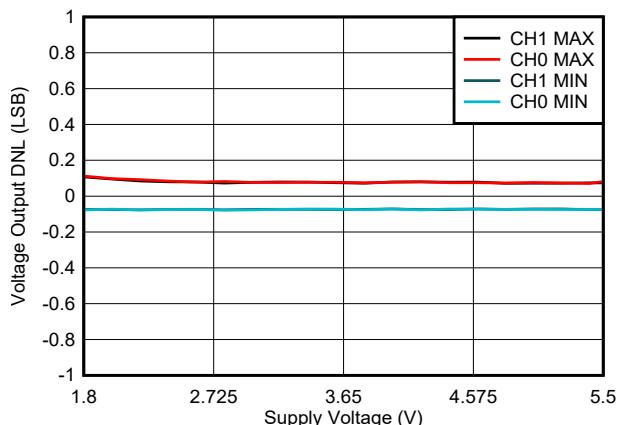


Figure 6-11. Voltage Output DNL vs Supply Voltage

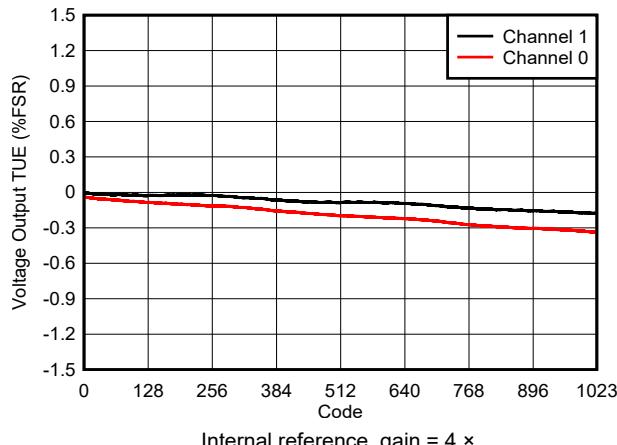


Figure 6-12. Voltage Output TUE vs Digital Input Code

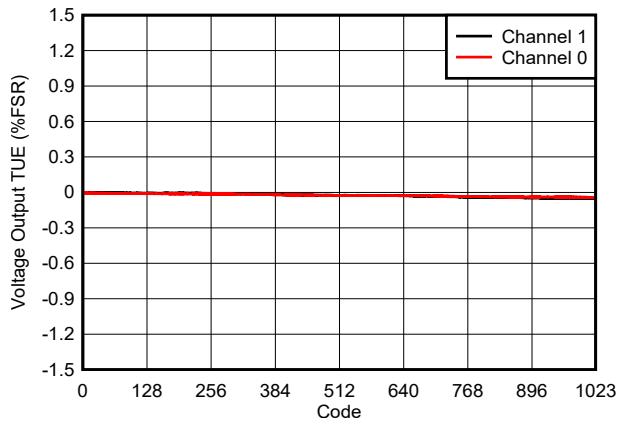


Figure 6-13. Voltage Output TUE vs Digital Input Code

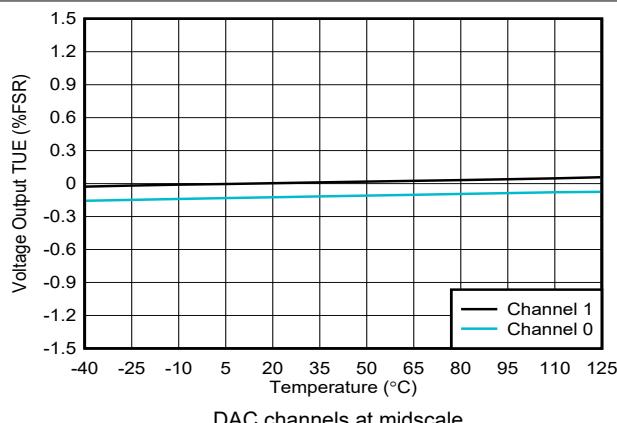


Figure 6-14. Voltage Output TUE vs Temperature

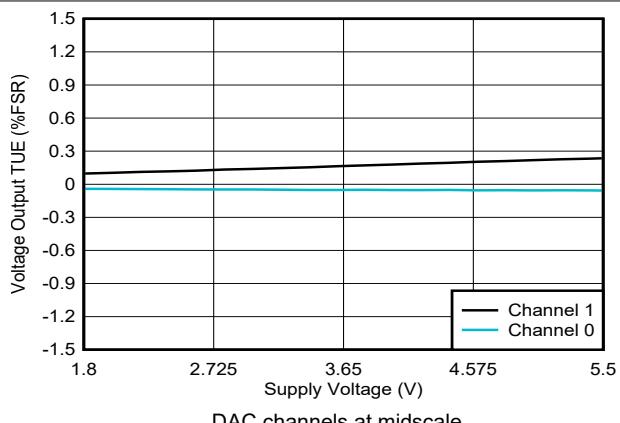


Figure 6-15. Voltage Output TUE vs Supply Voltage

6.16 Typical Characteristics: Voltage Output (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, external reference = 5.5 V , gain = $1 \times$, and DAC outputs unloaded (unless otherwise noted)

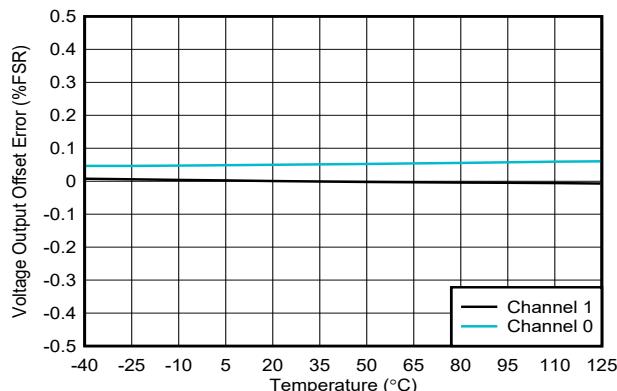


Figure 6-16. Voltage Output Offset Error vs Temperature

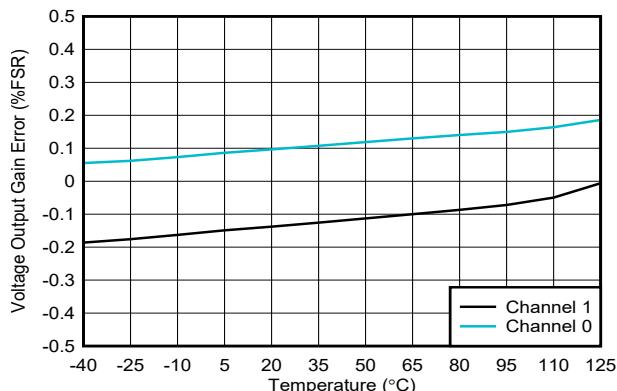


Figure 6-17. Voltage Output Gain Error vs Temperature

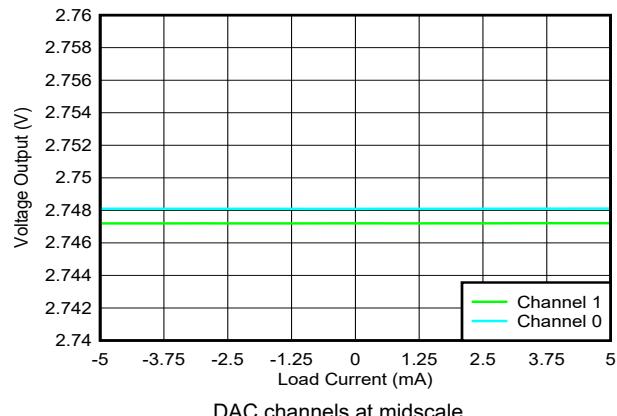


Figure 6-18. Voltage Output vs Load Current

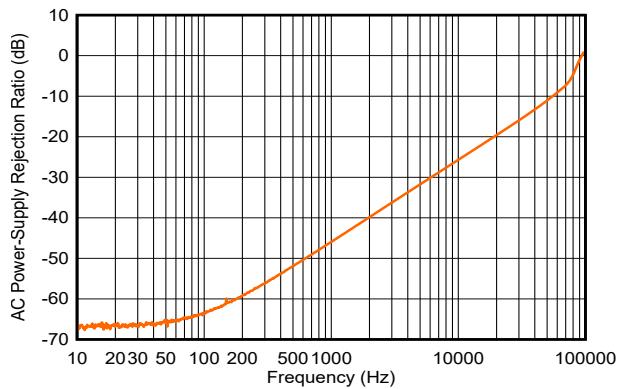


Figure 6-19. Voltage Output AC PSRR vs Frequency

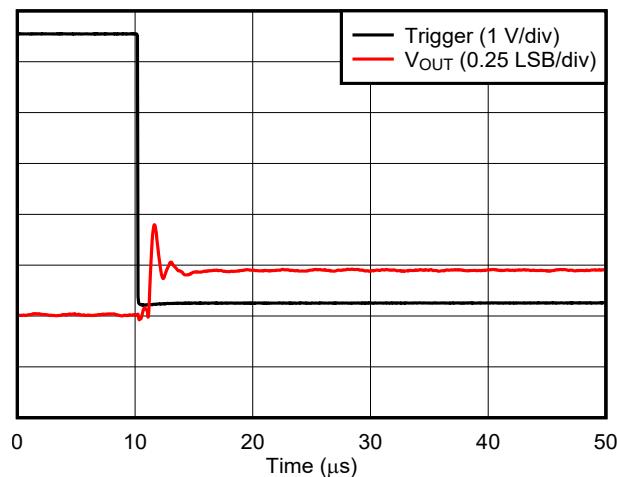


Figure 6-20. Voltage Output Code-to-Code Glitch - Rising Edge

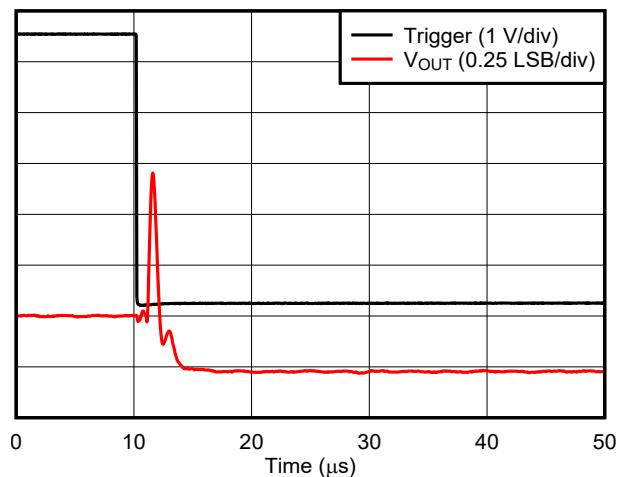


Figure 6-21. Voltage Output Code-to-Code Glitch - Falling Edge

6.16 Typical Characteristics: Voltage Output (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, external reference = 5.5 V , gain = $1 \times$, and DAC outputs unloaded (unless otherwise noted)

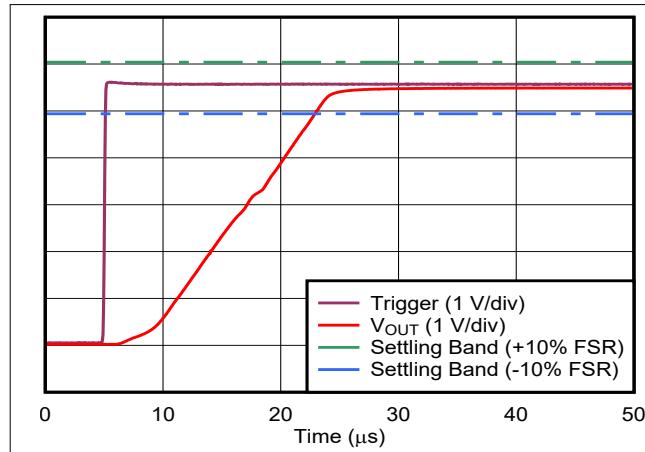


Figure 6-22. Voltage Output Setting Time - Rising Edge

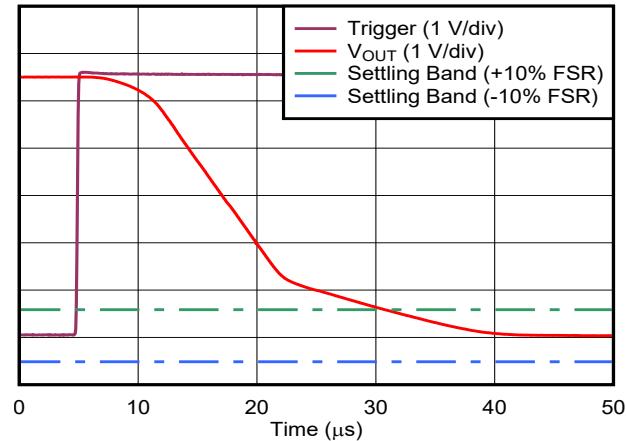


Figure 6-23. Voltage Output Setting Time - Falling Edge

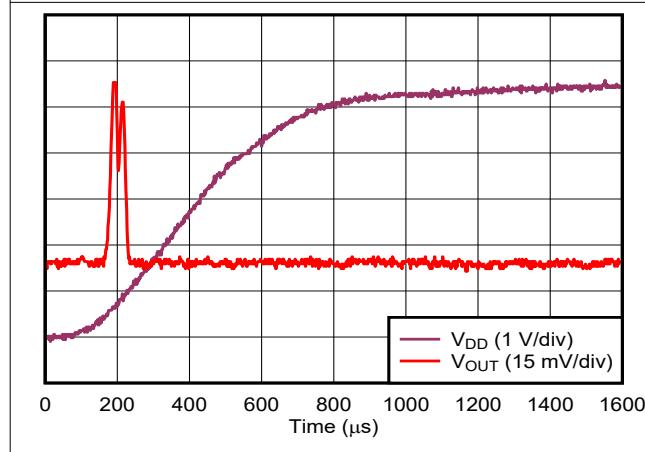


Figure 6-24. Voltage Output Power-On Glitch

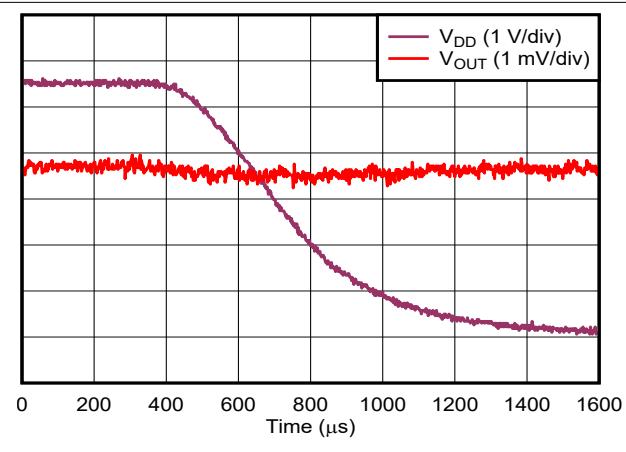


Figure 6-25. Voltage Output Power-Off Glitch

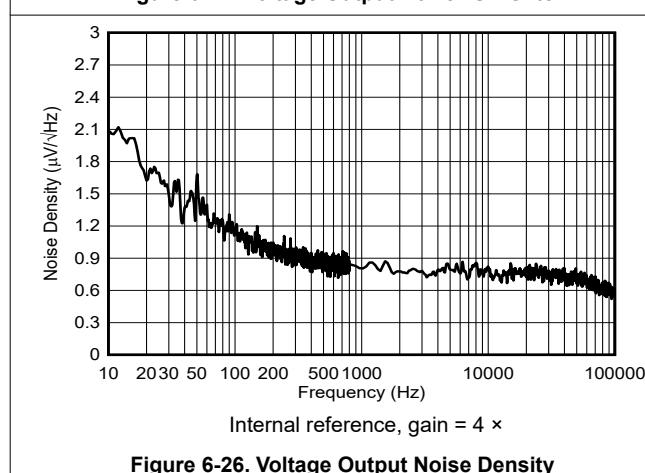


Figure 6-26. Voltage Output Noise Density


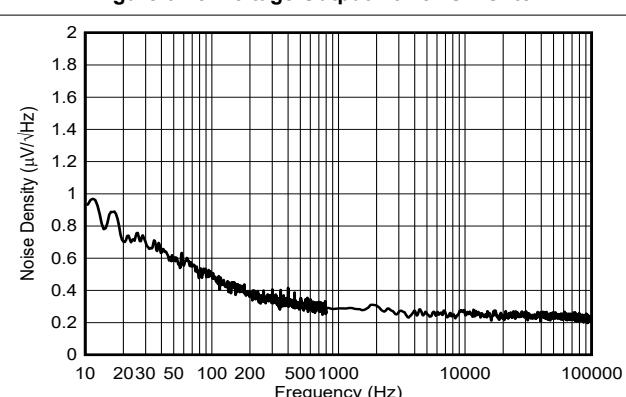


Figure 6-27. Voltage Output Noise Density


6.16 Typical Characteristics: Voltage Output (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5$ V, external reference = 5.5 V, gain = 1 \times , and DAC outputs unloaded (unless otherwise noted)

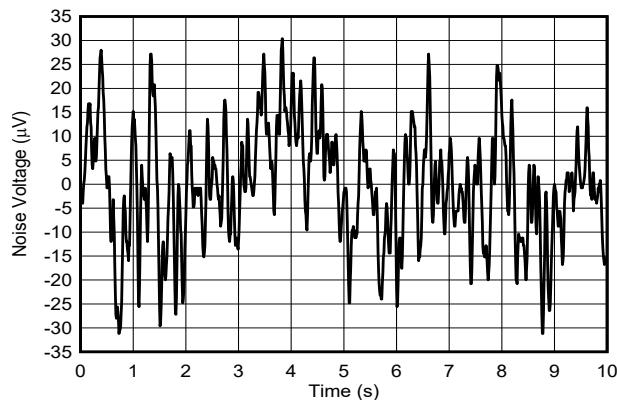

Internal reference, gain = 4x, $f = 0.1$ Hz to 10 Hz

Figure 6-28. Voltage Output Flicker Noise

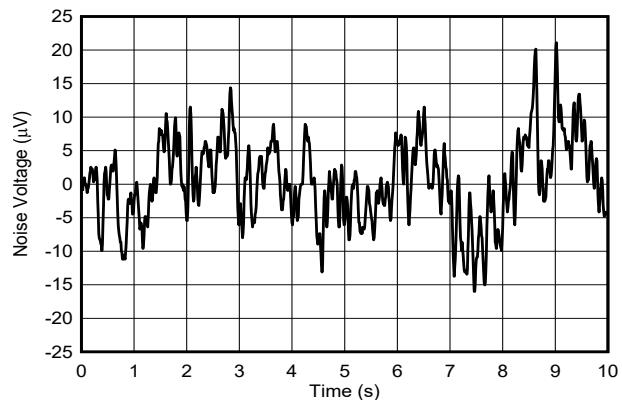

$f = 0.1$ Hz to 10 Hz

Figure 6-29. Voltage Output Flicker Noise

6.17 Typical Characteristics: ADC

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, external reference = 5.5 V , gain = $1 \times$, (unless otherwise noted)

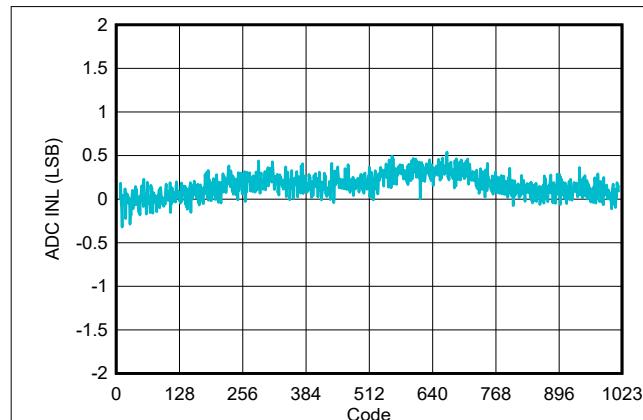


Figure 6-30. ADC INL vs Digital Output Code

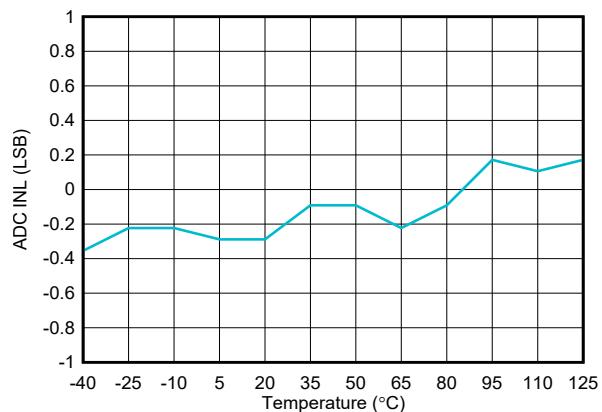


Figure 6-31. ADC INL vs Temperature

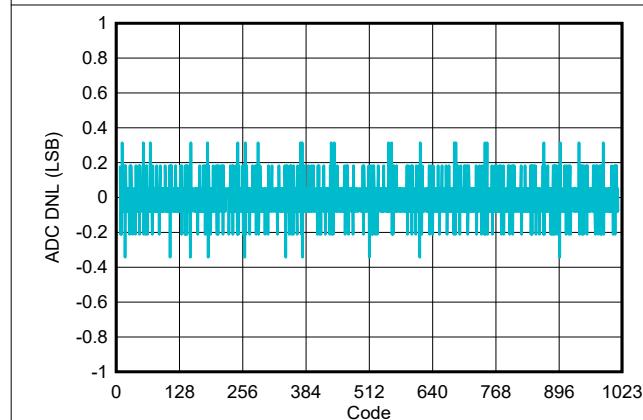


Figure 6-32. ADC DNL vs Digital Output Code

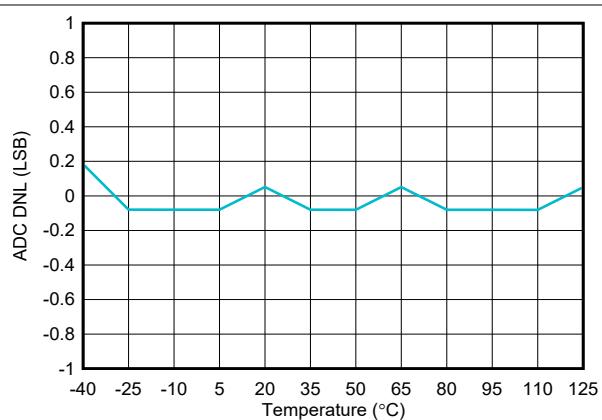


Figure 6-33. ADC DNL vs Temperature

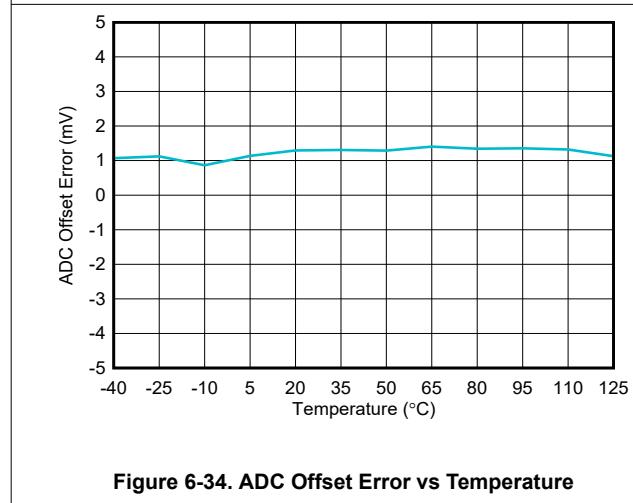


Figure 6-34. ADC Offset Error vs Temperature

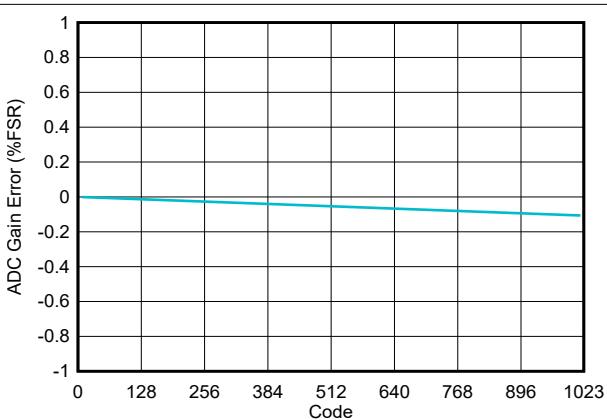


Figure 6-35. ADC Gain Error vs Digital Output Code

6.17 Typical Characteristics: ADC (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5$ V, external reference = 5.5 V, gain = 1 \times , (unless otherwise noted)


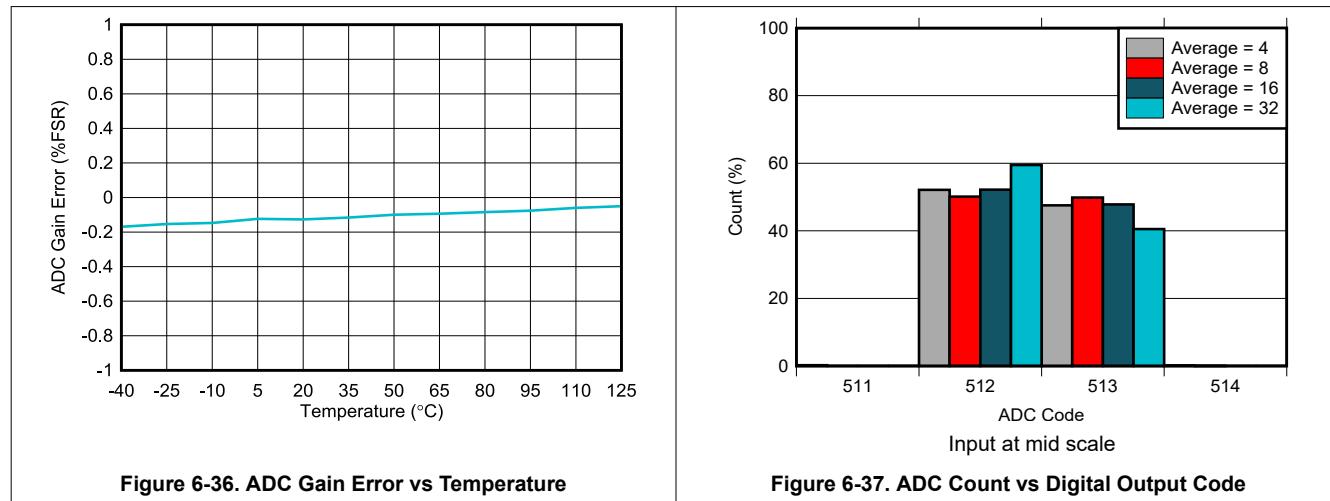


Figure 6-36. ADC Gain Error vs Temperature

Figure 6-37. ADC Count vs Digital Output Code


6.18 Typical Characteristics: General

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, and DAC outputs unloaded (unless otherwise noted)

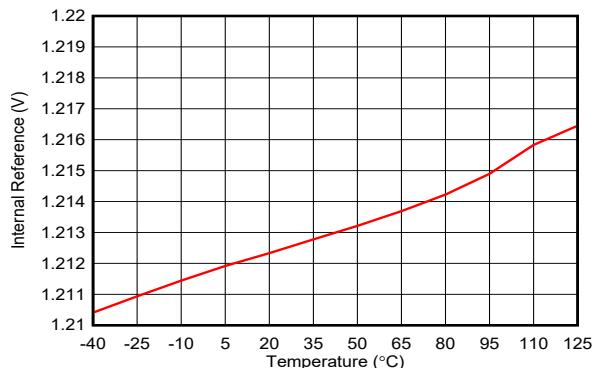


Internal reference

Figure 6-38. Internal Reference vs Temperature

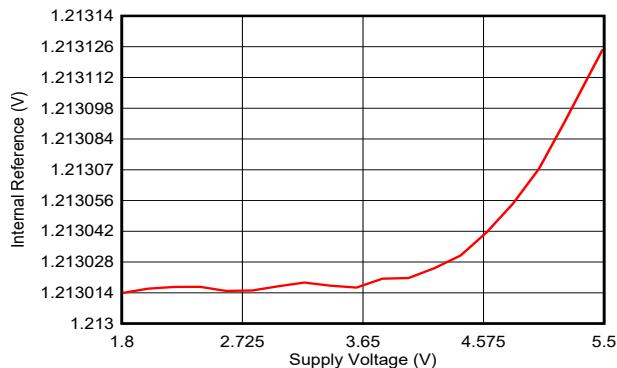

Internal reference

Figure 6-39. Internal Reference vs Supply Voltage

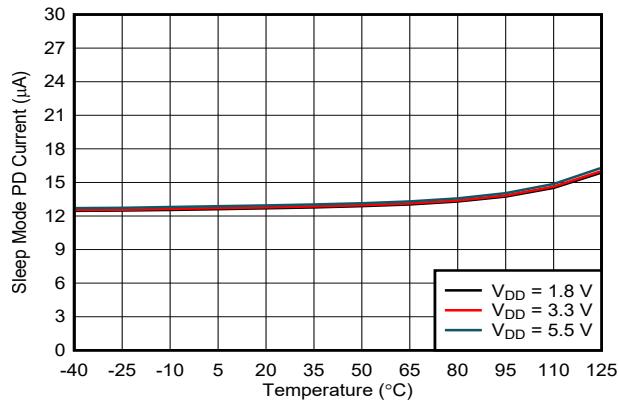

Sleep mode, internal reference disabled

Figure 6-40. Power-Down Current vs Temperature

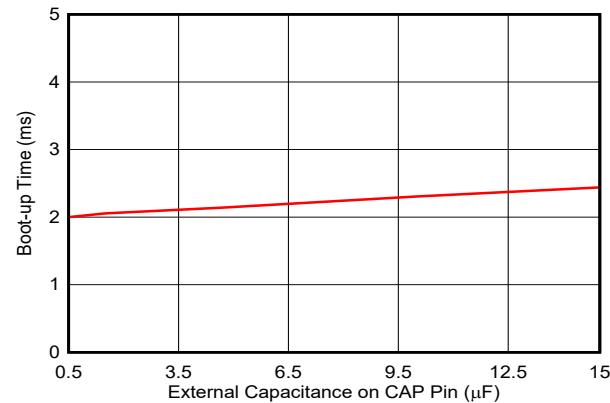


Figure 6-41. Boot-Up Time vs Capacitance on CAP pin

7 Detailed Description


7.1 Overview

The 10-bit AFE53902-Q1 and the 8-bit AFE43902-Q1 devices (AFEx3902-Q1) are dual-channel smart analog front ends (AFE) with buffered voltage-output DAC, PWM, and ADC. The SDA/SCLK pin is repurposed as the PWM output when the VREF/MODE pin is held high.

The AFEx3902-Q1 provide a preprogrammed state machine that functions as a multislope thermal foldback controller. These devices contain nonvolatile memory (NVM), an internal reference and automatically detect I²C and SPI. The devices support Hi-Z power-down modes by default, which can be configured to 10 kΩ-AGND or 100 kΩ-AGND using the NVM. The AFEx3902-Q1 have a power-on-reset (POR) circuit that makes sure all the registers start with default or user-programmed settings using NVM. The AFEx3902-Q1 operate with either an internal reference, external reference, or with power supply as the reference, and provide a full-scale output of 1.8 V to 5.5 V.

The AFEx3902-Q1 support I²C standard mode (100Kbps), fast mode (400Kbps), and fast mode plus (1Mbps). The I²C interface can be configured with four device addresses using the A0 pin. The SPI mode supports a three-wire interface by default, with up to a 25-MHz SCLK input. The NC/SDO pin can be configured as SDO in the NVM for SPI read capability. The AFEx3902-Q1 are designed for thermal foldback of LED lighting in automotive rear lights and headlights, horticulture lighting, and other lighting applications. The state machine and NVM enable *processor-less* operation. As a result of the *smart* feature set, the AFEx3902-Q1 is called a smart AFE.

7.2 Functional Block Diagram

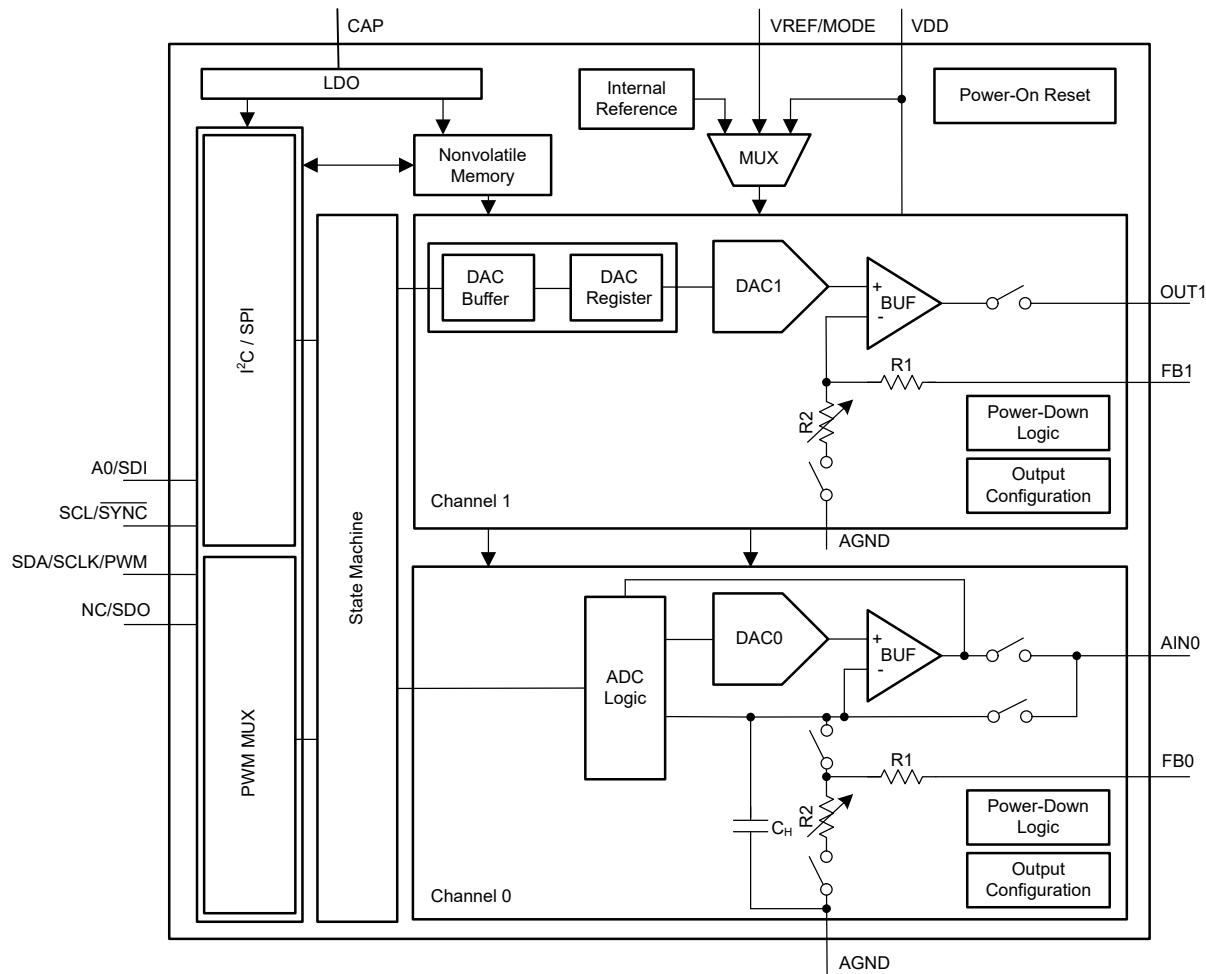

7.3 Feature Description

7.3.1 Smart Analog Front End (AFE) Architecture

The AFEx3902-Q1 smart analog front end (AFE) consist of a 10-bit analog-to-digital converter (ADC) input, a 10-bit (AFE53902-Q1) or 8-bit (AFE43902-Q1) digital-to-analog converter (DAC) output, and a 7-bit pulse-width modulation (PWM) output. The ADC uses a successive-approximation register (SAR) architecture. The DAC uses a string architecture followed by a voltage-output amplifier. The PWM output is multiplexed with one of the digital interface pins. [Section 7.2](#) shows the smart AFE architecture within the block diagram, which operates from a 1.8-V to 5.5-V power supply. The device has an internal voltage reference of 1.21 V. There is an option to select an external reference on the VREF/MODE pin, or use the power supply as a reference. The ADC and DAC use one of these three reference options. Both the voltage-output and current-output modes support multiple programmable output ranges.

The AFEx3902-Q1 feature a preprogrammed state machine supporting multislope thermal foldback operation. [Figure 7-1](#) shows the digital architecture of the smart AFE with the interconnections between different functional blocks. This state machine allows the user to program the coefficients and input-output parameters. The state machine can be disabled by writing to the STATE-MACHINE-CONFIG0 register. The user configurations are stored in the NVM and the state machine can be operated in standalone mode without interfacing to a processor (*processor-less* operation)

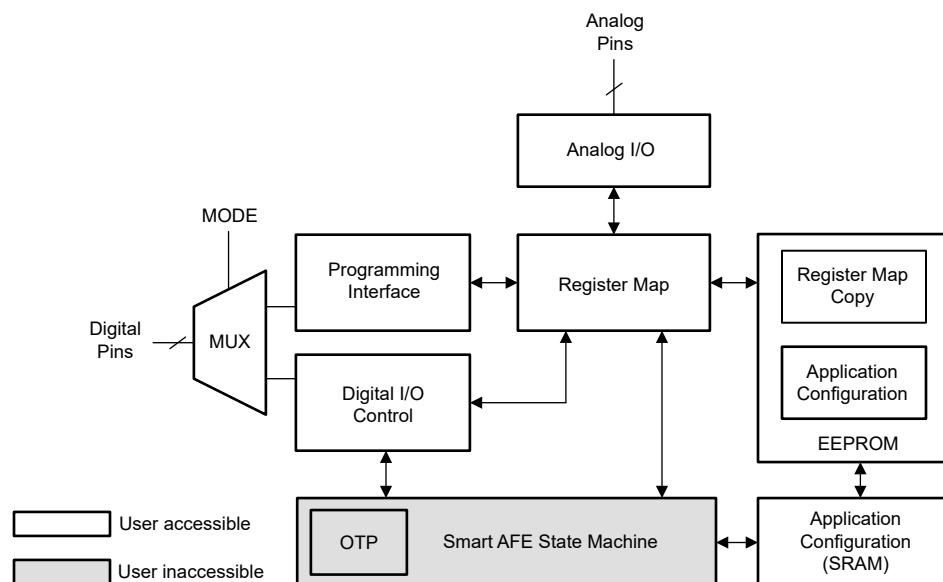


Figure 7-1. Smart AFE Architecture

7.3.2 Programming Interface

The AFEx3902-Q1 have five digital I/O pins that control I²C, SPI, PWM, and mode selection. The VREF/MODE pin must be at logic low to enable the programming interface. These devices automatically detect I²C and SPI protocols at the first successful communication after power-on, and then connect to the detected interface. After an interface protocol is connected, any change in the protocol is ignored. The I²C interface uses the A0 pin to select from among four address options. The SPI is a three-wire interface by default. No readback capability is available in three-wire SPI mode. The NC/SDO pin can be configured as the SDO function in the register map and then programmed into the NVM. With the NC/SDO pin acting as SDO, the SPI works as a four-wire interface. The SPI readback mode is slower than the write mode. The programming interface pins are:

- I²C: SCL, SDA, A0
- SPI: SCLK, SDI, SYNC, NC/SDO

All the digital pins are open drain when used as outputs. Therefore, all the output pins must be pulled up to the desired I/O voltage using external resistors.

7.3.3 Nonvolatile Memory (NVM)

The AFEx3902-Q1 contain nonvolatile memory (NVM) bits. These memory bits are user programmable and erasable, and retain set values in the absence of a power supply. The highlighted gray cells in the *Register Map* show all the register bits that can be stored in the NVM by setting NVM-PROG = 1 in the COMMON-TRIGGER register. The NVM-PROG bit autoresets. The NVM-BUSY bit in the GENERAL-STATUS register is set to 1 by the device when an NVM write or reload operation is ongoing. During this time, the device blocks all read and write operations from and to the device. The NVM-BUSY bit is set to 0 after the write or reload operation is complete; at this point, all read and write operations from and to the device are allowed. The default value for all the registers in the AFEx3902-Q1 is loaded from NVM as soon as a POR event is issued.

The AFEx3902-Q1 also implements a NVM-RELOAD bit in the COMMON-TRIGGER register. Set this bit to 1 for the device to start an NVM-reload operation. The NVM-reload operation overwrites the register map with the stored data from the NVM. After completion, the device autoresets this bit to 0. During the NVM-RELOAD operation, the NVM-BUSY bit is set to 1.

7.3.3.1 NVM Cyclic Redundancy Check (CRC)

The AFEx3902-Q1 implements a cyclic redundancy check (CRC) feature for the NVM to make sure that the data stored in the NVM is uncorrupted. There are two types of CRC alarm bits implemented in the AFEx3902-Q1:

- NVM-CRC-FAIL-USER
- NVM-CRC-FAIL-INT

The NVM-CRC-FAIL-USER bit indicates the status of user-programmable NVM bits, and the NVM-CRC-FAIL-INT bit indicates the status of internal NVM bits. The CRC feature is implemented by storing a 16-bit CRC (CRC-16-CCITT) along with the NVM data each time the NVM program operation (write or reload) is performed and during the device boot up. The device reads the NVM data and validates the data with the stored CRC. The CRC alarm bits (NVM-CRC-FAIL-USER and NVM-CRC-FAIL-INT in the GENERAL-STATUS register) report any errors after the data are read from the device NVM. The alarm bits are set only at boot up.

7.3.3.1.1 NVM-CRC-FAIL-USER Bit

A logic 1 on NVM-CRC-FAIL-USER bit indicates that the user-programmable NVM data are corrupt. During this condition, all registers in the DAC are initialized with factory reset values, and any DAC registers can be written to or read from. To reset the alarm bits to 0, issue a software reset (see [Section 7.3.5](#)) command, or cycle power to the DAC. A software reset or power-cycle also reloads the user-programmable NVM bits. In case the failure persists, reprogram the NVM.

7.3.3.1.2 NVM-CRC-FAIL-INT Bit

A logic 1 on NVM-CRC-FAIL-INT bit indicates that the internal NVM data are corrupt. During this condition, all registers in the DAC are initialized with factory reset values, and any DAC registers can be written to or read from. In case of a temporary failure, to reset the alarm bits to 0, issue a software reset (see [Section 7.3.5](#)) command or cycle power to the DAC. A permanent failure in the NVM makes the device unusable.

7.3.4 Power-On Reset (POR)

The AFEx3902-Q1 family of devices includes a power-on reset (POR) function that controls the output voltage at power up. After the V_{DD} supply has been established, a POR event is issued. The POR causes all registers to initialize to default values, and communication with the device is valid only after a POR (boot-up) delay. The default value for all the registers in the AFEx3902-Q1 is loaded from NVM as soon as the POR event is issued.

When the device powers up, a POR circuit sets the device to the default mode. The POR circuit requires specific V_{DD} levels, as indicated in [Figure 7-2](#), to make sure that the internal capacitors discharge and reset the device at power up. To make sure that a POR occurs, V_{DD} must be less than 0.7 V for at least 1 ms. When V_{DD} drops to less than 1.65 V, but remains greater than 0.7 V (shown as the undefined region), the device may or may not reset under all specified temperature and power-supply conditions. In this case, initiate a POR. When V_{DD} remains greater than 1.65 V, a POR does not occur.

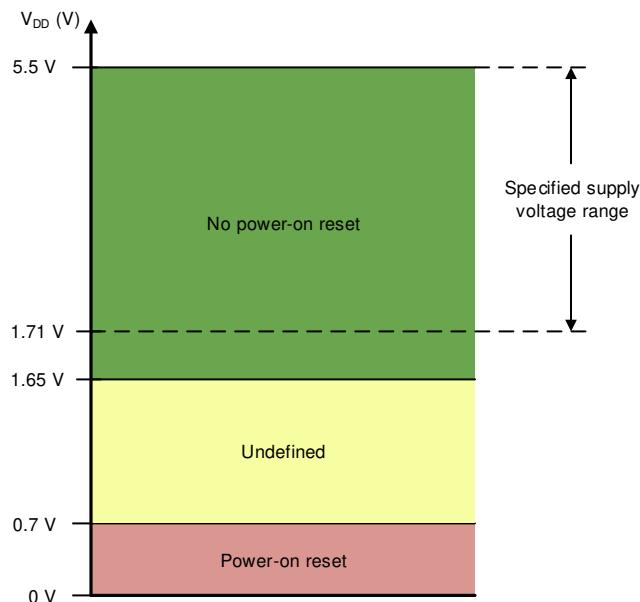


Figure 7-2. Threshold Levels for V_{DD} POR Circuit

7.3.5 External Reset

An external reset to the device can be triggered through the register map. To initiate a device software reset event, write the reserved code 1010b to the RESET field in the COMMON-TRIGGER register. A software reset initiates a POR event.

7.3.6 Register-Map Lock

The AFEx3902-Q1 implement a register-map lock feature that prevents an accidental or unintended write to the DAC registers. The device locks all the registers when the DEV-LOCK bit in the COMMON-CONFIG register is set to 1. However, the software reset function through the COMMON-TRIGGER register is not blocked when using I²C interface. To bypass the DEV-LOCK setting, write 0101b to the DEV-UNLOCK bits in the COMMON-TRIGGER register.

7.4 Device Functional Modes

7.4.1 Digital-to-Analog Converter (DAC) Mode

The ADC and DAC channels can be enabled by selecting the power-up option in the VOUT-PDN-X or ADC-PDN-X fields in the COMMON-CONFIG register. Short the OUTx and FBx pins of the DAC channel externally for closed-loop amplifier output. An open FBx pin saturates the amplifier output for the DAC channel. To achieve the desired voltage output and ADC input ranges, select the correct reference option and select the amplifier gain.

7.4.1.1 Voltage Reference and DAC Transfer Function

Figure 7-3 shows the three possible voltage reference options with the AFEx3902-Q1: the power supply as reference, internal reference, or external reference (VREF/MODE pin). The DAC transfer function changes based on the voltage reference selection.

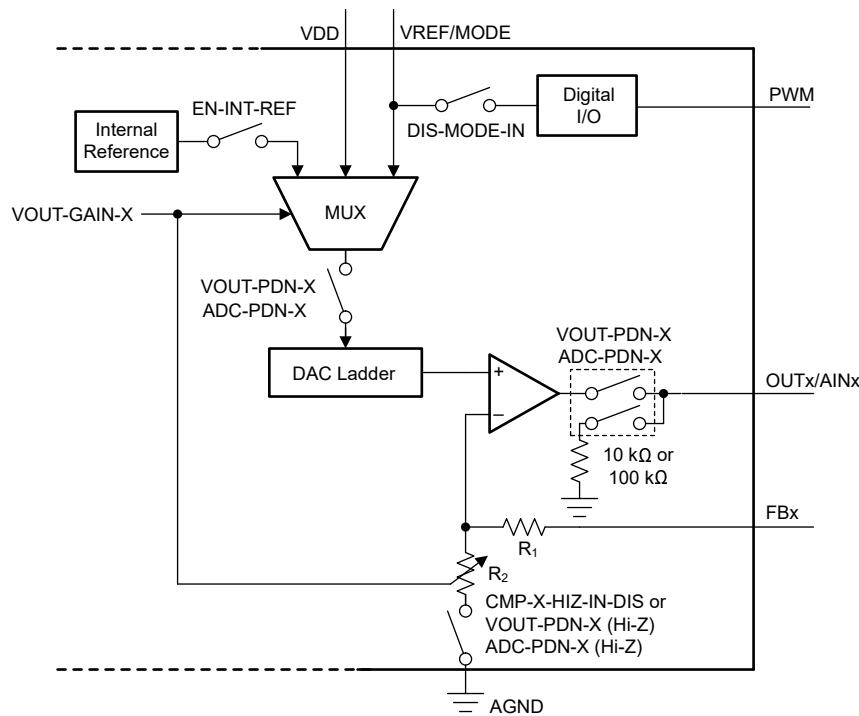


Figure 7-3. Voltage Reference Selection and Power-Down Logic

7.4.1.1.1 Power-Supply as Reference

By default, the AFEx3902-Q1 operate with the power-supply pin (VDD) as a reference. [Equation 1](#) shows DAC transfer function when the power-supply pin is used as reference. The gain at the output stage is always $1 \times$.

$$V_{OUT} = \frac{DAC_DATA}{2^N} \times V_{DD} \quad (1)$$

where:

- N is the resolution in bits, 10 bits for AFE53902-Q1 and 8 bits for AFE43902-Q1.
- DAC_DATA is the decimal equivalent of the binary code that is loaded to the DAC register.
- DAC_DATA ranges from 0 to $2^N - 1$.
- V_{DD} is used as the reference voltage.

7.4.1.1.2 Internal Reference

The AFEx3902-Q1 contain an internal reference that is disabled by default. To enable the internal reference, write 1 to the EN-INT-REF bit in the COMMON-CONFIG register. The internal reference generates a fixed 1.21-V voltage (typical). Use the VOUT-GAIN-x field in the DAC-x-VOUT-CMP-CONFIG register to achieve gains of 1.5 ×, 2 ×, 3 ×, or 4 × for the DAC output voltage (V_{OUT}). [Equation 2](#) shows DAC transfer function using the internal reference.

$$V_{OUT} = \frac{DAC_DATA}{2^N} \times V_{REF} \times GAIN \quad (2)$$

where:

- N is the resolution in bits, 10 bits for AFE53902-Q1 or 8 bits for AFE43902-Q1.
- DAC_DATA is the decimal equivalent of the binary code that is loaded to the DAC register.
- DAC_DATA ranges from 0 to $2^N - 1$.
- V_{REF} is the internal reference voltage = 1.21 V.
- GAIN = 1.5 ×, 2 ×, 3 ×, or 4 ×, based on VOUT-GAIN-x bits.

7.4.1.1.3 External Reference

The AFEx3902-Q1 provide an external reference input. Select the external reference option by configuring the VOUT-GAIN-x field in the DAC-x-VOUT-CMP-CONFIG register appropriately. The external reference can be between 1.8 V and VDD. [Equation 3](#) shows DAC transfer function when the external reference is used.

Note

The external reference must be less than VDD in both transient and steady-state conditions. Therefore, the external reference must ramp up after VDD and ramp down before VDD.

$$V_{OUT} = \frac{DAC_DATA}{2^N} \times V_{REF} \quad (3)$$

where:

- N is the resolution in bits, 10 bits for AFE53902-Q1 or 8 bits for AFE43902-Q1.
- DAC_DATA is the decimal equivalent of the binary code that is loaded to the DAC register.
- DAC_DATA ranges from 0 to $2^N - 1$.
- V_{REF} is the external reference voltage.

7.4.2 Pulse-Width Modulation (PWM) Mode

The AFEx3902-Q1 provides the 7-bit PWM output on the SDA/SCLK/PWM pin. Pull the VREF/MODE pin high to enable PWM functionality. [Table 7-1](#) lists all the possible PWM frequency configurations.

Table 7-1. PWM Frequency Configuration

| SRAM LOCATION | PWM-FREQ | PWM FREQUENCY (kHz) | DUTY CYCLE (%) FOR CODE 1 | DUTY CYCLE (%) FOR CODE 126 |
|---------------|----------|---------------------|---------------------------|-----------------------------|
| 0x2E [11:7] | 0 | Invalid | N/A | N/A |
| | 1 | 48.828 | 4.88 | 95.12 |
| | 2 | 24.414 | 2.44 | 97.56 |
| | 3 | 16.276 | 1.63 | 98.37 |
| | 4 | 12.207 | 1.22 | 98.44 |
| | 5 | 8.138 | 0.81 | 98.44 |
| | 6 | 6.104 | 0.78 | 98.44 |
| | 7 | 3.052 | 0.78 | 98.44 |
| | 8 | 2.035 | 0.78 | 98.44 |
| | 9 | 1.526 | 0.78 | 98.44 |
| | 10 | 1.221 | 0.78 | 98.44 |
| | 11 | 1.017 | 0.78 | 98.44 |
| | 12 | 0.872 | 0.78 | 98.44 |
| | 13 | 0.763 | 0.78 | 98.44 |
| | 14 | 0.678 | 0.78 | 98.44 |
| | 15 | 0.610 | 0.78 | 98.44 |
| | 16 | 0.555 | 0.78 | 98.44 |
| | 17 | 0.509 | 0.78 | 98.44 |
| | 18 | 0.470 | 0.78 | 98.44 |
| | 19 | 0.436 | 0.78 | 98.44 |
| | 20 | 0.407 | 0.78 | 98.44 |
| | 21 | 0.381 | 0.78 | 98.44 |
| | 22 | 0.359 | 0.78 | 98.44 |
| | 23 | 0.339 | 0.78 | 98.44 |
| | 24 | 0.321 | 0.78 | 98.44 |
| | 25 | 0.305 | 0.78 | 98.44 |
| | 26 | 0.291 | 0.78 | 98.44 |
| | 27 | 0.277 | 0.78 | 98.44 |
| | 28 | 0.265 | 0.78 | 98.44 |
| | 29 | 0.254 | 0.78 | 98.44 |
| | 30 | 0.244 | 0.78 | 98.44 |
| | 31 | 0.218 | 0.78 | 98.44 |

The duty cycle of the PWM is proportional to the 7-bit code, 0d to 126d. [Table 7-2](#) shows that code 127d corresponds to 100% duty cycle. The duty cycle 99.22% (127d/128d) is skipped to achieve 100% duty cycle using a 7-bit code.

Table 7-2. PWM Duty Cycle Setting

| CODE | DUTY-CYCLE | DESCRIPTION |
|------|------------|--|
| 0 | 0% | Always 0 |
| 1 | 0.78% | Minimum linear duty cycle |
| x | (x/128)% | x = code between 2d and 125d, both included |
| 126 | 98.44% | Maximum linear duty cycle |
| 127 | 100% | Always 1. The duty cycle of 99.22% (127d/128d) is skipped. |

7.4.3 Analog-to-Digital Converter (ADC) Mode

Channel 0 of the AFEx3902-Q1 acts as an ADC. The ADC is controlled by the state-machine in this device. The transfer function of the ADC is given in [Equation 4](#).

$$\text{ADC_DATA} = \left(\text{INTEGER} \right) \left(\frac{V_{IN}}{V_{FS}} \right) \times 2^N \quad (4)$$

where:

- ADC_DATA is the output of the ADC available to the state machine and is limited to $(2^N - 1)$.
- V_{IN} is the input voltage at the AIN0 pin.
- V_{FS} is the full-scale input voltage, as provided in [Table 7-3](#).
- N is the number of ADC bits = 10.
- INTEGER denotes integer division.

Table 7-3. Full Scale Analog Input (V_{FS})

| REFERENCE (VREF) | GAIN | V_{FS} |
|------------------|-------|--------------------------|
| Power supply | 1 × | $VDD / 3$ |
| External | 1 × | $VREF / 3$ |
| Internal | 1.5 × | $(VREF \times GAIN) / 3$ |
| | 2 × | $(VREF \times GAIN) / 3$ |
| | 3 × | $(VREF \times GAIN) / 6$ |
| | 4 × | $(VREF \times GAIN) / 6$ |

7.4.4 Multislope Thermal Foldback Mode

AFEx3902-Q1 provide a multislope transfer function that is used in fine control of LED thermal foldback or similar other applications. The input to the transfer function are the (x, y) coordinates of the junction points. The x-axis (temperature input) and y-axis (voltage or PWM output) are normalized to the 10-bit straight binary code range. Figure 7-4 shows the pictorial depiction of the multislope transfer function. Table 7-4 lists the SRAM locations to configure the multislope transfer function.

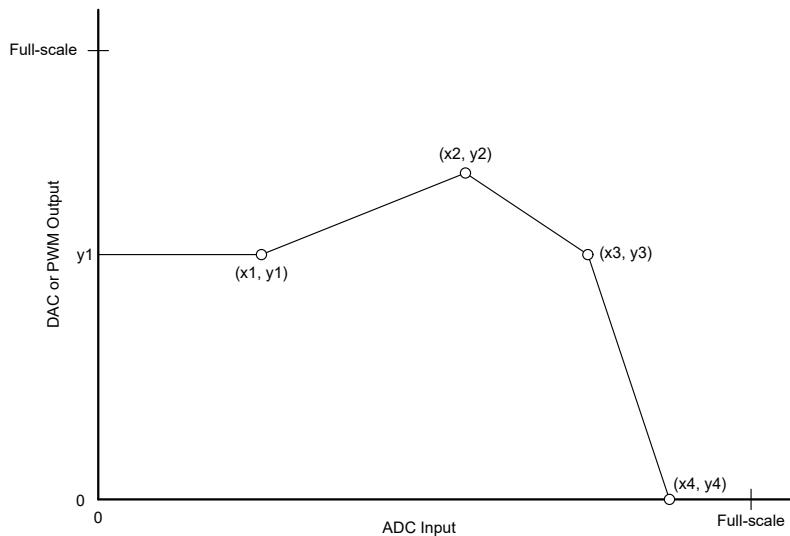


Figure 7-4. Multislope Transfer Function

Table 7-4. Multislope Transfer Function Coordinates

| COORDINATES | REGISTER NAME | SRAM ADDRESS (HEX) | DEFAULT VALUE (HEX) |
|-------------|---------------|--------------------|---------------------|
| x1 | X1-OUTPUT | 0x26 | 0x15 |
| y1 | X1-OUTPUT | 0x27 | 0x200 |
| x2 | X2-OUTPUT | 0x28 | 0x32 |
| y2 | Y2-OUTPUT | 0x29 | 0x3FF |
| x3 | X3-OUTPUT | 0x2A | 0x50 |
| y3 | Y3-OUTPUT | 0x2B | 0x00 |
| x4 | X4-OUTPUT | 0x2C | 0x68 |
| y4 | Y4-OUTPUT | 0x2D | 0x2BC |

7.4.4.1 Thermistor Linearization

Thermistors, especially the negative temperature-coefficient (NTC) thermistors are used to measure LED temperature in front lights and rear lights of automotive vehicles. NTCs have a nonlinear temperature response. The AFEx3902-Q1 provide a three-segment, piecewise, linear method of linearizing the NTC before feeding the value to thermal foldback computation. [Figure 7-5](#) depicts how a NTC curve is linearized.

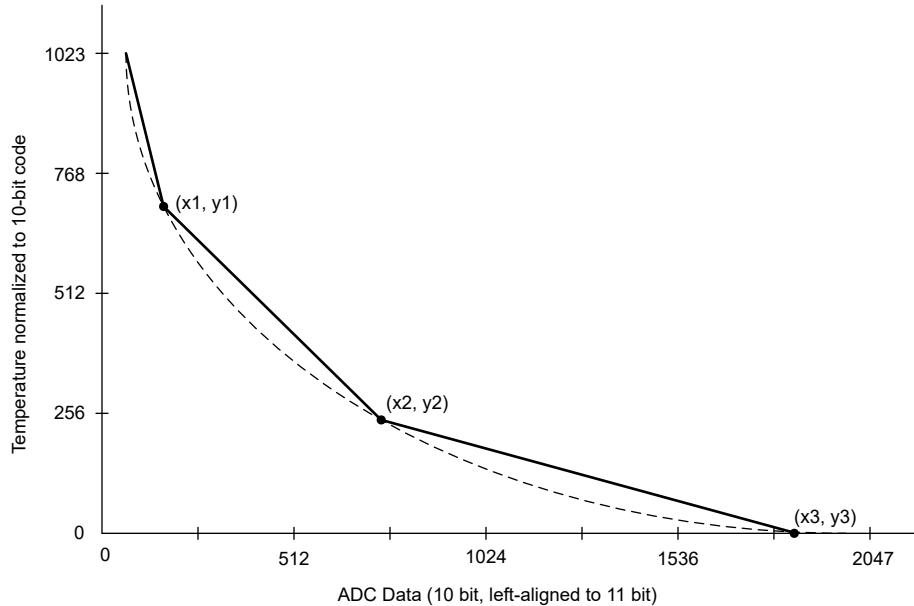


Figure 7-5. Thermistor Linearization

[Table 7-5](#) lists the SRAM locations for the linearization coordinates.

Table 7-5. Thermistor Linearization Coordinates

| COORDINATE | REGISTER NAME | SRAM ADDRESS (HEX) | DEFAULT VALUE (HEX) |
|------------|----------------|--------------------|---------------------|
| x1 | X1-TEMPERATURE | 0x20 | 0x69 |
| y1 | Y1-TEMPERATURE | 0x21 | 0x288 |
| x2 | X2-TEMPERATURE | 0x22 | 0x46 |
| y2 | Y2-TEMPERATURE | 0x23 | 0x634 |
| x3 | X3-TEMPERATURE | 0x24 | 0x14 |
| y3 | Y3-TEMPERATURE | 0x25 | 0x15 |

7.5 Programming

7.5.1 SPI Programming Mode

An SPI access cycle for the AFEx3902-Q1 is initiated by asserting the **SYNC** pin low. The serial clock, **SCLK**, can be continuous or gated. **SDI** data are clocked on the **SCLK** falling edges. The SPI frame for the AFEx3902-Q1 is 24 bits long. Therefore, the **SYNC** pin must stay low for at least 24 **SCLK** falling edges. The access cycle ends when the **SYNC** pin is deasserted high. If the access cycle contains less than the minimum clock edges, the communication is ignored. By default, the **SDO** pin is not enabled (three-wire SPI). In three-wire SPI mode, if the access cycle contains more than the minimum clock edges, only the first 24 bits are used by the device. When **SYNC** is high, the **SCLK** and **SDI** signals are blocked, and **SDO** becomes Hi-Z to allow data readback from other devices connected on the bus.

Table 7-6 and **Figure 7-6** describe the format for the 24-bit SPI access cycle. The first byte input to **SDI** is the instruction cycle. The instruction cycle identifies the request as a read or write command and the 7-bit address that is to be accessed. The last 16 bits in the cycle form the data cycle.

Table 7-6. SPI Read/Write Access Cycle

| BIT | FIELD | DESCRIPTION |
|-------|----------|---|
| 23 | R/W | Identifies the communication as a read or write command to the address register: R/W = 0 sets a write operation. R/W = 1 sets a read operation |
| 22-16 | A[6:0] | Register address: specifies the register to be accessed during the read or write operation |
| 15-0 | DI[15:0] | Data cycle bits: If a write command, the data cycle bits are the values to be written to the register with address A[6:0]. If a read command, the data cycle bits are <i>don't care</i> values. |

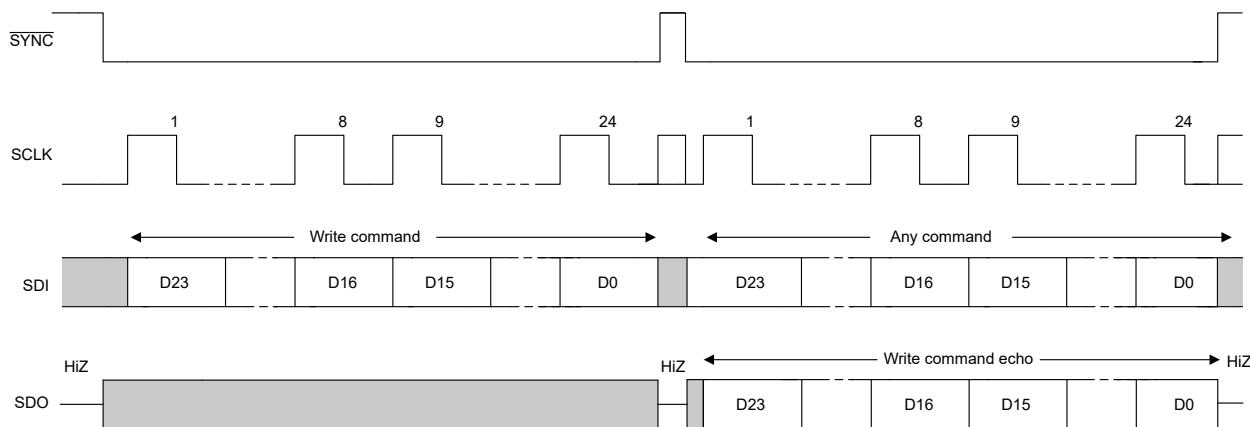


Figure 7-6. SPI Write Cycle

Read operations require that the **SDO** pin is first enabled by setting the **SDO-EN** bit in the **INTERFACE-CONFIG** register. This configuration is called four-wire SPI. A read operation is initiated by issuing a read command access cycle. After the read command, a second access cycle must be issued to get the requested data. **Table 7-7** and **Figure 7-7** show the output data format. Data are clocked out on the **SDO** pin either on the falling edge or rising edge of **SCLK** according to the **FSDO** bit (see also **Figure 6-3**).

Table 7-7. SDO Output Access Cycle

| BIT | FIELD | DESCRIPTION |
|-------|----------|--|
| 23 | R/W | Echo R/W from previous access cycle |
| 22-16 | A[6:0] | Echo register address from previous access cycle |
| 15-0 | DI[15:0] | Readback data requested on previous access cycle |

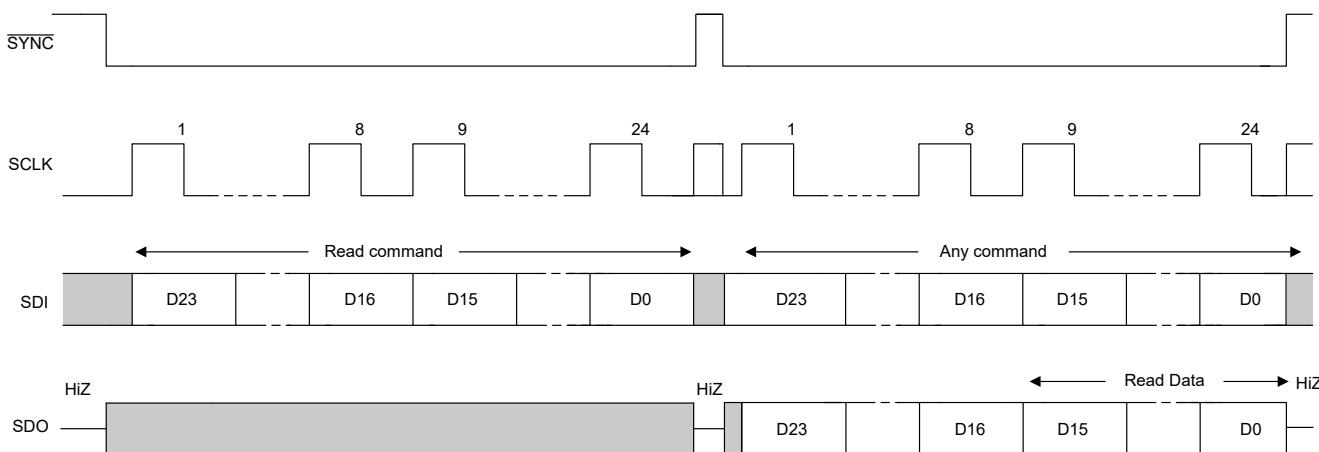


Figure 7-7. SPI Read Cycle

The daisy-chain operation is also enabled with the SDO pin. Figure 7-8 shows that in daisy-chain mode, multiple devices are connected in a *chain* with the SDO pin of one device is connected to SDI pin of the following device. The SPI host drives the SDI pin of the first device in the chain. The SDO pin of the last device in the chain is connected to the POCI pin of the SPI host. In four-wire SPI mode, if the access cycle contains multiples of 24 clock edges, only the last 24 bits are used by the device first device in the chain. If the access cycle contains clock edges that are not in multiples of 24, the SPI packet is ignored by the device. Figure 7-9 describes the packet format for the daisy-chain write cycle.

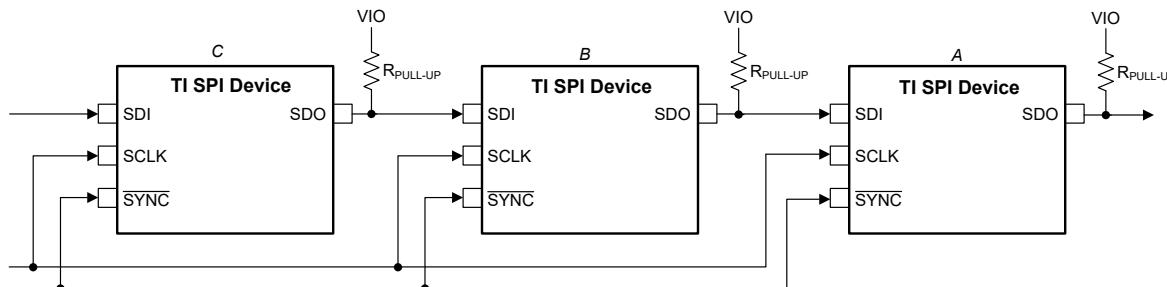


Figure 7-8. SPI Daisy-Chain Connection

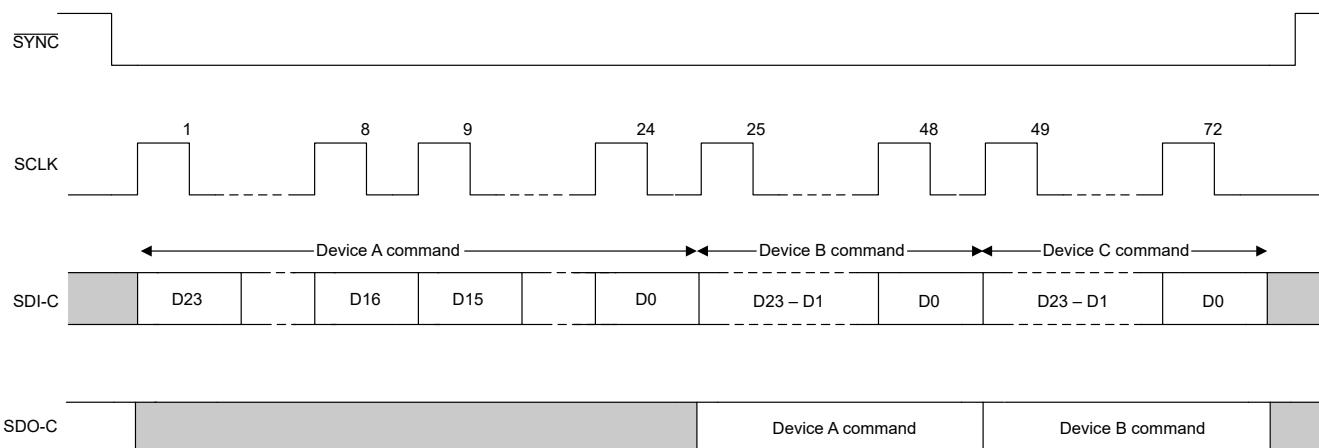


Figure 7-9. SPI Daisy-Chain Write Cycle

7.5.2 I²C Programming Mode

The AFEx3902-Q1 has a 2-wire serial interface (SCL and SDA), and one address pin (A0); see also [Figure 5-1](#). The I²C bus consists of a data line (SDA) and a clock line (SCL) with pullup structures. When the bus is idle, both SDA and SCL lines are pulled high. All the I²C-compatible devices connect to the I²C bus through the open drain I/O pins, SDA and SCL.

The I²C specification states that the device that controls communication is called a *controller*, and the devices that are controlled by the controller are called *targets*. The controller generates the SCL signal. The controller also generates special timing conditions (start condition, repeated start condition, and stop condition) on the bus to indicate the start or stop of a data transfer. Device addressing is completed by the controller. The controller on an I²C bus is typically a microcontroller or digital signal processor (DSP). The AFEx3902-Q1 operates as a target on the I²C bus. A target acknowledges controller commands, and upon controller control, receives or transmits data.

Typically, the AFEx3902-Q1 family operates as a target receiver. A controller writes to the AFEx3902-Q1, a target receiver. However, if a controller requires the AFEx3902-Q1 internal register data, the AFEx3902-Q1 operates as a target transmitter. In this case, the controller reads from the AFEx3902-Q1. According to I²C terminology, read and write refer to the controller.

The AFEx3902-Q1 supports the following data transfer modes:

- Standard mode (100Kbps)
- Fast mode (400Kbps)
- Fast mode plus (1.0Mbps)

The data transfer protocol for standard and fast modes is exactly the same; therefore, both modes are referred to as *F/S-mode* in this document. The fast mode plus protocol is supported in terms of data transfer speed, but not output current. The low-level output current is 3 mA; similar to the case of standard and fast modes. The AFEx3902-Q1 supports 7-bit addressing. The 10-bit addressing mode is not supported. The device supports the general call reset function. Sending the following sequence initiates a software reset within the device: start or repeated start, 0x00, 0x06, stop. The reset is asserted within the device on the rising edge of the ACK bit, following the second byte.

Other than specific timing signals, the I²C interface works with serial bytes. At the end of each byte, a ninth clock cycle generates and detects an acknowledge signal. An acknowledge is when the SDA line is pulled low during the high period of the ninth clock cycle. [Figure 7-10](#) depicts a not-acknowledge, when the SDA line is left high during the high period of the ninth clock cycle.

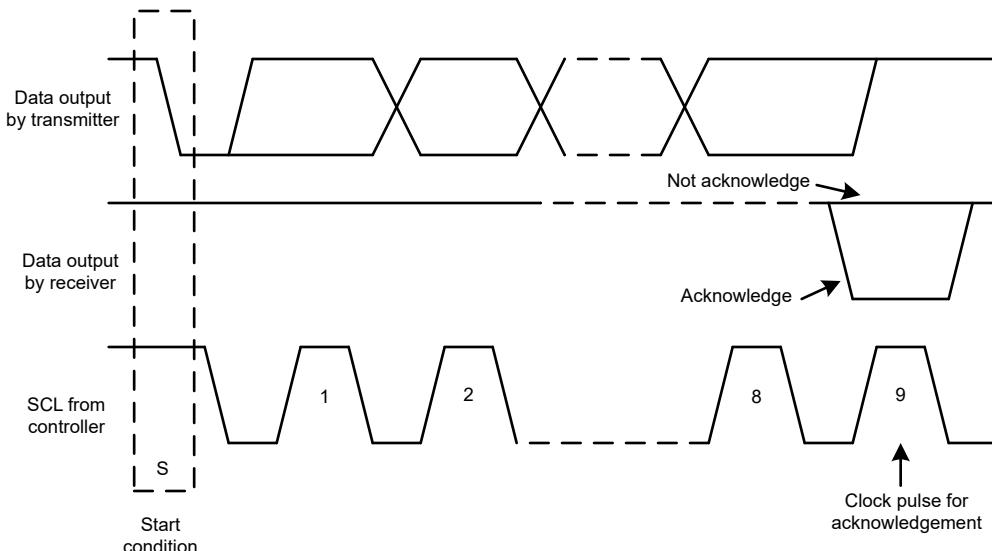


Figure 7-10. Acknowledge and Not Acknowledge on the I²C Bus

7.5.2.1 F/S Mode Protocol

The following steps explain a complete transaction in F/S mode.

1. The controller initiates data transfer by generating a start condition. [Figure 7-11](#) shows that the start condition is when a high-to-low transition occurs on the SDA line while SCL is high. All I²C-compatible devices recognize a start condition.
2. The controller then generates the SCL pulses, and transmits the 7-bit address and the read/write direction bit (R/W) on the SDA line. During all transmissions, the controller makes sure that data are valid. [Figure 7-12](#) shows that a valid data condition requires the SDA line to be stable during the entire high period of the clock pulse. All devices recognize the address sent by the controller and compare the address to the respective internal fixed address. Only the target device with a matching address generates an acknowledge by pulling the SDA line low during the entire high period of the 9th SCL cycle (see also [Figure 7-10](#)). When the controller detects this acknowledge, the communication link with a target has been established.
3. The controller generates further SCL cycles to transmit (R/W bit 0) or receive (R/W bit 1) data to the target. In either case, the receiver must acknowledge the data sent by the transmitter. The acknowledge signal can be generated by the controller or by the target, depending on which is the receiver. The 9-bit valid data sequences consists of eight data bits and one acknowledge-bit, and can continue as long as necessary.
4. [Figure 7-11](#) shows that to signal the end of the data transfer, the controller generates a stop condition by pulling the SDA line from low-to-high while the SCL line is high. This action releases the bus and stops the communication link with the addressed target. All I²C-compatible devices recognize the stop condition. Upon receipt of a stop condition, the bus is released, and all target devices then wait for a start condition followed by a matching address.

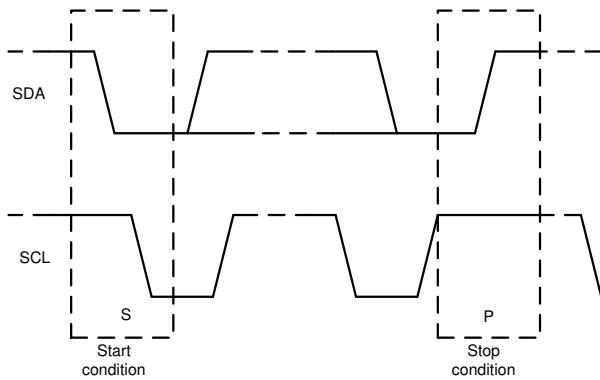


Figure 7-11. Start and Stop Conditions

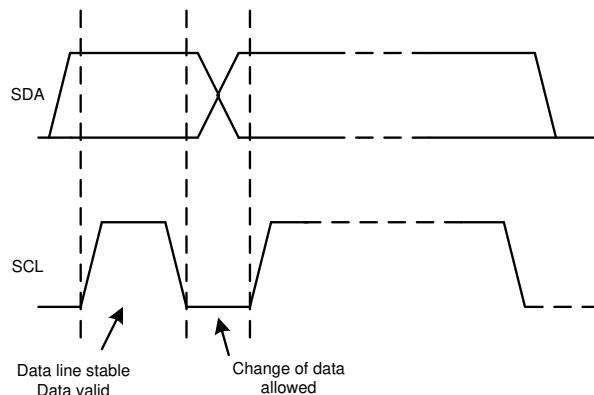


Figure 7-12. Bit Transfer on the I²C Bus

7.5.2.2 I²C Update Sequence

Table 7-8 shows that for a single update, the AFEx3902-Q1 requires a start condition, a valid I²C address byte, a command byte, and two data bytes.

Table 7-8. Update Sequence

| MSB | ... | LSB | ACK | MSB | ... | LSB | ACK | MSB | ... | LSB | ACK | MSB | ... | LSB | ACK |
|---------------------------------------|-----|-----|-----|-----------------------------------|-----|-----|-----|------------------|-----|-----|-----|------------------|-----|-----|-----|
| Address (A) byte Section 7.5.2.2.1 | | | | Command byte Section 7.5.2.2.2 | | | | Data byte - MSDB | | | | Data byte - LSDB | | | |
| DB [31:24] | | | | DB [23:16] | | | | DB [15:8] | | | | DB [7:0] | | | |

Figure 7-13 shows that after each byte is received, the AFEx3902-Q1 acknowledges the byte by pulling the SDA line low during the high period of a single clock pulse. These four bytes and acknowledge cycles make up the 36 clock cycles required for a single update to occur. A valid I²C address byte selects the AFEx3902-Q1.

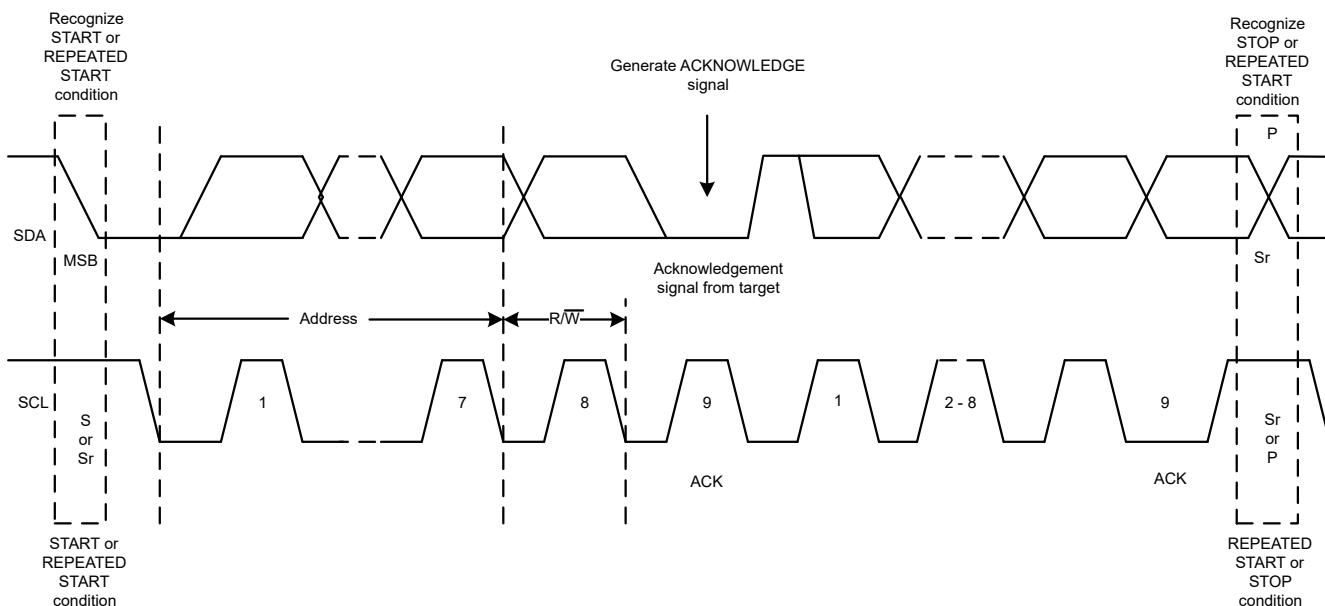


Figure 7-13. I²C Bus Protocol

The command byte sets the operating mode of the selected AFEx3902-Q1 device. For a data update to occur when the operating mode is selected by this byte, the AFEx3902-Q1 device must receive two data bytes: the most significant data byte (MSDB) and least significant data byte (LSDB). The AFEx3902-Q1 device performs an update on the falling edge of the acknowledge signal that follows the LSDB.

When using fast mode (clock = 400 kHz), the maximum DAC update rate is limited to 10 kSPS. Using fast mode plus (clock = 1 MHz), the maximum DAC update rate is limited to 25 kSPS. When a stop condition is received, the AFEx3902-Q1 device releases the I²C bus and awaits a new start condition.

7.5.2.2.1 Address Byte

Table 7-9 depicts the address byte, the first byte received from the controller device following the start condition. The first four bits (MSBs) of the address are factory preset to 0b1001. The next three bits of the address are controlled by the A0 pin. The A0 pin input can be connected to VDD, AGND, SCL, or SDA. The A0 pin is sampled during the first byte of each data frame to determine the address. The device latches the value of the address pin, and consequently responds to that particular address according to Table 7-10.

Table 7-9. Address Byte

| COMMENT | MSB | | | | | | | | LSB | |
|-------------------|-----|-----|-----|-----|---|-----|-----|-----|-----|--------|
| — | AD6 | AD5 | AD4 | AD3 | AD2 | AD1 | AD0 | R/W | | |
| General address | 1 | 0 | 0 | 1 | See Table 7-10 (target address column) | | | | | 0 or 1 |
| Broadcast address | 1 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | | |

Table 7-10. Address Format

| TARGET ADDRESS | A0 PIN |
|----------------|--------|
| 000 | AGND |
| 001 | VDD |
| 010 | SDA |
| 011 | SCL |

The AFEx3902-Q1 supports broadcast addressing, which is used for synchronously updating or powering down multiple AFEx3902-Q1 devices. When the broadcast address is used, the AFEx3902-Q1 responds regardless of the address pin state. Broadcast is supported only in write mode.

7.5.2.2.2 Command Byte

Table 7-13 lists the command byte in the ADDRESS column.

7.5.2.3 I²C Read Sequence

To read any register the following command sequence must be used:

1. Send a start or repeated start command with a target address and the R/W bit set to 0 for writing. The device acknowledges this event.
2. Send a command byte for the register to be read. The device acknowledges this event again.
3. Send a repeated start with the target address and the R/W bit set to 1 for reading. The device acknowledges this event.
4. The device writes the MSDB byte of the addressed register. The controller must acknowledge this byte.
5. Finally, the device writes out the LSDB of the register.

The broadcast address cannot be used for reading.

Table 7-11. Read Sequence

| S | MSB | ... | R/W (0) | ACK | MSB | ... | LSB | ACK | Sr | MSB | ... | R/W (1) | ACK | MSB | ... | LSB | ACK | MSB | ... | LSB | ACK |
|---|-----------------------------------|-----|------------|-----|-----------------------------------|-----|--------|-----|-----------------------------------|-----|--------|------------|-------------|-----|------------|------|-------------|-----|------------|-----|-----|
| | Address byte Section 7.5.2.2.1 | | | | Command byte Section 7.5.2.2.2 | | | Sr | Address byte Section 7.5.2.2.1 | | | | MSDB | | | LSDB | | | | | |
| | From controller | | Target | | From controller | | Target | | From controller | | Target | | From target | | Controller | | From target | | Controller | | |

7.6 Register Maps

Table 7-12. Register Map

| REGISTER | MOST SIGNIFICANT DATA BYTE (MSDB) | | | | | | | | LEAST SIGNIFICANT DATA BYTE (LSDB) | | | | | | | | | | | | | | |
|-----------------------|-----------------------------------|-------------------|------------|---------------|----------------|------------|----------|-----------|------------------------------------|------|-------------|--------------|------------------|--------------|------------|----------------|--|--|--|--|--|--|--|
| | BIT15 | BIT14 | BIT13 | BIT12 | BIT11 | BIT10 | BIT9 | BIT8 | BIT7 | BIT6 | BIT5 | BIT4 | BIT3 | BIT2 | BIT1 | BIT0 | | | | | | | |
| NOP | NOP | | | | | | | | | | | | | | | | | | | | | | |
| DAC-0-VOUT-CMP-CONFIG | X | | | VOUT-GAIN-0 | | | X | | | | CMP-0-OD-EN | CMP-0-OUT-EN | CMP-0-HIZ-IN-DIS | CMP-0-INV-EN | CMP-0-EN | | | | | | | | |
| DAC-1-VOUT-CMP-CONFIG | X | | | VOUT-GAIN-1 | | | X | | | | CMP-1-OD-EN | CMP-1-OUT-EN | CMP-1-HIZ-IN-DIS | CMP-1-INV-EN | CMP-1-EN | | | | | | | | |
| COMMON-CONFIG | RESERVED | DEV-LOCK | RESERVED | EN-INT-REF | ADC-PDN-0 | | RESERVED | | | | | | VOUT-PDN-1 | | | RESERVED | | | | | | | |
| COMMON-TRIGGER | DEV-UNLOCK | | | | RESET | | | RESERVED | | | | | | NVM-PROG | NVM-RELOAD | | | | | | | | |
| COMMON-PWM-TRIG | RESERVED | | | | | | | | | | | | | | | | | | | | | | |
| GENERAL-STATUS | NVM-CRC-FAIL-INT | NVM-CRC-FAIL-USER | X | DAC-0-BUSY | X | DAC-1-BUSY | NVM-BUSY | DEVICE-ID | | | | | | | | START-FUNCTION | | | | | | | |
| DEVICE-MODE-CONFIG | RESERVED | DIS-MODE-IN | RESERVED | | | | | SM-IO-EN | RESERVED | | | | | | | | | | | | | | |
| INTERFACE-CONFIG | X | | TIMEOUT-EN | RESERVED | | | | | | | | FSDO-EN | X | SDO-EN | | | | | | | | | |
| STATE-MACHINE-CONFIG0 | RESERVED | | | | | | | | | | | | | | | | | | | | | | |
| SRAM-CONFIG | X | | | | | | | | SRAM-ADDR | | | | | | | | | | | | | | |
| SRAM-DATA | SRAM-DATA | | | | | | | | | | | | | | | | | | | | | | |
| X1-TEMPERATURE | RESERVED | | | | X1-TEMPERATURE | | | | | | | | RESERVED | | | | | | | | | | |
| X2-TEMPERATURE | RESERVED | | | | X2-TEMPERATURE | | | | | | | | RESERVED | | | | | | | | | | |
| X3-TEMPERATURE | RESERVED | | | | X3-TEMPERATURE | | | | | | | | RESERVED | | | | | | | | | | |
| X4-TEMPERATURE | RESERVED | | | | X4-TEMPERATURE | | | | | | | | RESERVED | | | | | | | | | | |
| Y1-TEMPERATURE | RESERVED | | | | | | | | Y1-TEMPERATURE | | | | | | | | | | | | | | |
| Y2-TEMPERATURE | RESERVED | | | | | | | | Y2-TEMPERATURE | | | | | | | | | | | | | | |
| Y3-TEMPERATURE | RESERVED | | | | | | | | Y3-TEMPERATURE | | | | | | | | | | | | | | |
| Y4-TEMPERATURE | RESERVED | | | | | | | | Y4-TEMPERATURE | | | | | | | | | | | | | | |
| X1-OUTPUT | RESERVED | | | | | | | | X1-OUTPUT | | | | | | | | | | | | | | |
| X2-OUTPUT | RESERVED | | | | | | | | X2-OUTPUT | | | | | | | | | | | | | | |
| X3-OUTPUT | RESERVED | | | | | | | | X3-OUTPUT | | | | | | | | | | | | | | |
| X4-OUTPUT | RESERVED | | | | | | | | X4-OUTPUT | | | | | | | | | | | | | | |
| Y1-OUTPUT | RESERVED | | | | Y1-OUTPUT | | | | | | | | RESERVED | | | | | | | | | | |
| Y2-OUTPUT | RESERVED | | | | Y2-OUTPUT | | | | | | | | RESERVED | | | | | | | | | | |
| Y3-OUTPUT | RESERVED | | | | Y3-OUTPUT | | | | | | | | RESERVED | | | | | | | | | | |
| Y4-OUTPUT | RESERVED | | | | Y4-OUTPUT | | | | | | | | RESERVED | | | | | | | | | | |
| PWM-FREQUENCY | RESERVED | | | PWM-FREQUENCY | | | | RESERVED | | | | | | | | RESERVED | | | | | | | |

Note: Shaded cells indicate the register bits or fields that are stored in NVM.

Note: X = Don't care.

Table 7-13. Register Names

| I ² C/SPI ADDRESS | SRAM ADDR | REGISTER NAME | SECTION |
|---------------------------------|-----------|-----------------------|----------------|
| 00h | -- | NOP | Section 7.6.1 |
| 15h | -- | DAC-0-VOUT-CMP-CONFIG | Section 7.6.2 |
| 03h | -- | DAC-1-VOUT-CMP-CONFIG | Section 7.6.2 |
| 1Fh | -- | COMMON-CONFIG | Section 7.6.3 |
| 20h | -- | COMMON-TRIGGER | Section 7.6.4 |
| 21h | -- | COMMON-PWM-TRIG | Section 7.6.5 |
| 22h | -- | GENERAL-STATUS | Section 7.6.6 |
| 25h | -- | DEVICE-MODE-CONFIG | Section 7.6.7 |
| 26h | -- | INTERFACE-CONFIG | Section 7.6.8 |
| 27h | -- | STATE-MACHINE-CONFIG0 | Section 7.6.9 |
| 2Bh | -- | SRAM-CONFIG | Section 7.6.10 |
| 2Ch | -- | SRAM-DATA | Section 7.6.11 |
| -- | 20h | X1-TEMPERATURE | Section 7.6.12 |
| -- | 21h | Y1-TEMPERATURE | Section 7.6.13 |
| -- | 22h | X2-TEMPERATURE | Section 7.6.12 |
| -- | 23h | Y2-TEMPERATURE | Section 7.6.13 |
| -- | 24h | X3-TEMPERATURE | Section 7.6.12 |
| -- | 25h | Y3-TEMPERATURE | Section 7.6.13 |
| -- | 26h | X1-OUTPUT | Section 7.6.14 |
| -- | 27h | Y1-OUTPUT | Section 7.6.15 |
| -- | 28h | X2-OUTPUT | Section 7.6.14 |
| -- | 29h | Y2-OUTPUT | Section 7.6.15 |
| -- | 2Ah | X3-OUTPUT | Section 7.6.14 |
| -- | 2Bh | Y3-OUTPUT | Section 7.6.15 |
| -- | 2Ch | X4-OUTPUT | Section 7.6.14 |
| -- | 2Dh | Y4-OUTPUT | Section 7.6.15 |
| -- | 2Eh | PWM-FREQUENCY | Section 7.6.16 |

7.6.1 NOP Register (address = 00h) [reset = 0000h]

Figure 7-14. NOP Register

| | | | | | | | | | | | | | | | |
|-----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| NOP | | | | | | | | | | | | | | | |
| R/W-0000h | | | | | | | | | | | | | | | |

Table 7-14. NOP Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|------|-------|------|-------|--------------|
| 15-0 | NOP | R/W | 0000h | No operation |

7.6.2 DAC-x-VOUT-CMP-CONFIG Register (address = 15h, 03h) [reset = 0400h]

Figure 7-15. DAC-x-VOUT-CMP-CONFIG Register (x = 0, 1)

| | | | | | | | | | | | | | | | |
|------|----|-------------|----|----|-------|---|---|---|--------|-------------|--------------|------------------|--------------|----------|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| X | | VOUT-GAIN-x | | | | X | | | | CMP-x-OD-EN | CMP-x-OUT-EN | CMP-x-HIZ-IN-DIS | CMP-x-INV-EN | CMP-x-EN | |
| X-0h | | R/W-0h | | | X-00h | | | | R/W-0h | R/W-0h | R/W-0h | R/W-0h | R/W-0h | R/W-0h | |

Table 7-15. DAC-x-VOUT-CMP-CONFIG Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|------------------|------|-------|---|
| 15-13 | X | X | 0h | Don't care. |
| 12-10 | VOUT-GAIN-x | R/W | 001 | 001: Gain = 1 ×, VDD as reference. 010: Gain = 1.5 ×, internal reference. 011: Gain = 2 ×, internal reference. 100: Gain = 3 ×, internal reference. 101: Gain = 4 ×, internal reference. Others: NA. |
| 9-5 | X | X | 0h | Don't care. |
| 4 | CMP-x-OD-EN | R/W | 0 | 1: Set OUTx pin as open-drain in comparator mode (CMP-x-EN = 1 and CMP-x-OUT-EN = 1). 0: Set OUTx pin as push-pull. |
| 3 | CMP-x-OUT-EN | R/W | 0 | 1: Bring comparator output to the respective OUTx pin. 0: Generate comparator output but consume internally. |
| 2 | CMP-x-HIZ-IN-DIS | R/W | 0 | 0: FBx input has high-impedance. Input voltage range is limited. 1: FBx input is connected to resistor divider and has finite impedance. Input voltage range is same as full-scale. |
| 1 | CMP-x-INV-EN | R/W | 0 | 1: Invert the comparator output. 0: Don't invert the comparator output. |
| 0 | CMP-x-EN | R/W | 0 | 1: Enable comparator mode. 0: Disable comparator mode. |

7.6.3 COMMON-CONFIG Register (address = 1Fh) [reset = 03F9h]

Figure 7-16. COMMON-CONFIG Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|----------|-----------|------------|-----------|--------|---|---|---|----------|---|---|---|------------|-----------|---|
| RESERVED | DEV-LOCK | RESERVE D | EN-INT-REF | ADC-PDN-0 | | | | | RESERVED | | | | VOUT-PDN-1 | RESERV ED | |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-00 | | | | R/W-7Fh | | | | R/W-00 | R/W-1 | |

Table 7-16. COMMON-CONFIG Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|------------|------|-------|---|
| 15 | RESERVED | R/W | 0 | Always write 0. |
| 14 | DEV-LOCK | R/W | 0 | 0: Device not locked 1: Device locked, the device locks all the registers. To set this bit back to 0 (unlock device), write to the unlock code to the DEV-UNLOCK field in the COMMON-TRIGGER register first, followed by a write to the DEV-LOCK bit as 0. |
| 13 | RESERVED | R/W | 0 | Always write 0. |
| 12 | EN-INT-REF | R/W | 0 | 0: Disable internal reference 1: Enable internal reference. This bit must be set before using internal reference gain settings. |
| 11-10 | ADC-PDN-0 | R/W | 00 | 00: Power-up ADC-0. 01: Power-down ADC-0 with 10 kΩ to AGND. 10: Power-down ADC-0 with 100 kΩ to AGND. 11: Power-down ADC-0 with Hi-Z to AGND. |
| 9-3 | RESERVED | R/W | 7Fh | Always write 7Fh. |
| 2-1 | VOUT-PDN-1 | R/W | 00 | 00: Power-up VOUT-1. 01: Power-down VOUT-1 with 10 kΩ to AGND. 10: Power-down VOUT-1 with 100 kΩ to AGND. 11: Power-down VOUT-1 with Hi-Z to AGND. |
| 0 | RESERVED | R/W | 1 | Always write 1. |

7.6.4 COMMON-TRIGGER Register (address = 20h) [reset = 0000h]

Figure 7-17. COMMON-TRIGGER Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------------|----|--------|----|----|---|---|---|----------|---|---|---|--------------|----------------|---|
| | DEV-UNLOCK | | RESET | | | | | | RESERVED | | | | NVM- PROG | NVM- RELOAD | |
| R/W-0h | | | R/W-0h | | | | | | R/W-00h | | | | R/W-0h | R/W-0h | |

Table 7-17. COMMON-TRIGGER Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|------------|------|-------|--|
| 15-12 | DEV-UNLOCK | R/W | 0000 | 0101: Device unlocking password. Others: Don't care. |
| 11-8 | RESET | R/W | 0000 | 1010: POR reset triggered. This field self-resets. Others: Don't care. |
| 7-2 | RESERVED | R/W | 00h | Always write 00h. |
| 1 | NVM-PROG | R/W | 0 | 0: NVM write not triggered. 1: NVM write triggered. This bit self-resets. |
| 0 | NVM-RELOAD | R/W | 0 | 0: NVM reload not triggered. 1: Reload data from NVM to register map. This bit self-resets. |

7.6.5 COMMON-PWM-TRIG Register (address = 21h) [reset = 0001h]

Figure 7-18. COMMON-PWM-TRIG Register

| | | | | | | | | | | | | | | | |
|-----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|----------------|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | | | | | | | | | | | | START-FUNCTION |
| R/W-0000h | | | | | | | | | | | | | | | R/W-0h |

Table 7-18. COMMON-PWM-TRIG Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|------|----------------|------|-------|--|
| 15-1 | RESERVED | R/W | 0000h | Always write 0000h. |
| 0 | START-FUNCTION | R/W | 0 | 0: Stop PWM generation. 1: Invalid. This bit is automatically set by the state machine. |

7.6.6 GENERAL-STATUS Register (address = 22h) [reset = 2068h]

Figure 7-19. GENERAL-STATUS Register

| | | | | | | | | | | | | | | | |
|------------------|-------------------|------|------------|------|------------|----------|--|---|---|---|---|------------|---|---|------|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| NVM-CRC-FAIL-INT | NVM-CRC-FAIL-USER | X | DAC-0-BUSY | X | DAC-1-BUSY | NVM-BUSY | DEVICE-ID | | | | | VERSION-ID | | | |
| R-0h | R-0h | X-1h | R-0h | X-0h | R-0h | R-0h | AFE53902-Q1: R-10h AFE43902-Q1: R-11h | | | | | | | | R-0h |

Table 7-19. GENERAL-STATUS Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|-------------------|------|--------------------------------------|---|
| 15 | NVM-CRC-FAIL-INT | R | 0 | 0: No CRC error in OTP. 1: Indicates a failure in OTP loading. A software reset or power-cycle brings the device out of this condition in case of temporary failure. |
| 14 | NVM-CRC-FAIL-USER | R | 0 | 0: No CRC error in NVM loading. 1: Indicates a failure in NVM loading. The register settings are corrupted. The device allows all operations during this error condition. Reprogram the NVM to get the original state. A software reset brings the device out of this error condition. |
| 13 | X | X | 1 | Don't care. |
| 12 | DAC-0-BUSY | R | 0 | 0: DAC-0 channel accepts commands. 1: DAC-0 channel does not accept commands. |
| 11-10 | X | X | 0 | Don't care. |
| 9 | DAC-1-BUSY | R | 0 | 0: DAC-1 channel accepts commands. 1: DAC-1 channel does not accept commands. |
| 8 | NVM-BUSY | R | 0 | 0: NVM is available for read and write. 1: NVM is not available for read or write. |
| 7-2 | DEVICE-ID | R | AFE53902-Q1: 10h AFE43902-Q1: 11h | Device identifier. |
| 1-0 | VERSION-ID | R | 00 | Version identifier. |

7.6.7 DEVICE-MODE-CONFIG Register (address = 25h) [reset = 8040h]

Figure 7-20. DEVICE-MODE-CONFIG Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|-------------|----------|----|----|----|---|---|---|---|----------|----------|---|---|---|---|
| RESERVED | DIS-MODE-IN | RESERVED | | | | | | | | SM-IO-EN | RESERVED | | | | |
| R/W-10 | R/W-0 | R/W-00h | | | | | | | | R/W-1 | R/W-00h | | | | |

Table 7-20. DEVICE-MODE-CONFIG Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|-------------|------|-------|---|
| 15-14 | RESERVED | R/W | 10 | Always write 10. |
| 13 | DIS-MODE-IN | R/W | 0 | 0: MODE function enabled. 1: MODE function disabled. |
| 12-7 | RESERVED | R/W | 00h | Always write 00h. |
| 6 | SM-IO-EN | R/W | 1 | 0: The state machine does not have control over the digital input-output. 1: Digital input-output controlled by the state machine. |
| 5-0 | RESERVED | R/W | 00h | Always write 00h. |

7.6.8 INTERFACE-CONFIG Register (address = 26h) [reset = 0000h]

Figure 7-21. INTERFACE-CONFIG Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|------------|------|----|----|----|---|---|---|---|---------|------|--------|---|---|---|
| X | TIMEOUT-EN | X | | | | | | | | FSDO-EN | X | SDO-EN | | | |
| X-0h | R/W-0h | X-0h | | | | | | | | R/W-0h | X-0h | R/W-0h | | | |

Table 7-21. INTERFACE-CONFIG Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|------------|------|-------|---|
| 15-13 | X | X | 0h | Don't care. |
| 12 | TIMEOUT-EN | R/W | 0 | 0: I ² C timeout disabled. 1: I ² C timeout enabled. |
| 11-3 | X | X | 0h | Don't care. |
| 2 | FSDO-EN | R/W | 0 | 0: Fast SDO disabled. 1: Fast SDO enabled. |
| 1 | X | X | 0 | Don't care. |
| 0 | SDO-EN | R/W | 0 | 0: SDO disabled. 1: SDO enabled. |

7.6.9 STATE-MACHINE-CONFIG0 Register (address = 27h) [reset = 0003h]

Figure 7-22. STATE-MACHINE-CONFIG0 Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|-----------|----|----|----|----|----|---|---|---|---|--------|-------|-------|---|----------|----------|-------|
| RESERVED | | | | | | | | | | | | | | SM-ABORT | SM-START | SM-EN |
| R/W-0000h | | | | | | | | | | R/W-0h | R/W-1 | R/W-1 | | | | |

Table 7-22. STATE-MACHINE-CONFIG0 Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|------|----------|------|-------|---|
| 15-3 | RESERVED | R/W | 0000h | Always write 0000h. |
| 2 | SM-ABORT | R/W | 0 | 0: State machine not aborted. 1: State machine aborted. |
| 1 | SM-START | R/W | 1 | 0: State machine stopped. 1: State machine started. The state machine must be enabled using the SM-EN bit. |
| 0 | SM-EN | R/W | 1 | 0: State machine disabled. 1: State machine enabled. |

7.6.10 SRAM-CONFIG Register (address = 2Bh) [reset = 0000h]

Figure 7-23. SRAM-CONFIG Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------|----|----|----|----|----|---|---|---|---|-----------|---|---|---|---|---|
| X | | | | | | | | | | SRAM-ADDR | | | | | |
| X-00h | | | | | | | | | | R/W-00h | | | | | |

Table 7-23. SRAM-CONFIG Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|------|-----------|------|-------|--|
| 15-8 | X | X | 00h | Don't care. |
| 7-0 | SRAM-ADDR | R/W | 00h | 8-bit SRAM address. Writing to this register field configures the SRAM address to be accessed next. This address automatically increments after a read or write from the SRAM. |

7.6.11 SRAM-DATA Register (address = 2Ch) [reset = 0000h]

Figure 7-24. SRAM-DATA Register

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| SRAM-DATA | | | | | | | | | | | | | | | |
| R/W-0000h | | | | | | | | | | | | | | | |

Table 7-24. SRAM-DATA Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|------|-----------|------|-------|--|
| 15-0 | SRAM-DATA | R/W | 0000h | 16-bit SRAM data. This data is written to or read from the address configured in the SRAM-CONFIG register. |

7.6.12 Xx-TEMPERATURE Register (SRAM address = 20h, 22h, 24h) [reset = 0000h]

Note

This register address is mapped to SRAM. Use the SRAM-CONFIG and SRAM-DATA registers to read and write.

Figure 7-25. Xx-TEMPERATURE Register (X1, X2, X3)

| | | | | | | | | | | | | | | | |
|----------|----|----|----|----------------|----|---|---|---|---|----------|---|---|---|----------|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | Xx-TEMPERATURE | | | | | | | | | | RESERVED | |
| W-00h | | | | | | | | | | R/W-000h | | | | | |

Table 7-25. Xx-TEMPERATURE Register Field Descriptions (X1, X2, X3)

| Bit | Field | Type | Reset | Description |
|-------|----------------|------|-------|---|
| 15-11 | RESERVED | X | 00h | Always write 0. |
| 10-1 | Xx-TEMPERATURE | R/W | 000h | 10-bit X coordinate for NTC linearizer. |
| 0 | RESERVED | X | 0 | Always write 0. |

7.6.13 Yx-TEMPERATURE Register (SRAM address = 21h, 23h, 25h) [reset = 0000h]

Note

This register address is mapped to SRAM. Use the SRAM-CONFIG and SRAM-DATA registers to read and write.

Figure 7-26. Yx-TEMPERATURE Register (Y1, Y2, Y3)

| | | | | | | | | | | | | | | | |
|----------|----|----|----|----|----|---|---|----------------|---|---------|---|---|---|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | | | | | Yx-TEMPERATURE | | | | | | | |
| W-00h | | | | | | | | | | R/W-00h | | | | | |

Table 7-26. Yx-TEMPERATURE Register Field Descriptions (Y1, Y2, Y3)

| Bit | Field | Type | Reset | Description |
|------|----------------|------|-------|--|
| 15-8 | RESERVED | W | 00h | Always write 0. |
| 7-0 | Yx-TEMPERATURE | R/W | 00h | 8-bit Y coordinate for NTC linearizer. |

7.6.14 Xx-OUTPUT Register (SRAM address = 26h, 28h, 2Ah, 2Ch) [reset = 0000h]

Note

This register address is mapped to SRAM. Use the SRAM-CONFIG and SRAM-DATA registers to read and write.

Figure 7-27. Xx-OUTPUT Register (X1, X2, X3, X4)

| | | | | | | | | | | | | | | | |
|----------|----|----|----|----|----|---|---|-----------|---|---|---|---|---|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | | | | | Xx-OUTPUT | | | | | | | |
| W-00h | | | | | | | | R/W-00h | | | | | | | |

Table 7-27. Xx-OUTPUT Register Field Descriptions (X1, X2, X3, X4)

| Bit | Field | Type | Reset | Description |
|------|-----------|------|-------|--|
| 15-8 | RESERVED | W | 00h | Always write 0. |
| 7-0 | Xx-OUTPUT | R/W | 00h | 8-bit X coordinate for multislope transfer function. |

7.6.15 Yx-OUTPUT Register (SRAM address = 27h, 29h, 2Bh, 2Dh) [reset = 0000h]

Note

This register address is mapped to SRAM. Use the SRAM-CONFIG and SRAM-DATA registers to read and write.

Figure 7-28. Yx-OUTPUT Register (Y1, Y2, Y3, Y4)

| | | | | | | | | | | | | | | | |
|----------|----|----|----|----|----|---|---|-----------|---|---|---|---|---|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | | | | | Yx-OUTPUT | | | | | | | |
| W-00h | | | | | | | | R/W-000h | | | | | | | |

Table 7-28. YX-OUTPUT Register Field Descriptions (Y1, Y2, Y3, Y4)

| Bit | Field | Type | Reset | Description |
|-------|-----------|------|-------|---|
| 15-10 | RESERVED | W | 00h | Always write 0. |
| 9-0 | Yx-OUTPUT | R/W | 000h | 10-bit Y coordinate for multislope transfer function. |

7.6.16 PWM-FREQUENCY Register (SRAM address = 2Eh) [reset = 0000h]

Note

This register address is mapped to SRAM. Use the SRAM-CONFIG and SRAM-DATA registers to read and write.

Figure 7-29. PWM-FREQUENCY Register

| | | | | | | | | | | | | | | | |
|------|----|----|----|----|----|---|---|---------------|---|---|---|---|---|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| X | | | | | | | | PWM-FREQUENCY | | | | | | | |
| X-0h | | | | | | | | R/W-00h | | | | | | | |

Table 7-29. PWM-FREQUENCY Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-------|---------------|------|-------|--|
| 15-12 | X | X | 0h | Don't care. |
| 11-7 | PWM-FREQUENCY | R/W | 00h | 5-bit PWM frequency, as specified in Table 7-1 . |
| 6-0 | X | X | 00h | Don't care. |

8 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The AFEx3902-Q1 is a smart analog front end (AFE) that includes an ADC channel, PWM output, NVM, internal reference, and are available in a tiny 3-mm × 3-mm package. The AFEx3902-Q1 have an integrated state machine that is pre-programmed as a constant power output controller. The ADC has a full-scale of VDD/3. Use an external attenuator when the input exceeds this range. The PWM provides a 7-bit duty-cycle output on the SDA/SCLK/PWM pin. Pull the VREF/MODE pin high to enable the PWM output. Pulling the VREF/MODE pin low enables the I²C or SPI programming mode. The application parameters are programmed in the device using I²C or SPI and stored in the NVM.

8.2 Typical Applications

8.2.1 Multislope Thermal Foldback Using the AFE53902-Q1 and Voltage Output

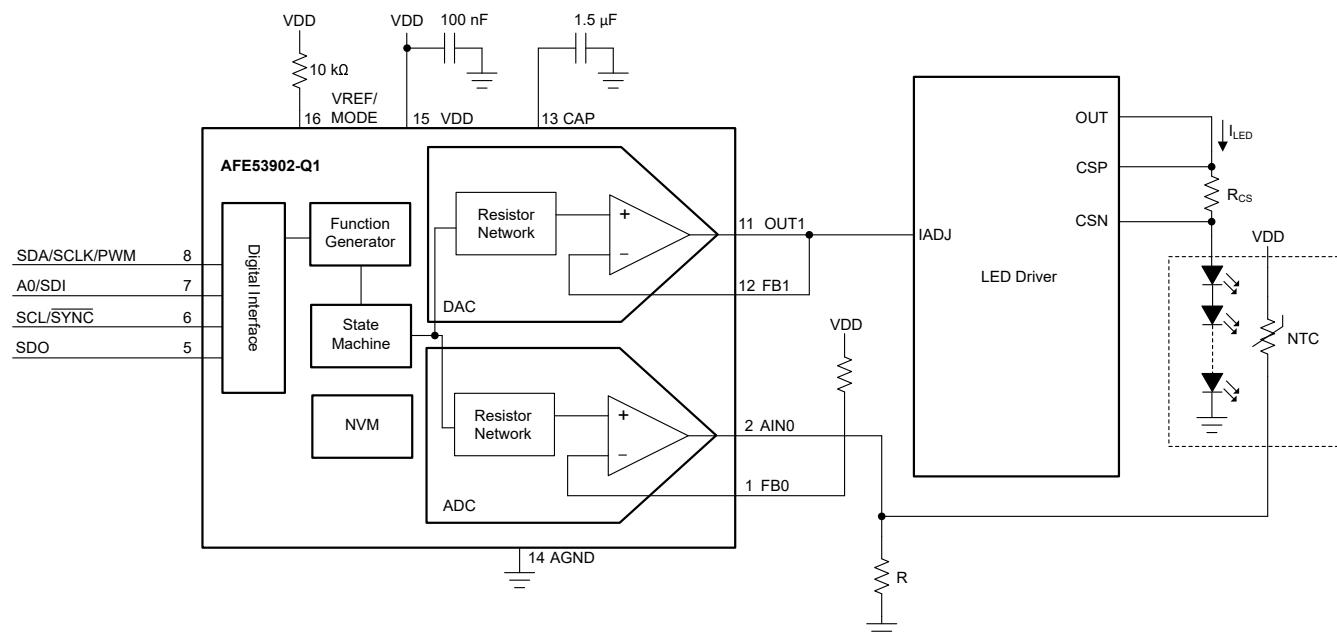


Figure 8-1. Multislope Thermal Foldback Using the AFE53902-Q1 and Voltage Output

Figure 8-1 shows how to connect the DAC output in voltage-output mode.

8.2.1.1 Design Requirements

Table 8-1. AFE53902-Q1 With Voltage-Output Design Parameters

| Design Parameters | |
|-------------------|--------------|
| Parameter | Value |
| Voltage range | 0 V to 5 V |
| Temperature range | 0°C to 100°C |

8.2.1.2 Detailed Design Procedure

The state machine converts a temperature input to a voltage output based on the values saved in the thermal foldback profile. The voltage output from the temperature sensor is read by the ADC and converted to an ADC code. There are three X and Y points available to map the ADC codes (X points) to a temperature (Y points). These points can be used to apply linearization to the temperature sensor output. The ADC is 10-bits, so the maximum code is 1023d. [Equation 5](#) calculates the ADC output code based on the voltage input.

$$ADC_CODE = \frac{VIN \times 2^{10}}{VREF} \quad (5)$$

This application example uses the 5-V VDD as the ADC reference. [Equation 6](#) calculates the ADC code for a 2.5-V input.

$$ADC_CODE = \frac{2.5V \times 2^{10}}{5V} = 512d \quad (6)$$

[Table 8-2](#) shows the ADC code to temperature mapping used in this application example. An NTC resistor is used as the temperature sensor. Higher ADC codes correspond to a lower temperature.

**Table 8-2. Thermal Foldback Profile:
ADC to Temperature**

| ADC CODE | TEMPERATURE |
|----------|-------------|
| 0x000 | 100°C |
| 0x200 | 50°C |
| 0x3FF | 0°C |

There are four X and Y points available to map the temperature (X points) to an output voltage (Y points). The voltage output is configured by a 10-bit DAC code. The maximum code is 1023d. [Equation 7](#) calculates the DAC code for a desired voltage output.

$$DAC_CODE = \frac{VOUT \times 2^{10}}{VREF} \quad (7)$$

This application example uses the 5-V VDD as the DAC reference. [Equation 8](#) calculates the DAC code for a 1-V output.

$$DAC_CODE = \frac{VOUT \times 2^{10}}{VREF} \quad (8)$$

[Table 8-3](#) shows the temperature to output voltage mapping used in this application example. The profile can have both negative and positive slopes.

**Table 8-3. Thermal Foldback Profile:
Temperature to VOUT**

| TEMPERATURE | OUTPUT VOLTAGE (CODE) |
|-------------|-----------------------|
| 20°C | 4 V (0x320) |
| 50°C | 5 V (0x3FF) |
| 75°C | 3.4 V (0x2BC) |
| 100°C | 0 V (0x00) |

Follow these guidelines to setup the registers on the AFE53902-Q1:

- Set the VREF/MODE pin low to enable the digital pins for programming mode.
- Stop the state machine before updating the application parameters by writing 0 to the STATE-MACHINE-CONFIG0 register.
- Set all of the application parameters shown in [Table 8-4](#). These locations must be used to save the settings in the NVM.
- Configure the reference for both channels in the DAC-x-VOUT-CMP-CONFIG registers.
 - Configure channel 0 as an ADC input by setting the CMP-x-EN bit to 1.
- Power on the DAC and ADC channels in voltage mode using the COMMON-CONFIG register.
- Set the DEVICE-MODE-CONFIG register to 0x9000.
- Start the state machine by writing 0x3 to the STATE-MACHINE-CONFIG0.
- Trigger an NVM write by setting the NVM-PROG bit in the COMMON-TRIGGER register (0x20) to 1.

Table 8-4. Application Parameters

| REGISTER FIELD NAME | ADDRESS[FIELD] | ADDRESS LOCATION |
|-----------------------|------------------|------------------|
| X1-TEMPERATURE | 0x20[10:1] | SRAM |
| Y1-TEMPERATURE | 0x21[7:0] | SRAM |
| X2-TEMPERATURE | 0x22[10:1] | SRAM |
| Y2-TEMPERATURE | 0x23[7:0] | SRAM |
| X3-TEMPERATURE | 0x24[10:1] | SRAM |
| Y3-TEMPERATURE | 0x25[7:0] | SRAM |
| X1-OUTPUT | 0x26[7:0] | SRAM |
| Y1-OUTPUT | 0x27[9:0] | SRAM |
| X2-OUTPUT | 0x28[7:0] | SRAM |
| Y2-OUTPUT | 0x29[9:0] | SRAM |
| X3-OUTPUT | 0x2A[7:0] | SRAM |
| Y3-OUTPUT | 0x2B[9:0] | SRAM |
| X4-OUTPUT | 0x2C[7:0] | SRAM |
| Y4-OUTPUT | 0x2D[9:0] | SRAM |
| PWM-FREQUENCY | 0x2E[11:7] | SRAM |
| DAC-0-VOUT-CMP-CONFIG | 0x15[12:10][4:0] | Register |
| DAC-1-VOUT-CMP-CONFIG | 0x03[12:10][4:0] | Register |
| COMMON-CONFIG | 0x1F[15:0] | Register |
| DEVICE-MODE-CONFIG | 0x25[15:0] | Register |
| STATE-MACHINE-CONFIG0 | 0x27[2:0] | Register |

Only the bits listed in the address column of [Table 8-4](#) are saved in NVM and used in the state machine. For example, only bits 12 to 10 and 4 to 0 are saved in NVM for the DAC-x-VOUT-CMP-CONFIG registers.

The pseudocode for this application example is as follows:

```

//SYNTAX: WRITE <REGISTER NAME(Hex Code)>, <MSB DATA>, <LSB DATA>
//Stop the state machine
WRITE STATE-MACHINE-CONFIG0(0x27), 0x00, 0x03
//Set the thermal foldback profile values
//The voltage output is a 10-bit value
WRITE X1-TEMPERATURE(SRAM 0x20), 0x00, 0x00
WRITE Y1-TEMPERATURE(SRAM 0x21), 0x00, 0x64
WRITE X2-TEMPERATURE(SRAM 0x22), 0x04, 0x00
WRITE Y2-TEMPERATURE(SRAM 0x23), 0x00, 0x32
WRITE X3-TEMPERATURE(SRAM 0x24), 0x07, 0xFF
WRITE Y3-TEMPERATURE(SRAM 0x25), 0x00, 0x00
WRITE X1-OUTPUT(SRAM 0x26), 0x00, 0x14
WRITE Y1-OUTPUT(SRAM 0x27), 0x03, 0x20
WRITE X2-OUTPUT(SRAM 0x28), 0x00, 0x32
WRITE Y2-OUTPUT(SRAM 0x29), 0x03, 0xFF
WRITE X3-OUTPUT(SRAM 0x2A), 0x00, 0x4B
WRITE Y3-OUTPUT(SRAM 0x2B), 0x02, 0xBC
WRITE X4-OUTPUT(SRAM 0x2C), 0x00, 0x64
WRITE Y4-OUTPUT(SRAM 0x2D), 0x00, 0x00
//Set the channel 0 reference to VDD, enable the comparator for ADC mode (this is the device
default)
WRITE DAC-0-VOUT-CMP-CONFIG(0x15), 0x04, 0x01
//Set channel 1 reference to VDD (this is the device default)
WRITE DAC-1-VOUT-CMP-CONFIG(0x03), 0x04, 0x00
//Power on the DAC and ADC channel
WRITE COMMON-CONFIG(0x1F), 0x03, 0xF9
//Set the device mode (this is the device default)
WRITE DEVICE-MODE-CONFIG(0x25), 0x90, 0x00
//Start the state machine
WRITE STATE-MACHINE-CONFIG0(0x27), 0x00, 0x03
//Save settings to NVM
WRITE COMMON-TRIGGER(0x20), 0x00, 0x02

```

8.2.1.3 Application Performance Plots


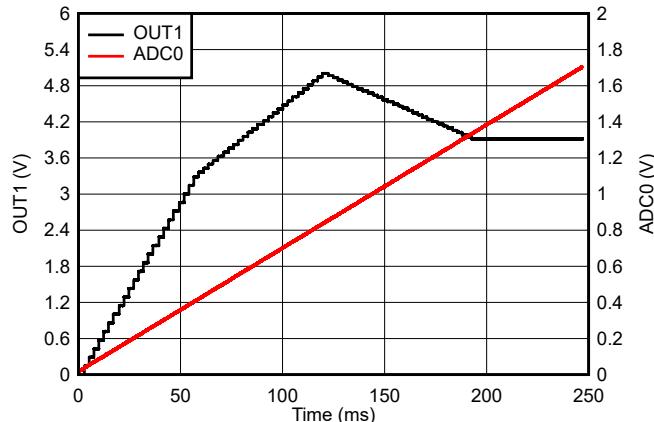


Figure 8-2. Voltage Output vs Temperature

8.2.2 Multislope Thermal Foldback Using the AFE43902-Q1 and PWM Output

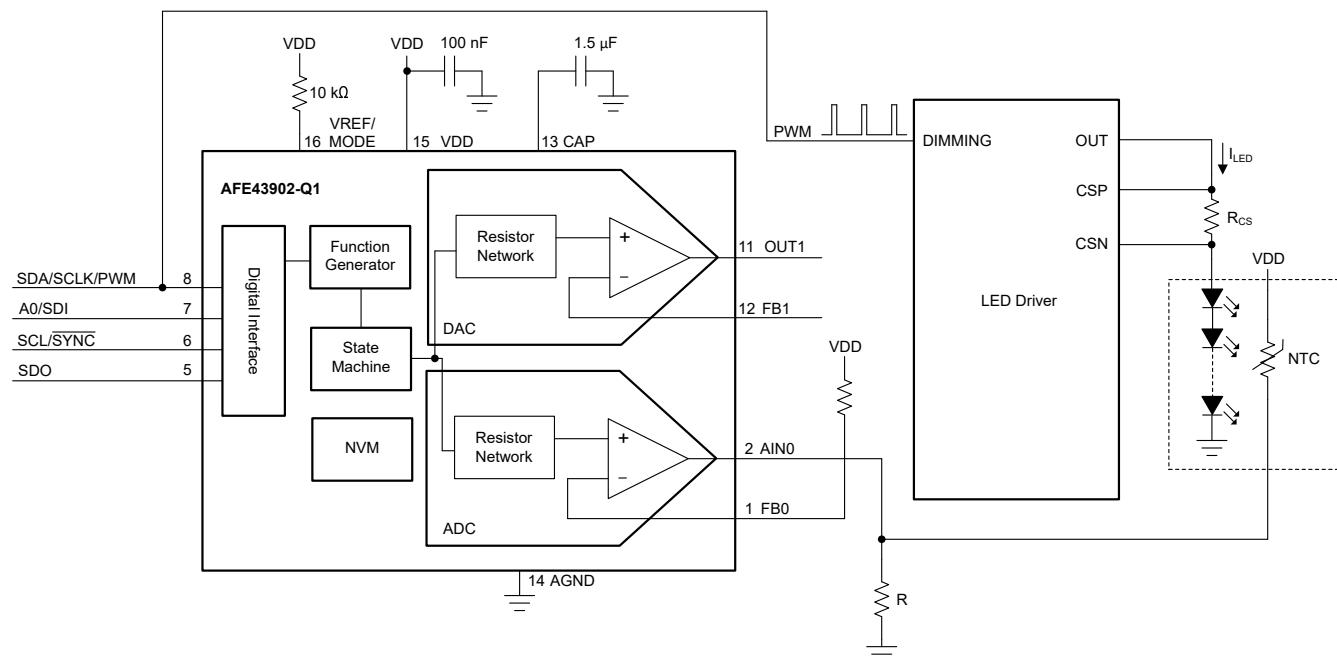

Multislope Thermal Foldback Using the AFE43902-Q1 and PWM Output

Figure 8-3 shows how to connect the PWM output in PWM output mode.

8.2.2.1 Design Requirements

Table 8-5. AFE43902-Q1 With PWM-Output Design Parameters

| PARAMETER | VALUE |
|-------------------|--------------|
| PWM frequency | 1 kHz |
| Duty-cycle range | 0% to 100% |
| Temperature range | 0°C to 100°C |

8.2.2.2 Detailed Design Procedure

The state machine converts a temperature input to a PWM output based on the values saved in the thermal foldback profile. The voltage output from the temperature sensor is read by the ADC and converted to an ADC code. There are three X and Y points available to map the ADC codes (X points) to a temperature (Y points). These points can be used to apply linearization to the temperature sensor output. The ADC is 10-bits, so the maximum code is 1023d. [Equation 9](#) calculates the ADC output code based on the voltage input.

$$ADC_CODE = \frac{VIN \times 2^{10}}{VREF} \quad (9)$$

This application example uses the 5-V VDD as the ADC reference. [Equation 10](#) calculates the ADC code for a 2.5-V input.

$$ADC_CODE = \frac{2.5V \times 2^{10}}{5V} = 512d \quad (10)$$

Table 8-6 shows the ADC code to temperature mapping used in this application example. An NTC resistor is used as the temperature sensor. Higher ADC codes correspond to a lower temperature.

**Table 8-6. Thermal Foldback Profile:
ADC to Temperature**

| ADC CODE | TEMPERATURE |
|----------|-------------|
| 0x000 | 100°C |
| 0x200 | 50°C |
| 0x3FF | 0°C |

The PWM frequency is set in the PWM-FREQUENCY SRAM location (SRAM: 0x2E). Table 7-1 defines the codes for each available frequency. There are four X and Y points available to map the temperature (X points) to an output duty cycle (Y points). The PWM duty-cycle output is configured by a 7-bit code. The maximum code is 127d. Equation 11 calculates the duty-cycle:

$$DUTY_CYCLE_CODE = \frac{Duty_Cycle(\%) \times 2^7}{100\%} \quad (11)$$

For a 50% duty cycle, Equation 11 calculates the duty-cycle code as 64d.

Note

A duty-cycle code of 127d sets the PWM duty cycle to 100% which does not follow Equation 11. Table 7-2 provides the details of this exception.

Table 8-7 shows the temperature to output duty cycle mapping used in this application example. The profile can have both negative and positive slopes.

**Table 8-7. Thermal Foldback Profile:
Temperature to PWM**

| TEMPERATURE | OUTPUT DUTY CYCLE (CODE) |
|-------------|--------------------------|
| 20°C | 78% (0x64) |
| 50°C | 100% (0x7F) |
| 75°C | 63% (0x51) |
| 100°C | 0% (0x00) |

Follow these guidelines to setup the registers on the AFE43902-Q1:

- Set the VREF/MODE pin low to enable the digital pins for programming mode.
- Stop the state machine before updating the application parameters by writing 0 to the STATE-MACHINE-CONFIG0 register.
- If the PWM generator is already running, the PWM generator needs to be stopped before any changes to the PWM frequency take effect. Write a 0 to the START-FUNCTION bit in the COMMON-PWM-TRIG register (0x21) to stop the PWM generator. The PWM generator is automatically started when the state machine is enabled.
- Set all of the application parameters shown in [Table 8-8](#). These locations must be used to save the settings in the NVM. For example, the DAC register location for the PWM-FREQUENCY are not mapped to the NVM and is not saved when an NVM write is triggered.
- Configure the reference for both channels in the DAC-x-VOUT-CMP-CONFIG registers.
 - Configure channel 0 as an ADC input by setting the CMP-x-EN bit to 1.
- Power on the ADC channel using the COMMON-CONFIG register.
- Set the DEVICE-MODE-CONFIG register to 0x9000.
- Start the state machine by writing 0x3 to the STATE-MACHINE-CONFIG0.
- Trigger an NVM write by setting the NVM-PROG bit in the COMMON-TRIGGER register (0x20) to 1.
- Set the VREF/MODE pin high to enable the digital pins for standalone mode. This setting is required to see the PWM output on the digital pin.

Table 8-8. Application Parameters

| REGISTER FIELD NAME | ADDRESS[FIELD] | ADDRESS LOCATION |
|-----------------------|------------------|------------------|
| X1-TEMPERATURE | 0x20[10:1] | SRAM |
| Y1-TEMPERATURE | 0x21[7:0] | SRAM |
| X2-TEMPERATURE | 0x22[10:1] | SRAM |
| Y2-TEMPERATURE | 0x23[7:0] | SRAM |
| X3-TEMPERATURE | 0x24[10:1] | SRAM |
| Y3-TEMPERATURE | 0x25[7:0] | SRAM |
| X1-OUTPUT | 0x26[7:0] | SRAM |
| Y1-OUTPUT | 0x27[6:0] | SRAM |
| X2-OUTPUT | 0x28[7:0] | SRAM |
| Y2-OUTPUT | 0x29[6:0] | SRAM |
| X3-OUTPUT | 0x2A[7:0] | SRAM |
| Y3-OUTPUT | 0x2B[6:0] | SRAM |
| X4-OUTPUT | 0x2C[7:0] | SRAM |
| Y4-OUTPUT | 0x2D[6:0] | SRAM |
| PWM-FREQUENCY | 0x2E[11:7] | SRAM |
| DAC-0-VOUT-CMP-CONFIG | 0x15[12:10][4:0] | Register |
| DAC-1-VOUT-CMP-CONFIG | 0x03[12:10][4:0] | Register |
| COMMON-CONFIG | 0x1F[15:0] | Register |
| DEVICE-MODE-CONFIG | 0x25[15:0] | Register |
| STATE-MACHINE-CONFIG0 | 0x27[2:0] | Register |

Only the bits listed in the address column of [Table 8-8](#) are saved in NVM and used in the state machine. For example, only bits 12 to 10 and 4 to 0 are saved in NVM for the DAC-x-VOUT-CMP-CONFIG registers.

The pseudocode for this application example is as follows:

```

//SYNTAX: WRITE <REGISTER NAME(Hex Code)>, <MSB DATA>, <LSB DATA>
//Stop the state machine
WRITE STATE-MACHINE-CONFIG0(0x27), 0x00, 0x03
//Stop the PWM generator
WRITE COMMON-PWM-TRIG(0x21), 0x00, 0x00
//Set the PWM frequency (this is the device default)
WRITE PWM-FREQUENCY(SRAM 0x2E), 0x05, 0x80
//Set the thermal foldback profile values
//The PWM duty cycle is a 7-bit value
WRITE X1-TEMPERATURE(SRAM 0x20), 0x00, 0x00
WRITE Y1-TEMPERATURE(SRAM 0x21), 0x00, 0x64
WRITE X2-TEMPERATURE(SRAM 0x22), 0x04, 0x00
WRITE Y2-TEMPERATURE(SRAM 0x23), 0x00, 0x32
WRITE X3-TEMPERATURE(SRAM 0x24), 0x07, 0xFF
WRITE Y3-TEMPERATURE(SRAM 0x25), 0x00, 0x00
WRITE X1-OUTPUT(SRAM 0x26), 0x00, 0x14
WRITE Y1-OUTPUT(SRAM 0x27), 0x03, 0x64
WRITE X2-OUTPUT(SRAM 0x28), 0x00, 0x32
WRITE Y2-OUTPUT(SRAM 0x29), 0x03, 0x7F
WRITE X3-OUTPUT(SRAM 0x2A), 0x00, 0x4B
WRITE Y3-OUTPUT(SRAM 0x2B), 0x02, 0x51
WRITE X4-OUTPUT(SRAM 0x2C), 0x00, 0x64
WRITE Y4-OUTPUT(SRAM 0x2D), 0x00, 0x00
//Set the channel 0 reference to VDD, enable the comparator for ADC mode (this is the device
default)
WRITE DAC-0-VOUT-CMP-CONFIG(0x15), 0x04, 0x01
//Power on the ADC channel
WRITE COMMON-CONFIG(0x1F), 0x03, 0xFF
//Set the device mode (this is the device default)
WRITE DEVICE-MODE-CONFIG(0x25), 0x90, 0x00
//Start the state machine
WRITE STATE-MACHINE-CONFIG(0x27), 0x00, 0x03
//Save settings to NVM
WRITE COMMON-TRIGGER(0x20), 0x00, 0x02

```

8.2.2.3 Application Performance Plots

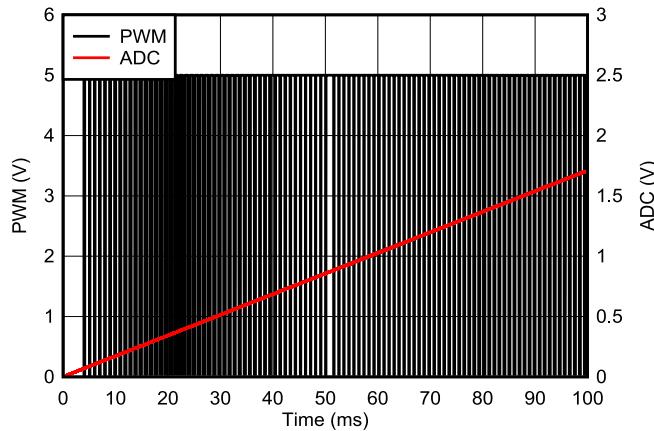


Figure 8-3. PWM Output vs Temperature

8.3 Power Supply Recommendations

The AFEEx3902-Q1 do not require specific power-supply sequencing. These devices require a single power supply, V_{DD} . However, make sure the external voltage reference is applied after V_{DD} powers on. Use a $0.1\text{-}\mu\text{F}$ decoupling capacitor for the V_{DD} pin. Use a bypass capacitor with a value approximately $1.5\text{ }\mu\text{F}$ for the CAP pin.

8.4 Layout

8.4.1 Layout Guidelines

The AFEEx3902-Q1 pin configuration separates the analog, digital, and power pins for an optimized layout. For signal integrity, separate the digital and analog traces, and place decoupling capacitors close to the device pins.

8.4.2 Layout Example

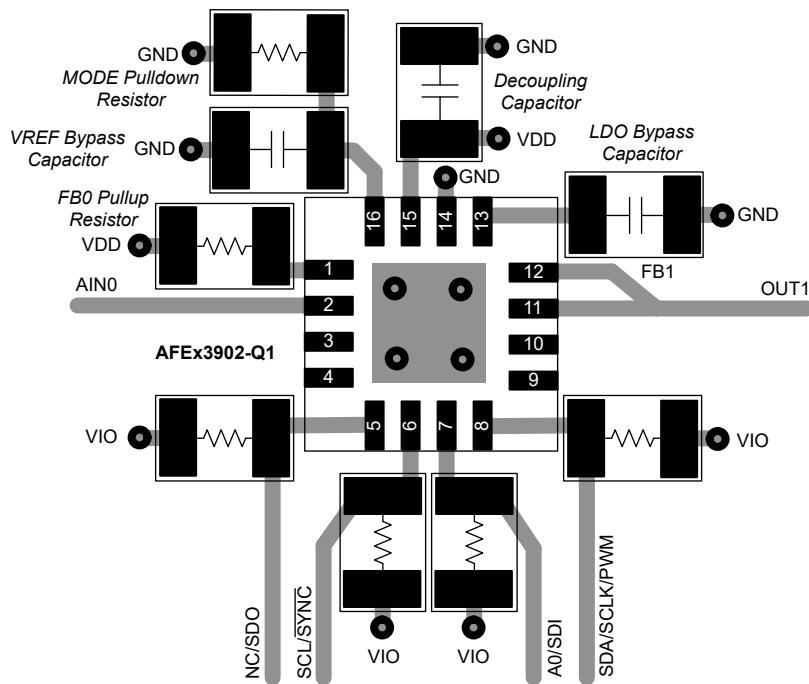


Figure 8-4. Layout Example

Note: The ground and power planes have been omitted for clarity. Connect the thermal pad to ground.

9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

9.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

9.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

9.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

9.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

9.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-----------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| AFE43902RTERQ1 | Active | Production | WQFN (RTE) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | A4902Q |
| AFE43902RTERQ1.A | Active | Production | WQFN (RTE) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | A4902Q |
| AFE53902RTERQ1 | Active | Production | WQFN (RTE) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | A5902Q |
| AFE53902RTERQ1.A | Active | Production | WQFN (RTE) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | A5902Q |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.



⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

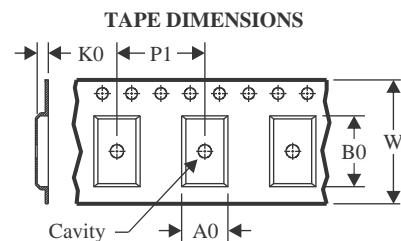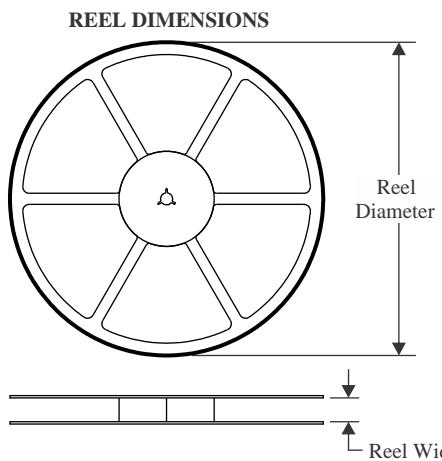
TAPE AND REEL INFORMATION


| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

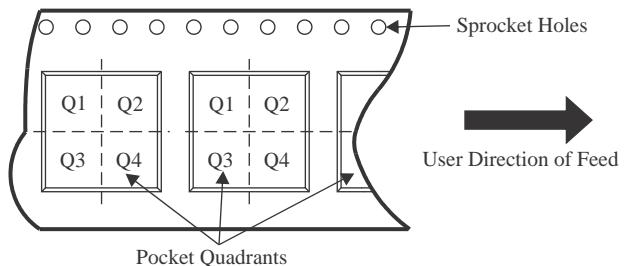QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| AFE43902RTERQ1 | WQFN | RTE | 16 | 3000 | 330.0 | 12.4 | 3.3 | 3.3 | 1.1 | 8.0 | 12.0 | Q2 |
| AFE53902RTERQ1 | WQFN | RTE | 16 | 3000 | 330.0 | 12.4 | 3.3 | 3.3 | 1.1 | 8.0 | 12.0 | Q2 |

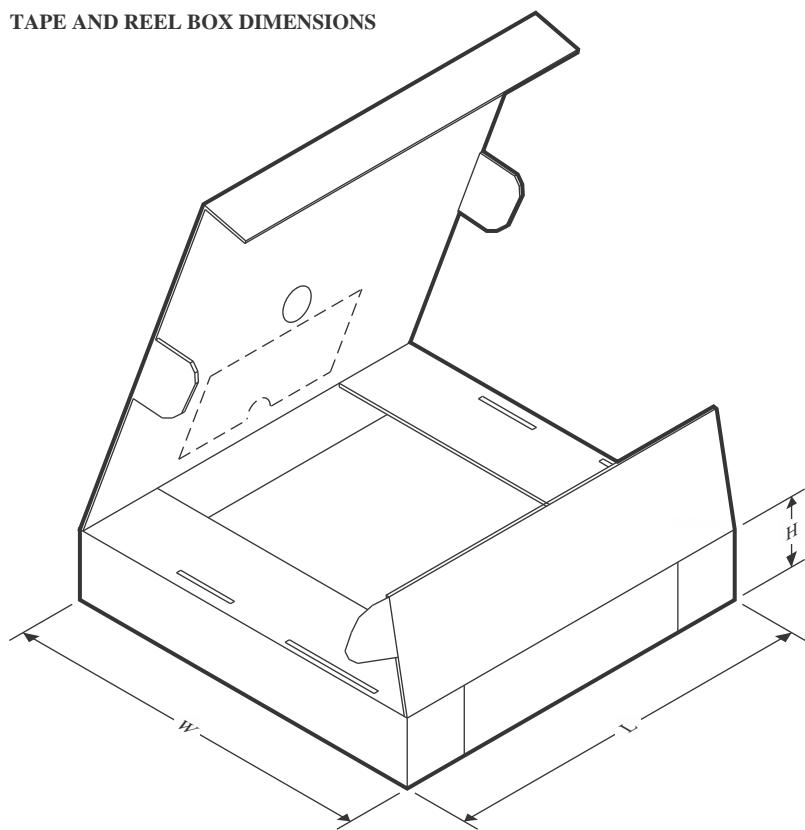TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| AFE43902RTERQ1 | WQFN | RTE | 16 | 3000 | 367.0 | 367.0 | 35.0 |
| AFE53902RTERQ1 | WQFN | RTE | 16 | 3000 | 367.0 | 367.0 | 35.0 |

GENERIC PACKAGE VIEW


RTE 16

WQFN - 0.8 mm max height

3 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

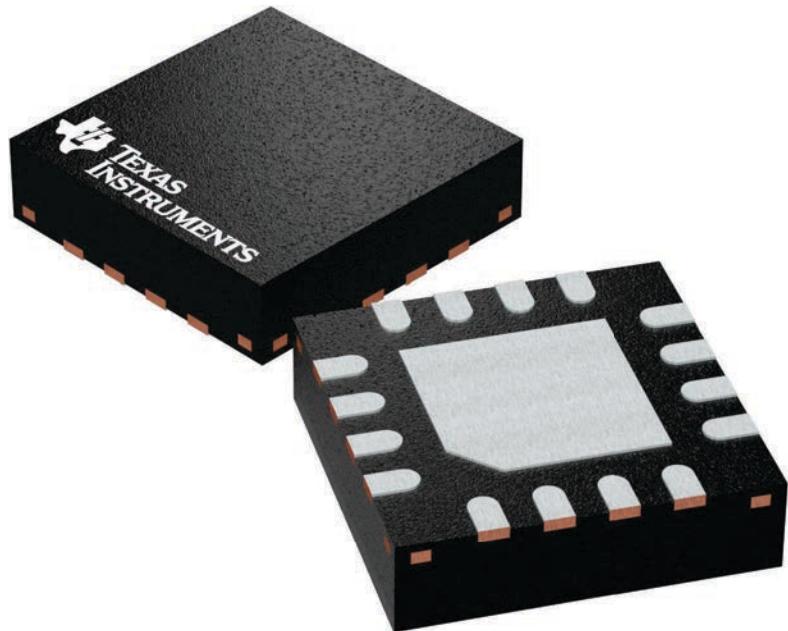

4225944/A


PACKAGE OUTLINE

RTE0016C



WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

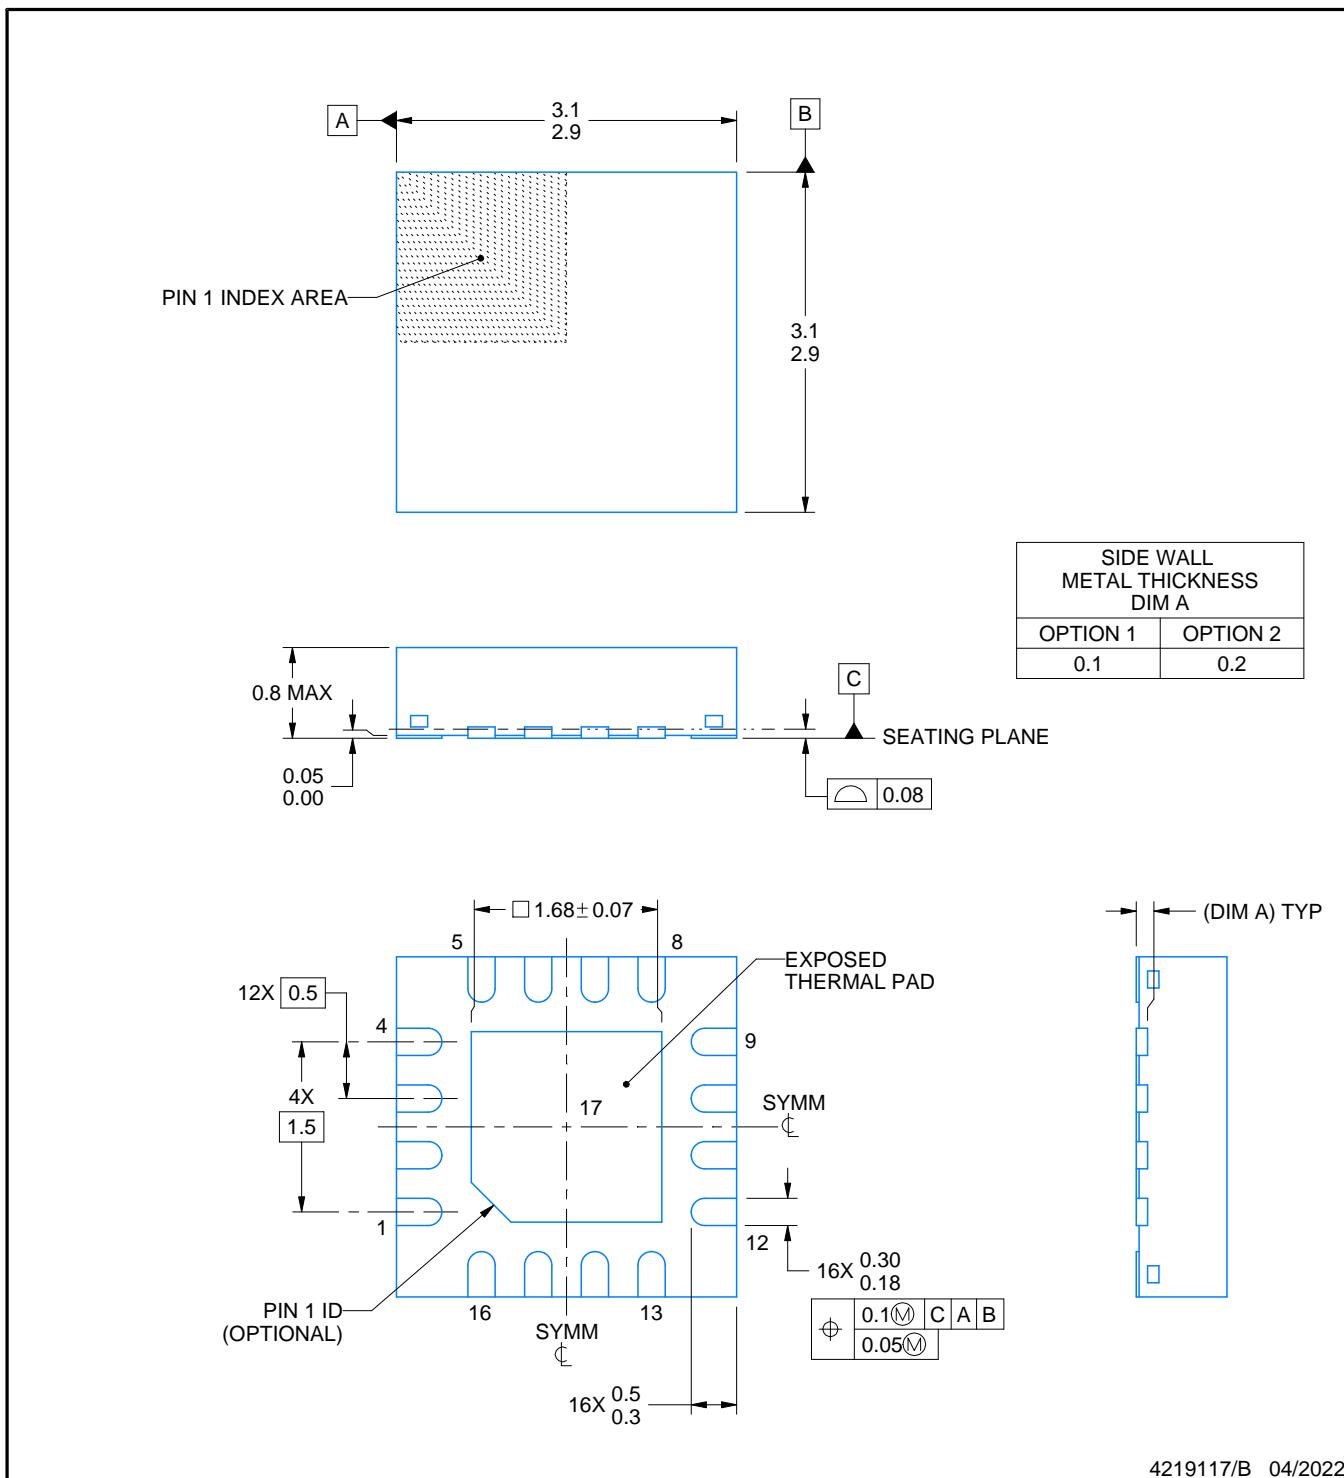

4219117/B 04/2022

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


RTE0016C

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

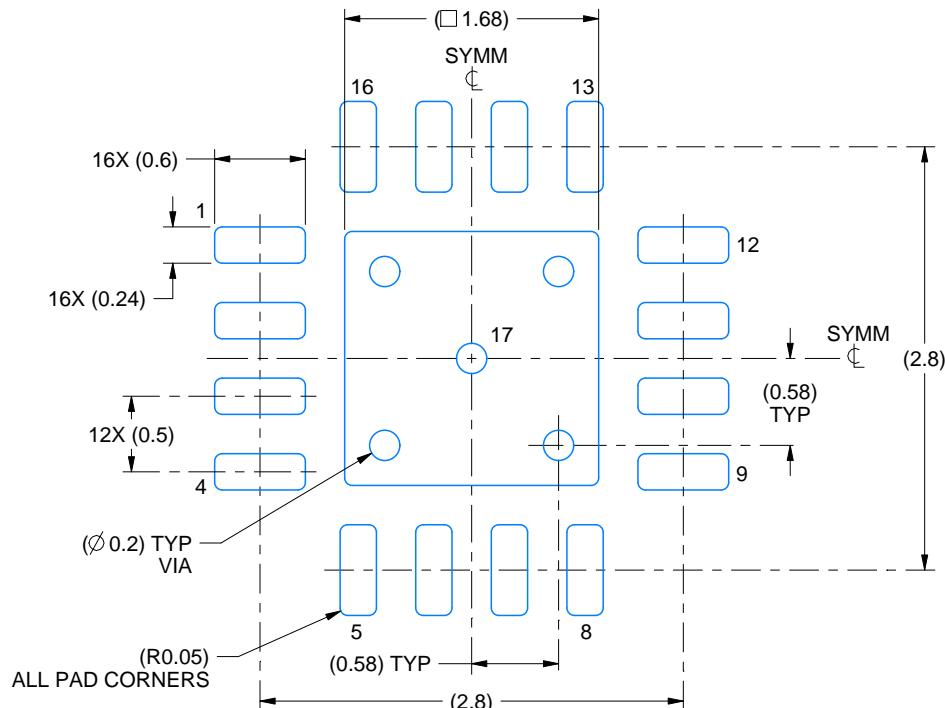

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

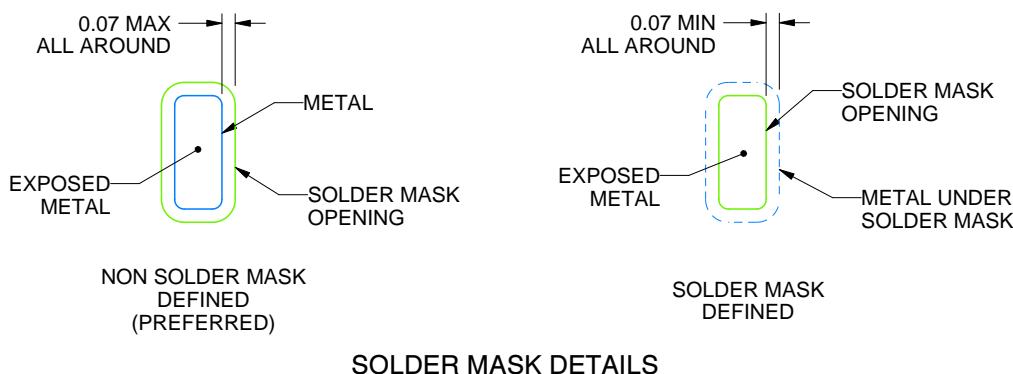

4219117/B 04/2022

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RTE0016C

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

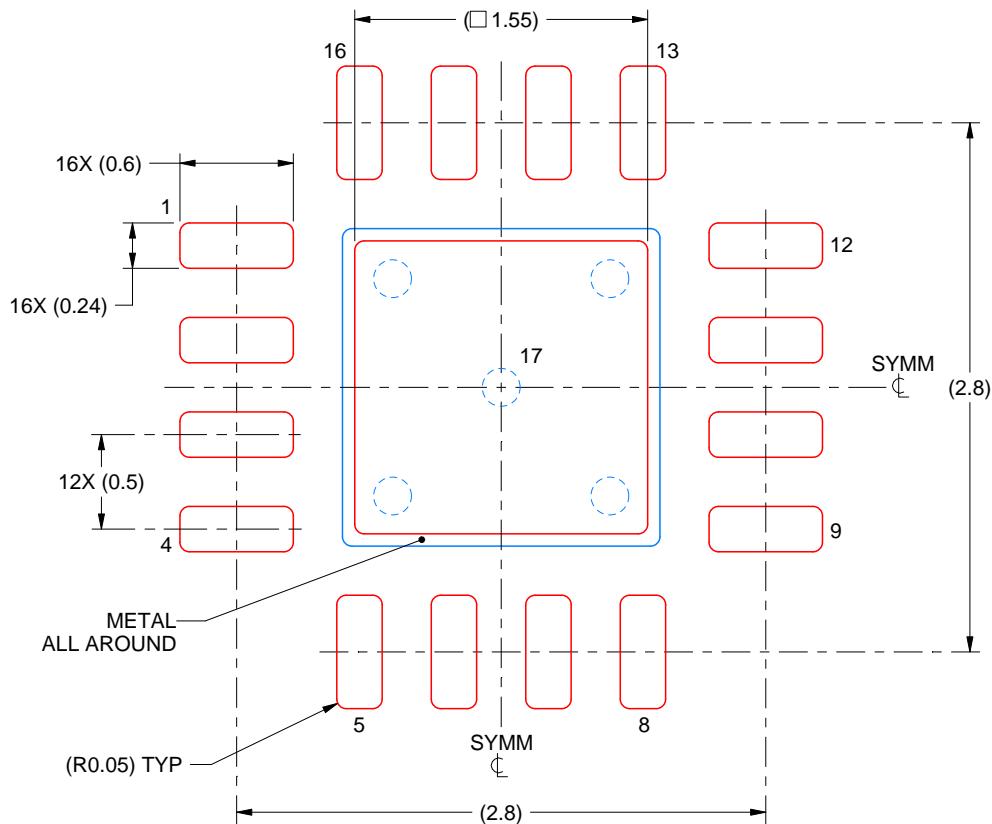

SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 17:
85% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4219117/B 04/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025