







MAX3232E SLLS664E - AUGUST 2005 - REVISED JUNE 2021

MAX3232E 3-V to 5.5-V Multichannel RS-232 Line Driver and Receiver With ±15-kV IEC ESD Protection

1 Features

- ESD protection for RS-232 bus pins
 - ±15 kV (HBM)
 - ±8 kV (IEC61000-4-2, Contact discharge)
 - ±15 kV (IEC61000-4-2, Air-gap discharge)
- Meets or exceeds the requirements of TIA/ EIA-232-F and ITU V.28 standards
- Operates with 3-V to 5.5-V V_{CC} supply
- Operates up to 250 kbit/s
- Two drivers and two receivers
- Low supply current: 300 µA (typical)
- External capacitors: 4 × 0.1 µF
- Accepts 5-V logic input with 3.3-V supply
- Pin compatible to alternative high-speed devices (1 Mbit/s)
 - SN65C3232E (-40°C to +85°C)
 - SN75C3232E (0°C to 70°C)

2 Applications

- Industrial PCs
- Wired networking
- Data center and enterprise computing
- Battery-powered systems
- **Notebooks**
- Palmtop PCs
- Hand-held equipment

3 Description

The MAX3232E device consists of two line drivers. two-line receivers, and a dual charge-pump circuit with ±15-kV IEC ESD protection pin to pin (serial-port connection pins, including GND).

The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. The devices operate at data signaling rates up to 250 kbit/s and a maximum of 30-V/µs driver output slew rate.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)	
	SOIC (D) (16)	9.90 mm × 3.91 mm	
MAX3232E	SSOP (DB) (16)	6.20 mm × 5.30 mm	
WAX3232E	SOIC (DW) (16)	10.30 mm × 7.50 mm	
	TSSOP (PW) (16)	5.00 mm × 4.40 mm	

(1) For all available packages, see the orderable addendum at the end of the data sheet.

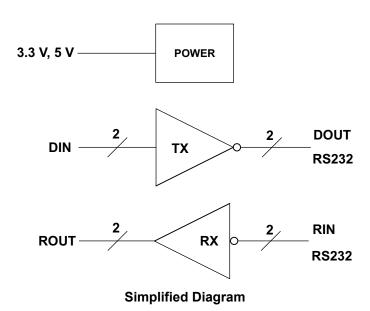




Table of Contents

1 Features	1 8.1 Overview	9
2 Applications		
3 Description		
4 Revision History		
5 Pin Configuration and Functions	3 9 Application and Implementation	
6 Specifications	4 9.1 Application Information	
6.1 Absolute Maximum Ratings		
6.2 ESD Ratings		
6.3 ESD Ratings - IEC Specifications	4 11 Layout	
6.4 Recommended Operating Conditions ⁽¹⁾	4 11.1 Layout Guidelines	
6.5 Thermal Information	5 11.2 Layout Example	13
6.6 Electrical Characteristics — Device(1)	5 12 Device and Documentation Support	14
6.7 Electrical Characteristics — Driver(1)		
6.8 Electrical Characteristics — Receiver ⁽²⁾		
6.9 Switching Characteristics ⁽¹⁾	6 12.3 Trademarks	14
6.10 Typical Characteristics		14
7 Parameter Measurement Information		
8 Detailed Description	9	
Changes from Revision D (May 2017) to Rev		Page
 Added Applications: Industrial PCs, Wired note Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW points. 	rision E (June 2021) networking, and Data center and enterprise computings table. Added a table note about 1-uF capacitor requirementackages	1 nt 4
 Added Applications: Industrial PCs, Wired note Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW poor Changed the thermal parameter values for EC Changes from Revision C (June 2015) to Revision 	networking, and Data center and enterprise computings table. Added a table note about 1-uF capacitor requirements tackages	1 nt 4 5
 Added Applications: Industrial PCs, Wired note Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW poor Changed the thermal parameter values for EC Changes from Revision C (June 2015) to Revision 	networking, and Data center and enterprise computings s table. Added a table note about 1-uF capacitor requireme backagesD, DB and PW packages in the <i>Thermal Information</i> table	1 nt 4 5
 Added Applications: Industrial PCs, Wired note Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW poor Changed the thermal parameter values for EC Changes from Revision C (June 2015) to Revision 	networking, and Data center and enterprise computings table. Added a table note about 1-uF capacitor requirement of table D, DB and PW packages in the <i>Thermal Information</i> table Evision D (May 2017) V _{CC} column of Table 9-1	1 nt 4 5
 Added Applications: Industrial PCs, Wired no. Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW positive. Changed the thermal parameter values for Example 1. Changes from Revision C (June 2015) to Reserve Changed 3 V ± 5.5 V to 3 V to 5.5 V in the Very Changes from Revision B (December 2013) and Added Device Information table, Pin Configuration Section, Device Functional Model Recommendations Section, Layout Section, 	networking, and Data center and enterprise computings table. Added a table note about 1-uF capacitor requirement of table D, DB and PW packages in the <i>Thermal Information</i> table Evision D (May 2017) V _{CC} column of Table 9-1	Page11 Page
 Added Applications: Industrial PCs, Wired no. Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW positive. Changed the thermal parameter values for Example 1. Changes from Revision C (June 2015) to Reserve Changed 3 V ± 5.5 V to 3 V to 5.5 V in the Very Changes from Revision B (December 2013) and Added Device Information table, Pin Configuration Section, Device Functional Model Recommendations Section, Layout Section, 	to Revision C (May 2015) wration and Functions section, ESD Ratings table, Feature less, Application and Implementation section, Power Supply Device and Documentation Support section, and Mechanic on	Page11 Page
 Added Applications: Industrial PCs, Wired note Added the ESD Ratings - IEC Specifications between V_{CC} and GND for D, DB and PW positive of the thermal parameter values for E Changes from Revision C (June 2015) to Revision B (December 2013) to Changes from Revision B (December 2013) to Added Device Information table, Pin Configuration Section, Device Functional Mode Recommendations Section, Layout Section, Packaging, and Orderable Information Section Changes from Revision A (April 2007) to Revision A (April 2007) to Revision Section (Packaging Property of the Packaging Property of the Packaging	to Revision C (May 2015) wration and Functions section, ESD Ratings table, Feature less, Application and Implementation section, Power Supply Device and Documentation Support section, and Mechanic on	Page1 Page1

Submit Document Feedback

Added Thermal Information table......5



5 Pin Configuration and Functions




Figure 5-1. D, DW, DB and PW Package, 16-Pin SOIC, SSOP and TSSOP, Top View

Table 5-1. Pin Functions

	PIN	I/O	DECODINE IOU
NAME			DESCRIPTION
C1+	1	_	Positive lead of C1 capacitor
V+	2	0	Positive charge pump output for storage capacitor only
C1-	3	_	Negative lead of C1 capacitor
C2+	4	_	Positive lead of C2 capacitor
C2-	5	_	Negative lead of C2 capacitor
V-	6	0	Negative charge pump output for storage capacitor only
DOUT2	7	0	RS232 line data output (to remote RS232 system)
RIN2	8	ı	RS232 line data input (from remote RS232 system)
ROUT2	9	0	Logic data output (to UART)
DIN2	10	ı	Logic data input (from UART)
DIN1	11	I	Logic data input (from UART)
ROUT1	12	0	Logic data output (to UART)
RIN1	13	ı	RS232 line data input (from remote RS232 system)
DOUT1	14	0	RS232 line data output (to remote RS232 system)
GND	15	_	Ground
V _{CC}	16	_	Supply Voltage, Connect to external 3-V to 5.5-V power supply



6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		·	MIN	MAX	UNIT
V _{CC}	Supply voltage ⁽²⁾		-0.3	6	V
V+	Positive output supply voltage ⁽²⁾		-0.3	7	V
V-	Negative output supply voltage ⁽²⁾		0.3	– 7	V
V+ - V-	Supply voltage difference ⁽²⁾			13	V
V	Input voltage	Drivers	-0.3	6 7 -7 13 6 25 2 13.2	V
V _I	Input voltage	Receivers	-25		V
V	Output valtage	Drivers	-13.2	6 7 -7 13 6 25 13.2 V _{CC} + 0.3	V
Vo	Output voltage	Receivers	-0.3	V _{CC} + 0.3	V
TJ	Operating virtual junction temperature	·		150	°C
T _{stg}	Storage temperature		-65	150	°C

⁽¹⁾ Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime

(2) All voltages are with respect to network GND.

6.2 ESD Ratings

				VALUE	UNIT
		Human body model (HBM), per ANSI/	All pins except RIN and DOUT	±2000	
V _(ESD)	Electrostatic discharge	EODA/JEDEO 10 004(1)	RIN and DOUT Pins	±15,000	V
(ESD)	Liber colorie diconarge	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	All pins	±1500	

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

6.3 ESD Ratings - IEC Specifications

				VALUE	UNIT
V	Electrostatic discharge	IEC61000-4-2, Contact Discharge ⁽¹⁾	RS232 port pins (RIN, DOUT)	±8000	V
V (ESD)	Electrostatic discharge	IEC61000-4-2, Air-Gap Discharge ⁽¹⁾	RS232 port pins (RIN, DOUT)	±15,000	v

For D, DB and PW packages only: Minimum of 1-μF capacitor is required between V_{CC} and GND to meet the specified IEC 16000-4-2 rating.

6.4 Recommended Operating Conditions(1)

See Typical Operating Circuit and Capacitor Values.

				MIN	NOM	MAX	UNIT
	Complexion		V _{CC} = 3.3 V	3	3.3	3.6	\/
	Supply voltage		V _{CC} = 5 V	4.5	5	5.5	V
\/	Driver high level input veltere	V _{CC} = 3.3 V	2		5.5	\/	
V _{IH}	Driver high-level input voltage	DIN	V _{CC} = 5 V	2.4		5.5	V
V _{IL}	Driver low-level input voltage	DIN		0		8.0	V
VI	Receiver input voltage	RIN		-25		25	V

Product Folder Links: MAX3232E

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.4 Recommended Operating Conditions⁽¹⁾ (continued)

See Typical Operating Circuit and Capacitor Values.

			MIN	NOM MAX	UNIT
T 0::-::-	Operating free air temperature	MAX3232EC	0	70	°C
I A	Operating free-air temperature	MAX3232EI	-40	85	

(1) Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V.

6.5 Thermal Information

			MAX3232E				
	THERMAL METRIC(1)	PW (TSSOP)	D (SOIC)	DW (SOIC)	DB (SSOP)	UNIT	
		16 PINS	16 PINS	16 PINS	16 PINS		
$R_{\theta JA}$	Junction-to-ambient thermal resistance	108.2	85.9	72.3	103.1	°C/W	
R _{0JCtop}	Junction-to-case (top) thermal resistance	39.0	43.1	33.5	49.2	°C/W	
$R_{\theta JB}$	Junction-to-board thermal resistance	54.4	44.5	37.1	54.8	°C/W	
Ψ_{JT}	Junction-to-top characterization parameter	3.3	10.1	7.5	12	°C/W	
ΨЈВ	Junction-to-board characterization parameter	53.8	44.1	37.1	54.1	°C/W	
R _{0JCbot}	Junction-to-case (bottom) thermal resistance	N/A	N/A	N/A	N/A	°C/W	

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

6.6 Electrical Characteristics — Device⁽¹⁾

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Typical Operating Circuit and Capacitor Values).

	PARAMETER	TEST CONDITIONS	MIN TYP(2)	MAX	UNIT
Icc	Supply current	No load, V _{CC} = 3.3 V or 5 V	0.3	1	mA

- (1) Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V.
- (2) All typical values are at $V_{CC} = 3.3 \text{ V}$ or $V_{CC} = 5 \text{ V}$, and $T_A = 25 ^{\circ}\text{C}$.

6.7 Electrical Characteristics — Driver(1)

over operating free-air temperature range (unless otherwise noted) (see Typical Operating Circuit and Capacitor Values).

	PARAMETER	TEST CONDIT	TIONS	MIN	TYP ⁽²⁾	MAX	UNIT
V _{OH}	High-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	DIN = GND	5	5.4		V
V _{OL}	Low-level output voltage	DOUT at $R_L = 3 \text{ k}\Omega$ to GND,	DIN = V _{CC}	-5	-5.4		V
I _{IH}	High-level input current	$V_I = V_{CC}$			±0.01	±1	μΑ
I _{IL}	Low-level input current	V _I at GND			±0.01	±1	μΑ
I _{OS} (3)	Short-circuit output current	V _{CC} = 3.6 V,	V _O = 0 V		±35	+60	mA
ios (°	Short-circuit output current	V _{CC} = 5.5 V,	V _O = 0 V		133		IIIA
r _O	Output resistance	V _{CC} , V+, and V- = 0 V,	V _O = ±2 V	300	10M		Ω

- (1) Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V ± 0.5 V.
- (2) Short-circuit durations should be controlled to prevent exceeding the device absolute power dissipation ratings, and not more than one output should be shorted at a time.
- (3) All typical values are at $V_{CC} = 3.3 \text{ V}$ or $V_{CC} = 5 \text{ V}$, and $T_A = 25 ^{\circ}\text{C}$.



6.8 Electrical Characteristics — Receiver⁽²⁾

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Typical Operating Circuit and Capacitor Values).

	PARAMETER	TEST CONDITIONS	MIN	TYP ⁽¹⁾	MAX	UNIT
V _{OH}	High-level output voltage	I _{OH} = -1 mA	V _{CC} - 0.6	V _{CC} - 0.1		V
V _{OL}	Low-level output voltage	I _{OL} = 1.6 mA			0.4	V
V	Desitive going input threshold voltage	V _{CC} = 3.3 V		1.5	2.4	V
V _{IT+}	Positive-going input threshold voltage	V _{CC} = 5 V		1.8	2.4	
.,	Negative-going input threshold voltage	V _{CC} = 3.3 V	0.6	1.2		V
V_{IT-}	Negative-going input the should voltage	V _{CC} = 5 V	0.8	1.5		V
V _{hys}	Input hysteresis (V _{IT+} - V _{IT-})			0.3		V
r _i	Input resistance	V _I = ±3 V to ±25 V	3	5	7	kΩ

6.9 Switching Characteristics⁽¹⁾

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Typical Operating Circuit and Capacitor Values)


	PARAMETER	TEST	MIN	TYP ⁽²⁾	MAX	UNIT	
	Maximum data rate	$R_L = 3 \text{ k}\Omega$, One DOUT switching,	C _L = 1000 pF, see Driver Slew Rate	150	250		kbit/s
t _{sk(p)}	Driver pulse skew ⁽³⁾	R_L = 3 kΩ to 7 kΩ, see Driver Pulse Skew	C _L = 150 pF to 2500 pF,		300		ns
•	Driver slew rate, transition	$R_1 = 3 k\Omega \text{ to } 7 k\Omega$	C _L = 150 pF to 1000 pF	6	-	30	
SR(tr)	region (see Driver Slew Rate)	V _{CC} = 3.3 V	7 ΚΩ,	30	V/µs		
t _{PLH}	Receiver propagation delay time, low- to high-level output	C _L = 150 pF,			300		ns
t _{PHL}	Receiver propagation delay time, high- to low-level output	see Receiver Propagation	Delay Times		300		ns
t _{sk(p)}	Receiver pulse skew ⁽³⁾				300		ns


Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V ± 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V ± 0.5 V. All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25°C. Pulse skew is defined as $|t_{PLH} - t_{PHL}|$ of each channel of the same device.

All typical values are at V_{CC} = 3.3 V or V_{CC} = 5 V, and T_A = 25 °C. Test conditions are C1–C4 = 0.1 μ F at V_{CC} = 3.3 V \pm 0.3 V; C1 = 0.047 μ F, C2–C4 = 0.33 μ F at V_{CC} = 5 V \pm 0.5 V.

⁽²⁾


6.10 Typical Characteristics

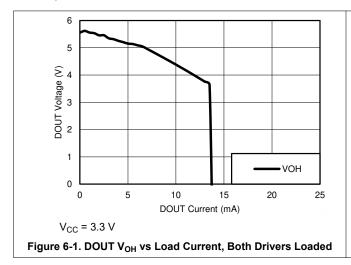






7 Parameter Measurement Information

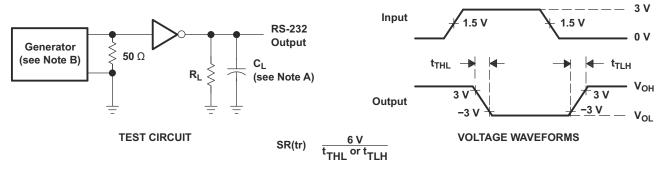


- A. C_L includes probe and jig capacitance
- B. The pulse generator has the following characteristics: PRR = 250 kbit/s, $Z_O = 50 \Omega$, 50% duty cycle, $t_r \le 10$ ns, $t_f \le 10$ ns

Figure 7-1. Driver Slew Rate

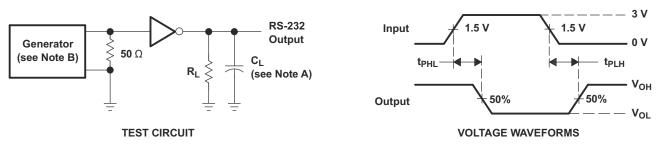

- A. C_L includes probe and jig capacitance
- B. The pulse generator has the following characteristics: PRR = 250 kbit/s, $Z_O = 50 \Omega$, 50% duty cycle, $t_r \le 10$ ns, $t_f \le 10$ ns

Figure 7-2. Driver Pulse Skew

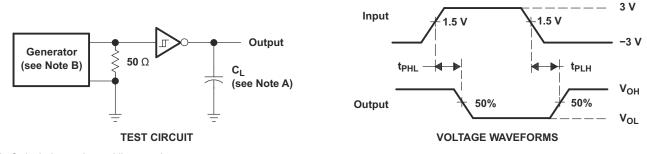

- A. C_L includes probe and jig capacitance
- B. The pulse generator has the following characteristics: Z_O = 50 Ω , 50% duty cycle, $t_r \le 10$ ns, $t_f \le 10$ ns


Figure 7-3. Receiver Propagation Delay Times

8 Detailed Description

8.1 Overview

The MAX3232E device consists of two line drivers, two-line receivers, and a dual charge-pump circuit with IEC61000-4-2 ESD protection terminal to terminal (serial-port connection terminals, including GND). The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. The device operates at data signaling rates up to 250 kbit/s and a maximum of 30-V/µs driver output slew rate. Outputs are protected against shorts to ground.

8.2 Functional Block Diagram

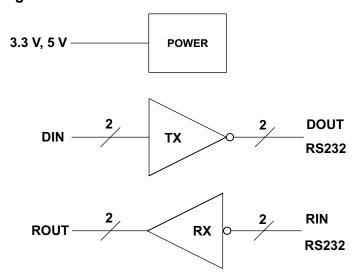

8.3 Feature Description

8.3.1 Power

The power block increases, inverts, and regulates voltage at V+ and V- pins using a charge pump that requires four external capacitors.

8.3.2 RS232 Driver

Two drivers interface standard logic level to RS232 levels. Both DIN inputs must be valid high or low.

8.3.3 RS232 Receiver

Two receivers interface RS232 levels to standard logic levels. An open input will result in a high output on ROUT. Each RIN input includes an internal standard RS232 load.



8.4 Device Functional Modes

Table 8-1 and Table 8-2 list the functional modes of the drivers and receivers of MAX3232E.

Table 8-1. Each Driver⁽¹⁾

	OUTPUT DOUT
L	Н
Н	L

(1) H = high level, L = low level

Table 8-2. Each Receiver(1)

	OUTPUT ROUT
L	Н
Н	L
Open	Н

H = high level, L = low level,
 Open = input disconnected or connected driver off




Figure 8-1. Logic Diagram

8.4.1 V_{CC} Powered by 3 V to 5.5 V

The device is in normal operation.

8.4.2 V_{CC} Unpowered, $V_{CC} = 0 V$

When MAX3232E is unpowered, it can be safely connected to an active remote RS232 device.

Submit Document Feedback

9 Application and Implementation

Note


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

For proper operation, add capacitors as shown in Table 9-1.

9.2 Typical Application

ROUT and DIN connect to UART or general-purpose logic lines. RIN and DOUT lines connect to a RS232 connector or cable.

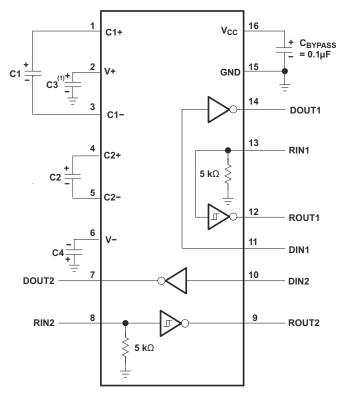

- A. C3 can be connected to V_{CC} or GND
 - A. Resistor values shown are nominal.
 - B. Nonpolorized ceramic capacitors are acceptable. If polarized tantalum or electrolytic capacitors are used, they should be connected as shown.

Figure 9-1. Typical Operating Circuit and Capacitor Values

 V_{CC}
 C1
 C2, C3, C4

 3.3 V ± 0.3 V
 0.1 μF
 0.1 μF

 5 V ± 0.5 V
 0.047 μF
 0.33 μF

 3 V to 5.5 V
 0.1 μF
 0.47 μF

Table 9-1. VCC vs Capacitor Values



9.2.1 Design Requirements

The recommended V_{CC} is 3.3 V or 5 V. 3 V to 5.5 V is also possible

The maximum recommended bit rate is 250 kbit/s.

9.2.2 Detailed Design Procedure

All DIN inputs must be connected to valid low or high logic levels.

Select capacitor values based on V_{CC} level for best performance.

9.2.3 Application Curve

Figure 9-2 curves are for 3.3-V VCC and 250-kbit/s alternative bit data stream.




Figure 9-2. 250 kbit/s Driver to Receiver Loopback Timing Waveform, V_{CC} = 3.3 V

10 Power Supply Recommendations

The supply voltage, V_{CC} , should be between 3 V and 5.5 V. Select the values of the charge-pump capacitors using Table 9-1.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated



11 Layout

11.1 Layout Guidelines

Keep the external capacitor traces short, specifically on the C1 and C2 nodes that have the fastest rise and fall times.

11.2 Layout Example

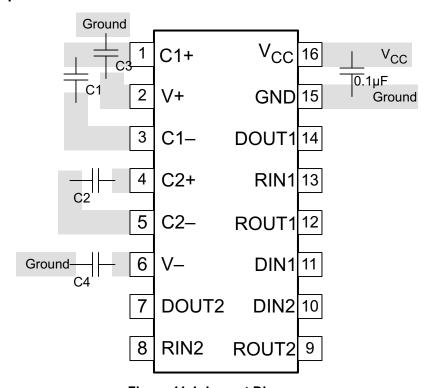


Figure 11-1. Layout Diagram



12 Device and Documentation Support

12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.2 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser based versions of this data sheet, refer to the left hand navigation.

Submit Document Feedback

Copyright © 2021 Texas Instruments Incorporated

www.ti.com 3-May-2024

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
MAX3232ECDBR	ACTIVE	SSOP	DB	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	MP232EC	Samples
MAX3232ECDR	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3232EC	Samples
MAX3232ECDRE4	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3232EC	Samples
MAX3232ECDWR	ACTIVE	SOIC	DW	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3232EC	Samples
MAX3232ECPWR	ACTIVE	TSSOP	PW	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	MP232EC	Samples
MAX3232EIDBR	ACTIVE	SSOP	DB	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP232EI	Samples
MAX3232EIDBRE4	ACTIVE	SSOP	DB	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP232EI	Samples
MAX3232EIDR	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3232EI	Samples
MAX3232EIDWR	ACTIVE	SOIC	DW	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	MAX3232EI	Samples
MAX3232EIPWR	ACTIVE	TSSOP	PW	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP232EI	Samples
MAX3232EIPWRG4	ACTIVE	TSSOP	PW	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	MP232EI	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

PACKAGE OPTION ADDENDUM

www.ti.com 3-May-2024

- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF MAX3232E:

Automotive: MAX3232E-Q1

NOTE: Qualified Version Definitions:

Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



www.ti.com 3-May-2024

TAPE AND REEL INFORMATION



TAPE DIMENSIONS KO P1 BO W Cavity A0

A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
MAX3232ECDBR	SSOP	DB	16	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1
MAX3232ECDR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
MAX3232ECDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
MAX3232ECPWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
MAX3232ECPWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
MAX3232EIDBR	SSOP	DB	16	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1
MAX3232EIDR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
MAX3232EIDWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1
MAX3232EIPWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1



www.ti.com 3-May-2024



*All dimensions are nominal

All difficultions are norminal							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
MAX3232ECDBR	SSOP	DB	16	2000	356.0	356.0	35.0
MAX3232ECDR	SOIC	D	16	2500	356.0	356.0	35.0
MAX3232ECDWR	SOIC	DW	16	2000	350.0	350.0	43.0
MAX3232ECPWR	TSSOP	PW	16	2000	356.0	356.0	35.0
MAX3232ECPWR	TSSOP	PW	16	2000	356.0	356.0	35.0
MAX3232EIDBR	SSOP	DB	16	2000	356.0	356.0	35.0
MAX3232EIDR	SOIC	D	16	2500	356.0	356.0	35.0
MAX3232EIDWR	SOIC	DW	16	2000	350.0	350.0	43.0
MAX3232EIPWR	TSSOP	PW	16	2000	356.0	356.0	35.0

D (R-PDS0-G16)

PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
 4. Reference JEDEC registration MO-150.





NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.





SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing
- per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated